



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology  
Development District, Guangzhou, China 510663  
Tel: +86 20 82155555 Fax: +86 20 82075059  
Email: ee.guangzhou@sgs.com  
**FEDERAL COMMUNICATIONS COMMISSION**  
Registration number: 282399

Report No.: GZEM120700269501  
Page: 1 of 68  
FCC ID: P4LKT120800

## TEST REPORT

<b>Application No.:</b>	GZEM1207002695AV
<b>Applicant:</b>	Foshan Lanchiya Digital Technology Co., Ltd.
<b>FCC ID:</b>	P4LKT120800
<b>Product Name:</b>	Digital Active Loudspeaker
<b>Product Description:</b>	Speaker with BT function to transmit and receive audio signal.
<b>Model No.:</b>	KT4559, KT1, KT1B ♦
♦	Please refer to section 3 of this report for details
<b>Trade Mark:</b>	F3
<b>Standards:</b>	47 CFR PART 15 Subpart C: 2011 section 15.247
<b>Date of Receipt:</b>	2012-07-26
<b>Date of Test:</b>	2012-07-26 to 2012-08-01
<b>Date of Issue:</b>	2012-08-02
<b>Test Result :</b>	Pass*

- \* In the configuration tested, the EUT detailed in this report complied with the standards specified above.  
Please refer to section 3 of this report for further detail.

Authorized Signature:

Strong Yao  
Manager


The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2012-08-02		Original

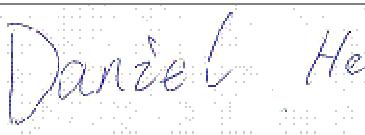Authorized for issue by:			
Tested By		 (Daniel He) /Signature	2012-07-26 to 2012-08-01 Date
Prepared By		 (Daniel He) /Signature	2012-08-02 Date
Checked By		 (Strong Yao) /Reviewer	2012-08-02 Date

### 3 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(1)	ANSI C63.10: Clause 6.9.1	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1)	ANSI C63.10: Clause 7.7.2	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(iii)	ANSI C63.10: Clause 7.7.3	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(iii)	ANSI C63.10: Clause 7.7.4	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15 C section 15.247(a)(1)	ANSI C63.10: Clause 7.7.5	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(1)	ANSI C63.10: Clause 6.10.1	PASS
Conducted Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.7	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS

**Remark:**

N/A: not applicable. Refer to the relative section for the details.

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

Model No.: KT4559,KT1,KT1B

According to the confirmation from the applicant, since the electrical circuit design, layout, components used and internal wiring were identical for the above items, only difference being the rating label, color and model No.

Therefore only one item KT4559 was tested in this report.

## 4 Contents

<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 VERSION.....</b>	<b>2</b>
<b>3 TEST SUMMARY .....</b>	<b>3</b>
<b>4 CONTENTS.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION .....</b>	<b>5</b>
5.1 Client Information .....	5
5.2 General Description of E.U.T .....	5
5.3 Details of E.U.T .....	5
5.4 Modulation configure .....	6
5.5 Description of Support Units .....	6
5.6 Deviation from Standards .....	6
5.7 Abnormalities from Standard Conditions .....	7
5.8 Other Information Requested by the Customer .....	7
5.9 Test Location .....	7
5.10 Test Facility .....	8
<b>6 EQUIPMENT USED DURING TEST .....</b>	<b>9</b>
<b>7 TEST RESULTS .....</b>	<b>11</b>
7.1 E.U.T. test conditions.....	11
7.2 Antenna Requirement.....	13
7.3 Occupied Bandwidth .....	14
7.4 Carrier Frequencies Separated.....	19
7.5 Hopping Channel Number.....	23
7.6 Dwell Time .....	25
7.7 Pseudorandom Frequency Hopping Sequence .....	36
7.8 Maximum Peak Output Power.....	38
7.9 Conducted Spurious Emissions .....	43
7.10 Radiated Spurious Emissions .....	46
7.11 Band Edges Requirement .....	62
7.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz .....	65

## 5 General Information

### 5.1 Client Information

Applicant: Foshan Lanchiya Digital Technology Co., Ltd.  
Address of Applicant: No.1 Hongtu Rd., Songxia Ind. Park, Songgang, Nanhai Foshan, Guangdong China

### 5.2 General Description of E.U.T.

Product Name: Digital Active Loudspeaker  
Model No.: KT4559

### 5.3 Details of E.U.T.

Operating Frequency	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $(\pi/4)$ DQPSK, 8DPSK
Number of Channels	79 Channels
Channel Separation:	1 MHz
Dwell time	Per channel is less than 0.4s.
Antenna Type	PCB Layout
Antenna gain:	2 dBi
Speciality:	Bluetooth 2.1 with EDR
Function:	Speaker with BT function to transmit and receive audio signal.
Power Supply:	AC 100-240V 50-60Hz DC 3V "size CR2032" for remote controller
Adaptor:	Model: SAW24-120-2000 Input: AC 100-240V 50-60Hz 0.8A Output: DC12V 2000mA
Power cord:	1.8 m x 2 wires unscreened DC cable


## 5.4 Modulation configure

Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	24
	DH3	11	183
	DH5	15	339
( $\pi/4$ )DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021

**Remark:**

### Modulation 8-DPSK

The modulation 8 PSK works with 8 phases between 0 and  $2\pi$  (0 and 360 degrees), it can be seen below in the circle.

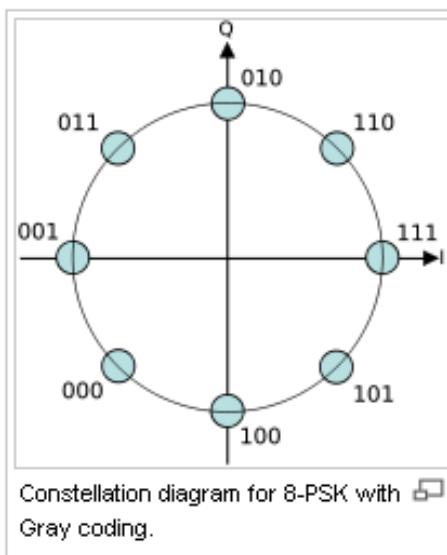

Normal mode: the Bluetooth has been tested on the Modulation of GFSK;

EDR mode: the Bluetooth has been tested on the Modulation of ( $\pi/4$ )DQPSK and 8DPSK, compliance test and record the worst case on 8DPSK.

## 5.5 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

## 5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

## **5.7 Abnormalities from Standard Conditions**

None.

## **5.8 Other Information Requested by the Customer**

None.

## **5.9 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,  
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

## 5.10 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IEC6006-10 and Rules of procedure IEC6006-10, and the relevant IEC600 CB-Scheme Operational documents.

## 6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration
					(YYYY-MM-DD)	
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-09-06	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-11-11	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2013-03-12	1Y
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2013-06-01	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2012-10-20	1Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2012-11-28	1Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2012-11-28	1Y
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2012-10-20	1Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2014-07-01	2Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2013-03-12	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2013-03-12	1Y
EMC0075	310N Amplifier	Sonama	310N	272683	2013-03-12	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2012-11-17	1Y
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONI	BBHA 9170	9170-375	2014-06-01	3Y
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-04-27	2Y



# SGS-CSTC Standards Technical Services Co., Ltd.

Report No.: GZEM120700269501

Page: 10 of 68

FCC ID: P4LKT120800

Conducted Emission						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m <sup>3</sup>	N/A	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2012-08-29	1Y
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2012-11-23	1Y
EMC2046	Artificial Mains Network (LISN)	AFJ Instruments	LT32C	S.N.32031120150	2013-03-12	1Y
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2012-11-24	1Y
EMC0107	Coaxial Cable	SGS	2m	N/A	2013-07-10	1Y
EMC0106	Voltage Probe	SGS	N/A	N/A	N/A	1Y
EMC0120	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	20550	2012-11-11	1Y
EMC0121	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	20549	2012-11-11	1Y
EMC0122	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	20548	2012-11-11	1Y
EMC2047	CDN	Elektronik-Feinmechanik	L-801:AF2	2793	2014-11-11	3Y
EMC2048	CDN	Elektronik-Feinmechanik	L-801:M2/M3	2738	2014-11-11	3Y
EMC167	Conical metal housing	SGS-EMC	N/A	N/A	2013-02-16	1Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0006	DMM	Fluke	73	70681569	2012-11-14	1Y
EMC0007	DMM	Fluke	73	70671122	2012-11-14	1Y

## 7 Test Results

### 7.1 E.U.T. test conditions

**Test Voltage:** AC 120V, 60 Hz

**Temperature:** 20.0 -25.0 °C

**Humidity:** 38-50 % RH

**Atmospheric Pressure:** 1000 -1010 mbar

**Test frequencies and frequency range:** According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

#### Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

#### Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434
33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	74	2476
43	2445	59	2461	75	2477
44	2446	60	2462	76	2478
45	2447	61	2463	77	2479
46	2448	62	2464	78	2480
47	2449	63	2465		
48	2450	64	2466		

Test frequencies are the lowest channel: 0 channel(2402 MHz), middle channel: 39 channel(2441 MHz) and highest channel: 78 channel(2480 MHz)

## 7.2 Antenna Requirement

### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed.

Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.0dBi.

**Test result: The unit does meet the FCC requirements.**

### 7.3 Occupied Bandwidth


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Method:** ANSI C63.10: Clause 6.9.1

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data package. Compliance test in normal mode (DH5) and EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

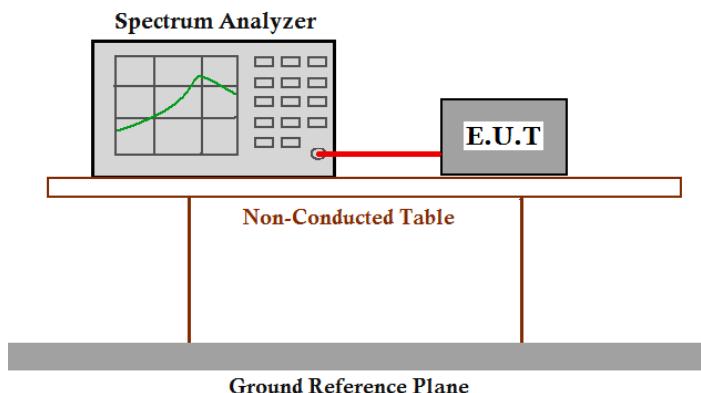

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20Db bandwidth, centring on a hopping channel;
3. Set the spectrum analyzer: RBW  $\geq$  1% of the 20Db bandwidth VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20Db points bandwidth.

**Test result:****Normal mode:**

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.1323	0.7549
Middle	1.1323	0.7549
Highest	1.1423	0.7615


**EDR mode:**

Test Channel	bandwidth	2/3 bandwidth
Lowest	1.4128	0.9419
Middle	1.4128	0.9419
Highest	1.4128	0.9419


Result plot as follows:



DH5:

Lowest Channel:

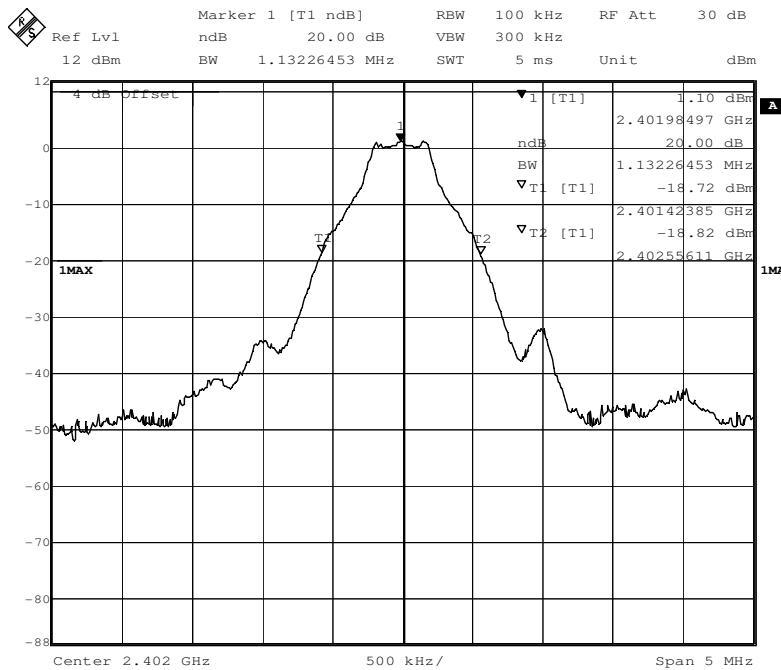


Middle Channel:

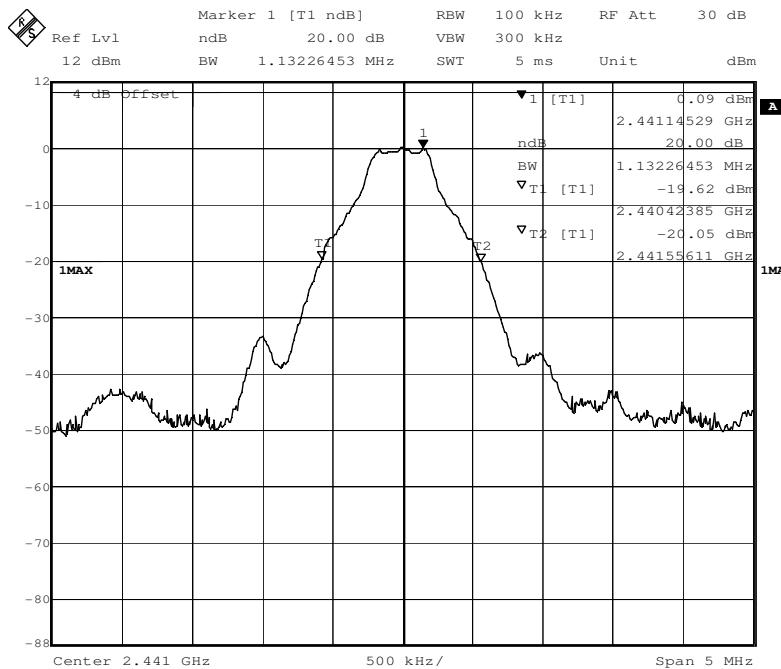


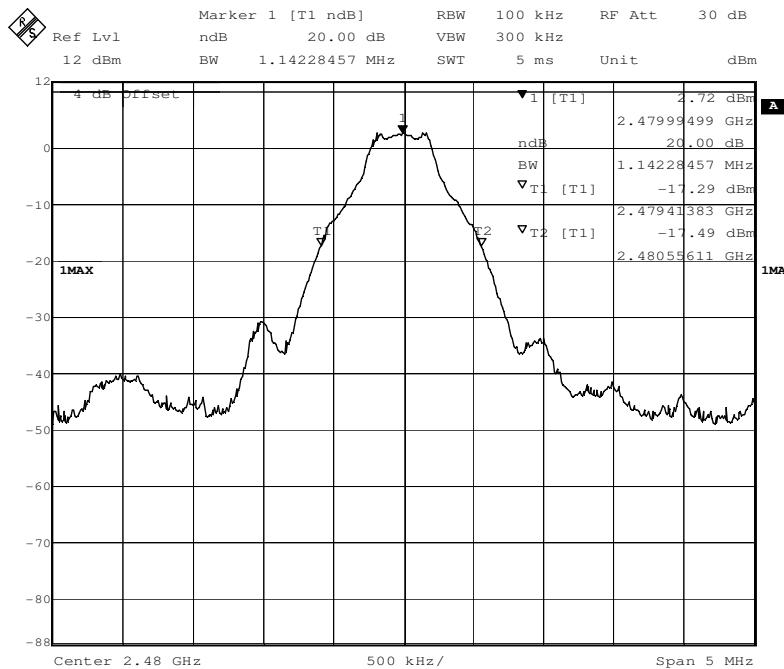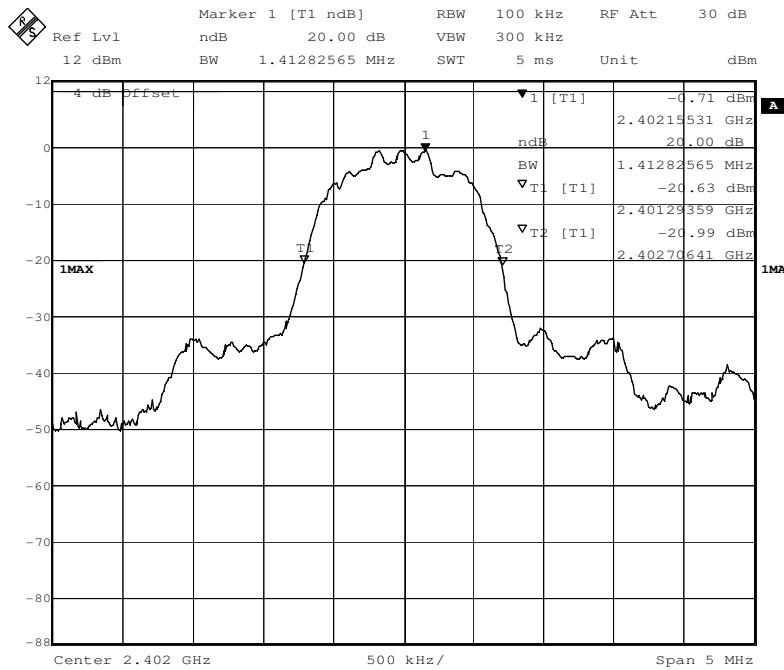**Highest Channel:**

**3DH5:**
**Lowest channel:**

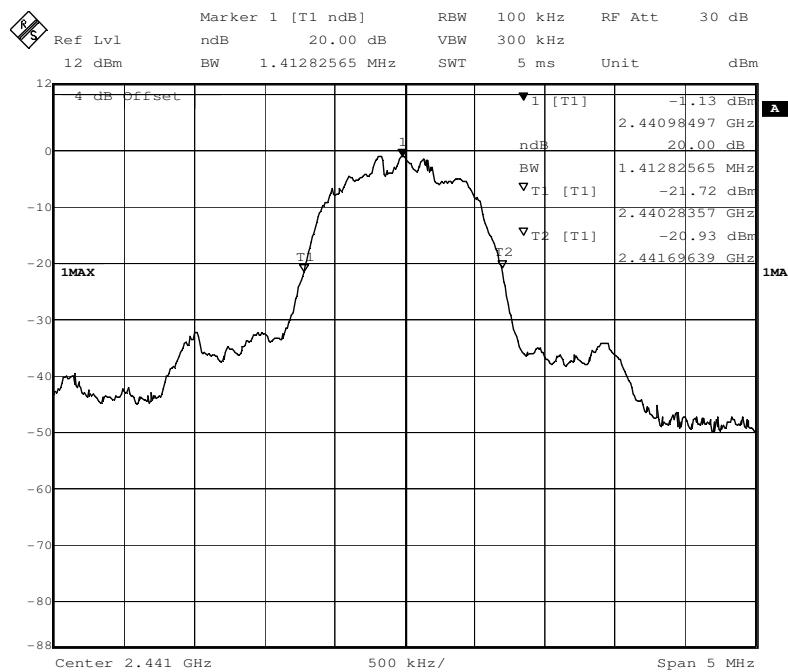
Middle channel:

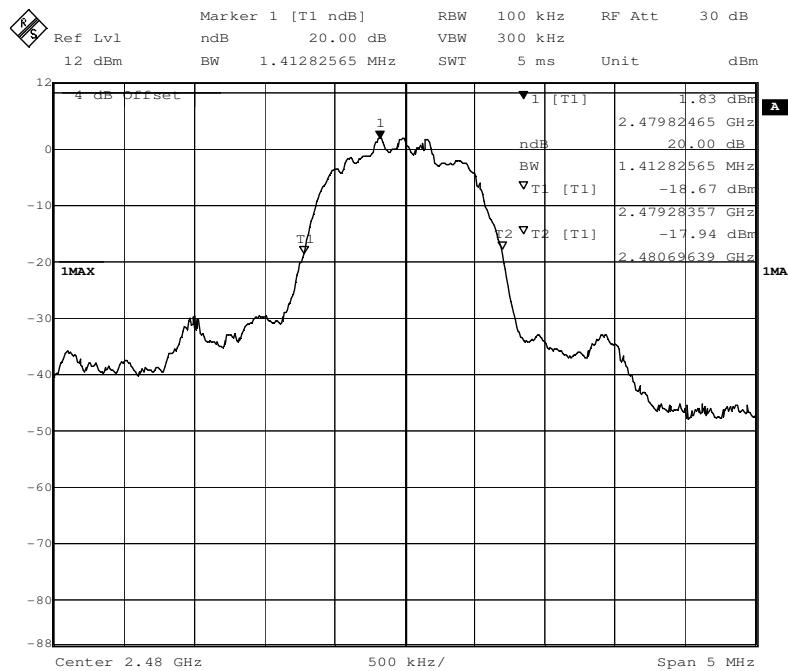

Highest channel:



## 7.4 Carrier Frequencies Separated


**Test Requirement:** FCC Part 15 C section 15.247

(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Method:** ANSI C63.10: Clause 7.7.2

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in hopping with Normal mode (DH5) as the worst case was found.

**Test Configuration:**

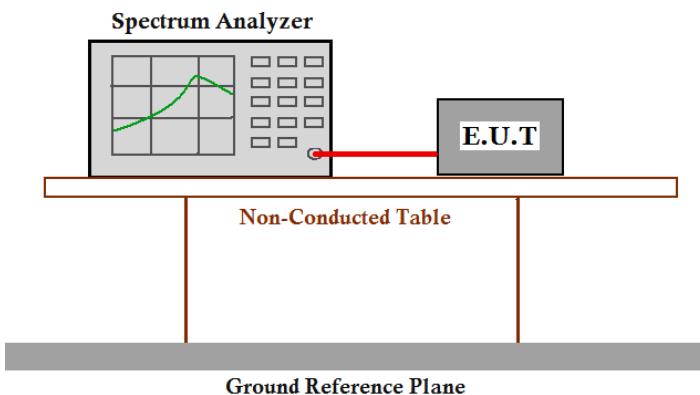

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1% of the span, VBW  $\geq$  RBW, Sweep = auto; Detector Function = Peak. Trace = Max, hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


**Test result:**

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.002	Pass
Middle Channels (channel 39 and channel 40)	1.012	Pass
Upper Channels (channel 77 and channel 78)	1.022	Pass


Remark:


The limit is maximum two-thirds of the 20 dB bandwidth: 941.9KHz.

### 1. Lowest Channels: Carrier Frequencies Separated

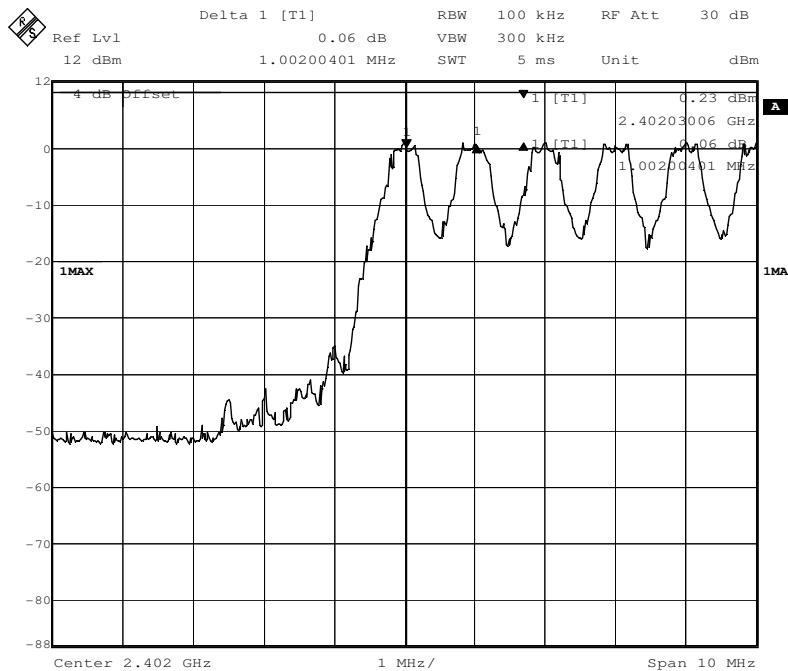

### 2. Middle Channels: Carrier Frequencies Separated

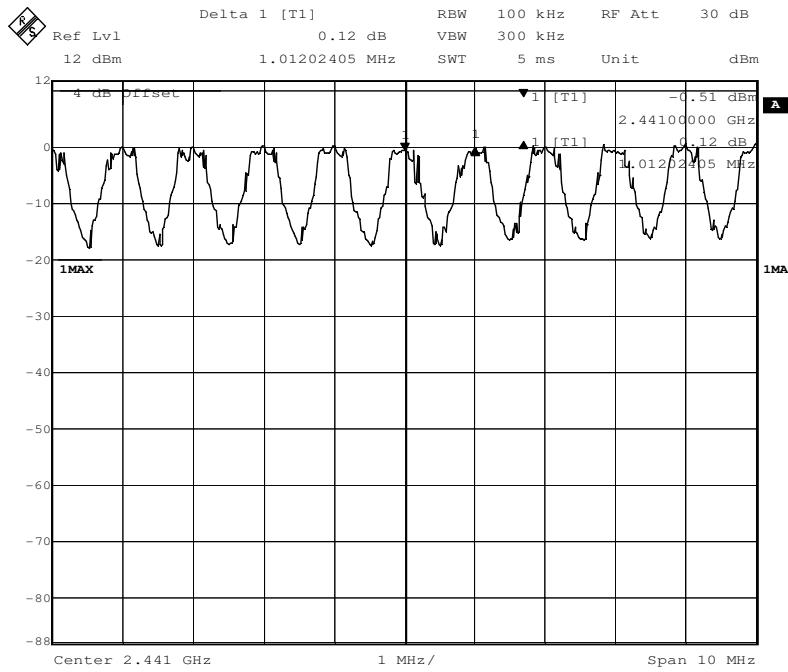

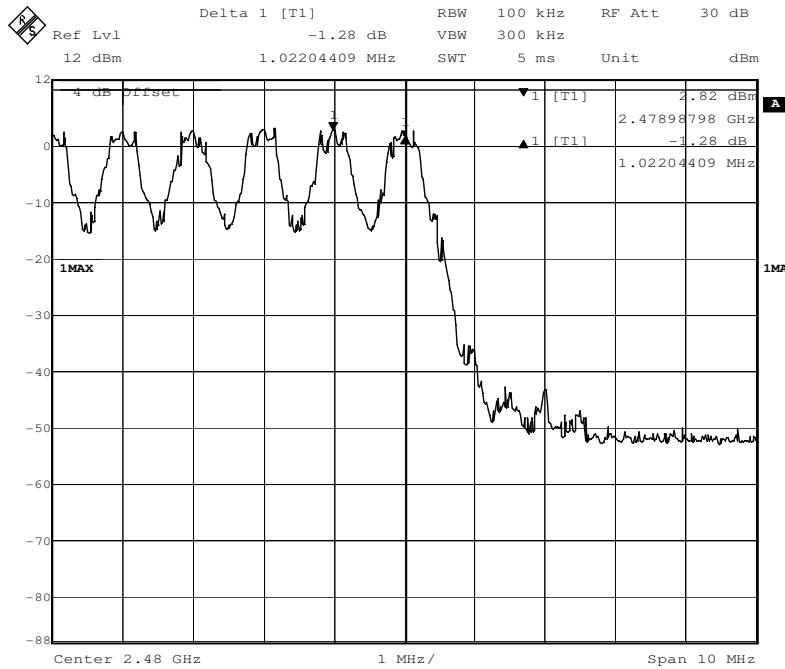**3. Highest Channels: Carrier Frequencies Separated****Test result: The unit does meet the FCC requirements.**

## 7.5 Hopping Channel Number


**Test Requirement:** FCC Part15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

**Test Method:** ANSI C63.10: Clause 7.7.3


**Test Status:** Pre-test the EUT in hopping mode with different data packet. Compliance test in hopping with Normal mode (DH5) as the worst case was found.

**Test Configuration:**

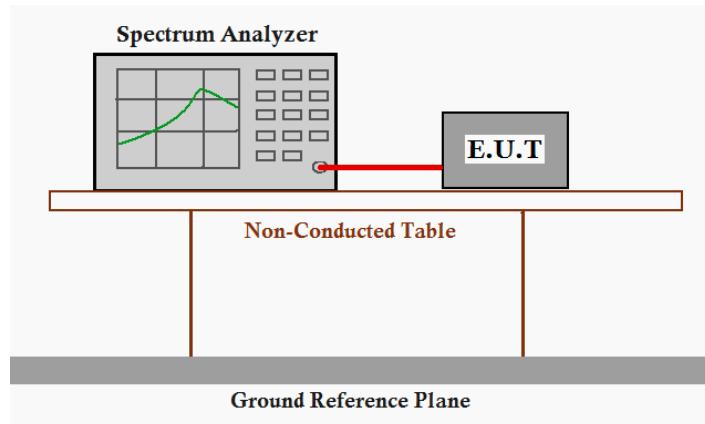

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400 MHz. stop frequency = 2483.5 MHz. Submit the test result graph.

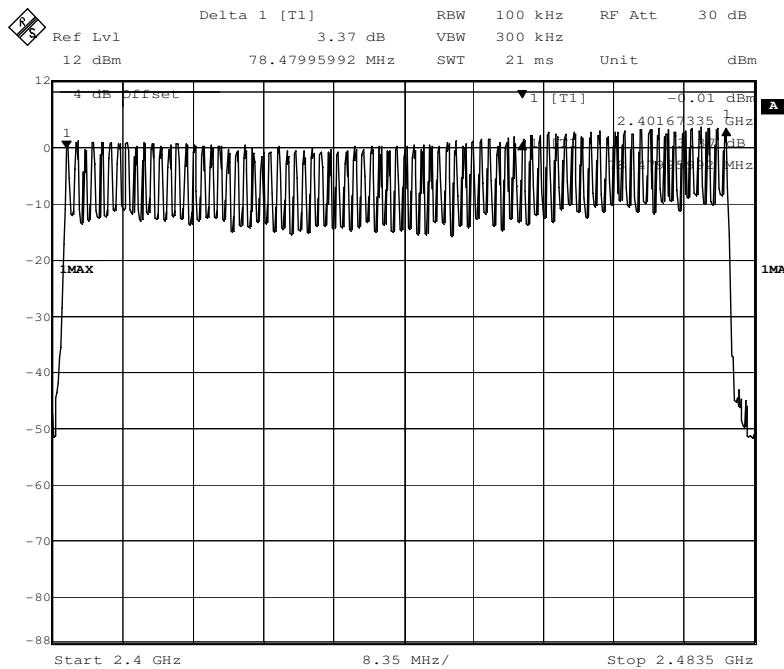**Test result:** Total channels are 79 channels.**Test result:** The unit does meet the FCC requirements.

## 7.6 Dwell Time


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Method:** ANSI C63.10: Clause 7.7.4

**Test Status:** Test the EUT in hopping mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in hopping mode with EDR mode (3DH1, 3DH3 and 3DH5) as the worst case was found.

**Test Configuration:**

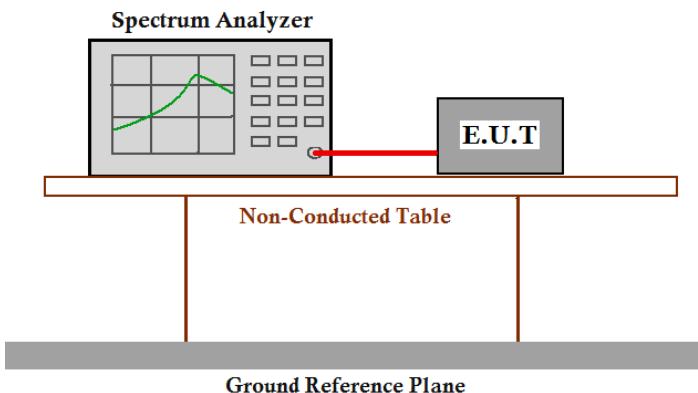

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
  2. Set spectrum analyzer span = 0. centered on a hopping channel;
  3. Set RBW = 1 MHz and VBW = 1 MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;
  4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). Repeat this test for each variation.
- The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

**Test Result:**

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

**1. Channel 0: 2.402GHz**

3DH1 time slot	=	0.406	(ms)	*	32	*	(31.6/3.16)	=	129.792	ms
3DH3 time slot	=	1.667	(ms)	*	16	*	(31.6/3.16)	=	266.720	ms
3DH5 time slot	=	2.910	(ms)	*	11	*	(31.6/3.16)	=	320.078	ms

**2. Channel 39: 2.441GHz**

3DH1 time slot	=	0.414	(ms)	*	32	*	(31.6/3.16)	=	132.608	ms
3DH3 time slot	=	1.675	(ms)	*	16	*	(31.6/3.16)	=	268.064	ms
3DH5 time slot	=	2.919	(ms)	*	11	*	(31.6/3.16)	=	321.046	ms

**3. Channel 78: 2.480GHz**

3DH1 time slot	=	0.414	(ms)	*	32	*	(31.6/3.16)	=	132.608	ms
3DH3 time slot	=	1.667	(ms)	*	16	*	(31.6/3.16)	=	266.640	ms
3DH5 time slot	=	2.910	(ms)	*	11	*	(31.6/3.16)	=	320.078	ms

The average time of occupancy in the specified 31.6 second period is equal to pulse width\*(# of pulse in observation period)\*(test period / observation period)

The results are not greater than 0.4 seconds.


**The unit does meet the FCC requirements.**

Please refer the graph as below:


1. Lowest channel (2.402 GHz):

(1). 3DH1

Pulse Width:

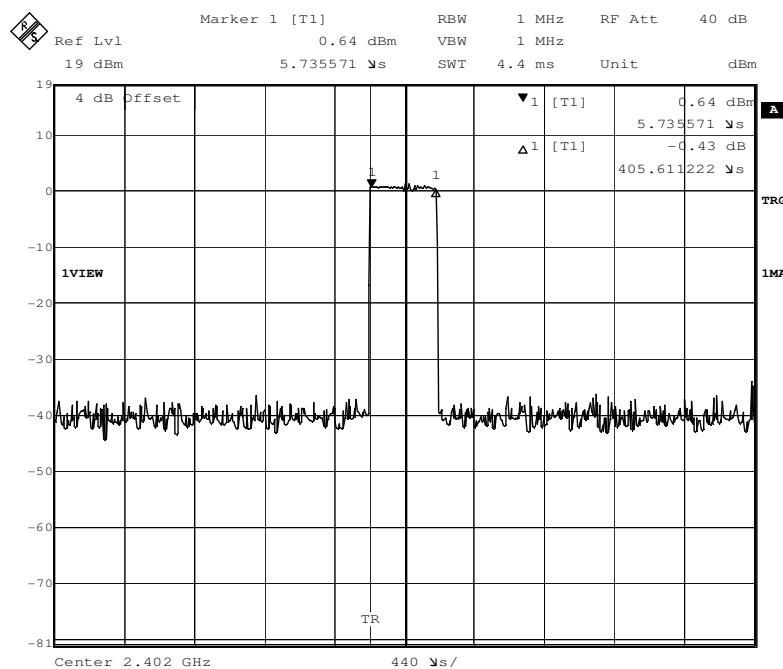


Number of Pulses in 3.16 S observation period:

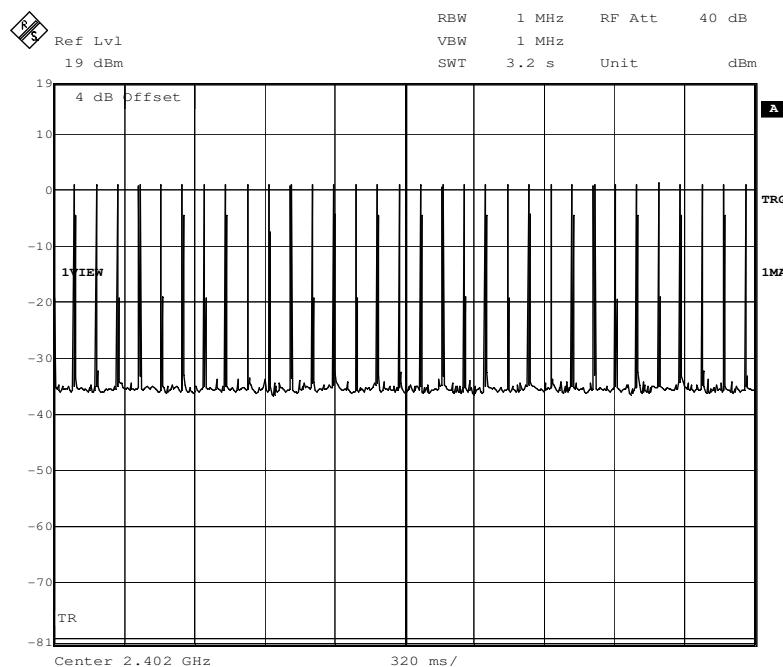


(2) 3DH3

Pulse Width:

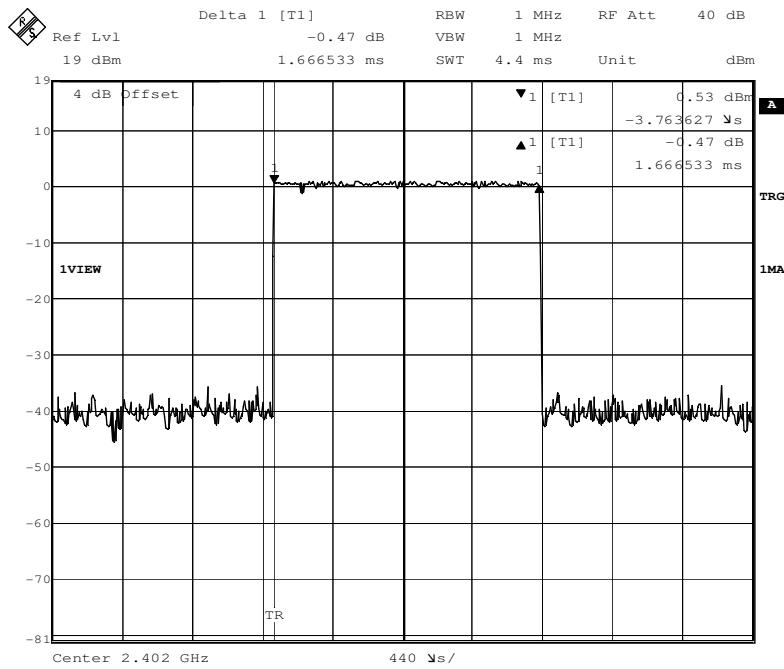


Number of Pulses in 3.16 S observation period:

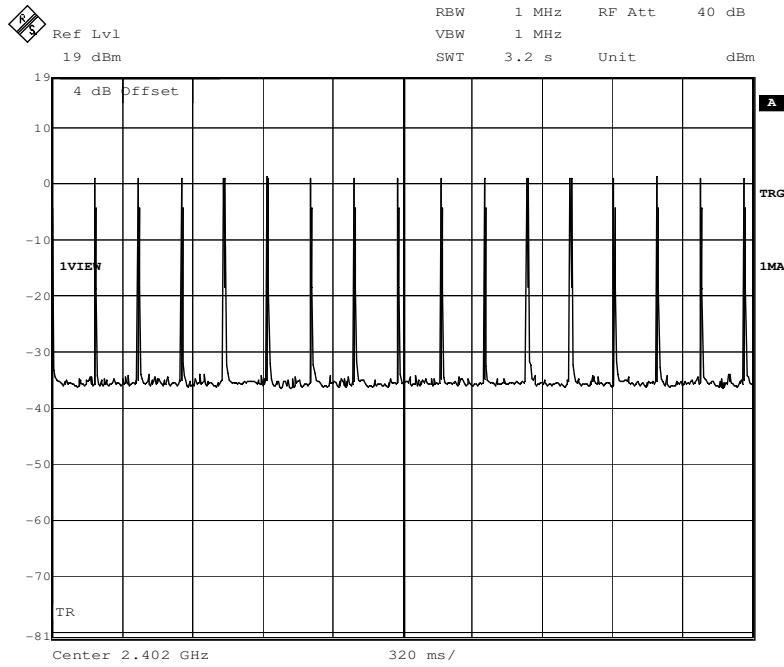


(3) 3DH5

Pulse Width:

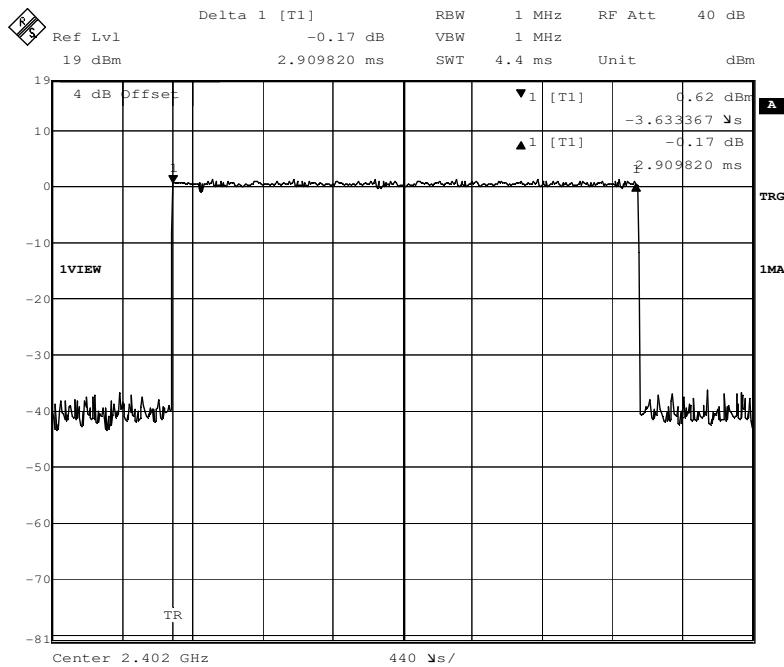


Number of Pulses in 3.16 S observation period:

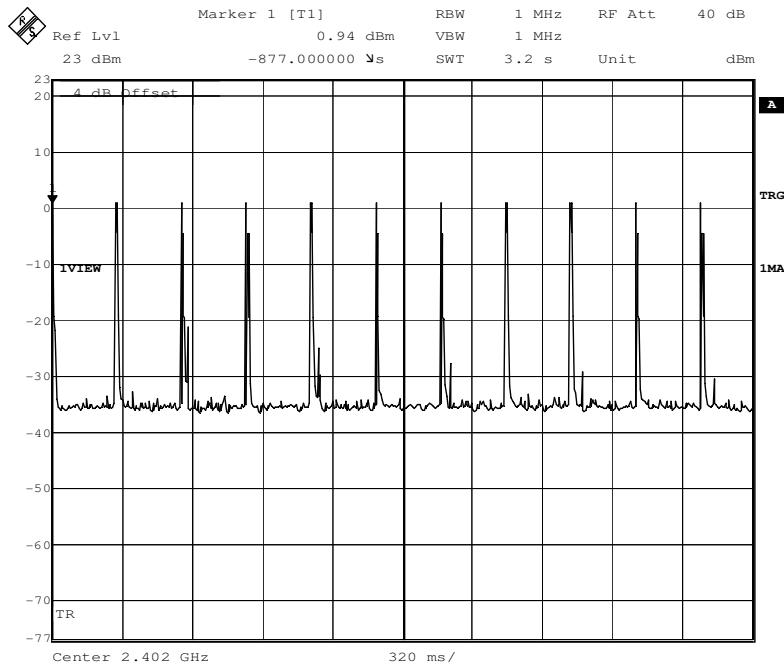


## 2. Middle Channel (2.441 GHz)

### (1). 3DH1

Pulse Width:

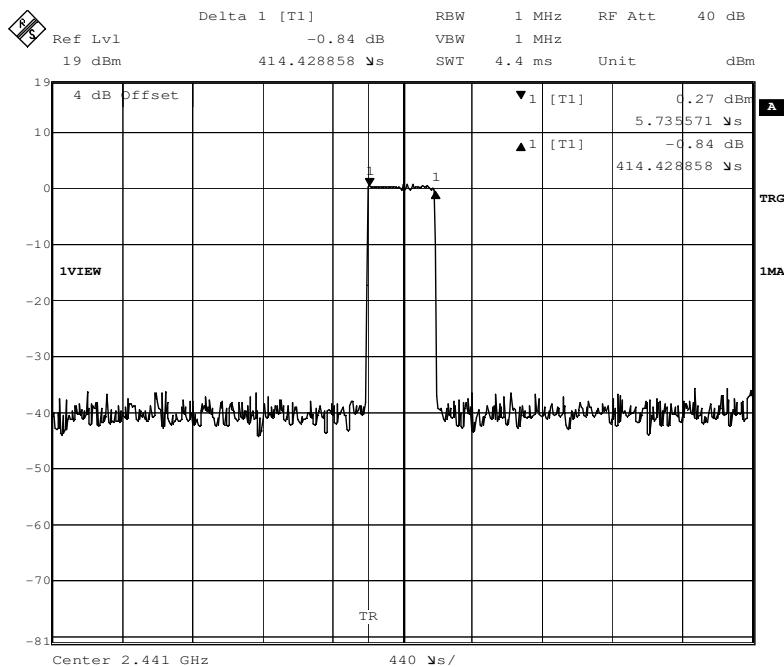


Number of Pulses in 3.16 S observation period:

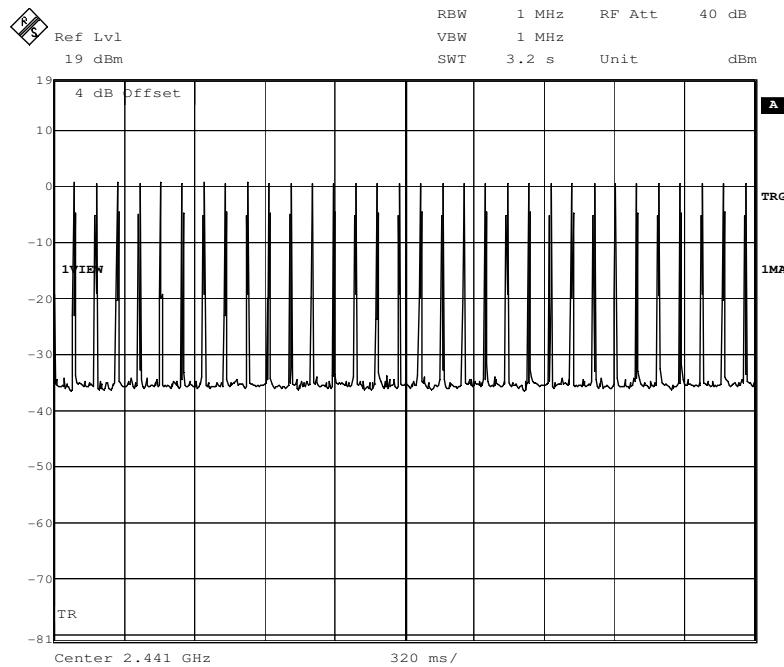




(2) 3DH3

Pulse Width:

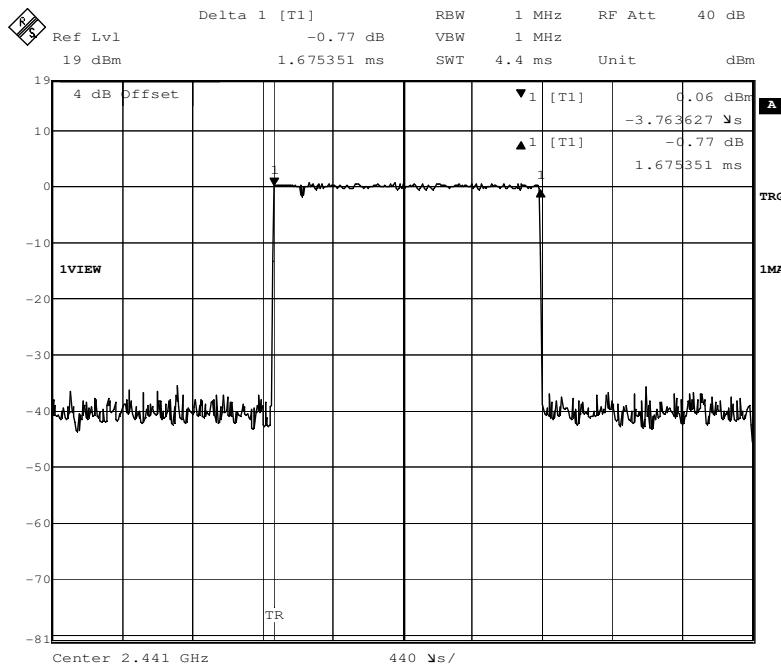

Number of Pulses in 3.16 S observation period:

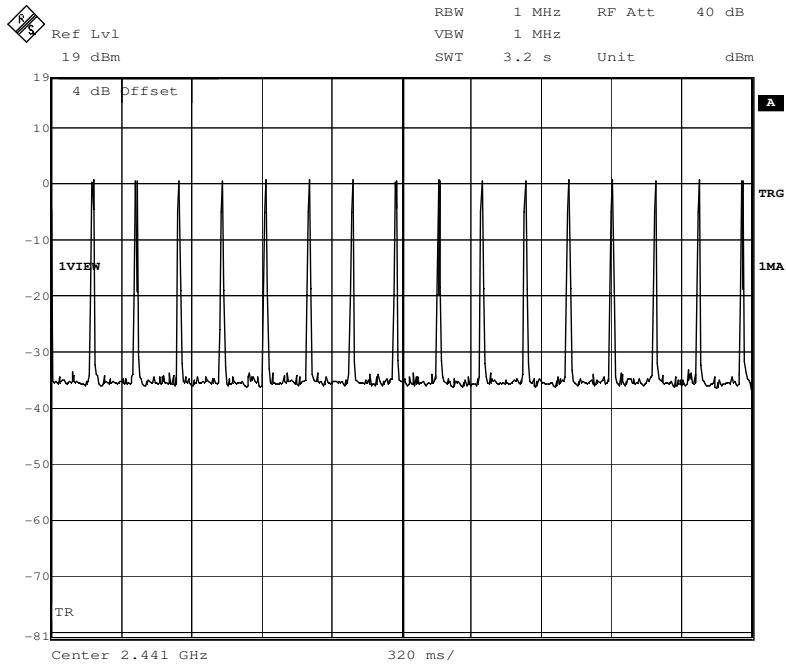


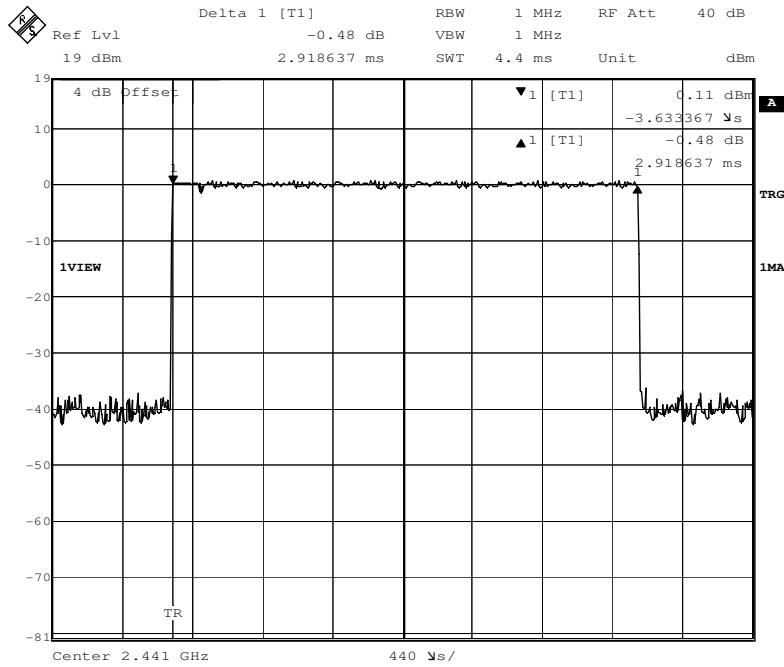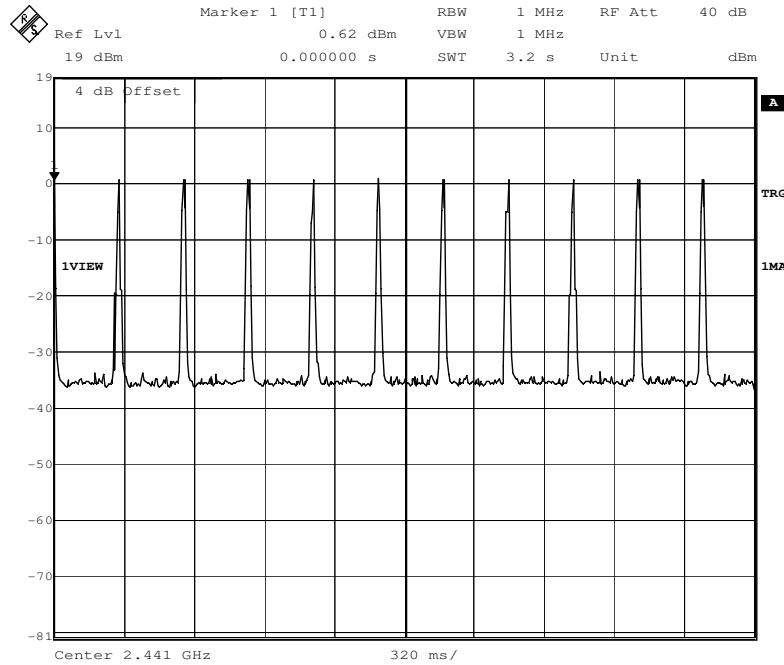**(3) 3DH5**
**Pulse Width:**

**Number of Pulses in 3.16 S observation period:**


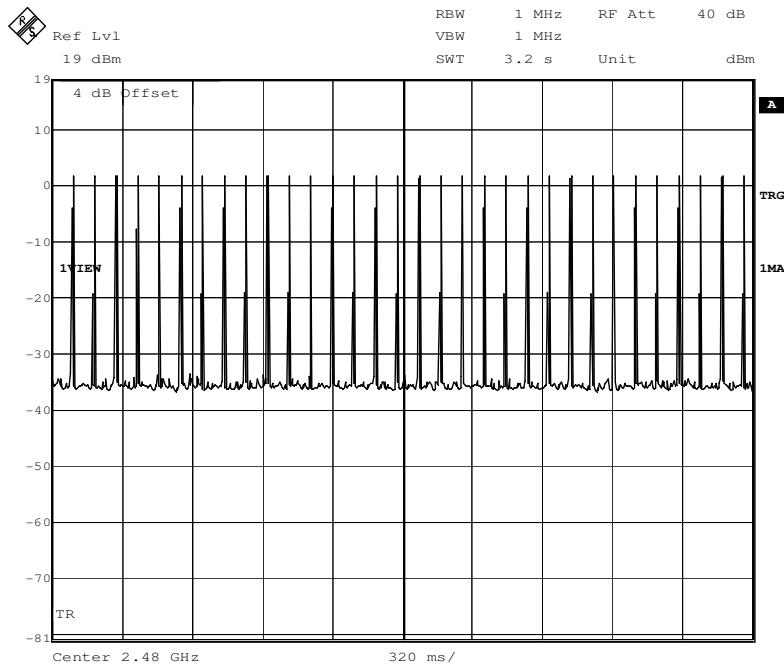
### 3. Highest Channel (2.480 GHz)

#### (1). 3DH1

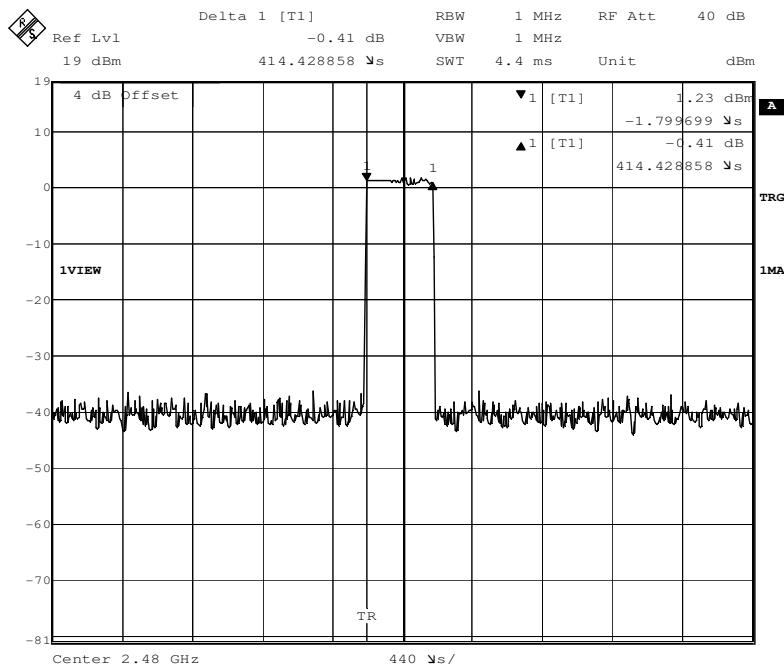Pulse Width:




Number of Pulses in 3.16 S observation period:




(2) 3DH3

Pulse Width:

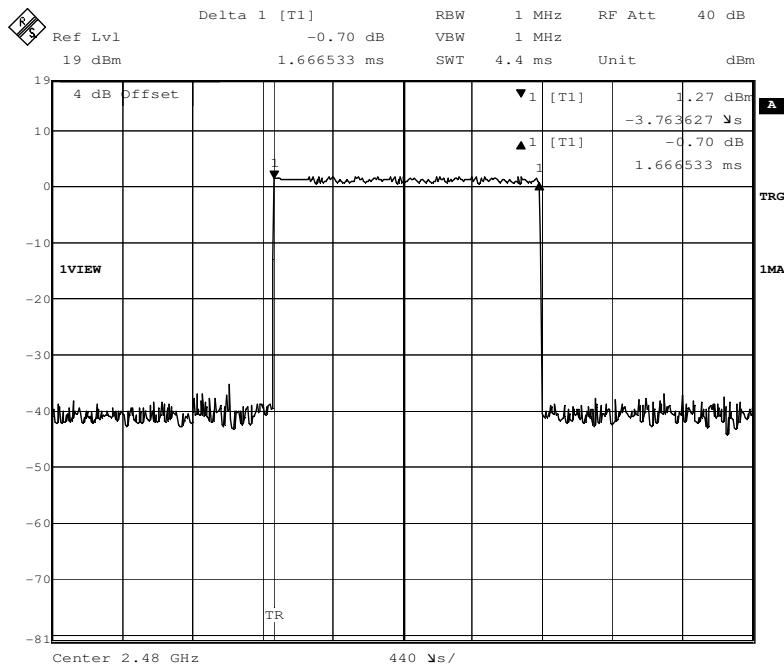


Number of Pulses in 3.16 S observation period:

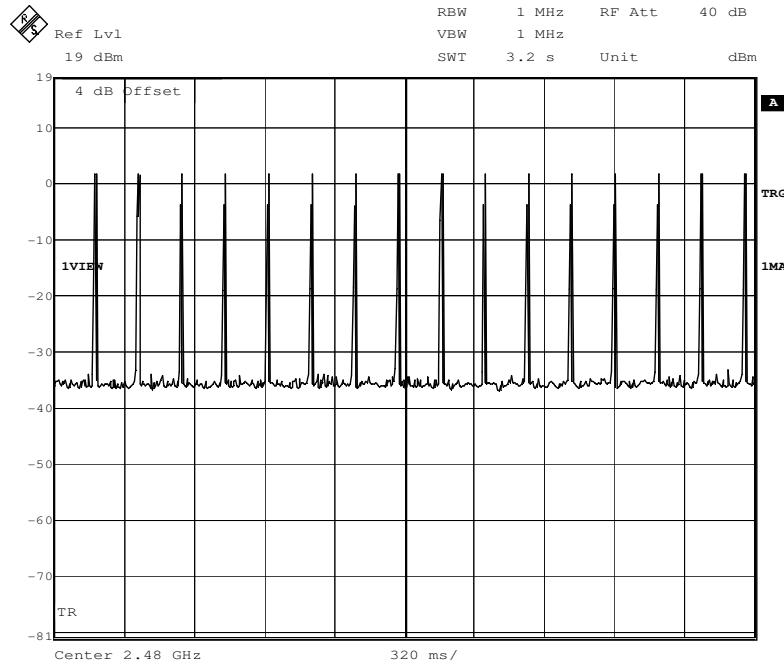


(3) 3DH5

Pulse Width:

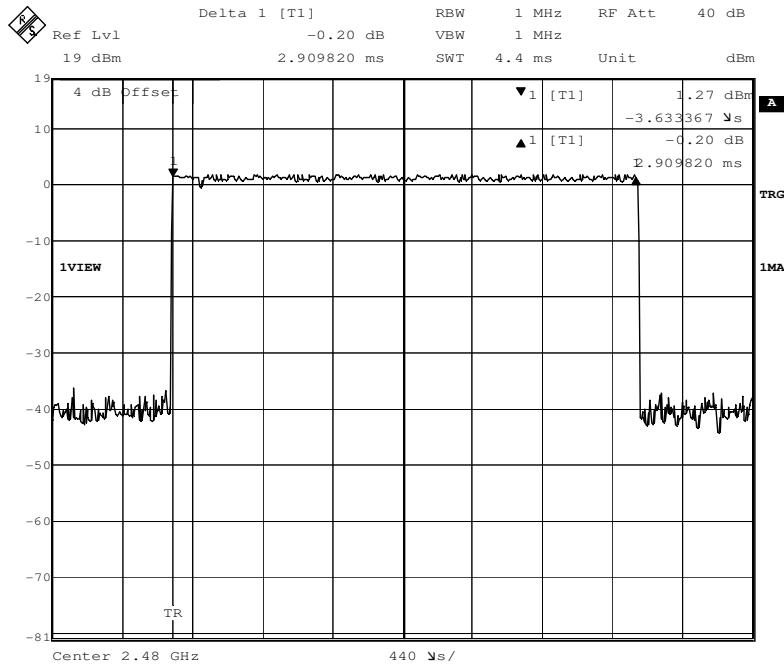

Number of Pulses in 3.16 S observation period:

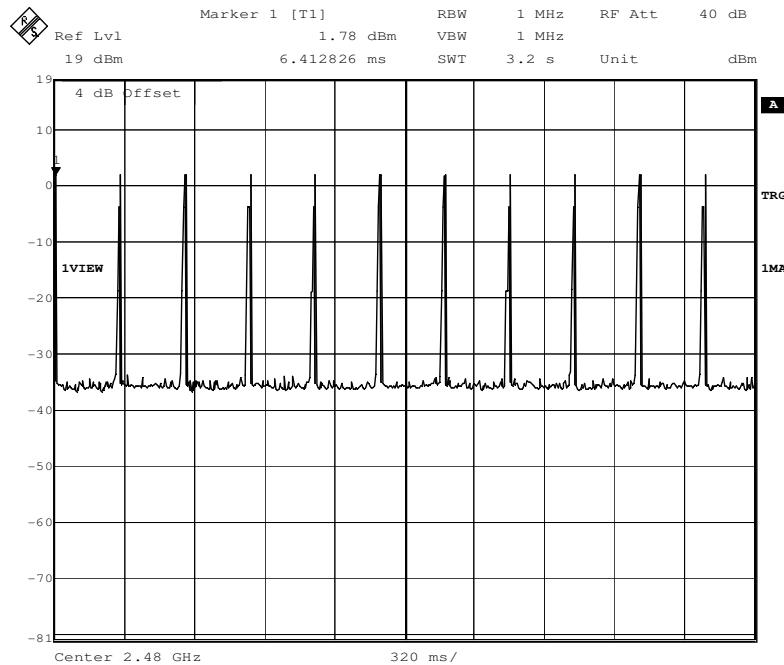

## 7.7 Pseudorandom Frequency Hopping Sequence

### 7.7.1 Standard requirement

15.247(a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 7.7.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

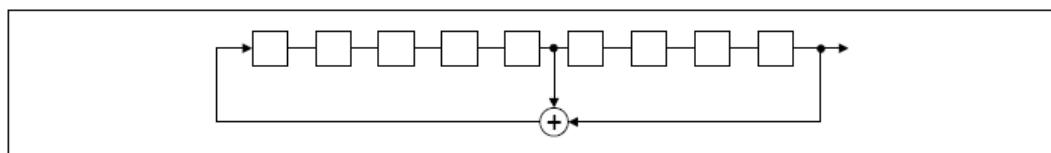

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

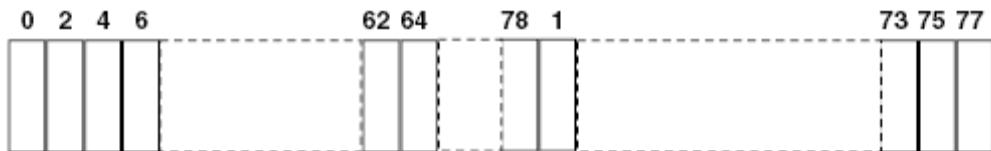


Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 7.8 Maximum Peak Output Power

- Test Requirement:** FCC Part 15 C section 15.247  
(b)(1)For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.  
Refer to the result "Hopping channel number" of this document. The 1 watt (30.0 dBm) limit applies.
- Test Method:** ANSI C63.10: Clause 6.10.1
- Test Limit:**
- Test mode:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal (DH5) and EDR mode (3DH5) as the worst case was found.



**Test Configuration:**


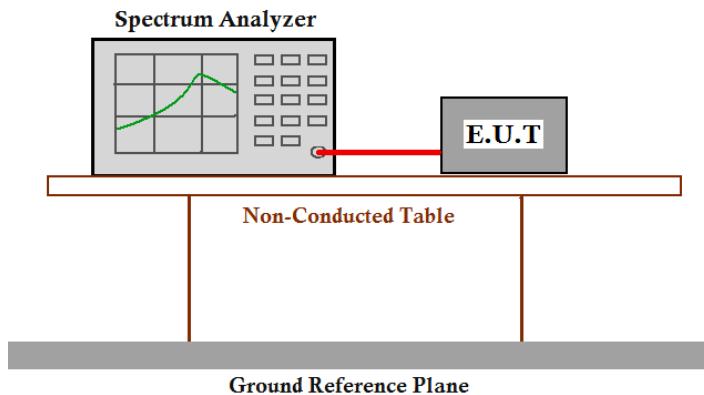




**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2 MHz. VBW = 2 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

<b>Test Result:</b>				
<b>Normal mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	1.25	30.0	Pass
Middle	2441	0.39	30.0	Pass
Highest	2480	3.32	30.0	Pass
<b>EDR mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	0.24	30.0	Pass
Middle	2441	-0.28	30.0	Pass
Highest	2480	2.47	30.0	Pass
<b>Remark:</b> cable loss=4.0dB				
<b>Test result:</b> The unit does meet the FCC requirements.				
<b>Test result plot as follows:</b>				

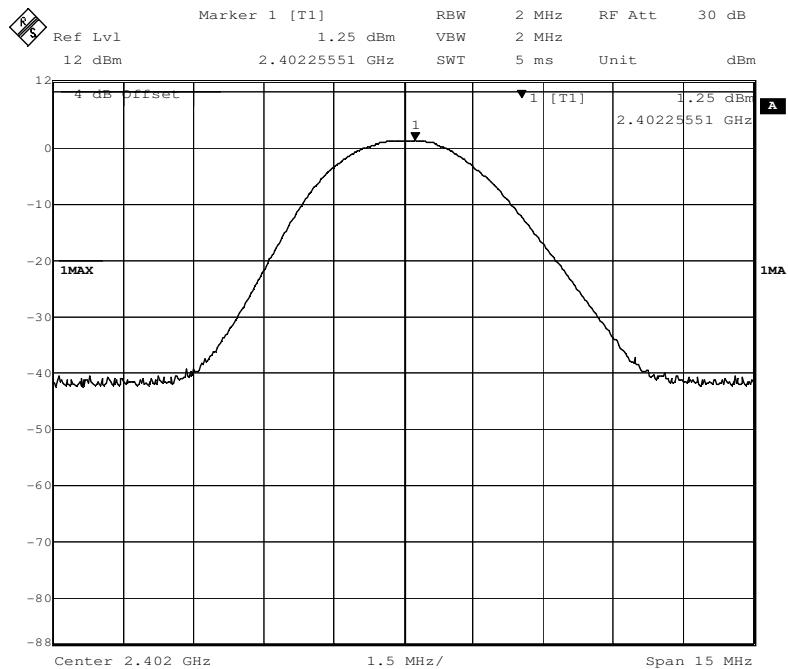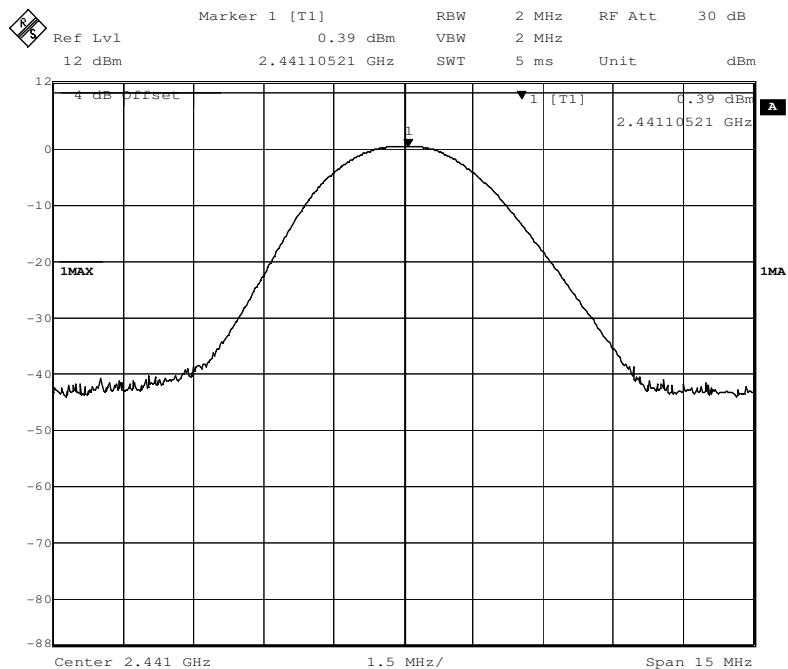**Normal mode:**
**Lowest Channel:**

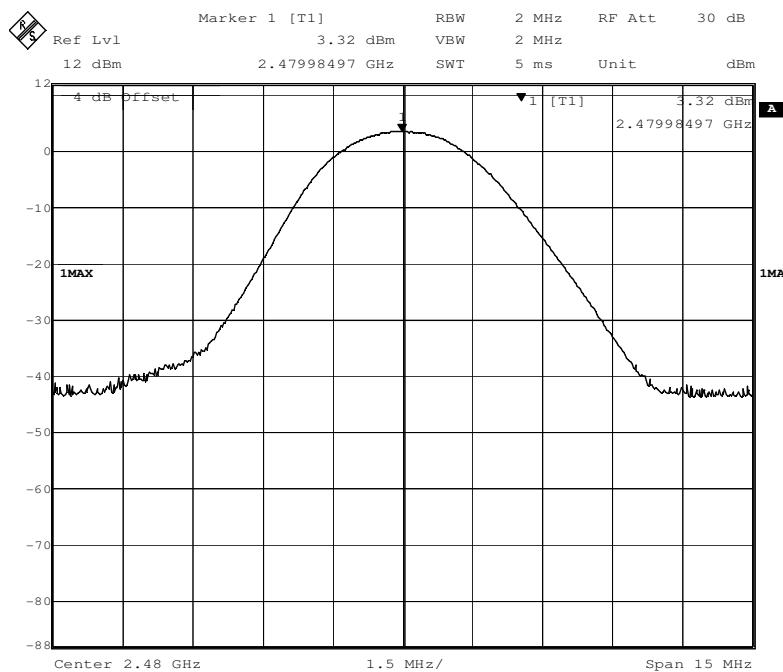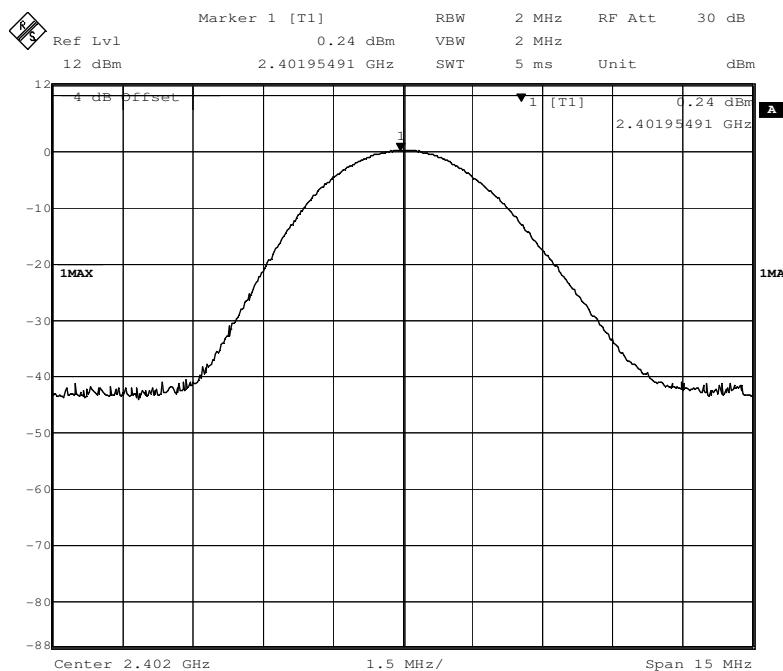**Middle Channel:**

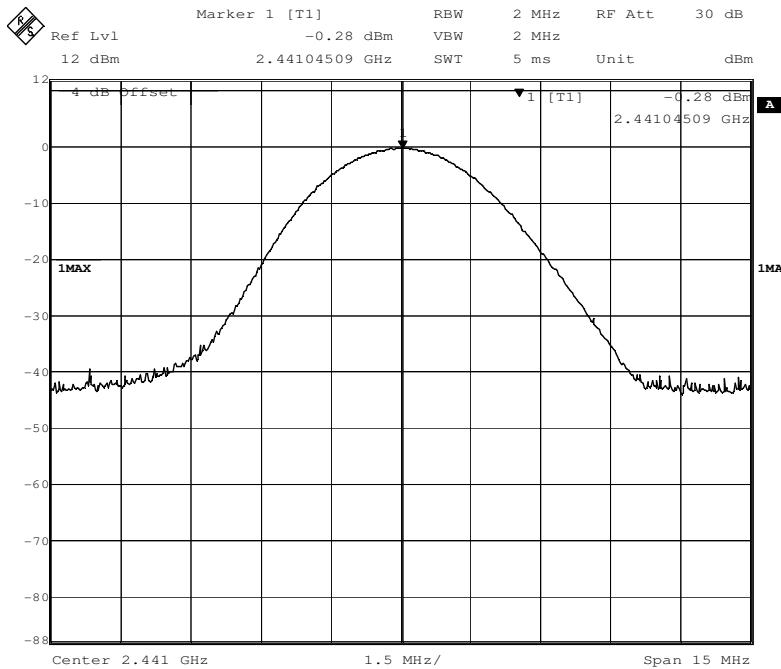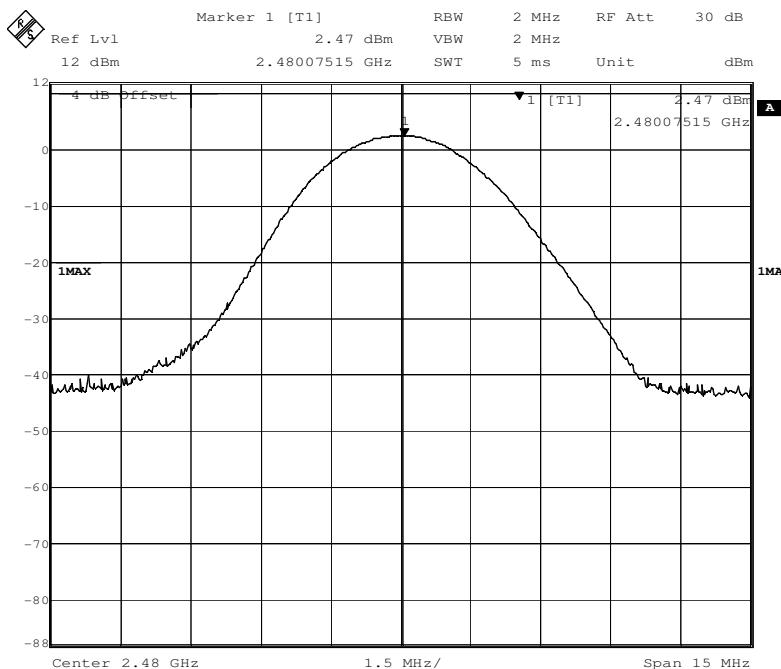
**Highest Channel:****EDR mode:****Lowest Channel:**

**Middle channel:**

**Highest channel:**


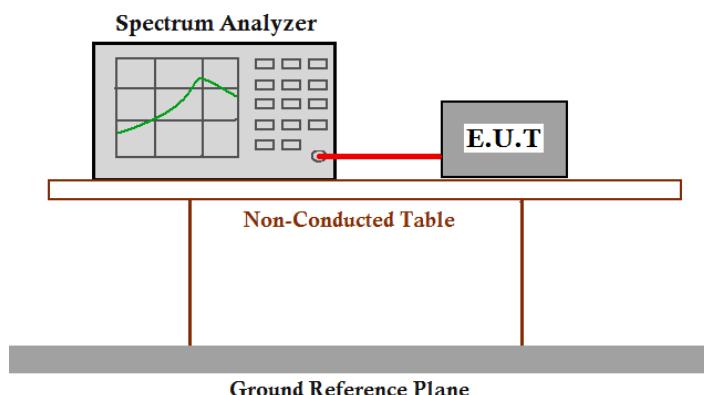
## 7.9 Conducted Spurious Emissions

**Test Requirement:** FCC Part15 C section 15.247  
(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

**Test Method:** ANSI C63.10: Clause 6.7

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.



**Test Configuration:**




**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW >= RBW. Sweep = auto; Detector Function = Peak (Max. hold).

Test result plot as follows:

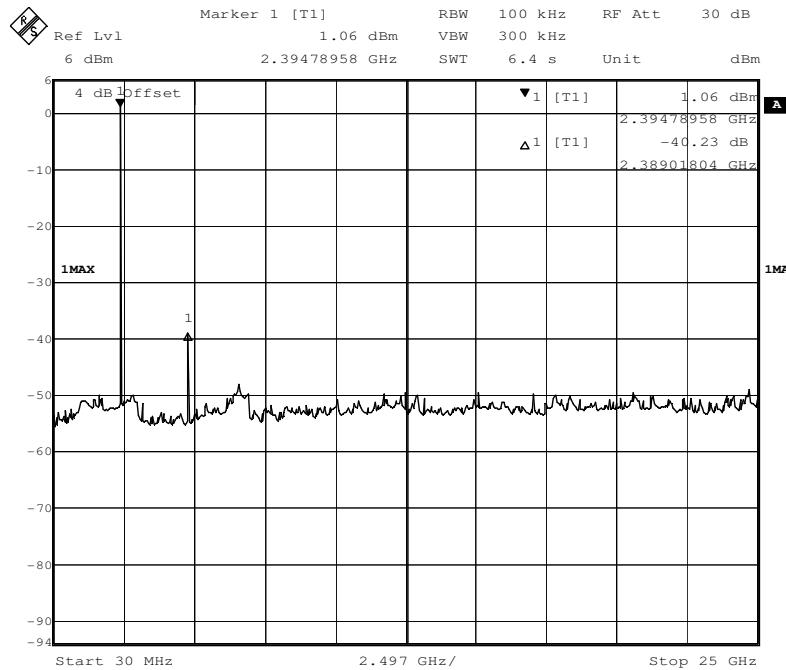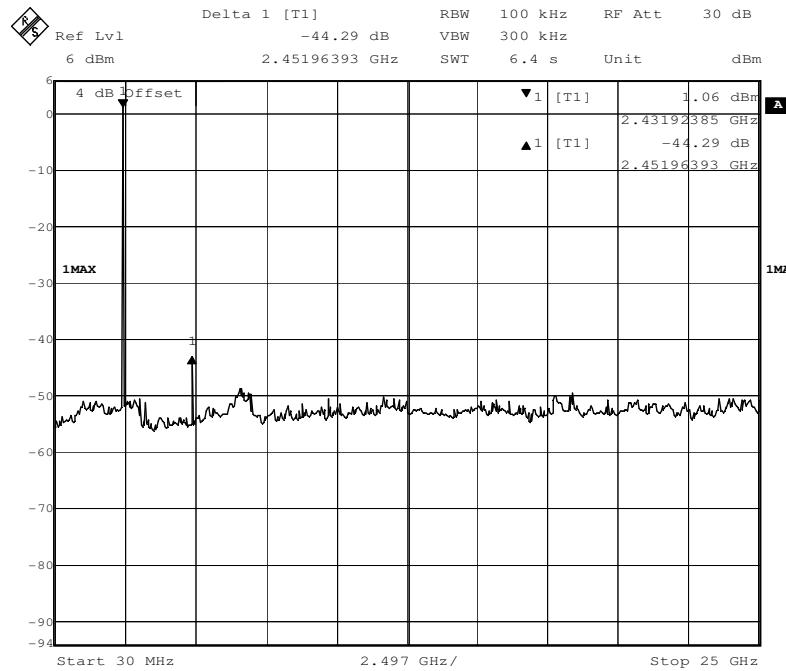**Lowest Channel: 30 MHz to 25 GHz**

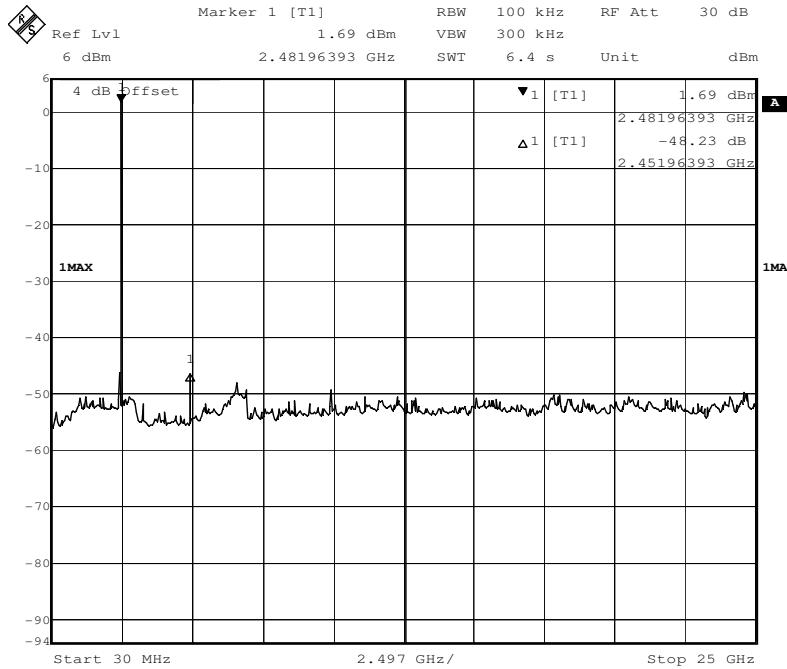**Middle Channel: 30 MHz to 25 GHz**


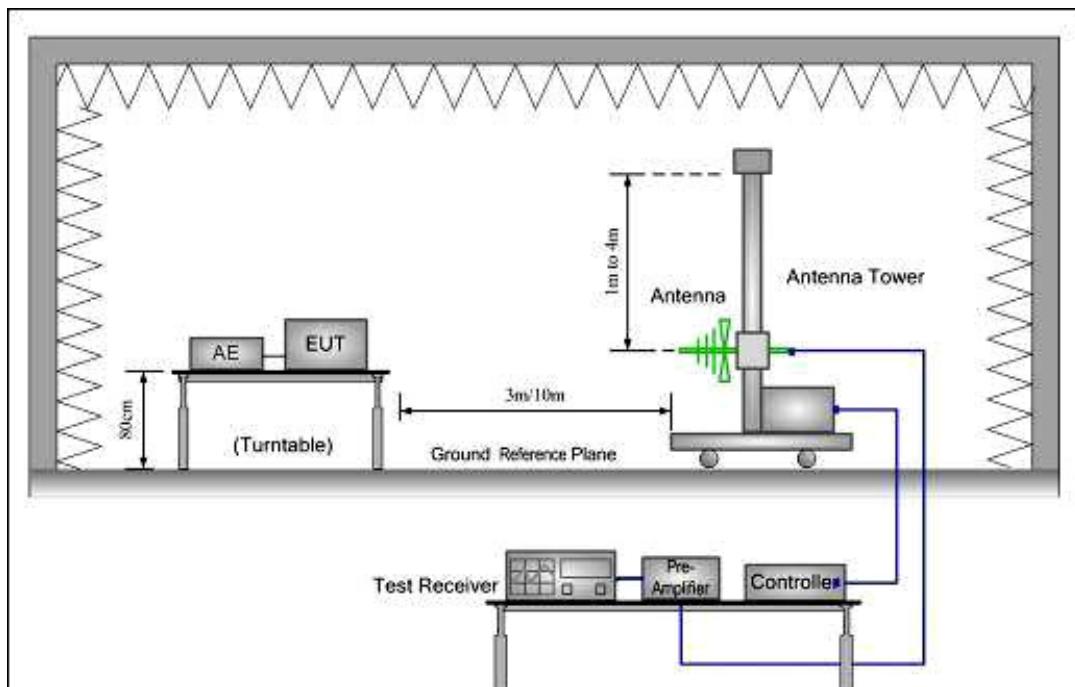
**Highest Channel: 30 MHz to 25 GHz**

## 7.10 Radiated Spurious Emissions


- Test Requirement:** FCC Part15 C section 15.247
- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
- Test Method:** ANSI C63.10: Clause 6.4, 6.5 and 6.6
- Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.
- Detector:** For PK value:  
RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold  
For AV value:  
RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz  
VBW = 10 Hz  
Sweep = auto  
Detector function = peak  
Trace = max hold
- 15.209 Limit:** 40.0 dB $\mu$ V/m between 30MHz & 88MHz  
43.5 dB $\mu$ V/m between 88MHz & 216MHz  
46.0 dB $\mu$ V/m between 216MHz & 960MHz  
54.0 dB $\mu$ V/m above 960MHz

**Test Configuration:**

- 1) 30 MHz to 1 GHz emissions:



- 2) 1 GHz to 40 GHz emissions:

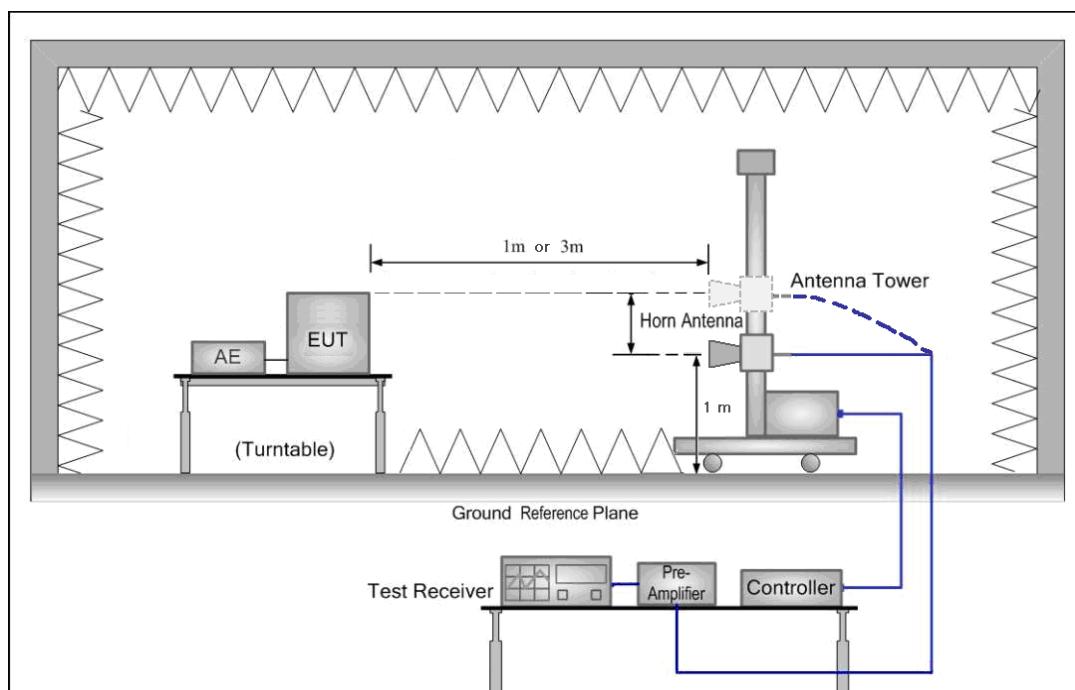

**Test Procedure:** The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

For hand-held or body-worn devices rotated through three orthogonal axes(X,Y,Z) to determine which attitude (orientation) and equipment arrangement produces the highest emission relative to the limit; the attitude and equipment arrangement that produces the highest emission relative to the limit was used in making final radiated emission measurements.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.

Submit this data.

## 7.10.1 Harmonic and other spurious emissions

### 7.10.1.1 Test at low Channel in transmitting status

#### 9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

#### 30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB $\mu$ V/m)

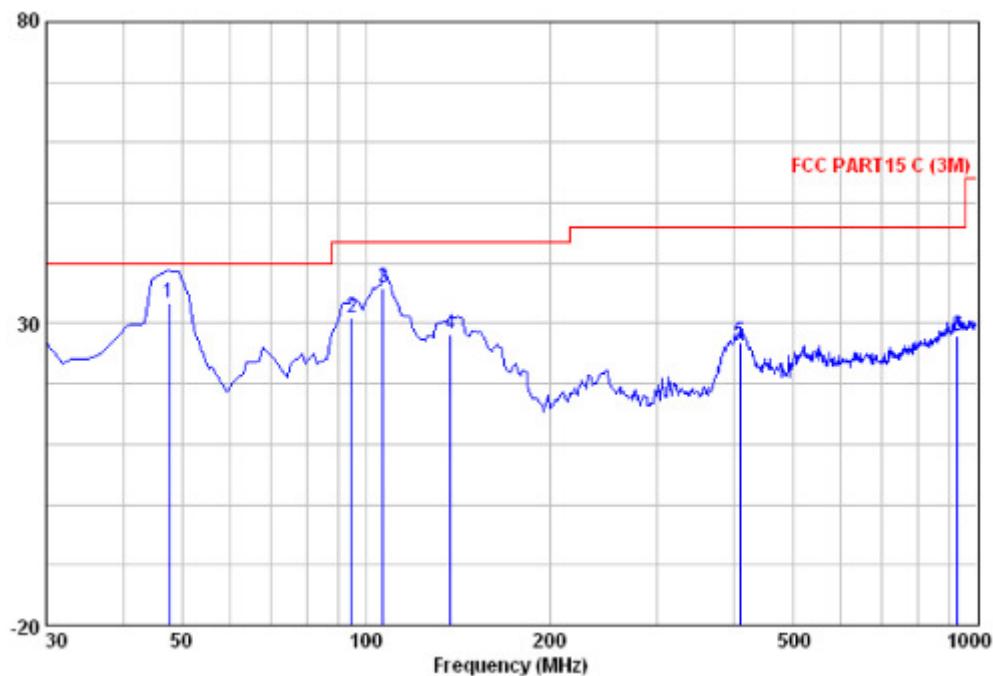


Quasi-peak measurement

Freq MHz	Read Level dB $\mu$ V	Antenna Factor dB/m	Cable Loss Factor dB	Preamp Level dB	dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Line dB	Over Limit Remark
47.669	48.52	13.39	0.94	29.50	33.35	40.00	-6.65	QP
94.990	46.67	12.84	1.20	29.69	31.02	43.50	-12.48	QP
106.630	51.78	12.54	1.27	29.70	35.88	43.50	-7.62	QP
137.670	48.04	8.35	1.45	29.70	28.14	43.50	-15.36	QP
409.270	38.95	15.27	2.38	29.59	27.00	46.00	-19.00	QP
929.190	31.16	21.28	3.69	28.06	28.06	46.00	-17.94	QP

**Horizontal:**

Peak scan

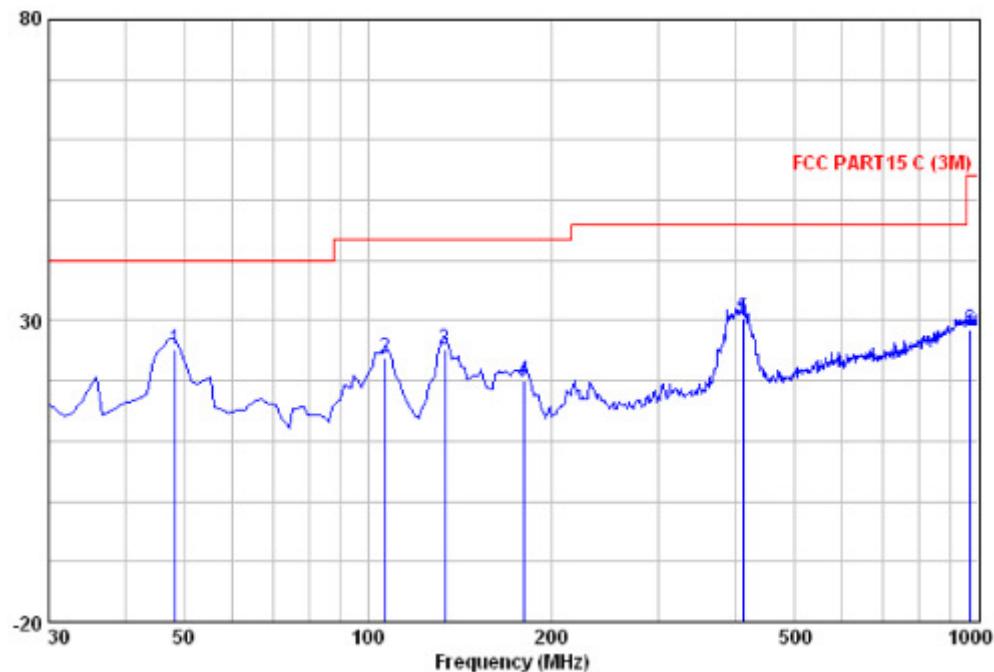Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq MHz	Read Antenna Level		Cable Loss		Preamp Factor	Limit Level dB $\mu$ V/m	Line Limit dB $\mu$ V/m	Over Limit dB	Remark
	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m				
48.430	40.43	13.35	0.96	29.50	25.23	40.00	-14.77	QP	
106.630	39.77	12.54	1.27	29.70	23.88	43.50	-19.62	QP	
133.790	44.95	8.61	1.43	29.70	25.29	43.50	-18.21	QP	
180.350	38.37	9.68	1.64	29.57	20.13	43.50	-23.37	QP	
412.180	42.41	15.31	2.39	29.59	30.52	46.00	-15.48	QP	
970.900	30.96	21.55	3.78	27.71	28.58	54.00	-25.42	QP	

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4804.000	31.53	9.34	34.30	42.10	48.67	74.00	V
7206.000	36.47	13.09	34.30	36.55	51.81	74.00	V
4804.000	31.53	9.34	34.30	46.05	52.62	74.00	H
7206.000	36.47	13.09	34.30	38.22	53.47	74.00	H

**Average Measurement:**


Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4804.000	31.53	9.34	34.30	34.10	40.67	54.00	V
7206.000	36.47	13.09	34.30	28.55	43.81	54.00	V
4804.000	31.53	9.34	34.30	37.05	43.62	54.00	H
7206.000	36.47	13.09	34.30	27.22	42.47	54.00	H

**7.10.1.2 Test at middle Channel in transmitting status****9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

**30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement****Vertical:**

Peak scan

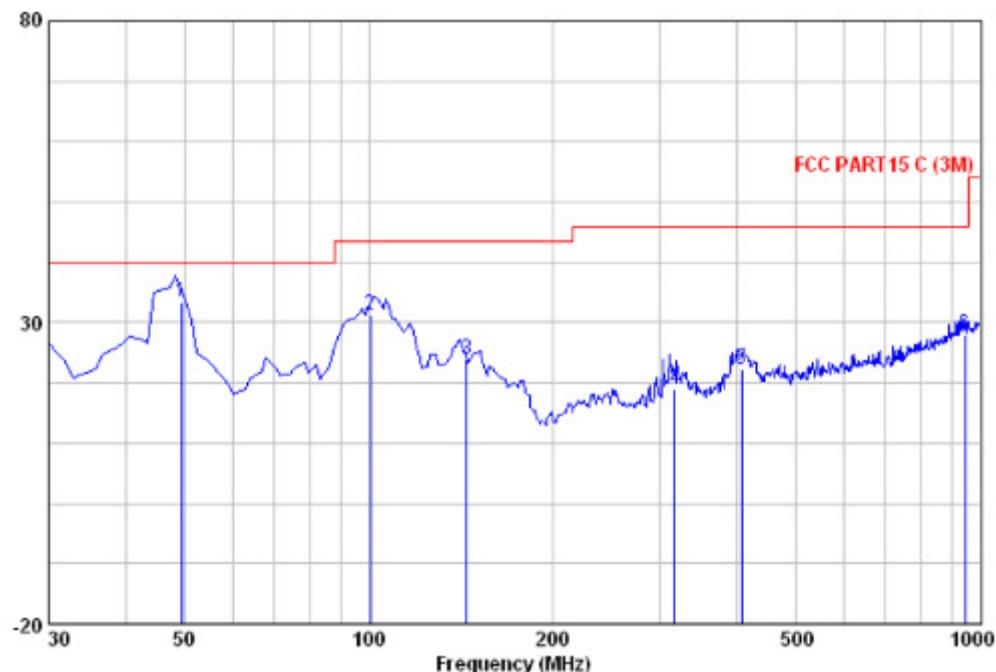
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq MHz	Read Freq MHz	Antenna Level dB $\mu$ V	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Line Level dB $\mu$ V/m	Line Limit dB $\mu$ V/m	Over Line Limit dB	Over Line Limit Remark
49.400	48.58	13.29	0.97	29.50	33.34	40.00	-6.66	QP	
100.810	46.67	13.06	1.22	29.70	31.26	43.50	-12.24	QP	
144.460	43.91	8.23	1.49	29.70	23.92	43.50	-19.58	QP	
317.120	33.20	13.31	2.12	29.60	19.02	46.00	-26.98	QP	
407.330	34.33	15.22	2.37	29.59	22.33	46.00	-23.67	QP	
943.740	30.82	21.37	3.71	27.95	27.95	46.00	-18.05	QP	

**Horizontal:**

Peak scan

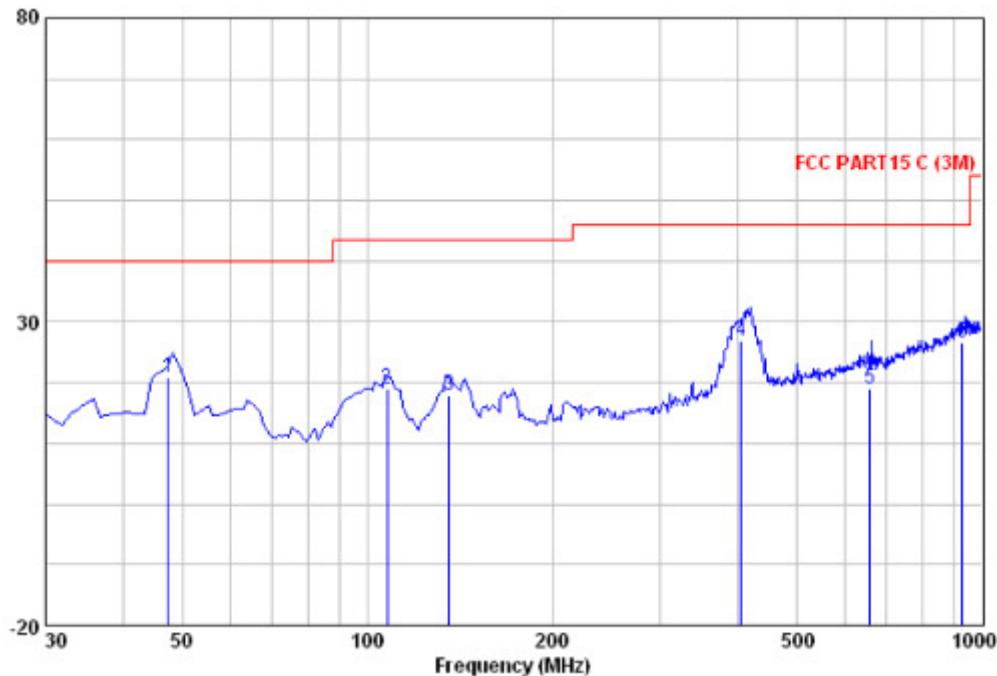Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq MHz	Read Level dB $\mu$ V	Antenna Factor dB/m	Cable Loss dB	Preamp Level dB	dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Line dB	Over Limit Remark
47.460	35.97	13.41	0.94	29.50	20.82	40.00	-19.18	QP
107.600	35.01	12.44	1.28	29.70	19.02	43.50	-24.48	QP
135.730	37.53	8.51	1.44	29.70	17.77	43.50	-25.73	QP
405.390	38.89	15.18	2.36	29.59	26.84	46.00	-19.16	QP
658.560	26.62	18.67	3.06	29.34	19.01	46.00	-26.99	QP
931.130	29.61	21.31	3.69	28.03	26.57	46.00	-19.43	QP

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4882.000	31.58	9.33	34.30	45.97	52.58	74.00	V
7323.000	36.50	13.11	34.30	38.05	53.36	74.00	V
4882.000	31.58	9.33	34.30	49.57	56.18	74.00	H
7323.000	36.50	13.11	34.30	37.49	52.80	74.00	H

**Average Measurement:**


Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4882.000	31.58	9.33	34.30	34.97	41.58	54.00	V
7323.000	36.50	13.11	34.30	27.05	42.36	54.00	V
4882.000	31.58	9.33	34.30	38.57	45.18	54.00	H
7323.000	36.50	13.11	34.30	28.49	43.80	54.00	H

**7.10.1.3 Test at high Channel in transmitting status****9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

**30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement****Vertical:**

Peak scan

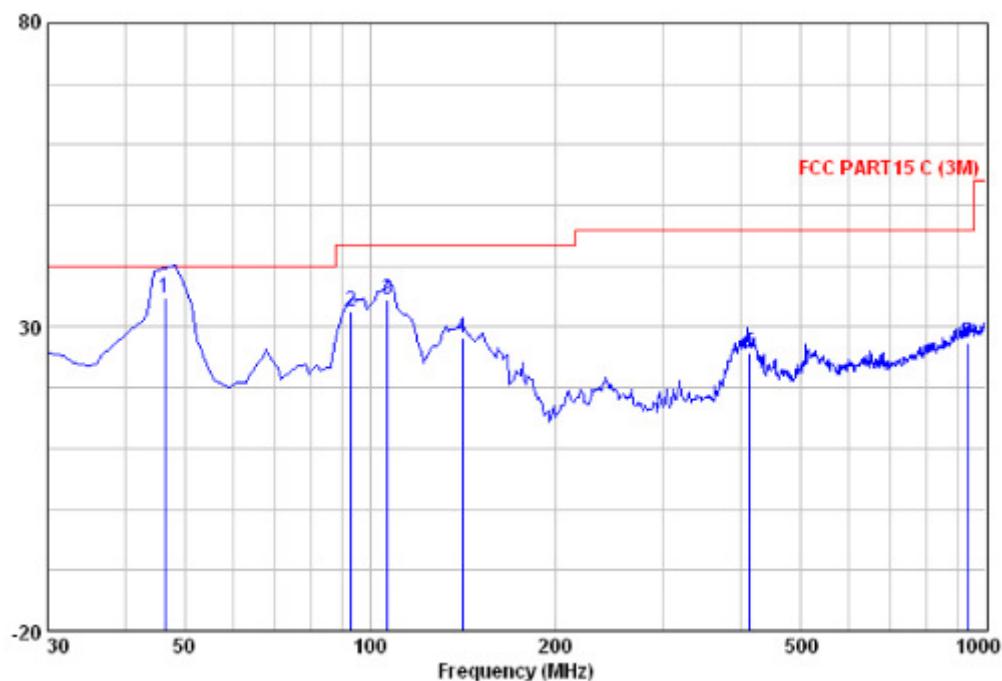
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq MHz	Read Level dB $\mu$ V	Antenna Factor dB/m	Cable Loss Factor dB	Preamp Factor dB	Line Level dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Limit dB	Over Remark
46.490	49.89	13.46	0.93	29.50	34.78	40.00	-5.22	QP
93.050	48.47	12.50	1.19	29.68	32.47	43.50	-11.03	QP
106.630	50.53	12.54	1.27	29.70	34.63	43.50	-8.87	QP
141.550	48.13	8.21	1.47	29.70	28.11	43.50	-15.39	QP
413.150	37.56	15.35	2.39	29.59	25.71	46.00	-20.29	QP
934.040	30.32	21.31	3.69	28.00	27.31	46.00	-18.69	QP

**Horizontal:**

Peak scan

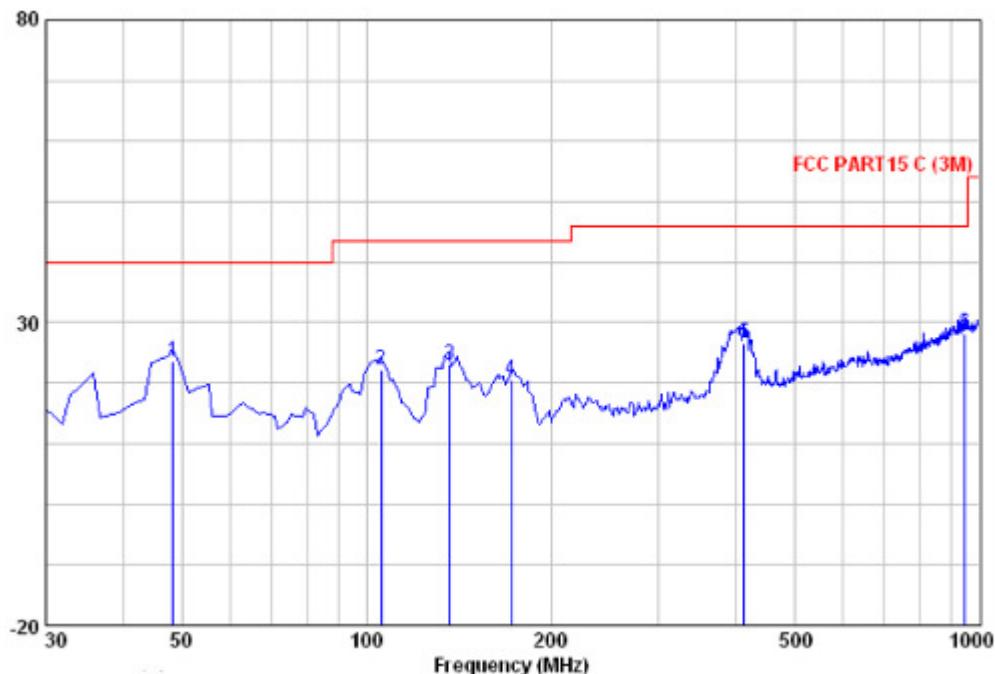Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq MHz	Read Antenna Level Factor		Cable Preamp Loss Factor		Level dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Limit dB	Over Limit Remark
	MHz	dB $\mu$ V	dB	dB				
48.430	38.93	13.35	0.96	29.50	23.73	40.00	-16.27	QP
105.660	37.91	12.63	1.26	29.70	22.10	43.50	-21.40	QP
136.700	42.89	8.40	1.44	29.70	23.03	43.50	-20.47	QP
172.590	39.32	9.16	1.61	29.60	20.50	43.50	-23.00	QP
413.150	38.53	15.35	2.39	29.59	26.68	46.00	-19.32	QP
948.590	31.04	21.40	3.73	27.90	28.27	46.00	-17.73	QP

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4960.000	31.70	9.31	34.30	48.32	55.04	74.00	V
7440.000	36.60	13.14	34.30	37.24	52.67	74.00	V
4960.000	31.70	9.31	34.30	46.88	53.60	74.00	H
7440.000	36.60	13.14	34.30	42.08	57.51	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
4960.000	31.70	9.31	34.30	37.32	44.04	54.00	V
7440.000	36.60	13.14	34.30	28.24	43.67	54.00	V
4960.000	31.70	9.31	34.30	35.88	42.60	54.00	H
7440.000	36.60	13.14	34.30	30.08	45.51	54.00	H

## Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

**Test result: The unit does meet the FCC requirements.**

## 7.10.2 Radiated Emissions which fall in the restricted bands

- Test Requirement:** FCC Part15 C Section 15.247  
(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method:** ANSI C63.10: Clause 6.4, 6.5 and 6.6
- Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.
- Measurement Distance:** 3m (Semi-Anechoic Chamber)
- Limit:** Section 15.209(a)  
40.0 dB $\mu$ V/m between 30MHz & 88MHz;  
43.5 dB $\mu$ V/m between 88MHz & 216MHz;  
46.0 dB $\mu$ V/m between 216MHz & 960MHz;  
54.0 dB $\mu$ V/m above 960MHz.
- Detector:** For PK value:  
RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold  
For AV value:  
RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz  
VBW = 10 Hz  
Sweep = auto  
Detector function = peak  
Trace = max hold

**Test Result:**
**1. Low Channel**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	27.93	6.70	35.09	48.38	40.38	47.91	39.91
2390.000	27.63	6.97	35.05	47.55	38.55	47.10	38.10
2500.000	27.55	7.34	34.98	47.77	39.77	47.68	39.68
2483.500	27.55	7.29	34.99	48.74	39.74	48.59	39.59

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	27.93	6.70	35.09	52.67	43.67	52.21	43.21
2390.000	27.63	6.97	35.05	52.28	43.28	51.84	42.84
2500.000	27.55	7.34	34.98	52.19	44.19	52.10	44.10
2483.500	27.55	7.29	34.99	52.51	43.51	52.36	43.36

**2. middle Channel**

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	27.93	6.70	35.09	52.36	42.36	51.90	41.90
2390.000	27.63	6.97	35.05	51.78	41.78	51.34	41.34
2500.000	27.55	7.34	34.98	51.73	40.73	51.65	40.65
2483.500	27.55	7.29	34.99	51.29	41.29	51.14	41.14

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	27.93	6.70	35.09	51.67	40.67	51.20	40.20
2390.000	27.63	6.97	35.05	52.52	42.52	52.07	42.07
2500.000	27.55	7.34	34.98	52.36	42.36	52.27	42.27
2483.500	27.55	7.29	34.99	52.39	39.39	52.24	39.24

### 3. high Channel

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	27.93	6.70	35.09	51.51	41.51	51.05	41.05
2390.000	27.63	6.97	35.05	51.57	41.57	51.13	41.13
2500.000	27.55	7.34	34.98	52.35	41.35	52.26	41.26
2483.500	27.55	7.29	34.99	51.83	39.83	51.68	39.68

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2310.000	27.93	6.70	35.09	51.92	41.92	51.46	41.46
2390.000	27.63	6.97	35.05	51.46	41.46	51.02	41.02
2500.000	27.55	7.34	34.98	51.28	42.28	51.19	42.19
2483.500	27.55	7.29	34.99	51.33	42.33	51.18	42.18

Remark: No any other emission which falls in restricted bands can be detected and be reported.

**Test result: The unit does meet the FCC requirements.**

## Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

## 7.11 Band Edges Requirement

**Test Requirement:** FCC Part15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Frequency Band:** 2400 MHz to 2483.5 MHz

**Test Method:** ANSI C63.10: Clause 6.9.2

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in continuous transmitting mode with normal (DH5) and EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

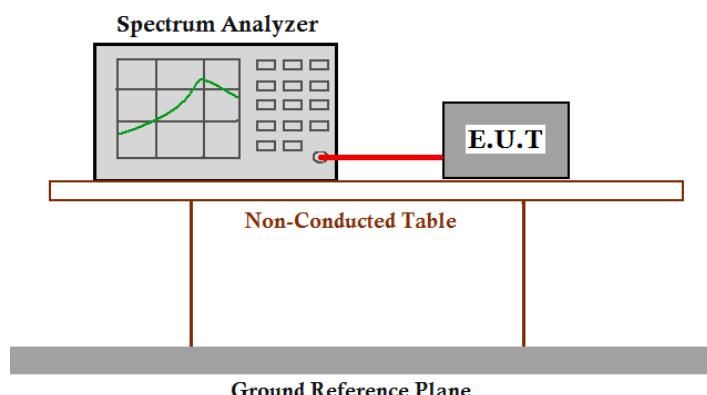

**Test Procedure:** Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge.

The band edges was measured and recorded Result:


The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.


The graph as below. Represents the emissions take for this device.

**DH5:**


Low channel:

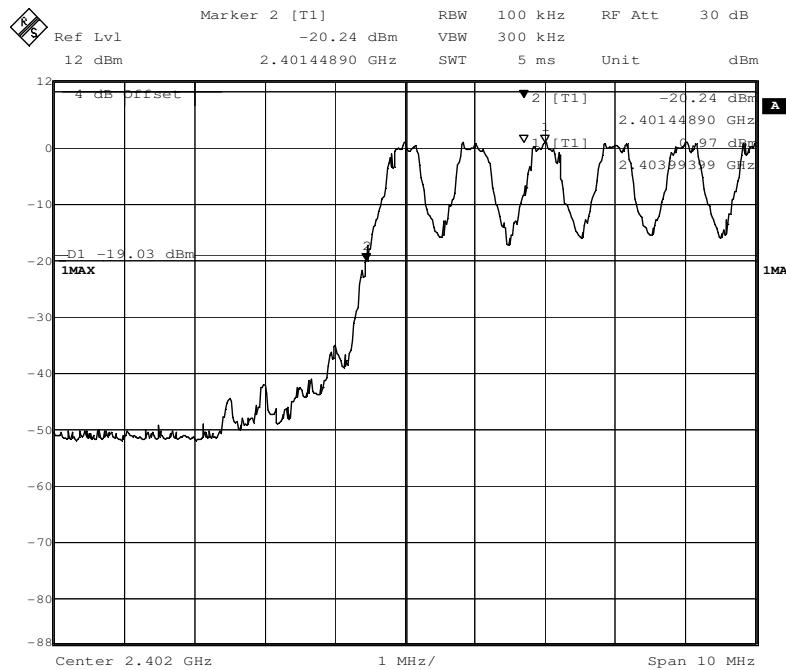


Highest Channel:

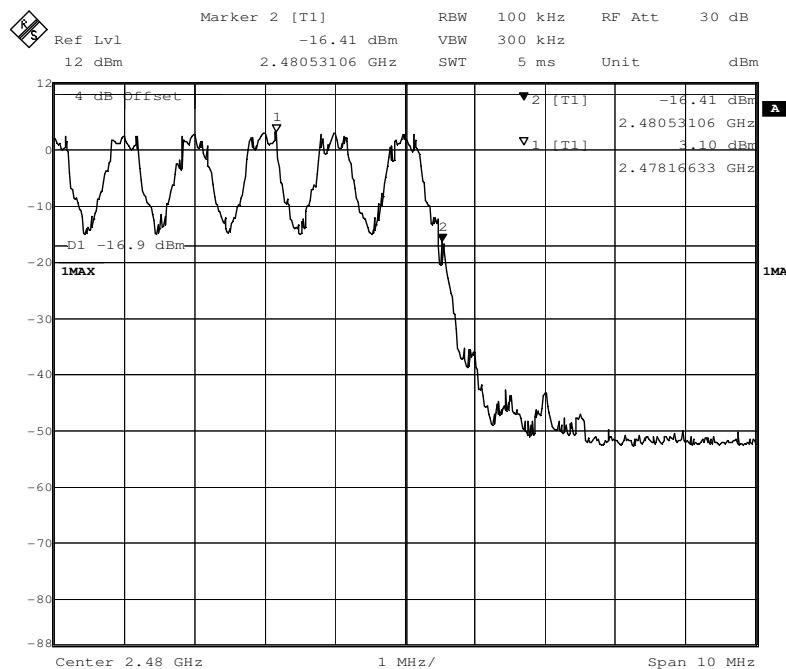

**3DH5:**  
Low channel:

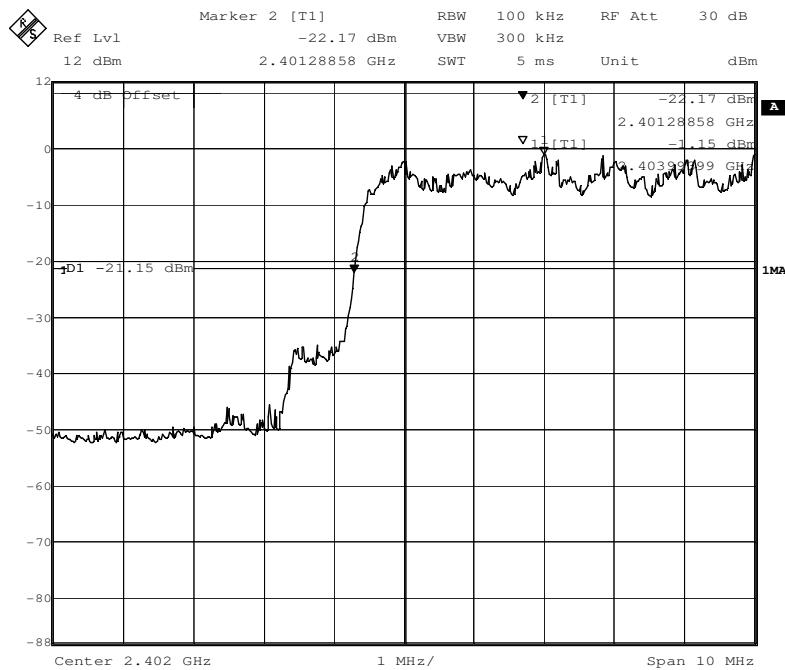

Highest Channel:

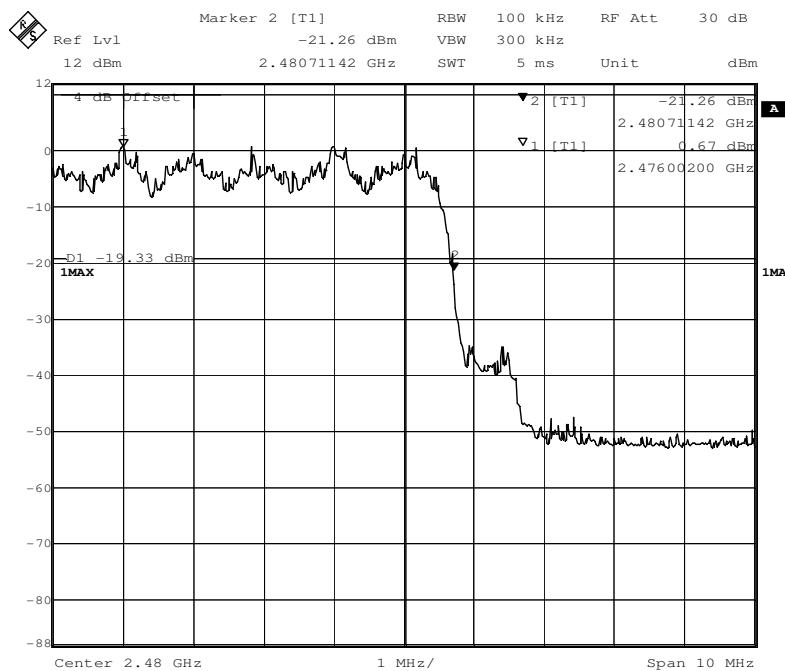

**Test result: The unit does meet the FCC requirements.**

## 7.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

**Test Requirement:** FCC Part 15 C section 15.207  
**Test Method:** ANSI C63.10: Clause 6.2  
**Frequency Range:** 150 kHz to 30 MHz  
**Detector:** Peak for pre-scan (9 kHz Resolution Bandwidth)

### Test Limit


#### Limits for conducted disturbance at the mains ports of class B

Frequency Range (MHz)	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**EUT Operation:** Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.  
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

## Test Configuration:

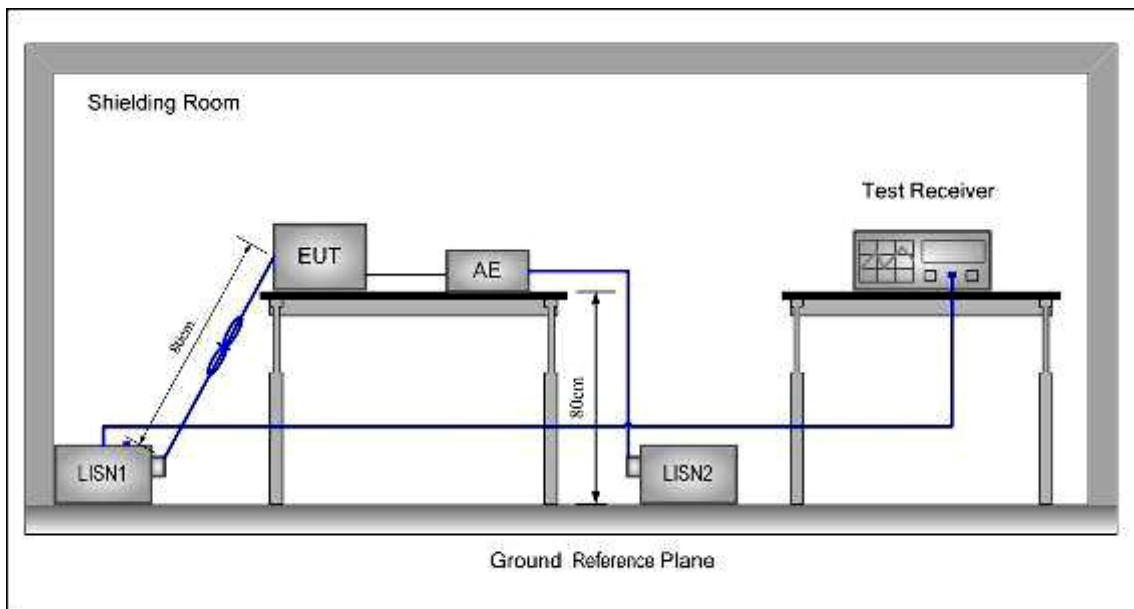

## Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
  2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
  3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
  4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

### 7.12.1 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

**The following Quasi-Peak and Average measurements were performed on the EUT:**

Neutral Line


Level(dB  $\mu$  V)

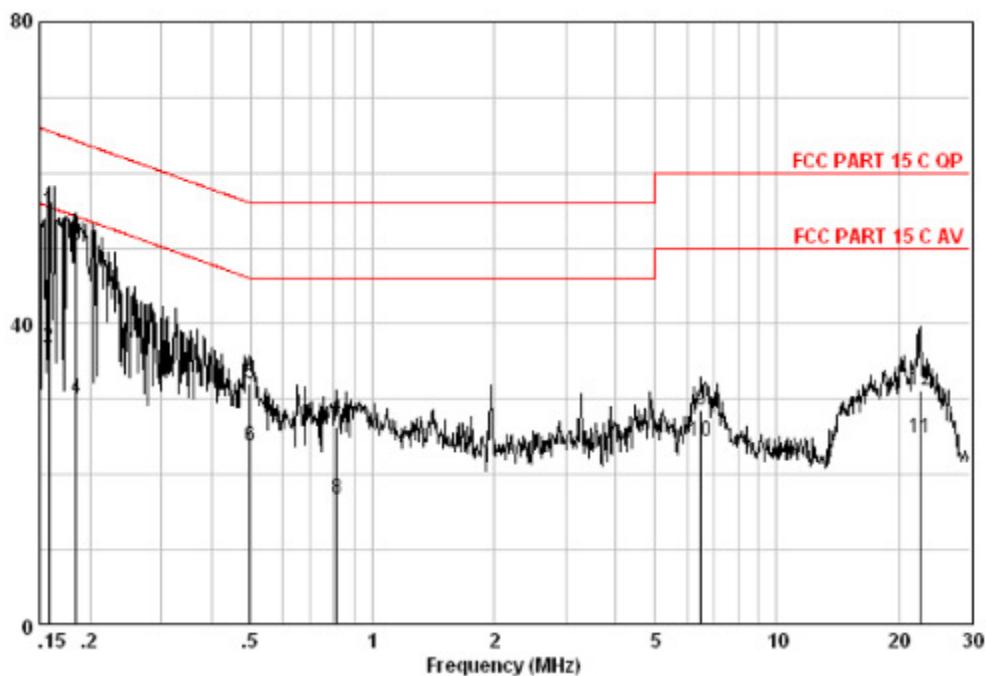

Measure data:

Freq MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.158	45.10	0.07	9.65	54.82	65.56	-10.74	QP
0.158	27.22	0.07	9.65	36.94	55.56	-18.62	AVERAGE
0.184	40.52	0.11	9.64	50.27	64.28	-14.01	QP
0.184	20.25	0.11	9.64	30.00	54.28	-24.28	AVERAGE
0.497	22.34	0.05	9.67	32.06	56.05	-24.00	QP
0.497	14.12	0.05	9.67	23.84	46.05	-22.22	AVERAGE
0.817	16.60	0.05	9.68	26.33	56.00	-29.67	QP
0.817	6.98	0.05	9.68	16.71	46.00	-29.29	AVERAGE
6.488	18.52	0.15	9.82	28.49	60.00	-31.51	QP
6.488	14.44	0.15	9.82	24.41	50.00	-25.59	AVERAGE
22.655	14.01	0.27	10.47	24.75	50.00	-25.25	AVERAGE
22.655	20.40	0.27	10.47	31.14	60.00	-28.86	QP

## Live Line

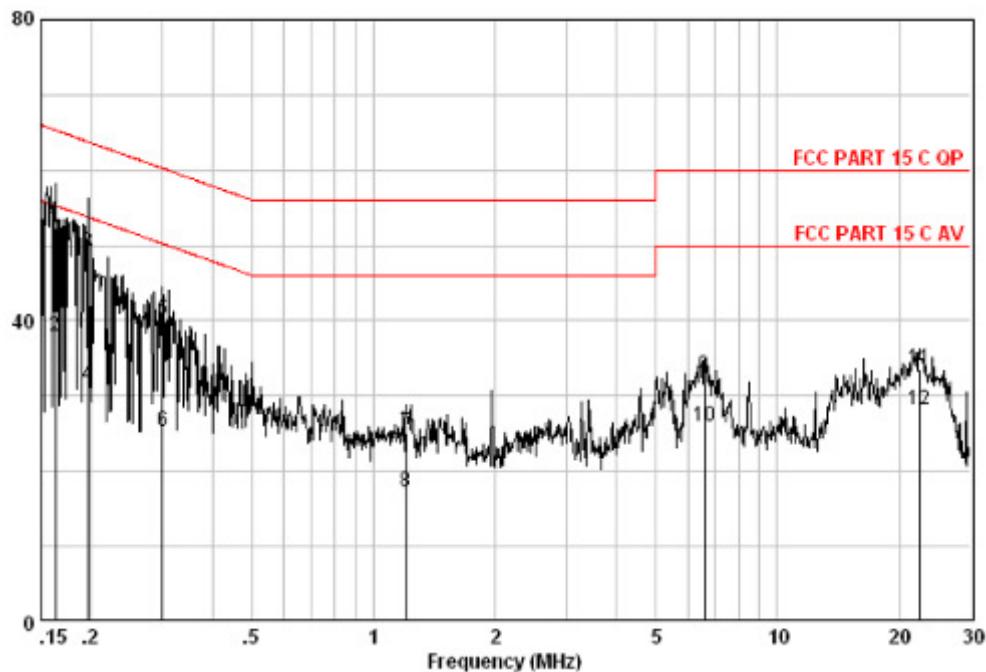Level(dB $\mu$ V)

## Measure result:

Freq MHz	Read Level dB $\mu$ V	Cable Loss dB	LISN Factor dB	Level dB $\mu$ V	Limit Line dB $\mu$ V	Over Limit dB	Over Limit Remark
							QP
0.162	42.58	0.08	9.63	52.29	65.34	-13.05	QP
0.162	28.25	0.08	9.63	37.96	55.34	-17.38	AVERAGE
0.197	39.32	0.13	9.62	49.07	63.76	-14.69	QP
0.197	21.58	0.13	9.62	31.33	53.76	-22.43	AVERAGE
0.300	30.46	0.08	9.64	40.18	60.24	-20.06	QP
0.300	15.61	0.08	9.64	25.33	50.24	-24.91	AVERAGE
1.203	15.42	0.03	9.64	25.09	56.00	-30.91	QP
1.203	7.59	0.03	9.64	17.26	46.00	-28.74	AVERAGE
6.592	22.76	0.15	9.79	32.70	60.00	-27.30	QP
6.592	16.05	0.15	9.79	25.99	50.00	-24.01	AVERAGE
22.416	22.90	0.27	10.36	33.53	60.00	-26.47	QP
22.416	17.43	0.27	10.36	28.06	50.00	-21.94	AVERAGE

**--End of Report--**