



FCC RADIO TEST REPORT

FCC ID : P4Q-N926
Equipment : Dashcam
Brand Name : Mio, NAVMAN, MAGELLAN
Model Name : N926, N926Y(Y= 10 characters, Y can be 0-9, a-z, A-Z, "-", "_" or blank for marketing purpose and no impact safety related critical components and constructions.)
Applicant : Mitac Digital Technology Corp.
4F., NO. 1, R&D ROAD 2, HSINCHU SCIENCE PARK, HSINCHU 30076, TAIWAN, R.O.C.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jun. 09, 2025 and testing was performed from Jun. 12, 2025 to Jun. 25, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
2.6 Measurement Results Explanation Example.....	9
3 Test Result	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 Antenna Requirements	18
4 List of Measuring Equipment.....	19
5 Measurement Uncertainty	20
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Result	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR560901	01	Initial issue of report	Jul. 15, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
-	15.207	AC Conducted Emission	Not Required	-
3.6	15.203	Antenna Requirement	Pass	-

Note: Not required means after assessing, test items are not necessary to carry out.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Freda Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Wi-Fi 2.4GHz 802.11b/g/n and GNSS	
Antenna Type WLAN: Chip Antenna	
Sample 1	SKU1
Sample 2	SKU2
Sample 3	SKU3
Sample 4	SKU4

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1.0

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

<SKU List>

SKU	1	2	3	4
WiFi	v	v	v	v
GPS	v	v		
Front Camera (K302P)	v		v	
Front Camera (IMX675)		v		v

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH21-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		

2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.


Single Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Remark:

- For Radiated Test Cases, the tests were performed with DC Power Cable 1 and Sample 2.
- The detailed Radiated test modes are shown in Appendix B.

2.3 Connection Diagram of Test System

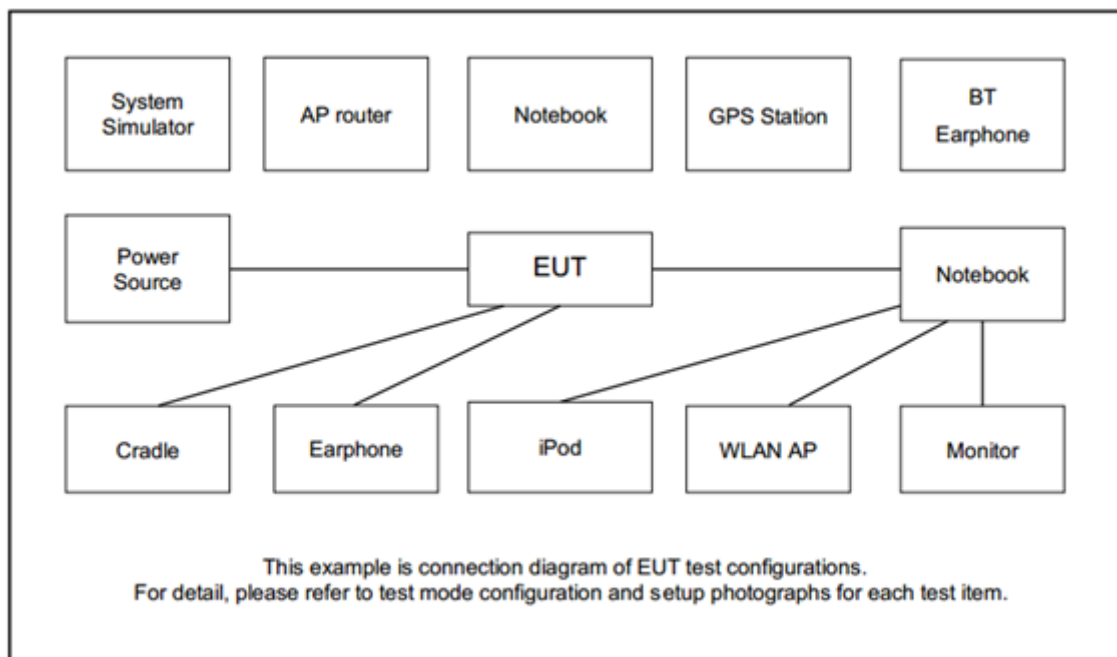

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW Instek	GPE-2323	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "Tera Term v4.95" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

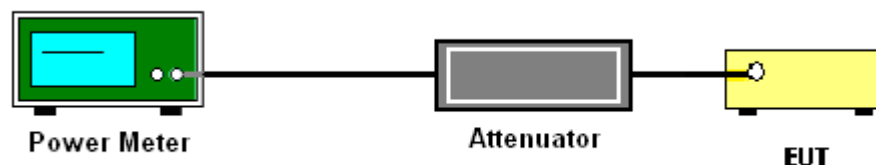

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

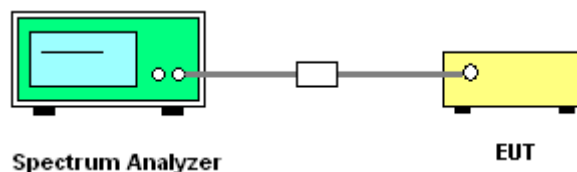

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

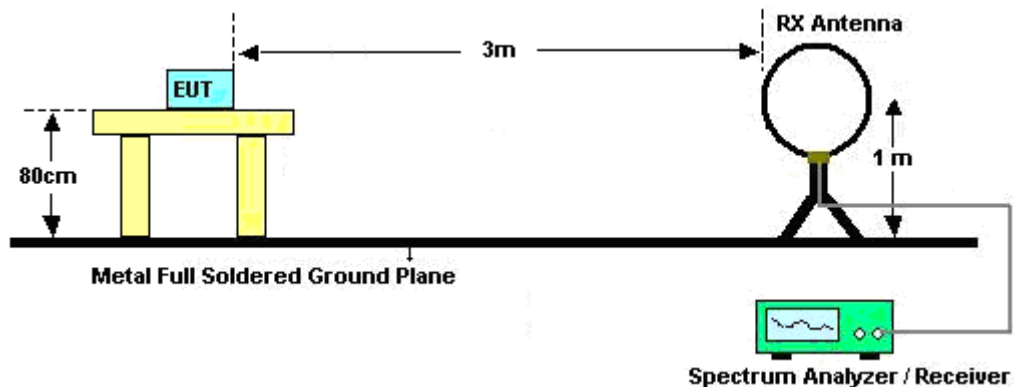


For radiated emissions from 30MHz to 1GHz

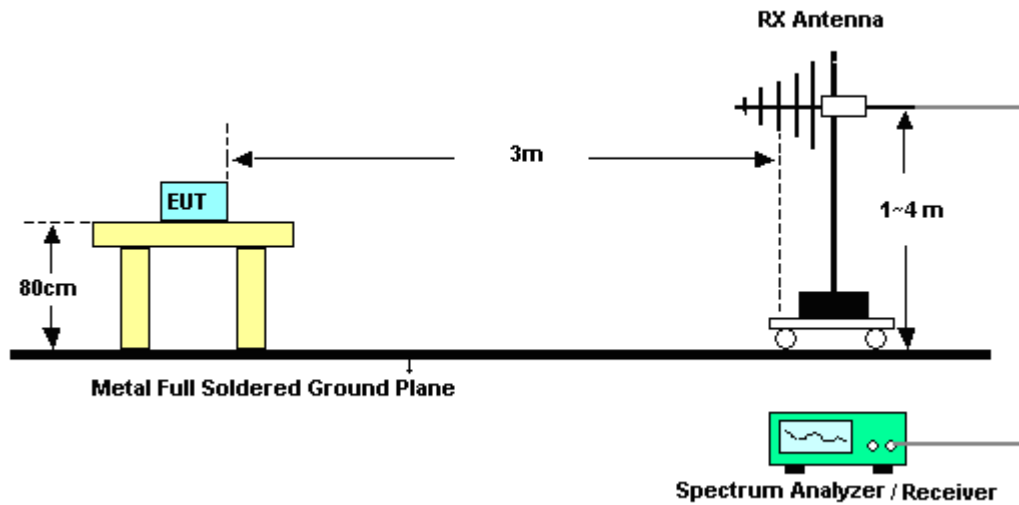

For radiated test from 1GHz to 18GHz

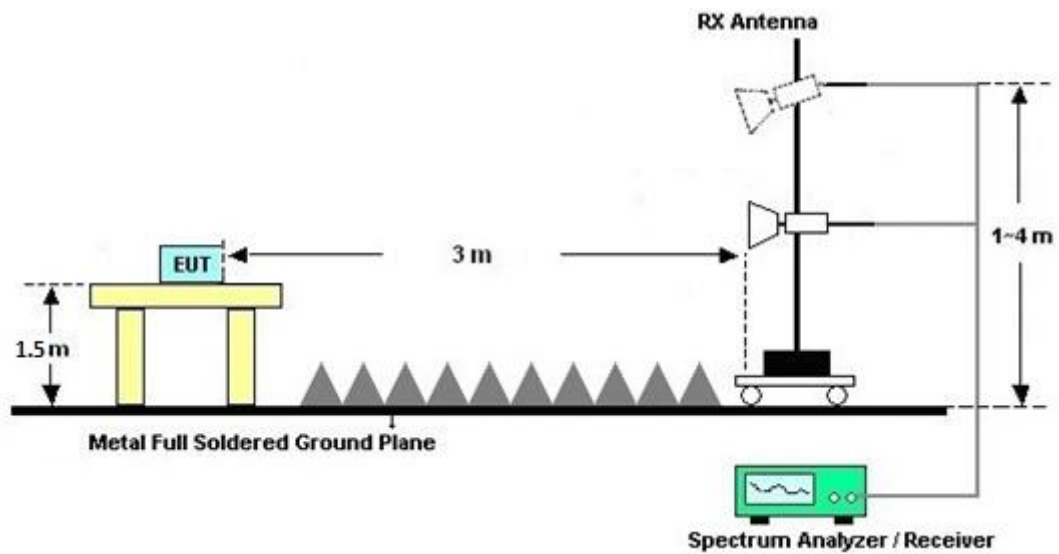

For radiated test above 18GHz

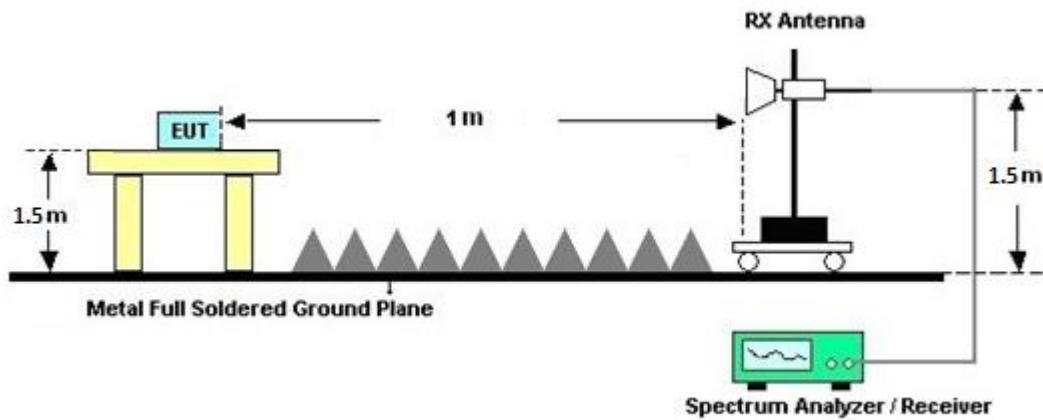

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Aug. 28, 2025	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Dec. 17, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Dec. 16, 2025	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 11, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Jul. 10, 2025	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Jun. 23, 2025	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 14, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Jul. 13, 2025	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 27, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Sep. 26, 2025	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Sep. 01, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 06, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Sep. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Jun. 20, 2025 ~ Jun. 23, 2025	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,803954/2	30MHz~40GHz	Aug. 12, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Aug. 11, 2025	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2024	Jun. 20, 2025 ~ Jun. 23, 2025	Oct. 20, 2025	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 20, 2025 ~ Jun. 23, 2025	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 20, 2025 ~ Jun. 23, 2025	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 20, 2025 ~ Jun. 23, 2025	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 20, 2025 ~ Jun. 23, 2025	N/A	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Jun.12, 2025~ Jun. 25, 2025	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SN O31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Jun. 12, 2025~ Jun. 25, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Jun. 12, 2025~ Jun. 25, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Jun. 12, 2025~ Jun. 25, 2025	Feb. 09, 2026	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jay Chen	Temperature:	21~25	°C
Test Date:	2025/6/12~2025/6/25	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	13.37	-	9.02	-	0.50	Pass
11b	1Mbps	1	6	2437	13.40	-	9.01	-	0.50	Pass
11b	1Mbps	1	11	2462	13.43	-	8.56	-	0.50	Pass
11b	1Mbps	1	12	2467	13.39	-	8.56	-	0.50	Pass
11b	1Mbps	1	13	2472	13.33	-	8.53	-	0.50	Pass
11g	6Mbps	1	1	2412	17.30	-	16.33	-	0.50	Pass
11g	6Mbps	1	6	2437	17.51	-	16.34	-	0.50	Pass
11g	6Mbps	1	11	2462	17.71	-	16.34	-	0.50	Pass
11g	6Mbps	1	12	2467	17.37	-	16.33	-	0.50	Pass
11g	6Mbps	1	13	2472	17.48	-	16.33	-	0.50	Pass
HT20	MCS0	1	1	2412	18.27	-	17.53	-	0.50	Pass
HT20	MCS0	1	6	2437	18.32	-	17.54	-	0.50	Pass
HT20	MCS0	1	11	2462	18.49	-	17.55	-	0.50	Pass
HT20	MCS0	1	12	2467	18.29	-	17.08	-	0.50	Pass
HT20	MCS0	1	13	2472	18.31	-	17.52	-	0.50	Pass
HT40	MCS0	1	3	2422	36.68	-	36.04	-	0.50	Pass
HT40	MCS0	1	6	2437	36.72	-	35.88	-	0.50	Pass
HT40	MCS0	1	9	2452	36.78	-	35.84	-	0.50	Pass
HT40	MCS0	1	10	2457	36.74	-	35.80	-	0.50	Pass
HT40	MCS0	1	11	2462	36.72	-	35.80	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	17.77	-		30.00	-	1.00	-	18.77	-	36.00	-	Pass
11b	1Mbps	1	6	2437	17.95	-		30.00	-	1.00	-	18.95	-	36.00	-	Pass
11b	1Mbps	1	11	2462	17.69	-		30.00	-	1.00	-	18.69	-	36.00	-	Pass
11b	1Mbps	1	12	2467	17.65	-		30.00	-	1.00	-	18.65	-	36.00	-	Pass
11b	1Mbps	1	13	2472	17.55	-		30.00	-	1.00	-	18.55	-	36.00	-	Pass
11g	6Mbps	1	1	2412	14.65	-		30.00	-	1.00	-	15.65	-	36.00	-	Pass
11g	6Mbps	1	6	2437	15.90	-		30.00	-	1.00	-	16.90	-	36.00	-	Pass
11g	6Mbps	1	11	2462	15.83	-		30.00	-	1.00	-	16.83	-	36.00	-	Pass
11g	6Mbps	1	12	2467	15.40	-		30.00	-	1.00	-	16.40	-	36.00	-	Pass
11g	6Mbps	1	13	2472	9.13	-		30.00	-	1.00	-	10.13	-	36.00	-	Pass
HT20	MCS0	1	1	2412	13.67	-		30.00	-	1.00	-	14.67	-	36.00	-	Pass
HT20	MCS0	1	6	2437	14.95	-		30.00	-	1.00	-	15.95	-	36.00	-	Pass
HT20	MCS0	1	11	2462	14.65	-		30.00	-	1.00	-	15.65	-	36.00	-	Pass
HT20	MCS0	1	12	2467	14.55	-		30.00	-	1.00	-	15.55	-	36.00	-	Pass
HT20	MCS0	1	13	2472	7.40	-		30.00	-	1.00	-	8.40	-	36.00	-	Pass
HT40	MCS0	1	3	2422	12.67	-		30.00	-	1.00	-	13.67	-	36.00	-	Pass
HT40	MCS0	1	6	2437	14.81	-		30.00	-	1.00	-	15.81	-	36.00	-	Pass
HT40	MCS0	1	9	2452	14.72	-		30.00	-	1.00	-	15.72	-	36.00	-	Pass
HT40	MCS0	1	10	2457	14.70	-		30.00	-	1.00	-	15.70	-	36.00	-	Pass
HT40	MCS0	1	11	2462	8.85	-		30.00	-	1.00	-	9.85	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-4.76	-		1.00	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-5.10	-		1.00	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-4.83	-		1.00	-	8.00	-	Pass
11b	1Mbps	1	12	2467	-4.77	-		1.00	-	8.00	-	Pass
11b	1Mbps	1	13	2472	-4.91	-		1.00	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-12.23	-		1.00	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-12.05	-		1.00	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-11.95	-		1.00	-	8.00	-	Pass
11g	6Mbps	1	12	2467	-12.05	-		1.00	-	8.00	-	Pass
11g	6Mbps	1	13	2472	-17.50	-		1.00	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-12.29	-		1.00	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-11.36	-		1.00	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-12.07	-		1.00	-	8.00	-	Pass
HT20	MCS0	1	12	2467	-12.80	-		1.00	-	8.00	-	Pass
HT20	MCS0	1	13	2472	-18.85	-		1.00	-	8.00	-	Pass
HT40	MCS0	1	3	2422	-17.33	-		1.00	-	8.00	-	Pass
HT40	MCS0	1	6	2437	-14.94	-		1.00	-	8.00	-	Pass
HT40	MCS0	1	9	2452	-15.08	-		1.00	-	8.00	-	Pass
HT40	MCS0	1	10	2457	-15.40	-		1.00	-	8.00	-	Pass
HT40	MCS0	1	11	2462	-21.00	-		1.00	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.

**6dB and 99% Occupied Bandwidth**


<802.11b>

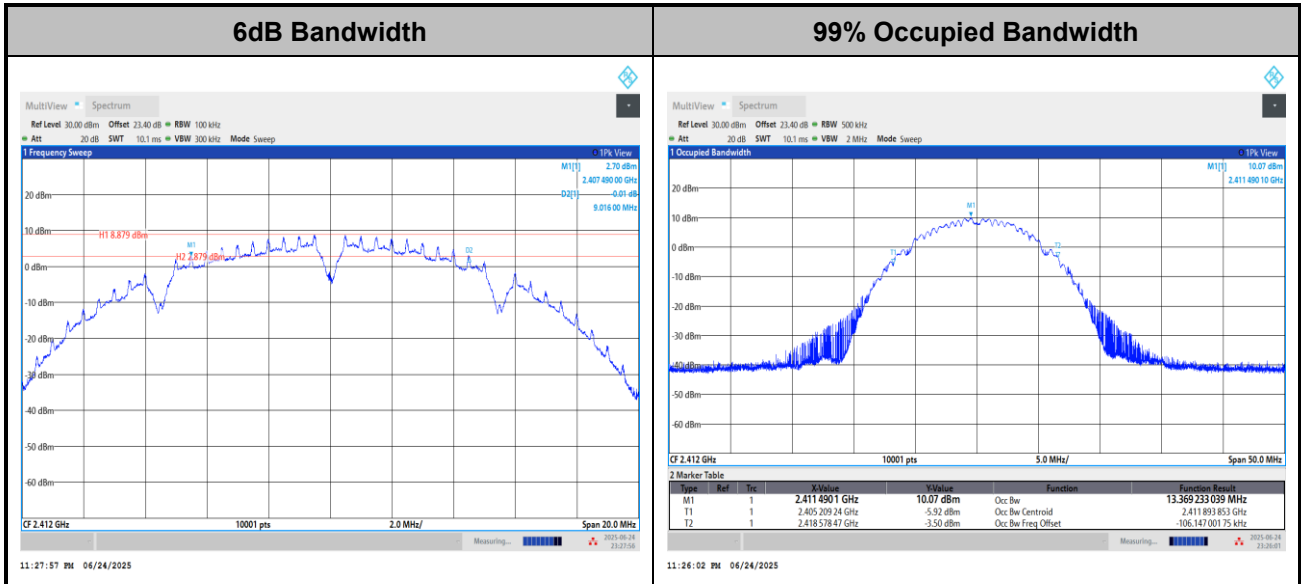

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11g>

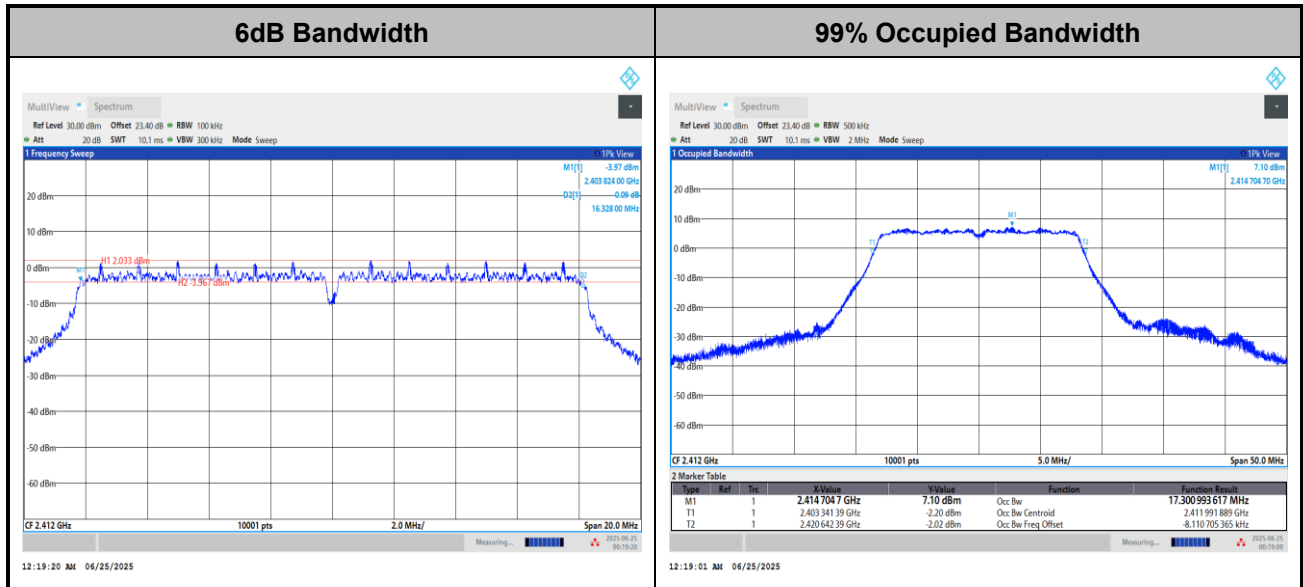

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11gN20>

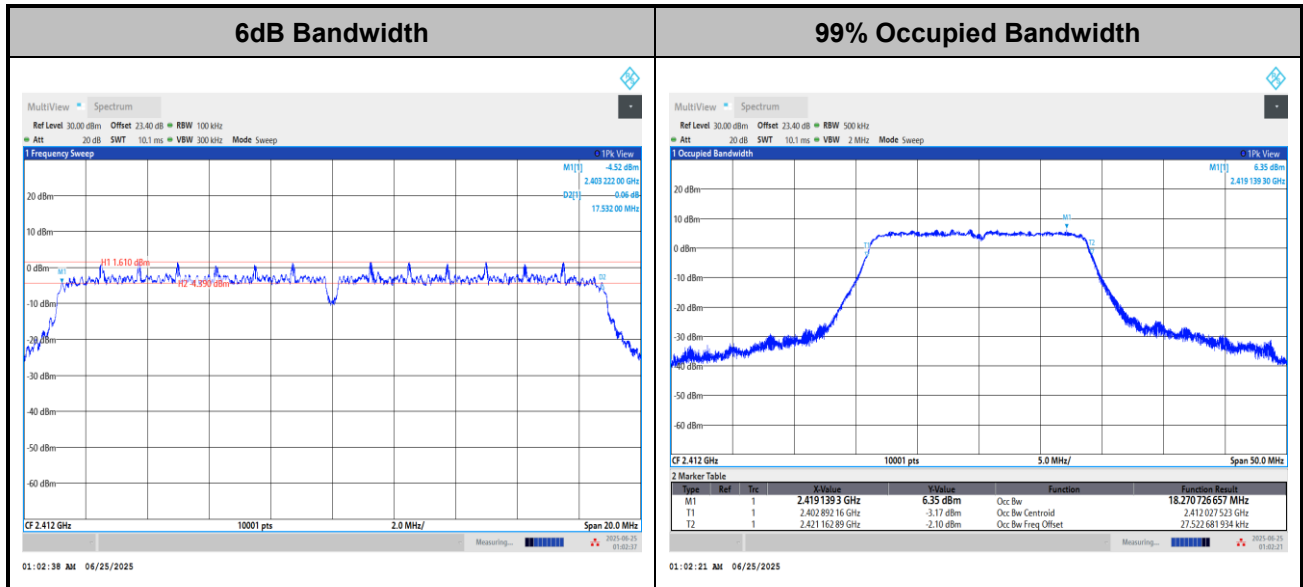

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11gN40>

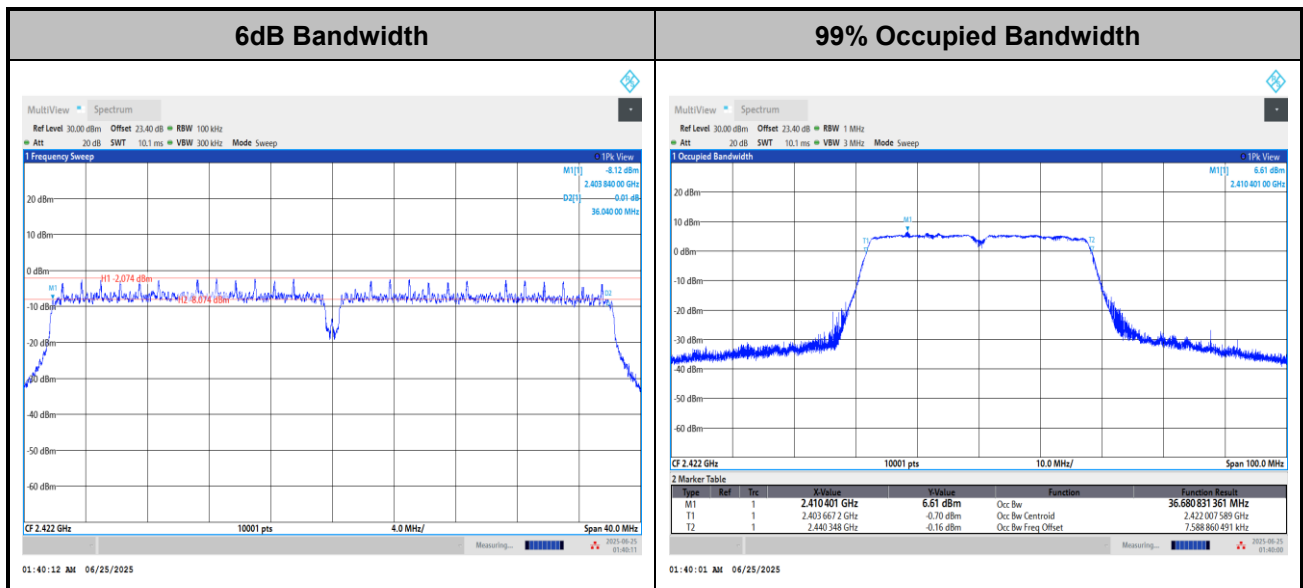


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Power Spectral Density(dBm/3kHz)

<802.11b>

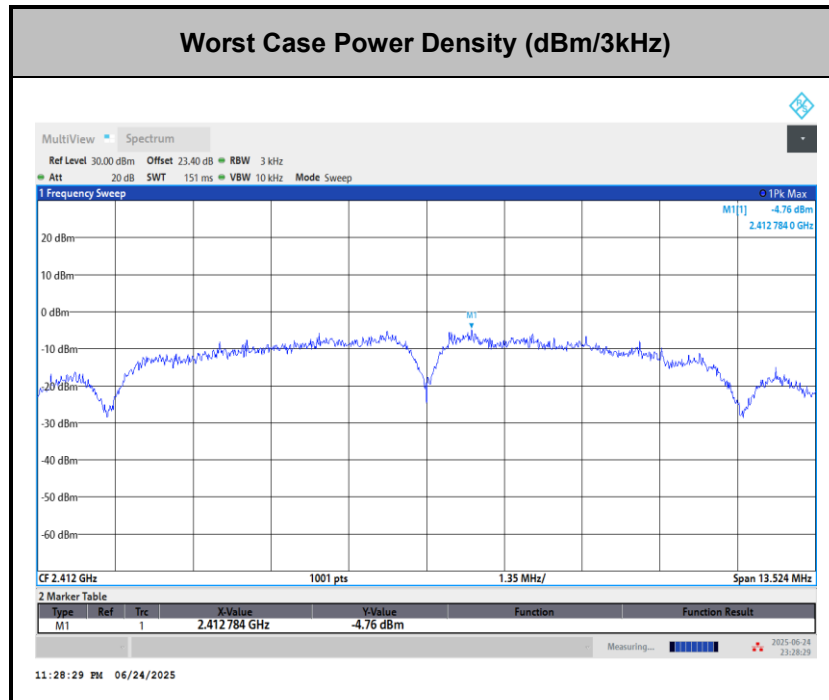




<802.11g>

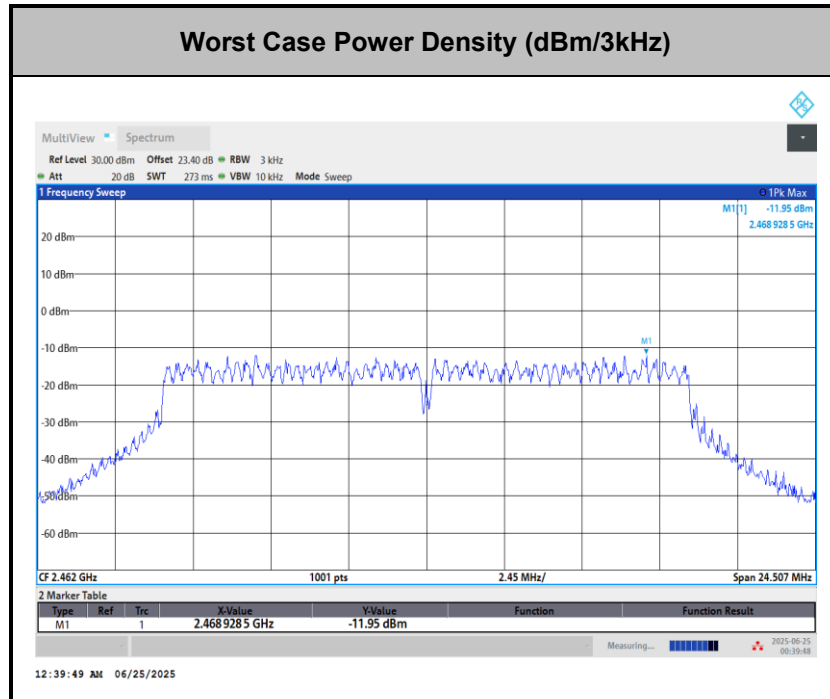




<802.11gN20>

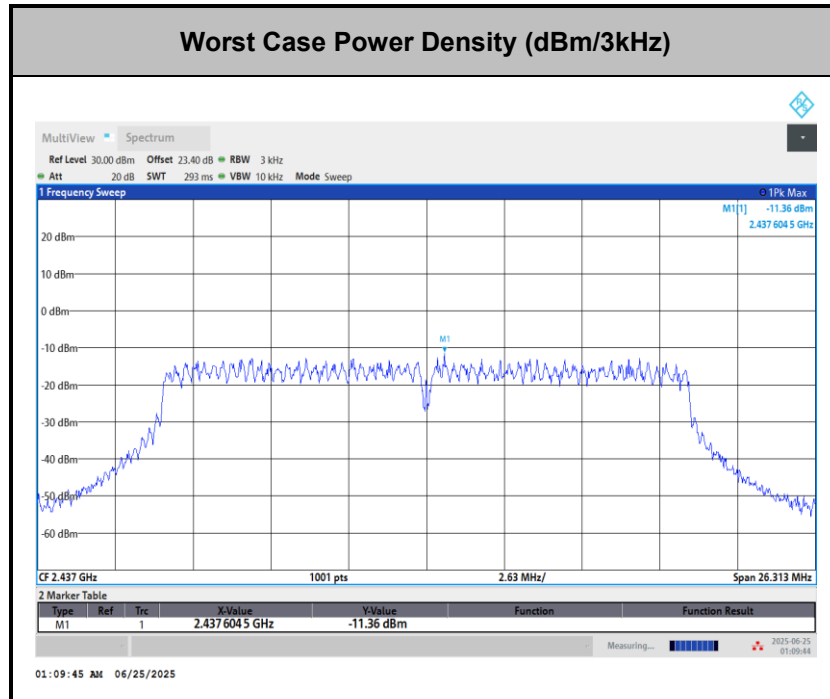



<802.11gN40>

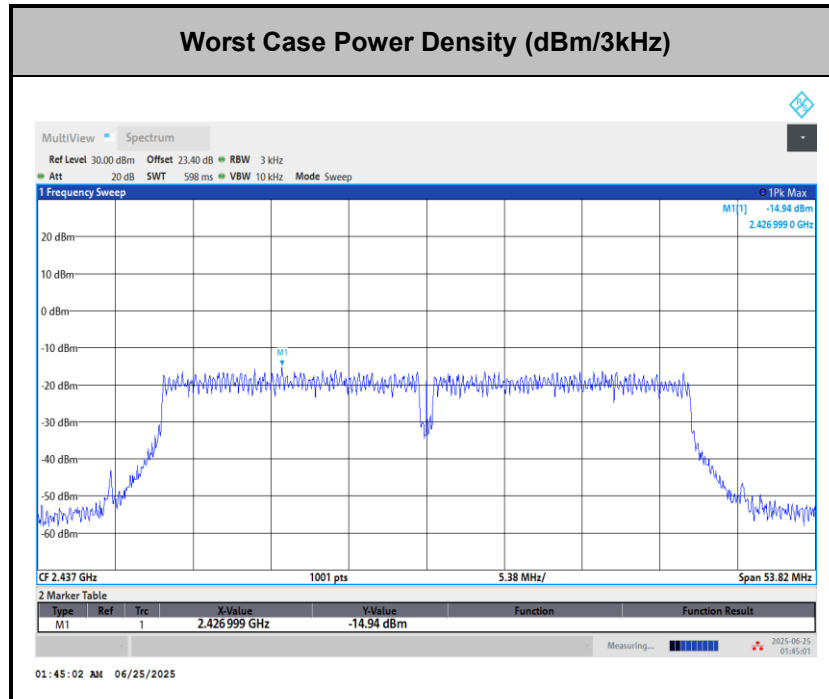


**Band Edges and Spurious Emission**

Number of TX = 1, Ant. 1 (Measured)


Test Mode : 802.11b

Test Channel : 01


100kHz PSD reference Level

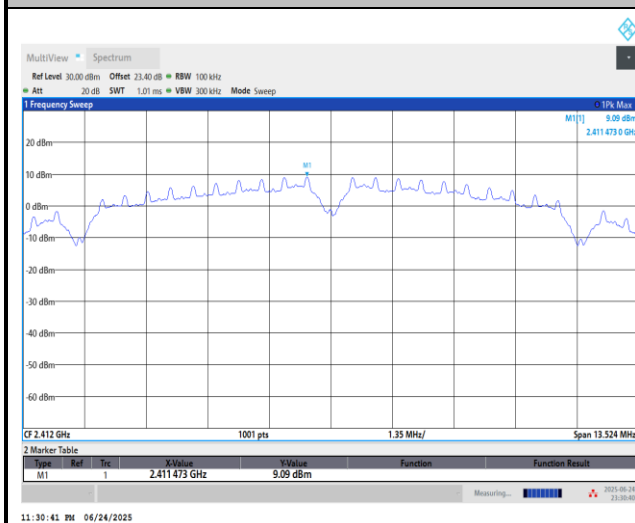


Channel 01 Plot

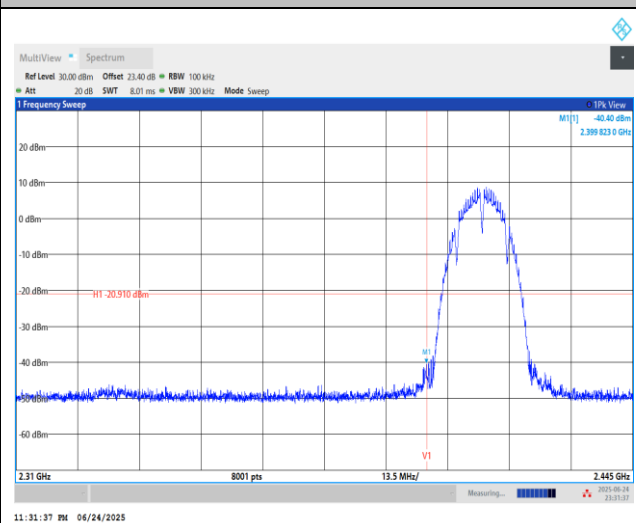

Spurious Emission 30MHz~1GHz

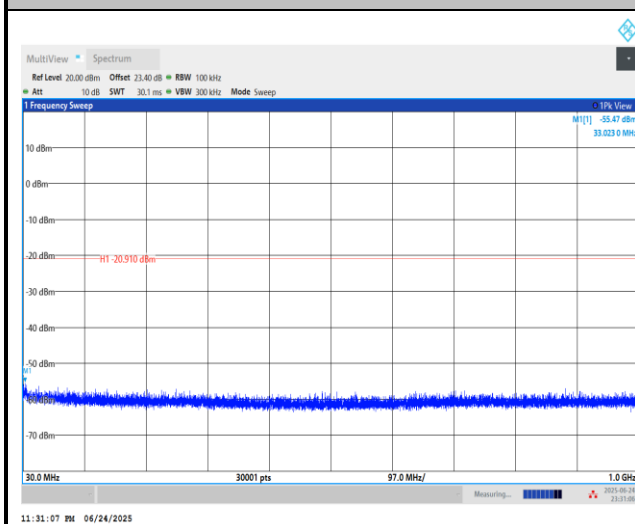

Spurious Emission 1GHz~26.5GHz

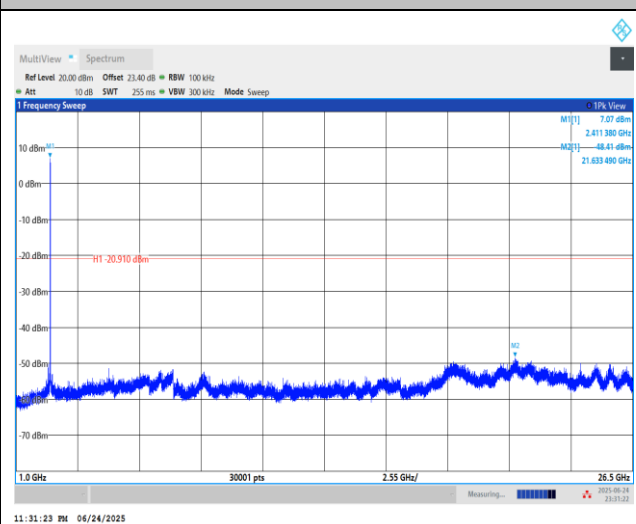




Test Mode : 802.11b


Test Channel : 06

100kHz PSD reference Level

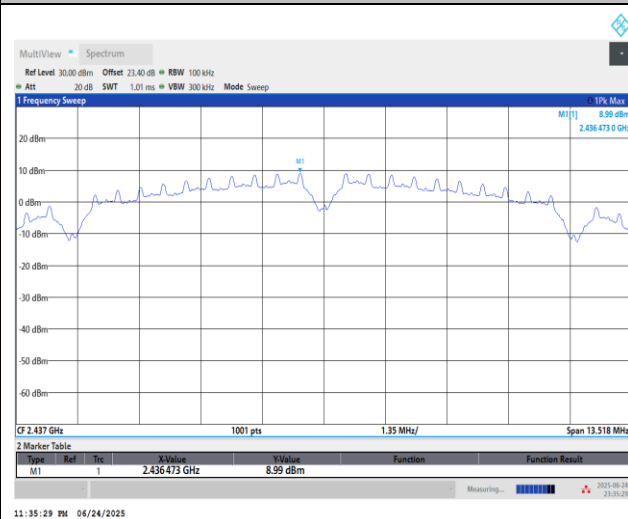


Channel 06 Plot

Spurious Emission 30MHz~1GHz

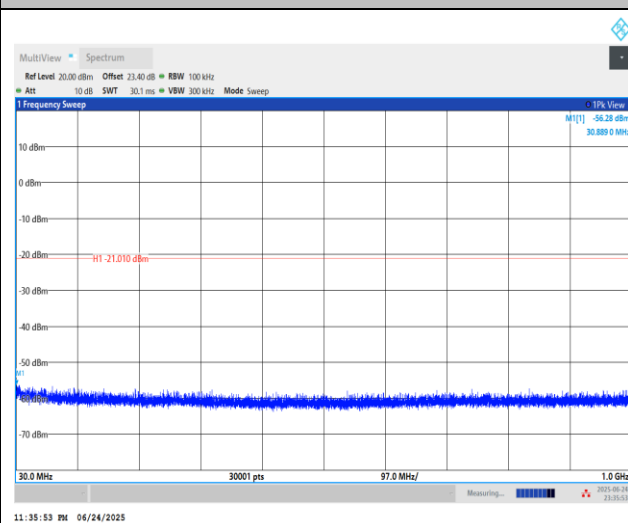

Spurious Emission 1GHz~26.5GHz

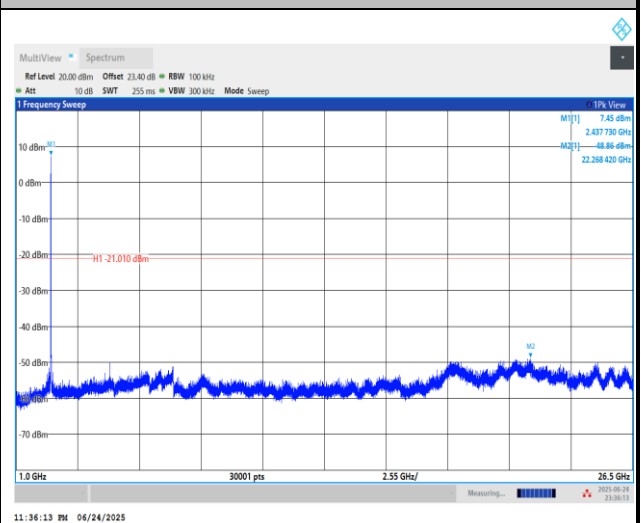





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

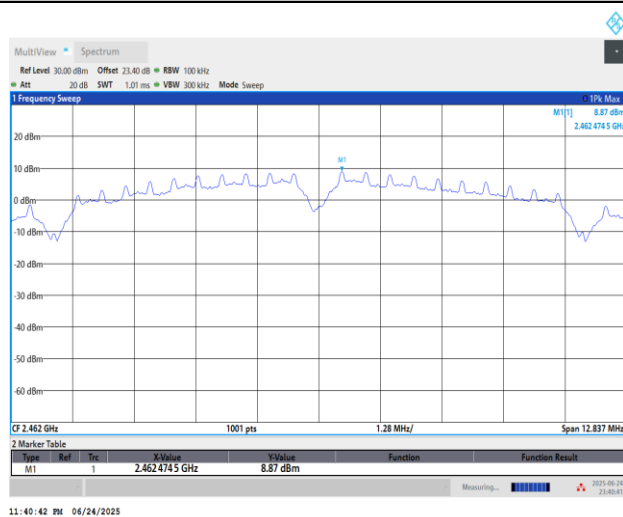


Channel 11 Plot

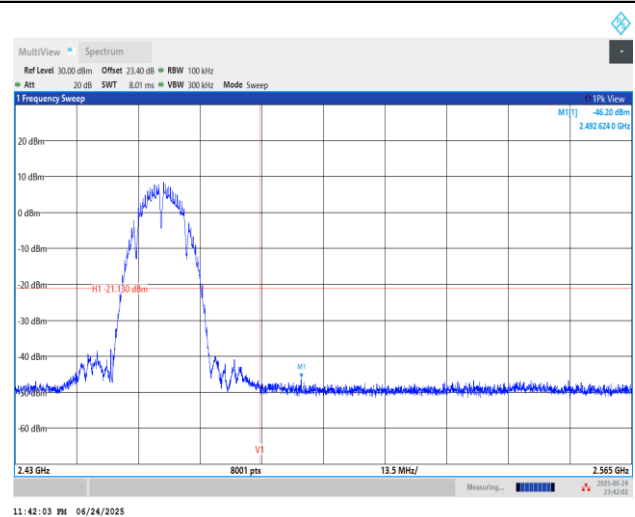

Spurious Emission 30MHz~1GHz

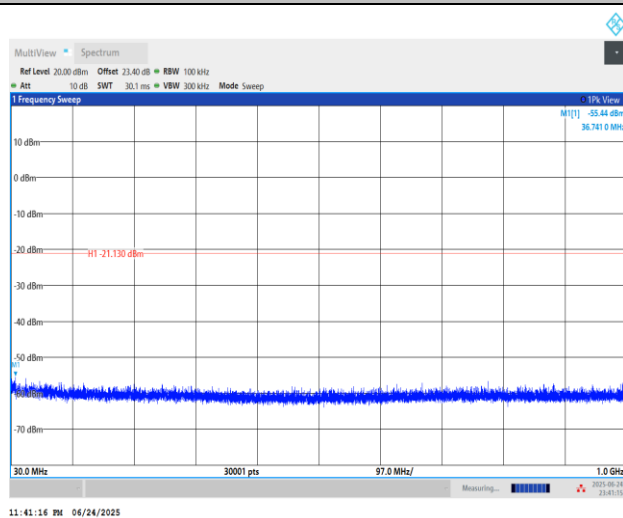

Spurious Emission 1GHz~26.5GHz

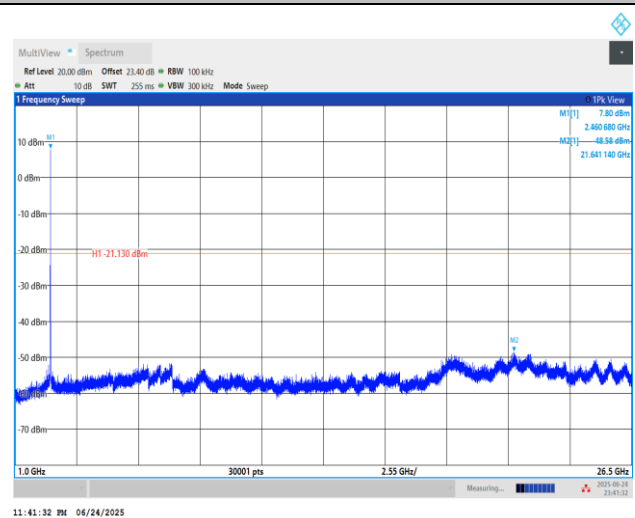





Test Mode : 802.11b

Test Channel : 12


100kHz PSD reference Level

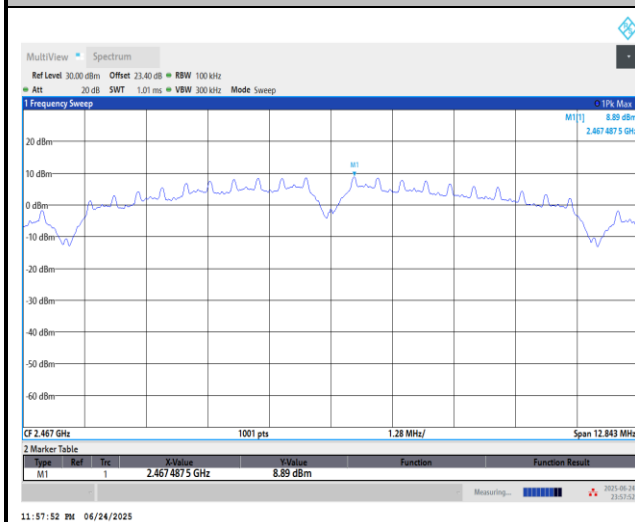


Channel 12 Plot

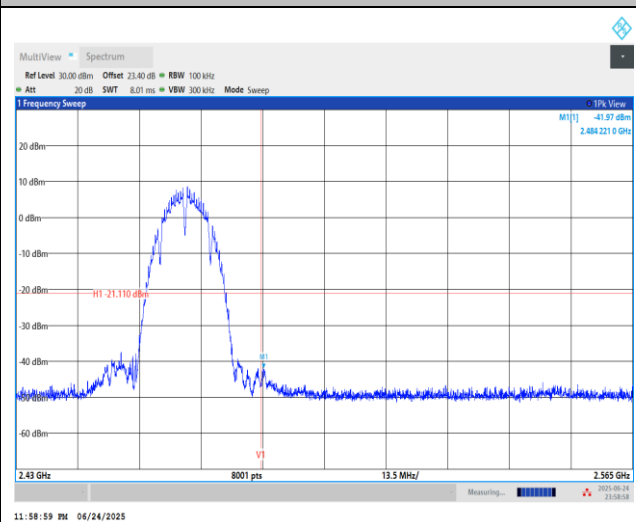

Spurious Emission 30MHz~1GHz

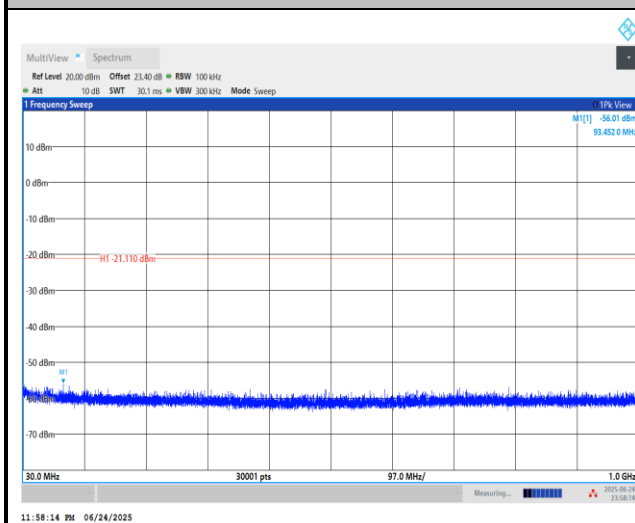

Spurious Emission 1GHz~26.5GHz

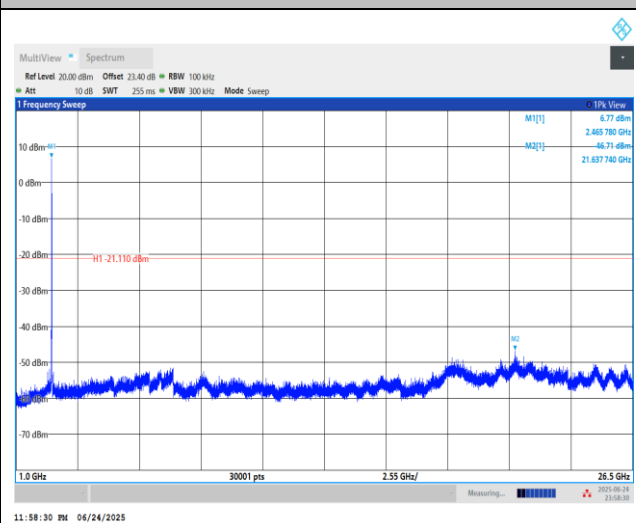





Test Mode : 802.11b

Test Channel : 13


100kHz PSD reference Level

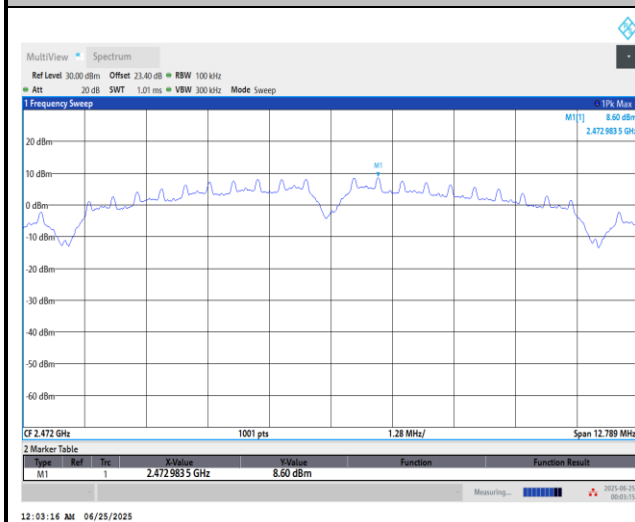


Channel 13 Plot

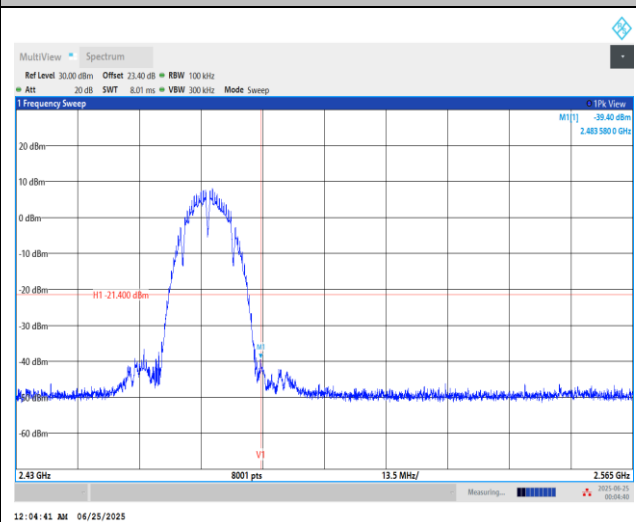

Spurious Emission 30MHz~1GHz

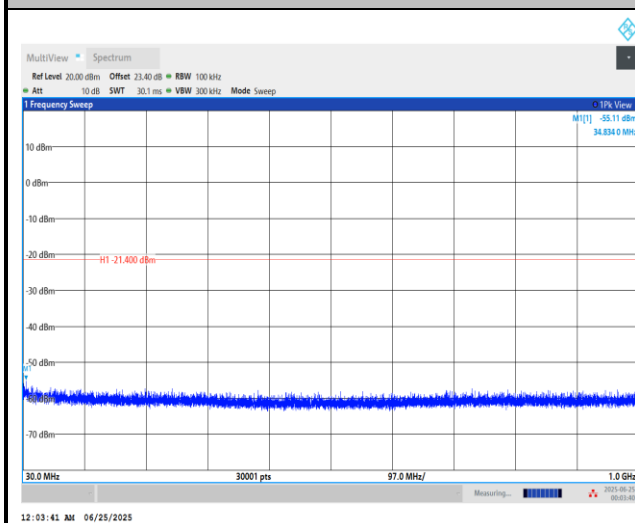

Spurious Emission 1GHz~26.5GHz

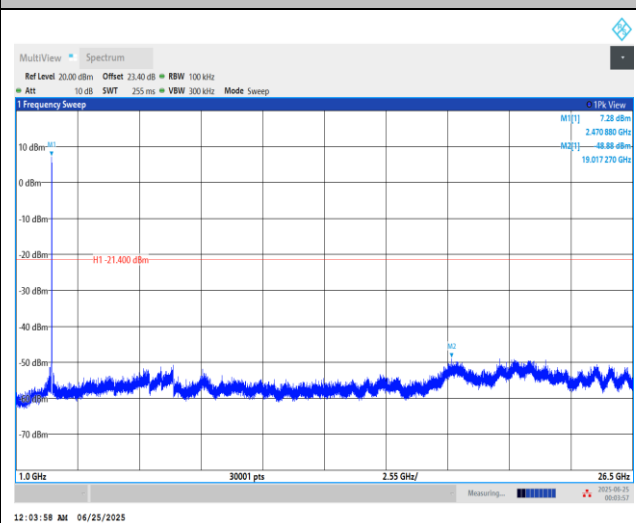





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

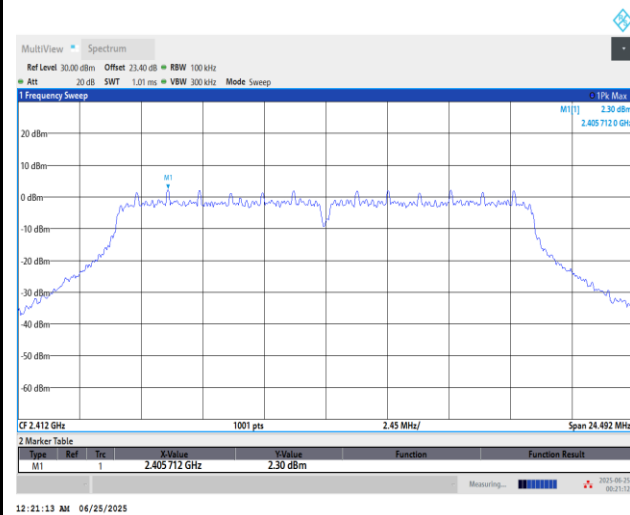


Channel 01 Plot

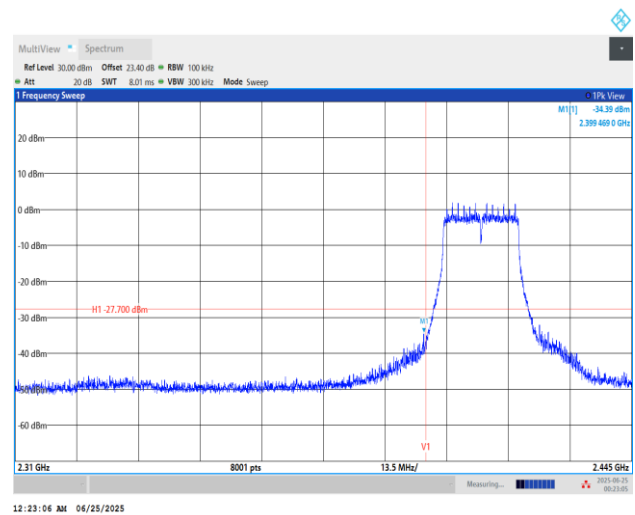

Spurious Emission 30MHz~1GHz

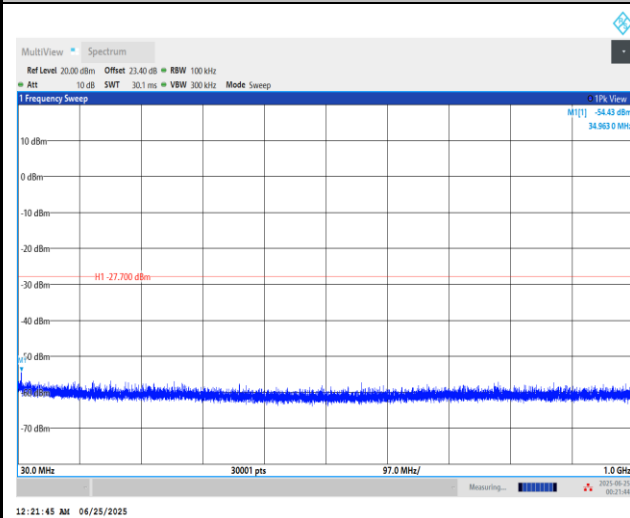

Spurious Emission 1GHz~26.5GHz

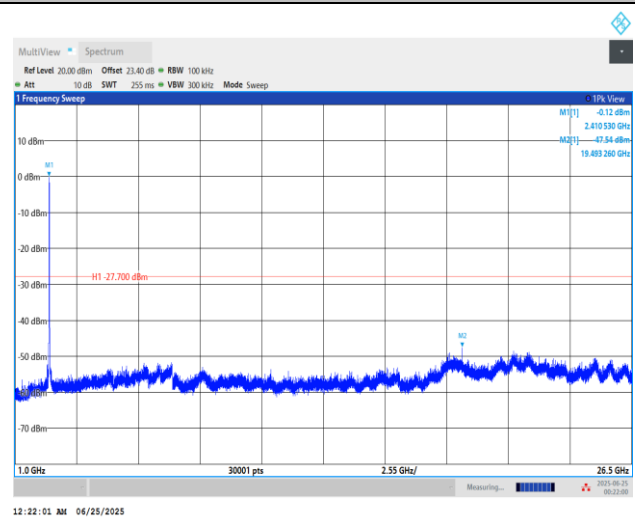




Test Mode : 802.11g


Test Channel : 06

100kHz PSD reference Level

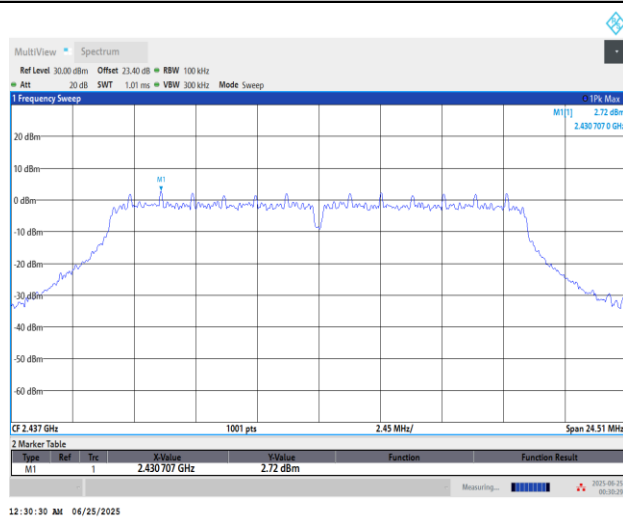


Channel 06 Plot

Spurious Emission 30MHz~1GHz

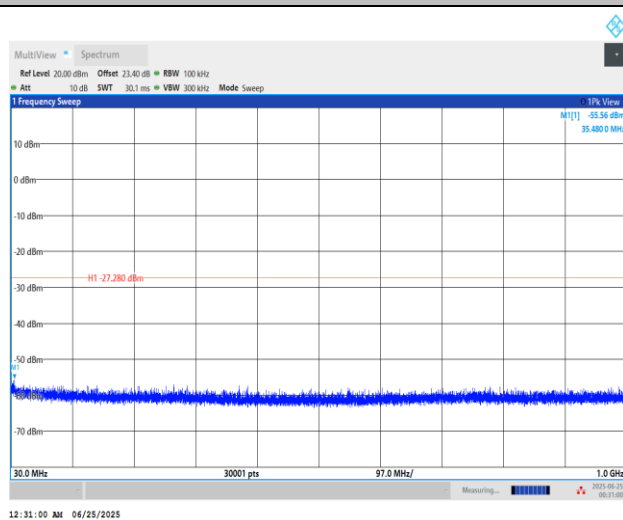

Spurious Emission 1GHz~26.5GHz

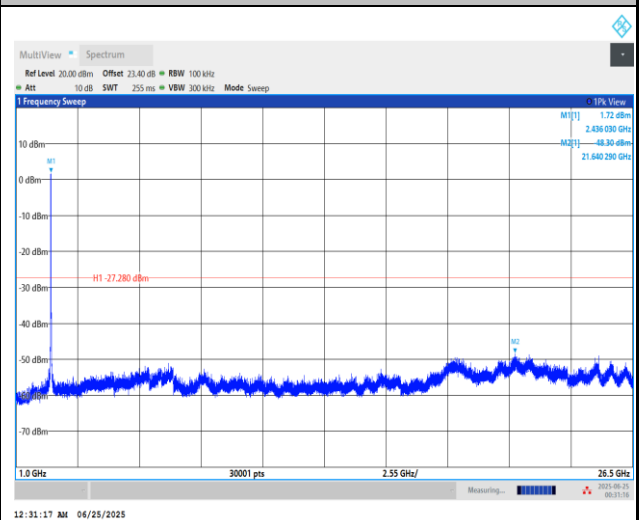





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

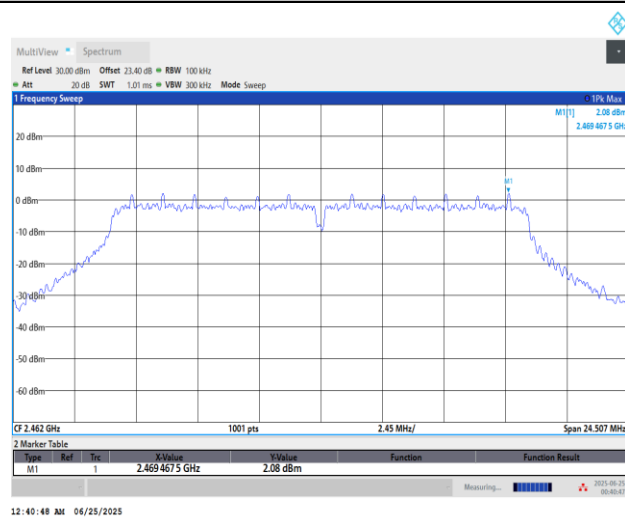


Channel 11 Plot

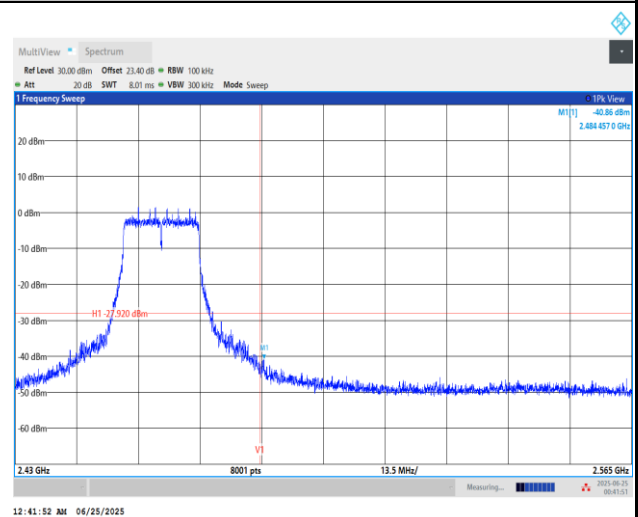

Spurious Emission 30MHz~1GHz

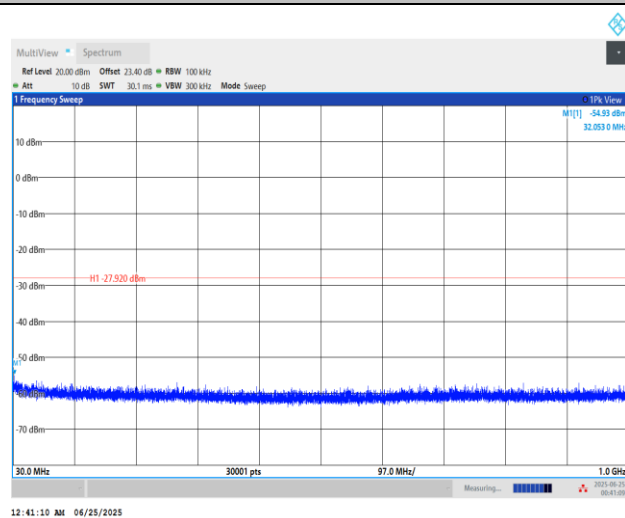

Spurious Emission 1GHz~26.5GHz

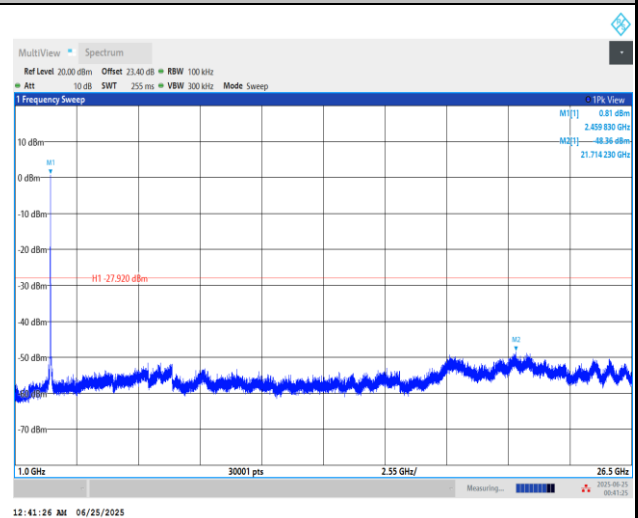





Test Mode : 802.11g

Test Channel : 12


100kHz PSD reference Level

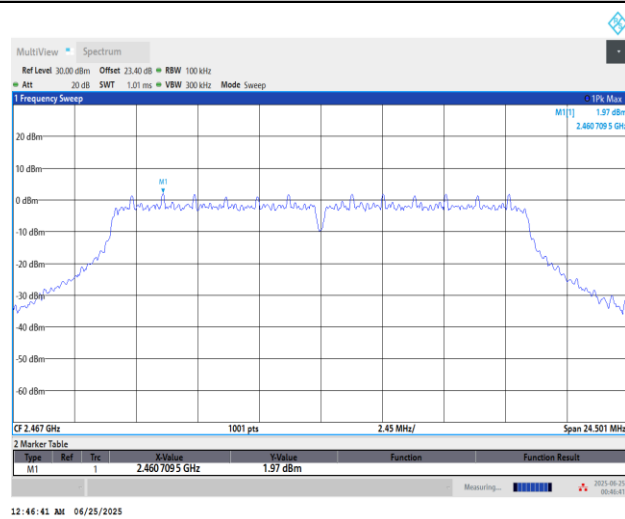


Channel 12 Plot

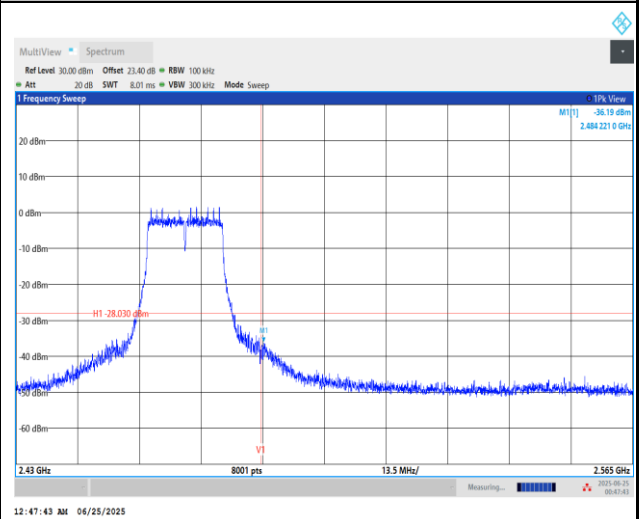

Spurious Emission 30MHz~1GHz

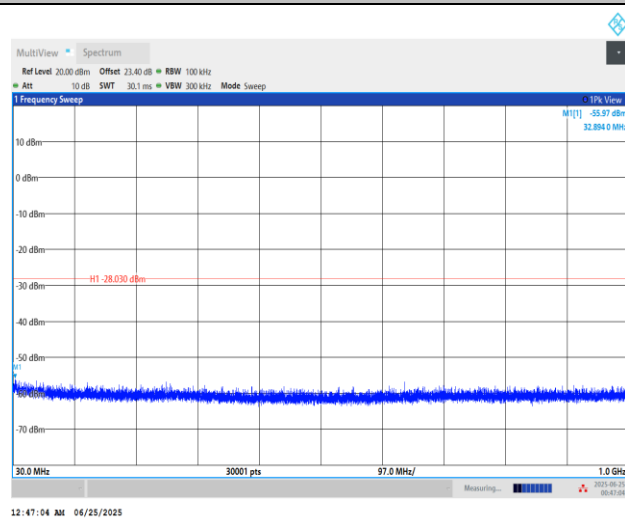

Spurious Emission 1GHz~26.5GHz

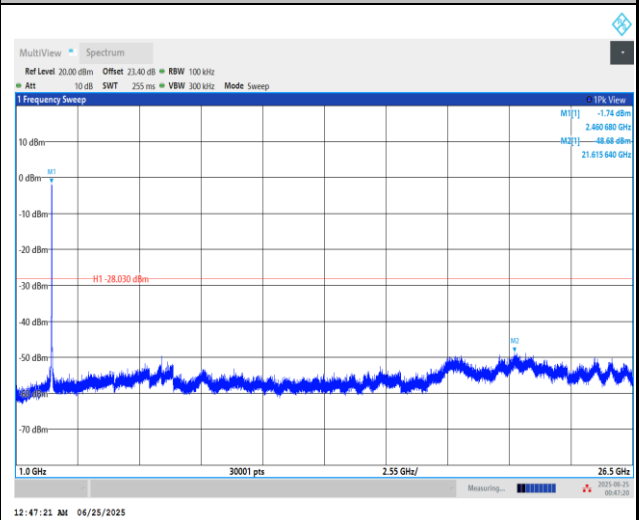





Test Mode : 802.11g

Test Channel : 13


100kHz PSD reference Level

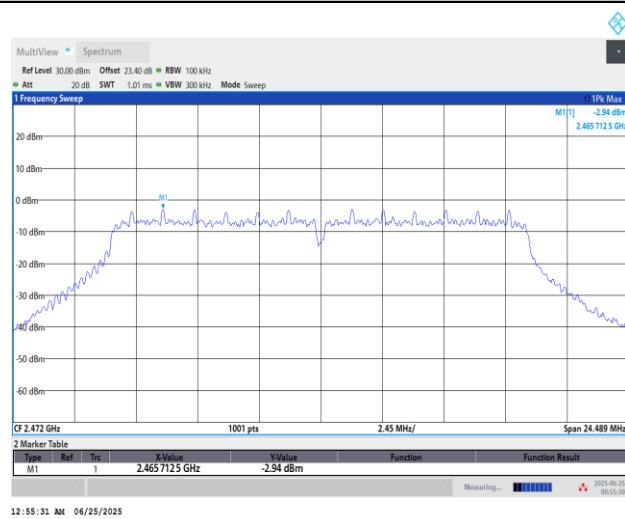


Channel 13 Plot

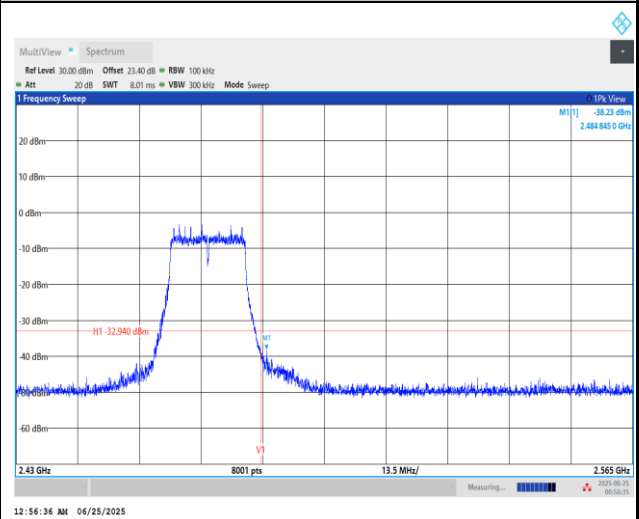

Spurious Emission 30MHz~1GHz

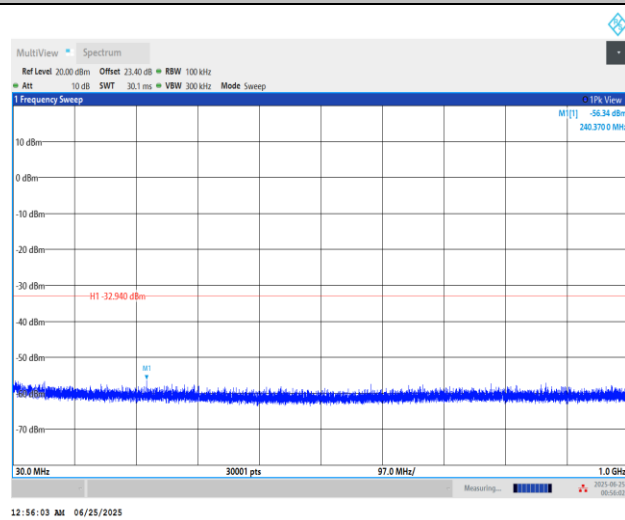

Spurious Emission 1GHz~26.5GHz

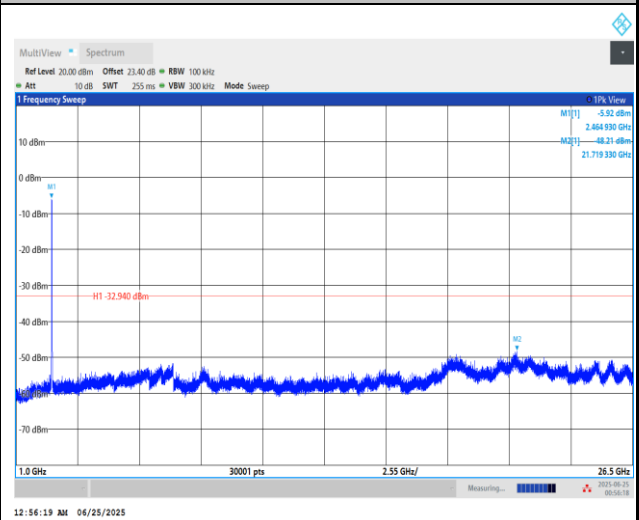





Test Mode : 802.11gN20

Test Channel : 01


100kHz PSD reference Level

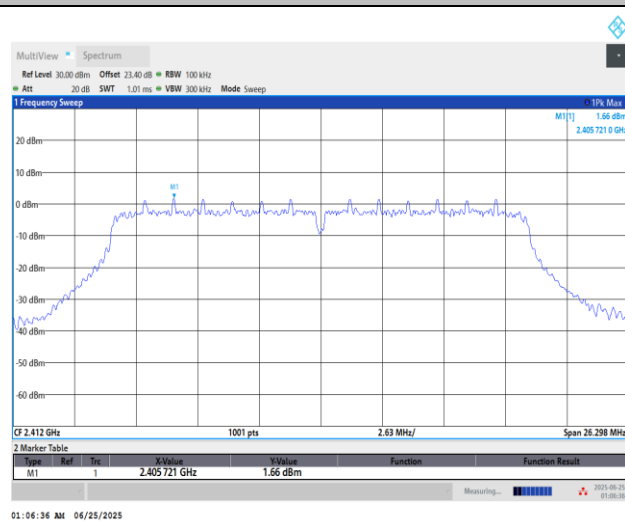


Channel 01 Plot

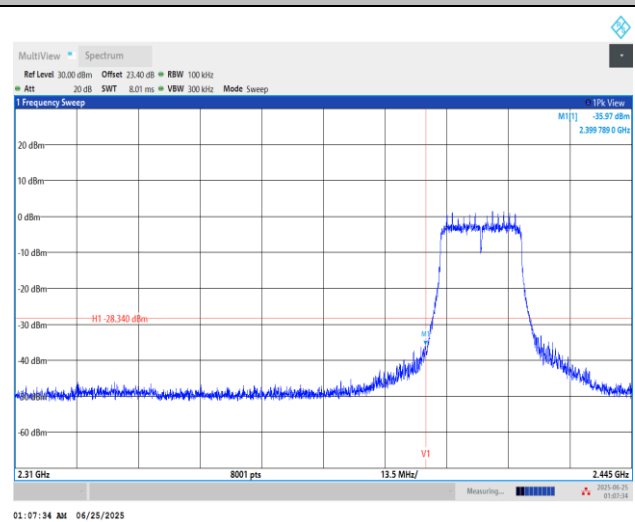

Spurious Emission 30MHz~1GHz

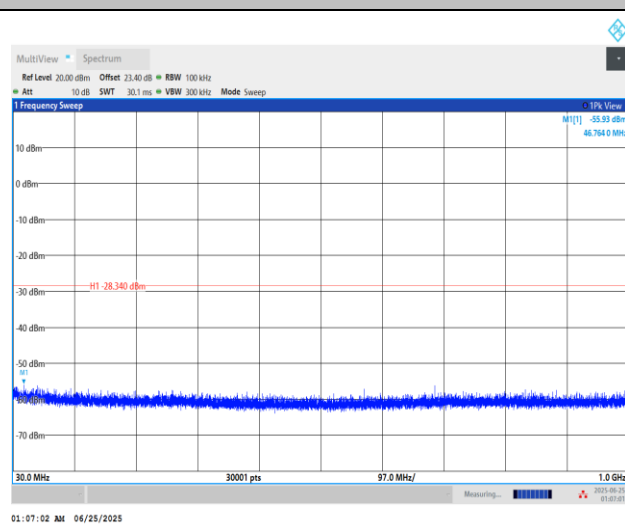

Spurious Emission 1GHz~26.5GHz

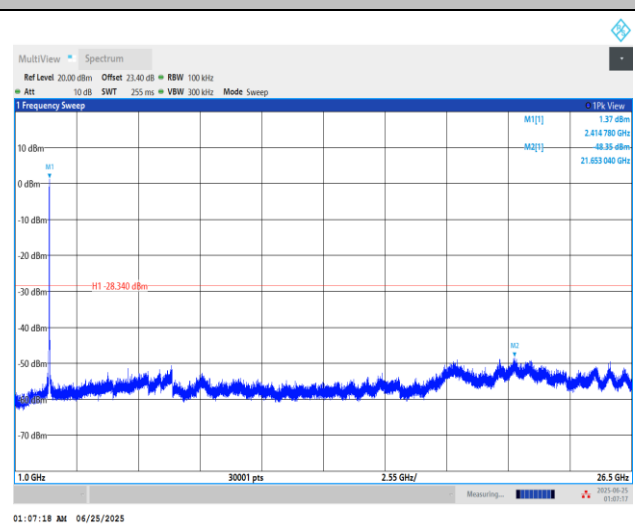




Test Mode : 802.11gN20


Test Channel : 06

100kHz PSD reference Level

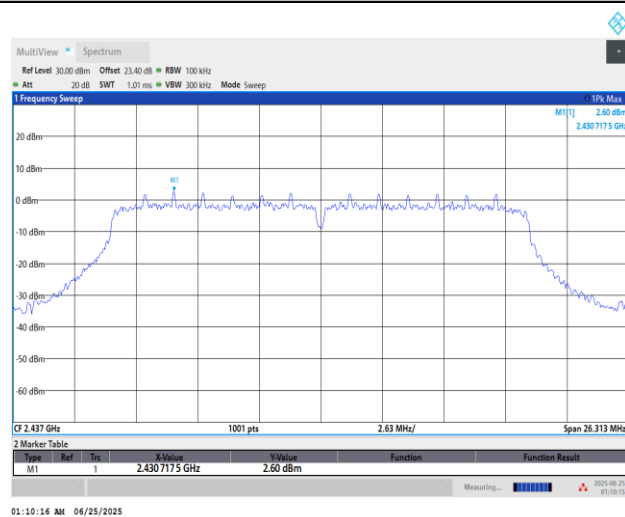


Channel 06 Plot

Spurious Emission 30MHz~1GHz

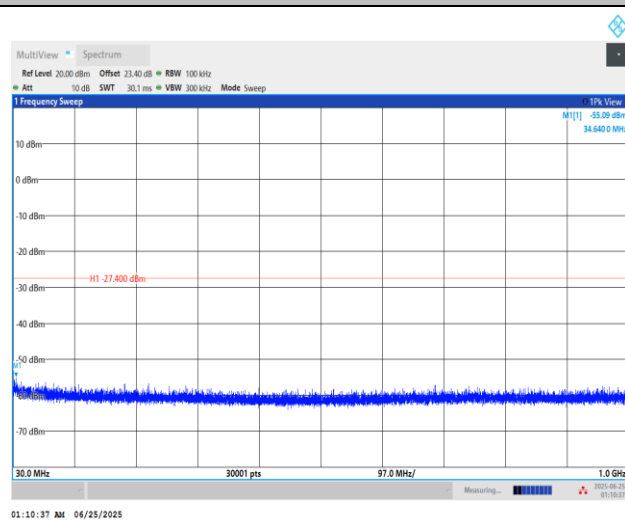

Spurious Emission 1GHz~26.5GHz

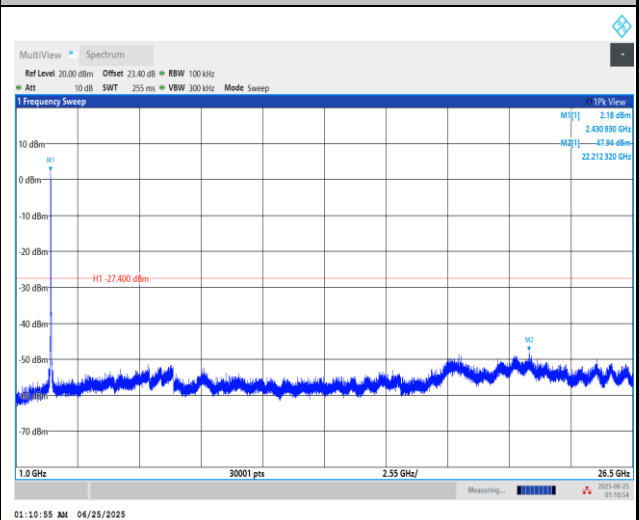





Test Mode : 802.11gN20

Test Channel : 11


100kHz PSD reference Level

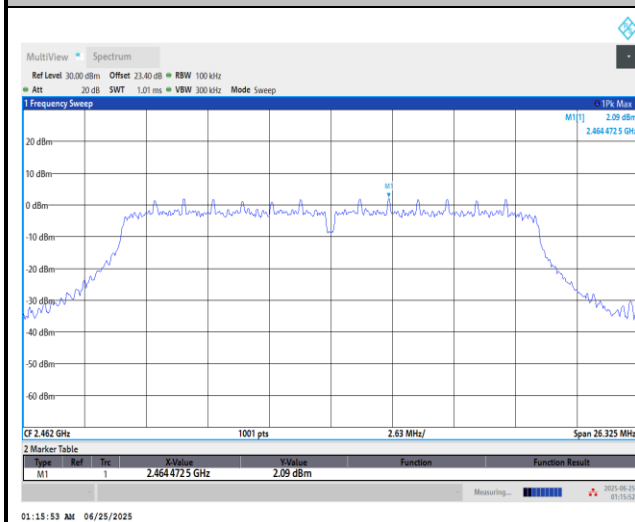


Channel 11 Plot

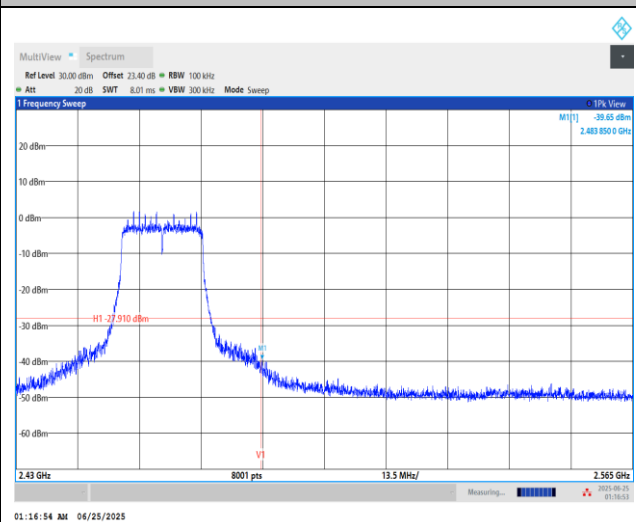

Spurious Emission 30MHz~1GHz

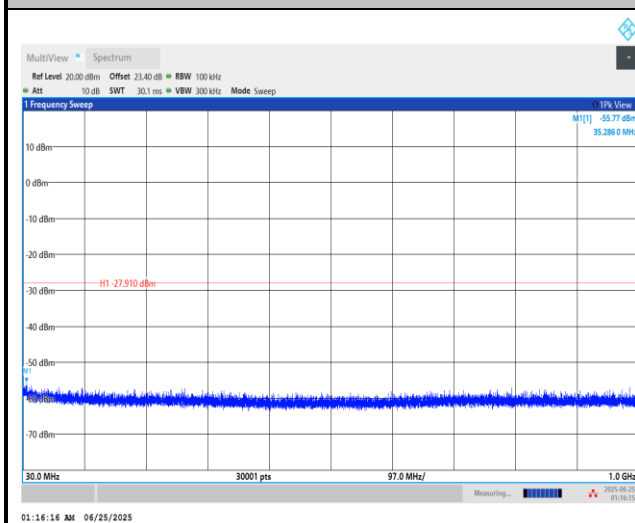

Spurious Emission 1GHz~26.5GHz

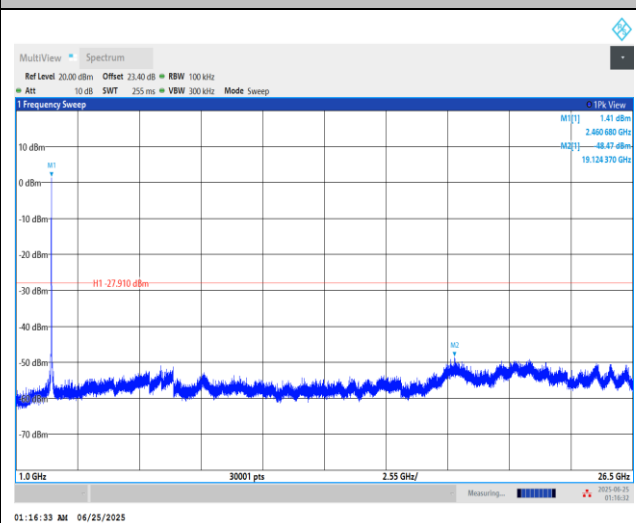





Test Mode : 802.11gN20

Test Channel : 12


100kHz PSD reference Level

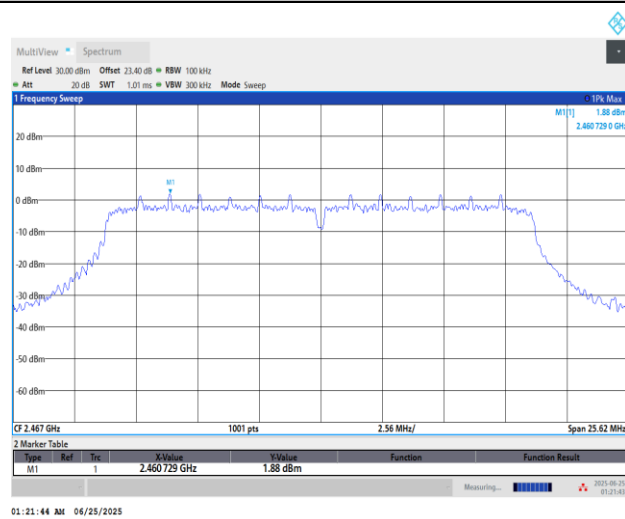


Channel 12 Plot

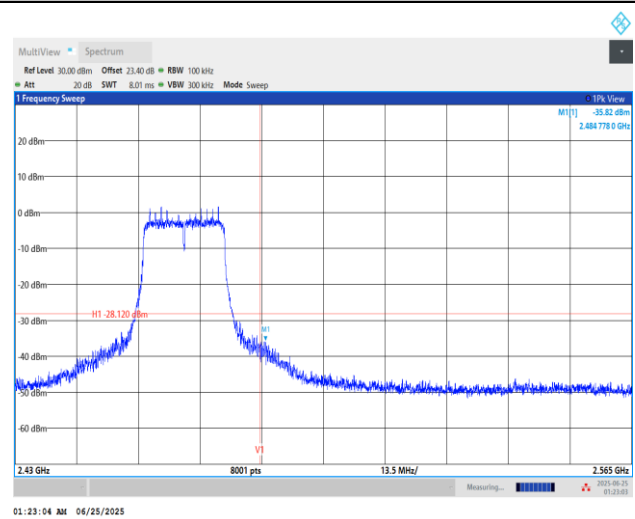

Spurious Emission 30MHz~1GHz

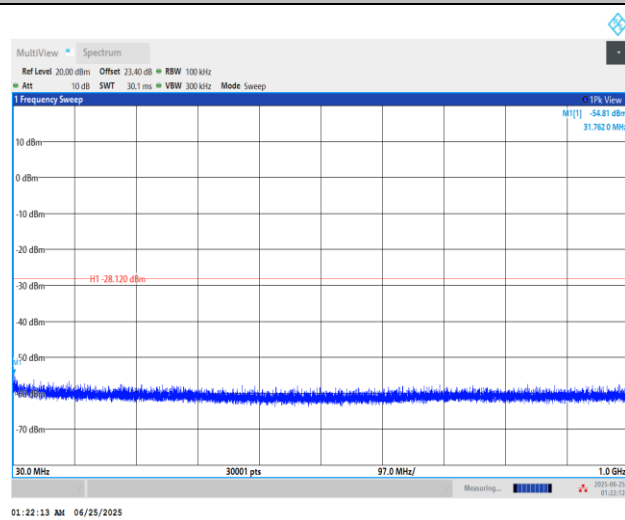

Spurious Emission 1GHz~26.5GHz

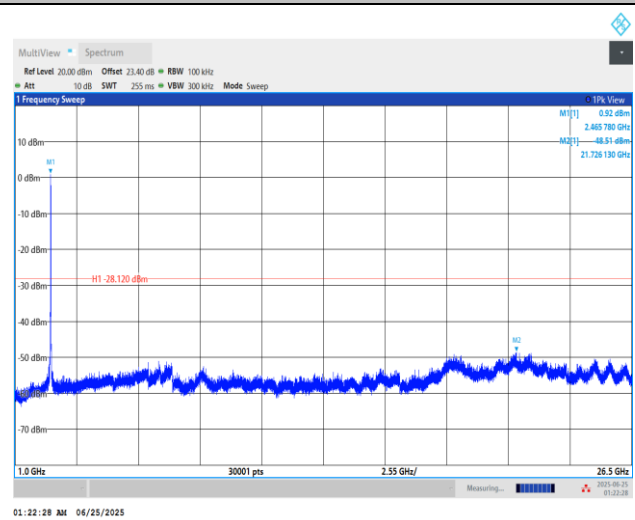





Test Mode : 802.11gN20

Test Channel : 13


100kHz PSD reference Level

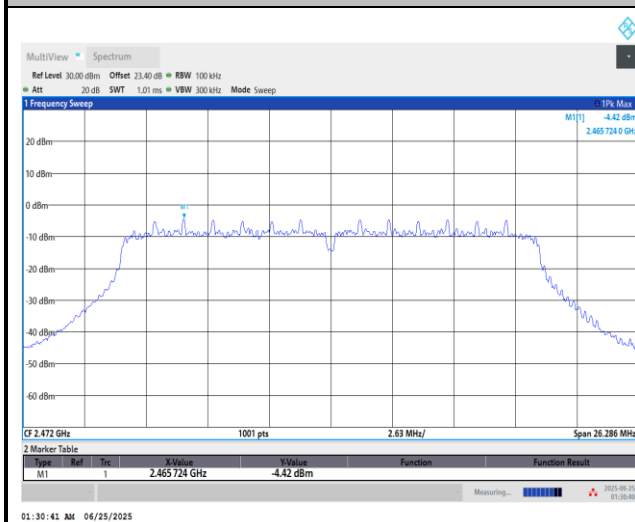


Channel 13 Plot

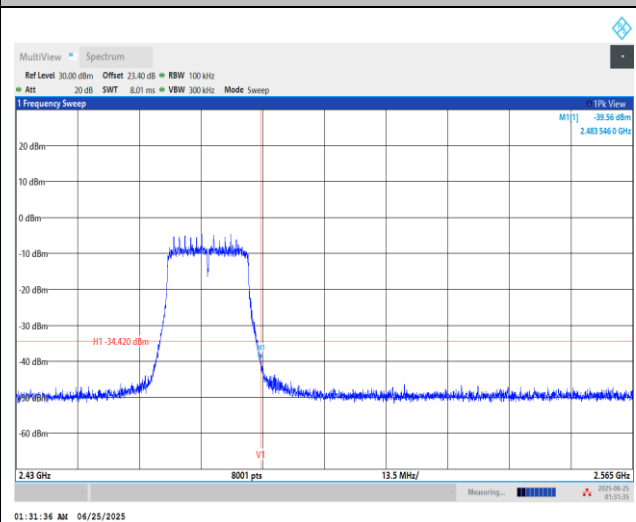

Spurious Emission 30MHz~1GHz

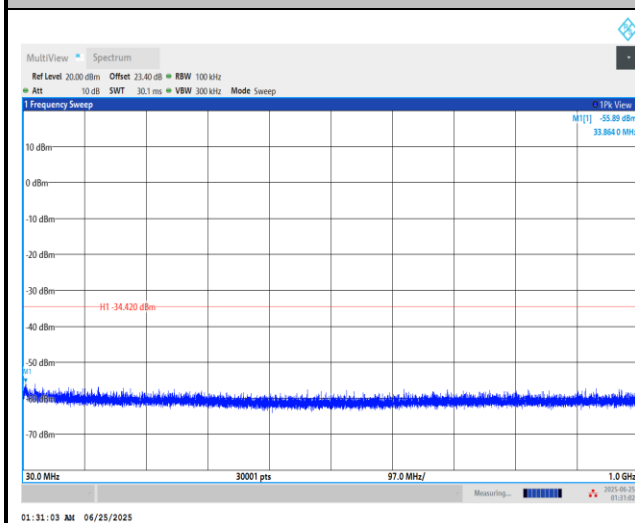

Spurious Emission 1GHz~26.5GHz

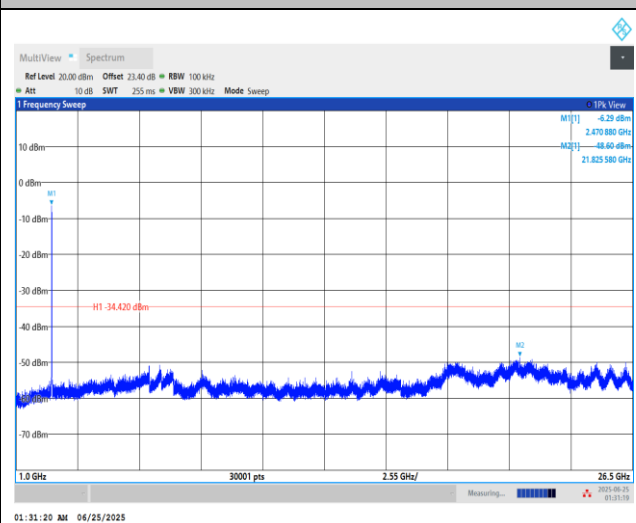





Test Mode : 802.11gN40

Test Channel : 03


100kHz PSD reference Level

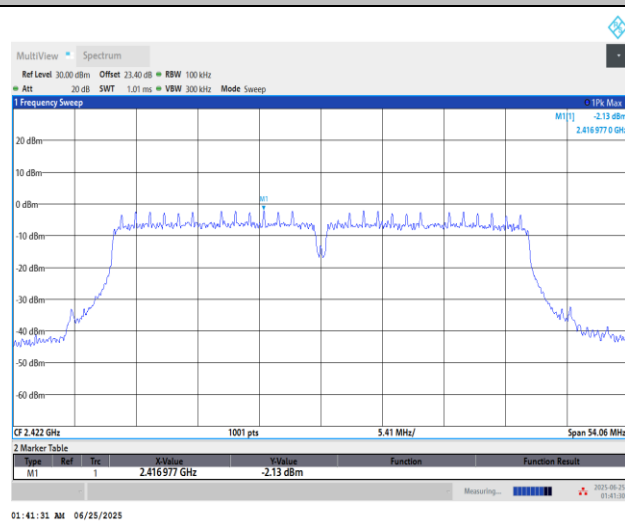


Channel 03 Plot

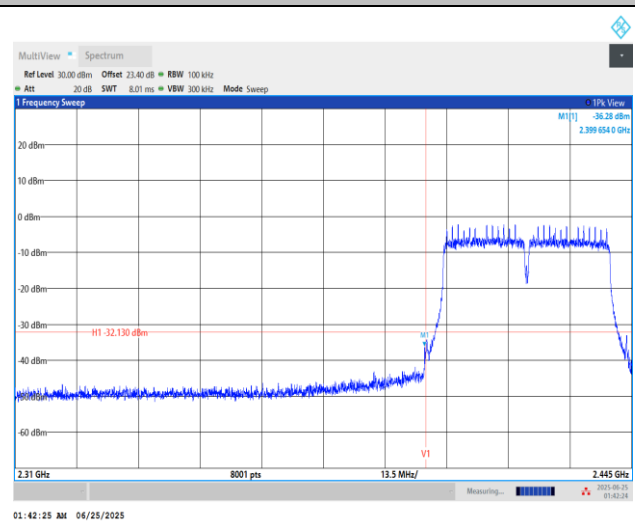

Spurious Emission 30MHz~1GHz

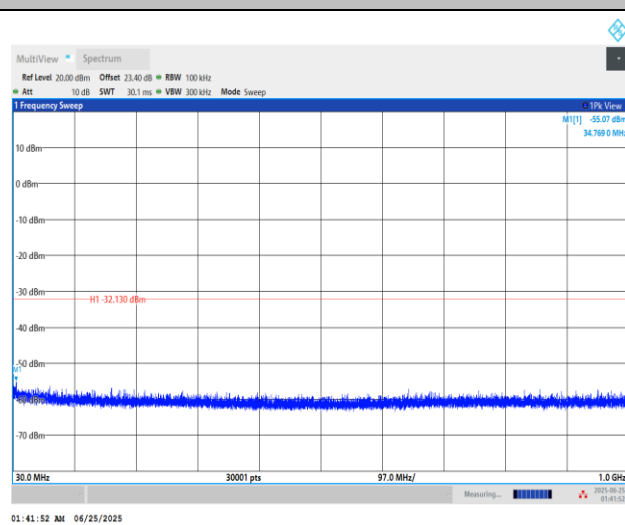

Spurious Emission 1GHz~26.5GHz

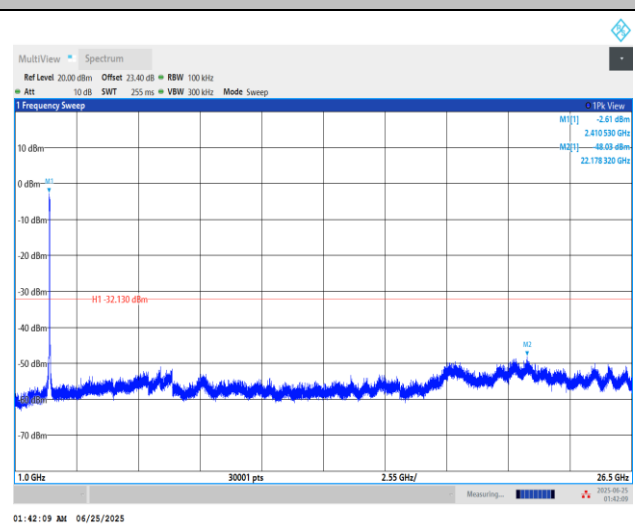




Test Mode : 802.11gN40


Test Channel : 06

100kHz PSD reference Level

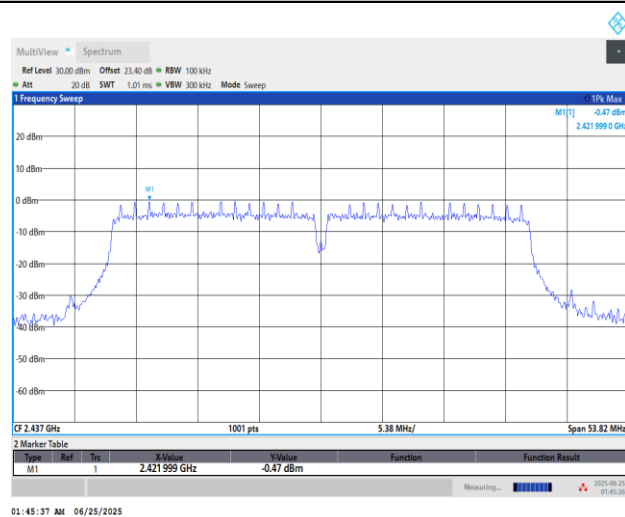


Channel 06 Plot

Spurious Emission 30MHz~1GHz

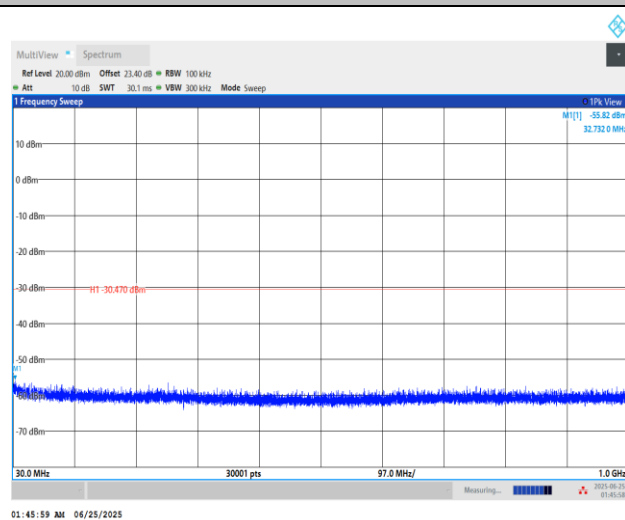

Spurious Emission 1GHz~26.5GHz

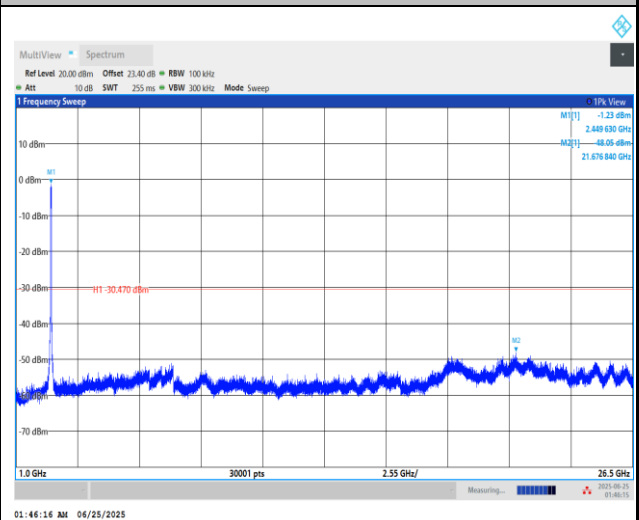





Test Mode : 802.11gN40

Test Channel : 09


100kHz PSD reference Level

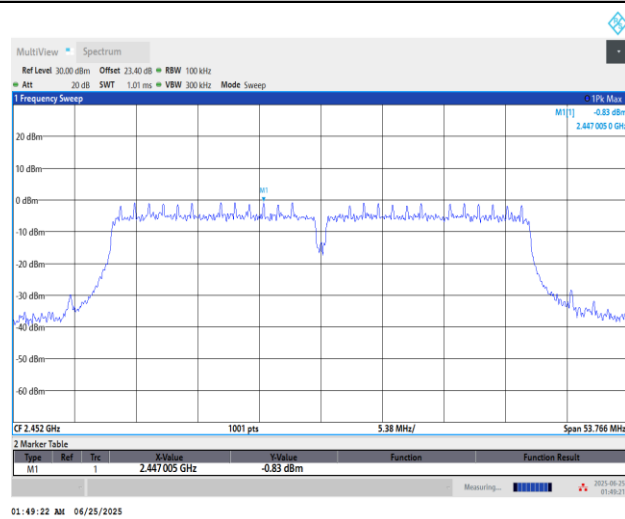


Channel 09 Plot

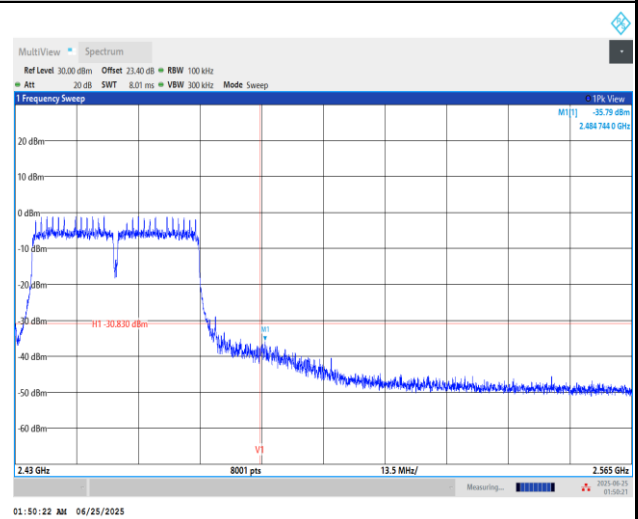

Spurious Emission 30MHz~1GHz

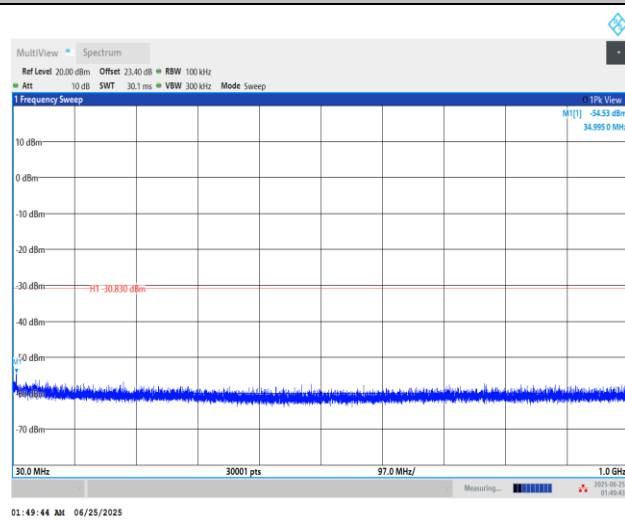

Spurious Emission 1GHz~26.5GHz

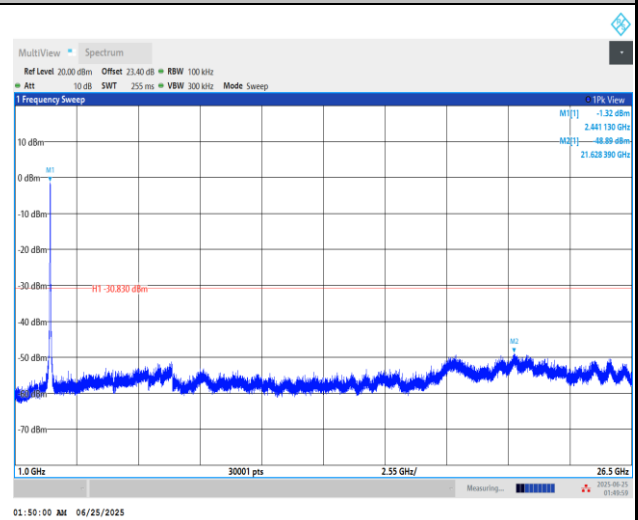





Test Mode : 802.11gN40

Test Channel : 10


100kHz PSD reference Level

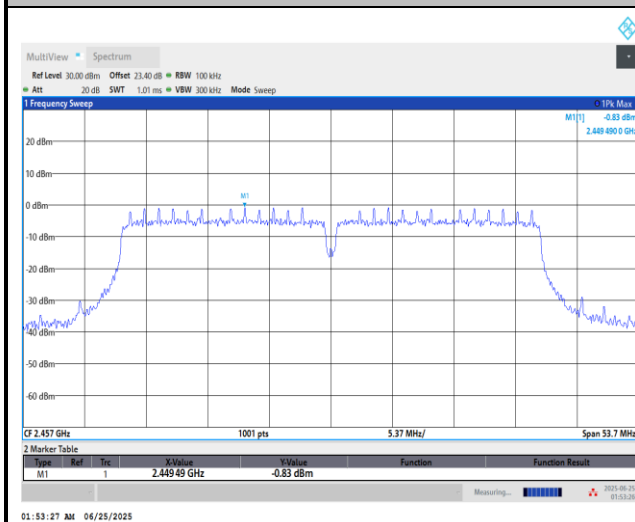


Channel 10 Plot

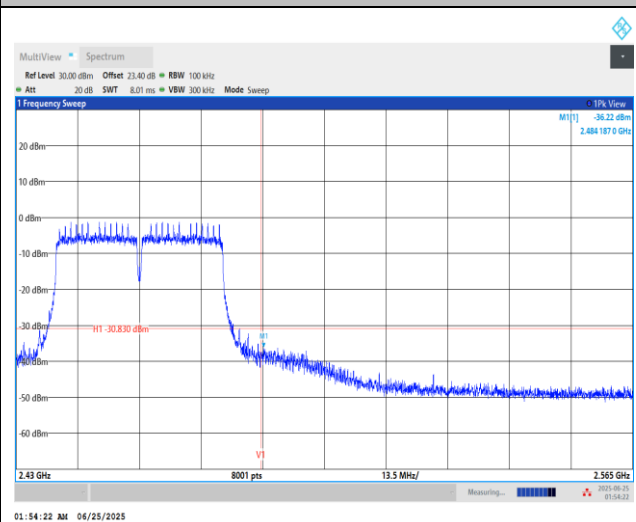

Spurious Emission 30MHz~1GHz

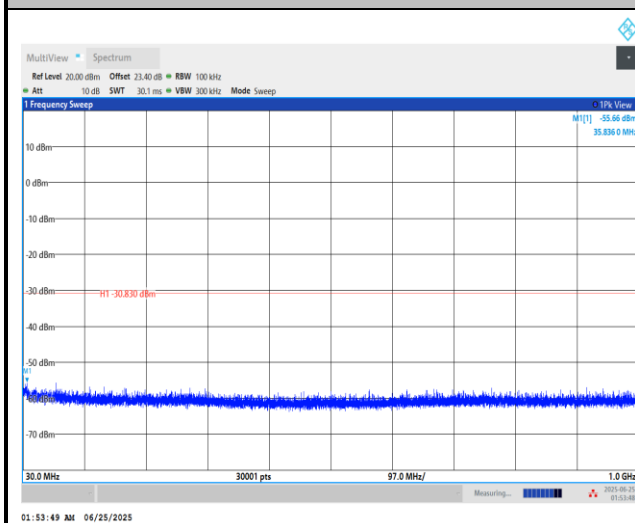

Spurious Emission 1GHz~26.5GHz

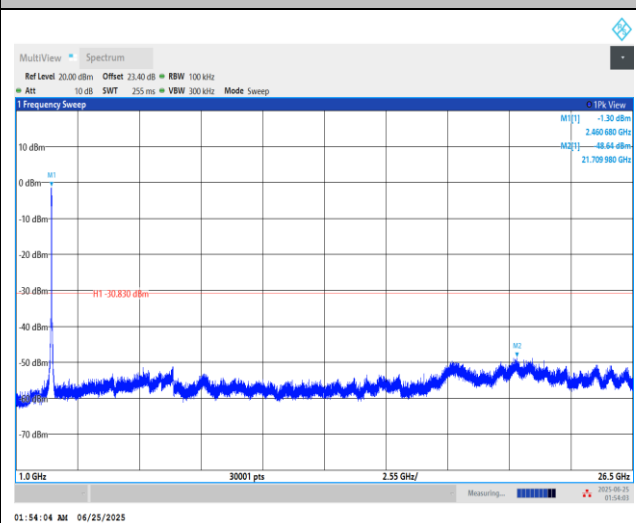





Test Mode : 802.11gN40

Test Channel : 11


100kHz PSD reference Level

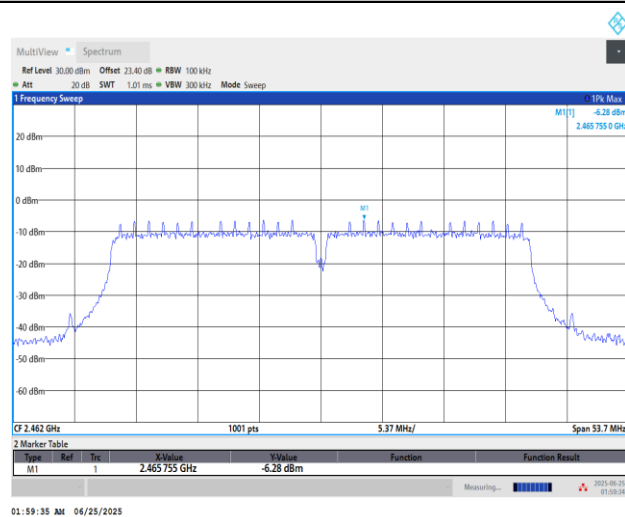


Channel 11 Plot

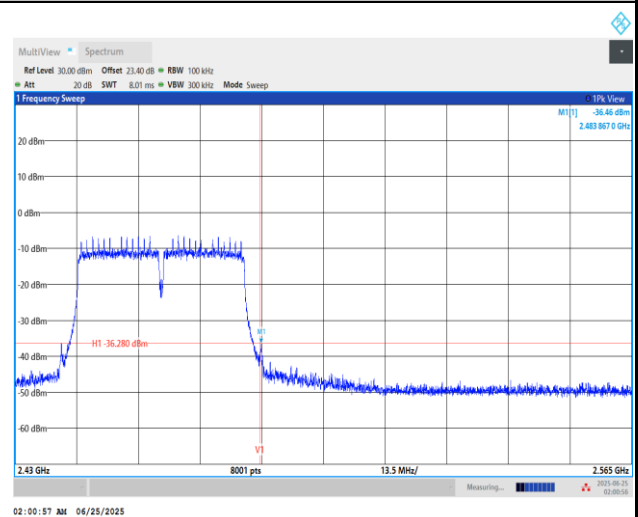

Spurious Emission 30MHz~1GHz

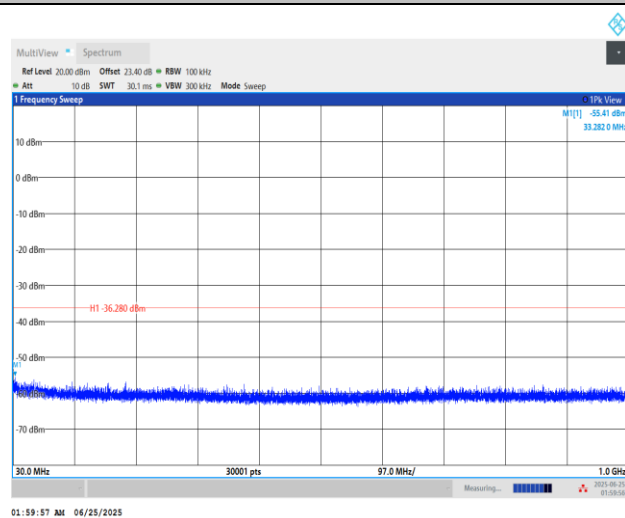

Spurious Emission 1GHz~26.5GHz

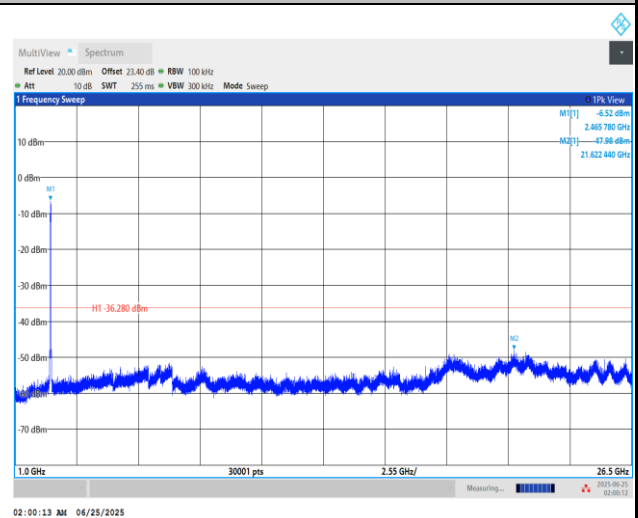



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Fred Tseng, Ray Lung and Sky Chang	Relative Humidity(%):	18~23
		Temperature(°C):	50~65

Note symbol

-L	Low channel location
-R	High channel location

B1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11b	12	2467	1Mbps	-	-
Mode 5	2400-2483.5	1	802.11b	13	2472	1Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 7	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 8	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 9	2400-2483.5	1	802.11g	12	2467	6Mbps	-	-
Mode 10	2400-2483.5	1	802.11g	13	2472	6Mbps	-	-
Mode 11	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 12	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 13	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 14	2400-2483.5	1	802.11n HT20	12	2467	MCS0	-	-
Mode 15	2400-2483.5	1	802.11n HT20	13	2472	MCS0	-	-
Mode 16	2400-2483.5	1	802.11n HT40	03	2422	MCS0	-	-
Mode 17	2400-2483.5	1	802.11n HT40	06	2437	MCS0	-	-

**FCC RADIO TEST REPORT**

Report No. : FR560901

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 18	2400-2483.5	1	802.11n HT40	09	2452	MCS0	-	-
Mode 19	2400-2483.5	1	802.11n HT40	10	2457	MCS0	-	-
Mode 20	2400-2483.5	1	802.11n HT40	11	2462	MCS0	-	-
Mode 21	2400-2483.5	1	SHF	-	-	-	-	-
Mode 22	2400-2483.5	1	LF	-	-	-	-	-

B2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2387.11	44.42	54.00	-9.58	V	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	44.05	74.00	-29.95	H	Peak	Pass	-	Harmonic
2	802.11b	06	2357.88	45.52	54.00	-8.48	H	Avg.	Pass	-	Band Edge
	802.11b	06	7311.00	43.93	54.00	-10.07	V	Avg.	Pass	-	Harmonic
3	802.11b	11	2483.55	40.54	54.00	-13.46	V	Avg.	Pass	-	Band Edge
	802.11b	11	7386.00	43.45	54.00	-10.55	V	Avg.	Pass	-	Harmonic
4	802.11b	12	2484.23	46.18	54.00	-7.82	V	Avg.	Pass	-	Band Edge
5	802.11b	13	2486.43	50.02	54.00	-3.98	V	Avg.	Pass	-	Band Edge
6	802.11g	01	2389.97	53.51	54.00	-0.49	H	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	44.10	74.00	-29.90	V	Peak	Pass	-	Harmonic
7	802.11g	06	2389.50	44.17	54.00	-9.83	V	Avg.	Pass	-	Band Edge
	802.11g	06	7311.00	40.02	54.00	-13.98	V	Avg.	Pass	-	Harmonic
8	802.11g	11	2483.58	49.18	54.00	-4.82	V	Avg.	Pass	-	Band Edge
	802.11g	11	7386.00	39.83	54.00	-14.17	V	Avg.	Pass	-	Harmonic
9	802.11g	12	2483.74	51.82	54.00	-2.18	V	Avg.	Pass	-	Band Edge
10	802.11g	13	2483.51	53.86	54.00	-0.14	V	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
11	802.11n HT20	01	2389.97	52.83	54.00	-1.17	V	Avg.	Pass	-	Band Edge
	802.11n HT20	01	4824.00	44.90	74.00	-29.10	V	Peak	Pass	-	Harmonic
12	802.11n HT20	06	2388.61	42.82	54.00	-11.18	V	Avg.	Pass	-	Band Edge
	802.11n HT20	06	7311.00	39.53	54.00	-14.47	H	Avg.	Pass	-	Harmonic
13	802.11n HT20	11	2483.55	45.39	54.00	-8.61	V	Avg.	Pass	-	Band Edge
	802.11n HT20	11	7386.00	39.21	54.00	-14.79	H	Avg.	Pass	-	Harmonic
14	802.11n HT20	12	2483.81	49.05	54.00	-4.95	V	Avg.	Pass	-	Band Edge
15	802.11n HT20	13	2483.51	53.80	54.00	-0.20	V	Avg.	Pass	-	Band Edge
16	802.11n HT40	03	2388.51	53.87	54.00	-0.13	V	Avg.	Pass	-	Band Edge
	802.11n HT40	03	7266.00	39.10	54.00	-14.90	H	Avg.	Pass	-	Harmonic
17	802.11n HT40	06	2389.88	47.92	54.00	-6.08	V	Avg.	Pass	-	Band Edge
	802.11n HT40	06	7311.00	39.14	54.00	-14.86	H	Avg.	Pass	-	Harmonic
18	802.11n HT40	09	2483.54	47.72	54.00	-6.28	V	Avg.	Pass	-	Band Edge
	802.11n HT40	09	7356.00	39.39	54.00	-14.61	H	Avg.	Pass	-	Harmonic
19	802.11n HT40	10	2483.79	49.38	54.00	-4.62	V	Avg.	Pass	-	Band Edge
20	802.11n HT40	11	2483.81	53.72	54.00	-0.28	V	Avg.	Pass	-	Band Edge
21	SHF		21672.26	39.09	74.00	-34.91	H	Peak	Pass	-	-



FCC RADIO TEST REPORT

Report No. : FR560901

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
22	LF		955.38	35.40	46.00	-10.60	H	Peak	Pass	-	-



Mode	1											
	Band Edge											
	2400-2483.5_802.11b_CH01_2412MHz											
ANT	1											
Pol.	Horizontal						Fundamental					
Peak	<											









Mode	1																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.17</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>43.05</td><td>26.70</td><td>8.74</td><td>32.93</td><td>10.03</td><td>100</td><td>74 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.17	55.59	74.00	-18.41	43.05	26.70	8.74	32.93	10.03	100	74 Peak	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.78</td><td>-----</td><td>-----</td><td>97.05</td><td>26.86</td><td>8.79</td><td>32.95</td><td>10.03</td><td>100</td><td>74 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.78	-----	-----	97.05	26.86	8.79	32.95	10.03	100	74 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2385.17	55.59	74.00	-18.41	43.05	26.70	8.74	32.93	10.03	100	74 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	109.78	-----	-----	97.05	26.86	8.79	32.95	10.03	100	74 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.11</td><td>44.42</td><td>54.00</td><td>-9.58</td><td>31.88</td><td>26.70</td><td>8.74</td><td>32.93</td><td>10.03</td><td>100</td><td>74 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.11	44.42	54.00	-9.58	31.88	26.70	8.74	32.93	10.03	100	74 Average	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.19</td><td>-----</td><td>-----</td><td>93.42</td><td>26.90</td><td>8.79</td><td>32.95</td><td>10.03</td><td>100</td><td>74 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.19	-----	-----	93.42	26.90	8.79	32.95	10.03	100	74 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2387.11	44.42	54.00	-9.58	31.88	26.70	8.74	32.93	10.03	100	74 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	106.19	-----	-----	93.42	26.90	8.79	32.95	10.03	100	74 Average																																																																																							



Mode	1																																																																																					
	Harmonic																																																																																					
	2400-2483.5_802.11b_CH01_2412MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.05</td><td>74.00</td><td>-29.95</td><td>32.87</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	4824.00	44.05	74.00	-29.95	32.87	32.25	12.68	34.18	0.43	--	--	--	Peak	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.65</td><td>74.00</td><td>-30.35</td><td>32.47</td><td>32.25</td><td>12.68</td><td>34.18</td><td>0.43</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	4824.00	43.65	74.00	-30.35	32.47	32.25	12.68	34.18	0.43	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																									
1	4824.00	44.05	74.00	-29.95	32.87	32.25	12.68	34.18	0.43	--	--	--	Peak																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																									
1	4824.00	43.65	74.00	-30.35	32.47	32.25	12.68	34.18	0.43	--	--	--	Peak																																																																									
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL																																																																																				

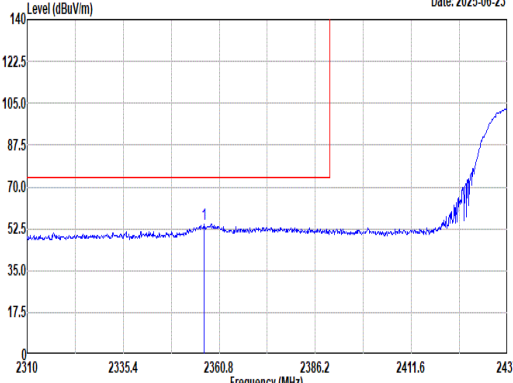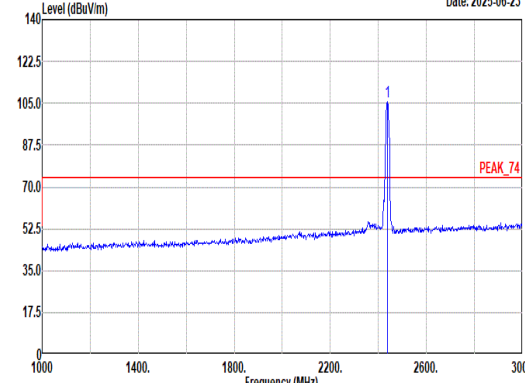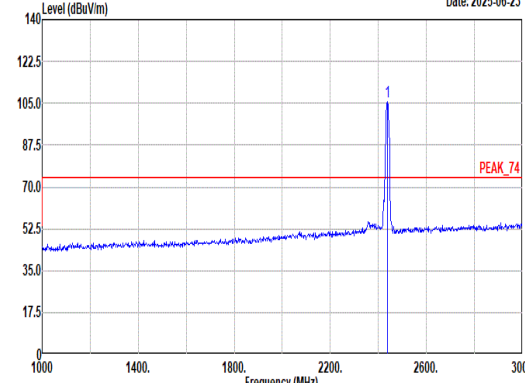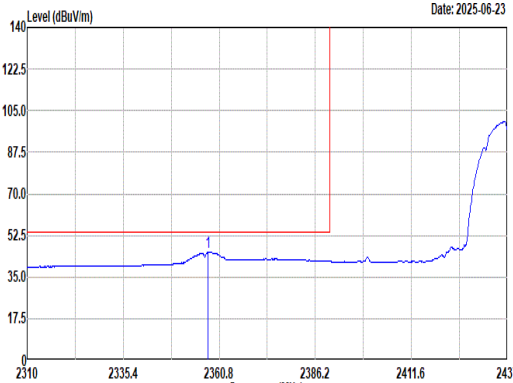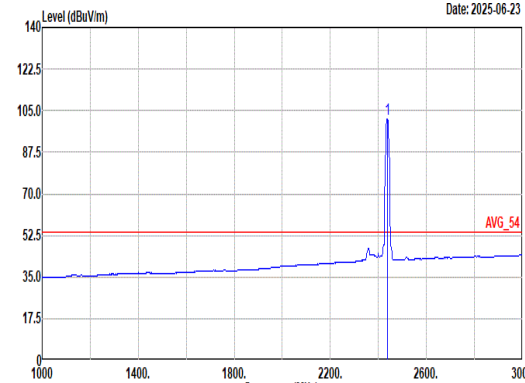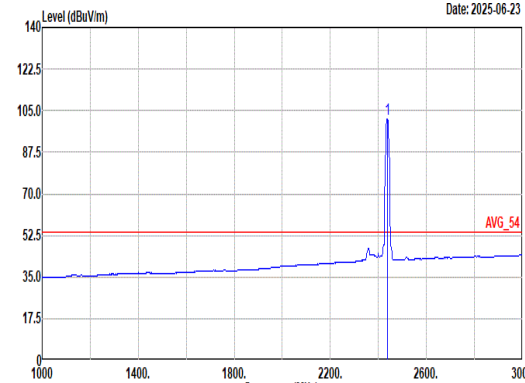

Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-06-23  Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2356.86</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>41.90</td><td>26.97</td><td>8.68</td><td>32.91</td><td>10.03</td><td>184</td><td>24 Peak</td></tr></table> <td> Level (dBuV/m) Date: 2025-06-23  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>105.45</td><td>-----</td><td>-----</td><td>92.86</td><td>26.68</td><td>8.85</td><td>32.97</td><td>10.03</td><td>184</td><td>24 Peak</td></tr></table> </td>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2356.86	54.67	74.00	-19.33	41.90	26.97	8.68	32.91	10.03	184	24 Peak	Level (dBuV/m) Date: 2025-06-23  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>105.45</td><td>-----</td><td>-----</td><td>92.86</td><td>26.68</td><td>8.85</td><td>32.97</td><td>10.03</td><td>184</td><td>24 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	105.45	-----	-----	92.86	26.68	8.85	32.97	10.03	184	24 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2356.86	54.67	74.00	-19.33	41.90	26.97	8.68	32.91	10.03	184	24 Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	105.45	-----	-----	92.86	26.68	8.85	32.97	10.03	184	24 Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-06-23  Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2357.88</td><td>45.52</td><td>54.00</td><td>-8.48</td><td>32.74</td><td>26.98</td><td>8.68</td><td>32.91</td><td>10.03</td><td>184</td><td>24 Average</td></tr></table> <td> Level (dBuV/m) Date: 2025-06-23  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>101.61</td><td>-----</td><td>-----</td><td>89.05</td><td>26.66</td><td>8.84</td><td>32.97</td><td>10.03</td><td>184</td><td>24 Average</td></tr></table> </td>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2357.88	45.52	54.00	-8.48	32.74	26.98	8.68	32.91	10.03	184	24 Average	Level (dBuV/m) Date: 2025-06-23  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>101.61</td><td>-----</td><td>-----</td><td>89.05</td><td>26.66</td><td>8.84</td><td>32.97</td><td>10.03</td><td>184</td><td>24 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	101.61	-----	-----	89.05	26.66	8.84	32.97	10.03	184	24 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2357.88	45.52	54.00	-8.48	32.74	26.98	8.68	32.91	10.03	184	24 Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	101.61	-----	-----	89.05	26.66	8.84	32.97	10.03	184	24 Average																																																																																								



Mode	2	
	Band Edge - R	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak		



Mode	2																																																																																																													
	Band Edge - L																																																																																																													
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Vertical																																																																																																													
Peak	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2357.12</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>41.89</td><td>26.97</td><td>8.68</td><td>32.91</td><td>10.03</td><td>75 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2357.12	54.66	74.00	-19.34	41.89	26.97	8.68	32.91	10.03	75 Peak	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>107.82</td><td>-----</td><td>-----</td><td>95.23</td><td>26.68</td><td>8.85</td><td>32.97</td><td>10.03</td><td>75 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	107.82	-----	-----	95.23	26.68	8.85	32.97	10.03	75 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2357.12	54.66	74.00	-19.34	41.89	26.97	8.68	32.91	10.03	75 Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2437.00	107.82	-----	-----	95.23	26.68	8.85	32.97	10.03	75 Peak																																																																																																				
Avg	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2358.01</td><td>45.35</td><td>54.00</td><td>-8.65</td><td>32.57</td><td>26.98</td><td>8.68</td><td>32.91</td><td>10.03</td><td>75 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.01	45.35	54.00	-8.65	32.57	26.98	8.68	32.91	10.03	75 Average	Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>104.16</td><td>-----</td><td>-----</td><td>91.60</td><td>26.66</td><td>8.84</td><td>32.97</td><td>10.03</td><td>75 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.16	-----	-----	91.60	26.66	8.84	32.97	10.03	75 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2358.01	45.35	54.00	-8.65	32.57	26.98	8.68	32.91	10.03	75 Average																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2437.00	104.16	-----	-----	91.60	26.66	8.84	32.97	10.03	75 Average																																																																																																				



Mode	2																																													
	Band Edge - R																																													
	2400-2483.5_802.11b_CH06_2437MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	Date: 2025-06-23 Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.58</td><td>51.23</td><td>74.00</td><td>-22.77</td><td>38.55</td><td>26.70</td><td>8.96</td><td>33.01</td><td>10.03</td><td>104</td><td>75</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.58	51.23	74.00	-22.77	38.55	26.70	8.96	33.01	10.03	104	75	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2494.58	51.23	74.00	-22.77	38.55	26.70	8.96	33.01	10.03	104	75	Peak																																		
Avg	Date: 2025-06-23 Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.002kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.96</td><td>39.96</td><td>54.00</td><td>-14.04</td><td>27.31</td><td>26.67</td><td>8.95</td><td>33.00</td><td>10.03</td><td>104</td><td>75</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.96	39.96	54.00	-14.04	27.31	26.67	8.95	33.00	10.03	104	75	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2486.96	39.96	54.00	-14.04	27.31	26.67	8.95	33.00	10.03	104	75	Average																																		







Mode	2																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.19</td><td>74.00</td><td>-29.81</td><td>32.87</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>48.63</td><td>74.00</td><td>-25.37</td><td>32.04</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>100</td><td>0 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>38.30</td><td>54.00</td><td>-15.70</td><td>21.71</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>100</td><td>0 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.19	74.00	-29.81	32.87	32.35	12.73	34.18	0.42	--	Peak	2	7311.00	48.63	74.00	-25.37	32.04	36.72	15.95	36.71	0.63	100	0 Peak	3	7311.00	38.30	54.00	-15.70	21.71	36.72	15.95	36.71	0.63	100	0 Average	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.30</td><td>74.00</td><td>-29.70</td><td>32.98</td><td>32.35</td><td>12.73</td><td>34.18</td><td>0.42</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>51.53</td><td>74.00</td><td>-22.47</td><td>34.94</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>100</td><td>342 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>27.34</td><td>36.72</td><td>15.95</td><td>36.71</td><td>0.63</td><td>100</td><td>342 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.30	74.00	-29.70	32.98	32.35	12.73	34.18	0.42	--	Peak	2	7311.00	51.53	74.00	-22.47	34.94	36.72	15.95	36.71	0.63	100	342 Peak	3	7311.00	43.93	54.00	-10.07	27.34	36.72	15.95	36.71	0.63	100	342 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	4874.00	44.19	74.00	-29.81	32.87	32.35	12.73	34.18	0.42	--	Peak																																																																																																																													
2	7311.00	48.63	74.00	-25.37	32.04	36.72	15.95	36.71	0.63	100	0 Peak																																																																																																																													
3	7311.00	38.30	54.00	-15.70	21.71	36.72	15.95	36.71	0.63	100	0 Average																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	4874.00	44.30	74.00	-29.70	32.98	32.35	12.73	34.18	0.42	--	Peak																																																																																																																													
2	7311.00	51.53	74.00	-22.47	34.94	36.72	15.95	36.71	0.63	100	342 Peak																																																																																																																													
3	7311.00	43.93	54.00	-10.07	27.34	36.72	15.95	36.71	0.63	100	342 Average																																																																																																																													



Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL

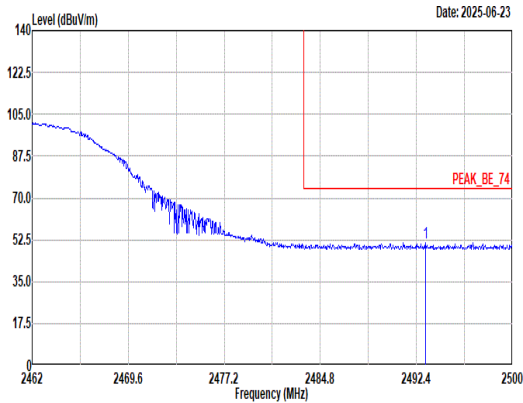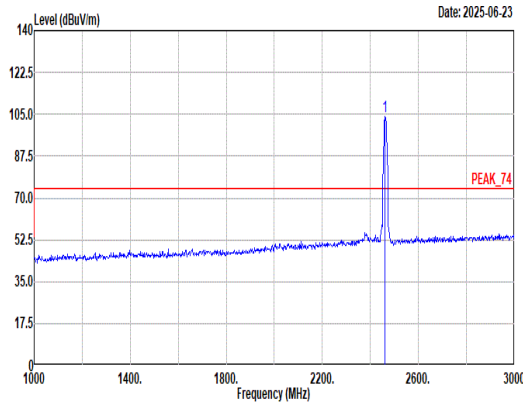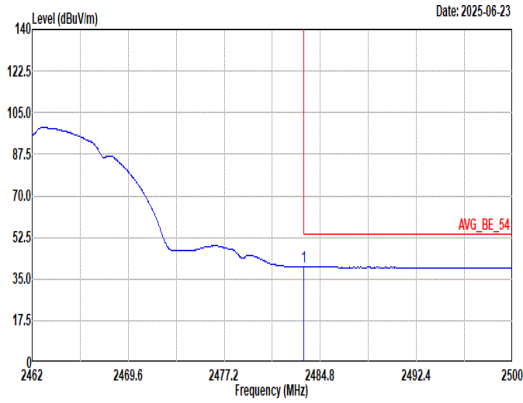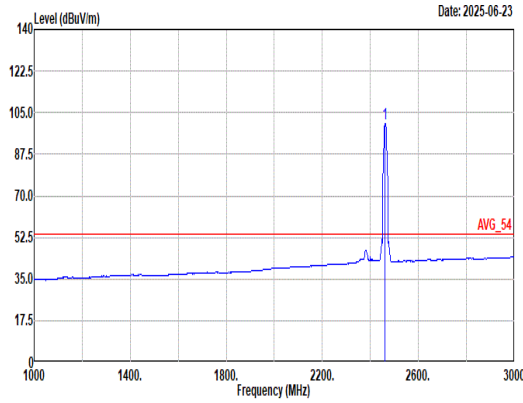

Mode	3																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak	 Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2493.12</td><td>51.37</td><td>74.00</td><td>-22.63</td><td>38.69</td><td>26.70</td><td>8.96</td><td>33.01</td><td>10.03</td><td>151</td><td>360 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.12	51.37	74.00	-22.63	38.69	26.70	8.96	33.01	10.03	151	360 Peak	 Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.06</td><td>-----</td><td>-----</td><td>91.61</td><td>26.50</td><td>8.90</td><td>32.98</td><td>10.03</td><td>151</td><td>360 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.06	-----	-----	91.61	26.50	8.90	32.98	10.03	151	360 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2493.12	51.37	74.00	-22.63	38.69	26.70	8.96	33.01	10.03	151	360 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	104.06	-----	-----	91.61	26.50	8.90	32.98	10.03	151	360 Peak																																																																																						
Avg	 Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>40.09</td><td>54.00</td><td>-13.91</td><td>27.48</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>151</td><td>360 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	40.09	54.00	-13.91	27.48	26.64	8.94	33.00	10.03	151	360 Average	 Level (dBuV/m) Date: 2025-06-23 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>100.40</td><td>-----</td><td>-----</td><td>87.96</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>151</td><td>360 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.40	-----	-----	87.96	26.50	8.89	32.98	10.03	151	360 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	40.09	54.00	-13.91	27.48	26.64	8.94	33.00	10.03	151	360 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	100.40	-----	-----	87.96	26.50	8.89	32.98	10.03	151	360 Average																																																																																						



Mode	3																																																																																																																																																																																																
	Band Edge																																																																																																																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																																
ANT	1																																																																																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																																																																																										
Peak	Level (dBuV/m) Date: 2025-06-23 PEAK_BE_74 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>51.28</td><td>74.00</td><td>-22.72</td><td>38.67</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>66 Peak</td></tr></table> Level (dBuV/m) Date: 2025-06-23 PEAK_74 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.06</td><td>-----</td><td>-----</td><td>93.61</td><td>26.50</td><td>8.90</td><td>32.98</td><td>10.03</td><td>66 Peak</td></tr></table> <tr><td rowspan="2">Avg</td><td colspan="12"> Level (dBuV/m) Date: 2025-06-23 AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>27.93</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>66 Average</td></tr></table> Level (dBuV/m) Date: 2025-06-23 AVG_54 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.17</td><td>-----</td><td>-----</td><td>89.73</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>66 Average</td></tr></table> </td></tr>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	51.28	74.00	-22.72	38.67	26.64	8.94	33.00	10.03	66 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.06	-----	-----	93.61	26.50	8.90	32.98	10.03	66 Peak	Avg	Level (dBuV/m) Date: 2025-06-23 AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>27.93</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>66 Average</td></tr></table> Level (dBuV/m) Date: 2025-06-23 AVG_54 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.17</td><td>-----</td><td>-----</td><td>89.73</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>66 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	40.54	54.00	-13.46	27.93	26.64	8.94	33.00	10.03	66 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.17	-----	-----	89.73	26.50	8.89	32.98	10.03	66 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	2483.51	51.28	74.00	-22.72	38.67	26.64	8.94	33.00	10.03	66 Peak																																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	2462.00	106.06	-----	-----	93.61	26.50	8.90	32.98	10.03	66 Peak																																																																																																																																																																																							
Avg	Level (dBuV/m) Date: 2025-06-23 AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>27.93</td><td>26.64</td><td>8.94</td><td>33.00</td><td>10.03</td><td>66 Average</td></tr></table> Level (dBuV/m) Date: 2025-06-23 AVG_54 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:0.082kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.17</td><td>-----</td><td>-----</td><td>89.73</td><td>26.50</td><td>8.89</td><td>32.98</td><td>10.03</td><td>66 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	40.54	54.00	-13.46	27.93	26.64	8.94	33.00	10.03	66 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.17	-----	-----	89.73	26.50	8.89	32.98	10.03	66 Average																																																																																																	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	2483.55	40.54	54.00	-13.46	27.93	26.64	8.94	33.00	10.03	66 Average																																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	2462.00	102.17	-----	-----	89.73	26.50	8.89	32.98	10.03	66 Average																																																																																																																																																																																							



Mode	3																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.41</td><td>74.00</td><td>-29.59</td><td>32.87</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>49.87</td><td>74.00</td><td>-24.13</td><td>33.08</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>100</td><td>0 Peak</td></tr><tr><td>3</td><td>7386.00</td><td>38.20</td><td>54.00</td><td>-15.80</td><td>21.41</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>100</td><td>0 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	44.41	74.00	-29.59	32.87	32.54	12.78	34.19	0.41	--	Peak	2	7386.00	49.87	74.00	-24.13	33.08	36.80	16.04	36.77	0.72	100	0 Peak	3	7386.00	38.20	54.00	-15.80	21.41	36.80	16.04	36.77	0.72	100	0 Average	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_240711 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>45.85</td><td>74.00</td><td>-28.15</td><td>34.31</td><td>32.54</td><td>12.78</td><td>34.19</td><td>0.41</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>50.96</td><td>74.00</td><td>-23.04</td><td>34.17</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>100</td><td>348 Peak</td></tr><tr><td>3</td><td>7386.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>26.66</td><td>36.80</td><td>16.04</td><td>36.77</td><td>0.72</td><td>100</td><td>348 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	45.85	74.00	-28.15	34.31	32.54	12.78	34.19	0.41	--	Peak	2	7386.00	50.96	74.00	-23.04	34.17	36.80	16.04	36.77	0.72	100	348 Peak	3	7386.00	43.45	54.00	-10.55	26.66	36.80	16.04	36.77	0.72	100	348 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	4924.00	44.41	74.00	-29.59	32.87	32.54	12.78	34.19	0.41	--	Peak																																																																																																																													
2	7386.00	49.87	74.00	-24.13	33.08	36.80	16.04	36.77	0.72	100	0 Peak																																																																																																																													
3	7386.00	38.20	54.00	-15.80	21.41	36.80	16.04	36.77	0.72	100	0 Average																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	4924.00	45.85	74.00	-28.15	34.31	32.54	12.78	34.19	0.41	--	Peak																																																																																																																													
2	7386.00	50.96	74.00	-23.04	34.17	36.80	16.04	36.77	0.72	100	348 Peak																																																																																																																													
3	7386.00	43.45	54.00	-10.55	26.66	36.80	16.04	36.77	0.72	100	348 Average																																																																																																																													



Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 HORIZONTAL	Level (dBuV/m) Date: 2025-06-21 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_240711 VERTICAL