

Measurement Report

Product: "Safe@Office", "VPN-1 Edge", "S-box"
Applicant: SofaWare Technologies Ltd.
FCC ID: P6XSBX-166LHGE-2
Model: SBX-166LHGE-2
Report No.: MLT0311P15001
Test Date: November 27,2003

Test By

Max Light Technology Co.,Ltd.

*Room 5, 8F, No.125, Section 3 Roosevelt Road,
Taipei, Taiwan., R.O.C.*

Tel: 886-2-2363-2447 Fax: 886-2-2363-2597

The test report consists of 21 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory.



MAX LIGHT

MEASUREMENT REPORT

Page: 2/21.

Table of Contents :

<i>I. General</i>	<i>4.</i>
<i>II. Conducted Emissions Requirements</i>	<i>9.</i>
<i>III. Radiated Emissions Requirements</i>	<i>14.</i>
<i>Appendix I (EUT Test Setup)</i>	<i>20.</i>



CERTIFICATION

We here by verify that :

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-1992. All test were conducted by *MLT(Max Light Technology Co.,Ltd) Room 5, 8F, No.125, Section 3 Roosevelt Road, Taipei, Taiwan, R.O.C* Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with Class B radiated and conducted emission limit of FCC Rules Part 15 Subpart B.

EUT : “Safe@Office”, “VPN-1 Edge”, “S-box”

Applicant : SofaWare Technologies Ltd.
3 Hilazon St., 4th Floor, Ramat-Gan, Israel
52522

Manufacturer : SofaWare Technologies Ltd.
3 Hilazon St., 4th Floor, Ramat-Gan, Israel
52522

Model No : SBX-166LHGE-2

FCC ID : P6XSBX-166LHGE-2

Prepared by :  Approved by : 
Country Huang Roger Chen



I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of SofaWare Technologies Ltd. In support of a Class B Digital Device certification in accordance with Part2 Subpart J and Part 15 Subpart A And B of the Commission's and Regulations.

1.2 Description of EUT

EUT : "Safe@Office", "VPN-1 Edge", "S-box"

Applicant : SofaWare Technologies Ltd.
3 Hilazon St. Ramat-Gan, Israel, 52522

Manufacturer : TURBOCOMM TECH. INC.
No.369,Sec.3 Chun Cheng East Road,
Wu Chuan Tsun,Ta Yuan Hsiang,Tao Yaun
Hsien,Taiwan,R.O.C.

Model No : SBX-166LHGE-2

FCC ID : P6XSBX-166LHGE-2

Power Type : Powered by AC Adaptor
Line Mode(Model No.: AA-091A5BN)/9V AC@1.5A
SW Mode(Model No.: MU15-120125-C5)/12V DC@1.25A

Ethernet Cable : RJ-45 x4 (Shielded, 6' long)/LAN

Ethernet Cable : RJ-45 x2 (Shielded, 6' long)/WAN&DMZ

During testing the EUT was operated at Tx or Rx mode for each emission measured(P.S Run "Ping (IP Address) -T -L 1000" comment in Dos Mode). This was done in order to ensure that maximum emission levels were attained.



1.3 Description of Support Equipment

In order to construct the minimum system which required by the ANSI C63.4-1991, following equipments were used as the support units.

Computer : IBM
Model No. : 16W
Serial No. : BNC345M
FCC ID : FCC(DOC)

Keyboard : IBM
Model No. : KB-9930
Serial No. : 09N5395
FCC ID : FCC(DOC)

Monitor : IBM
Model No. : 10L6145 030
Serial No. : 23-092079
FCC ID : ARSCM569N

Mouse : IBM
Model No. : 0180-05N
Serial No. : 23-092079
FCC ID : JNZ211220

Printer : PANASONIC
Model No. : KX-P1080I
Serial No. : 7CKAKE98933
FCC ID : ACJ5Z6KX-P10801

Ethernet Card : 3COM
Model No. : 3C905C-TX
Serial No. : HDUD984803
FCC ID : FCC DOC



MAX LIGHT


MEASUREMENT REPORT

Page: 6/21.

Ethernet Card : DELTA
Model No. : NE2000 Ethernet Adapter
Serial No. : 4712544
FCC ID : FCC DOC

Modem : Askey (External Fax / Data Modem)
Model No. : WS1414VE
Serial No. : IAH-10811
FCC ID : H8N1414VE

1.4 Configuration of System Under Test

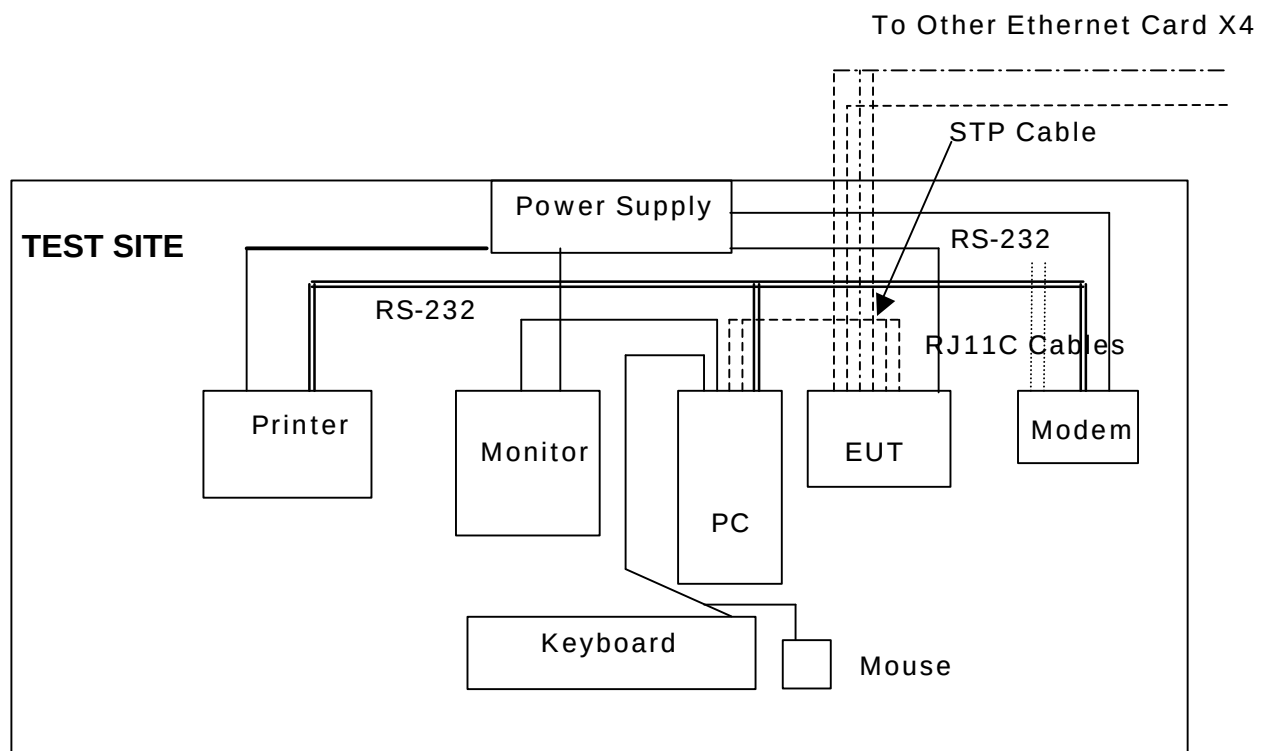

During testing the EUT("Safe@Office", "VPN-1 Edge", "S-box")'s LAN / L1&L2&L3&L4 Ethernet port connected to the Remote Ethernet and WAN&DMZ port were connected Ethernet port of IBM computer. So there is need for additional Ethernet card. A mouse was connected to the mouse port of IBM PC. and A keyboard was connected to the mouse port of IBM PC. And a printer was connected to the parallel port. A external modem connected the serial port and the external modem connected with two unterminated telephone cables on the line and phone jack.

Note:

The EUT's AC adapter has two kinds:

One AC Adapter is Line Mode(Model No.: AA-091A5BN)

The other One AC Adapter is SW Mode(Model No.: MU15-120125-C5)

The report only record the worst case (SW AC Adapter).



1.5 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-1992 "Measurement of unIntentional Radiators."

1.7 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated. The system's radiated and conducted emissions were investigated while the computer alternately transferred data to the EUT (1000 bytes). Run "Ping (IP Address -T -L 1000)" comment which sent a continuous stream of 1000 Bytes data to EUT and transferred data to and from the EUT was proven to worst case emissions. The system's physical layout and cabling was randomly arranged to ensure that maximum emission levels were attained.



II. Conducted Emissions Requirements

2.1 General & Setup :

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.6.


2.2 Test Equipment List:

- A. EMCO 3825/2 LISN (S/N:2654)
- B. EMCO 3825/2 LISN (S/N:2658)
- C. HP 8591EM 9KHZ-1.8GHz Spectrum Analyzer (S/N:73412A00110)
- D. R&S ESH3 Test Receiver (S/N:892108/025)
- E. Shielded Room (MLT-SR1)

2.3 Test Configuration:



Front View of The Test Configuration

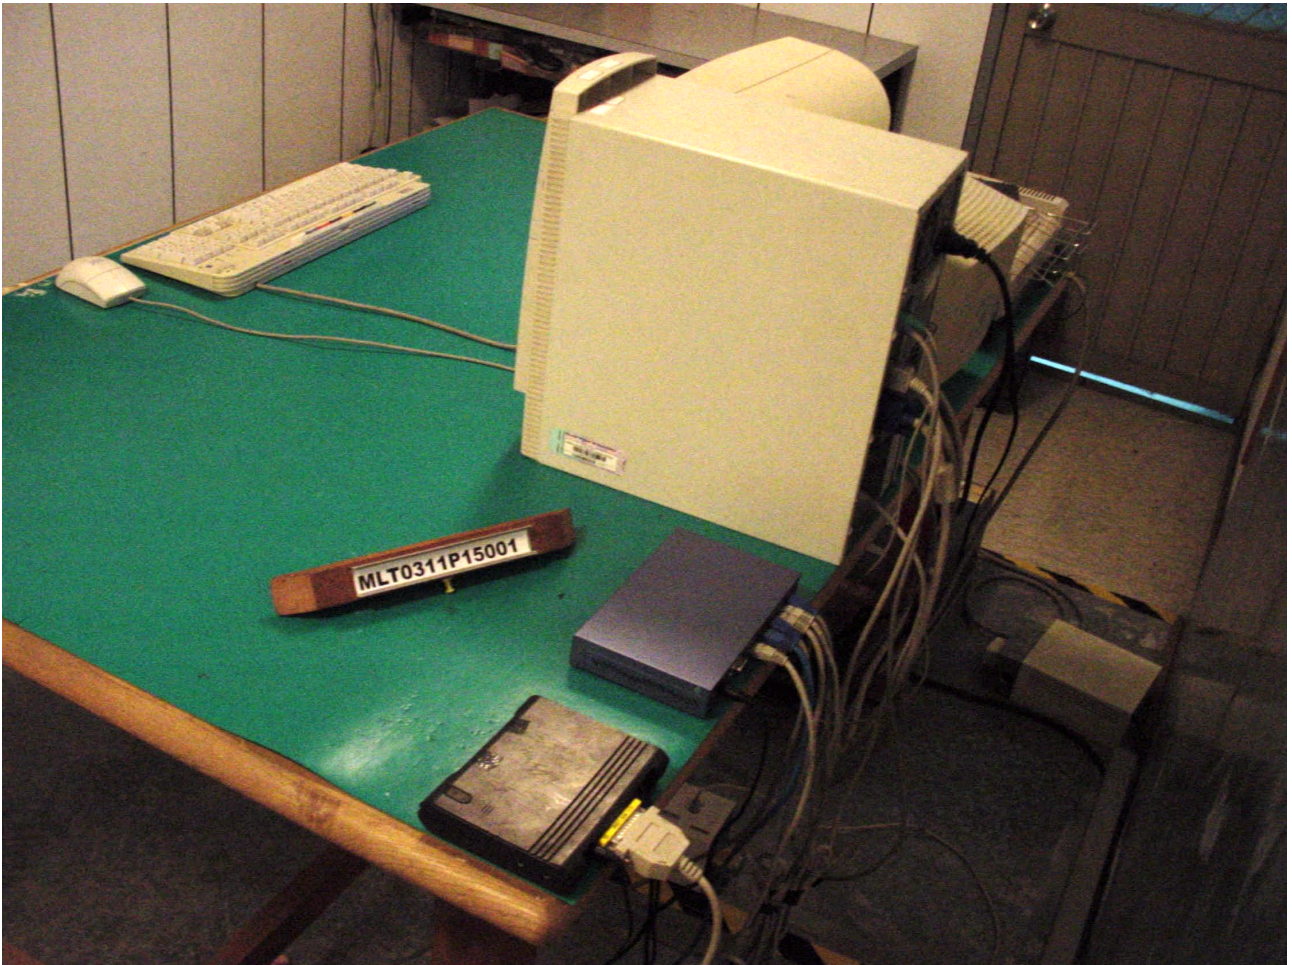

Rear View of The Test Configuration

2.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

2.5 Conducted Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Limits (dBuV)</i>	
	<i>Quasi-peak</i>	<i>Average</i>
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

2.6 Measurement Data Of Conducted Emissions:

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : SofaWare Technologies Ltd..
 Model No : SBX-166LHGE-2
 EUT : "Safe@Office", "VPN-1 Edge", "S-box"
 Test Mode : Run "Ping" Command
 AC Adapter : MU15-120125-C5

Power Line Conducted Emissions (Class B)					
Conductor	Frequency (MHz)	Quasi-Peak (dBuV)	Limits	Average (dBuV)	Limits
L1	0.41	43.95	57.4	--	47.4
	0.55	43.83	56	--	46
	0.69	44.13	56	--	46
	0.81	50.68	56	39.50	46
	1.36	49.35	56	43.10	46
	1.50	49.84	56	43.60	46
	3.16	43.33	60	--	50
L2	0.54	41.29	56	--	46
	0.74	42.29	56	--	46
	0.89	43.67	56	--	46
	1.08	45.65	56	35.20	46
	1.22	47.28	56	36.21	46
	1.56	49.98	56	38.85	46
	3.01	40.13	60	--	50

Notes : 1.L1: One end & Ground L1: The other end & Ground
 2.Height of table on which the EUT was placed : 0.8 m.
 3.The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
 4.The above test results are obtained under the normal condition.



III. Radiated Emissions Requirements

3.1 General & Setup :

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591EM Spectrum Analyzer, EMCO Biconical Antenna (Model 3142) for 30-1000MHz. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz, and the analyzer was operated in the quasi-peak detection mode. The highest emission amplitudes relative to the appropriate limit were measured and recorded in paragraph 3.6.

3.2 Test Equipment List:

- A. HP 8591EM 9KHz-1.8GHz Spectrum Analyzer (S/N:73412A00230)
- B. HP 8447D Pre Amplifier (S/N:2944A08954)
- C. EMCO 3142 Biconilog Antenna (S/N:1184)
- D. R&S ESVP Test Receiver (S/N:881121/01)

3.3 Test Configuration:



Front View of The Test Configuration



Rear View of The Test Configuration



3.4 Test condition:


EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

3.5 Radiated Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Peak(dBuV)</i>
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

Appendix I- EUT Test SETUP

MEASUREMENT OF POWER LINE CONDUCTED RFI VOLTAGE

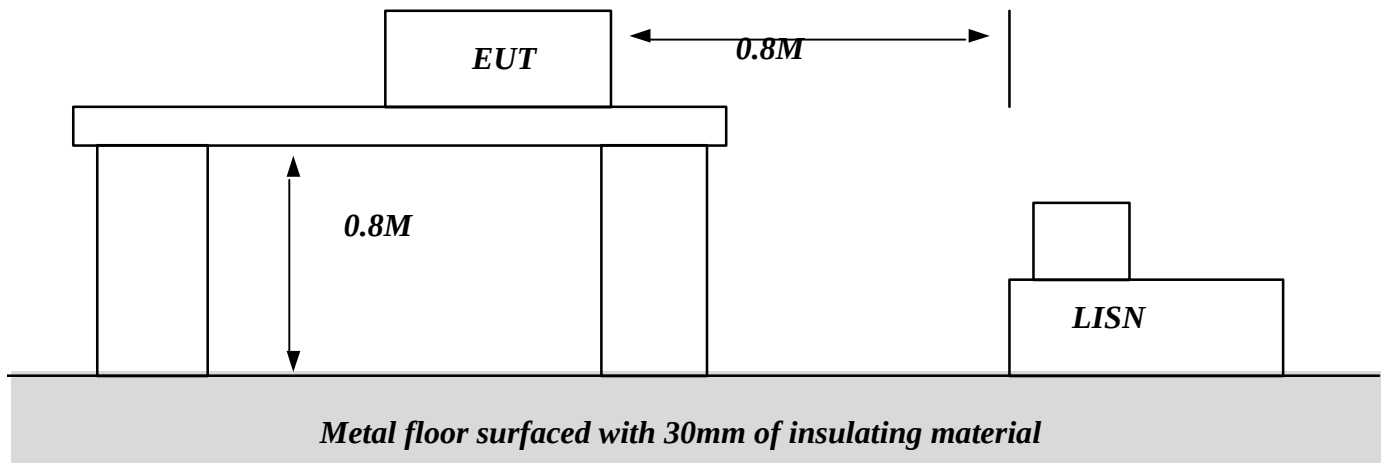

Appendix I- EUT Test SETUP

MEASUREMENT OF RADIATED EMISSION

