


FCC SAR Test Report

APPLICANT : VERTU Corporation Limited
EQUIPMENT : Cellular Telephone
BRAND NAME : VERTU
MODEL NAME : SIGNATURE TOUCH
TYPE : VM-03
FCC ID : P7QVM-03
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT)	6
4.1 General Information	6
4.2 Maximum Tune-up Limit.....	7
4.3 General LTE SAR Test and Reporting Considerations.....	9
5. RF Exposure Limits.....	11
5.1 Uncontrolled Environment.....	11
5.2 Controlled Environment.....	11
6. Specific Absorption Rate (SAR).....	12
6.1 Introduction	12
6.2 SAR Definition.....	12
7. System Description and Setup	13
8. Measurement Procedures	14
8.1 Spatial Peak SAR Evaluation.....	14
8.2 Power Reference Measurement.....	15
8.3 Area Scan	15
8.4 Zoom Scan.....	16
8.5 Volume Scan Procedures.....	16
8.6 Power Drift Monitoring.....	16
9. Test Equipment List.....	17
10. System Verification	18
10.1 Tissue Verification	18
10.2 System Performance Check Results.....	20
11. RF Exposure Positions	21
11.1 Ear and handset reference point	21
11.2 Definition of the cheek position.....	22
11.3 Definition of the tilt position.....	23
11.4 Body Worn Accessory	24
11.5 Wireless Router.....	24
12. Conducted RF Output Power (Unit: dBm).....	25
13. Bluetooth Exclusions Applied	57
14. Antenna Location	58
15. SAR Test Results	59
15.1 Head SAR	61
15.2 Hotspot SAR	65
15.3 Body-Worn SAR.....	68
15.4 Repeated SAR Measurement	70
16. Simultaneous Transmission Analysis.....	71
16.1 Head Exposure Conditions	72
16.2 Hotspot Exposure Conditions.....	73
16.3 Body-Worn Accessory Exposure Conditions	75
17. Uncertainty Assessment	76
18. References.....	79
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA570205	Rev. 01	Initial issue of report	Sep. 03, 2015
FA570205	Rev. 02	Updated Bluetooth version to 4.1.	Sep. 07, 2015

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for VERTU Corporation Limited, Cellular Telephone, SIGNATURE TOUCH, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Wireless Router (Separation 10mm)	
		1g SAR (W/kg)			
PCE	GSM850	0.28	0.36	0.36	1.26
	GSM1900	0.41	0.61	0.61	
	WCDMA Band V	0.28	0.40	0.40	
	WCDMA Band IV	0.49	0.65	0.65	
	WCDMA Band II	0.44	0.80	0.80	
	LTE Band 17	0.23	0.31	0.31	
	LTE Band 13	0.21	0.20	0.21	
	LTE Band 5	0.23	0.32	0.32	
	LTE Band 4	0.48	0.74	0.74	
	LTE Band 2				
	LTE Band 25	0.77	0.96	0.96	
	LTE Band 7	0.47	0.75	0.75	
	LTE Band 38				
	LTE Band 41	0.30	0.98	0.98	
DTS	2.4GHz WLAN	0.31	0.26	0.26	1.24
NII	5.2GHz WLAN				1.26
	5.3GHz WLAN	0.06	0.13		
	5.5GHz WLAN	0.28	0.28		
	5.8GHz WLAN	0.17	0.21		
Date of Testing:		2015/8/13~2015/9/1			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	VERTU Corporation Limited
Address	Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom

Manufacturer	
Company Name	VERTU Corporation Limited
Address	Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r01
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r01
- FCC KDB 941225 D06 Hotspot Mode SAR v02

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Cellular Telephone
Brand Name	VERTU
Model Name	SIGNATURE TOUCH
Type	VM-03
FCC ID	P7QVM-03
IMEI Code	353084070000069
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	· GSM/GPRS/EGPRS · RMC/AMR 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · LTE: QPSK, 16QAM · 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 · Bluetooth v3.0+EDR · Bluetooth v4.1+LE · NFC:ASK
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Identical Prototype
Remark: 1. This device supported VoIP in EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).	

4.2 Maximum Tune-up Limit

Mode		Burst average power(dBm)	
		GSM 850	GSM 1900
GSM (GMSK, 1 Tx slot)		33.5	30.5
GPRS/EDGE (GMSK, 1 Tx slot)		33.5	30.5
GPRS/EDGE (GMSK, 2 Tx slots)		30.5	27.5
GPRS/EDGE (GMSK, 3 Tx slots)		28.0	25.5
GPRS/EDGE (GMSK, 4 Tx slots)		27.5	24.5
EDGE (8PSK, 1 Tx slot)		27.0	26.0
EDGE (8PSK, 2 Tx slots)		27.0	26.0
EDGE (8PSK, 3 Tx slots)		27.0	26.0
EDGE (8PSK, 4 Tx slots)		27.0	26.0
DTM 5	GSM (GMSK, 1 Tx slot)	30.5	27.5
	GPRS (GMSK, 1 Tx slot)	30.5	27.5
DTM 9	GSM (GMSK, 1 Tx slot)	30.5	27.5
	GPRS (GMSK, 1 Tx slot)	30.5	27.5
DTM 11	GSM (GMSK, 1 Tx slot)	28.0	25.5
	GPRS (GMSK, 2 Tx slots)	28.0	25.5
DTM 5	GSM (GMSK, 1 Tx slot)	30.5	27.5
	EDGE (8PSK, 1 Tx slot)	27.0	26.0
DTM 9	GSM (GMSK, 1 Tx slot)	30.5	27.5
	EDGE (8PSK, 1 Tx slot)	27.0	26.0
DTM 11	GSM (GMSK, 1 Tx slot)	28.0	25.5
	EDGE (8PSK, 2 Tx slots)	27.0	26.0

Mode		Average Power (dBm)
WCDMA	Band V	24.00
	Band IV	24.00
	Band II	23.50
LTE	Band 17	24.00
	Band 13	24.00
	Band 5	24.00
	Band 4	24.00
	Band 2	23.50
	Band 25	24.00
	Band 7	23.50
	Band 38	24.00
	Band 41	24.00

Mode		Average Power (dBm)
2.4GHz WLAN	802.11b	17.00
	802.11g	14.00
	802.11n-HT20	10.50
	802.11n-HT40	10.50
5GHz WLAN	802.11a	12.50
	802.11n-HT20	11.00
	802.11n-HT40	11.00
	802.11ac-VHT20	8.00
	802.11ac-VHT40	8.00
	802.11ac-VHT80	8.00
Bluetooth v3.0+EDR		9.50
Bluetooth v4.1+LE		2.00

4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03																																																					
FCC ID	P7QVM-03																																																				
Equipment Name	Cellular Telephone																																																				
Operating Frequency Range of each LTE transmission band	LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 05: 824.7 MHz ~ 848.3 MHz LTE Band 04: 1710.7 MHz ~ 1754.3 MHz LTE Band 02: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 07: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz																																																				
Channel Bandwidth	LTE Band 17: 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																				
uplink modulations used	QPSK, and 16QAM																																																				
LTE Voice / Data requirements	Data only																																																				
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="3">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="3">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																					
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																															
	QPSK	> 5	> 4	> 8	> 12	> 16		> 18	≤ 1																																												
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																														
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																				
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																				
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to page50.																																																				
LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 10. Is supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																				
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																					
LTE Band 17																																																					
	Bandwidth 5 MHz			Bandwidth 10 MHz																																																	
	Channel #	Freq.(MHz)		Channel #	Freq. (MHz)																																																
L	23755	706.5		23780	709																																																
M	23790	710		23790	710																																																
H	23825	713.5		23800	711																																																
LTE Band 13																																																					
	Bandwidth 5 MHz			Bandwidth 10 MHz																																																	
	Channel #	Freq.(MHz)		Channel #	Freq.(MHz)																																																
L	23205	779.5		23230	782																																																
M	23230	782																																																			
H	23255	784.5																																																			

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2590	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

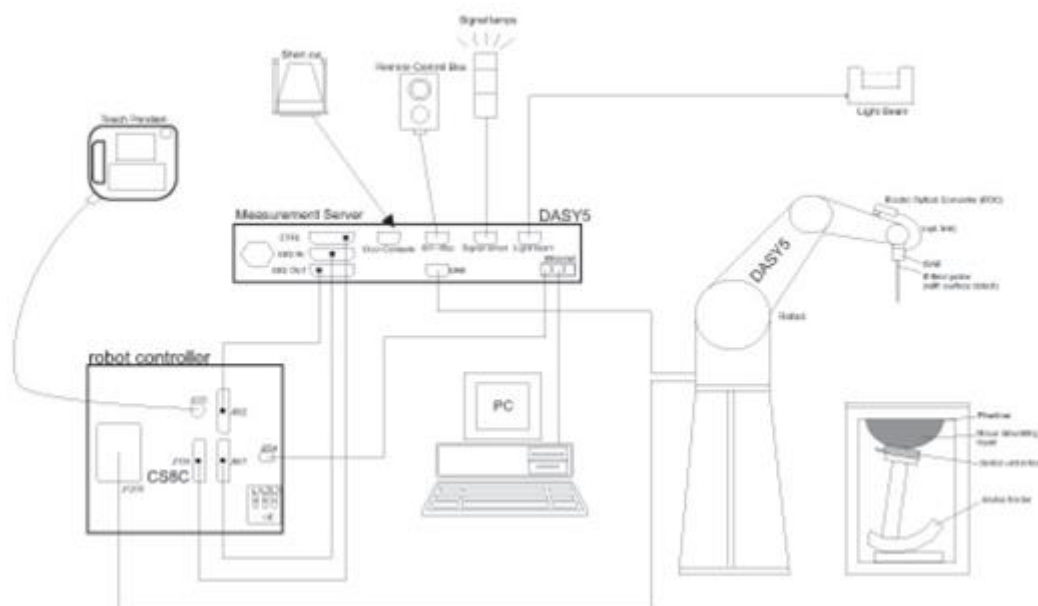

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 28, 2015	May. 27, 2016
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 20, 2015	Mar. 19, 2016
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 14, 2014	Nov. 13, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 24, 2015	Mar. 23, 2016
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 21, 2014	Aug. 20, 2015
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 19, 2014	Nov. 18, 2015
SPEAG	5GHz System Validation Kit	D5GHzV2	1040	Jun. 22, 2015	Jun. 21, 2016
SPEAG	Data Acquisition Electronics	DAE4	1388	Sep. 24, 2014	Sep. 23, 2015
SPEAG	Data Acquisition Electronics	DAE3	577	Oct. 06, 2014	Oct. 05, 2015
SPEAG	Data Acquisition Electronics	DAE3	495	May. 22, 2015	May. 21, 2016
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 13, 2014	Nov. 12, 2015
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 26, 2014	Sep. 25, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Sep. 29, 2014	Sep. 28, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 27, 2015	May. 26, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 21, 2014	Nov. 20, 2015
Wisewind	Thermometer	HTC-1	TM642	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM281	Oct. 21, 2014	Oct. 20, 2015
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	ETP-101	TM225	Oct. 21, 2014	Oct. 20, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 06, 2015	Feb. 05, 2016
Anritsu	Radio Communication Analyzer	MT8820C	6201341952	Dec. 11, 2014	Dec. 10, 2015
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 14, 2015	May. 13, 2016
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Agilent	Signal Generator	N5181A	MY50145381	Dec. 11, 2014	Dec. 10, 2015
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 11, 2015	Feb. 10, 2016
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 18, 2014	Nov. 17, 2015
LINE SEIKI	Digital Thermometer	LKMeletronic	DTM3000SPEZIAL	Jul. 17, 2015	Jul. 16, 2016
Anritsu	Power Meter	ML2495A	1349001	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 17, 2015	Jun. 16, 2016
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.3	0.894	43.300	0.89	41.90	0.45	3.34	±5	2015/8/19
750	MSL	22.2	0.962	56.194	0.96	55.50	0.21	1.25	±5	2015/8/15
835	HSL	22.4	0.890	42.100	0.90	41.50	-1.11	1.45	±5	2015/8/19
835	MSL	22.5	0.969	56.528	0.97	55.20	-0.10	2.41	±5	2015/8/14
1750	HSL	22.2	1.370	40.300	1.37	40.10	0.00	0.50	±5	2015/8/19
1750	MSL	22.5	1.468	53.165	1.49	53.40	-1.48	-0.44	±5	2015/8/14
1900	HSL	22.2	1.393	40.895	1.40	40.00	-0.50	2.24	±5	2015/8/18
1900	HSL	22.3	1.430	39.400	1.40	40.00	2.14	-1.50	±5	2015/8/18
1900	MSL	22.4	1.551	53.382	1.52	53.30	2.04	0.15	±5	2015/8/13
2450	HSL	22.3	1.870	39.700	1.80	39.20	3.89	1.28	±5	2015/8/18
2450	MSL	22.4	2.010	53.800	1.95	52.70	3.08	2.09	±5	2015/8/16
2600	HSL	22.5	2.013	37.942	1.96	39.00	2.70	-2.71	±5	2015/8/16
2600	HSL	22.2	2.014	39.571	1.96	39.00	2.76	1.46	±5	2015/9/1
2600	MSL	22.5	2.209	53.220	2.16	52.50	2.27	1.37	±5	2015/8/15
2600	MSL	22.2	2.191	54.070	2.16	52.50	1.44	2.99	±5	2015/9/1
5300	HSL	22.4	4.670	36.600	4.76	35.90	-1.89	1.95	±5	2015/8/17
5300	MSL	22.4	5.570	47.500	5.42	48.90	2.77	-2.86	±5	2015/8/17
5600	HSL	22.4	4.970	36.200	5.07	35.50	-1.97	1.97	±5	2015/8/17
5600	MSL	22.4	5.960	47.000	5.77	48.50	3.29	-3.09	±5	2015/8/17
5800	HSL	22.4	5.170	35.900	5.27	35.30	-1.90	1.70	±5	2015/8/17
5800	MSL	22.4	6.230	46.700	6.00	48.20	3.83	-3.11	±5	2015/8/17

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/8/19	750	HSL	250	D750V3-1012	EX3DV4 - SN3931	DAE3 Sn577	2.00	8.22	8.00	-2.68
2015/8/15	750	MSL	250	D750V3-1012	EX3DV4 - SN3697	DAE4 Sn1388	2.05	8.61	8.20	-4.76
2015/8/19	835	HSL	250	D835V2-499	EX3DV4 - SN3931	DAE3 Sn577	2.32	9.20	9.28	0.87
2015/8/14	835	MSL	250	D835V2-499	EX3DV4 - SN3931	DAE3 Sn577	2.44	9.30	9.76	4.95
2015/8/19	1750	HSL	250	D1750V2-1068	EX3DV4 - SN3931	DAE3 Sn577	9.35	36.80	37.40	1.63
2015/8/14	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3931	DAE3 Sn577	9.02	38.00	36.08	-5.05
2015/8/18	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn1388	9.90	40.00	39.60	-1.00
2015/8/18	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3931	DAE3 Sn577	10.00	40.00	40.00	0.00
2015/8/13	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3931	DAE3 Sn577	10.10	39.80	40.40	1.51
2015/8/18	2450	HSL	250	D2450V2-736	EX3DV4 - SN3931	DAE3 Sn577	12.70	51.80	50.80	-1.93
2015/8/16	2450	MSL	250	D2450V2-736	EX3DV4 - SN3925	DAE3 Sn495	12.50	50.60	50.00	-1.19
2015/8/16	2600	HSL	250	D2600V2-1070	EX3DV4 - SN3925	DAE3 Sn495	13.90	56.90	55.60	-2.28
2015/9/1	2600	HSL	250	D2600V2-1070	EX3DV4 - SN3955	DAE4 Sn1399	14.30	56.90	57.20	0.53
2015/8/15	2600	MSL	250	D2600V2-1070	EX3DV4 - SN3925	DAE3 Sn495	14.00	55.30	56.00	1.27
2015/9/1	2600	MSL	250	D2600V2-1070	EX3DV4 - SN3955	DAE4 Sn1399	13.50	55.30	54.00	-2.35
2015/8/17	5300	HSL	100	D5GHzV2-1040-5300	EX3DV4 - SN3925	DAE3 Sn495	7.77	83.80	77.70	-7.28
2015/8/17	5300	MSL	100	D5GHzV2-1040-5300	EX3DV4 - SN3925	DAE3 Sn495	7.95	75.20	79.50	5.72
2015/8/17	5600	HSL	100	D5GHzV2-1040-5600	EX3DV4 - SN3925	DAE3 Sn495	7.92	82.10	79.20	-3.53
2015/8/17	5600	MSL	100	D5GHzV2-1040-5600	EX3DV4 - SN3925	DAE3 Sn495	7.96	79.00	79.60	0.76
2015/8/17	5800	HSL	100	D5GHzV2-1040-5800	EX3DV4 - SN3925	DAE3 Sn495	8.19	80.60	81.90	1.61
2015/8/17	5800	MSL	100	D5GHzV2-1040-5800	EX3DV4 - SN3925	DAE3 Sn495	7.31	76.60	73.10	-4.57

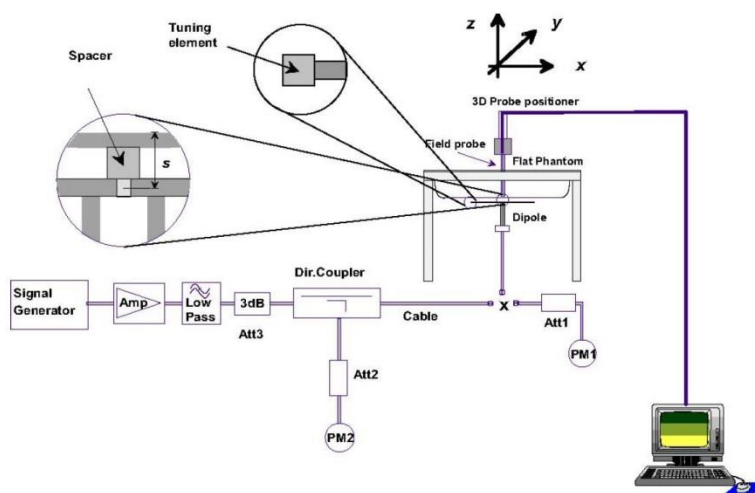


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

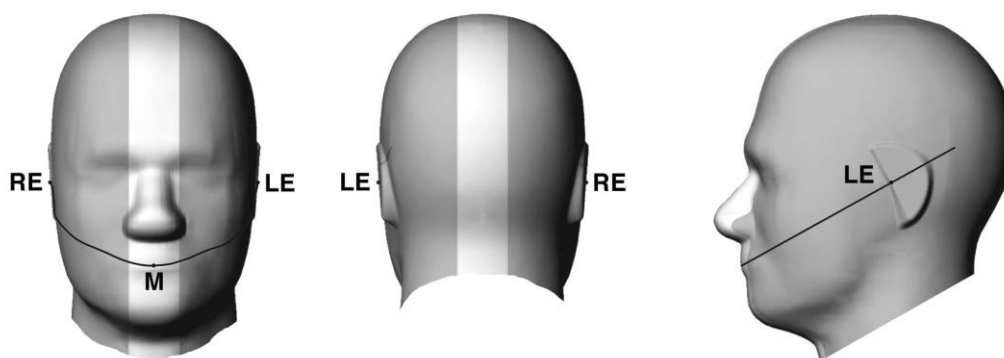


Fig 9.1.1 Front, back, and side views of SAM twin phantom

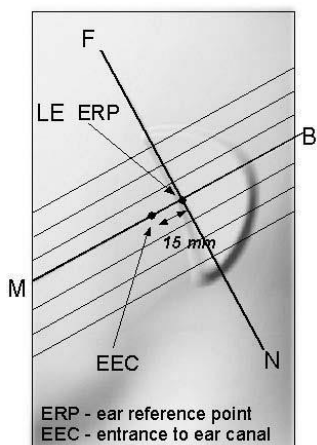


Fig 9.1.2 Close-up side view of phantom showing the ear region.

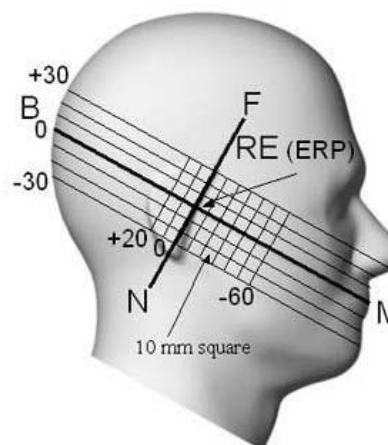


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

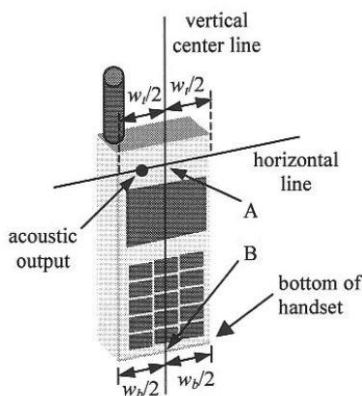


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

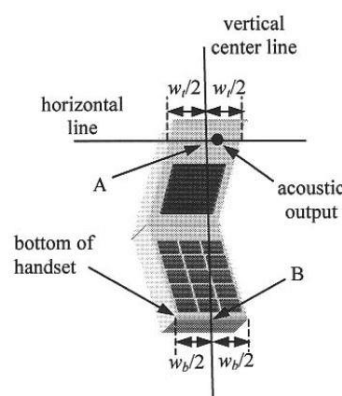


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

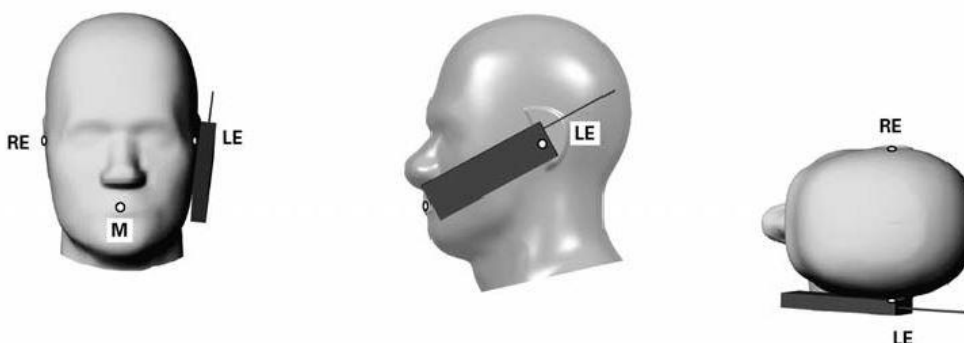


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

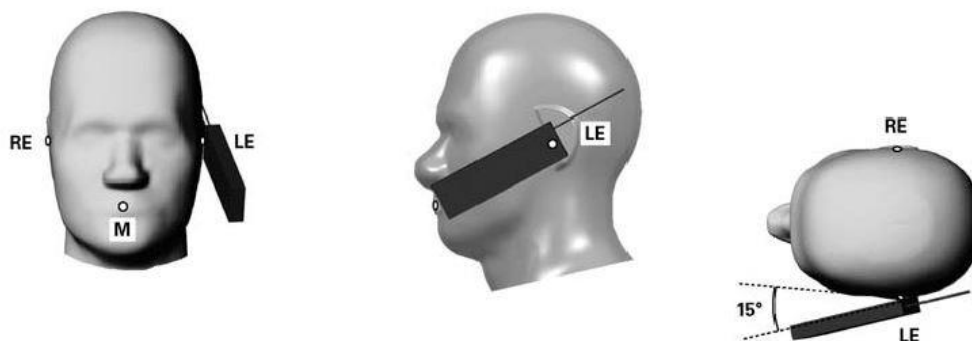


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

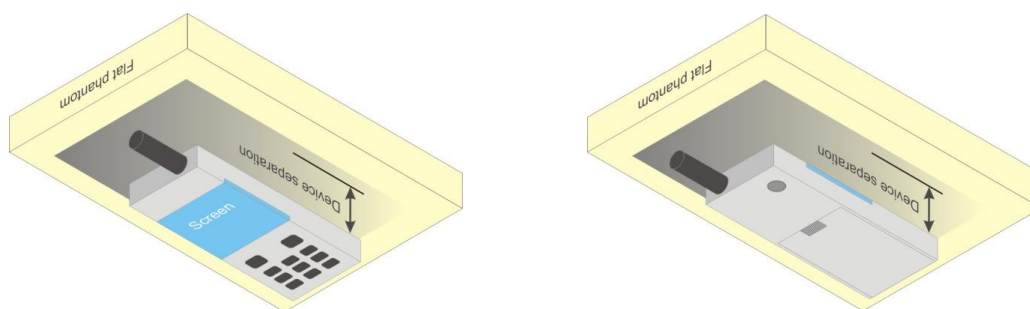


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06 v02 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 \cdot \log [\sum (\text{power of each slot, in mW}) / 8]$$

- Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GSM1900.
- Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GSM1900.
- Since the EDGE1900 (4Tx slots) maximum source-based time average power is high then GPRS mode, therefore the EDGE1900 (4Tx slots) will verify worse case found in GPRS mode.

Band GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)		32.47	32.52	32.74	33.50	23.47	23.52	23.74	24.50
GPRS (GMSK, 1 Tx slot)		32.52	32.57	32.78	33.50	23.52	23.57	23.78	24.50
GPRS (GMSK, 2 Tx slots)		29.68	29.67	29.63	30.50	23.68	23.67	23.63	24.50
GPRS (GMSK, 3 Tx slots)		27.97	27.94	27.92	28.00	23.71	23.68	23.66	23.74
GPRS (GMSK, 4 Tx slots)		27.27	27.24	27.13	27.50	24.27	24.24	24.13	24.50
EDGE (8PSK, 1 Tx slot)		26.79	26.82	26.84	27.00	17.79	17.82	17.84	18.00
EDGE (8PSK, 2 Tx slots)		26.51	26.54	26.59	27.00	20.51	20.54	20.59	21.00
EDGE (8PSK, 3 Tx slots)		26.08	26.09	26.14	27.00	21.82	21.83	21.88	22.74
EDGE (8PSK, 4 Tx slots)		25.64	25.68	25.77	27.00	22.64	22.68	22.77	24.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.73	29.69	29.60	30.50	23.68	23.65	23.57	24.48
	GPRS (GMSK, 1 Tx slot)	29.67	29.66	29.59	30.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.72	29.68	29.59	30.50	23.67	23.64	23.56	24.48
	GPRS (GMSK, 1 Tx slot)	29.66	29.65	29.58	30.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	27.80	27.91	27.84	28.00	23.50	23.65	23.67	23.74
	GPRS (GMSK, 2 Tx slots)	27.74	27.91	27.98	28.00				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.66	29.66	29.75	30.50	22.29	22.35	22.39	23.07
	EDGE (8PSK, 1 Tx slot)	26.34	26.52	26.45	27.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.35	29.55	29.50	30.50	22.11	22.27	22.26	23.07
	EDGE (8PSK, 1 Tx slot)	26.44	26.51	26.58	27.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	27.81	27.98	27.99	28.00	22.41	22.51	22.51	23.10
	EDGE (8PSK, 2 Tx slots)	25.97	26.00	26.00	27.00				

Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)		29.58	29.68	29.47	30.50	20.58	20.68	20.47	21.50
GPRS (GMSK, 1 Tx slot)		29.60	29.69	29.48	30.50	20.60	20.69	20.48	21.50
GPRS (GMSK, 2 Tx slots)		27.35	27.30	27.25	27.50	21.35	21.30	21.25	21.50
GPRS (GMSK, 3 Tx slots)		25.27	25.12	25.49	25.50	21.01	20.86	21.23	21.24
GPRS (GMSK, 4 Tx slots)		24.10	24.11	24.05	24.50	21.10	21.11	21.05	21.50
EDGE (8PSK, 1 Tx slot)		25.08	25.24	25.26	26.00	16.08	16.24	16.26	17.00
EDGE (8PSK, 2 Tx slots)		24.98	25.02	25.05	26.00	18.98	19.02	19.05	20.00
EDGE (8PSK, 3 Tx slots)		24.65	24.75	24.80	26.00	20.39	20.49	20.54	21.74
EDGE (8PSK, 4 Tx slots)		24.39	24.45	24.50	26.00	21.39	21.45	21.50	23.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.24	27.25	27.19	27.50	21.18	21.19	21.14	21.48
	GPRS (GMSK, 1 Tx slot)	27.16	27.17	27.13	27.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.23	27.24	27.18	27.50	21.17	21.17	21.14	21.48
	GPRS (GMSK, 1 Tx slot)	27.15	27.15	27.14	27.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	25.27	25.11	25.49	25.50	21.00	20.84	21.18	21.24
	GPRS (GMSK, 2 Tx slots)	25.26	25.09	25.41	25.50				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.16	27.18	27.11	27.50	20.12	20.19	20.15	20.79
	EDGE (8PSK, 1 Tx slot)	24.80	24.97	24.96	26.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.14	27.15	27.10	27.50	20.08	20.14	20.14	20.79
	EDGE (8PSK, 1 Tx slot)	24.72	24.89	24.96	26.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	24.90	24.89	25.50	25.50	20.44	20.49	20.72	21.58
	EDGE (8PSK, 2 Tx slots)	24.59	24.68	24.70	26.00				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ED} (Note 5) (Note 6)	β_{ED} (SF)	β_{ED} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ED1} : 47/15 β_{ED2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ED} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

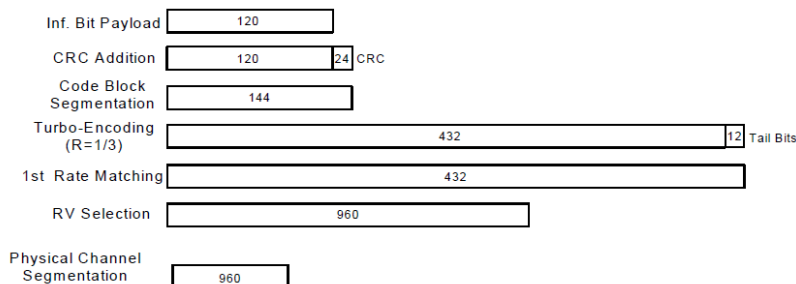
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel			4357	4407	4458	9662	9800	9938	1537	1638	1738
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR (dB)	3GPP Rel 99	AMR 12.2Kbps	22.90	23.06	23.08	23.22	23.44	23.42	23.06	23.21	23.40
	3GPP Rel 99	RMC 12.2Kbps	22.91	23.07	23.10	23.24	23.48	23.47	23.09	23.24	23.42
0	3GPP Rel 6	HSDPA Subtest-1	21.77	21.64	21.65	22.04	22.05	22.39	21.85	22.15	22.12
0	3GPP Rel 6	HSDPA Subtest-2	21.75	21.62	21.63	22.07	22.25	22.40	21.88	22.18	22.15
0.5	3GPP Rel 6	HSDPA Subtest-3	21.25	21.17	21.19	21.55	21.74	21.91	21.36	21.68	21.65
0.5	3GPP Rel 6	HSDPA Subtest-4	21.23	21.16	21.17	21.55	21.71	21.91	21.36	21.68	21.67
0	3GPP Rel 8	DC-HSDPA Subtest-1	21.75	21.60	21.61	22.00	22.01	22.28	21.83	22.05	22.06
0	3GPP Rel 8	DC-HSDPA Subtest-2	21.96	21.55	21.58	22.06	22.21	22.35	21.85	22.12	22.10
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	21.20	21.15	21.16	21.52	21.69	21.89	21.26	21.68	21.60
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	21.20	21.12	21.14	21.50	21.70	21.88	21.38	21.63	21.65
0	3GPP Rel 6	HSUPA Subtest-1	21.08	21.20	21.31	21.79	22.01	22.10	21.62	21.75	21.85
1	3GPP Rel 6	HSUPA Subtest-2	20.61	20.74	20.82	21.11	21.34	21.48	20.95	21.15	21.25
1	3GPP Rel 6	HSUPA Subtest-3	20.22	20.29	20.43	20.73	20.91	21.03	20.54	20.76	20.72
1	3GPP Rel 6	HSUPA Subtest-4	20.55	20.61	20.68	21.00	21.42	21.48	20.79	21.36	21.44
0	3GPP Rel 6	HSUPA Subtest-5	21.60	21.80	21.80	22.10	22.35	22.40	22.00	22.20	22.30

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
8. LTE band 2 / 38 SAR test was covered by Band 25 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

<LTE Band 17>

Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel			23780	23790	23800		
Frequency (MHz)			709	710	711		
QPSK	1	0	22.69	22.77	22.63		
QPSK	1	24	22.58	22.59	22.66	24	0
QPSK	1	49	22.51	22.54	22.50		
QPSK	25	0	21.82	21.76	21.66		
QPSK	25	12	21.72	21.65	21.80	23	1
QPSK	25	24	21.55	21.55	21.47		
QPSK	50	0	21.72	21.71	21.62		
16QAM	1	0	22.05	22.04	21.90	23	1
16QAM	1	24	22.01	22.00	22.00		
16QAM	1	49	22.07	22.01	21.88		
16QAM	25	0	20.68	20.77	20.68	22	2
16QAM	25	12	20.54	20.71	20.73		
16QAM	25	24	20.65	20.46	20.49		
16QAM	50	0	20.60	20.68	20.66		
Channel			23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)			706.5	710	713.5		
QPSK	1	0	22.65	22.66	22.56	24	0
QPSK	1	12	22.64	22.58	22.61		
QPSK	1	24	22.61	22.54	22.64		
QPSK	12	0	21.70	21.71	21.64	23	1
QPSK	12	6	21.71	21.77	21.80		
QPSK	12	11	21.60	21.72	21.78		
QPSK	25	0	21.65	21.60	21.71		
16QAM	1	0	21.93	21.94	21.94	23	1
16QAM	1	12	21.95	22.03	22.03		
16QAM	1	24	21.98	21.89	21.85		
16QAM	12	0	20.67	20.63	20.76	22	2
16QAM	12	6	20.71	20.52	20.78		
16QAM	12	11	20.69	20.46	20.63		
16QAM	25	0	20.66	20.67	20.73		

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	23.55			24	0
10	QPSK	1	24	23.45				
10	QPSK	1	49	23.42				
10	QPSK	25	0	22.38			23	1
10	QPSK	25	12	22.31				
10	QPSK	25	24	22.25				
10	QPSK	50	0	22.38			23	1
10	16QAM	1	0	22.55				
10	16QAM	1	24	22.64				
10	16QAM	1	49	22.67			22	2
10	16QAM	25	0	21.39				
10	16QAM	25	12	21.37				
10	16QAM	25	24	21.35			22	2
10	16QAM	50	0	21.26				
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5	Tune-up limit (dBm)	MPR (dB)
5	QPSK	1	0	23.51	23.27	23.52	24	0
5	QPSK	1	12	23.47	23.37	23.48		
5	QPSK	1	24	23.27	23.25	23.27		
5	QPSK	12	0	22.28	22.18	22.20	23	1
5	QPSK	12	6	22.28	22.47	22.35		
5	QPSK	12	11	22.25	22.39	22.45		
5	QPSK	25	0	22.22	22.39	22.29	23	1
5	16QAM	1	0	22.71	22.60	22.58		
5	16QAM	1	12	22.69	22.76	22.83		
5	16QAM	1	24	22.58	22.70	22.77	22	2
5	16QAM	12	0	21.50	21.20	21.12		
5	16QAM	12	6	21.24	21.31	21.25		
5	16QAM	12	11	21.21	21.30	21.33	22	2
5	16QAM	25	0	21.35	21.36	21.37		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.44	23.70	23.36	24	0
10	QPSK	1	24	23.37	23.47	23.33		
10	QPSK	1	49	23.33	23.29	23.16		
10	QPSK	25	0	22.34	22.42	22.24	23	1
10	QPSK	25	12	22.41	22.30	22.20		
10	QPSK	25	24	22.32	22.24	22.18		
10	QPSK	50	0	22.38	22.32	22.13		
10	16QAM	1	0	22.78	22.86	22.79	23	1
10	16QAM	1	24	22.75	22.66	22.53		
10	16QAM	1	49	22.64	22.62	22.48		
10	16QAM	25	0	21.36	21.32	21.29	22	2
10	16QAM	25	12	21.45	21.45	21.23		
10	16QAM	25	24	21.22	21.30	21.11		
10	16QAM	50	0	21.21	21.26	21.24		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.45	23.45	23.26	24	0
5	QPSK	1	12	23.29	23.44	23.27		
5	QPSK	1	24	23.22	23.32	23.23		
5	QPSK	12	0	22.35	22.37	22.12	23	1
5	QPSK	12	6	22.22	22.41	22.15		
5	QPSK	12	11	22.20	22.19	22.20		
5	QPSK	25	0	22.26	22.28	22.15		
5	16QAM	1	0	22.62	22.59	22.65	23	1
5	16QAM	1	12	22.63	22.59	22.52		
5	16QAM	1	24	22.59	22.60	22.39		
5	16QAM	12	0	21.42	21.41	21.32	22	2
5	16QAM	12	6	21.35	21.33	21.13		
5	16QAM	12	11	21.35	21.06	21.13		
5	16QAM	25	0	21.20	21.36	21.19		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.50	23.43	23.18	24	0
3	QPSK	1	7	23.41	23.56	23.42		
3	QPSK	1	14	23.22	23.21	23.06		
3	QPSK	8	0	22.22	22.31	22.15	23	1
3	QPSK	8	4	22.30	22.45	22.19		
3	QPSK	8	7	22.40	22.32	22.07		
3	QPSK	15	0	22.43	22.21	22.15		
3	16QAM	1	0	22.70	22.67	22.36	23	1
3	16QAM	1	7	22.71	22.75	22.54		
3	16QAM	1	14	22.47	22.33	22.44		
3	16QAM	8	0	21.27	21.25	21.21	22	2
3	16QAM	8	4	21.37	21.32	21.22		
3	16QAM	8	7	21.31	21.22	21.18		
3	16QAM	15	0	21.33	21.16	21.14		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.41	23.47	23.16	24	0
1.4	QPSK	1	2	23.39	23.38	23.23		
1.4	QPSK	1	5	23.38	23.31	23.19		
1.4	QPSK	3	0	23.09	23.28	22.99		
1.4	QPSK	3	1	23.26	23.25	23.22		
1.4	QPSK	3	2	23.24	23.31	23.24		
1.4	QPSK	6	0	22.09	22.24	22.00	23	1
1.4	16QAM	1	0	22.70	22.68	22.41	23	1
1.4	16QAM	1	2	22.57	22.61	22.50		
1.4	16QAM	1	5	22.59	22.56	22.50		
1.4	16QAM	3	0	22.25	22.27	22.20		
1.4	16QAM	3	1	22.32	22.40	22.06		
1.4	16QAM	3	2	22.18	22.41	22.16		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.36	23.46	23.58		
20	QPSK	1	49	23.07	23.02	23.25	24	0
20	QPSK	1	99	23.29	23.33	23.08		
20	QPSK	50	0	22.46	22.37	22.53		
20	QPSK	50	24	22.07	22.11	22.24	23	1
20	QPSK	50	49	21.99	22.19	22.13		
20	QPSK	100	0	22.18	22.22	22.37		
20	16QAM	1	0	22.60	22.73	22.76	23	1
20	16QAM	1	49	22.25	22.32	22.46		
20	16QAM	1	99	22.45	22.53	22.34		
20	16QAM	50	0	21.32	21.32	21.48	22	2
20	16QAM	50	24	21.01	21.09	21.22		
20	16QAM	50	49	20.97	21.16	21.13		
20	16QAM	100	0	21.19	21.21	21.37		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.52	23.47	23.52		
15	QPSK	1	37	23.49	23.39	23.51	24	0
15	QPSK	1	74	23.50	23.33	23.42		
15	QPSK	36	0	22.50	22.49	22.51		
15	QPSK	36	18	22.47	22.44	22.50	23	1
15	QPSK	36	37	22.43	22.46	22.59		
15	QPSK	75	0	22.35	22.42	22.44		
15	16QAM	1	0	22.57	22.52	22.53	23	1
15	16QAM	1	37	22.47	22.54	22.49		
15	16QAM	1	74	22.37	22.45	22.39		
15	16QAM	36	0	21.61	21.49	21.54	22	2
15	16QAM	36	18	21.51	21.40	21.51		
15	16QAM	36	37	21.43	21.29	21.42		
15	16QAM	75	0	21.34	21.28	21.33		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.43	23.51	23.47		
10	QPSK	1	24	23.51	23.43	23.52	24	0
10	QPSK	1	49	23.39	23.38	23.49		
10	QPSK	25	0	22.53	22.54	22.57		
10	QPSK	25	12	22.52	22.43	22.55	23	1
10	QPSK	25	24	22.51	22.42	22.49		
10	QPSK	50	0	22.48	22.30	22.54		
10	16QAM	1	0	22.45	22.46	22.46	23	1
10	16QAM	1	24	22.60	22.38	22.41		
10	16QAM	1	49	22.32	22.48	22.44		
10	16QAM	25	0	21.62	21.49	21.60	22	2
10	16QAM	25	12	21.49	21.40	21.55		
10	16QAM	25	24	21.42	21.34	21.51		
10	16QAM	50	0	21.49	21.43	21.44		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.48	23.43	23.49	24	0
5	QPSK	1	12	23.50	23.34	23.46		
5	QPSK	1	24	23.45	23.41	23.40		
5	QPSK	12	0	22.52	22.49	22.66	23	1
5	QPSK	12	6	22.54	22.43	22.61		
5	QPSK	12	11	22.50	22.52	22.70		
5	QPSK	25	0	22.49	22.47	22.64	23	1
5	16QAM	1	0	22.47	22.51	22.57		
5	16QAM	1	12	22.57	22.49	22.59		
5	16QAM	1	24	22.55	22.39	22.47	22	2
5	16QAM	12	0	21.57	21.50	21.57		
5	16QAM	12	6	21.53	21.53	21.62		
5	16QAM	12	11	21.52	21.47	21.57	22	2
5	16QAM	25	0	21.48	21.49	21.60		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.47	23.51	23.51	24	0
3	QPSK	1	7	23.49	23.43	23.49		
3	QPSK	1	14	23.41	23.39	23.48		
3	QPSK	8	0	22.62	22.57	22.72	23	1
3	QPSK	8	4	22.49	22.58	22.61		
3	QPSK	8	7	22.55	22.51	22.59		
3	QPSK	15	0	22.46	22.58	22.55	23	1
3	16QAM	1	0	22.42	22.54	22.52		
3	16QAM	1	7	22.56	22.44	22.49		
3	16QAM	1	14	22.60	22.35	22.47	22	2
3	16QAM	8	0	21.40	21.42	21.64		
3	16QAM	8	4	21.54	21.45	21.58		
3	16QAM	8	7	21.53	21.42	21.45	22	2
3	16QAM	15	0	21.48	21.50	21.48		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.52	23.48	23.46	24	0
1.4	QPSK	1	2	23.47	23.44	23.52		
1.4	QPSK	1	5	23.52	23.43	23.40		
1.4	QPSK	3	0	23.49	23.56	23.48		
1.4	QPSK	3	1	23.47	23.43	23.47		
1.4	QPSK	3	2	23.51	23.39	23.51		
1.4	QPSK	6	0	22.50	22.45	22.53	23	1
1.4	16QAM	1	0	22.45	22.34	22.54	23	1
1.4	16QAM	1	2	22.46	22.41	22.49		
1.4	16QAM	1	5	22.49	22.44	22.36		
1.4	16QAM	3	0	22.58	22.58	22.58		
1.4	16QAM	3	1	22.56	22.54	22.54		
1.4	16QAM	3	2	22.46	22.49	22.51		



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.18	23.16	22.97		
20	QPSK	1	49	22.72	23.13	22.75	23.5	0
20	QPSK	1	99	22.71	22.81	22.88		
20	QPSK	50	0	22.40	22.04	21.63		
20	QPSK	50	24	22.24	22.23	21.62	22.5	1
20	QPSK	50	49	22.08	22.05	21.89		
20	QPSK	100	0	22.41	22.39	21.86		
20	16QAM	1	0	22.50	21.97	21.88	22.5	1
20	16QAM	1	49	22.48	22.17	21.51		
20	16QAM	1	99	22.08	22.34	22.39		
20	16QAM	50	0	21.39	21.04	20.58	21.5	2
20	16QAM	50	24	21.36	21.39	20.65		
20	16QAM	50	49	20.99	21.23	20.82		
20	16QAM	100	0	21.35	21.49	20.61		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.86	23.08	23.13		
15	QPSK	1	37	22.85	22.78	22.90	23.5	0
15	QPSK	1	74	22.89	22.71	22.52		
15	QPSK	36	0	22.13	22.08	21.92		
15	QPSK	36	18	22.06	22.09	21.59	22.5	1
15	QPSK	36	37	21.98	21.81	21.98		
15	QPSK	75	0	22.18	22.06	21.75		
15	16QAM	1	0	22.33	22.20	22.22	22.5	1
15	16QAM	1	37	22.03	22.15	22.33		
15	16QAM	1	74	22.14	22.17	22.05		
15	16QAM	36	0	20.92	20.95	21.20	21.5	2
15	16QAM	36	18	20.97	21.18	20.57		
15	16QAM	36	37	21.09	21.15	21.16		
15	16QAM	75	0	21.10	21.00	20.87		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.76	22.76	22.75		
10	QPSK	1	24	22.64	22.77	22.64	23.5	0
10	QPSK	1	49	22.60	22.49	22.53		
10	QPSK	25	0	21.82	21.89	21.71		
10	QPSK	25	12	22.02	22.09	21.72	22.5	1
10	QPSK	25	24	21.58	21.62	21.79		
10	QPSK	50	0	21.79	22.05	21.60		
10	16QAM	1	0	22.24	22.45	22.21	22.5	1
10	16QAM	1	24	21.86	21.99	21.89		
10	16QAM	1	49	22.00	21.96	21.79		
10	16QAM	25	0	21.06	20.74	20.90	21.5	2
10	16QAM	25	12	20.70	21.02	20.55		
10	16QAM	25	24	21.04	20.74	20.82		
10	16QAM	50	0	20.86	20.85	20.71		

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.92	22.82	22.91	23.5	0
5	QPSK	1	12	22.48	22.71	22.59		
5	QPSK	1	24	22.40	22.52	22.24		
5	QPSK	12	0	21.50	21.79	21.60	22.5	1
5	QPSK	12	6	21.65	21.46	21.55		
5	QPSK	12	11	21.61	21.50	21.71		
5	QPSK	25	0	21.54	21.78	21.63		
5	16QAM	1	0	21.77	22.50	22.07	22.5	1
5	16QAM	1	12	21.63	21.97	21.77		
5	16QAM	1	24	21.66	22.06	21.79		
5	16QAM	12	0	20.77	20.67	20.97	21.5	2
5	16QAM	12	6	20.82	20.74	20.34		
5	16QAM	12	11	20.88	20.64	20.52		
5	16QAM	25	0	20.67	20.78	20.44		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.92	22.72	22.71	23.5	0
3	QPSK	1	7	22.46	22.56	22.58		
3	QPSK	1	14	22.45	22.78	22.16		
3	QPSK	8	0	21.63	21.68	21.60	22.5	1
3	QPSK	8	4	21.78	21.45	21.20		
3	QPSK	8	7	21.58	21.57	21.89		
3	QPSK	15	0	21.58	21.81	21.40		
3	16QAM	1	0	22.20	22.19	21.92	22.5	1
3	16QAM	1	7	22.05	21.88	21.83		
3	16QAM	1	14	21.78	22.05	21.72		
3	16QAM	8	0	20.81	20.91	20.65	21.5	2
3	16QAM	8	4	20.62	20.74	20.24		
3	16QAM	8	7	20.67	20.43	20.49		
3	16QAM	15	0	20.82	20.76	20.37		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.63	22.53	22.51	23.5	0
1.4	QPSK	1	2	22.55	22.31	22.27		
1.4	QPSK	1	5	22.57	22.65	22.56		
1.4	QPSK	3	0	22.43	22.30	22.58		
1.4	QPSK	3	1	22.55	22.45	22.56		
1.4	QPSK	3	2	22.63	22.47	22.51		
1.4	QPSK	6	0	21.92	21.48	21.66	22.5	1
1.4	16QAM	1	0	21.57	21.91	21.55	22.5	1
1.4	16QAM	1	2	21.48	21.44	21.40		
1.4	16QAM	1	5	21.69	21.51	21.69		
1.4	16QAM	3	0	21.59	21.60	21.48		
1.4	16QAM	3	1	21.56	21.64	21.56		
1.4	16QAM	3	2	21.61	21.59	21.50		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.39	23.45	23.25		
20	QPSK	1	49	22.96	23.40	23.05	24	0
20	QPSK	1	99	23.01	23.11	23.11		
20	QPSK	50	0	22.80	22.28	21.86		
20	QPSK	50	24	22.45	22.52	21.91	23	1
20	QPSK	50	49	22.30	22.33	22.18		
20	QPSK	100	0	22.61	22.67	22.10		
20	16QAM	1	0	22.92	22.24	22.16	23	1
20	16QAM	1	49	22.68	22.38	21.77		
20	16QAM	1	99	22.32	22.79	22.61		
20	16QAM	50	0	21.64	21.34	20.82	22	2
20	16QAM	50	24	21.64	21.66	20.93		
20	16QAM	50	49	21.26	21.45	21.06		
20	16QAM	100	0	21.62	21.75	20.88		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.13	23.38	23.35		
15	QPSK	1	37	23.13	23.02	23.19	24	0
15	QPSK	1	74	23.15	22.98	22.72		
15	QPSK	36	0	22.43	22.29	22.14		
15	QPSK	36	18	22.32	22.37	21.86	23	1
15	QPSK	36	37	22.22	22.11	22.20		
15	QPSK	75	0	22.41	22.30	22.03		
15	16QAM	1	0	22.56	22.42	22.45	23	1
15	16QAM	1	37	22.31	22.38	22.61		
15	16QAM	1	74	22.40	22.44	22.35		
15	16QAM	36	0	21.18	21.19	21.44	22	2
15	16QAM	36	18	21.25	21.39	20.77		
15	16QAM	36	37	21.31	21.39	21.37		
15	16QAM	75	0	21.39	21.21	21.17		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.03	23.03	23.00		
10	QPSK	1	24	22.89	23.05	22.84	24	0
10	QPSK	1	49	22.81	22.76	22.74		
10	QPSK	25	0	22.05	22.19	21.99		
10	QPSK	25	12	22.28	22.36	21.92	23	1
10	QPSK	25	24	21.79	21.87	22.02		
10	QPSK	50	0	21.99	22.33	21.89		
10	16QAM	1	0	22.53	22.74	22.46	23	1
10	16QAM	1	24	22.08	22.20	22.19		
10	16QAM	1	49	22.28	22.24	22.02		
10	16QAM	25	0	21.35	20.94	21.17	22	2
10	16QAM	25	12	20.94	21.30	20.84		
10	16QAM	25	24	21.32	20.99	21.02		
10	16QAM	50	0	21.13	21.12	20.98		

Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.18	23.07	23.16	24	0
5	QPSK	1	12	22.76	22.92	22.80		
5	QPSK	1	24	22.70	22.76	22.49		
5	QPSK	12	0	21.78	22.03	21.86	23	1
5	QPSK	12	6	21.93	21.66	21.75		
5	QPSK	12	11	21.89	21.77	21.99		
5	QPSK	25	0	21.82	22.04	21.89	23	1
5	16QAM	1	0	22.00	22.91	22.33		
5	16QAM	1	12	21.91	22.17	21.97		
5	16QAM	1	24	21.90	22.33	22.03	22	2
5	16QAM	12	0	21.06	20.87	21.27		
5	16QAM	12	6	21.04	21.02	20.54		
5	16QAM	12	11	21.17	20.84	20.76	22	2
5	16QAM	25	0	20.93	21.00	20.73		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.17	22.93	22.98	24	0
3	QPSK	1	7	22.70	22.85	22.78		
3	QPSK	1	14	22.72	23.06	22.39		
3	QPSK	8	0	21.89	21.89	21.87	23	1
3	QPSK	8	4	21.98	21.66	21.49		
3	QPSK	8	7	21.81	21.85	22.12		
3	QPSK	15	0	21.80	22.03	21.62	23	1
3	16QAM	1	0	22.50	22.49	22.20		
3	16QAM	1	7	22.34	22.09	22.10		
3	16QAM	1	14	21.99	22.31	21.94	22	2
3	16QAM	8	0	21.01	21.20	20.87		
3	16QAM	8	4	20.91	20.94	20.54		
3	16QAM	8	7	20.88	20.66	20.72	22	2
3	16QAM	15	0	21.03	21.06	20.63		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.89	22.78	22.79	24	0
1.4	QPSK	1	2	22.80	22.55	22.51		
1.4	QPSK	1	5	22.85	22.87	22.78		
1.4	QPSK	3	0	22.71	22.50	22.85		
1.4	QPSK	3	1	22.75	22.74	22.80		
1.4	QPSK	3	2	22.91	22.77	22.78		
1.4	QPSK	6	0	22.13	21.76	21.92	23	1
1.4	16QAM	1	0	21.78	22.13	21.83	23	1
1.4	16QAM	1	2	21.73	21.71	21.64		
1.4	16QAM	1	5	21.92	21.77	21.99		
1.4	16QAM	3	0	21.82	21.81	21.74		
1.4	16QAM	3	1	21.80	21.87	21.78		
1.4	16QAM	3	2	21.84	21.85	21.74		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.10	22.04	22.05		
20	QPSK	1	49	22.04	22.00	21.98	23.5	0
20	QPSK	1	99	21.94	22.01	22.02		
20	QPSK	50	0	20.53	20.51	20.55		
20	QPSK	50	24	20.50	20.51	20.53	22.5	1
20	QPSK	50	49	20.51	20.50	20.51		
20	QPSK	100	0	20.50	20.51	20.54		
20	16QAM	1	0	21.05	21.03	21.07	22.5	1
20	16QAM	1	49	21.03	20.95	21.04		
20	16QAM	1	99	20.90	21.05	21.01		
20	16QAM	50	0	20.07	20.08	20.13	21.5	2
20	16QAM	50	24	20.04	20.02	20.04		
20	16QAM	50	49	20.03	19.92	20.06		
20	16QAM	100	0	20.05	19.92	20.00		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.02	22.00	22.03		
15	QPSK	1	37	22.08	21.98	22.00	23.5	0
15	QPSK	1	74	22.04	22.02	22.01		
15	QPSK	36	0	20.52	20.54	20.53		
15	QPSK	36	18	20.53	20.53	20.51	22.5	1
15	QPSK	36	37	20.50	20.53	20.53		
15	QPSK	75	0	20.51	20.51	20.54		
15	16QAM	1	0	20.98	21.06	21.12	22.5	1
15	16QAM	1	37	21.03	21.00	21.15		
15	16QAM	1	74	21.06	21.02	21.06		
15	16QAM	36	0	20.12	20.09	20.13	21.5	2
15	16QAM	36	18	20.19	20.14	20.11		
15	16QAM	36	37	20.10	20.02	20.12		
15	16QAM	75	0	19.98	20.02	20.11		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.02	22.05	21.97		
10	QPSK	1	24	22.08	22.02	21.90	23.5	0
10	QPSK	1	49	22.01	22.01	21.89		
10	QPSK	25	0	20.54	20.55	20.53		
10	QPSK	25	12	20.54	20.55	20.51	22.5	1
10	QPSK	25	24	20.51	20.51	20.50		
10	QPSK	50	0	20.50	20.55	20.50		
10	16QAM	1	0	20.97	21.06	21.15	22.5	1
10	16QAM	1	24	21.14	21.03	21.06		
10	16QAM	1	49	21.13	20.98	20.94		
10	16QAM	25	0	20.06	20.07	20.17	21.5	2
10	16QAM	25	12	20.07	20.03	20.17		
10	16QAM	25	24	20.09	19.94	20.05		
10	16QAM	50	0	20.00	19.96	20.16		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.01	21.94	22.05	23.5	0
5	QPSK	1	12	22.08	22.08	22.04		
5	QPSK	1	24	22.03	21.96	22.03		
5	QPSK	12	0	20.55	20.53	20.50	22.5	1
5	QPSK	12	6	20.53	20.51	20.50		
5	QPSK	12	11	20.54	20.51	20.53		
5	QPSK	25	0	20.50	20.53	20.51		
5	16QAM	1	0	20.98	20.96	21.02	22.5	1
5	16QAM	1	12	21.03	21.04	21.04		
5	16QAM	1	24	20.94	21.03	21.03		
5	16QAM	12	0	21.10	21.03	21.09	21.5	2
5	16QAM	12	6	21.06	21.05	21.13		
5	16QAM	12	11	21.10	21.07	21.10		
5	16QAM	25	0	20.05	20.11	20.14		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

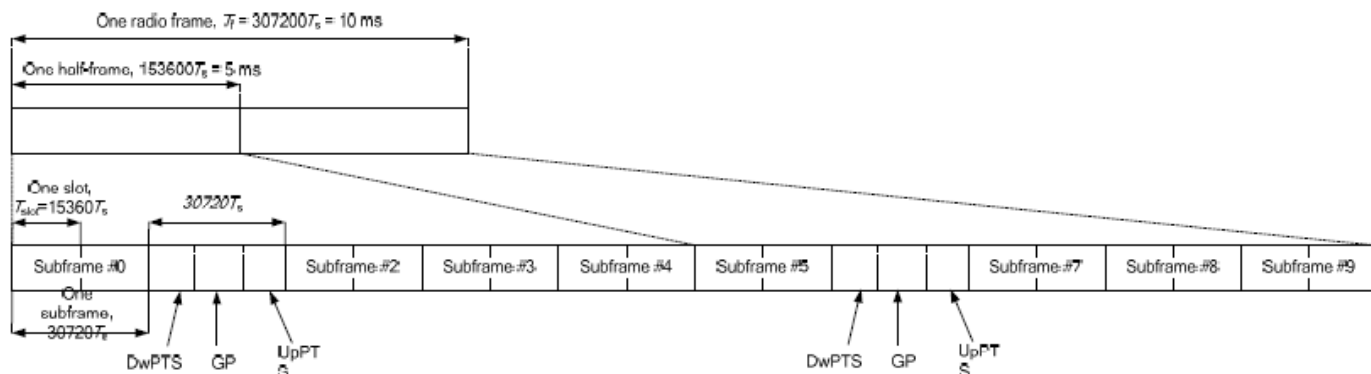


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.85	22.88	22.65		
20	QPSK	1	49	22.58	22.71	22.34	24	0
20	QPSK	1	99	22.47	22.42	22.22		
20	QPSK	50	0	21.82	21.83	21.55		
20	QPSK	50	24	21.76	21.75	21.40	23	1
20	QPSK	50	49	21.62	21.65	21.23		
20	QPSK	100	0	21.69	21.67	21.41		
20	16QAM	1	0	21.50	21.61	21.78	23	1
20	16QAM	1	49	21.76	21.71	21.39		
20	16QAM	1	99	21.37	21.52	21.15		
20	16QAM	50	0	20.82	20.91	20.61	22	2
20	16QAM	50	24	20.82	20.82	20.45		
20	16QAM	50	49	20.65	20.81	20.29		
20	16QAM	100	0	20.70	20.83	20.42		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.70	22.71	22.61		
15	QPSK	1	37	22.81	22.64	22.21	24	0
15	QPSK	1	74	22.63	22.57	22.18		
15	QPSK	36	0	21.79	21.87	21.52		
15	QPSK	36	18	21.87	21.79	21.34	23	1
15	QPSK	36	37	21.71	21.65	21.23		
15	QPSK	75	0	21.66	21.72	21.38		
15	16QAM	1	0	21.56	21.70	21.67	23	1
15	16QAM	1	37	21.75	21.72	21.33		
15	16QAM	1	74	21.42	21.67	21.27		
15	16QAM	36	0	20.66	20.76	20.57	22	2
15	16QAM	36	18	20.72	20.78	20.41		
15	16QAM	36	37	20.56	20.73	20.29		
15	16QAM	75	0	20.66	20.87	20.40		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.80	22.54	22.16		
10	QPSK	1	24	22.75	22.64	22.12	24	0
10	QPSK	1	49	22.76	22.43	22.08		
10	QPSK	25	0	21.91	21.79	21.21		
10	QPSK	25	12	21.85	21.83	21.22	23	1
10	QPSK	25	24	21.76	21.71	21.05		
10	QPSK	50	0	21.79	21.74	21.15		
10	16QAM	1	0	21.87	21.67	21.31	23	1
10	16QAM	1	24	21.92	21.81	21.23		
10	16QAM	1	49	21.80	21.47	21.17		
10	16QAM	25	0	20.96	20.85	20.38	22	2
10	16QAM	25	12	20.89	20.91	20.34		
10	16QAM	25	24	20.81	20.79	20.16		
10	16QAM	50	0	20.85	20.83	20.26		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.71	22.85	22.48	24	0
5	QPSK	1	12	22.69	22.84	22.39		
5	QPSK	1	24	22.58	22.75	22.29		
5	QPSK	12	0	21.83	22.03	21.68	23	1
5	QPSK	12	6	21.89	22.14	21.66		
5	QPSK	12	11	21.85	22.19	21.68		
5	QPSK	25	0	21.87	22.13	21.60		
5	16QAM	1	0	21.99	22.22	21.73	23	1
5	16QAM	1	12	22.02	22.23	21.68		
5	16QAM	1	24	21.96	22.18	21.60		
5	16QAM	12	0	20.84	21.06	20.77	22	2
5	16QAM	12	6	20.91	21.17	20.74		
5	16QAM	12	11	20.86	21.18	20.76		
5	16QAM	25	0	20.88	21.10	20.70		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.34	22.07	22.38	22.23	22.00	24	0
20	QPSK	1	49	22.31	22.10	22.18	22.02	22.01		
20	QPSK	1	99	22.09	22.04	22.15	22.00	22.00		
20	QPSK	50	0	21.44	21.18	21.24	21.53	21.27	23	1
20	QPSK	50	24	21.59	21.22	21.40	21.36	21.28		
20	QPSK	50	49	21.37	21.11	21.29	21.22	21.39		
20	QPSK	100	0	21.43	21.12	21.30	21.41	21.24	23	1
20	16QAM	1	0	21.63	21.35	21.73	21.55	21.19		
20	16QAM	1	49	21.58	21.44	21.47	21.30	21.25		
20	16QAM	1	99	21.27	21.04	21.32	21.08	21.27	22	2
20	16QAM	50	0	20.49	20.20	20.30	20.68	20.13		
20	16QAM	50	24	20.64	20.25	20.40	20.42	20.02		
20	16QAM	50	49	20.37	20.10	20.33	20.34	20.17	22	2
20	16QAM	100	0	20.49	20.14	20.34	20.54	20.03		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.36	22.21	22.26	22.39	22.13	24	0
15	QPSK	1	37	22.32	22.36	22.41	22.09	22.07		
15	QPSK	1	74	22.04	22.04	22.21	22.00	22.00		
15	QPSK	36	0	21.50	21.18	21.38	21.52	21.30	23	1
15	QPSK	36	18	21.50	21.22	21.40	21.37	21.31		
15	QPSK	36	37	21.40	21.06	21.25	21.17	21.22		
15	QPSK	75	0	21.44	21.12	21.33	21.34	21.30	23	1
15	16QAM	1	0	21.68	21.41	21.69	21.54	21.42		
15	16QAM	1	37	21.54	21.43	21.60	21.31	21.34		
15	16QAM	1	74	21.36	21.22	21.49	21.13	21.25	22	2
15	16QAM	36	0	20.54	20.19	20.37	20.54	20.09		
15	16QAM	36	18	20.49	20.15	20.38	20.39	20.05		
15	16QAM	36	37	20.43	20.05	20.25	20.23	20.03	22	2
15	16QAM	75	0	20.50	20.13	20.32	20.42	20.12		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.32	22.08	22.30	22.04	22.00	24	0
10	QPSK	1	24	22.28	22.36	22.61	22.02	22.01		
10	QPSK	1	49	22.23	22.07	22.36	22.01	22.00		
10	QPSK	25	0	21.38	21.28	21.51	21.19	21.27	23	1
10	QPSK	25	12	21.39	21.29	21.57	21.23	21.30		
10	QPSK	25	24	21.37	21.24	21.52	21.05	21.17		
10	QPSK	50	0	21.40	21.25	21.51	21.23	21.27	23	1
10	16QAM	1	0	21.65	21.44	21.77	21.27	21.20		
10	16QAM	1	24	21.61	21.70	21.83	21.27	21.26		
10	16QAM	1	49	21.50	21.40	21.70	21.00	21.00	22	2
10	16QAM	25	0	20.46	20.36	20.58	20.31	20.13		
10	16QAM	25	12	20.47	20.38	20.65	20.35	20.10		
10	16QAM	25	24	20.43	20.29	20.59	20.19	20.02	22	2
10	16QAM	50	0	20.43	20.25	20.53	20.31	20.11		



Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.3	2687.5		
5	QPSK	1	0	22.39	22.35	22.50	22.02	22.00	24	0
5	QPSK	1	12	22.28	22.28	22.40	22.01	22.02		
5	QPSK	1	24	22.20	22.13	22.39	22.00	22.03		
5	QPSK	12	0	21.50	21.44	21.48	21.24	21.27	23	1
5	QPSK	12	6	21.52	21.44	21.59	21.21	21.28		
5	QPSK	12	11	21.41	21.39	21.51	21.13	21.20		
5	QPSK	25	0	21.53	21.42	21.58	21.15	21.20		
5	16QAM	1	0	21.75	21.73	21.81	21.27	21.24	23	1
5	16QAM	1	12	21.60	21.65	21.71	21.22	21.31		
5	16QAM	1	24	21.59	21.51	21.74	21.04	21.05		
5	16QAM	12	0	20.57	20.34	20.54	20.35	20.08	22	2
5	16QAM	12	6	20.59	20.39	20.66	20.32	20.05		
5	16QAM	12	11	20.55	20.31	20.59	20.25	20.02		
5	16QAM	25	0	20.50	20.33	20.59	20.30	20.05		

LTE Carrier Aggregation Combination
<Inter-Band Combination>

Inter-Band Combination																						
PCC		SCC	PCC		SCC	PCC		SCC	PCC		SCC	PCC		SCC	PCC		SCC	PCC		SCC		
LTE B2	+	LTE B13	LTE B13	+	LTE B2	LTE B2	+	LTE 17	LTE B17	+	LTE B2	LTE B2	+	LTE B5	LTE B5	+	LTE B2	LTE B2	+	LTE B29		
BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)		
10	+	10	10	+	10	10	+	10	10	+	10	20	+	10	10	+	20	10	+	10		
10	+	5	10	+	5	10	+	5	10	+	5	20	+	5	10	+	15	10	+	5		
5	+	10	5	+	10	5	+	10	5	+	10	15	+	10	10	+	10	10	+	3		
						5	+	5	5	+	5	15	+	5	10	+	5	5	+	10		
												10	+	10	5	+	20	5	+	5		
												10	+	5	5	+	15	5	+	3		
												5	+	10	5	+	10					
												5	+	5	5	+	5					

Inter-Band Combination																							
PCC		SCC		PCC		SCC		PCC		SCC		PCC		SCC		PCC		SCC		PCC		SCC	
LTE B4	+	LTE B13	LTE B13	+	LTE B4	LTE B4	+	LTE 17	LTE B17	+	LTE B4	LTE B4	+	LTE B5	LTE B5	+	LTE B4	LTE B4	+	LTE B29			
BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)			
10	+	10	10	+	10	10	+	10	10	+	10	10	+	10	10	+	10	10	+	10			
10	+	5	10	+	5	10	+	5	10	+	5	10	+	5	10	+	5	10	+	5			
5	+	10	5	+	10	5	+	10	5	+	10	5	+	10	5	+	10	10	+	3			
						5	+	5	5	+	5	5	+	5	5	+	5	5	+	10			
																			5	+	5		
																			5	+	3		

<Intra-Band Combination>

Intra-Band Combination																	
Contiguous									Non-Contiguous								
PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC
LTE B7	+	LTE B7	LTE B38	+	LTE B38	LTE B41	+	LTE 41	LTE B7	+	LTE B7	LTE B4	+	LTE B4	LTE B41	+	LTE 41
BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)	BW (MHz)	+	BW (MHz)
20	+	20	20	+	20	20	+	20	20	+	20	20	+	20	20	+	20
15	+	15	15	+	15	20	+	15	15	+	20	20	+	15	20	+	15
						20	+	10	15	+	15	20	+	10	20	+	10
						15	+	20	10	+	15	20	+	5	15	+	20
						15	+	15	10	+	10	15	+	20	15	+	15
						15	+	10	5	+	15	15	+	15	15	+	10
						10	+	20	20	+	15	15	+	10	10	+	20
						10	+	15	15	+	10	15	+	5	10	+	15
						10	+	10	15	+	5	10	+	20	10	+	10
												10	+	15			
												10	+	10			
												10	+	5			
												5	+	20			
												5	+	15			
												5	+	10			
												5	+	5			

LTE Carrier Aggregation Power Verification
General Note:

- i. According to KDB941225 D05A v01, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device only supports downlink carrier aggregation. Uplink carrier aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power across all bandwidths, channels and RB configuration for each band.
- iv. During the carrier aggregation conducted power measurements we have attention to throughput traffic to make sure all the power measurement is corrected.

Configure	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
Inter-Band	Band 2	10M	1855	18650	1	0	Band 13	10M	782	23230	22.63	22.76
	Band 2	10M	1880	18900	1	0	Band 13	10M	782	23230	22.63	22.76
	Band 2	10M	1905	19150	1	0	Band 13	10M	782	23230	22.60	22.75
	Band 13	10M	782	23230	1	0	Band 2	10M	1880	18900	23.46	23.55
	Band 13	10M	782	23230	1	0	Band 2	10M	1880	18900	23.46	23.55
	Band 13	10M	782	23230	1	0	Band 2	10M	1880	18900	23.46	23.55
	Band 2	10M	1855	18650	1	0	Band 17	10M	710	23790	22.63	22.76
	Band 2	10M	1880	18900	1	0	Band 17	10M	710	23790	22.63	22.76
	Band 2	10M	1905	19150	1	0	Band 17	10M	710	23790	22.60	22.75
	Band 17	10M	709	23780	1	0	Band 2	10M	1880	18900	22.56	22.69
	Band 17	10M	710	23790	1	0	Band 2	10M	1880	18900	22.63	22.77
	Band 17	10M	711	23800	1	0	Band 2	10M	1880	18900	22.50	22.63
	Band 2	20M	1860	18700	1	0	Band 5	10M	836.5	20525	23.12	23.18
	Band 2	20M	1880	18900	1	0	Band 5	10M	836.5	20525	23.10	23.16
	Band 2	20M	1900	19100	1	0	Band 5	10M	836.5	20525	22.86	22.97
	Band 5	10M	829	20450	1	0	Band 2	20M	1880	18900	23.35	23.44
	Band 5	10M	836.5	20525	1	0	Band 2	20M	1880	18900	23.66	23.70
	Band 5	10M	844	20600	1	0	Band 2	20M	1880	18900	23.28	23.36
	Band 4	10M	1715	20000	1	0	Band 13	10M	782	23230	23.36	23.43
	Band 4	10M	1732.5	20175	1	0	Band 13	10M	782	23230	23.41	23.51
	Band 4	10M	1750	20350	1	0	Band 13	10M	782	23230	23.42	23.47
	Band 13	10M	782	23230	1	0	Band 4	10M	1732.5	20175	23.46	23.55
	Band 13	10M	782	23230	1	0	Band 4	10M	1732.5	20175	23.46	23.55
	Band 13	10M	782	23230	1	0	Band 4	10M	1732.5	20175	23.46	23.55
	Band 4	10M	1715	20000	1	0	Band 17	10M	710	23790	23.36	23.43
	Band 4	10M	1732.5	20175	1	0	Band 17	10M	710	23790	23.41	23.51
	Band 4	10M	1750	20350	1	0	Band 17	10M	710	23790	23.42	23.47
	Band 17	10M	709	23780	1	0	Band 4	10M	1732.5	20175	22.56	22.69
	Band 17	10M	710	23790	1	0	Band 4	10M	1732.5	20175	22.63	22.77
	Band 17	10M	711	23800	1	0	Band 4	10M	1732.5	20175	22.50	22.63
	Band 4	10M	1715	20000	1	0	Band 5	10M	836.5	20525	23.36	23.43
	Band 4	10M	1732.5	20175	1	0	Band 5	10M	836.5	20525	23.41	23.51
	Band 4	10M	1750	20350	1	0	Band 5	10M	836.5	20525	23.42	23.47
	Band 5	10M	829	20450	1	0	Band 4	10M	1732.5	20175	23.35	23.44
	Band 5	10M	836.5	20525	1	0	Band 4	10M	1732.5	20175	23.66	23.70
	Band 5	10M	844	20600	1	0	Band 4	10M	1732.5	20175	23.28	23.36



Configure		PCC						SCC				Power	
		LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
Intra-Band	Contiguous	Band 7	20M	2510	20850	1	0	Band 7	20M	2529.8	21048	22.01	22.10
		Band 7	20M	2529.8	21048	1	0	Band 7	20M	2510	20850	21.95	22.06
		Band 7	20M	2525.1	21001	1	0	Band 7	20M	2544.9	21199	21.93	22.04
		Band 7	20M	2544.9	21199	1	0	Band 7	20M	2525.1	21001	22.00	22.08
		Band 7	20M	2540.2	21152	1	0	Band 7	20M	2560	21350	21.90	22.03
		Band 7	20M	2560	21350	1	0	Band 7	20M	2540.2	21152	21.91	22.05
		Band 38	20M	2577.5	37850	1	0	Band 38	20M	2599.8	38048	22.76	22.85
		Band 38	20M	2599.8	38048	1	0	Band 38	20M	2577.5	37850	22.72	22.80
		Band 38	20M	2590.2	37952	1	0	Band 38	20M	2610	38150	22.80	22.88
		Band 38	20M	2610	38150	1	0	Band 38	20M	2590.2	37952	22.51	22.65
		Band 41	20M	2506	39750	1	0	Band 41	20M	2525.8	39948	22.26	22.34
		Band 41	20M	2525.8	39948	1	0	Band 41	20M	2506	39750	22.10	22.21
		Band 41	20M	2583.1	40521	1	0	Band 41	20M	2602.9	40719	22.30	22.36
		Band 41	20M	2602.9	40719	1	0	Band 41	20M	2583.1	40521	22.32	22.40
		Band 41	20M	2660.2	41292	1	0	Band 41	20M	2682.2	41490	22.16	22.23
		Band 41	20M	2682.2	41490	1	0	Band 41	20M	2660.2	41292	21.93	22.00
	Non-Contiguous	Band 4	20M	1720	20050	1	0	Band 4	20M	1745	20300	23.21	23.36
		Band 4	20M	1745	20300	1	0	Band 4	20M	1720	20050	23.43	23.58
		Band 7	20M	2510	20850	1	0	Band 7	20M	2560	21350	22.01	22.10
		Band 7	20M	2535	21100	1	0	Band 7	20M	2560	21350	21.93	22.04
		Band 7	20M	2560	21350	1	0	Band 7	20M	2510	20850	21.95	22.05
		Band 7	20M	2560	21350	1	0	Band 7	20M	2535	21100	21.95	22.05
		Band 41	20M	2506	39750	1	0	Band 41	20M	2680	41490	22.26	22.34
		Band 41	20M	2680	41490	1	0	Band 41	20M	2506	39750	21.93	22.00

<WLAN Conducted Power>**General Note:**

1. Per KDB 248227 D01v02r01, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b	CH 1	2412	1Mbps	15.88	17.00	98.85
		CH 6	2437		15.76	17.00	
		CH 11	2462		15.67	17.00	
	802.11g	CH 1	2412	6Mbps	12.97	14.00	95.58
		CH 6	2437		12.90	14.00	
		CH 11	2462		12.82	14.00	
	802.11n-HT20	CH 1	2412	MCS0	9.85	10.50	94.03
		CH 6	2437		9.81	10.50	
		CH 11	2462		9.72	10.50	
	802.11n-HT40	CH 3	2422	MCS0	9.69	10.50	90.18
		CH 6	2437		9.71	10.50	
		CH 9	2452		9.97	10.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a	CH 36	5180	6Mbps	10.74	12.50	95.22
		CH 40	5200		10.72	12.50	
		CH 44	5220		10.78	12.50	
		CH 48	5240		10.76	12.50	
	802.11n-HT20	CH 36	5180	MCS0	10.62	11.00	94.50
		CH 40	5200		10.64	11.00	
		CH 44	5220		10.52	11.00	
		CH 48	5240		10.55	11.00	
	802.11n-HT40	CH 38	5190	MCS0	10.71	11.00	90.17
		CH 46	5230		10.77	11.00	
	802.11ac-VHT20	CH 36	5180	MCS0	7.96	8.00	95.41
		CH 40	5200		7.84	8.00	
		CH 44	5220		7.89	8.00	
		CH 48	5240		7.85	8.00	
	802.11ac-VHT40	CH 38	5190	MCS0	7.60	8.00	90.14
		CH 46	5230		7.73	8.00	
	802.11ac-VHT80	CH 42	5210	MCS0	7.93	8.00	82.81

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a	CH 52	5260	6Mbps	10.72	12.50	95.22
		CH 56	5280		10.73	12.50	
		CH 60	5300		10.74	12.50	
		CH 64	5320		10.81	12.50	
	802.11n-HT20	CH 52	5260	MCS0	10.50	11.00	94.50
		CH 56	5280		10.59	11.00	
		CH 60	5300		10.52	11.00	
		CH 64	5320		10.67	11.00	
	802.11n-HT40	CH 54	5270	MCS0	10.70	11.00	90.17
		CH 62	5310		10.77	11.00	
	802.11ac-VHT20	CH 52	5260	MCS0	7.93	8.00	95.41
		CH 56	5280		7.91	8.00	
		CH 60	5300		7.87	8.00	
		CH 64	5320		7.98	8.00	
	802.11ac-VHT40	CH 54	5270	MCS0	7.62	8.00	90.14
		CH 62	5310		7.75	8.00	
	802.11ac-VHT80	CH 58	5290	MCS0	7.87	8.00	82.81

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a	CH 100	5500	6Mbps	10.59	12.50	95.22
		CH 116	5580		10.55	12.50	
		CH 124	5620		10.60	12.50	
		CH 132	5660		10.69	12.50	
		CH 144	5720		10.90	12.50	
	802.11n-HT20	CH 100	5500	MCS0	10.97	11.00	94.50
		CH 116	5580		10.87	11.00	
		CH 124	5620		10.84	11.00	
		CH 132	5660		10.79	11.00	
		CH 144	5720		10.78	11.00	
	802.11n-HT40	CH 102	5510	MCS0	10.98	11.00	90.17
		CH 110	5550		10.90	11.00	
		CH 126	5630		10.88	11.00	
		CH 134	5670		10.86	11.00	
		CH 142	5710		10.75	11.00	
	802.11ac-VHT20	CH 100	5500	MCS0	7.82	8.00	95.41
		CH 116	5580		7.76	8.00	
		CH 124	5620		7.71	8.00	
		CH 132	5660		7.80	8.00	
		CH 144	5720		7.70	8.00	
	802.11ac-VHT40	CH 102	5510	MCS0	7.94	8.00	90.14
		CH 110	5550		7.86	8.00	
		CH 126	5630		7.79	8.00	
		CH 134	5670		7.70	8.00	
	802.11ac-VHT80	CH 106	5530	MCS0	7.92	8.00	82.81
		CH 122	5610		7.98	8.00	
		CH 138	5690		7.87	8.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a	CH 149	5745	MCS0	10.93	12.50	95.22
		CH 157	5785		10.60	12.50	
		CH 165	5825		10.85	12.50	
	802.11n-HT20	CH 149	5745	MCS0	10.71	11.00	94.50
		CH 157	5785		10.57	11.00	
		CH 165	5825		10.65	11.00	
	802.11n-HT40	CH 151	5755	MCS0	10.77	11.00	90.17
		CH 159	5795		10.58	11.00	
	802.11ac-VHT20	CH 149	5745	MCS0	8.00	8.00	95.41
		CH 157	5785		7.72	8.00	
		CH 165	5825		7.91	8.00	
	802.11ac-VHT40	CH 151	5755	MCS0	7.96	8.00	90.14
		CH 159	5795		7.94	8.00	
	802.11ac-VHT80	CH 155	5775	MCS0	7.68	8.00	82.81

13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.1+LE
2.4GHz Bluetooth	9.5	2.0

Note:

- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:


$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Exposure Position	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9.5	Body-worn	15mm	2.48	0.94

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.94 which is ≤ 3, SAR testing is not required.

14. Antenna Location

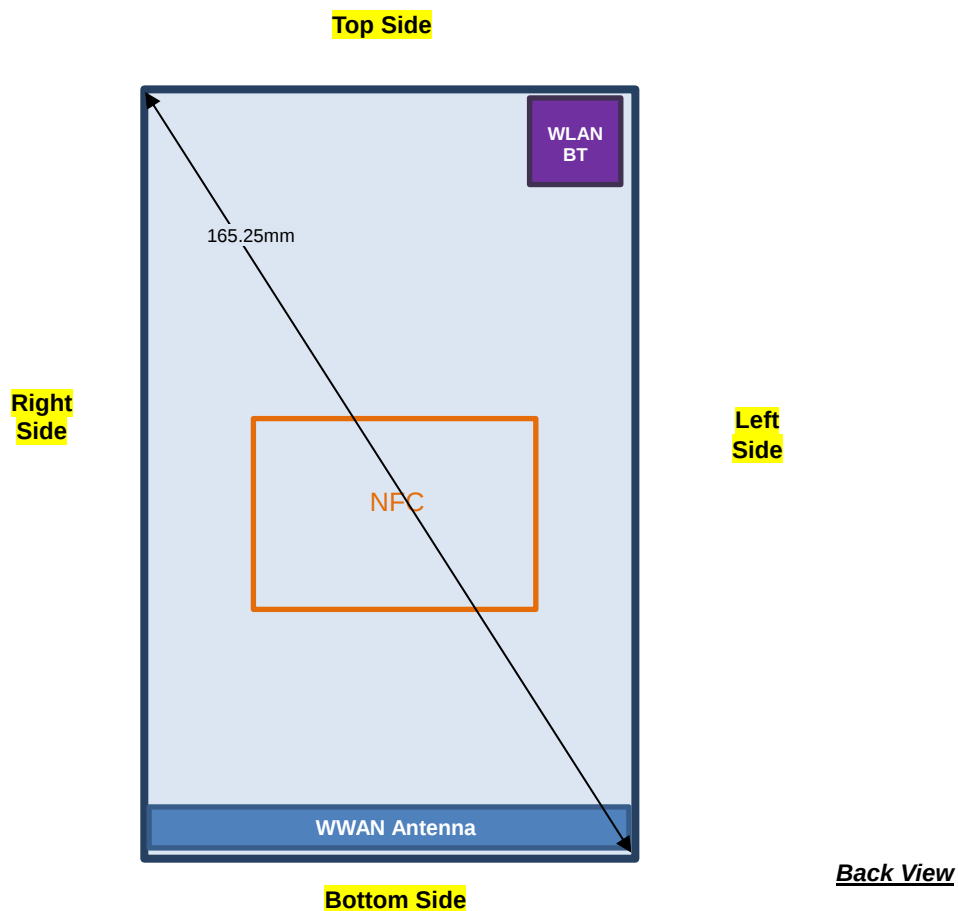

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	145mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	140mm	47.mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
4. Per KDB648474 D04v01r02, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

GSM Note:

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GSM1900.
3. Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GSM1900.
4. Since the EDGE1900 (4Tx slots) maximum source-based time average power is high then GPRS mode, therefore the EDGE1900 (4Tx slots) will verify worse case found in GPRS mode.

UMTS Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
6. LTE band 2 / 38 SAR test was covered by Band 25 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN Note:

1. Per KDB 248227 D01v02r01, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r01, for U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

**15.1 Head SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	27.27	27.50	1.054	-0.111	0.130	0.137
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	27.27	27.50	1.054	-0.019	0.091	0.096
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	27.27	27.50	1.054	0.095	0.152	0.160
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	189	836.4	27.24	27.50	1.062	0.171	0.186	0.197
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	251	848.8	27.13	27.50	1.089	0.185	0.258	0.281
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	27.27	27.50	1.054	0.16	0.080	0.084
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	24.11	24.50	1.094	0.092	0.231	0.253
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	24.11	24.50	1.094	-0.001	0.066	0.072
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	24.11	24.50	1.094	0.051	0.232	0.254
	GSM1900	EDGE (4 Tx slots)	Left Cheek	0mm	661	1880	24.45	26.00	1.429	0.039	0.270	0.386
02	GSM1900	EDGE (4 Tx slots)	Left Cheek	0mm	512	1850.2	24.39	26.00	1.449	0.073	0.284	0.411
	GSM1900	EDGE (4 Tx slots)	Left Cheek	0mm	810	1909.8	24.50	26.00	1.413	0.015	0.257	0.363
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	24.11	24.50	1.094	0.141	0.099	0.108

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	23.10	24.00	1.230	0.004	0.215	0.265
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	23.10	24.00	1.230	0.005	0.146	0.180
03	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	23.10	24.00	1.230	0.159	0.224	0.276
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	22.91	24.00	1.285	0.1	0.193	0.248
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4182	836.4	23.07	24.00	1.239	0.17	0.207	0.256
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	23.10	24.00	1.230	0.116	0.128	0.157
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1513	1752.6	23.42	24.00	1.143	0.088	0.432	0.494
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1312	1712.4	23.09	24.00	1.233	0.045	0.311	0.383
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	23.24	24.00	1.191	0.033	0.390	0.465
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1513	1752.6	23.42	24.00	1.143	0.02	0.148	0.169
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1513	1752.6	23.42	24.00	1.143	0.044	0.359	0.410
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1513	1752.6	23.42	24.00	1.143	0.093	0.251	0.287
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	23.48	23.50	1.005	0.079	0.418	0.420
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	23.48	23.50	1.005	0.039	0.147	0.148
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	23.48	23.50	1.005	0.008	0.437	0.439
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	23.24	23.50	1.062	0.056	0.404	0.429
05	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	23.47	23.50	1.007	0.141	0.438	0.441
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	23.48	23.50	1.005	0.074	0.215	0.216



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 17	10M	QPSK	1RB	0Offset	Right Cheek	0mm	23790	710	22.77	24.00	1.327	0.082	0.176	0.234
	LTE Band 17	10M	QPSK	25RB	0Offset	Right Cheek	0mm	23780	709	21.82	23.00	1.312	0.058	0.145	0.190
	LTE Band 17	10M	QPSK	1RB	0Offset	Right Tilted	0mm	23790	710	22.77	24.00	1.327	0.086	0.088	0.117
	LTE Band 17	10M	QPSK	25RB	0Offset	Right Tilted	0mm	23780	709	21.82	23.00	1.312	0.008	0.071	0.093
	LTE Band 17	10M	QPSK	1RB	0Offset	Left Cheek	0mm	23790	710	22.77	24.00	1.327	0.103	0.136	0.181
	LTE Band 17	10M	QPSK	25RB	0Offset	Left Cheek	0mm	23780	709	21.82	23.00	1.312	0.164	0.110	0.144
	LTE Band 17	10M	QPSK	1RB	0Offset	Left Tilted	0mm	23790	710	22.77	24.00	1.327	0.135	0.079	0.105
	LTE Band 17	10M	QPSK	25RB	0Offset	Left Tilted	0mm	23780	709	21.82	23.00	1.312	0.021	0.063	0.083
07	LTE Band 13	10M	QPSK	1RB	0Offset	Right Cheek	0mm	23230	782	23.55	24.00	1.109	0.044	0.187	0.207
	LTE Band 13	10M	QPSK	25RB	0Offset	Right Cheek	0mm	23230	782	22.38	23.00	1.153	0.029	0.150	0.173
	LTE Band 13	10M	QPSK	1RB	0Offset	Right Tilted	0mm	23230	782	23.55	24.00	1.109	-0.011	0.128	0.142
	LTE Band 13	10M	QPSK	25RB	0Offset	Right Tilted	0mm	23230	782	22.38	23.00	1.153	0.056	0.108	0.125
	LTE Band 13	10M	QPSK	1RB	0Offset	Left Cheek	0mm	23230	782	23.55	24.00	1.109	0.008	0.164	0.182
	LTE Band 13	10M	QPSK	25RB	0Offset	Left Cheek	0mm	23230	782	22.38	23.00	1.153	0.006	0.134	0.155
	LTE Band 13	10M	QPSK	1RB	0Offset	Left Tilted	0mm	23230	782	23.55	24.00	1.109	0.075	0.119	0.132
	LTE Band 13	10M	QPSK	25RB	0Offset	Left Tilted	0mm	23230	782	22.38	23.00	1.153	0.06	0.098	0.113
	LTE Band 5	10M	QPSK	1RB	0Offset	Right Cheek	0mm	20525	836.5	23.70	24.00	1.072	-0.043	0.173	0.185
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Cheek	0mm	20525	836.5	22.42	23.00	1.143	0.18	0.132	0.151
	LTE Band 5	10M	QPSK	1RB	0Offset	Right Tilted	0mm	20525	836.5	23.70	24.00	1.072	-0.076	0.126	0.135
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Tilted	0mm	20525	836.5	22.42	23.00	1.143	0.01	0.097	0.111
	LTE Band 5	10M	QPSK	1RB	0Offset	Left Cheek	0mm	20525	836.5	23.70	24.00	1.072	0.176	0.184	0.197
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Cheek	0mm	20525	836.5	22.42	23.00	1.143	0.123	0.141	0.161
	LTE Band 5	10M	QPSK	1RB	0Offset	Left Cheek	0mm	20450	829	23.44	24.00	1.138	0.137	0.169	0.192
08	LTE Band 5	10M	QPSK	1RB	0Offset	Left Cheek	0mm	20600	844	23.36	24.00	1.159	0.167	0.195	0.226
	LTE Band 5	10M	QPSK	1RB	0Offset	Left Tilted	0mm	20525	836.5	23.70	24.00	1.072	0.197	0.107	0.115
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Tilted	0mm	20525	836.5	22.42	23.00	1.143	0.173	0.082	0.094
	LTE Band 4	20M	QPSK	1RB	0Offset	Right Cheek	0mm	20300	1745	23.58	24.00	1.102	-0.021	0.409	0.451
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Cheek	0mm	20300	1745	22.53	23.00	1.114	0.005	0.295	0.329
	LTE Band 4	20M	QPSK	1RB	0Offset	Right Tilted	0mm	20300	1745	23.58	24.00	1.102	0.024	0.138	0.152
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Tilted	0mm	20300	1745	22.53	23.00	1.114	0.004	0.101	0.113
09	LTE Band 4	20M	QPSK	1RB	0Offset	Left Cheek	0mm	20300	1745	23.58	24.00	1.102	0.088	0.431	0.475
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Cheek	0mm	20050	1720	23.36	24.00	1.159	0.135	0.377	0.437
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Cheek	0mm	20175	1732.5	23.46	24.00	1.132	0.153	0.398	0.451
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Cheek	0mm	20300	1745	22.53	23.00	1.114	0.174	0.311	0.347
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Tilted	0mm	20300	1745	23.58	24.00	1.102	0.109	0.227	0.250
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Tilted	0mm	20300	1745	22.53	23.00	1.114	0.012	0.167	0.186
	LTE Band 25	20M	QPSK	1RB	0Offset	Right Cheek	0mm	26340	1880	23.45	24.00	1.135	-0.02	0.356	0.404
	LTE Band 25	20M	QPSK	50RB	0Offset	Right Cheek	0mm	26140	1860	22.80	23.00	1.047	0.04	0.258	0.270
	LTE Band 25	20M	QPSK	1RB	0Offset	Right Tilted	0mm	26340	1880	23.45	24.00	1.135	0.02	0.126	0.143
	LTE Band 25	20M	QPSK	50RB	0Offset	Right Tilted	0mm	26140	1860	22.80	23.00	1.047	0.05	0.095	0.099
10	LTE Band 25	20M	QPSK	1RB	0Offset	Left Cheek	0mm	26340	1880	23.45	24.00	1.135	0.03	0.674	0.765
	LTE Band 25	20M	QPSK	1RB	0Offset	Left Cheek	0mm	26140	1860	23.39	24.00	1.151	0.05	0.649	0.747
	LTE Band 25	20M	QPSK	1RB	0Offset	Left Cheek	0mm	26590	1905	23.25	24.00	1.189	0.01	0.643	0.764
	LTE Band 25	20M	QPSK	50RB	0Offset	Left Cheek	0mm	26140	1860	22.80	23.00	1.047	0.02	0.479	0.502
	LTE Band 25	20M	QPSK	1RB	0Offset	Left Tilted	0mm	26340	1880	23.45	24.00	1.135	-0.08	0.233	0.264
	LTE Band 25	20M	QPSK	50RB	0Offset	Left Tilted	0mm	26140	1860	22.80	23.00	1.047	-0.01	0.197	0.206

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1RB	0offset	Right Cheek	0mm	20850	2510	22.10	23.50	1.380	-0.02	0.135	0.186
	LTE Band 7	20M	QPSK	50RB	0offset	Right Cheek	0mm	21350	2560	20.55	22.50	1.567	-0.02	0.003	0.005
	LTE Band 7	20M	QPSK	1RB	0offset	Right Tilted	0mm	20850	2510	22.10	23.50	1.380	-0.03	0.099	0.137
	LTE Band 7	20M	QPSK	50RB	0offset	Right Tilted	0mm	21350	2560	20.55	22.50	1.567	-0.08	0.063	0.099
	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	0mm	20850	2510	22.10	23.50	1.380	-0.07	0.298	0.411
11	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	0mm	21100	2535	22.04	23.50	1.400	-0.03	0.332	0.465
	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	0mm	21350	2560	22.05	23.50	1.396	0	0.220	0.307
	LTE Band 7	20M	QPSK	50RB	0offset	Left Cheek	0mm	21350	2560	20.55	22.50	1.567	0.19	0.160	0.251
	LTE Band 7	20M	QPSK	1RB	0offset	Left Tilted	0mm	20850	2510	22.10	23.50	1.380	-0.12	0.119	0.164
	LTE Band 7	20M	QPSK	50RB	0offset	Left Tilted	0mm	21350	2560	20.55	22.50	1.567	-0.01	0.089	0.139

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1RB	0Offset	Right Cheek	0mm	40620	2593	22.38	24.00	1.452	62.9	1.006	0.04	0.080	0.117
	LTE Band 41	20M	QPSK	50RB	24Offset	Right Cheek	0mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0	0.067	0.093
	LTE Band 41	20M	QPSK	1RB	0Offset	Right Tilted	0mm	40620	2593	22.38	24.00	1.452	62.9	1.006	0.07	0.083	0.121
	LTE Band 41	20M	QPSK	50RB	24Offset	Right Tilted	0mm	39750	2506	21.59	23.00	1.384	62.9	1.006	-0.03	0.071	0.099
	LTE Band 41	20M	QPSK	1RB	0Offset	Left Cheek	0mm	40620	2593	22.38	24.00	1.452	62.9	1.006	0.07	0.184	0.269
	LTE Band 41	20M	QPSK	1RB	0Offset	Left Cheek	0mm	39750	2506	22.34	24.00	1.466	62.9	1.006	-0.02	0.182	0.268
	LTE Band 41	20M	QPSK	1RB	49Offset	Left Cheek	0mm	40185	2549.5	22.10	24.00	1.549	62.9	1.006	-0.05	0.190	0.296
12	LTE Band 41	20M	QPSK	1RB	0Offset	Left Cheek	0mm	41055	2636.5	22.23	24.00	1.503	62.9	1.006	-0.08	0.198	0.299
	LTE Band 41	20M	QPSK	1RB	49Offset	Left Cheek	0mm	41490	2680	22.01	24.00	1.581	62.9	1.006	-0.14	0.121	0.192
	LTE Band 41	20M	QPSK	50RB	24Offset	Left Cheek	0mm	39750	2506	21.59	23.00	1.384	62.9	1.006	-0.01	0.159	0.221
	LTE Band 41	20M	QPSK	1RB	0Offset	Left Tilted	0mm	40620	2593	22.38	24.00	1.452	62.9	1.006	0.03	0.037	0.054
	LTE Band 41	20M	QPSK	50RB	24Offset	Left Tilted	0mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0.14	0.032	0.045

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.076	0.196	0.257
13	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	6	2437	15.76	17.00	1.330	98.85	1.012	0.107	0.228	0.307
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	11	2462	15.67	17.00	1.358	98.85	1.012	0.084	0.185	0.254
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.093	0.196	0.257
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.166	0.127	0.166
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.171	0.136	0.178
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	64	5320	10.81	12.50	1.476	95.22	1.050	-0.012	0.030	0.046
14	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	64	5320	10.81	12.50	1.476	95.22	1.050	-0.063	0.040	0.062
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	56	5280	10.73	12.50	1.503	95.22	1.050	0.079	0.032	0.051
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	64	5320	10.81	12.50	1.476	95.22	1.050	0.044	0.020	0.031
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	64	5320	10.81	12.50	1.476	95.22	1.050	0.077	0.035	0.054
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	144	5720	10.90	12.50	1.445	95.22	1.050	0.052	0.146	0.222
15	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	144	5720	10.90	12.50	1.445	95.22	1.050	-0.011	0.187	0.284
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	100	5500	10.59	12.50	1.552	95.22	1.050	0.173	0.064	0.104
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	116	5580	10.55	12.50	1.567	95.22	1.050	-0.065	0.100	0.165
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	124	5620	10.60	12.50	1.549	95.22	1.050	0.08	0.122	0.198
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	132	5660	10.69	12.50	1.517	95.22	1.050	0.096	0.115	0.183
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	144	5720	10.90	12.50	1.445	95.22	1.050	0.083	0.042	0.064
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	144	5720	10.90	12.50	1.445	95.22	1.050	0.028	0.049	0.074
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	149	5745	10.93	12.50	1.435	95.22	1.050	0.062	0.074	0.112
16	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	149	5745	10.93	12.50	1.435	95.22	1.050	0.018	0.113	0.170
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	157	5785	10.60	12.50	1.549	95.22	1.050	-0.146	0.100	0.163
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	165	5825	10.85	12.50	1.462	95.22	1.050	-0.1	0.105	0.161
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	149	5745	10.93	12.50	1.435	95.22	1.050	0.139	0.045	0.068
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	149	5745	10.93	12.50	1.435	95.22	1.050	0.062	0.017	0.026

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	27.27	27.50	1.054	-0.06	0.222	0.234
	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	27.27	27.50	1.054	-0.1	0.235	0.248
	GSM850	GPRS (4 Tx slots)	Back	10mm	189	836.4	27.24	27.50	1.062	-0.1	0.239	0.254
17	GSM850	GPRS (4 Tx slots)	Back	10mm	251	848.8	27.13	27.50	1.089	-0.09	0.328	0.357
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	27.27	27.50	1.054	-0.01	0.221	0.233
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	27.27	27.50	1.054	-0.02	0.126	0.133
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	128	824.2	27.27	27.50	1.054	-0.02	0.122	0.129
	GSM1900	GPRS (4 Tx slots)	Front	10mm	512	1850.2	24.10	24.50	1.096	-0.15	0.380	0.417
	GSM1900	GPRS (4 Tx slots)	Back	10mm	512	1850.2	24.10	24.50	1.096	-0.16	0.398	0.436
18	GSM1900	EDGE (4 Tx slots)	Back	10mm	810	1909.8	24.50	26.00	1.413	-0.02	0.432	0.610
	GSM1900	EDGE (4 Tx slots)	Back	10mm	512	1850.2	24.39	26.00	1.449	-0.08	0.406	0.588
	GSM1900	EDGE (4 Tx slots)	Back	10mm	661	1880	24.45	26.00	1.429	-0.14	0.424	0.606
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	512	1850.2	24.10	24.50	1.096	-0.08	0.304	0.333
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	512	1850.2	24.10	24.50	1.096	-0.03	0.125	0.137
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	512	1850.2	24.10	24.50	1.096	-0.09	0.264	0.289

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	23.10	24.00	1.230	-0.04	0.300	0.369
19	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	23.10	24.00	1.230	-0.05	0.326	0.401
	WCDMA V	RMC 12.2Kbps	Back	10mm	4132	826.4	22.91	24.00	1.285	-0.04	0.282	0.362
	WCDMA V	RMC 12.2Kbps	Back	10mm	4182	836.4	23.07	24.00	1.239	-0.04	0.306	0.379
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4233	846.6	23.10	24.00	1.230	-0.02	0.306	0.376
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4233	846.6	23.10	24.00	1.230	-0.01	0.171	0.210
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4233	846.6	23.10	24.00	1.230	-0.06	0.138	0.170
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1513	1752.6	23.42	24.00	1.143	-0.01	0.552	0.631
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1312	1712.4	23.09	24.00	1.233	-0.04	0.504	0.621
20	WCDMA IV	RMC 12.2Kbps	Front	10mm	1413	1732.6	23.24	24.00	1.191	-0.03	0.544	0.648
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1513	1752.6	23.42	24.00	1.143	-0.07	0.498	0.569
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	1513	1752.6	23.42	24.00	1.143	-0.05	0.527	0.602
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	1513	1752.6	23.42	24.00	1.143	-0.03	0.264	0.302
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1513	1752.6	23.42	24.00	1.143	-0.06	0.370	0.423
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	23.48	23.50	1.005	-0.06	0.627	0.630
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	23.48	23.50	1.005	-0.1	0.754	0.757
	WCDMA II	RMC 12.2Kbps	Back	10mm	9262	1852.4	23.24	23.50	1.062	-0.08	0.683	0.725
21	WCDMA II	RMC 12.2Kbps	Back	10mm	9538	1907.6	23.47	23.50	1.007	-0.1	0.798	0.804
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9400	1880	23.48	23.50	1.005	-0.1	0.542	0.545
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	9400	1880	23.48	23.50	1.005	-0.09	0.265	0.266
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	23.48	23.50	1.005	0.01	0.434	0.436



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
22	LTE Band 17	10M	QPSK	1RB	0Offset	Front	10mm	23790	710	22.77	24.00	1.327	-0.05	0.231	0.307
	LTE Band 17	10M	QPSK	25RB	0Offset	Front	10mm	23780	709	21.82	23.00	1.312	-0.09	0.194	0.255
	LTE Band 17	10M	QPSK	1RB	0Offset	Back	10mm	23790	710	22.77	24.00	1.327	-0.03	0.226	0.300
	LTE Band 17	10M	QPSK	25RB	0Offset	Back	10mm	23780	709	21.82	23.00	1.312	0.03	0.190	0.249
	LTE Band 17	10M	QPSK	1RB	0Offset	Left Side	10mm	23790	710	22.77	24.00	1.327	0.08	0.153	0.203
	LTE Band 17	10M	QPSK	25RB	0Offset	Left Side	10mm	23780	709	21.82	23.00	1.312	0.1	0.130	0.171
	LTE Band 17	10M	QPSK	1RB	0Offset	Right Side	10mm	23790	710	22.77	24.00	1.327	0.17	0.147	0.195
	LTE Band 17	10M	QPSK	25RB	0Offset	Right Side	10mm	23780	709	21.82	23.00	1.312	0.14	0.115	0.151
	LTE Band 17	10M	QPSK	1RB	0Offset	Bottom Side	10mm	23790	710	22.77	24.00	1.327	0.14	0.091	0.121
	LTE Band 17	10M	QPSK	25RB	0Offset	Bottom Side	10mm	23780	709	21.82	23.00	1.312	0.03	0.071	0.093
	LTE Band 13	10M	QPSK	1RB	0Offset	Front	10mm	23230	782	23.55	24.00	1.109	-0.06	0.166	0.184
	LTE Band 13	10M	QPSK	25RB	0Offset	Front	10mm	23230	782	22.38	23.00	1.153	-0.06	0.163	0.188
	LTE Band 13	10M	QPSK	1RB	0Offset	Back	10mm	23230	782	23.55	24.00	1.109	-0.08	0.173	0.192
	LTE Band 13	10M	QPSK	25RB	0Offset	Back	10mm	23230	782	22.38	23.00	1.153	-0.04	0.169	0.195
	LTE Band 13	10M	QPSK	1RB	0Offset	Left Side	10mm	23230	782	23.55	24.00	1.109	0.1	0.181	0.201
	LTE Band 13	10M	QPSK	25RB	0Offset	Left Side	10mm	23230	782	22.38	23.00	1.153	0.08	0.180	0.208
23	LTE Band 13	10M	QPSK	1RB	0Offset	Right Side	10mm	23230	782	23.55	24.00	1.109	0.1	0.190	0.211
	LTE Band 13	10M	QPSK	1RB	0Offset	Right Side	10mm	23230	782	22.38	23.00	1.153	0.06	0.174	0.201
	LTE Band 13	10M	QPSK	1RB	0Offset	Bottom Side	10mm	23230	782	23.55	24.00	1.109	0.09	0.090	0.100
	LTE Band 13	10M	QPSK	25RB	0Offset	Bottom Side	10mm	23230	782	22.38	23.00	1.153	0.03	0.059	0.068
	LTE Band 5	10M	QPSK	1RB	0Offset	Front	10mm	20525	836.5	23.70	24.00	1.072	-0.06	0.229	0.245
	LTE Band 5	10M	QPSK	25RB	0Offset	Front	10mm	20525	836.5	22.42	23.00	1.143	-0.07	0.179	0.205
	LTE Band 5	10M	QPSK	1RB	0Offset	Back	10mm	20525	836.5	23.70	24.00	1.072	-0.06	0.287	0.308
24	LTE Band 5	10M	QPSK	1RB	0Offset	Back	10mm	20450	829	23.44	24.00	1.138	-0.08	0.282	0.321
	LTE Band 5	10M	QPSK	1RB	0Offset	Back	10mm	20600	844	23.36	23.00	0.920	-0.07	0.323	0.297
	LTE Band 5	10M	QPSK	25RB	0Offset	Back	10mm	20525	836.5	22.42	23.00	1.143	-0.04	0.224	0.256
	LTE Band 5	10M	QPSK	1RB	0Offset	Left Side	10mm	20525	836.5	23.70	24.00	1.072	-0.02	0.288	0.309
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Side	10mm	20525	836.5	22.42	23.00	1.143	-0.02	0.217	0.248
	LTE Band 5	10M	QPSK	1RB	0Offset	Right Side	10mm	20525	836.5	23.70	24.00	1.072	-0.02	0.169	0.181
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Side	10mm	20525	836.5	22.42	23.00	1.143	-0.04	0.127	0.145
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Side	10mm	20525	836.5	23.70	24.00	1.072	-0.04	0.156	0.167
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Side	10mm	20525	836.5	22.42	23.00	1.143	-0.03	0.123	0.141
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10mm	20300	1745	23.58	24.00	1.102	-0.07	0.647	0.713
25	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10mm	20050	1720	23.36	24.00	1.159	-0.03	0.638	0.739
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10mm	20175	1732.5	23.46	24.00	1.132	-0.09	0.603	0.683
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10mm	20300	1745	22.53	23.00	1.114	-0.07	0.431	0.480
	LTE Band 4	20M	QPSK	1RB	0Offset	Back	10mm	20300	1745	23.58	24.00	1.102	-0.06	0.500	0.551
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10mm	20300	1745	22.53	23.00	1.114	-0.04	0.367	0.409
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Side	10mm	20300	1745	23.58	24.00	1.102	0.02	0.537	0.592
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Side	10mm	20300	1745	22.53	23.00	1.114	-0.07	0.388	0.432
	LTE Band 4	20M	QPSK	1RB	0Offset	Right Side	10mm	20300	1745	23.58	24.00	1.102	-0.03	0.258	0.284
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Side	10mm	20300	1745	22.53	23.00	1.114	-0.03	0.181	0.202
	LTE Band 4	20M	QPSK	1RB	0Offset	Bottom Side	10mm	20300	1745	23.58	24.00	1.102	0.03	0.413	0.455
	LTE Band 4	20M	QPSK	50RB	0Offset	Bottom Side	10mm	20300	1745	22.53	23.00	1.114	-0.02	0.300	0.334



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1RB	0Offset	Front	10mm	26340	1880	23.45	24.00	1.135	0	0.611	0.693
	LTE Band 25	20M	QPSK	50RB	0Offset	Front	10mm	26140	1860	22.8	23.00	1.047	-0.01	0.458	0.480
	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26340	1880	23.45	24.00	1.135	-0.12	0.802	0.910
	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26140	1860	23.39	24.00	1.151	-0.14	0.809	0.931
26	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26590	1905	23.25	24.00	1.189	-0.14	0.808	0.960
	LTE Band 25	20M	QPSK	50RB	0Offset	Back	10mm	26140	1860	22.8	23.00	1.047	-0.13	0.584	0.612
	LTE Band 25	20M	QPSK	100RB	0Offset	Back	10mm	26340	1880	22.67	23.00	1.079	-0.13	0.582	0.628
	LTE Band 25	20M	QPSK	1RB	0Offset	Left Side	10mm	26340	1880	23.45	24.00	1.135	-0.18	0.568	0.645
	LTE Band 25	20M	QPSK	50RB	0Offset	Left Side	10mm	26140	1860	22.8	23.00	1.047	-0.07	0.436	0.457
	LTE Band 25	20M	QPSK	1RB	0Offset	Right Side	10mm	26340	1880	23.45	24.00	1.135	-0.05	0.284	0.322
	LTE Band 25	20M	QPSK	50RB	0Offset	Right Side	10mm	26140	1860	22.8	23.00	1.047	-0.02	0.223	0.234
	LTE Band 25	20M	QPSK	1RB	0Offset	Bottom Side	10mm	26340	1880	23.45	24.00	1.135	-0.06	0.499	0.566
	LTE Band 25	20M	QPSK	50RB	0Offset	Bottom Side	10mm	26140	1860	22.8	23.00	1.047	-0.14	0.424	0.444
	LTE Band 7	20M	QPSK	1RB	0offset	Front	10mm	20850	2510	22.10	23.50	1.380	-0.13	0.285	0.393
	LTE Band 7	20M	QPSK	50RB	0offset	Front	10mm	21350	2560	20.55	22.50	1.567	-0.17	0.214	0.335
	LTE Band 7	20M	QPSK	1RB	0offset	Back	10mm	20850	2510	22.10	23.50	1.380	-0.03	0.513	0.708
27	LTE Band 7	20M	QPSK	1RB	0offset	Back	10mm	21100	2535	22.04	23.50	1.400	-0.07	0.535	0.749
	LTE Band 7	20M	QPSK	1RB	0offset	Back	10mm	21350	2560	22.05	23.50	1.349	-0.01	0.400	0.540
	LTE Band 7	20M	QPSK	50RB	0offset	Back	10mm	21350	2560	20.55	22.50	1.567	0.04	0.348	0.545
	LTE Band 7	20M	QPSK	1RB	0offset	Left Side	10mm	20850	2510	22.10	23.50	1.300	-0.13	0.217	0.282
	LTE Band 7	20M	QPSK	50RB	0offset	Left Side	10mm	21350	2560	20.55	22.50	1.374	-0.16	0.139	0.191
	LTE Band 7	20M	QPSK	1RB	0offset	Right Side	10mm	20850	2510	22.10	23.50	1.300	-0.08	0.084	0.109
	LTE Band 7	20M	QPSK	50RB	0offset	Right Side	10mm	21350	2560	20.55	22.50	1.374	0.1	0.044	0.060
	LTE Band 7	20M	QPSK	1RB	0offset	Bottom Side	10mm	20850	2510	22.10	23.50	1.300	-0.13	0.214	0.278
	LTE Band 7	20M	QPSK	50RB	0offset	Bottom Side	10mm	21350	2560	20.55	22.50	1.374	-0.08	0.132	0.181

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1RB	0Offset	Front	10mm	40620	2593	22.38	24.00	1.452	62.9	1.006	-0.09	0.292	0.427
	LTE Band 41	20M	QPSK	50RB	24Offset	Front	10mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0.03	0.251	0.349
	LTE Band 41	20M	QPSK	1RB	0Offset	Back	10mm	40620	2593	22.38	24.00	1.452	62.9	1.006	-0.04	0.552	0.806
	LTE Band 41	20M	QPSK	1RB	0Offset	Back	10mm	39750	2506	22.34	24.00	1.466	62.9	1.006	-0.05	0.458	0.675
	LTE Band 41	20M	QPSK	1RB	49Offset	Back	10mm	40185	2549.5	22.10	24.00	1.549	62.9	1.006	-0.04	0.515	0.802
28	LTE Band 41	20M	QPSK	1RB	0Offset	Back	10mm	41055	2636.5	22.23	24.00	1.503	62.9	1.006	-0.07	0.646	0.977
	LTE Band 41	20M	QPSK	1RB	49Offset	Back	10mm	41490	2680	22.01	24.00	1.581	62.9	1.006	0.04	0.350	0.557
	LTE Band 41	20M	QPSK	1RB	0Offset	Left Side	10mm	40620	2593	22.38	24.00	1.452	62.9	1.006	-0.02	0.183	0.267
	LTE Band 41	20M	QPSK	50RB	24Offset	Back	10mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0.01	0.487	0.678
	LTE Band 41	20M	QPSK	50RB	24Offset	Left Side	10mm	39750	2506	21.59	23.00	1.384	62.9	1.006	-0.01	0.158	0.220
	LTE Band 41	20M	QPSK	1RB	0Offset	Right Side	10mm	40620	2593	22.38	24.00	1.452	62.9	1.006	0	0.047	0.069
	LTE Band 41	20M	QPSK	50RB	24Offset	Right Side	10mm	39750	2506	21.59	23.00	1.384	62.9	1.006	-0.11	0.039	0.054
	LTE Band 41	20M	QPSK	1RB	0Offset	Bottom Side	10mm	40620	2593	22.38	24.00	1.452	62.9	1.006	-0.05	0.141	0.206
	LTE Band 41	20M	QPSK	50RB	24Offset	Bottom Side	10mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0.03	0.121	0.168

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.163	0.055	0.072
29	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	15.88	17.00	1.294	98.85	1.012	-0.06	0.198	0.259
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	15.76	17.00	1.330	98.85	1.012	-0.115	0.171	0.230
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	11	2462	15.67	17.00	1.358	98.85	1.012	-0.16	0.132	0.181
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.008	0.044	0.058
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	1	2412	15.88	17.00	1.294	98.85	1.012	-0.051	0.122	0.160

15.3 Body-Worn SAR
<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	27.27	27.50	1.054	-0.06	0.222	0.234
	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	27.27	27.50	1.054	-0.1	0.235	0.248
	GSM850	GPRS (4 Tx slots)	Back	10mm	189	836.4	27.24	27.50	1.062	-0.1	0.239	0.254
30	GSM850	GPRS (4 Tx slots)	Back	10mm	251	848.8	27.13	27.50	1.089	-0.09	0.328	0.357
	GSM850	GPRS (4 Tx slots)	Back	15mm	128	824.2	27.27	27.50	1.054	-0.04	0.150	0.158
	GSM1900	GPRS (4 Tx slots)	Front	10mm	512	1850.2	24.10	24.50	1.096	-0.15	0.380	0.417
	GSM1900	GPRS (4 Tx slots)	Back	10mm	512	1850.2	24.10	24.50	1.096	-0.16	0.398	0.436
31	GSM1900	EDGE (4 Tx slots)	Back	10mm	810	1909.8	24.50	26.00	1.413	-0.02	0.432	0.610
	GSM1900	EDGE (4 Tx slots)	Back	10mm	512	1850.2	24.39	26.00	1.449	-0.08	0.406	0.588
	GSM1900	EDGE (4 Tx slots)	Back	10mm	661	1880	24.45	26.00	1.429	-0.14	0.424	0.606
	GSM1900	GPRS (4 Tx slots)	Back	15mm	512	1850.2	24.10	24.50	1.096	-0.07	0.207	0.227

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	23.10	24.00	1.230	-0.04	0.300	0.369
32	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	23.10	24.00	1.230	-0.05	0.326	0.401
	WCDMA V	RMC 12.2Kbps	Back	10mm	4132	826.4	22.91	24.00	1.285	-0.04	0.282	0.362
	WCDMA V	RMC 12.2Kbps	Back	10mm	4182	836.4	23.07	24.00	1.239	-0.04	0.306	0.379
	WCDMA V	RMC 12.2Kbps	Back	15mm	4233	846.6	23.10	24.00	1.230	-0.08	0.201	0.247
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1513	1752.6	23.42	24.00	1.143	-0.01	0.552	0.631
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1312	1712.4	23.09	24.00	1.233	-0.04	0.504	0.621
33	WCDMA IV	RMC 12.2Kbps	Front	10mm	1413	1732.6	23.24	24.00	1.191	-0.03	0.544	0.648
	WCDMA IV	RMC 12.2Kbps	Front	15mm	1513	1752.6	23.42	24.00	1.143	-0.06	0.346	0.395
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1513	1752.6	23.42	24.00	1.143	-0.07	0.498	0.569
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	23.48	23.50	1.005	-0.06	0.627	0.630
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	23.48	23.50	1.005	-0.1	0.754	0.757
	WCDMA II	RMC 12.2Kbps	Back	10mm	9262	1852.4	23.24	23.50	1.062	-0.08	0.683	0.725
34	WCDMA II	RMC 12.2Kbps	Back	10mm	9538	1907.6	23.47	23.50	1.007	-0.1	0.798	0.804
	WCDMA II	RMC 12.2Kbps	Back	15mm	9400	1880	23.48	23.50	1.005	-0.09	0.352	0.354



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
35	LTE Band 17	10M	QPSK	1RB	0Offset	Front	10mm	23790	710	22.77	24.00	1.327	-0.05	0.231	0.307
	LTE Band 17	10M	QPSK	25RB	0Offset	Front	10mm	23780	709	21.82	23.00	1.312	-0.09	0.194	0.255
	LTE Band 17	10M	QPSK	1RB	0Offset	Front	15mm	23790	710	22.77	24.00	1.327	0.02	0.161	0.214
	LTE Band 17	10M	QPSK	25RB	0Offset	Front	15mm	23780	709	21.82	23.00	1.312	0.06	0.138	0.181
	LTE Band 17	10M	QPSK	1RB	0Offset	Back	10mm	23790	710	22.77	24.00	1.327	-0.03	0.226	0.300
	LTE Band 17	10M	QPSK	25RB	0Offset	Back	10mm	23780	709	21.82	23.00	1.312	0.03	0.190	0.249
	LTE Band 13	10M	QPSK	1RB	0Offset	Front	10mm	23230	782	23.55	24.00	1.109	-0.06	0.166	0.184
	LTE Band 13	10M	QPSK	25RB	0Offset	Front	10mm	23230	782	22.38	23.00	1.153	-0.06	0.163	0.188
	LTE Band 13	10M	QPSK	1RB	0Offset	Back	10mm	23230	782	23.55	24.00	1.109	-0.08	0.173	0.192
36	LTE Band 13	10M	QPSK	25RB	0Offset	Back	10mm	23230	782	22.38	23.00	1.153	-0.04	0.169	0.195
	LTE Band 13	10M	QPSK	1RB	0Offset	Back	15mm	23230	782	23.55	24.00	1.109	0.06	0.152	0.169
	LTE Band 13	10M	QPSK	25RB	0Offset	Back	15mm	23230	782	22.38	23.00	1.153	0.06	0.145	0.167
	LTE Band 5	10M	QPSK	1RB	0Offset	Front	10mm	20525	836.5	23.7	24.00	1.072	-0.06	0.224	0.240
	LTE Band 5	10M	QPSK	25RB	0Offset	Front	10mm	20525	836.5	22.42	23.00	1.143	-0.07	0.179	0.205
	LTE Band 5	10M	QPSK	1RB	0Offset	Back	10mm	20525	836.5	23.7	24.00	1.072	-0.06	0.287	0.308
37	LTE Band 5	10M	QPSK	1RB	0Offset	Back	10mm	20450	829	23.44	24.00	1.138	-0.08	0.282	0.321
	LTE Band 5	10M	QPSK	1RB	0Offset	Back	10mm	20600	844	23.36	23.00	0.920	-0.07	0.323	0.297
	LTE Band 5	10M	QPSK	25RB	0Offset	Back	10mm	20525	836.5	22.42	23.00	1.143	-0.04	0.224	0.256
	LTE Band 5	10M	QPSK	1RB	0Offset	Back	15mm	20525	836.5	23.7	24.00	1.072	-0.07	0.198	0.212
	LTE Band 5	10M	QPSK	25RB	0Offset	Back	15mm	20525	836.5	22.42	23.00	1.143	-0.04	0.152	0.174
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10mm	20300	1745	23.58	24.00	1.102	-0.07	0.647	0.713
38	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10mm	20050	1720	23.36	24.00	1.159	-0.03	0.638	0.739
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10mm	20175	1732.5	23.46	24.00	1.132	-0.09	0.603	0.683
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10mm	20300	1745	22.53	23.00	1.114	-0.07	0.431	0.480
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	15mm	20300	1745	23.58	24.00	1.102	-0.04	0.376	0.414
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	15mm	20300	1745	22.53	23.00	1.114	-0.03	0.271	0.302
	LTE Band 4	20M	QPSK	1RB	0Offset	Back	10mm	20300	1745	23.58	24.00	1.102	-0.06	0.500	0.551
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10mm	20300	1745	22.53	23.00	1.114	-0.04	0.367	0.409
	LTE Band 25	20M	QPSK	1RB	0Offset	Front	10mm	26340	1880	23.45	24.00	1.135	0	0.611	0.693
	LTE Band 25	20M	QPSK	50RB	0Offset	Front	10mm	26140	1860	22.8	23.00	1.047	-0.01	0.458	0.480
	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26340	1880	23.45	24.00	1.135	-0.12	0.802	0.910
	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26140	1860	23.39	24.00	1.151	-0.14	0.809	0.931
39	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26590	1905	23.25	24.00	1.189	-0.14	0.808	0.960
	LTE Band 25	20M	QPSK	50RB	0Offset	Back	10mm	26140	1860	22.8	23.00	1.047	-0.13	0.584	0.612
	LTE Band 25	20M	QPSK	100RB	0Offset	Back	10mm	26340	1880	22.67	23.00	1.079	-0.13	0.582	0.628
	LTE Band 25	20M	QPSK	1RB	0Offset	Back	15mm	26340	1880	23.45	24.00	1.135	-0.08	0.469	0.532
	LTE Band 25	20M	QPSK	50RB	0Offset	Back	15mm	26140	1860	22.8	23.00	1.047	-0.11	0.382	0.400
	LTE Band 7	20M	QPSK	1RB	0offset	Front	10mm	20850	2510	22.10	23.50	1.380	-0.13	0.285	0.393
	LTE Band 7	20M	QPSK	50RB	0offset	Front	10mm	21350	2560	20.55	22.50	1.567	-0.17	0.214	0.335
	LTE Band 7	20M	QPSK	1RB	0offset	Back	10mm	20850	2510	22.10	23.50	1.380	-0.03	0.513	0.708
40	LTE Band 7	20M	QPSK	1RB	0offset	Back	10mm	21100	2535	22.04	23.50	1.400	-0.07	0.535	0.749
	LTE Band 7	20M	QPSK	1RB	0offset	Back	10mm	21350	2560	22.05	23.50	1.349	-0.01	0.400	0.540
	LTE Band 7	20M	QPSK	50RB	0offset	Back	10mm	21350	2560	20.55	22.50	1.567	0.04	0.348	0.545
	LTE Band 7	20M	QPSK	1RB	0offset	Back	15mm	20850	2510	22.10	23.50	1.300	-0.14	0.263	0.342
	LTE Band 7	20M	QPSK	50RB	0offset	Back	15mm	21350	2560	20.55	22.50	1.374	-0.04	0.153	0.210

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1RB	24Offset	Front	10mm	40620	2593	22.38	24.00	1.452	62.9	1.006	-0.09	0.292	0.427
	LTE Band 41	20M	QPSK	25RB	12Offset	Front	10mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0.03	0.251	0.349
	LTE Band 41	20M	QPSK	1RB	24Offset	Back	10mm	40620	2593	22.38	24.00	1.452	62.9	1.006	-0.04	0.552	0.806
	LTE Band 41	20M	QPSK	1RB	0Offset	Back	10mm	39750	2506	22.34	24.00	1.466	62.9	1.006	-0.05	0.458	0.675
	LTE Band 41	20M	QPSK	1RB	49Offset	Back	10mm	40185	2549.5	22.10	24.00	1.549	62.9	1.006	-0.04	0.515	0.802
41	LTE Band 41	20M	QPSK	1RB	0Offset	Back	10mm	41055	2636.5	22.23	24.00	1.503	62.9	1.006	-0.07	0.646	0.977
	LTE Band 41	20M	QPSK	1RB	49Offset	Back	10mm	41490	2680	22.01	24.00	1.581	62.9	1.006	0.04	0.350	0.557
	LTE Band 41	20M	QPSK	25RB	12Offset	Back	10mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0.01	0.487	0.678
	LTE Band 41	20M	QPSK	1RB	24Offset	Back	15mm	40620	2593	22.38	24.00	1.452	62.9	1.006	-0.03	0.237	0.346
	LTE Band 41	20M	QPSK	25RB	12Offset	Back	15mm	39750	2506	21.59	23.00	1.384	62.9	1.006	0.02	0.203	0.283

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.163	0.055	0.072
42	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	15.88	17.00	1.294	98.85	1.012	-0.06	0.198	0.259
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	15.76	17.00	1.330	98.85	1.012	-0.115	0.171	0.230
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	11	2462	15.67	17.00	1.358	98.85	1.012	-0.16	0.132	0.181
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	1	2412	15.88	17.00	1.294	98.85	1.012	0.069	0.099	0.130
	WLAN5GHz	802.11a 6Mbps	Front	10mm	64	5320	10.81	12.50	1.476	95.22	1.050	0	0.001	0.002
	WLAN5GHz	802.11a 6Mbps	Back	10mm	64	5320	10.81	12.50	1.476	95.22	1.050	0.04	0.077	0.119
43	WLAN5GHz	802.11a 6Mbps	Back	10mm	56	5280	10.73	12.50	1.503	95.22	1.050	-0.109	0.083	0.131
	WLAN5GHz	802.11a 6Mbps	Back	15mm	56	5280	10.73	12.50	1.503	95.22	1.050	0.082	0.038	0.060
	WLAN5GHz	802.11a 6Mbps	Front	10mm	144	5720	10.90	12.50	1.445	95.22	1.050	0.149	0.020	0.030
44	WLAN5GHz	802.11a 6Mbps	Back	10mm	144	5720	10.90	12.50	1.445	95.22	1.050	-0.135	0.184	0.279
	WLAN5GHz	802.11a 6Mbps	Back	10mm	100	5500	10.59	12.50	1.552	95.22	1.050	-0.062	0.082	0.134
	WLAN5GHz	802.11a 6Mbps	Back	10mm	116	5580	10.55	12.50	1.567	95.22	1.050	-0.004	0.101	0.166
	WLAN5GHz	802.11a 6Mbps	Back	10mm	124	5620	10.60	12.50	1.549	95.22	1.050	-0.04	0.122	0.198
	WLAN5GHz	802.11a 6Mbps	Back	10mm	132	5660	10.69	12.50	1.517	95.22	1.050	-0.086	0.105	0.167
	WLAN5GHz	802.11a 6Mbps	Back	15mm	144	5720	10.90	12.50	1.445	95.22	1.050	-0.101	0.083	0.126
	WLAN5GHz	802.11a 6Mbps	Front	10mm	149	5745	10.93	12.50	1.435	95.22	1.050	-0.177	0.015	0.023
	WLAN5GHz	802.11a 6Mbps	Back	10mm	149	5745	10.93	12.50	1.435	95.22	1.050	-0.177	0.105	0.158
45	WLAN5GHz	802.11a 6Mbps	Back	10mm	157	5785	10.60	12.50	1.549	95.22	1.050	-0.079	0.126	0.205
	WLAN5GHz	802.11a 6Mbps	Back	10mm	165	5825	10.85	12.50	1.462	95.22	1.050	-0.033	0.098	0.150
	WLAN5GHz	802.11a 6Mbps	Back	15mm	157	5785	10.60	12.50	1.549	95.22	1.050	-0.156	0.070	0.114

15.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26140	1860	23.39	24.00	1.151	-0.14	0.809	-	0.931
2nd	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10mm	26140	1860	23.39	24.00	1.151	-0.11	0.786	1.03	0.905

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)		Yes		
4.	WCDMA((Voice) + Bluetooth(data)		Yes		
5.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		
6.	WCDMA((Voice) + WLAN5GHz(data)	Yes	Yes		
7.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
8.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
9.	LTE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
10.	GPRS/EDGE(Data) + Bluetooth(data)		Yes		
11.	WCDMA(Data) + Bluetooth(data)		Yes		
12.	LTE(Data) + Bluetooth(data)		Yes		
13.	GPRS/EDGE(data) + WLAN5GHz(data)	Yes	Yes		
14.	WCDMA(data) + WLAN5GHz(data)	Yes	Yes		
15.	LTE(data) + WLAN5GHz(data)	Yes	Yes		

General Note:

- The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is $< 5\text{mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

Bluetooth Max Power	Exposure Position	Body-worn
	Test separation	10 mm
9.5 dBm	Estimated SAR (W/kg)	0.189 W/kg

16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	4	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.137	0.307	0.222	0.44	0.36
		Right Tilted	0.096	0.257	0.284	0.35	0.38
		Left Cheek	0.281	0.166	0.068	0.45	0.35
		Left Tilted	0.084	0.178	0.074	0.26	0.16
	GSM1900	Right Cheek	0.253	0.307	0.222	0.56	0.48
		Right Tilted	0.072	0.257	0.284	0.33	0.36
		Left Cheek	0.411	0.166	0.068	0.58	0.48
		Left Tilted	0.108	0.178	0.074	0.29	0.18
WCDMA	WCDMA V	Right Cheek	0.265	0.307	0.222	0.57	0.49
		Right Tilted	0.180	0.257	0.284	0.44	0.46
		Left Cheek	0.276	0.166	0.068	0.44	0.34
		Left Tilted	0.157	0.178	0.074	0.34	0.23
	WCDMA IV	Right Cheek	0.494	0.307	0.222	0.80	0.72
		Right Tilted	0.169	0.257	0.284	0.43	0.45
		Left Cheek	0.410	0.166	0.068	0.58	0.48
		Left Tilted	0.287	0.178	0.074	0.47	0.36
	WCDMA II	Right Cheek	0.420	0.307	0.222	0.73	0.64
		Right Tilted	0.148	0.257	0.284	0.41	0.43
		Left Cheek	0.441	0.166	0.068	0.61	0.51
		Left Tilted	0.216	0.178	0.074	0.39	0.29
LTE	LTE Band 17	Right Cheek	0.234	0.307	0.222	0.54	0.46
		Right Tilted	0.117	0.257	0.284	0.37	0.40
		Left Cheek	0.181	0.166	0.068	0.35	0.25
		Left Tilted	0.105	0.178	0.074	0.28	0.18
	LTE Band 13	Right Cheek	0.207	0.307	0.222	0.51	0.43
		Right Tilted	0.142	0.257	0.284	0.40	0.43
		Left Cheek	0.182	0.166	0.068	0.35	0.25
		Left Tilted	0.132	0.178	0.074	0.31	0.21
	LTE Band 5	Right Cheek	0.185	0.307	0.222	0.49	0.41
		Right Tilted	0.135	0.257	0.284	0.39	0.42
		Left Cheek	0.226	0.166	0.068	0.39	0.29
		Left Tilted	0.115	0.178	0.074	0.29	0.19
	LTE Band 4	Right Cheek	0.451	0.307	0.222	0.76	0.67
		Right Tilted	0.152	0.257	0.284	0.41	0.44
		Left Cheek	0.475	0.166	0.068	0.64	0.54
		Left Tilted	0.250	0.178	0.074	0.43	0.32
	LTE Band 25	Right Cheek	0.404	0.307	0.222	0.71	0.63
		Right Tilted	0.143	0.257	0.284	0.40	0.43
		Left Cheek	0.765	0.166	0.068	0.93	0.83
		Left Tilted	0.264	0.178	0.074	0.44	0.34
	LTE Band 7	Right Cheek	0.186	0.307	0.222	0.49	0.41
		Right Tilted	0.137	0.257	0.284	0.39	0.42
		Left Cheek	0.465	0.166	0.068	0.63	0.53
		Left Tilted	0.164	0.178	0.074	0.34	0.24
	LTE Band 41	Right Cheek	0.117	0.307	0.222	0.42	0.34
		Right Tilted	0.121	0.257	0.284	0.38	0.41
		Left Cheek	0.299	0.166	0.068	0.47	0.37
		Left Tilted	0.054	0.178	0.074	0.23	0.13

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	
GSM	GSM850	Front	0.234	0.072	0.31
		Back	0.357	0.259	0.62
		Left side	0.233	0.058	0.29
		Right side	0.133		0.13
		Top side		0.160	0.16
		Bottom side	0.129		0.13
	GSM1900	Front	0.417	0.072	0.49
		Back	0.610	0.259	0.87
		Left side	0.333	0.058	0.39
		Right side	0.137		0.14
		Top side		0.160	0.16
		Bottom side	0.289		0.29
WCDMA	WCDMA V	Front	0.369	0.072	0.44
		Back	0.401	0.259	0.66
		Left side	0.376	0.058	0.43
		Right side	0.210		0.21
		Top side		0.160	0.16
		Bottom side	0.170		0.17
	WCDMA IV	Front	0.648	0.072	0.72
		Back	0.569	0.259	0.83
		Left side	0.602	0.058	0.66
		Right side	0.302		0.30
		Top side		0.160	0.16
		Bottom side	0.423		0.42
	WCDMA II	Front	0.630	0.072	0.70
		Back	0.804	0.259	1.06
		Left side	0.545	0.058	0.60
		Right side	0.266		0.27
		Top side		0.160	0.16
		Bottom side	0.436		0.44



WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
LTE	LTE Band 17	Front	0.307	0.072	0.38
		Back	0.300	0.259	0.56
		Left side	0.203	0.058	0.26
		Right side	0.195		0.20
		Top side		0.160	0.16
		Bottom side	0.121		0.12
	LTE Band 13	Front	0.188	0.072	0.26
		Back	0.195	0.259	0.45
		Left side	0.208	0.058	0.27
		Right side	0.211		0.21
		Top side		0.160	0.16
		Bottom side	0.100		0.10
	LTE Band 5	Front	0.245	0.072	0.32
		Back	0.321	0.259	0.58
		Left side	0.309	0.058	0.37
		Right side	0.181		0.18
		Top side		0.160	0.16
		Bottom side	0.167		0.17
	LTE Band 4	Front	0.739	0.072	0.81
		Back	0.551	0.259	0.81
		Left side	0.592	0.058	0.65
		Right side	0.284		0.28
		Top side		0.160	0.16
		Bottom side	0.455		0.46
	LTE Band 25	Front	0.693	0.072	0.77
		Back	0.960	0.259	1.22
		Left side	0.645	0.058	0.70
		Right side	0.322		0.32
		Top side		0.160	0.16
		Bottom side	0.566		0.57
	LTE Band 7	Front	0.393	0.072	0.47
		Back	0.749	0.259	1.01
		Left side	0.282	0.058	0.34
		Right side	0.109		0.11
		Top side		0.160	0.16
		Bottom side	0.278		0.28
	LTE Band 41	Front	0.427	0.072	0.50
		Back	0.977	0.259	1.24
		Left side	0.267	0.058	0.33
		Right side	0.069		0.07
		Top side		0.160	0.16
		Bottom side	0.206		0.21



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth	5GHz WLAN			
			1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Front	0.234	0.072	0.189	0.030	0.31	0.42	0.26
		Back	0.357	0.259	0.189	0.279	0.62	0.55	0.64
	GSM1900	Front	0.417	0.072	0.189	0.030	0.49	0.61	0.45
		Back	0.610	0.259	0.189	0.279	0.87	0.80	0.89
WCDMA	WCDMA V	Front	0.369	0.072	0.189	0.030	0.44	0.56	0.40
		Back	0.401	0.259	0.189	0.279	0.66	0.59	0.68
	WCDMA IV	Front	0.648	0.072	0.189	0.030	0.72	0.84	0.68
		Back	0.569	0.259	0.189	0.279	0.83	0.76	0.85
	WCDMA II	Front	0.630	0.072	0.189	0.030	0.70	0.82	0.66
		Back	0.804	0.259	0.189	0.279	1.06	0.99	1.08
LTE	LTE Band 17	Front	0.307	0.072	0.189	0.030	0.38	0.50	0.34
		Back	0.300	0.259	0.189	0.279	0.56	0.49	0.58
	LTE Band 13	Front	0.188	0.072	0.189	0.030	0.26	0.38	0.22
		Back	0.195	0.259	0.189	0.279	0.45	0.38	0.47
	LTE Band 5	Front	0.245	0.072	0.189	0.030	0.32	0.43	0.28
		Back	0.321	0.259	0.189	0.279	0.58	0.51	0.60
	LTE Band 4	Front	0.739	0.072	0.189	0.030	0.81	0.93	0.77
		Back	0.551	0.259	0.189	0.279	0.81	0.74	0.83
	LTE Band 25	Front	0.693	0.072	0.189	0.030	0.77	0.88	0.72
		Back	0.960	0.259	0.189	0.279	1.22	1.15	1.24
	LTE Band 7	Front	0.393	0.072	0.189	0.030	0.47	0.58	0.42
		Back	0.749	0.259	0.189	0.279	1.01	0.94	1.03
	LTE Band 41	Front	0.427	0.072	0.189	0.030	0.50	0.62	0.46
		Back	0.977	0.259	0.189	0.279	1.24	1.17	1.26

Test Engineer : Steven Chang Lawrence Chen Tom Jiang Thomas Wang Bevis Chang
Angelo Chang Iran Wang Poa Pan Kurt Liu and Ken Li

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	1.4	N	1	1	1	1.4	1.4
Device Holder	2.5	N	1	1	1	2.5	2.5
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						10.8%	10.7%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						21.6%	21.5%

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	1.4	N	1	1	1	1.4	1.4
Device Holder	2.5	N	1	1	1	2.5	2.5
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.0%	11.9%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						23.9%	23.8%

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r01, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Jun 2015.
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [9] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [10] FCC KDB 941225 D05A v01r01, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Aug 2014
- [11] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.