



Certificate of compliance

Test report No.:	ITN -2003-058		
Applicant :	Etronics Corporation.		
Applicant Address :	345-50, Gasan-Dong, Geumcheon-Gu, Seoul, Korea, 153-802		
Product :	LCD Color TV/Monitor		
FCC ID :	P87-ETR0004	Model NO.:	TL-1705W
Receipt N O.:	N/A	Date of receipt	November 03, 2003
Date of Issue :	November 03, 2003		
Testing locatlon :	Etronics Corporation. 461, Tokjeong-Ri, Changan -Myun, Hwaseong-city, Kyunggi-Do, Korea		
Test Standards:	ANSI C63.4 / 2001		
Rule Parts :	FCC Part 15 Subpart B		
Equipment Class :	Class B Device Peripheral		
Test Result :	The above mentioned product has been tested and passed.		
Prepared by : H.N.Choi Tested by : S.S.Oh / Engineer Approved By : J.W.Cho / Lab. Manager			
 _____ Signature Date  _____ Signature Date  _____ Signature Date			
Other Aspects :			
Abbreviations :	OK, Passed · Fail = failed · N/A = not applicable		

- . This test report is not permitted to copy partly without our permission.
- . This test result is dependent on only equipment to be used.
- . This test result is based on single evaluation of one sample of the above mentioned.
- . We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.



contents

Contents	2
List of Tables	2
1. General	3
2. Test Site	3
2.1 Location	3
2.2 List of Test and Measurement Instruments	4
2.3 Test Data	4
2.4 Test Environment	4
3. Description of the tested samples	5
3.1 Rating and Physical characteristics	5
3.2 Submitted documents	5
4. Measurement conditions	6
4.1 Modes of operation	6
4.2 List of Peripherals	6
4.3 Type of Used cables	7
4.4 Test Setup	7
4.5 Uncertainty	7
5. Emission Test	8
5.1 Conducted Emissions	8
5.2 Radiated Emissions	10
➤ List of Tables	
Table 1 List of test and measurement equioment	4
Table 2 Test Data, Conducted Emissions	11
Table 3 Test Data,Radiated Emissions	13



1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by Etronics Corp. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

Etronics Corporation.

2.1 Location

461, Tokjeong -Ri, Changan-Myun, Hwaseong -city, Kyunggi-do, Korea, 445-944

The test site is in compliance with ANSI C63.4/2001 for measurement of radio Interference.



2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipmnet

.Conducted Emissions

Kind of Equipment	Type	S/N	Calibrated until
EMI Reciver	ESS	841432/010	08.2003
Artificial Mains Network	3825/2	8905-1506	08.2003
Conducted Cable	N/A	N/A	09.2003

.Radiated Emissions

Kind of Equipment	Type	S/N	Calibrated
EMI Reciver	ESS	841432/010	08.2003
Spectrum Analyzer	8568B	3019A05457	08.2003
Amplifier	8447F	3113A04584	08.2003
Log Periodic Antenna	UHALP9107	9107846	04.2003
Biconical Antenna	BBA9106	91039103	04.2003
Open Site Cable	N/A	N/A	01.2003
Antenna Mast	EMRT2014	N/A	N/A
Antenna & Turntable controller	EMAT2015	N/A	N/A

2.3 Test Date

Date of Application : August 13, 2003

Date of Test : August 13, 2003 . November 03, 2003

2.4 Test Environment

See each test item's description



3. Description of the tested samples

The EUT is TFT LCD TV With MONITOR

3.1 Rating and Physical Characteristics

Panel Display size : 17.1"(434.38 mm, diagonal)

Panel Actual Display size : 372.48(H) X 223.488(V) mm

Panel Pixel size : 0.291 X 0.291 mm

Viewing Angle : 88 / 88 / 88 / 88 (L/R/U/D)

Frequency Horizontal : 30 – 64 KHz

Frequency Vertical : 50 – 85 KHz

Frequency Display Color : 16.777.216 colors

Display Resolution Optimum Mode : 1280 X 768 @ 60

Display Resolution Maximum Mode : 1280 X 1024 @ 60

Input Signal Sync. : H/V Separate, TTL, SOG (Sync On Green)

Input Signal Video Signal : 0.7 Vp-p @ 75 Ohm

Video Color system : NTSC

Video system : CVBS, S-VHS, Component

Component Video In : 1.0 Vp-p @ 75 Ohm

Component Audio In : 300 mV rms

Power Supply input : AC 100 – 240 V, 1.8 – 0.9 A (50/60 Hz)

Power Supply output : DC 14 V / 4.5 A

Power Consumption Maximum : 60 W

Power Consumption Saving : < 10 W

Dimensions Weight : Unit (WXDXH) :

TV body : 20.37 X 2.6 X 11.26 inch / 15.44 lbs (560 X 66 X 286 mm / 7 Kg)

Stand : 20.37 X 7.87 X 14.8 inch / 15.44 lbs (560 X 200 X 376 mm / 3.95 Kg)

Environmental Considerations Operating Temperature : 32,F to 122,F (0,C to 50,C)

Environmental Considerations Operating Humidity : 10% to 90%

Environmental Considerations Storage Temperature : -4,F to 140,F (-20,C to 60,C)

Environmental Considerations Storage Humidity : 10% to 90%

Audio Characteristics :

Audio Input : RCA Jack Red (R) White (L), 0.3 V rms

Stereo out : Max. 4.2 W Output

Headphone out : Max. 10 m W Output



3.2 Submitted Documents

N/A

4. Measurement Conditions

The operating voltage of EUT is supplied by a TFT LCD TV With MONITOR

4.1 Modes of Operation

The EUT was in the follwing operation mode during all testing;

The measurement was conducted under “H” Pattern Display of MNT and PC operating

4.2 List of Peripherals

Desclrption	Manufacturer	Model Name	Serial No.	FCC ID
Personal Computer	SAMSUNG	MA10	A32192DT400609	N/A
Keyboard	SAMSUNG	SEM-DT35	3V002032	N/A
Mouse	Logitech	M-S48a	HCA20912082	JNZ201213



4.3 Type of Used Cables

Description	Length	Type of shield	Manufacturer	Remark
PC power cable	2.0m	Non-Shield	None	
Video interfacd cable	1.5m	Shield	None	
Keyboard interface cable	1.2m	Non-Shield	None	
Mouse interface cable	1.8m	Non-Shield	None	

4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

4.5 Uncertainty

1) Radiated disturbance

U_c (Combined standard Uncertainty) = $\pm 2.08B$

Expanded uncertainty $U = K_{uc}$

$U = \pm 4.16dB$

2) Conducted disturbance

$U_c = \pm 1.25dB$

$U = K_{uc} - 2 \times U_c = \pm 2.5B$



5. Emission Test

5.1 Conducted Enissions

Result : Passed

The line-conducted facility is located inside a 3.0M x4.0M x7.0M shielded enclosure.

The shidding effectiveness of the shielded room is in accordance with MIL -Std-285 or NSA 604-05.

A1mx1.5m wooden table 80cm. High is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. EMCO Model 3825/2 (10KHz-30MHz)

50ohm/50uH Lone-Impedance Stabilization Networks(LISNs) are bonded to the shielded room.

The EUT is powered from the EMCO LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters.

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the Shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2".

If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to Warm up to their normal operating condition. The RF output of the LISN was connected to the Spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESS) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by:switching power lines;varying the mode of operation or resolution;

Clock or data exchange speed;if applicable;whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.



Figure 1 : Spectral Diagram, Line-PE (HOT)

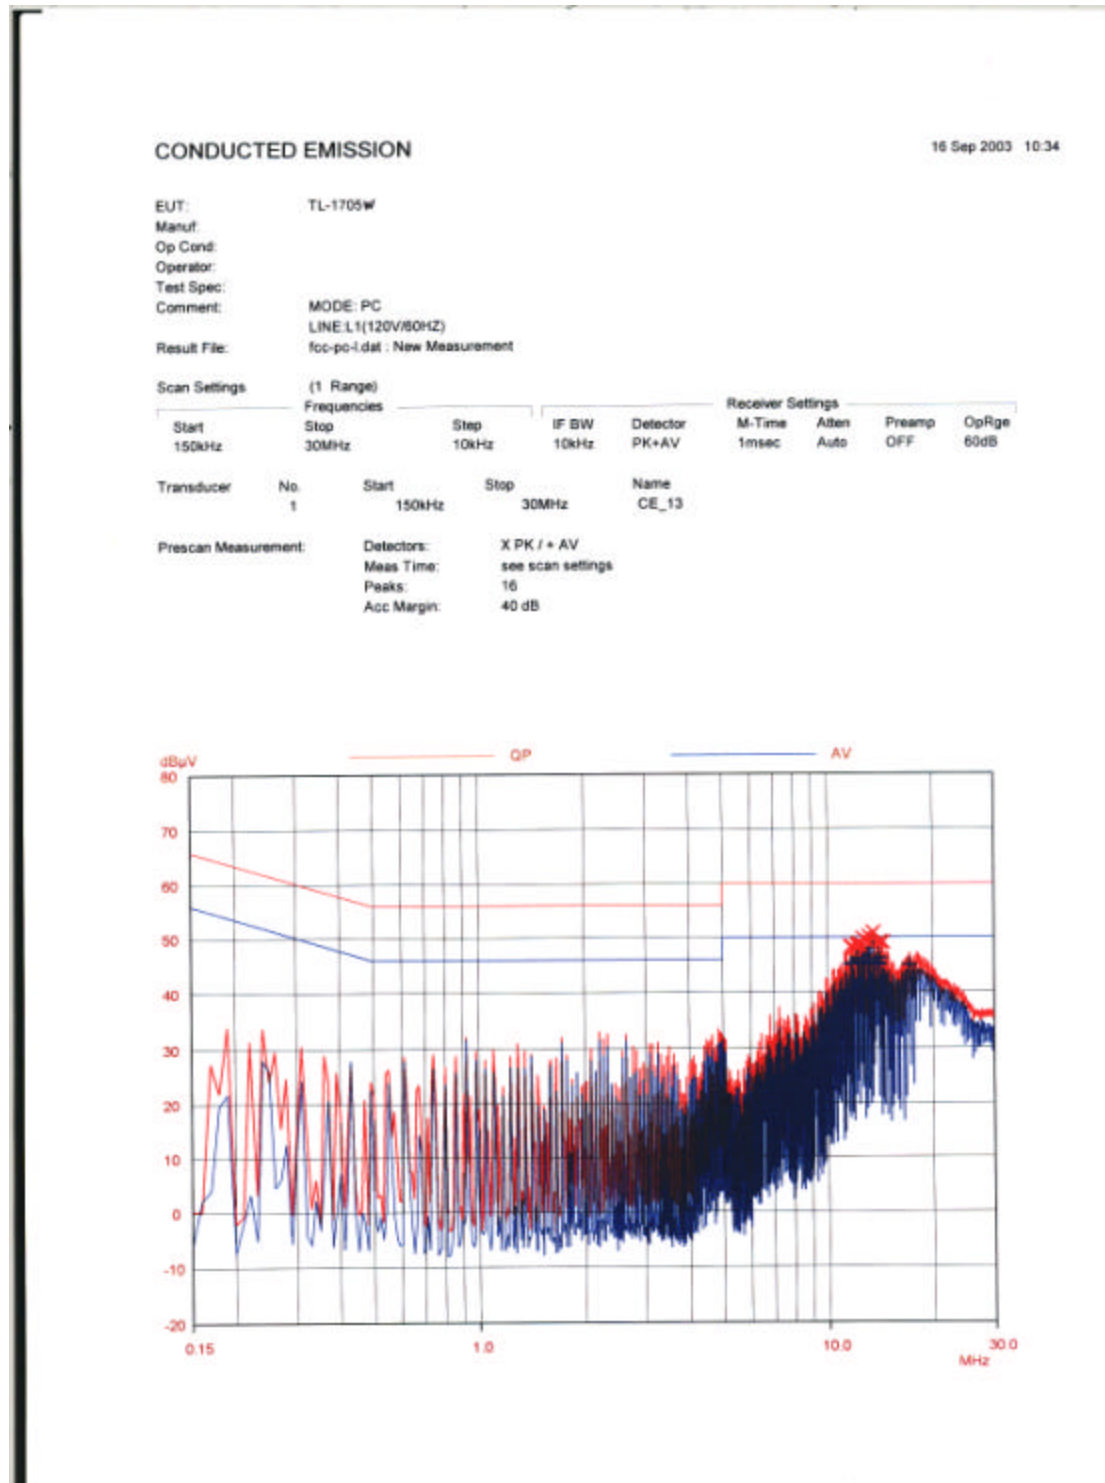




Figure 2 : Spectral Diagram, Neutral-PE (Neutral)

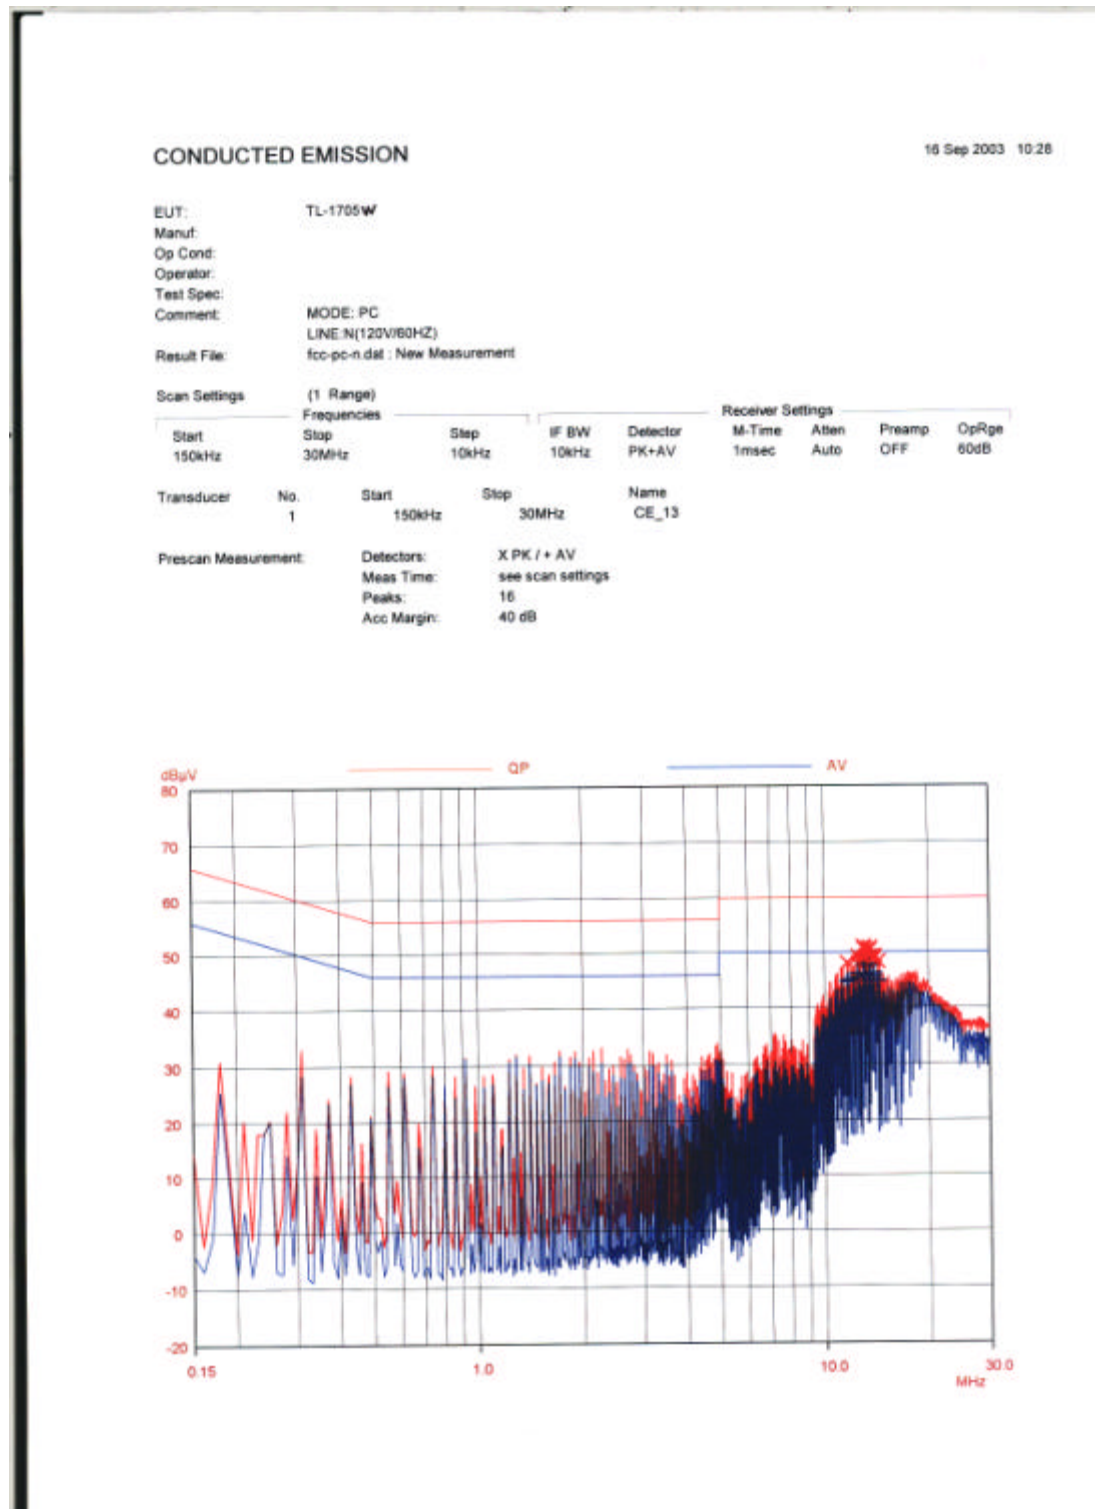




Table 2 : Test Data, Conducted Emissions

Frequency (MHz)	Line	QP Actual (dB μ V)	AV Actual (dB μ V)	QP Limit (dB μ V)	AV Limit (dB μ V)	QP Margin (dB)	AV Margin (dB)
11.66	A	48.2	45.1	60.0	50.0	11.8	4.9
11.72	A	48.4	45.2	60.0	50.0	11.6	4.8
12.64	A	49.8	46.9	60.0	50.0	10.2	3.1
13.50	A	51.0	47.9	60.0	50.0	9.0	2.1
14.00	B	49.4	46.3	60.0	50.0	10.6	3.7
14.30	B	48.3	44.9	60.0	50.0	11.7	5.1

NOTES :

1. All modes of operation were investigated
and the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver,
4. Measurements using CISPR quasi-peak mode.
5. Line A = LINE -Pem Line B = NEUTRAL-PE
6. C/F = Correction Factor
7. C/L = Cable Loss

Margin Calculation

Margin = Limit - Actual

Actual = Reading + C/F + C/L



5.2 Radiated Emissions

Result : Passed

Preliminary measurements were made indoors at 1meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from EUT were maximized and Investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas.

The test equipment was placed on a wooden table situated on a 4 x4meter area adjacent to the measurement area, Turntable was to protect from weather in the dome that made with FRP.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-exmined and invertigated using EMI/Fiedl Intensity Meter(ESS) and Quasi-Peak Adapter.

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 x1.5meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission, The turntable containing the system was rotated; the antenna height was varied 1 to 4meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation of resolution: clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test, Each EME reported was calibrated using self-calibrating mode.



Table 3 : Test Data, Radiated Emissions

Frequency [MHz]	Pol.	Height [m]	Angle [°]	(1) Reading [dBμV]	(2) AFCL [dB/m]	(3) Actual [dBμV/m]	(4) Limit [dBμV/m]	(5) Margin [dB]
80.50	V	1.5	240	19.2	8.8	28.0	40.0	12.0
112.76	H	1.9	295	14.4	14.6	29.0	43.5	14.5
118.56	H	1.3	307	22.9	15.5	38.4	43.5	5.1
128.86	H	1.3	240	23.1	16.4	39.5	43.5	4.0
161.08	H	1.1	246	20.2	18.2	38.4	43.5	5.1
194.96	H	1.6	248	18.1	19.4	37.5	43.5	6.0
216.48	H	1.5	280	10.1	20.4	30.5	46.0	15.5
221.64	H	1.7	240	11.8	20.6	32.4	46.0	13.6
286.40	H	1.6	220	13.5	22.9	36.4	46.0	9.6
324.86	H	1.3	120	22.4	19.6	42.0	46.0	4.0
389.96	H	1.2	122	20.2	21.0	41.2	46.0	4.8
454.93	H	1.2	279	7.2	22.8	30.0	46.0	16.0
519.92	H	1.3	260	18.6	24.6	43.2	46.0	2.8
584.92	H	1.3	267	17.2	27.3	44.5	46.0	1.5
649.92	H	1.2	279	8.5	27.1	35.6	46.0	10.4
714.89	H	1.3	260	13.4	28.6	42.0	46.0	4.0
779.89	H	1.3	267	3.1	29.6	32.7	46.0	13.3

Table. Radiated Measurements at 3-meters

1. All modes of operation were investigated
and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver,
4. Measurements using CISPR quasi-peak mode
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization.

Margin Calculation

$$(5)\text{Margin} = (4)\text{Limit} - (3)\text{Actual}$$

$$[(3)\text{Actual} = (1)\text{Reading} + (2)\text{ACL}]$$