

FCC TEST REPORT

Client Name : Phottix (HK) Ltd.

Address : Unit 1 & 13, 8/F., Block B, Hoi Luen Ind. Centre, 55 Hoi Yuen Rd., Kwun Tong, Kln., Hong Kong, China

Product Name : Phottix Juno Li60 Hot Shoe Flash

Date : May 07, 2019

Shenzhen Anbotech Compliance Laboratory Limited

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiated Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. 20dB Bandwidth Test.....	28
5.1. Test Standard and Limit.....	28
5.2. Test Setup.....	28
5.3. Test Procedure.....	28
5.4. Test Data.....	28
6. Antenna Requirement.....	31
6.1. Test Standard and Requirement.....	31
6.2. Antenna Connected Construction.....	31
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	32
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	34
APPENDIX III -- INTERNAL PHOTOGRAPH.....	38

TEST REPORT

Applicant : Phottix (HK) Ltd.
Manufacturer : Phottix (HK) Ltd.
Product Name : Phottix Juno Li60 Hot Shoe Flash
Model No. : H0801
Trade Mark : Phottix
Rating(s) : Input: DC 5V, 1A(with DC 7.4V, 3200mAh Battery inside)

Test Standard(s) : **FCC Part15 Subpart C, Paragraph 15.249**
Test Method(s) : **ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Apr. 10, 2019

Date of Test

Apr. 10~18, 2019

Prepared by



Oliay Yang

(Engineer / Oliay Yang)

Reviewer

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer

Sally Zhang

(Manager / Sally Zhang)

1. General Information

1.1. Client Information

Applicant	:	Phottix (HK) Ltd.
Address	:	Unit 1 & 13, 8/F., Block B, Hoi Luen Ind. Centre, 55 Hoi Yuen Rd., Kwun Tong, Kln., Hong Kong, China
Manufacturer	:	Phottix (HK) Ltd.
Address	:	Unit 1 & 13, 8/F., Block B, Hoi Luen Ind. Centre, 55 Hoi Yuen Rd., Kwun Tong, Kln., Hong Kong, China
Factory	:	Phottix (HK) Ltd.
Address	:	Unit 1 & 13, 8/F., Block B, Hoi Luen Ind. Centre, 55 Hoi Yuen Rd., Kwun Tong, Kln., Hong Kong, China

1.2. Description of Device (EUT)

Product Name	:	Phottix Juno Li60 Hot Shoe Flash	
Model No.	:	H0801	
Trade Mark	:	Phottix	
Test Power Supply	:	AC 240V, 60Hz for adapter/ AC 120V, 60Hz for adapter/ DC 7.4V battery inside	
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)	
Product Description	:	Operation Frequency:	2409~2474MHz
		Number of Channel:	32 Channels
		Modulation Type:	FSK
		Antenna Type:	PCB Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	MODEL: PSA05E-050Q INPUT: 100-240V~ 50-60Hz, 0.2A OUTPUT: DC 5V, 1.0A
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH17
Mode 3	CH32

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH17
Mode 3	CH32


Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.5. List of Channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2409	10	2427	19	2445	28	2463
2	2411	11	2429	20	2447	29	2468
3	2413	12	2431	21	2449	30	2470
4	2415	13	2433	22	2451	31	2472
5	2417	14	2435	23	2453	32	2474
6	2419	15	2437	24	2455		
7	2421	16	2439	25	2457		
8	2423	17	2441	26	2459		
9	2425	18	2443	27	2461		

1.6. Description of Test Setup

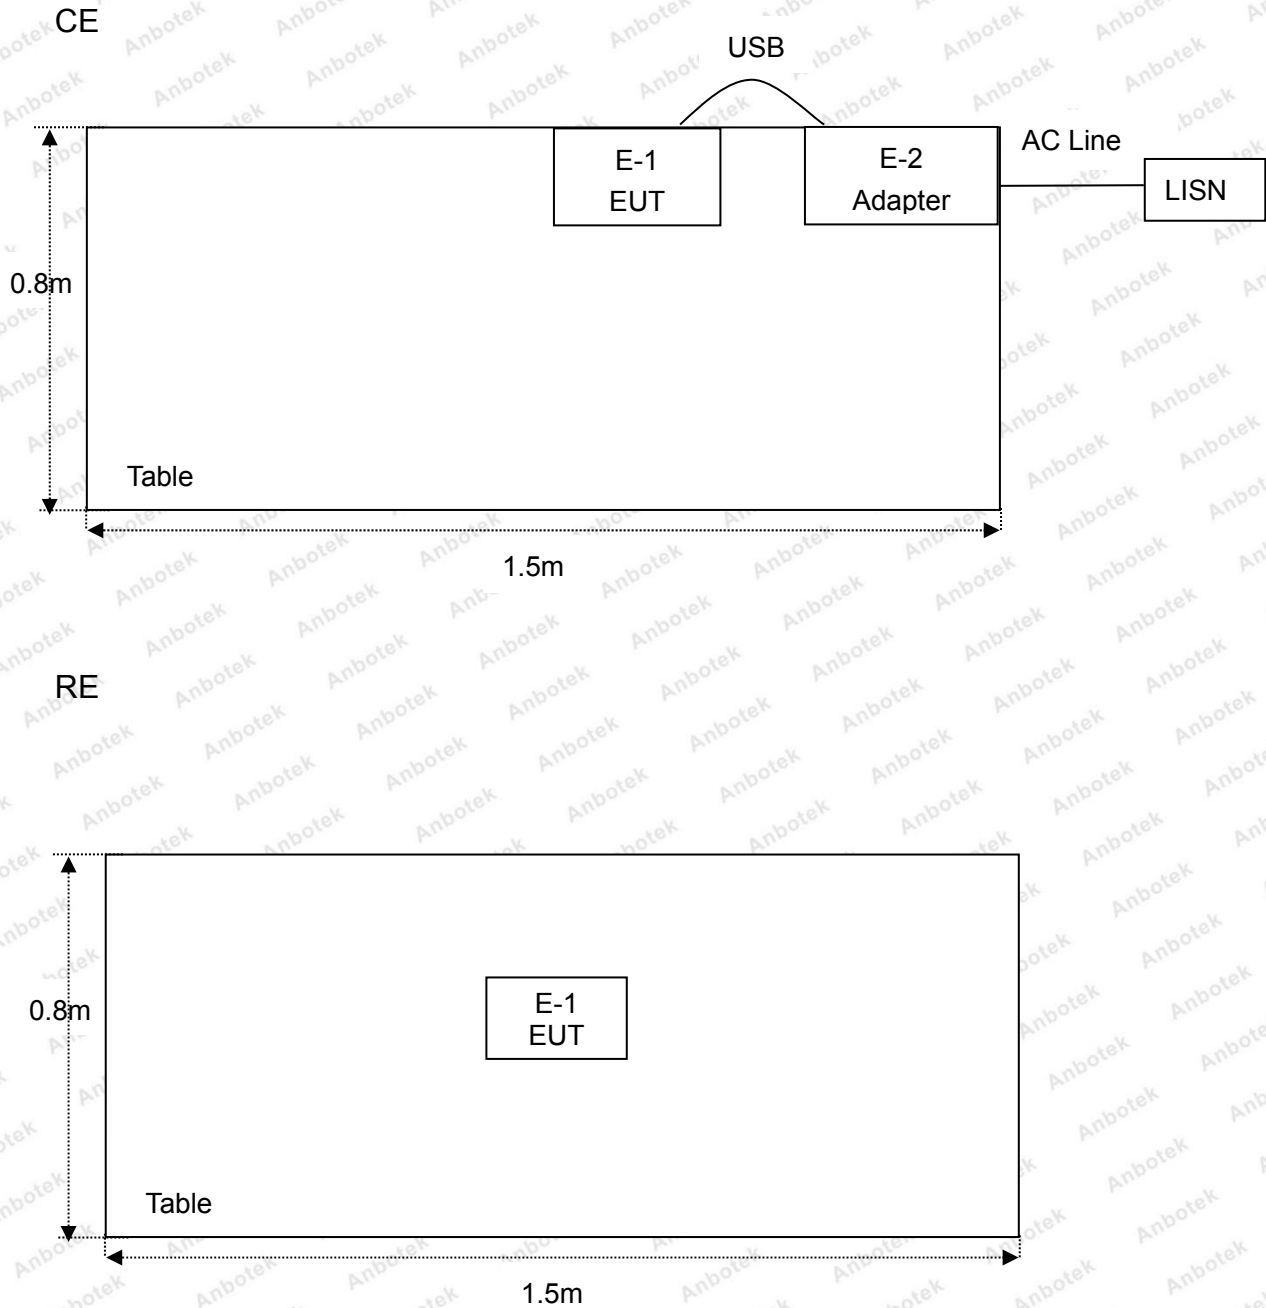

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 05, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 05, 2018	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 20, 2018	1 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 20, 2018	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 05, 2018	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 05, 2018	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 05, 2018	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 05, 2018	1 Year
19.	DC Power Supply	LW	TPR-6420D	374470	Oct. 31, 2018	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 01, 2018	1 Year

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results


Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

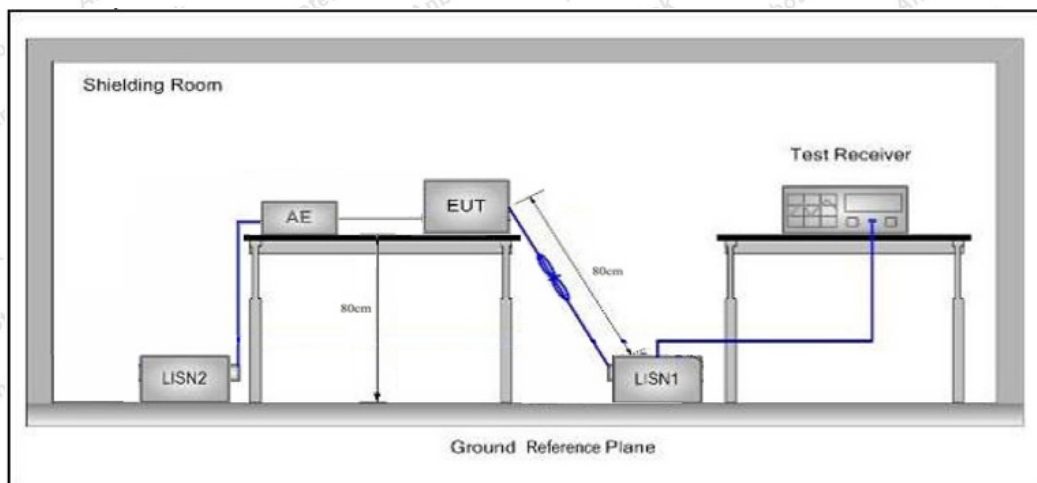

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan the FSK modulation, and found the FSK modulation Low channel (TX+Charging Mode) which is the worst case, only the worst case is recorded in the report.

Please to see the following pages.


Report No.: SZAWW190410002-01

FCC ID: P9M-JUNOLI60

Page 11 of 49

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 21.4°C Hum.: 52%

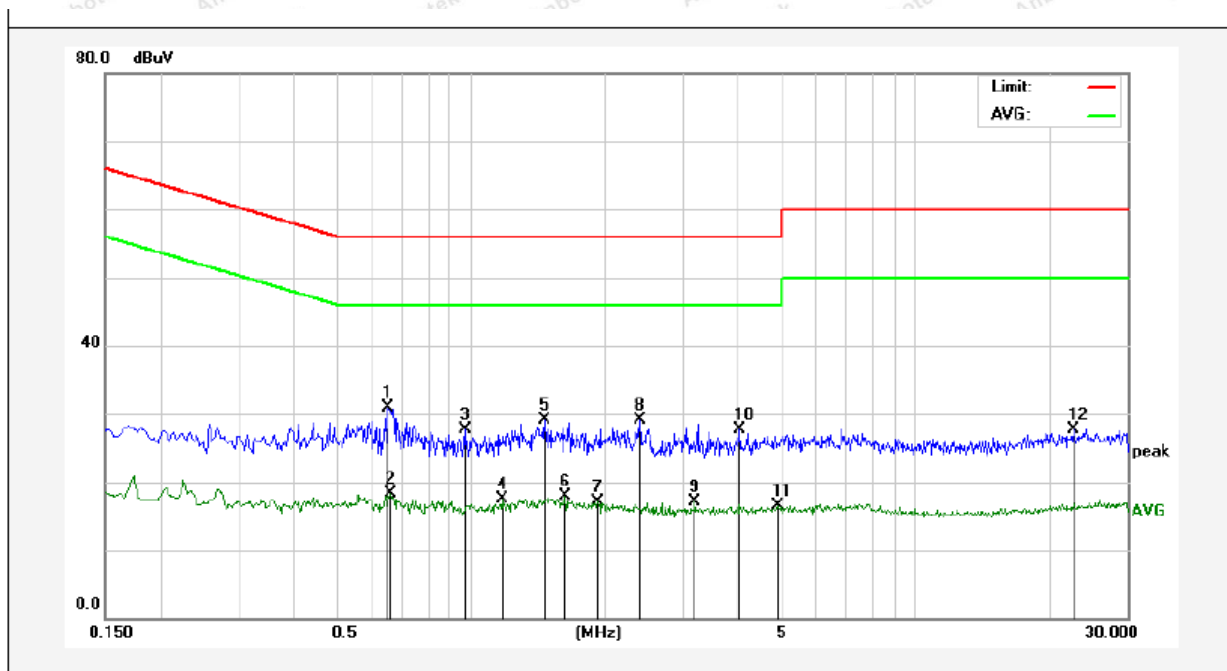

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.6540	10.78	20.03	30.81	56.00	-25.19	QP	
2	0.6580	-1.72	20.03	18.31	46.00	-27.69	AVG	
3	0.9700	7.61	20.11	27.72	56.00	-28.28	QP	
4	1.1740	-2.68	20.12	17.44	46.00	-28.56	AVG	
5	1.4700	9.05	20.13	29.18	56.00	-26.82	QP	
6	1.6300	-2.28	20.13	17.85	46.00	-28.15	AVG	
7	1.9380	-3.08	20.14	17.06	46.00	-28.94	AVG	
8	2.4060	8.98	20.15	29.13	56.00	-26.87	QP	
9	3.2060	-3.05	20.16	17.11	46.00	-28.89	AVG	
10	4.0460	7.51	20.18	27.69	56.00	-28.31	QP	
11	4.9180	-3.79	20.20	16.41	46.00	-29.59	AVG	
12	22.6780	7.33	20.31	27.64	60.00	-32.36	QP	


Report No.: SZAWW190410002-01

FCC ID: P9M-JUNOLI60

Page 12 of 49

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 21.4°C Hum.: 52%

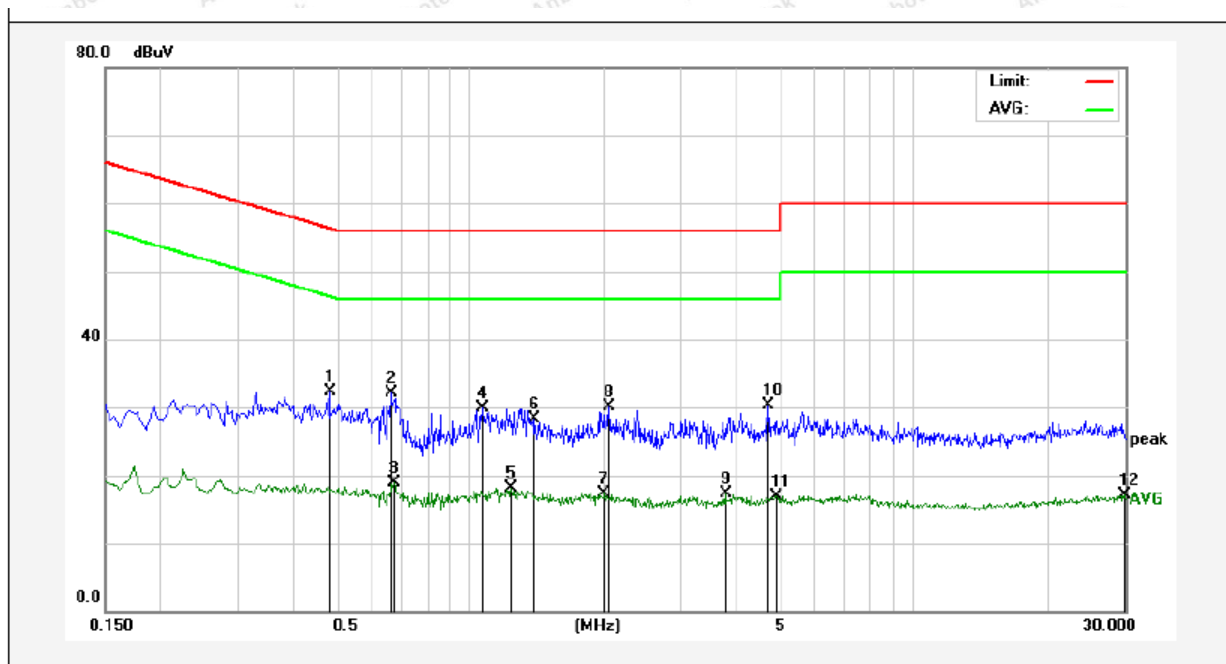

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4820	12.26	19.97	32.23	56.30	-24.07	QP	
2	0.6620	12.03	20.03	32.06	56.00	-23.94	QP	
3	0.6740	-1.15	20.03	18.88	46.00	-27.12	AVG	
4	1.0700	9.80	20.12	29.92	56.00	-26.08	QP	
5	1.2380	-2.11	20.12	18.01	46.00	-27.99	AVG	
6	1.3900	8.14	20.13	28.27	56.00	-27.73	QP	
7	2.0020	-2.74	20.14	17.40	46.00	-28.60	AVG	
8	2.0620	9.91	20.14	30.05	56.00	-25.95	QP	
9	3.7620	-2.93	20.18	17.25	46.00	-28.75	AVG	
10	4.7140	10.01	20.20	30.21	56.00	-25.79	QP	
11	4.8940	-3.26	20.20	16.94	46.00	-29.06	AVG	
12	29.9740	-3.08	20.27	17.19	50.00	-32.81	AVG	


Report No.: SZAWW190410002-01

FCC ID: P9M-JUNOLI60

Page13 of 49

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 21.4°C Hum.: 52%

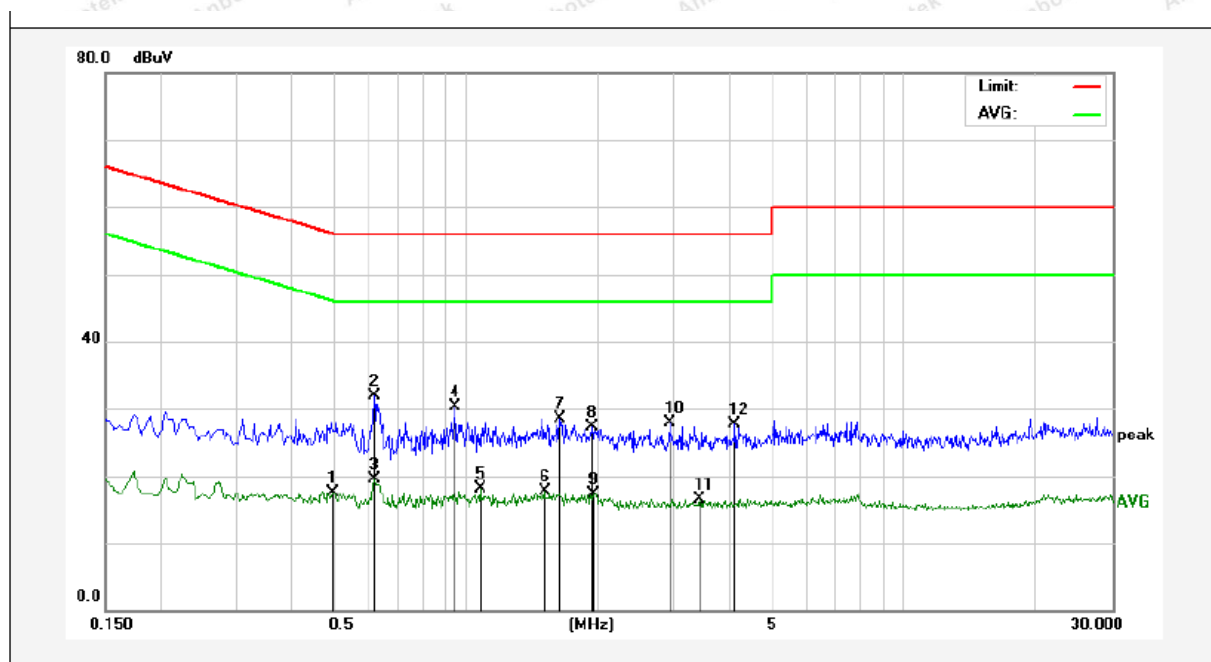

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4980	-2.44	19.98	17.54	46.03	-28.49	AVG	
2	0.6180	11.94	20.02	31.96	56.00	-24.04	QP	
3	0.6180	-0.58	20.02	19.44	46.00	-26.56	AVG	
4	0.9460	10.23	20.11	30.34	56.00	-25.66	QP	
5	1.0820	-2.01	20.12	18.11	46.00	-27.89	AVG	
6	1.5140	-2.51	20.13	17.62	46.00	-28.38	AVG	
7	1.6380	8.45	20.13	28.58	56.00	-27.42	QP	
8	1.9420	7.20	20.14	27.34	56.00	-28.66	QP	
9	1.9580	-2.87	20.14	17.27	46.00	-28.73	AVG	
10	2.9180	7.71	20.16	27.87	56.00	-28.13	QP	
11	3.4300	-3.58	20.17	16.59	46.00	-29.41	AVG	
12	4.1140	7.55	20.18	27.73	56.00	-28.27	QP	


Report No.: SZAWW190410002-01

FCC ID: P9M-JUNOLI60

Page 14 of 49

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 21.4°C Hum.: 52%

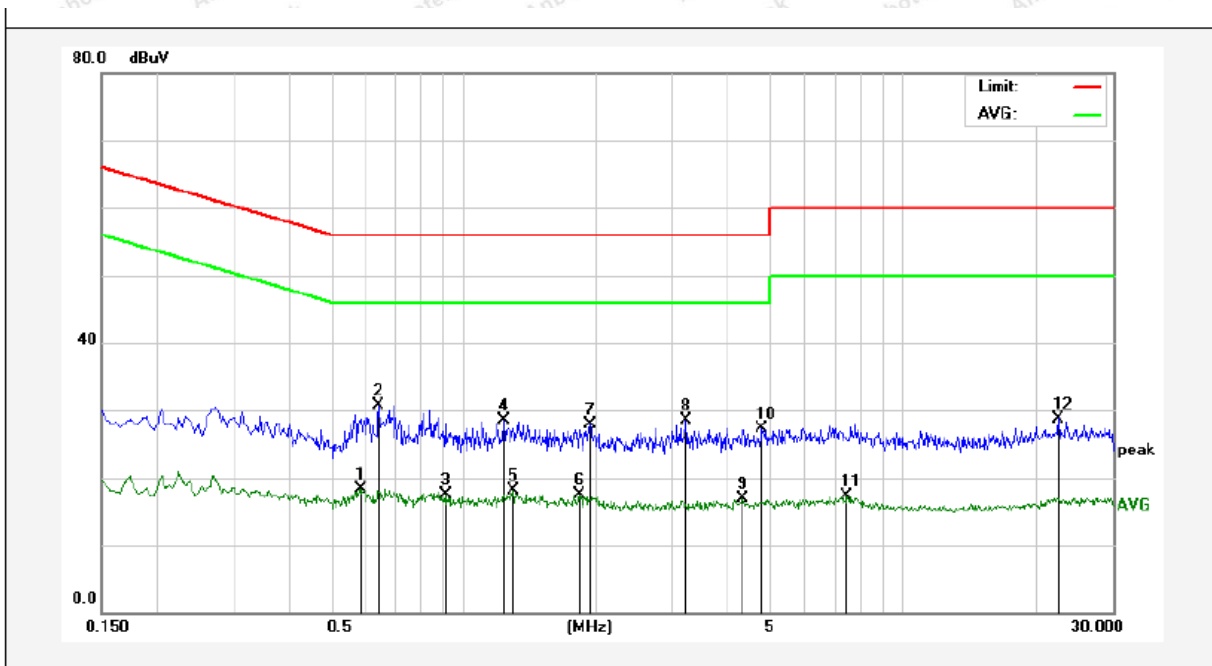

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.5820	-1.72	20.00	18.28	46.00	-27.72	AVG	
2	0.6419	10.71	20.02	30.73	56.00	-25.27	QP	
3	0.9100	-2.59	20.10	17.51	46.00	-28.49	AVG	
4	1.2380	8.32	20.12	28.44	56.00	-27.56	QP	
5	1.2980	-2.09	20.13	18.04	46.00	-27.96	AVG	
6	1.8340	-2.56	20.14	17.58	46.00	-28.42	AVG	
7	1.9420	7.86	20.14	28.00	56.00	-28.00	QP	
8	3.2180	8.42	20.16	28.58	56.00	-27.42	QP	
9	4.2940	-3.21	20.19	16.98	46.00	-29.02	AVG	
10	4.7780	7.06	20.20	27.26	56.00	-28.74	QP	
11	7.4700	-2.96	20.27	17.31	50.00	-32.69	AVG	
12	22.5700	8.49	20.31	28.80	60.00	-31.20	QP	

4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
Test Limit	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1) The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
Test Limit	2400~2483.	50	-	114.0	Peak	3
	2400~2483.	50	-	94.0	Average	3
	2400~2483.	-	500	74.0	Peak	3
	2400~2483.	-	500	54.0	Average	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

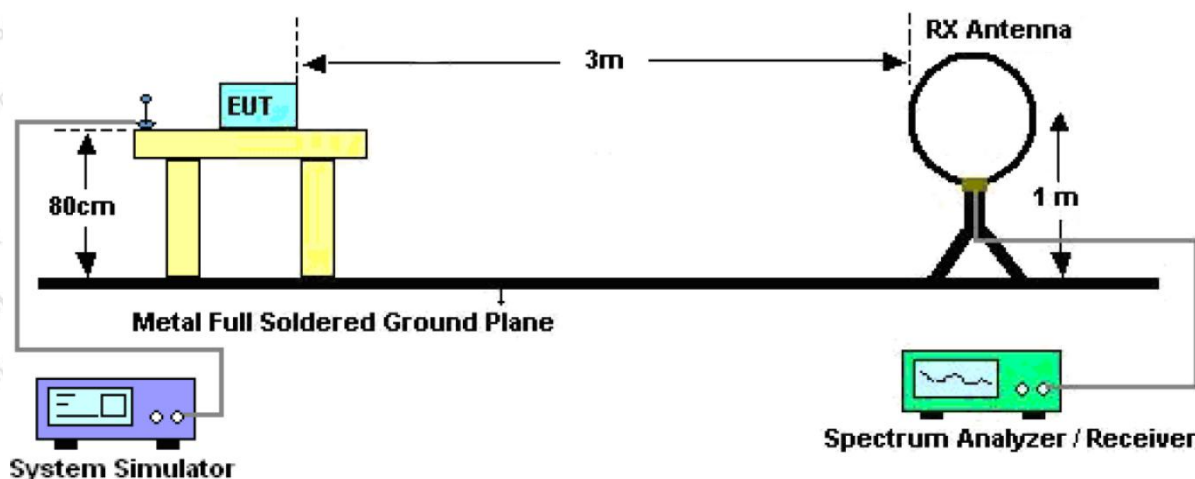


Figure 1. Below 30MHz

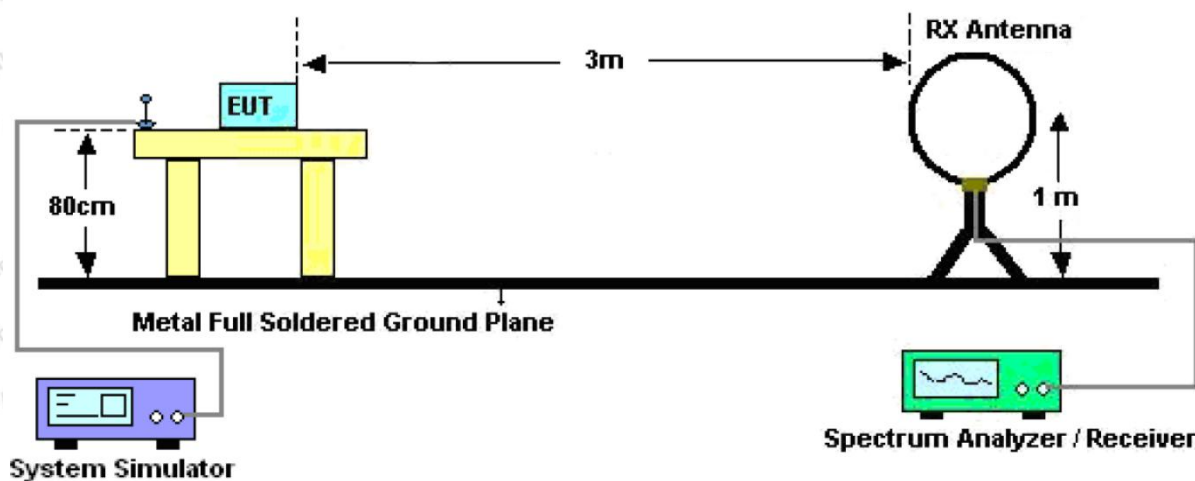


Figure 2. 30MHz to 1GHz

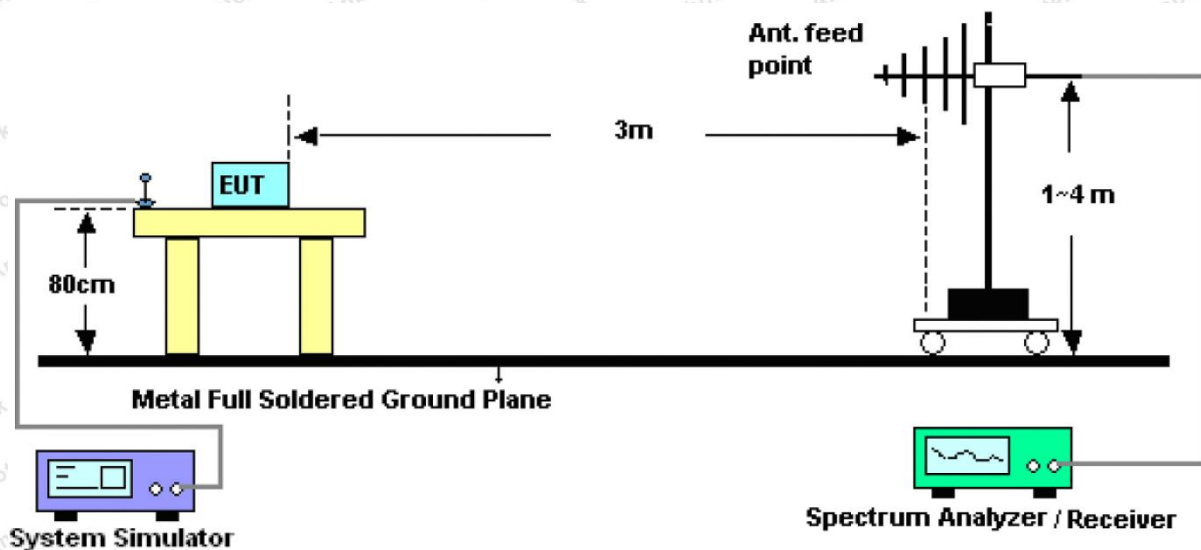


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the mode, and found the Middle channel which is the worst case, only the worst case is recorded in the report

Report No.: SZAWW190410002-01

FCC ID: P9M-JUNOLI60

Page 19 of 49

Test Results (30~1000MHz)

Job No.: SZAWW190410002 -01


Temp.(°C)/Hum.(%RH): 23.1°C/51%RH

Standard: FCC PART 15C

Power Source: DC 7.4V battery inside

Test Mode: Mode 2

Polarization: Horizontal

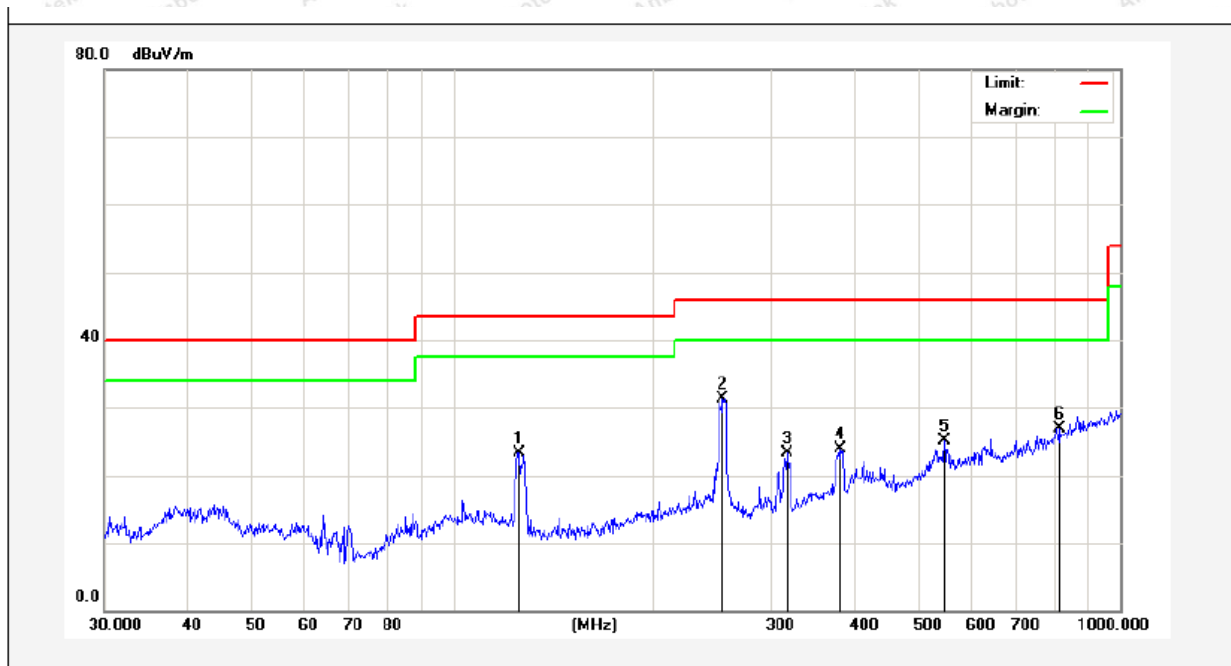

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	125.4457	45.86	-22.55	23.31	43.50	-20.19	QP	300	263	
2	253.8367	50.63	-19.26	31.37	46.00	-14.63	QP	300	201	
3	316.5890	39.80	-16.50	23.30	46.00	-22.70	QP	300	104	
4	381.2487	37.32	-13.43	23.89	46.00	-22.11	QP	300	336	
5	545.1826	36.27	-11.08	25.19	46.00	-20.81	QP	300	62	
6	813.1115	33.31	-6.33	26.98	46.00	-19.02	QP	300	100	



Report No.: SZAWW190410002-01

FCC ID: P9M-JUNOLI60

Page 20 of 49

Test Results (30~1000MHz)

Job No.: SZAWW190410002 -01


Temp.(°C)/Hum.(%RH): 23.1°C/51%RH

Standard: FCC PART 15C

Power Source: DC 7.4V battery inside

Test Mode: Mode 2

Polarization: Vertical

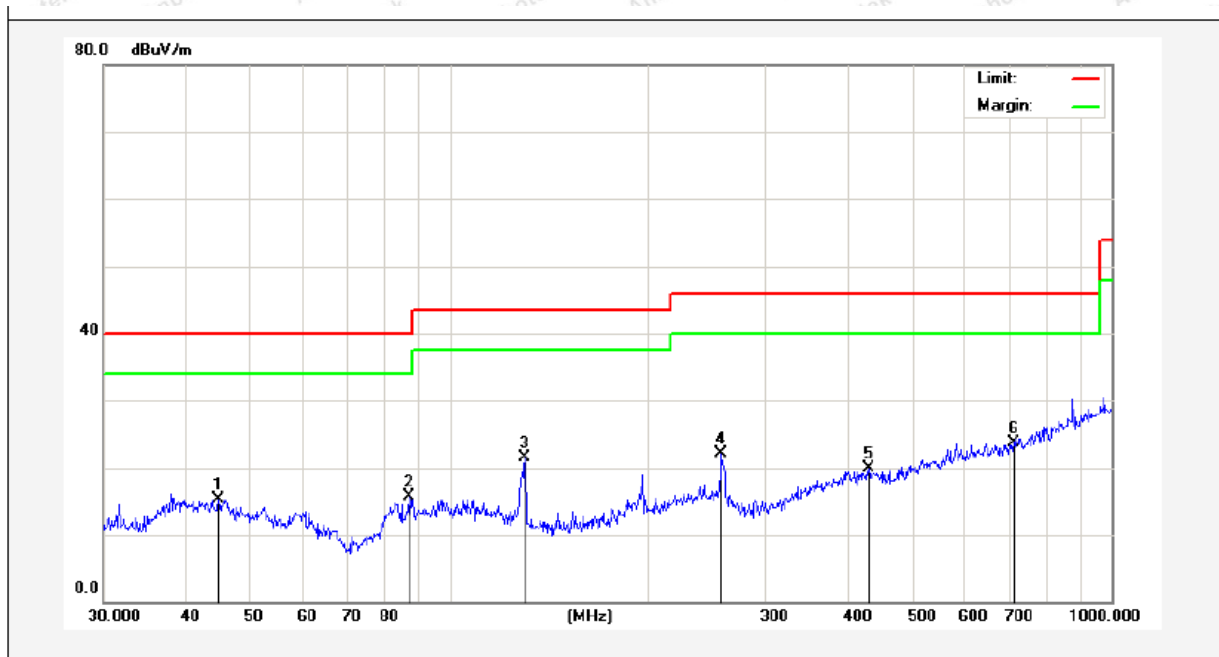

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	44.7433	30.03	-14.75	15.28	40.00	-24.72	QP	300	74	
2	86.8068	34.39	-18.71	15.68	40.00	-24.32	QP	300	142	
3	129.9226	39.39	-17.80	21.59	43.50	-21.91	QP	300	263	
4	257.4222	36.63	-14.58	22.05	46.00	-23.95	QP	300	314	
5	429.5228	31.14	-11.24	19.90	46.00	-26.10	QP	300	200	
6	711.6734	31.94	-8.14	23.80	46.00	-22.20	QP	300	300	



Test Results (1GHz-25GHz)

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2409.0000	93.41	31.12	2.18	35.33	91.38	114.00	-22.62	V	Peak
2409.0000	84.51	31.12	2.18	35.33	82.48	94.00	-11.52	V	AVG
4818.0000	47.63	34.01	2.58	34.65	49.57	74.00	-24.43	V	Peak
4818.0000	41.82	34.01	2.58	34.65	43.76	54.00	-10.24	V	AVG
7227.0000	43.48	36.16	2.97	35.07	47.54	74.00	-26.46	V	Peak
7227.0000	34.96	36.16	2.97	35.07	39.02	54.00	-14.98	V	AVG
9636.0000	*								
12045.0000	*								
14454.0000	*								
16863.0000	*								
2409.0000	90.35	31.12	2.18	35.33	88.32	114.00	-25.68	H	Peak
2409.0000	82.27	31.12	2.18	35.33	80.24	94.00	-13.76	H	AVG
4818.0000	44.59	34.01	2.58	34.65	46.53	74.00	-27.47	H	Peak
4818.0000	37.77	34.01	2.58	34.65	39.71	54.00	-14.29	H	AVG
7227.0000	40.06	36.16	2.97	35.07	44.12	74.00	-29.88	H	Peak
7227.0000	33.51	36.16	2.97	35.07	37.57	54.00	-16.43	H	AVG
9636.0000	*								
12045.0000	*								
14454.0000	*								
16863.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH17 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2441.0000	92.41	31.12	2.20	34.51	91.22	114.00	-22.78	V	Peak
2441.0000	87.48	31.22	2.20	34.51	86.39	94.00	-7.61	V	AVG
4882.0000	47.21	34.98	2.49	34.14	50.54	74.00	-23.46	V	Peak
4882.0000	41.41	34.98	2.49	34.14	44.74	54.00	-9.26	V	AVG
7323.0000	38.24	36.01	3.01	34.56	42.70	74.00	-31.30	V	Peak
7323.0000	33.75	36.01	3.01	34.56	38.21	54.00	-15.79	V	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								
2441.0000	89.73	31.12	2.20	34.51	88.54	114.00	-25.46	H	Peak
2441.0000	78.44	31.12	2.20	34.51	77.25	94.00	-16.75	H	AVG
4882.0000	42.51	34.98	2.49	34.14	45.84	74.00	-28.16	H	Peak
4882.0000	36.28	34.98	2.49	34.14	39.61	54.00	-14.39	H	AVG
7323.0000	38.89	36.01	3.01	34.56	43.35	74.00	-30.65	H	Peak
7323.0000	32.51	36.01	3.01	34.56	36.97	54.00	-17.03	H	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH32 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2474.0000	96.01	31.65	2.23	36.07	93.82	114.00	-20.18	V	Peak
2474.0000	84.45	31.65	2.23	36.07	82.26	94.00	-11.74	V	AVG
4948.0000	50.21	35.06	2.60	34.93	52.94	74.00	-21.06	V	Peak
4948.0000	41.62	35.06	2.60	34.93	44.35	54.00	-9.65	V	AVG
7422.0000	37.93	36.19	3.12	35.11	42.13	74.00	-31.87	V	Peak
7422.0000	33.51	36.19	3.12	35.11	37.71	54.00	-16.29	V	AVG
9896.0000	*								
12370.0000	*								
14844.0000	*								
17318.0000	*								
2474.0000	91.67	31.65	2.23	36.07	89.48	114.00	-24.52	H	Peak
2474.0000	73.24	31.65	2.23	36.07	71.05	94.00	-22.95	H	AVG
4948.0000	44.25	35.06	2.60	34.93	46.98	74.00	-27.02	H	Peak
4948.0000	37.23	35.06	2.60	34.93	39.96	54.00	-14.04	H	AVG
7422.0000	42.65	36.19	3.12	35.11	46.85	74.00	-27.15	H	Peak
7422.0000	34.21	36.19	3.12	35.11	38.41	54.00	-15.59	H	AVG
9896.0000	*								
12370.0000	*								
14844.0000	*								
17318.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.


Radiated Band Edge:

Test Mode: CH01	Test channel: Lowest
Peak Value(Vertical)	Peak Value(Horizontal)
Average Value(Vertical)	Average Value(Horizontal)




Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

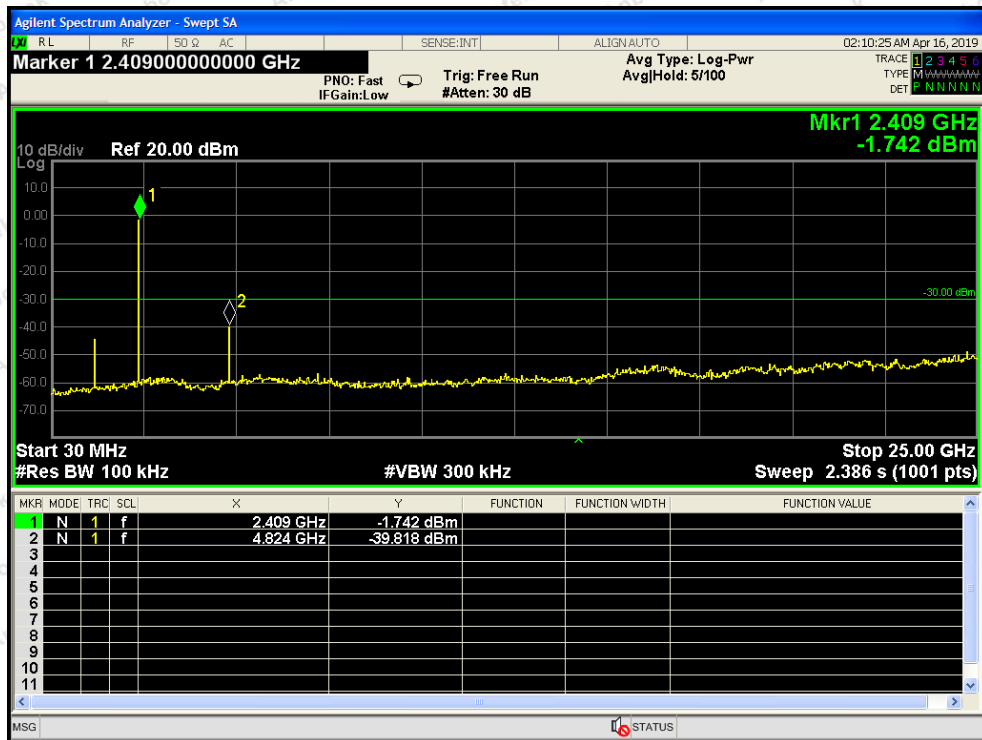


CH: Low

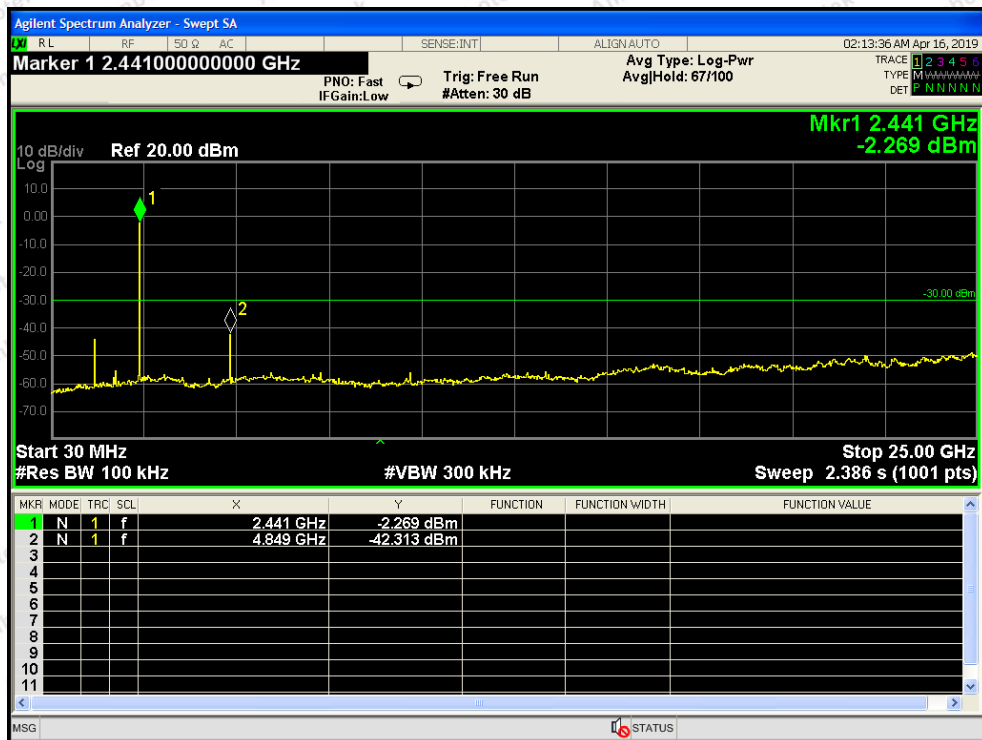

CH: Middle



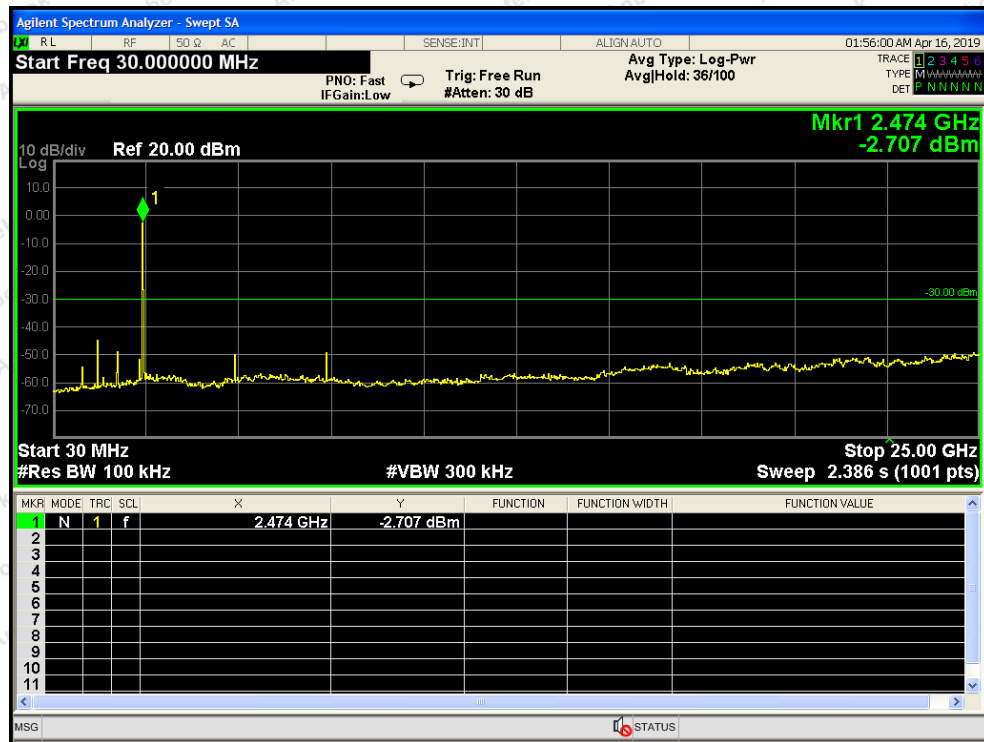


CH: High

5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

5.2. Test Setup



5.3. Test Procedure


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 RBW = 30kHz, VBW $\geq 3 \times$ RBW = 100kHz,
 Detector = Average
 Trace mode = Max hold.
 Sweep = auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data


Test Item : 20dB Bandwidth
 Test Voltage : DC 7.4V battery inside
 Test Result : PASS

Test Mode : Mode 1
 Temperature : 23.9℃
 Humidity : 54%RH


Frequency (MHz)	Bandwidth (kHz)	Result
2409MHZ	2803	PASS
2441MHZ	2477	PASS
2474MHZ	1648	PASS

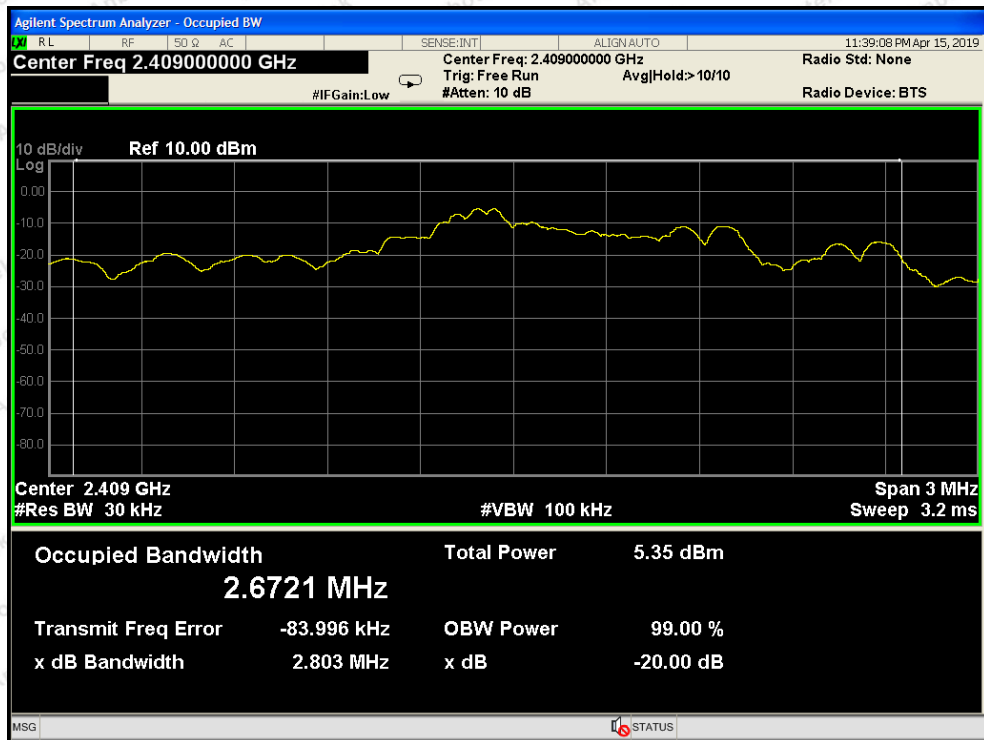

Test Mode: Low

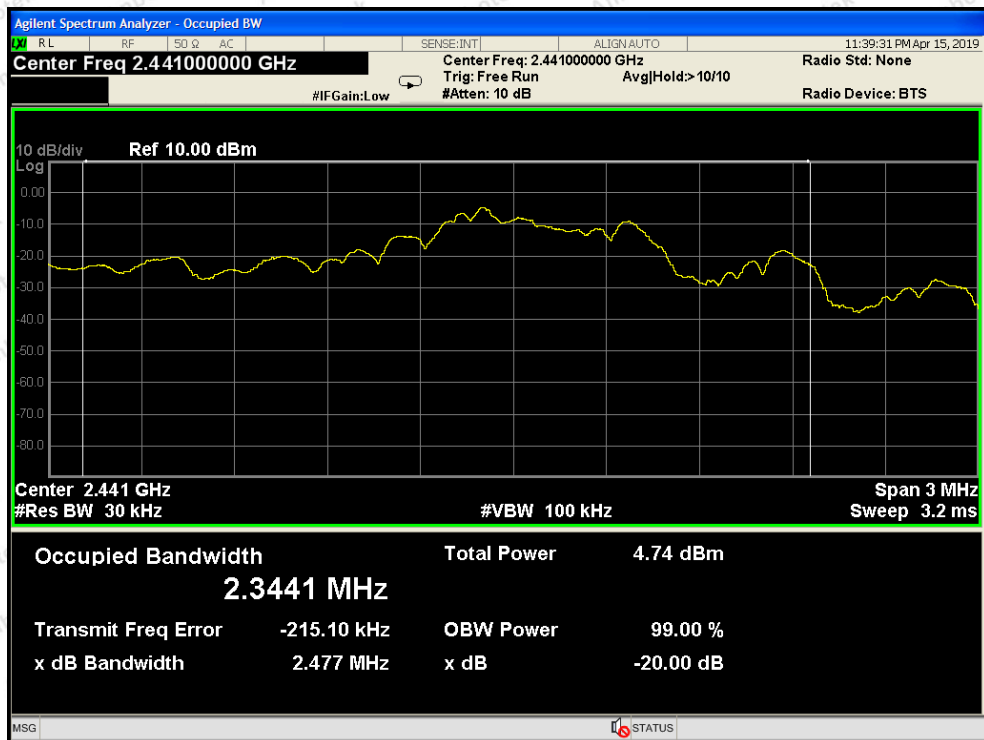

Test Mode: Middle

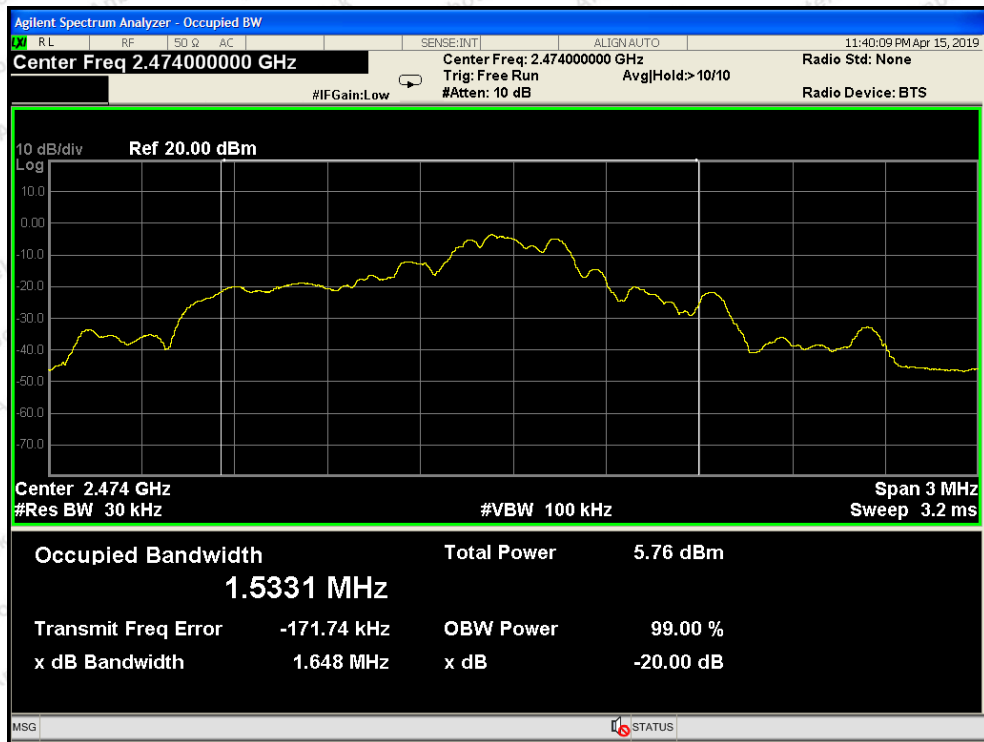

Test Mode: High


6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

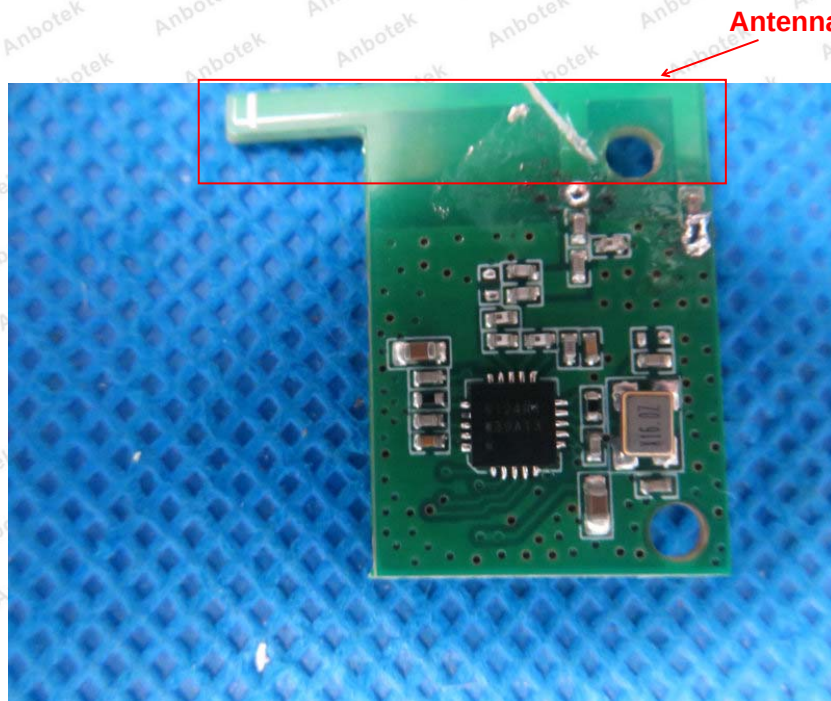


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Test



Photo of Radiation Emission Test

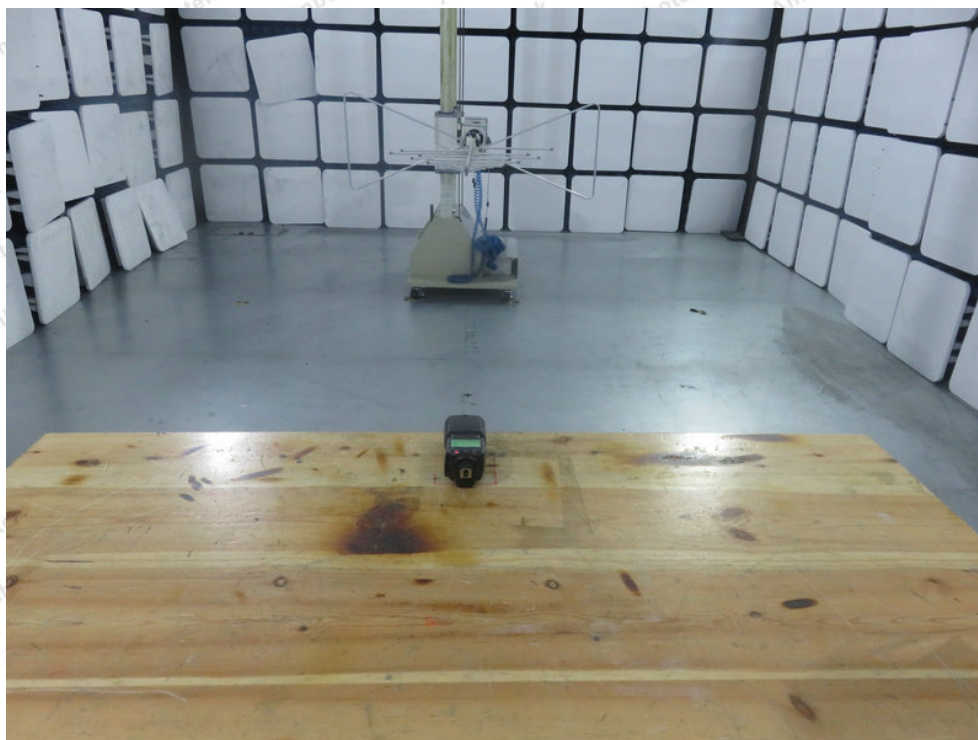




APPENDIX II -- EXTERNAL PHOTOGRAPH














APPENDIX III -- INTERNAL PHOTOGRAPH


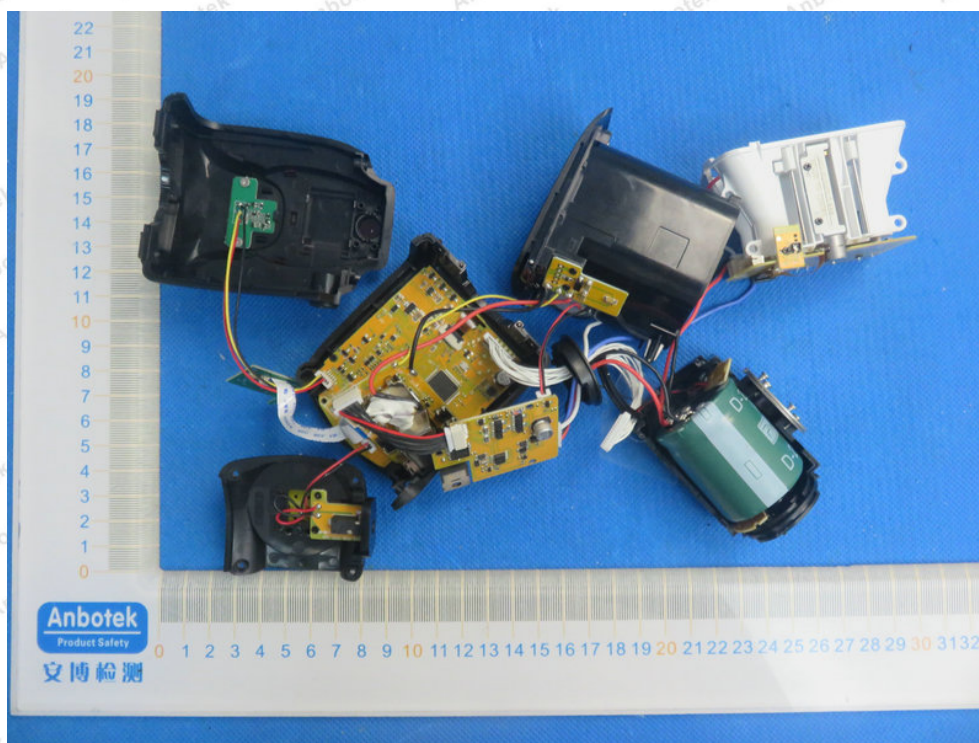


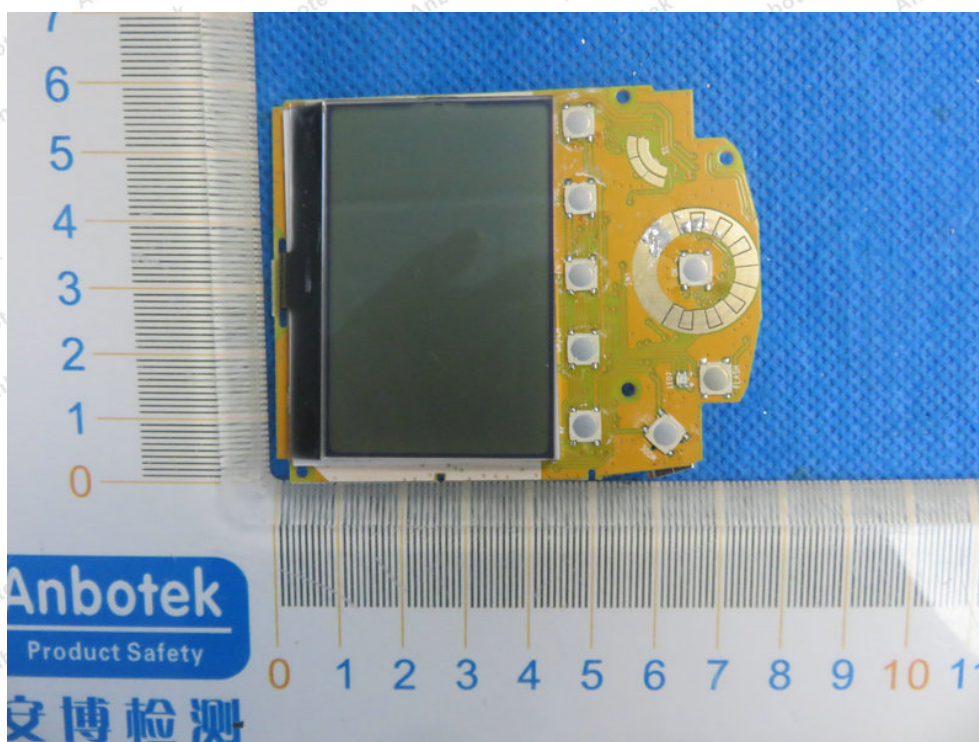
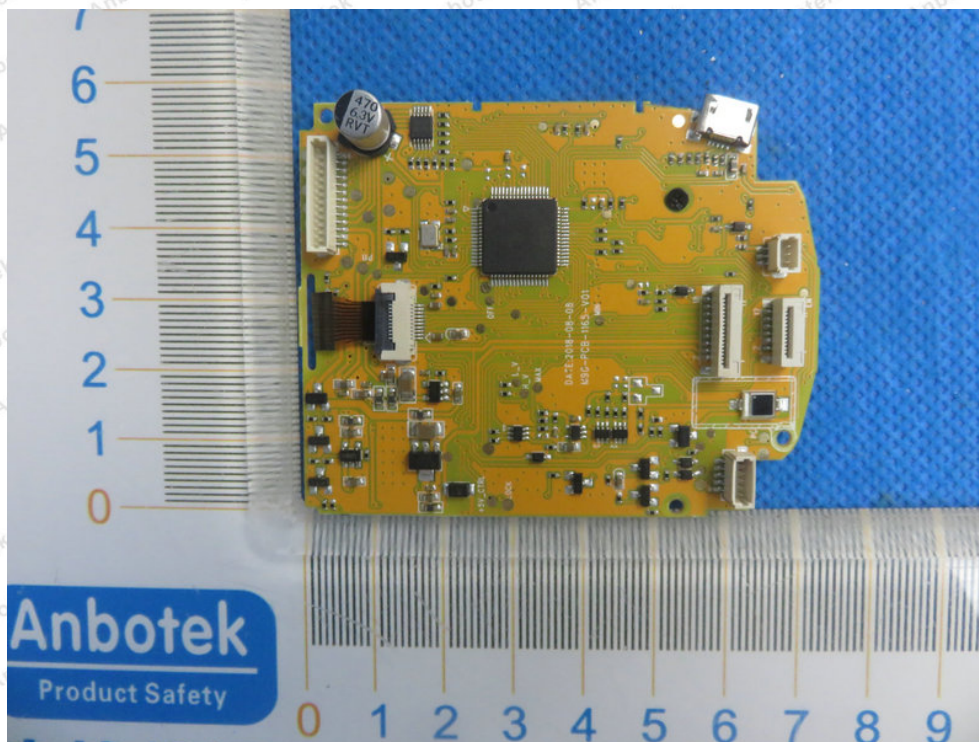


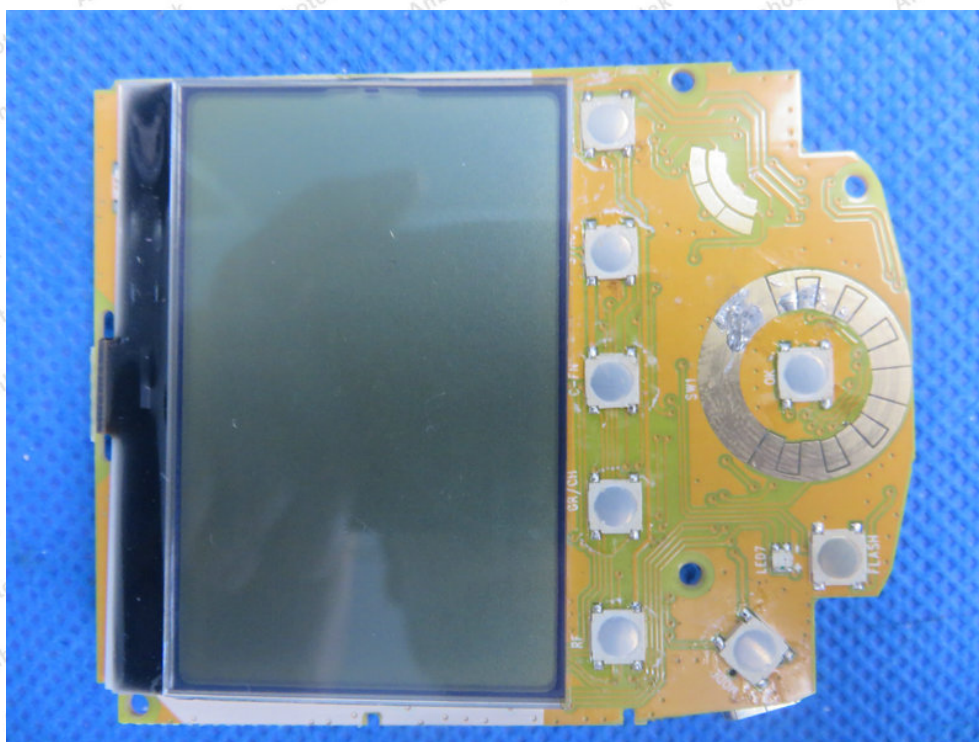
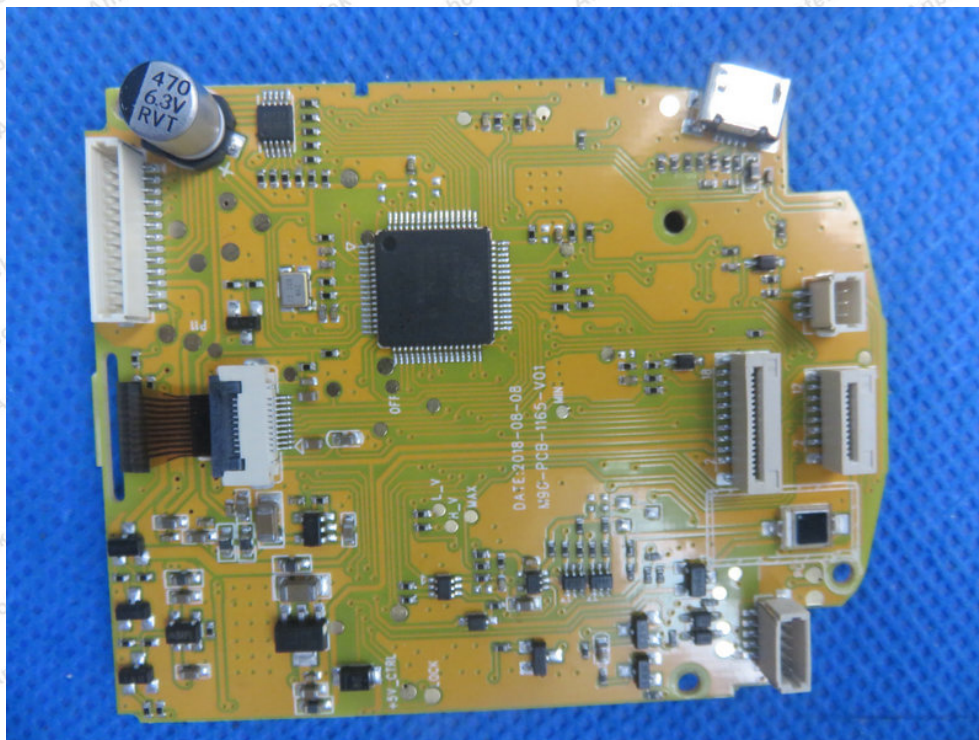


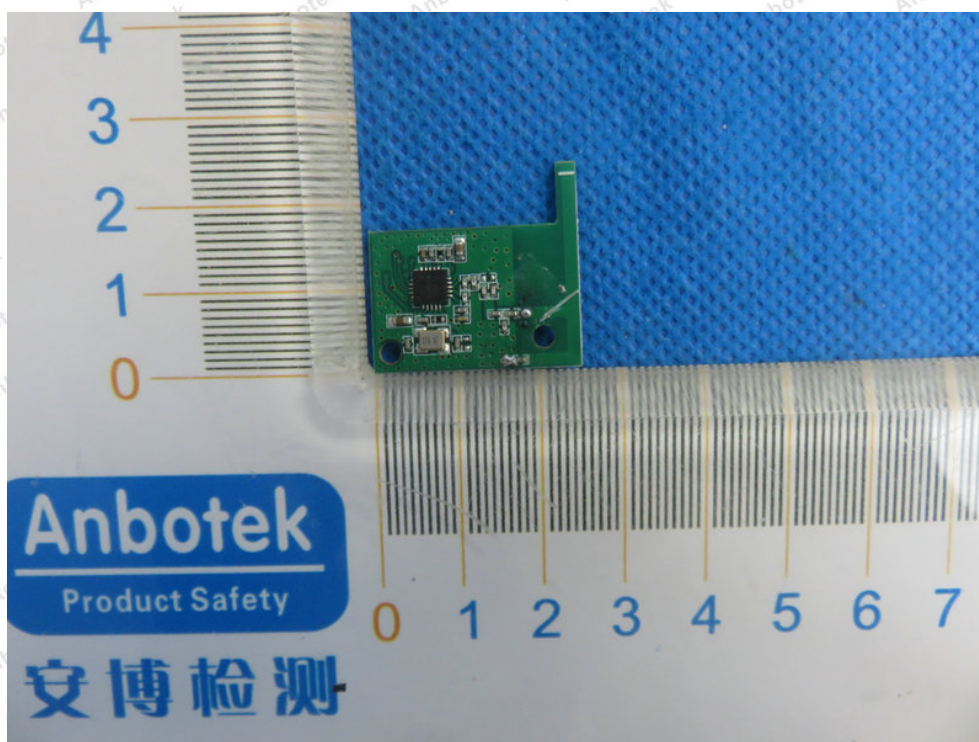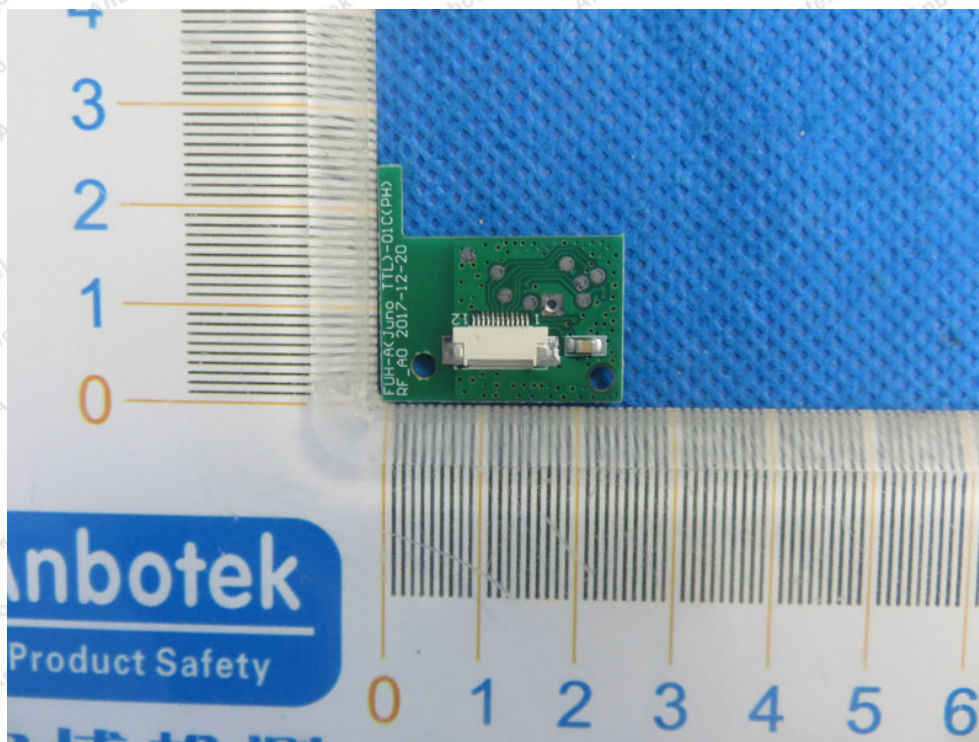



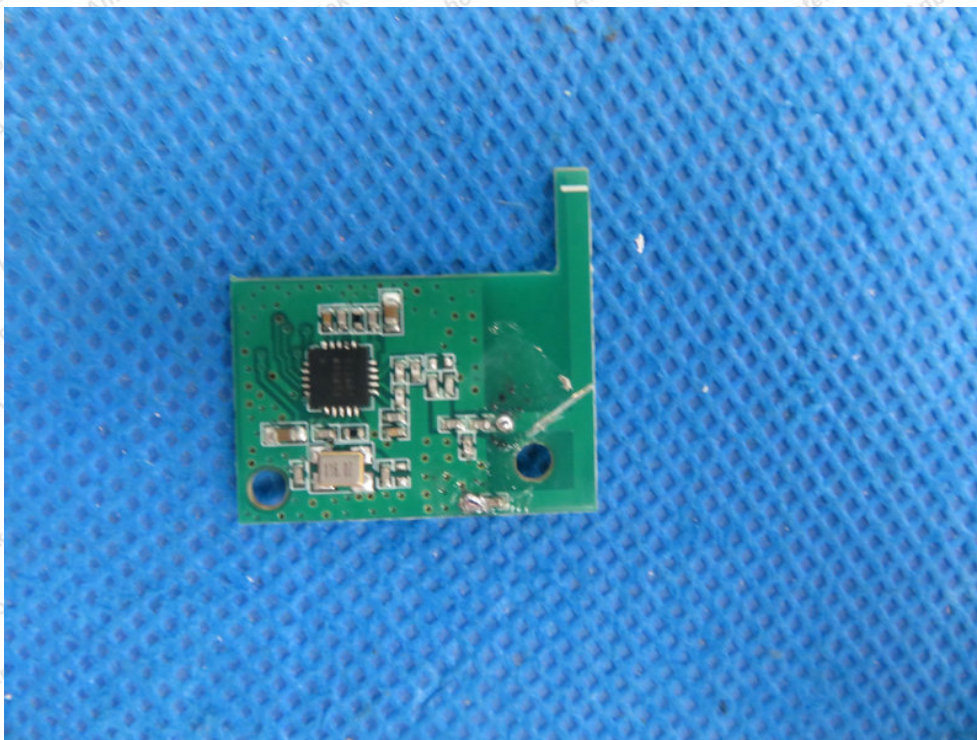


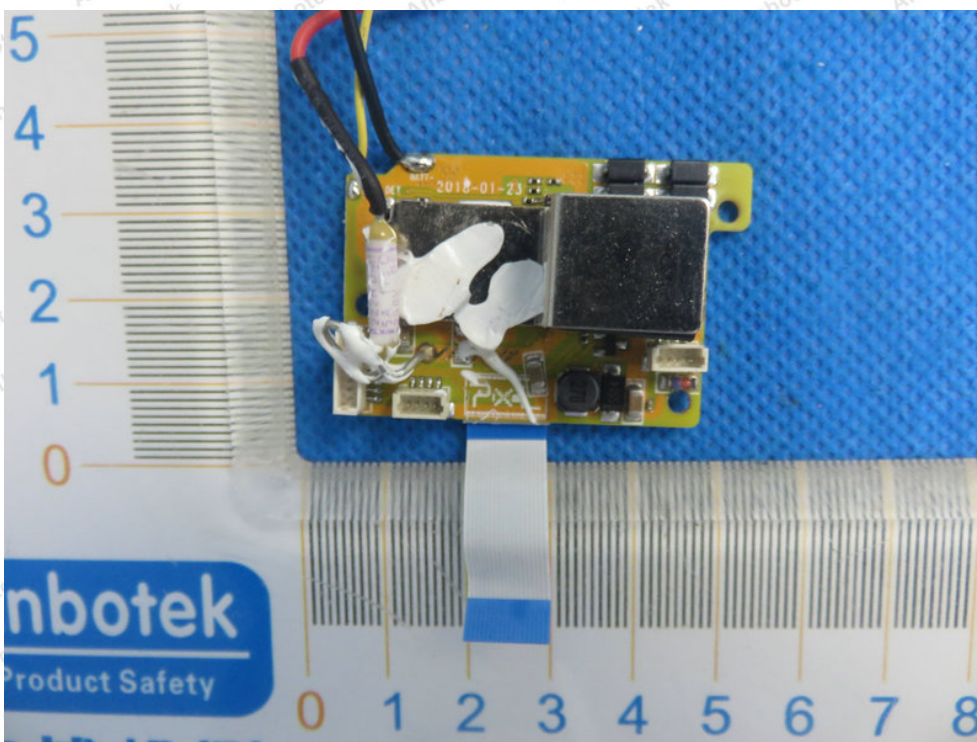
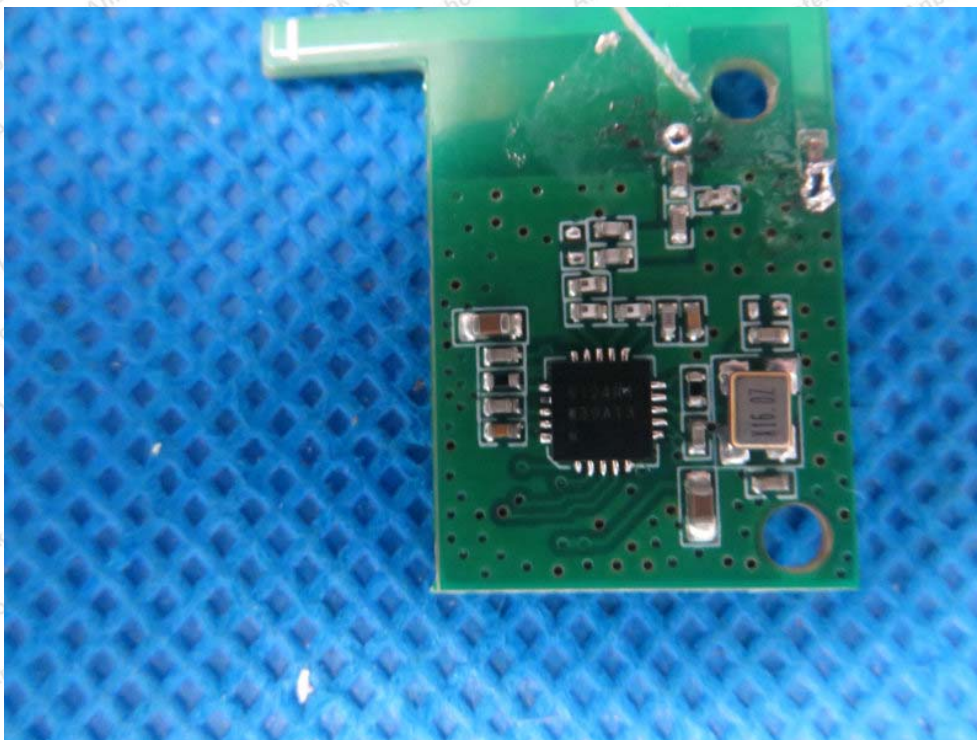


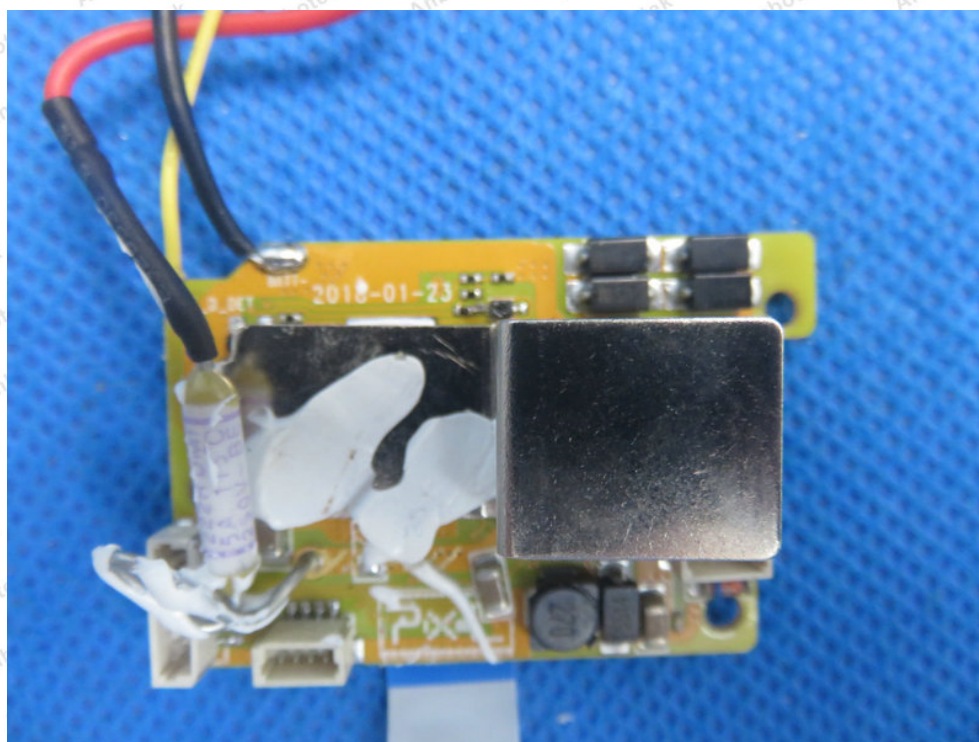
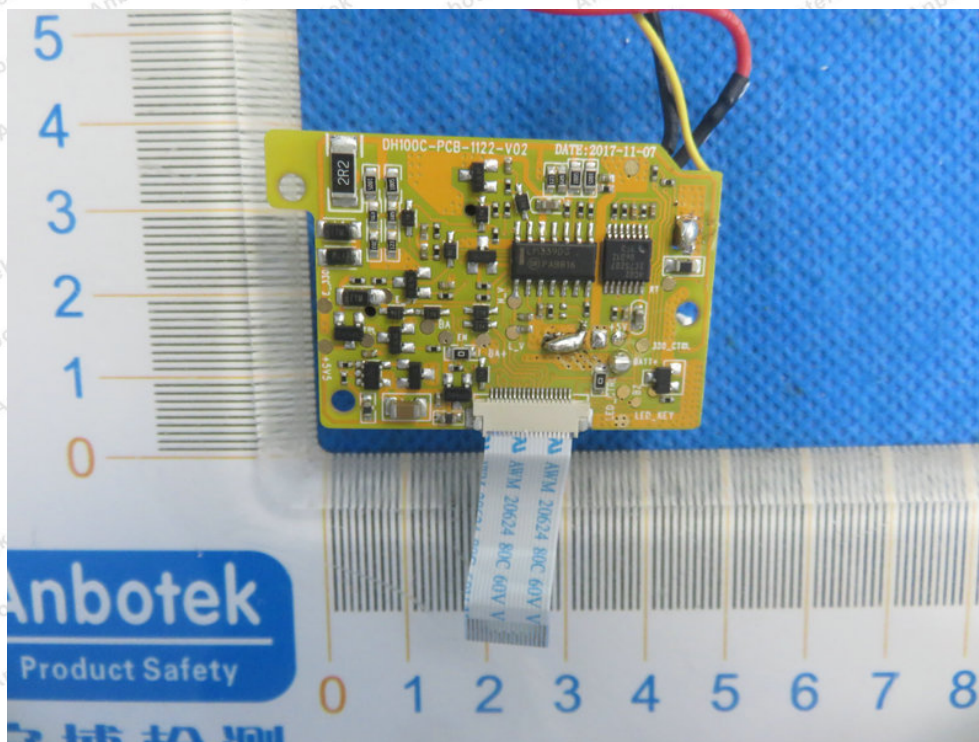


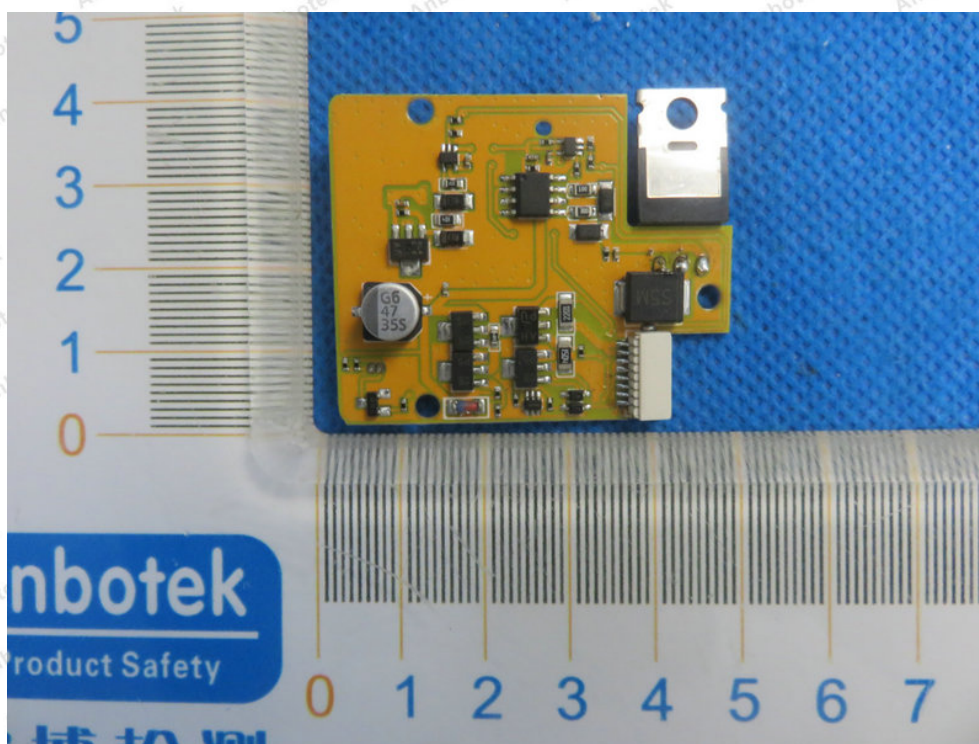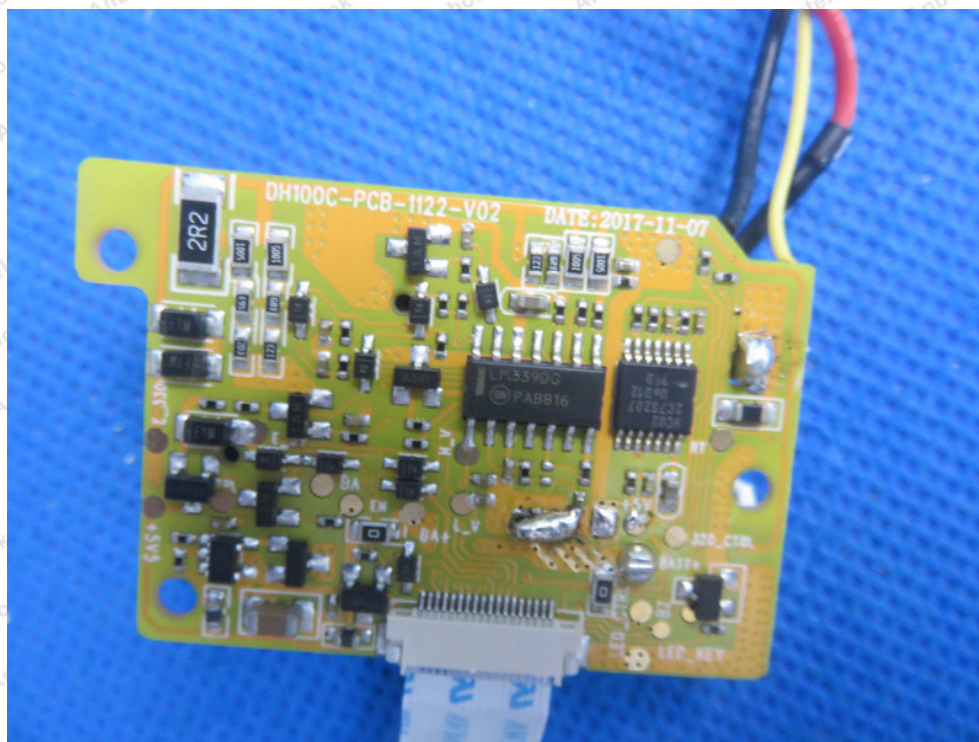

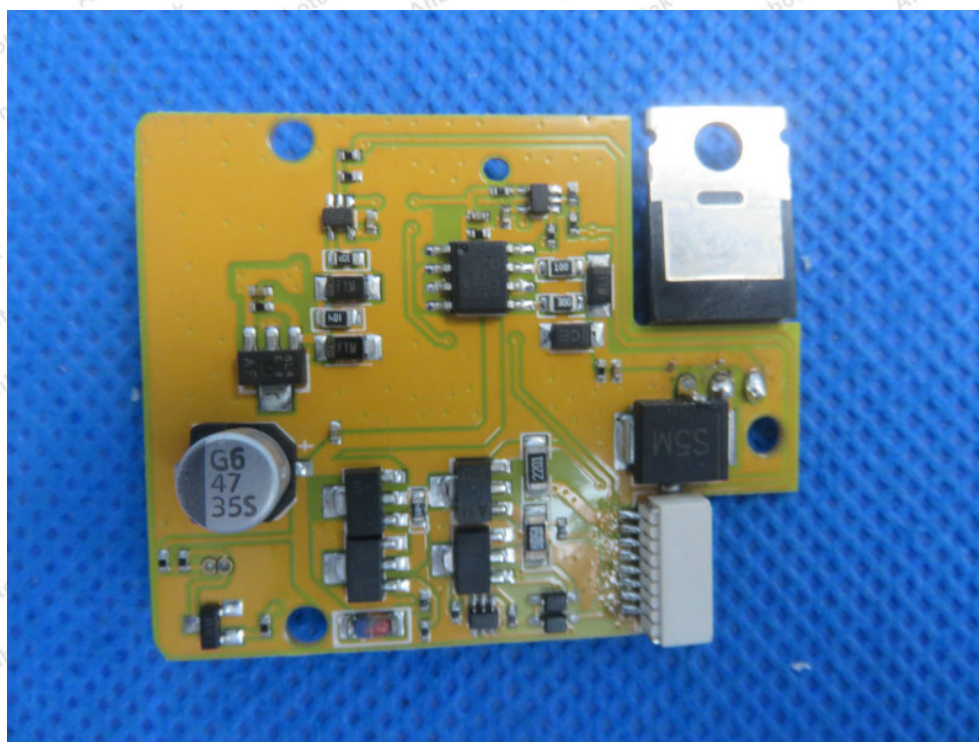

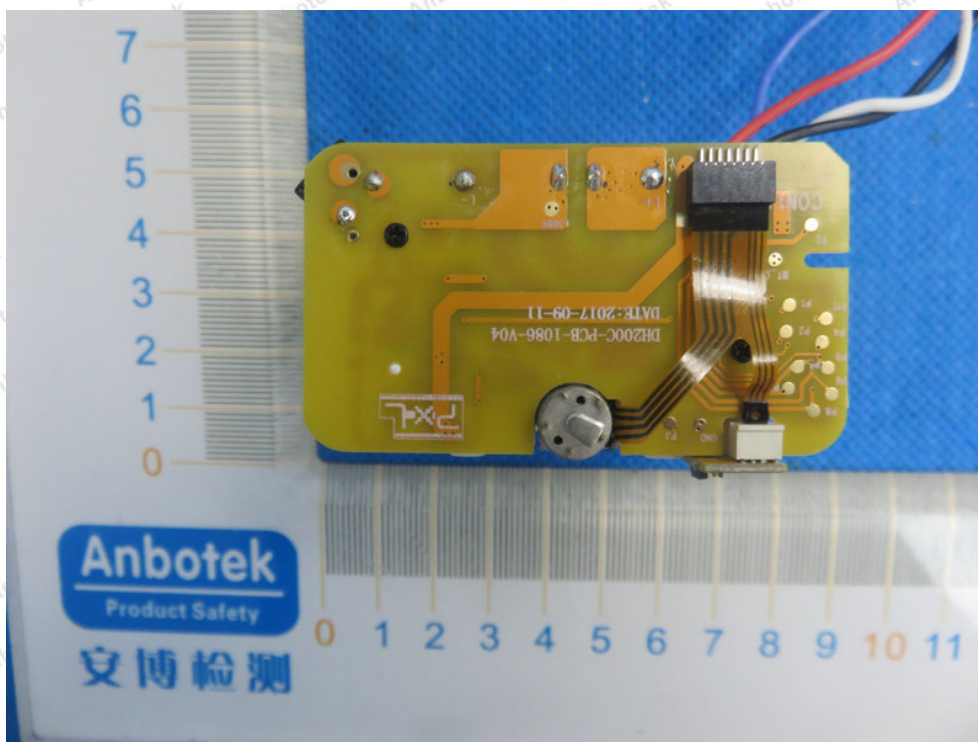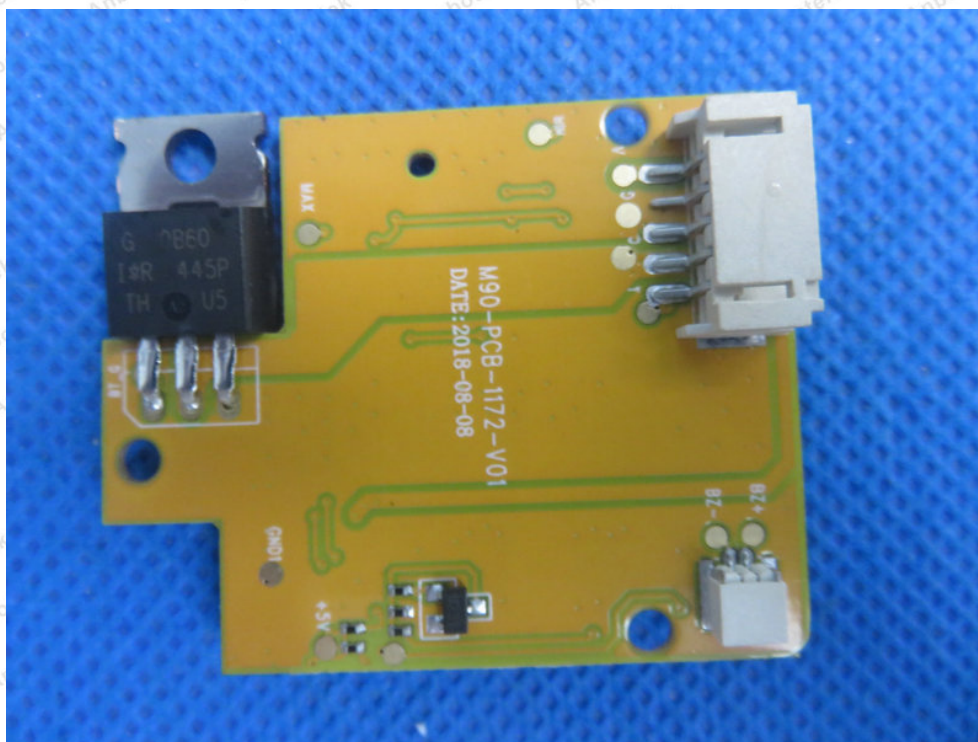

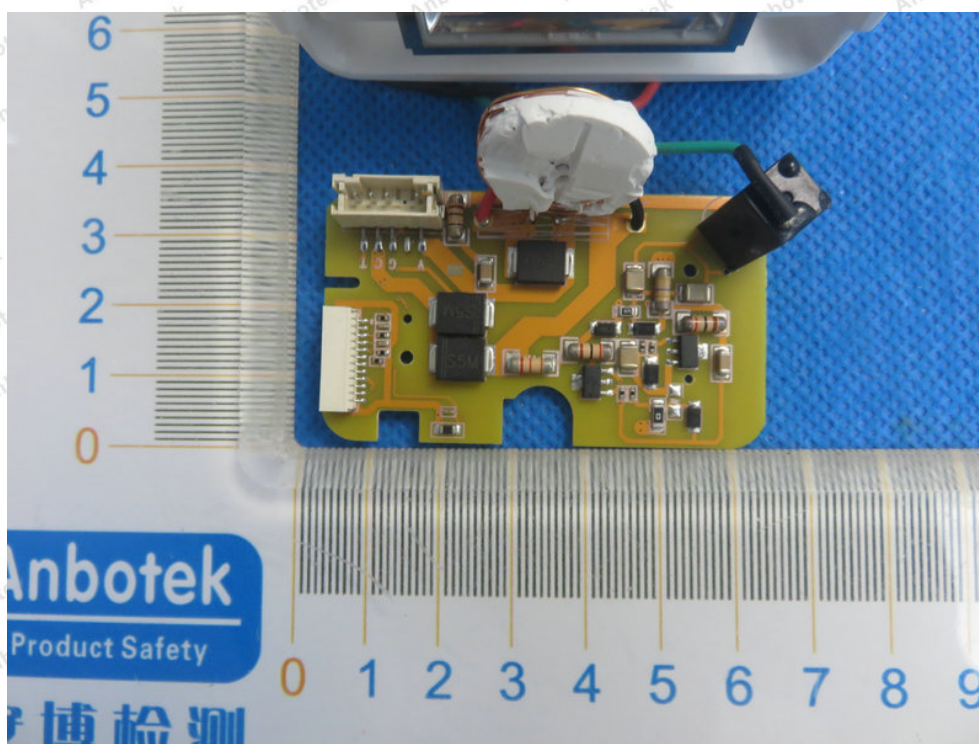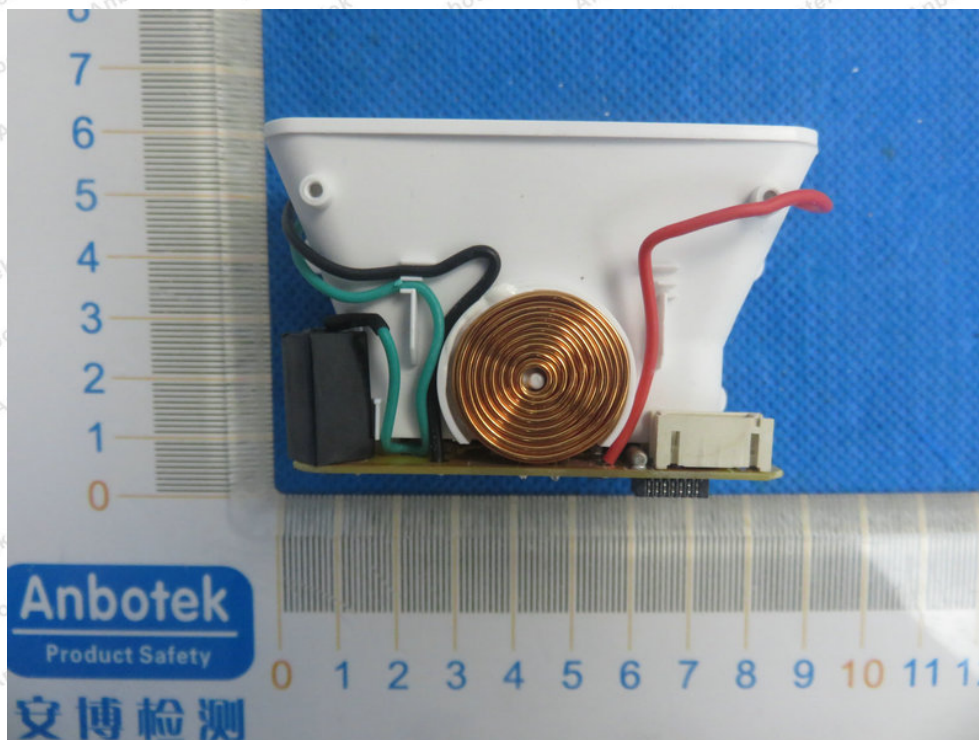

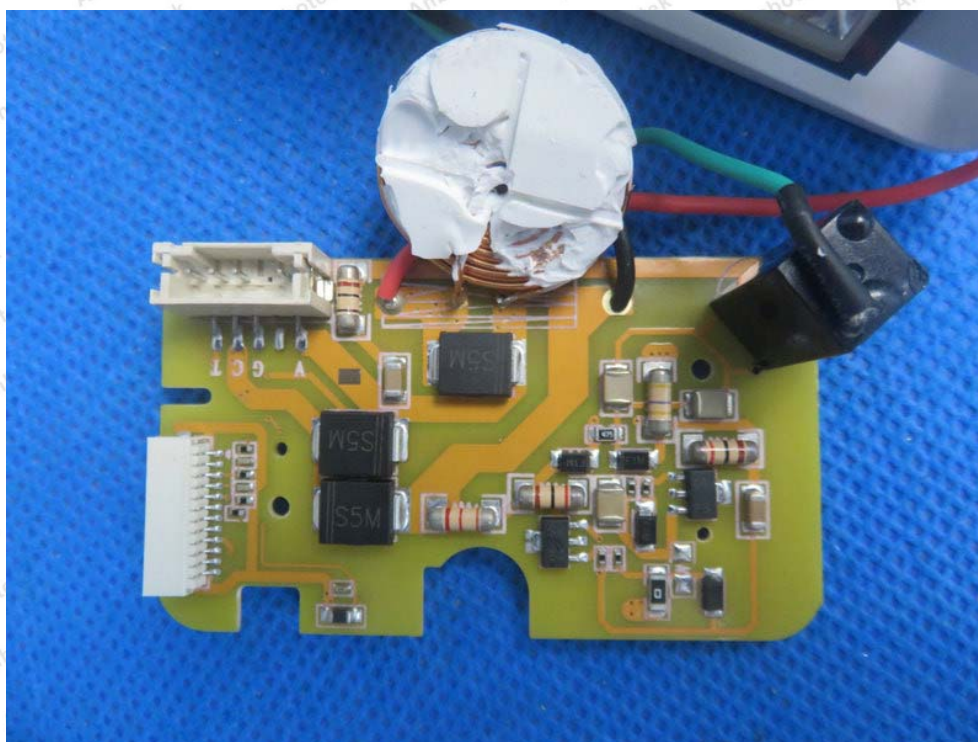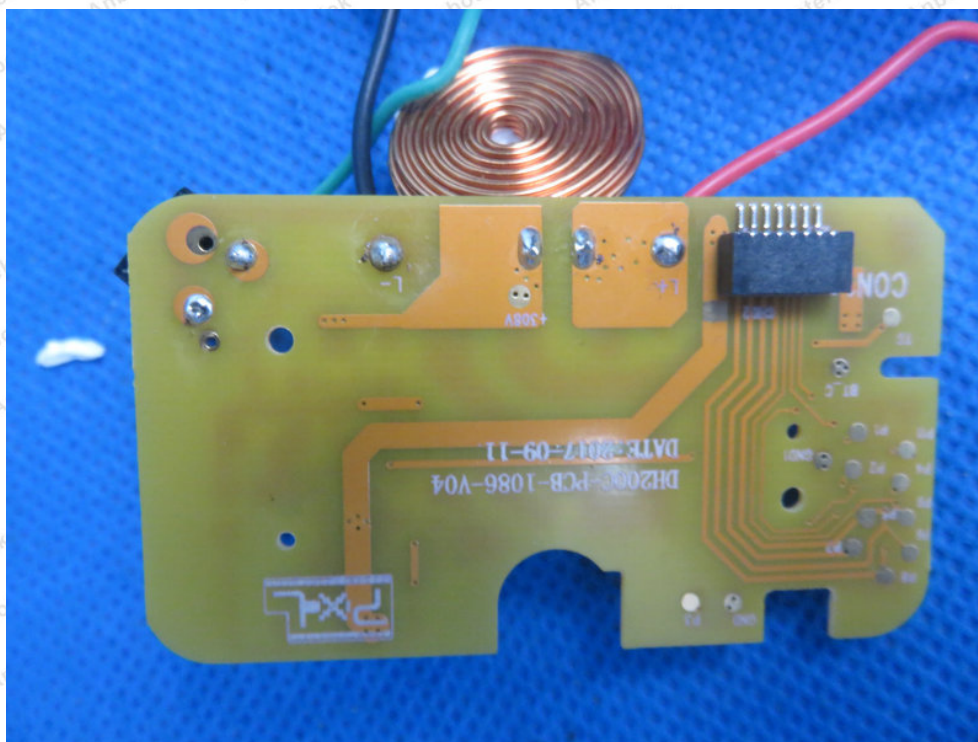

----- End of Report -----

Shenzhen Anbotech Compliance Laboratory Limited

Code: AB-RF-05-a

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com