



8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 – 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.



TEST EQUIPMENTS


The following test equipments are utilized in making the measurements contained in this report.

Open Area Test Site # 6				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TYPE N COAXIAL CABLE	SUHNER	CHA9513	6	NOV. 15, 2012
BI-LOG Antenna	Sunol	JB1	A070506-2	OCT. 03, 2012
LOOP ANTENNA	EMCO	6502	8905-2356	JUN. 10, 2012
Pre-Amplifier	HP	8447F	2944A03817	NOV. 23, 2012
EMI Receiver	R&S	ESVS10	833206/012	MAY 31, 2012
RF Cable	SUHNER	SUCOFLEX104PEA	20520/4PEA	NOV. 10, 2012
Horn Antenna	Com-Power	AH-118	071032	DEC. 27, 2012
Spectrum Analyzer	R&S	FSEK 30	835253/002	SEP. 29, 2012
Pre-Amplifier	MITEQ	AFS44-00108650-42-10 P-44	1205908	NOV. 23, 2012
3116 Double Ridge Antenna (40G)	ETS-LINDGREN	EMCO-003	00078	NOV. 14, 2012
Turn Table	Yo Chen	001	-----	N.C.R.
Antenna Tower	AR	TP1000A	309874	N.C.R.
Controller	CT	SC101	-----	N.C.R.
RF Swicth	E-INSTRUMENT TELH LTD	ERS-180A	EC1204141	N.C.R
Power Meter	Anritsu	ML2487A	6K00003888	MAY 30, 2012
Power Sensor	Anritsu	MA2491A	33265	MAY 30, 2012
Temp./Humidity Chamber	K.SON	THS-M1	242	AUG. 09, 2012
Signal Generator	HP	8673C	2938A00663	SEP. 12, 2012
Test S/W	e-3 (5.04303e)			




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

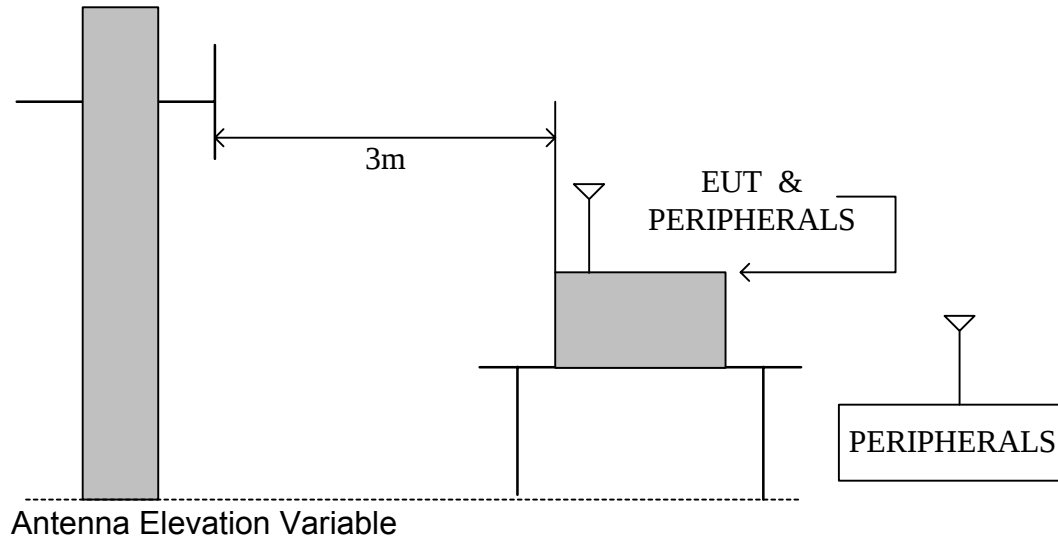

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

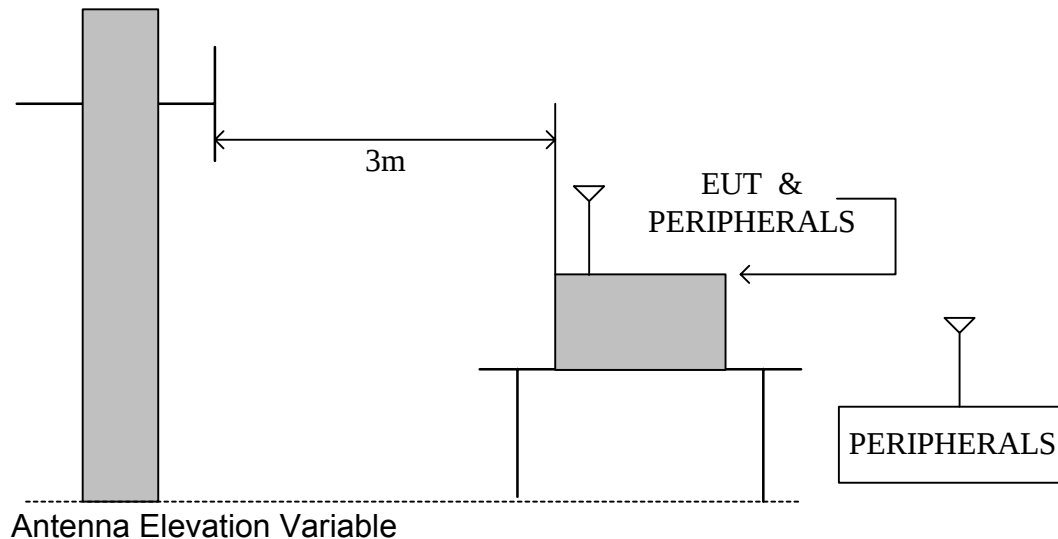



TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with KDB 558074 5.4 .

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. **No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)**

TEST RESULTS


No non-compliance noted.



8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Model No.	CDW561AM-U01	Test Mode	3G Mode
Environmental Conditions	24.5 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function:	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 1

(The chart below shows the highest readings taken from the final data.)

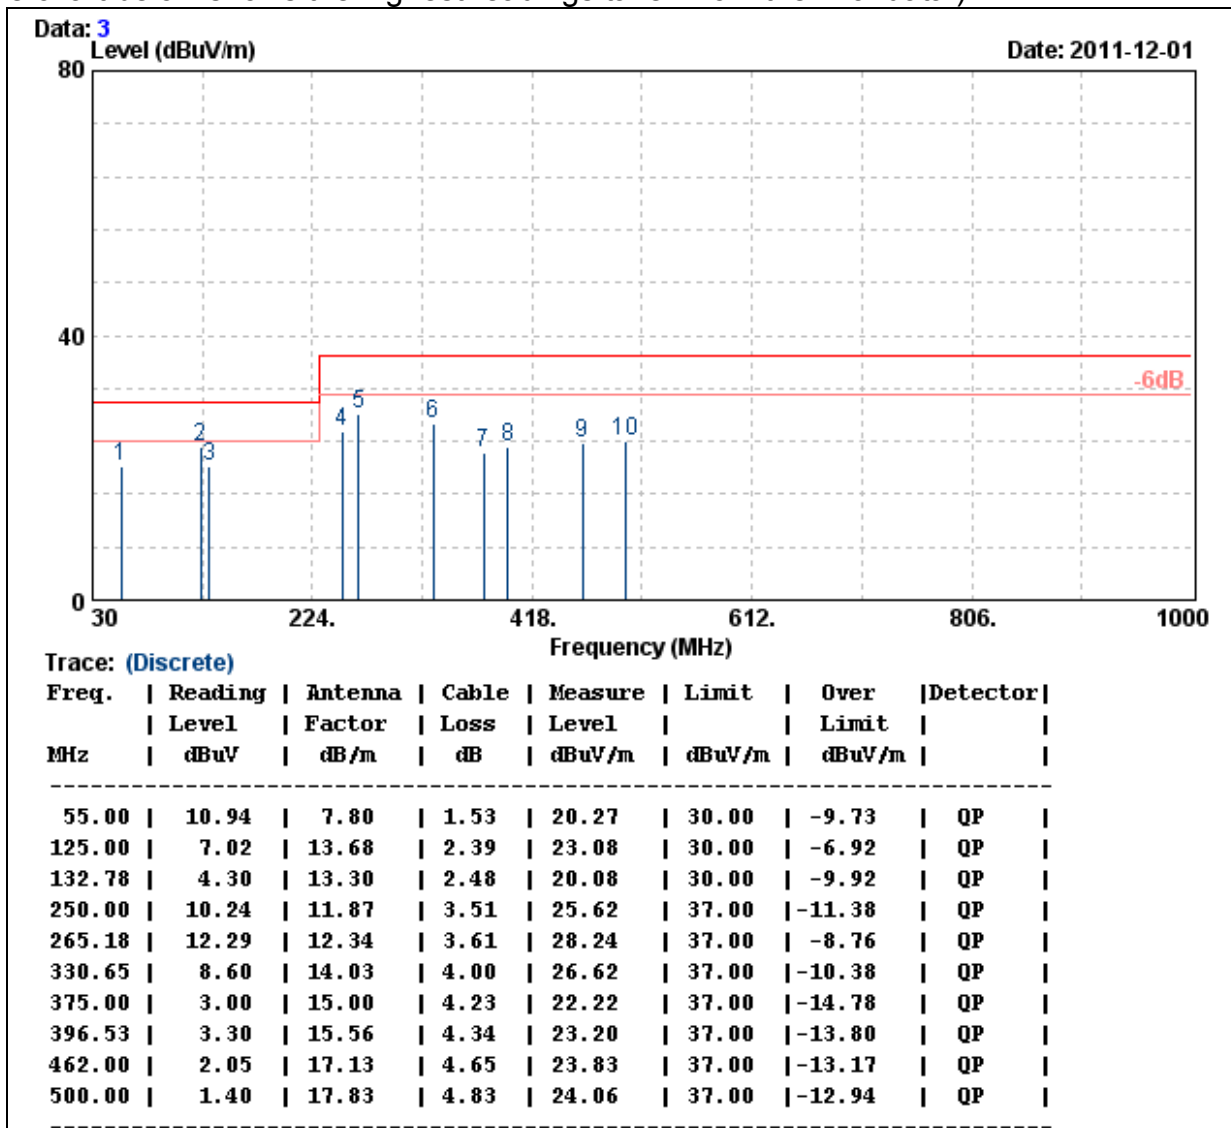


Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



Model No.	CDW561AM-U01	Test Mode	3G Mode
Environmental Conditions	24.5 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 1

(The chart below shows the highest readings taken from the final data.)

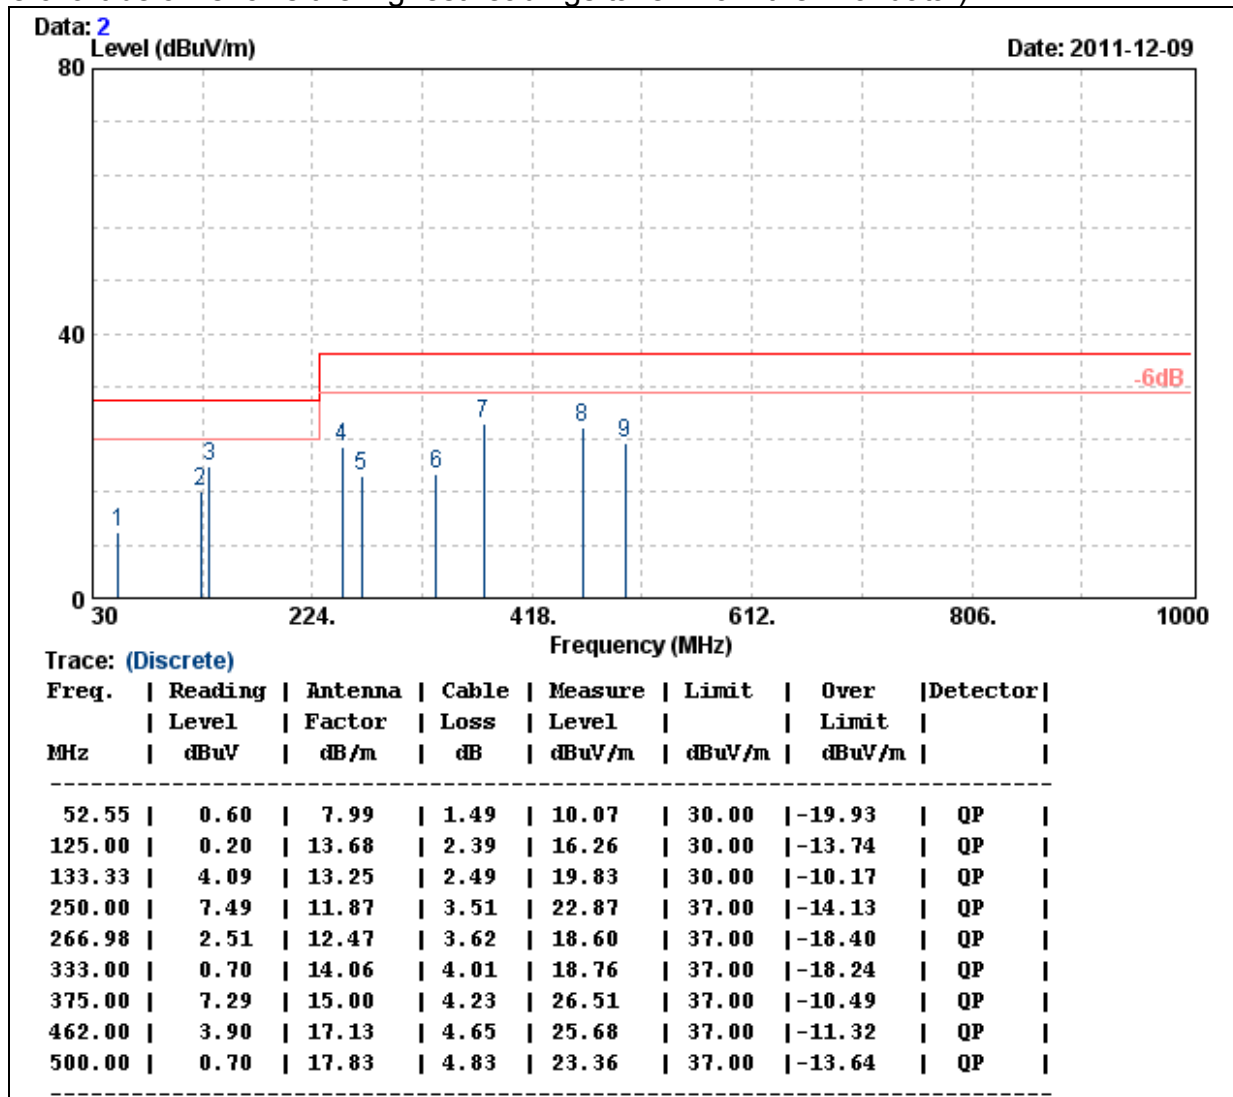


- Note: 1. QP= Quasi-peak Reading.
 2. The other emission levels were very low against the limit



Model No.	CDW561AM-U01	Test Mode	WAN Mode
Environmental Conditions	24.5 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function:	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 1

(The chart below shows the highest readings taken from the final data.)

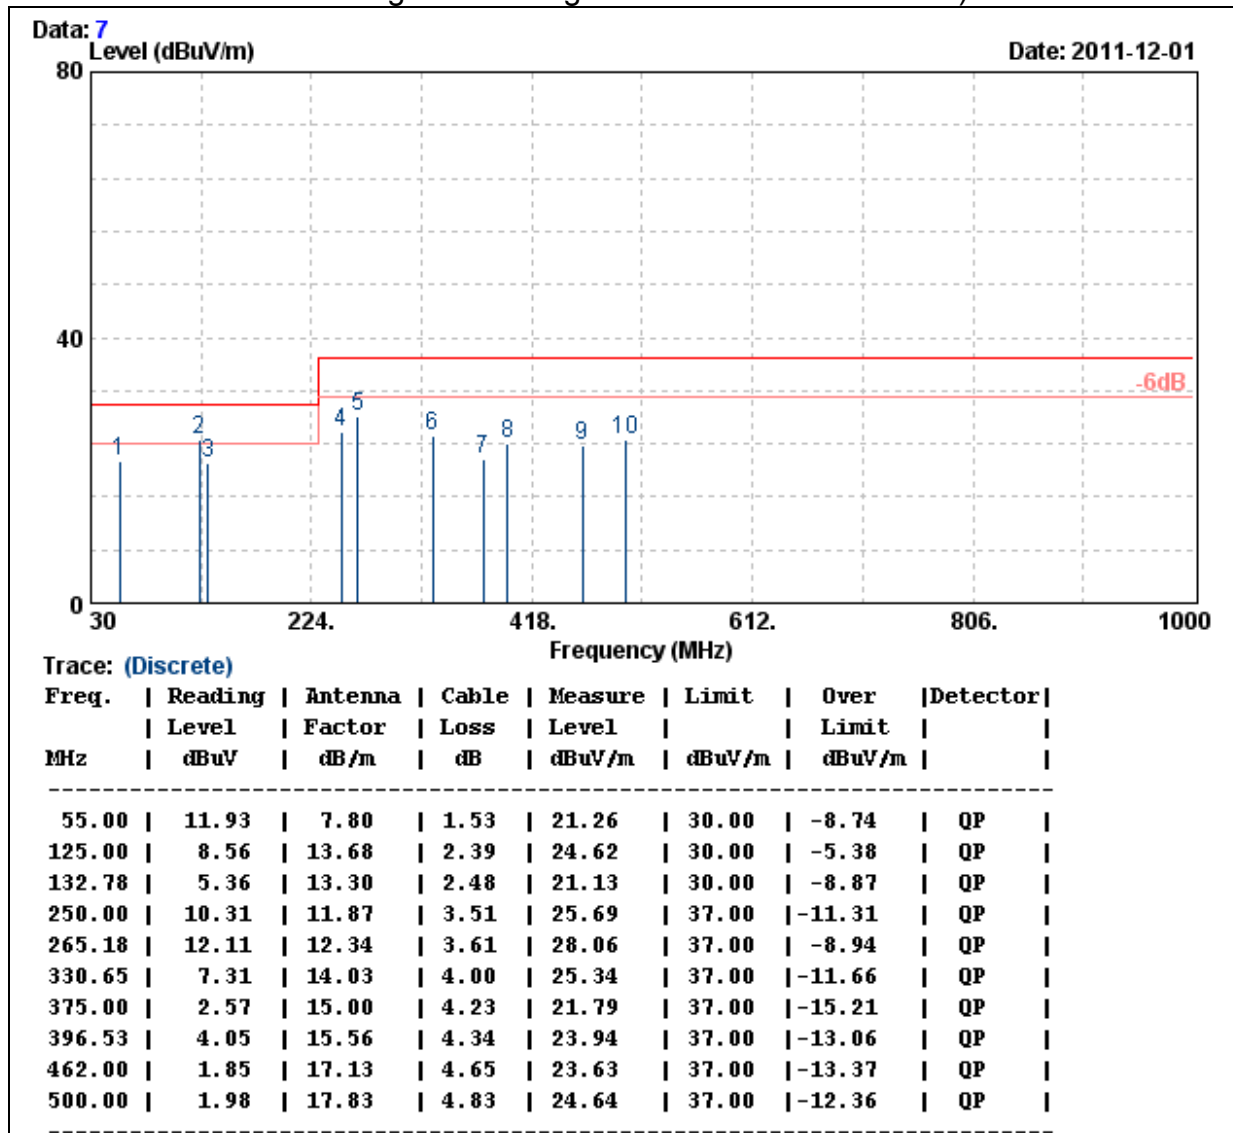


- Note: 1. QP= Quasi-peak Reading.
 2. The other emission levels were very low against the limit



Model No.	CDW561AM-U01	Test Mode	WAN Mode
Environmental Conditions	24.5 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 1

(The chart below shows the highest readings taken from the final data.)

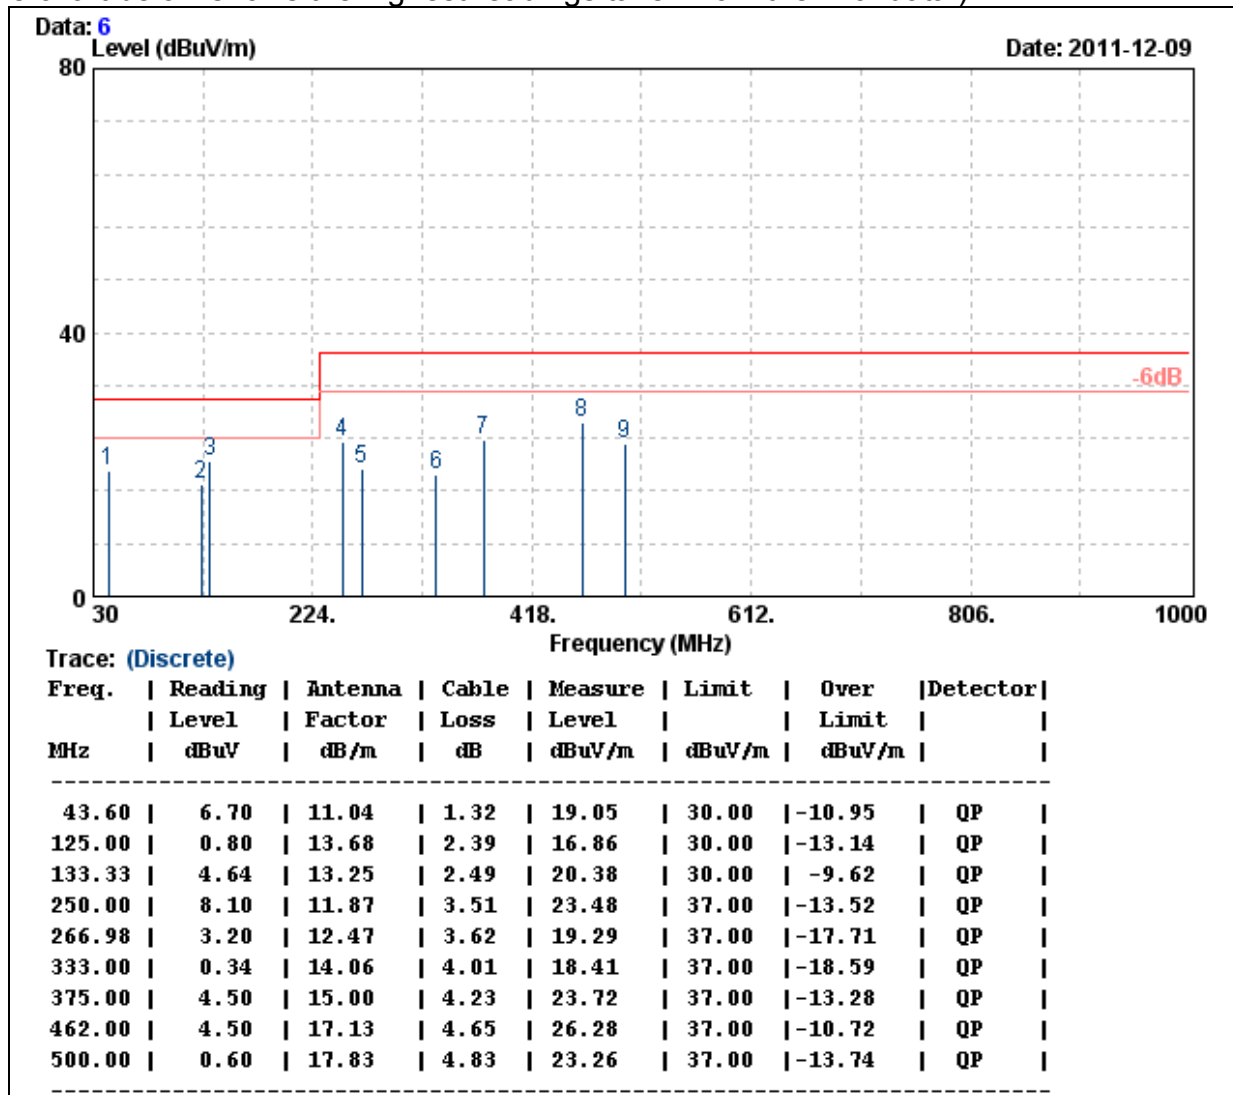


- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



Model No.	CDE560AM-001	Test Mode	WAN Mode
Environmental Conditions	26.3 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function:	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 2

(The chart below shows the highest readings taken from the final data.)

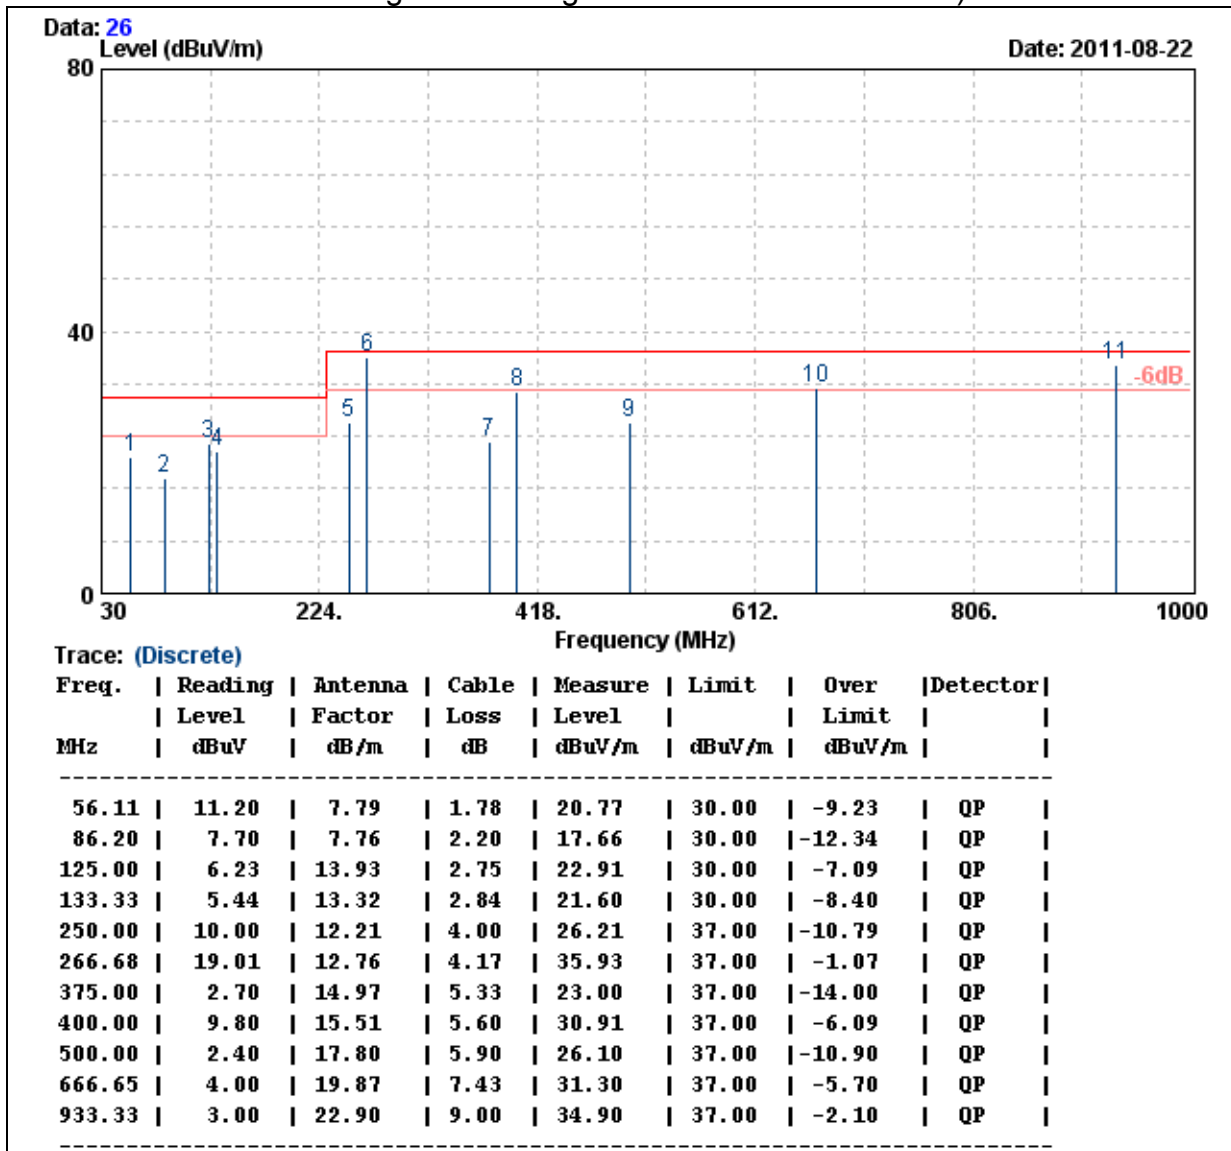


- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



Model No.	CDE560AM-001	Test Mode	WAN Mode
Environmental Conditions	26.3 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 2

(The chart below shows the highest readings taken from the final data.)

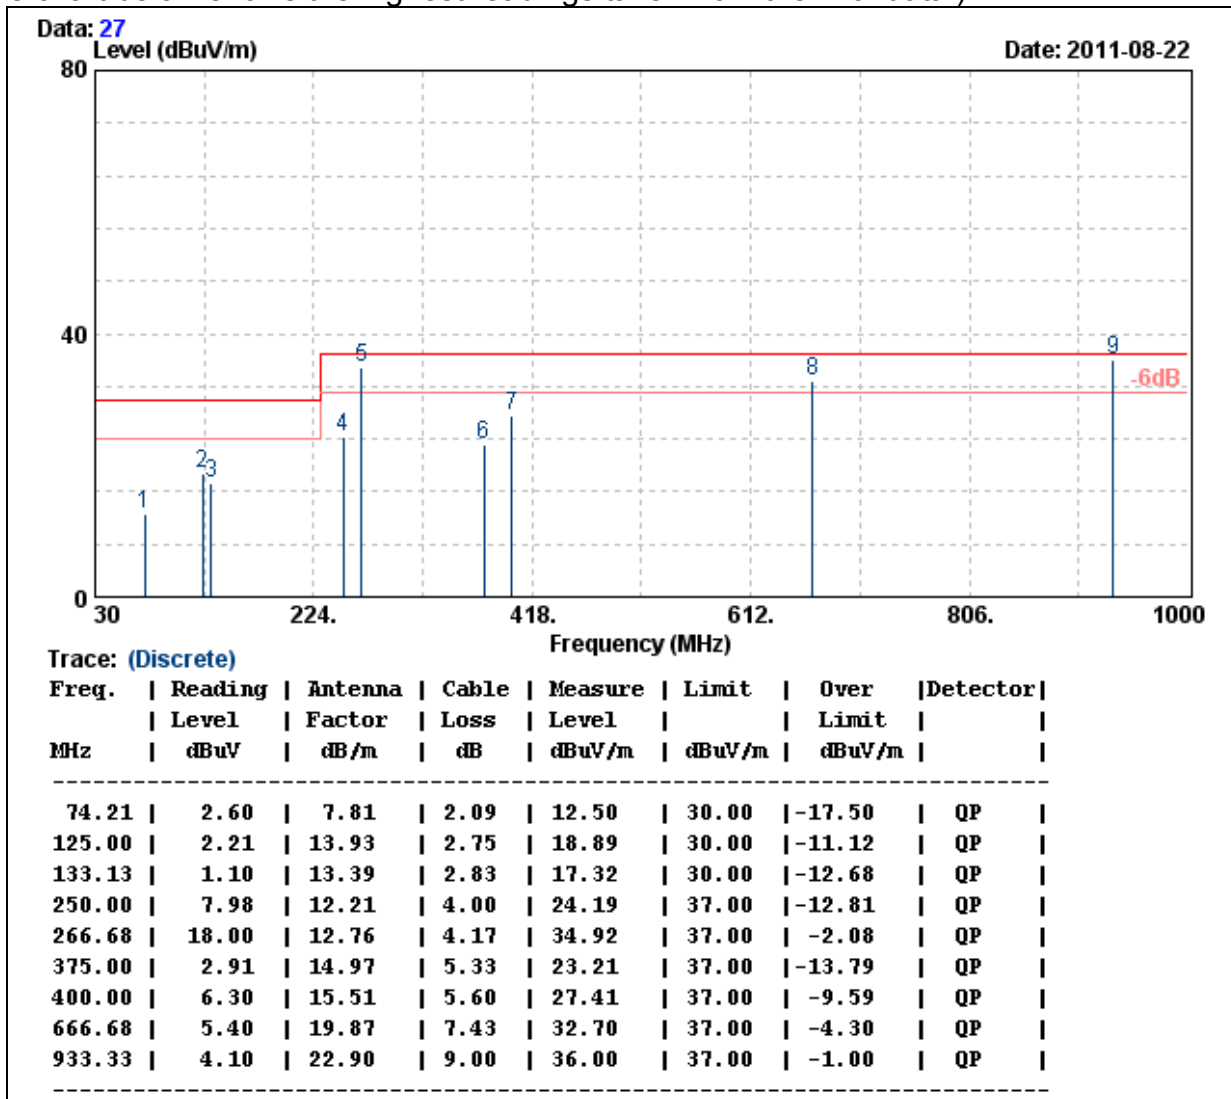


- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



Model No.	CDE560AM-001	Test Mode	WAN Mode
Environmental Conditions	26.3 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function:	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 3

(The chart below shows the highest readings taken from the final data.)

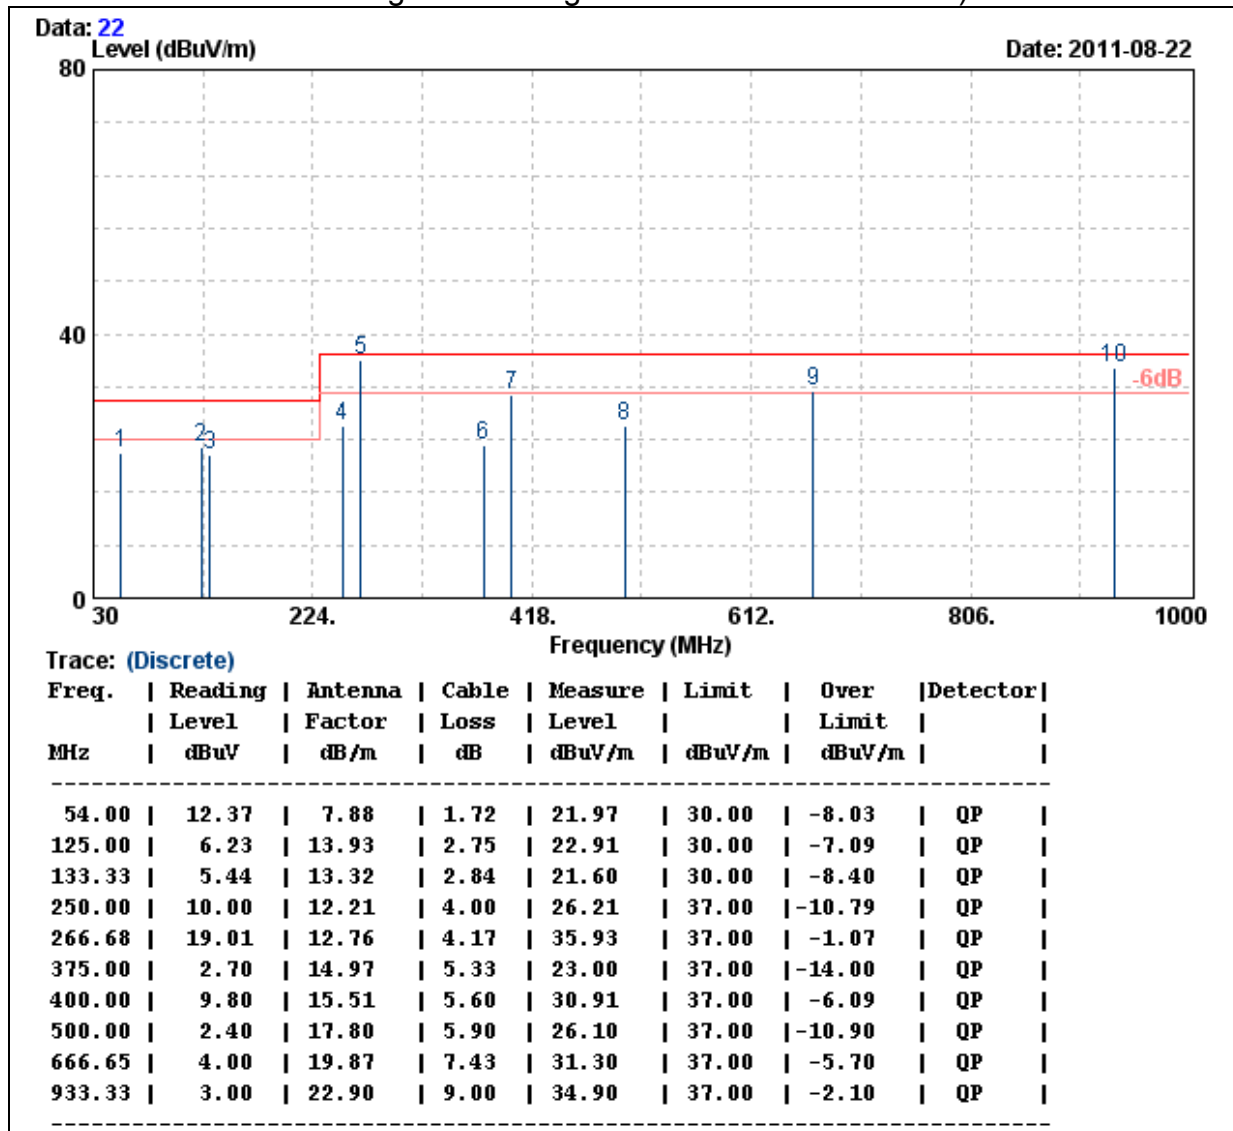


Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



Model No.	CDE560AM-001	Test Mode	WAN Mode
Environmental Conditions	26.3 °C, 60 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	Hong Tsai
Test Site	OATS 5	Adapter Model No.	Adapter 3

(The chart below shows the highest readings taken from the final data.)

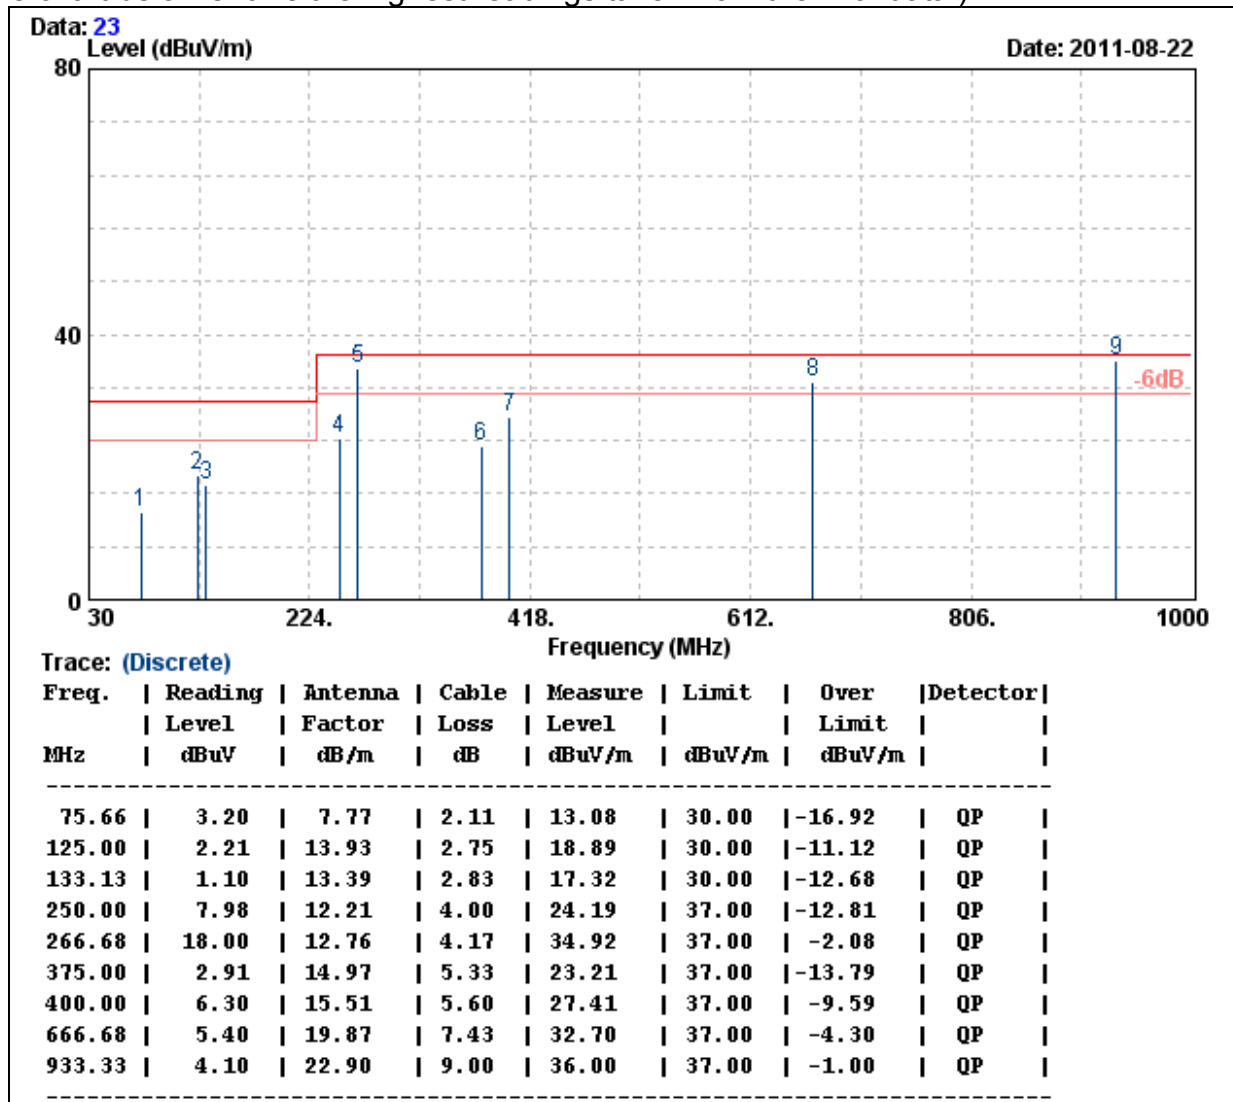

- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit

**8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz**

Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1608.00	56.24	27.42	2.23	41.57	0.84	45.16	74.00	-28.84	P
* 1608.00	52.03	27.42	2.23	41.57	0.84	40.95	54.00	-13.05	A
3216.00	55.67	30.14	3.00	41.19	1.26	48.88	74.00	-25.12	P
3216.00	50.34	30.14	3.00	41.19	1.26	43.55	54.00	-10.45	A
* 4823.98	53.69	33.17	3.73	42.38	0.69	48.90	74.00	-25.10	P
* 4823.98	46.12	33.17	3.73	42.38	0.69	41.33	54.00	-12.67	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11b mode / CH Low					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1607.99	54.36	27.42	2.23	41.57	0.84	43.28	74.00	-30.72	P	
* 1607.99	47.29	27.42	2.23	41.57	0.84	36.21	54.00	-17.79	A	
3215.96	55.74	30.14	3.00	41.19	1.26	48.95	74.00	-25.05	P	
3215.96	51.06	30.14	3.00	41.19	1.26	44.27	54.00	-9.73	A	
* 4823.98	56.84	33.17	3.73	42.38	0.69	52.05	74.00	-21.95	P	
* 4823.98	51.55	33.17	3.73	42.38	0.69	46.76	54.00	-7.24	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11b mode / CH Middle					Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1624.67	55.41	27.55	2.23	41.55	0.85	44.50	74.00	-29.50	P	
* 1624.67	51.23	27.55	2.23	41.55	0.85	40.32	54.00	-13.68	A	
3249.31	54.23	30.15	3.02	41.20	1.22	47.42	74.00	-26.58	P	
3249.31	49.93	30.15	3.02	41.20	1.22	43.12	54.00	-10.88	A	
* 4873.97	53.49	33.32	3.74	42.43	0.71	48.83	74.00	-25.17	P	
* 4873.97	45.85	33.32	3.74	42.43	0.71	41.19	54.00	-12.81	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11b mode / CH Middle					Measurement Distance at 3m		Vertical		polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1624.64	54.63	27.55	2.23	41.55	0.85	43.72	74.00	-30.28	P	
* 1624.64	46.35	27.55	2.23	41.55	0.85	35.44	54.00	-18.56	A	
3249.29	55.47	30.15	3.02	41.20	1.22	48.66	74.00	-25.34	P	
3249.29	51.03	30.15	3.02	41.20	1.22	44.22	54.00	-9.78	A	
* 4873.99	55.94	33.32	3.74	42.43	0.71	51.28	74.00	-22.72	P	
* 4873.99	50.04	33.32	3.74	42.43	0.71	45.38	54.00	-8.62	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1641.29	55.93	27.67	2.24	41.52	0.86	45.18	74.00	-28.82	P
1641.29	51.78	27.67	2.24	41.52	0.86	41.03	54.00	-12.97	A
3282.62	54.76	30.16	3.05	41.21	1.17	47.93	74.00	-26.07	P
3282.62	50.11	30.16	3.05	41.21	1.17	43.28	54.00	-10.72	A
* 4863.98	53.24	33.29	3.74	42.42	0.71	48.56	74.00	-25.44	P
* 4863.98	45.95	33.29	3.74	42.42	0.71	41.27	54.00	-12.73	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1641.30	54.04	27.67	2.24	41.52	0.86	43.29	74.00	-30.71	P
1641.30	46.94	27.67	2.24	41.52	0.86	36.19	54.00	-17.81	A
3282.61	55.69	30.16	3.05	41.21	1.17	48.86	74.00	-25.14	P
3282.61	51.13	30.16	3.05	41.21	1.17	44.30	54.00	-9.70	A
* 4863.99	54.27	33.29	3.74	42.42	0.71	49.59	74.00	-24.41	P
* 4863.99	48.86	33.29	3.74	42.42	0.71	44.18	54.00	-9.82	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1607.95	56.13	27.42	2.23	41.57	0.84	45.05	74.00	-28.95	P
* 1607.95	52.34	27.42	2.23	41.57	0.84	41.26	54.00	-12.74	A
3215.93	55.03	30.14	3.00	41.19	1.26	48.24	74.00	-25.76	P
3215.93	49.95	30.14	3.00	41.19	1.26	43.16	54.00	-10.84	A
* 4823.97	54.23	33.17	3.73	42.38	0.69	49.44	74.00	-24.56	P
* 4823.97	46.69	33.17	3.73	42.38	0.69	41.90	54.00	-12.10	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11g mode / CH Low					Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1607.97	53.36	27.42	2.23	41.57	0.84	42.28	74.00	-31.72	P	
* 1607.97	46.76	27.42	2.23	41.57	0.84	35.68	54.00	-18.32	A	
3215.95	56.39	30.14	3.00	41.19	1.26	49.60	74.00	-24.40	P	
3215.95	52.01	30.14	3.00	41.19	1.26	45.22	54.00	-8.78	A	
* 4823.95	57.00	33.17	3.73	42.38	0.69	52.21	74.00	-21.79	P	
* 4823.95	51.79	33.17	3.73	42.38	0.69	47.00	54.00	-7.00	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11g mode / CH Middle					Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1624.57	55.03	27.55	2.23	41.55	0.85	44.12	74.00	-29.88	P	
* 1624.57	50.95	27.55	2.23	41.55	0.85	40.04	54.00	-13.96	A	
3249.28	55.13	30.15	3.02	41.20	1.22	48.32	74.00	-25.68	P	
3249.28	50.20	30.15	3.02	41.20	1.22	43.39	54.00	-10.61	A	
* 4873.98	54.30	33.32	3.74	42.43	0.71	49.64	74.00	-24.36	P	
* 4873.98	46.13	33.32	3.74	42.43	0.71	41.47	54.00	-12.53	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11g mode / CH Middle					Measurement Distance at 3m			Vertical	polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1624.65	55.16	27.55	2.23	41.55	0.85	44.25	74.00	-29.75	P	
* 1624.65	47.03	27.55	2.23	41.55	0.85	36.12	54.00	-17.88	A	
3249.30	55.01	30.15	3.02	41.20	1.22	48.20	74.00	-25.80	P	
3249.30	50.46	30.15	3.02	41.20	1.22	43.65	54.00	-10.35	A	
* 4873.96	55.75	33.32	3.74	42.43	0.71	51.09	74.00	-22.91	P	
* 4873.96	50.23	33.32	3.74	42.43	0.71	45.57	54.00	-8.43	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1641.27	56.01	27.67	2.24	41.52	0.86	45.26	74.00	-28.74	P
1641.27	51.82	27.67	2.24	41.52	0.86	41.07	54.00	-12.93	A
3282.62	53.92	30.16	3.05	41.21	1.17	47.09	74.00	-26.91	P
3282.62	49.96	30.16	3.05	41.21	1.17	43.13	54.00	-10.87	A
* 4863.95	55.02	33.29	3.74	42.42	0.71	50.34	74.00	-23.66	P
* 4863.95	46.76	33.29	3.74	42.42	0.71	42.08	54.00	-11.92	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1641.30	54.74	27.67	2.24	41.52	0.86	43.99	74.00	-30.01	P
1641.30	46.25	27.67	2.24	41.52	0.86	35.50	54.00	-18.50	A
3282.61	55.55	30.16	3.05	41.21	1.17	48.72	74.00	-25.28	P
3282.61	50.86	30.16	3.05	41.21	1.17	44.03	54.00	-9.97	A
* 4863.99	54.39	33.29	3.74	42.42	0.71	49.71	74.00	-24.29	P
* 4863.99	48.70	33.29	3.74	42.42	0.71	44.02	54.00	-9.98	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11n HT20 mode / CH Low					Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1607.96	57.62	27.42	2.23	41.57	0.84	46.54	74.00	-27.46	P	
* 1607.96	53.23	27.42	2.23	41.57	0.84	42.15	54.00	-11.85	A	
3215.98	54.59	30.14	3.00	41.19	1.26	47.80	74.00	-26.20	P	
3215.98	50.47	30.14	3.00	41.19	1.26	43.68	54.00	-10.32	A	
* 4823.95	54.36	33.17	3.73	42.38	0.69	49.57	74.00	-24.43	P	
* 4823.95	46.02	33.17	3.73	42.38	0.69	41.23	54.00	-12.77	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11n HT20 mode / CH Low					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1607.97	54.05	27.42	2.23	41.57	0.84	42.97	74.00	-31.03	P	
* 1607.97	48.26	27.42	2.23	41.57	0.84	37.18	54.00	-16.82	A	
3215.94	56.38	30.14	3.00	41.19	1.26	49.59	74.00	-24.41	P	
3215.94	51.85	30.14	3.00	41.19	1.26	45.06	54.00	-8.94	A	
* 4823.96	56.74	33.17	3.73	42.38	0.69	51.95	74.00	-22.05	P	
* 4823.96	51.74	33.17	3.73	42.38	0.69	46.95	54.00	-7.05	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11n HT20 mode / CH Middle					Measurement Distance at 3m		Horizontal polarity			
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	1624.64	54.95	27.55	2.23	41.55	0.85	44.04	74.00	-29.96	P
*	1624.64	50.80	27.55	2.23	41.55	0.85	39.89	54.00	-14.11	A
	3249.32	54.37	30.15	3.02	41.20	1.22	47.56	74.00	-26.44	P
	3249.32	50.13	30.15	3.02	41.20	1.22	43.32	54.00	-10.68	A
*	4873.98	53.67	33.32	3.74	42.43	0.71	49.01	74.00	-24.99	P
*	4873.98	45.77	33.32	3.74	42.43	0.71	41.11	54.00	-12.89	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	28.3°C , 51%

Vertical

TX / IEEE 802.11n HT20 mode / CH Middle					Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	1624.65	54.90	27.55	2.23	41.55	0.85	43.99	74.00	-30.01	P
*	1624.65	46.65	27.55	2.23	41.55	0.85	35.74	54.00	-18.26	A
	3249.33	55.87	30.15	3.02	41.20	1.22	49.06	74.00	-24.94	P
	3249.33	51.64	30.15	3.02	41.20	1.22	44.83	54.00	-9.17	A
*	4873.99	55.46	33.32	3.74	42.43	0.71	50.80	74.00	-23.20	P
*	4873.99	50.31	33.32	3.74	42.43	0.71	45.65	54.00	-8.35	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11n HT20 mode / CH High					Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
1641.31	56.94	27.67	2.24	41.52	0.86	46.19	74.00	-27.81	P	
1641.31	52.36	27.67	2.24	41.52	0.86	41.61	54.00	-12.39	A	
3282.59	55.71	30.16	3.05	41.21	1.17	48.88	74.00	-25.12	P	
3282.59	50.99	30.16	3.05	41.21	1.17	44.16	54.00	-9.84	A	
* 4863.99	54.32	33.29	3.74	42.42	0.71	49.64	74.00	-24.36	P	
* 4863.99	46.65	33.29	3.74	42.42	0.71	41.97	54.00	-12.03	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11n HT20 mode / CH High					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
1641.31	53.67	27.67	2.24	41.52	0.86	42.92	74.00	-31.08	P	
1641.31	46.85	27.67	2.24	41.52	0.86	36.10	54.00	-17.90	A	
3282.64	54.62	30.16	3.05	41.21	1.17	47.79	74.00	-26.21	P	
3282.64	50.34	30.16	3.05	41.21	1.17	43.51	54.00	-10.49	A	
* 4863.98	53.47	33.29	3.74	42.42	0.71	48.79	74.00	-25.21	P	
* 4863.98	48.91	33.29	3.74	42.42	0.71	44.23	54.00	-9.77	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11n HT40 mode / CH Low					Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1614.64	57.23	27.47	2.23	41.56	0.85	46.22	74.00	-27.78	P	
* 1614.64	53.10	27.47	2.23	41.56	0.85	42.09	54.00	-11.91	A	
3229.31	54.62	30.15	3.01	41.19	1.24	47.82	74.00	-26.18	P	
3229.31	50.08	30.15	3.01	41.19	1.24	43.28	54.00	-10.72	A	
* 4843.98	54.62	33.23	3.74	42.40	0.70	49.88	74.00	-24.12	P	
* 4843.98	46.55	33.23	3.74	42.40	0.70	41.81	54.00	-12.19	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Low)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11n HT40 mode / CH Low					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1614.61	53.95	27.47	2.23	41.56	0.85	42.94	74.00	-31.06	P	
* 1614.61	46.97	27.47	2.23	41.56	0.85	35.96	54.00	-18.04	A	
3229.28	55.26	30.15	3.01	41.19	1.24	48.46	74.00	-25.54	P	
3229.28	50.76	30.15	3.01	41.19	1.24	43.96	54.00	-10.04	A	
* 4843.97	56.31	33.23	3.74	42.40	0.70	51.57	74.00	-22.43	P	
* 4843.97	51.24	33.23	3.74	42.40	0.70	46.50	54.00	-7.50	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Middle)	TEMP& Humidity	28.3°C , 51%

Horizontal

TX / IEEE 802.11n HT40 mode / CH Middle					Measurement Distance at 3m				Horizontal polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	1624.64	54.62	27.55	2.23	41.55	0.85	43.71	74.00	-30.29	P
*	1624.64	50.73	27.55	2.23	41.55	0.85	39.82	54.00	-14.18	A
	3249.30	54.62	30.15	3.02	41.20	1.22	47.81	74.00	-26.19	P
	3249.30	49.65	30.15	3.02	41.20	1.22	42.84	54.00	-11.16	A
*	4874.00	53.99	33.32	3.74	42.43	0.71	49.33	74.00	-24.67	P
*	4874.00	46.02	33.32	3.74	42.43	0.71	41.36	54.00	-12.64	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Middle)	TEMP& Humidity	28.3°C , 51%

Vertical

TX / IEEE 802.11n HT40 mode / CH Middle					Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	1624.66	55.10	27.55	2.23	41.55	0.85	44.19	74.00	-29.81	P
*	1624.66	46.62	27.55	2.23	41.55	0.85	35.71	54.00	-18.29	A
	3249.29	54.95	30.15	3.02	41.20	1.22	48.14	74.00	-25.86	P
	3249.29	50.43	30.15	3.02	41.20	1.22	43.62	54.00	-10.38	A
*	4873.95	54.95	33.32	3.74	42.43	0.71	50.29	74.00	-23.71	P
*	4873.95	49.68	33.32	3.74	42.43	0.71	45.02	54.00	-8.98	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH High)	TEMP& Humidity	28.3°C, 51%

Horizontal

TX / IEEE 802.11n HT40 mode / CH High					Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
1641.32	55.98	27.67	2.24	41.52	0.86	45.23	74.00	-28.77	P	
1641.32	50.14	27.67	2.24	41.52	0.86	39.39	54.00	-14.61	A	
3282.65	53.69	30.16	3.05	41.21	1.17	46.86	74.00	-27.14	P	
3282.65	49.25	30.16	3.05	41.21	1.17	42.42	54.00	-11.58	A	
* 4863.98	52.98	33.29	3.74	42.42	0.71	48.30	74.00	-25.70	P	
* 4863.98	44.65	33.29	3.74	42.42	0.71	39.97	54.00	-14.03	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDW561AM-U01	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH High)	TEMP& Humidity	28.3°C, 51%

Vertical

TX / IEEE 802.11n HT40 mode / CH High					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
1641.32	54.84	27.67	2.24	41.52	0.86	44.09	74.00	-29.91	P	
1641.32	47.65	27.67	2.24	41.52	0.86	36.90	54.00	-17.10	A	
3282.66	54.92	30.16	3.05	41.21	1.17	48.09	74.00	-25.91	P	
3282.66	50.05	30.16	3.05	41.21	1.17	43.22	54.00	-10.78	A	
* 4863.97	55.95	33.29	3.74	42.42	0.71	51.27	74.00	-22.73	P	
* 4863.97	49.78	33.29	3.74	42.42	0.71	45.10	54.00	-8.90	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: Band-rejection Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



8.6.4 RESTRICTED BAND EDGES

Reference FCC document : KDB91359

802.11b Mode

Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	61.46	74	-12.54	Peak
	H	2390.00	48.8	54	-5.20	Average
	V	2339.98	62.33	74	-11.67	Peak
	V	2339.98	50.3	54	-3.70	Average
HIGH	H	2483.50	60.58	74	-13.42	Peak
	H	2483.50	48.25	54	-5.75	Average
	V	2483.50	60.11	74	-13.89	Peak
	V	2483.50	47.63	54	-6.37	Average

802.11g Mode

Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	61.36	74	-12.64	Peak
	H	2390.00	48.84	54	-5.16	Average
	V	2339.98	63.19	74	-10.81	Peak
	V	2339.98	50.51	54	-3.49	Average
	V	2339.98	50.51	54	-3.49	Average
HIGH	H	2483.50	60.79	74	-13.21	Peak
	H	2483.50	48.63	54	-5.37	Average
	V	2483.50	60.66	74	-13.34	Peak
	V	2483.50	47.92	54	-6.08	Average

802.11n HT-20 Mode

Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	60.28	74	-13.72	Peak
	H	2390.00	48.42	54	-5.58	Average
	V	2390.00	62.52	74	-11.48	Peak
	V	2390.00	50	54	-4.00	Average
HIGH	H	2483.50	61.63	74	-12.37	Peak
	H	2483.50	49.04	54	-4.96	Average
	V	2483.50	62.85	74	-11.15	Peak
	V	2483.50	49.23	54	-4.77	Average


802.11n HT-40 Mode

Channel	Polarity	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Detector
LOW	H	2390.00	62.47	74	-11.53	Peak
	H	2390.00	49.83	54	-4.17	Average
	V	2390.00	64.19	74	-9.81	Peak
	V	2390.00	51.15	54	-2.85	Average
HIGH	H	2483.50	62.51	74	-11.49	Peak
	H	2483.50	49.90	54	-4.10	Average
	V	2483.50	63.6	74	-10.40	Peak
	V	2483.50	51.04	54	-2.96	Average




Detector mode : Peak



Polarity : Horizontal


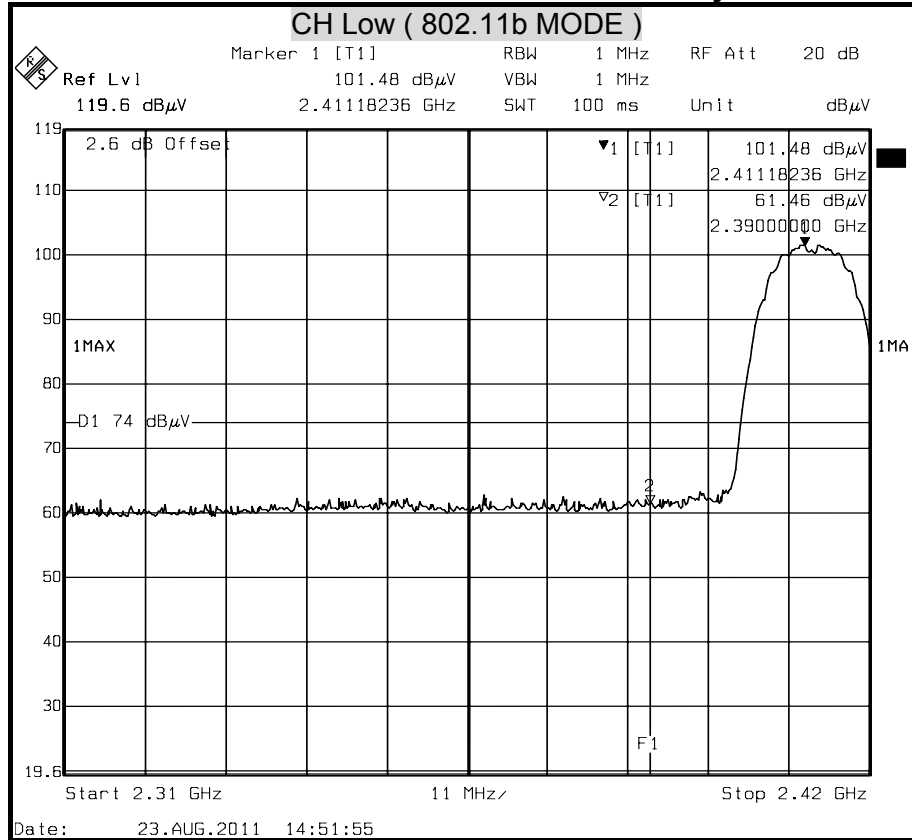


Detector mode : Average

Polarity : Horizontal

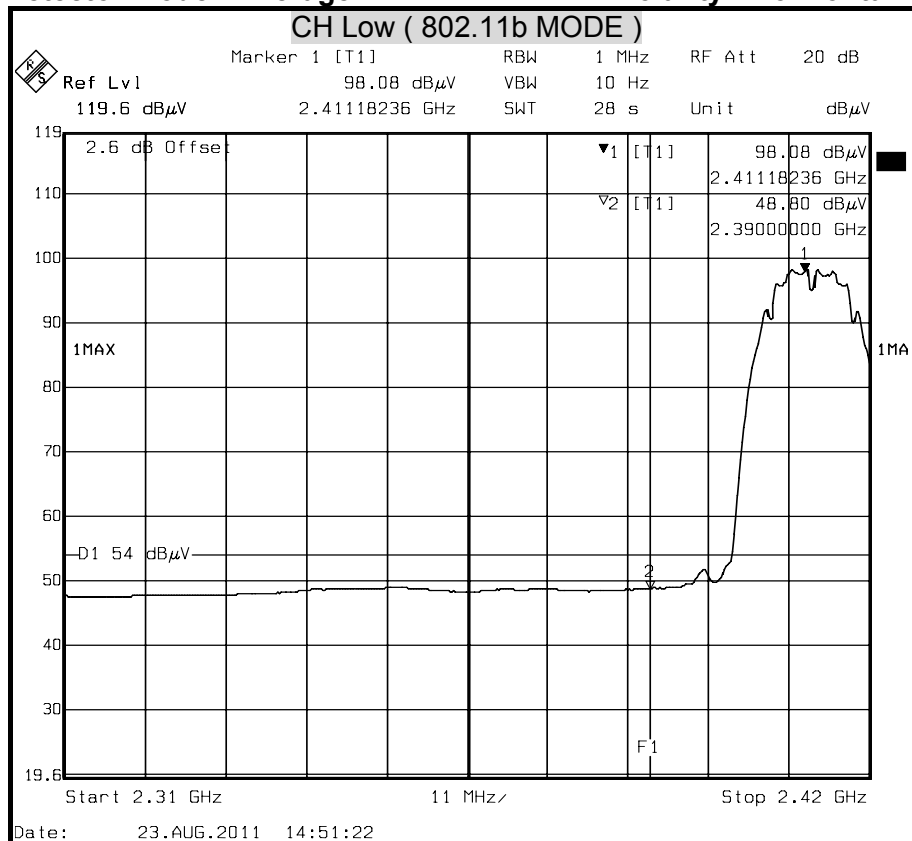

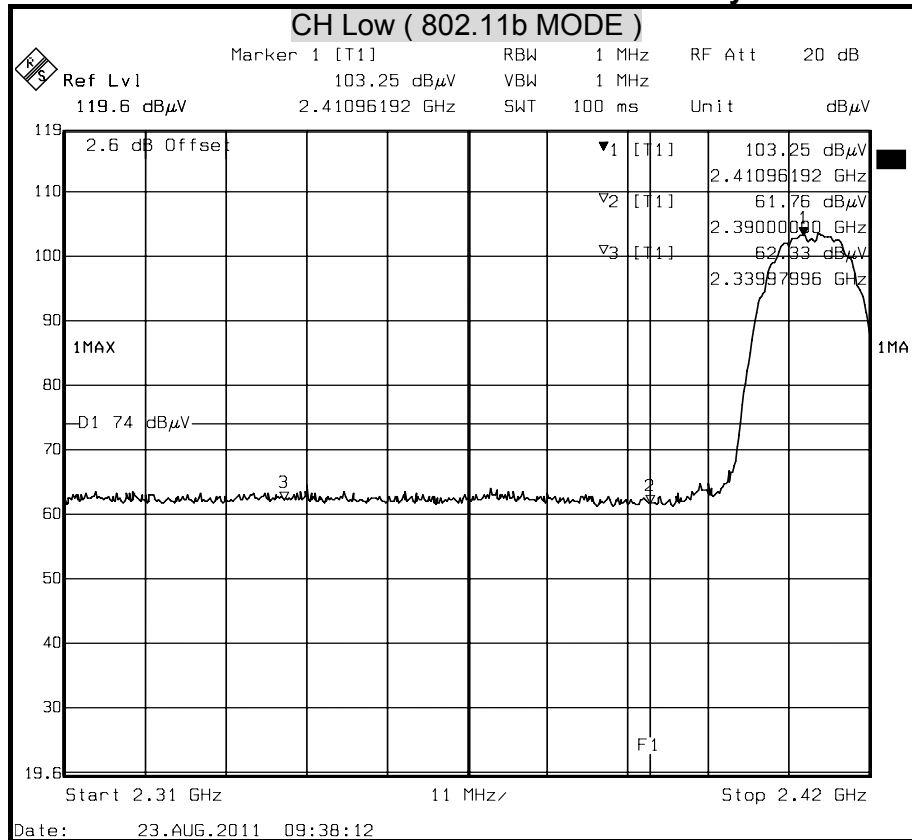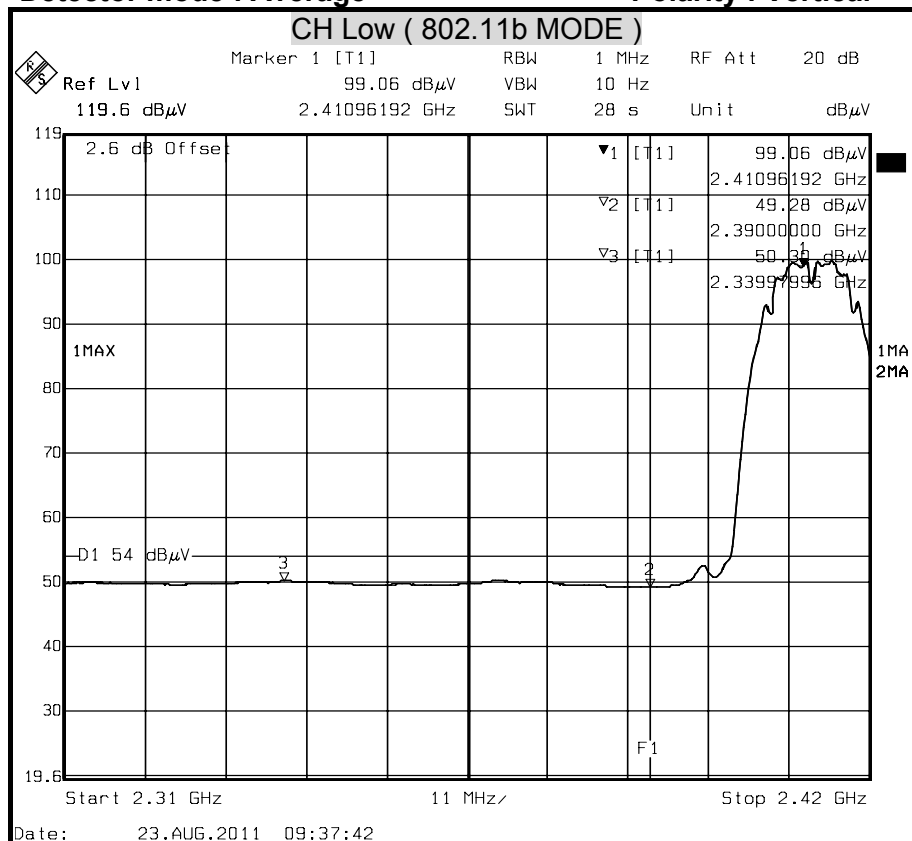
**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

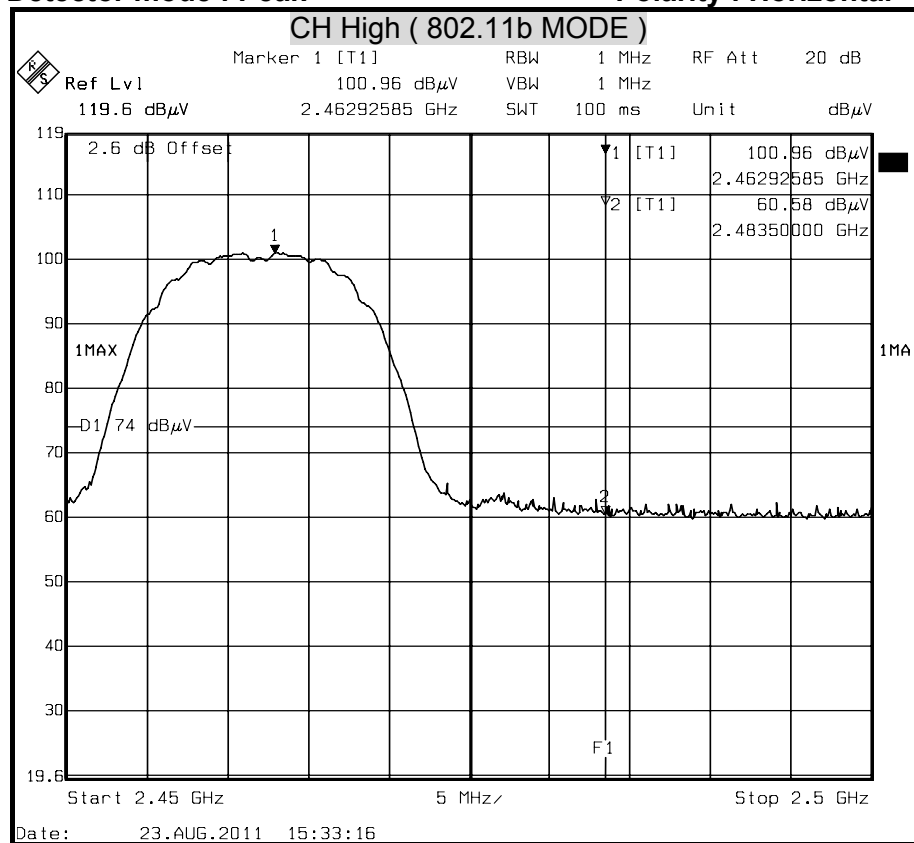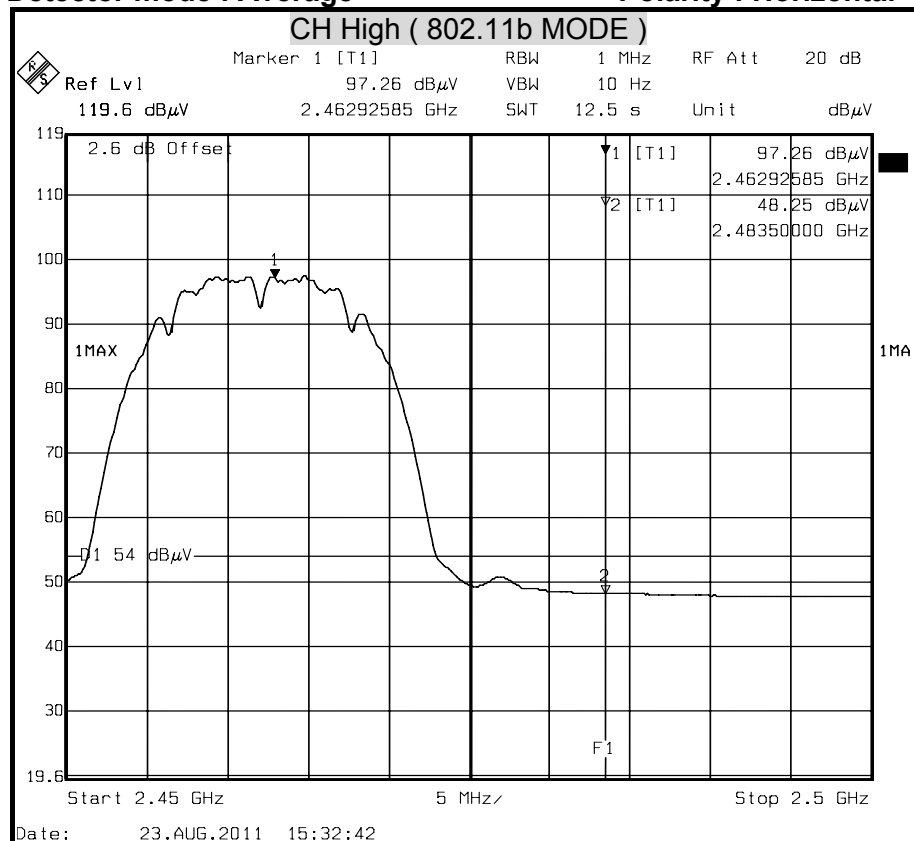**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**




Detector mode : Peak

Polarity : Vertical

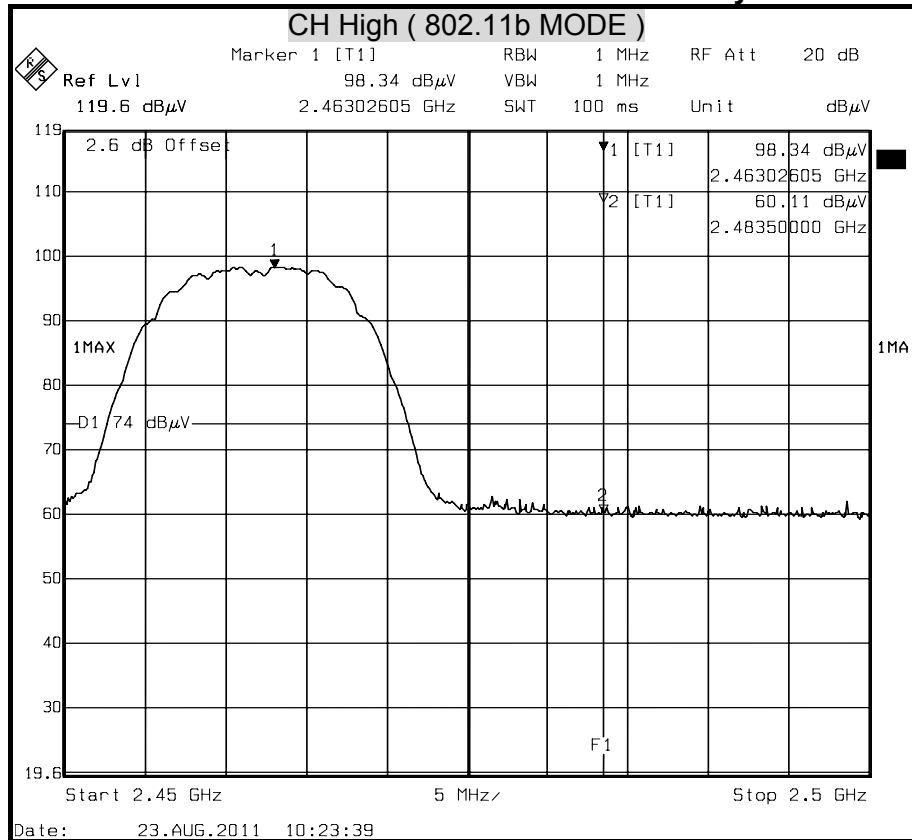

Detector mode : Average


Polarity : Vertical

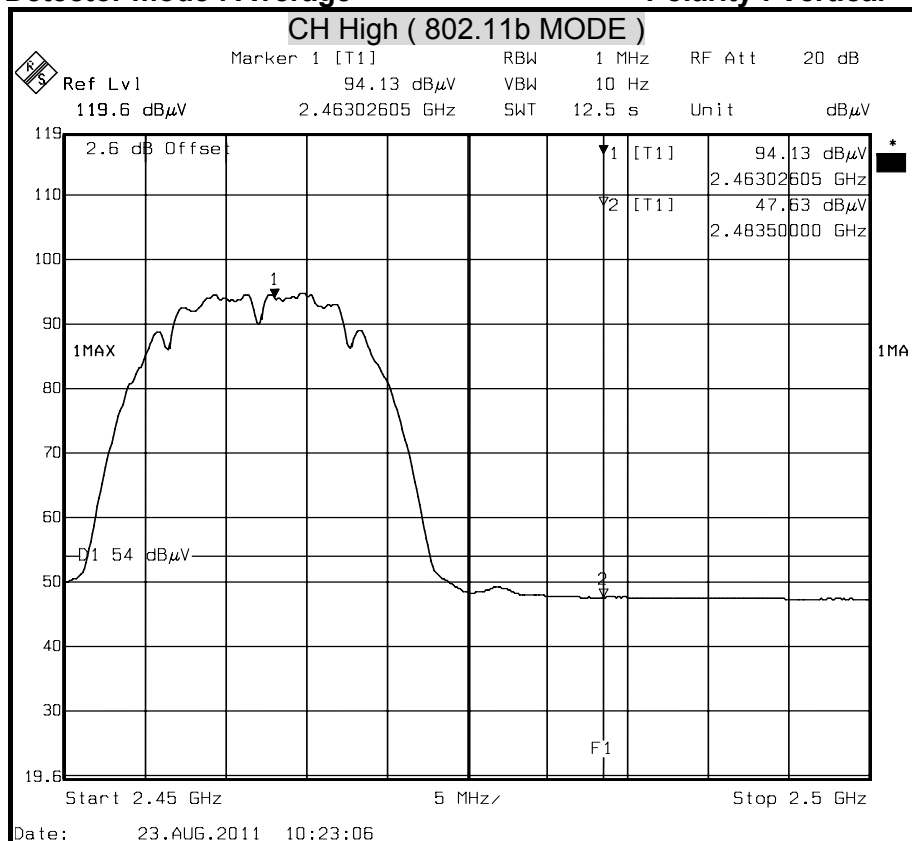




Detector mode : Peak

Polarity : Horizontal

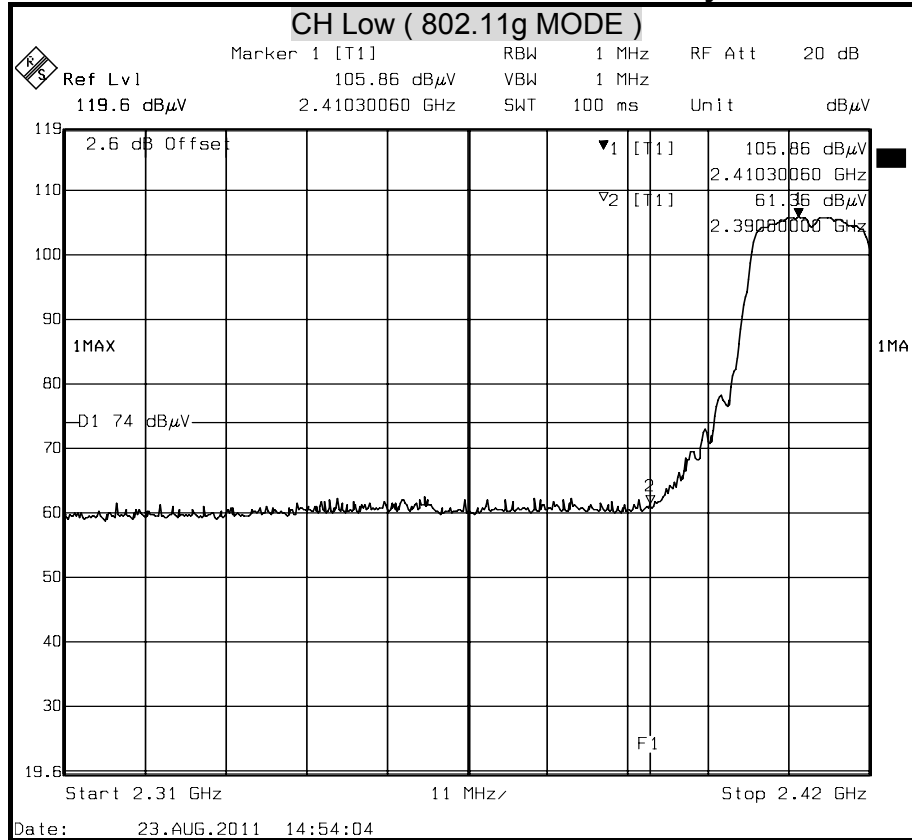

Detector mode : Average


Polarity : Horizontal

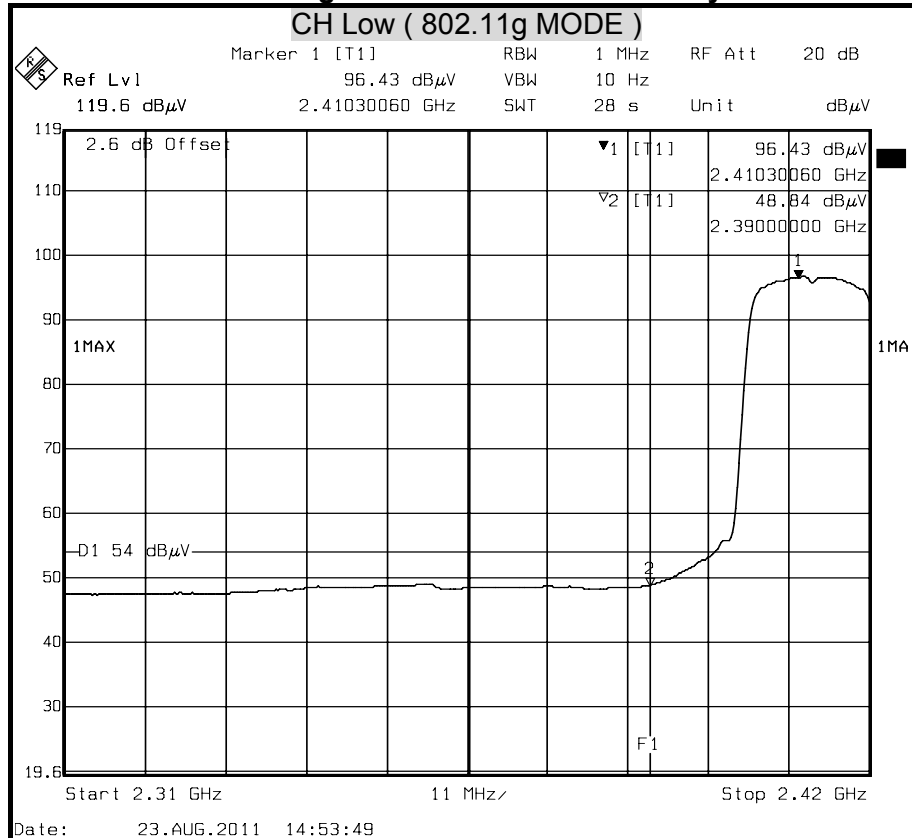




Detector mode : Peak

Polarity : Vertical

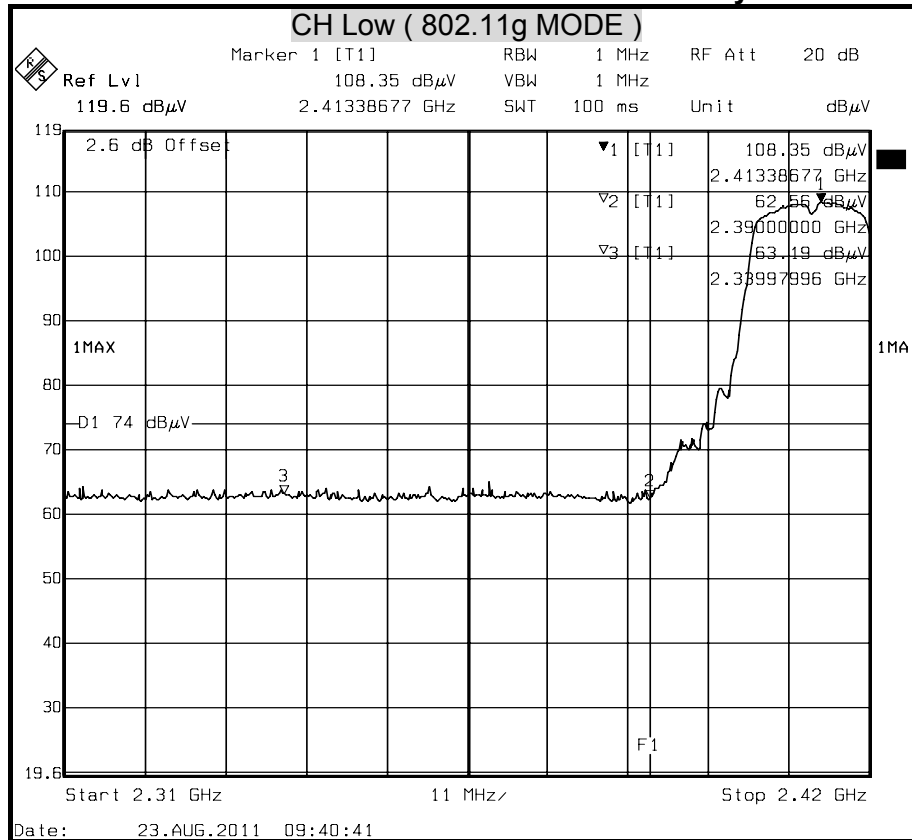

Detector mode : Average


Polarity : Vertical

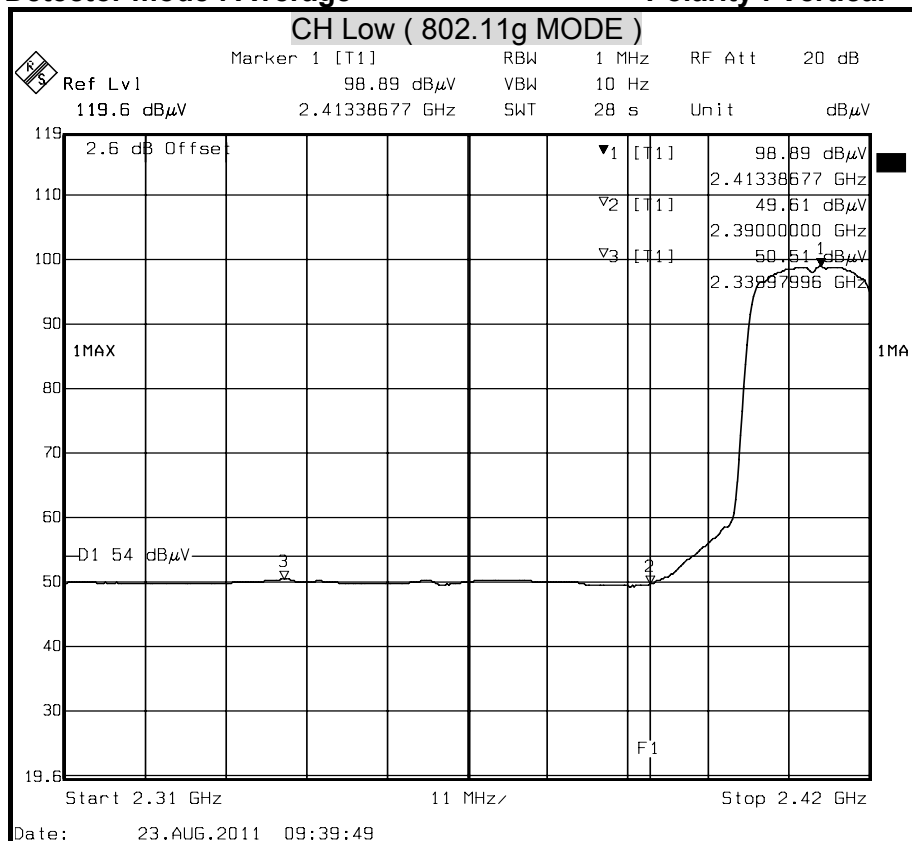




Detector mode : Peak

Polarity : Horizontal

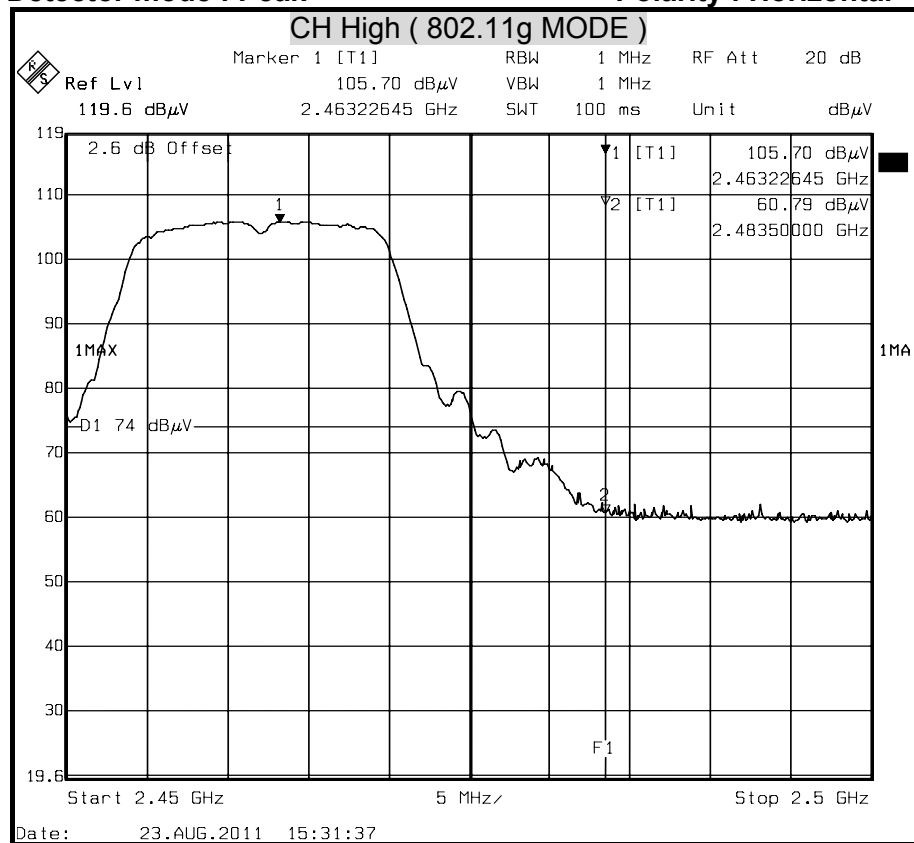

Detector mode : Average


Polarity : Horizontal

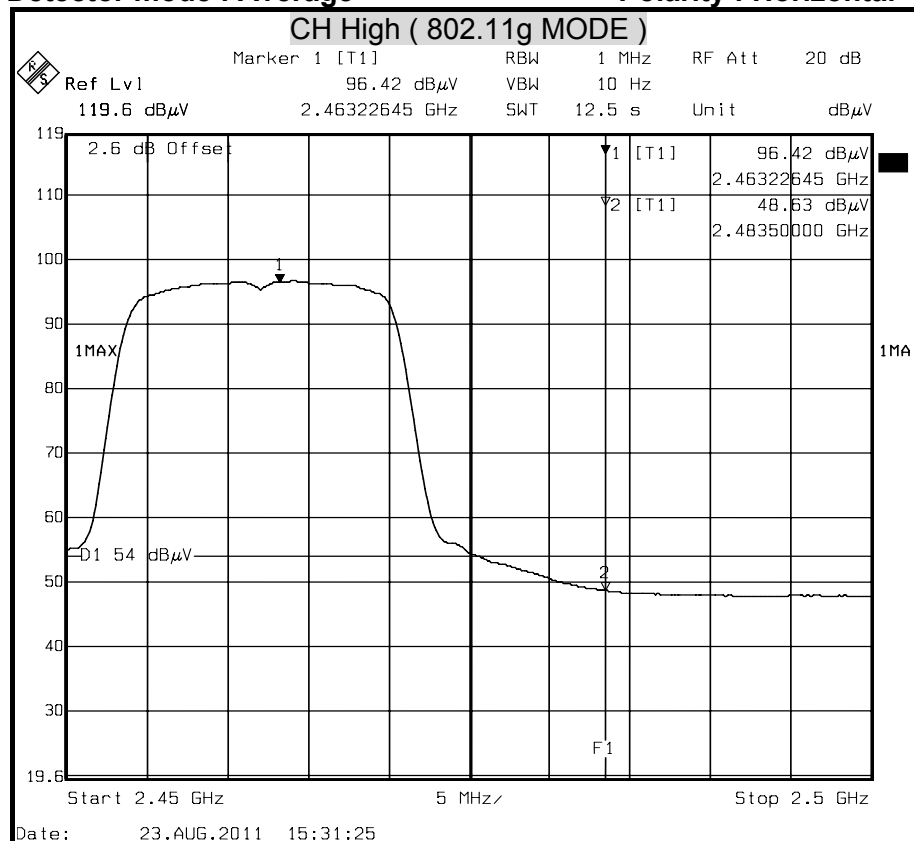




Detector mode : Peak

Polarity : Vertical

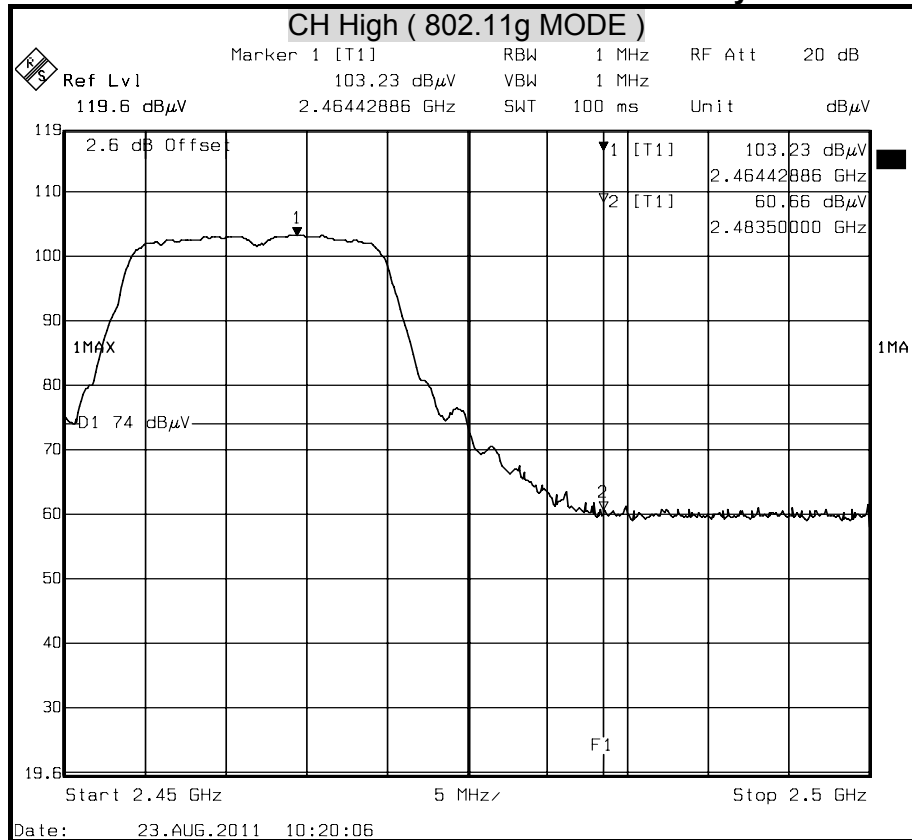

Detector mode : Average


Polarity : Vertical

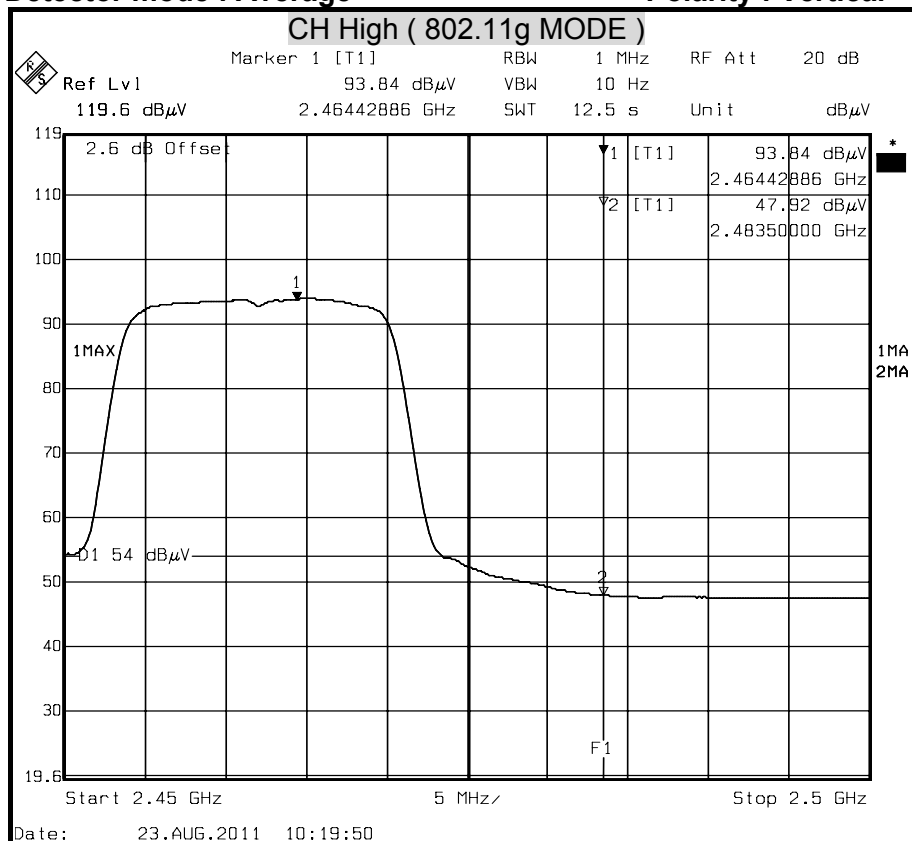




Detector mode : Peak

Polarity : Horizontal

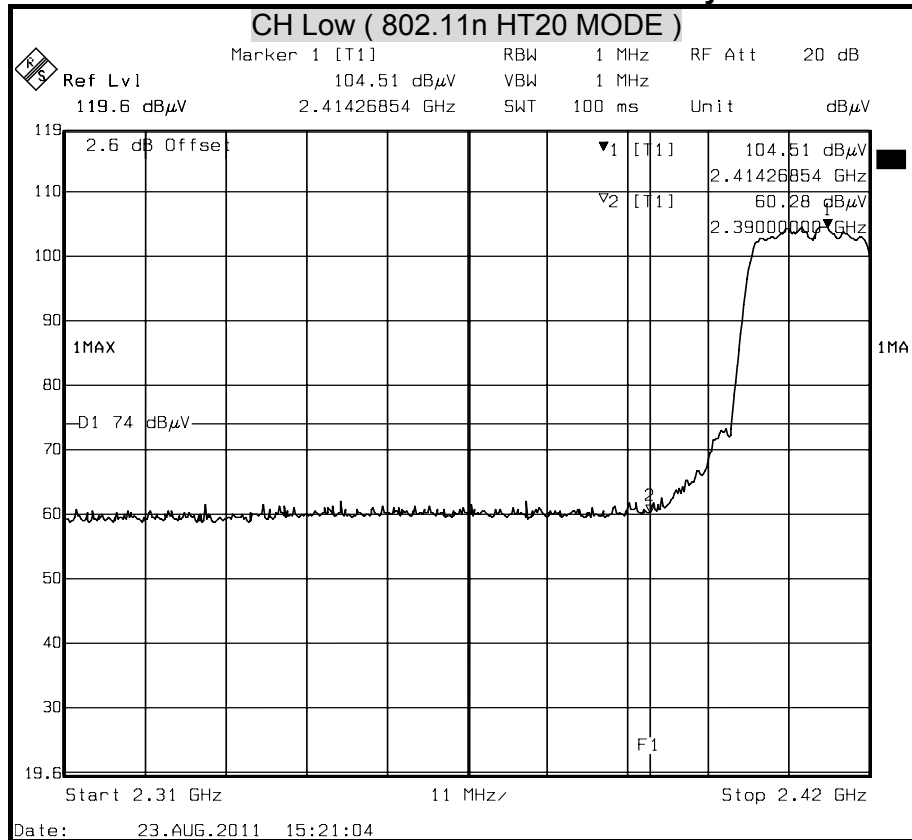

Detector mode : Average


Polarity : Horizontal

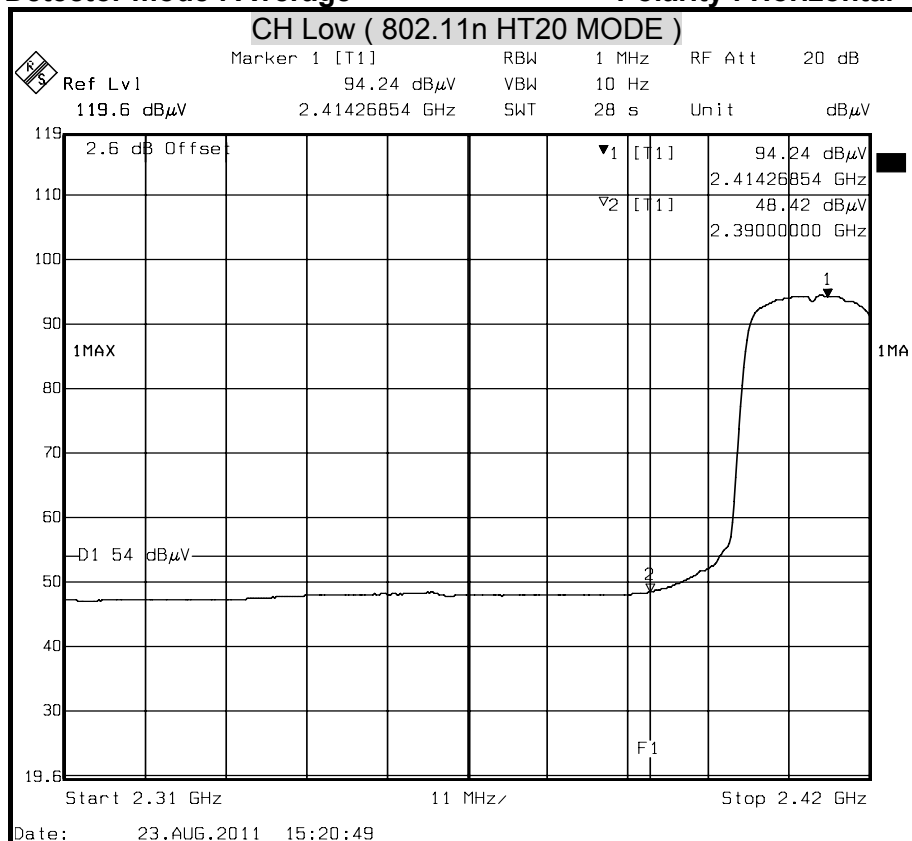




Detector mode : Peak

Polarity : Vertical

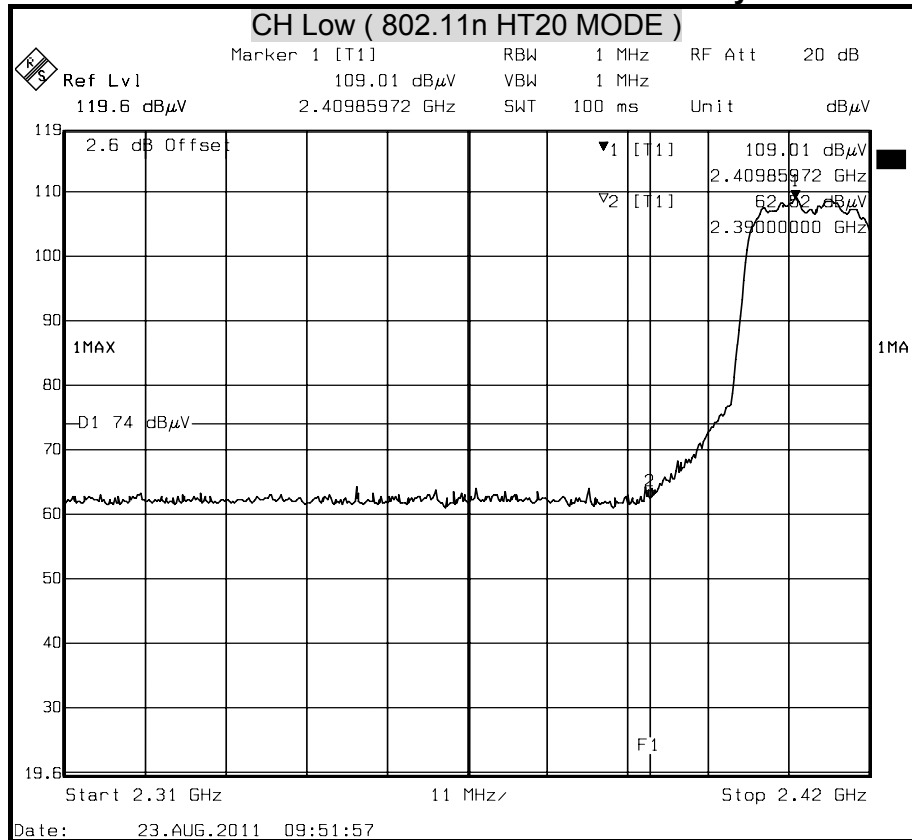

Detector mode : Average


Polarity : Vertical

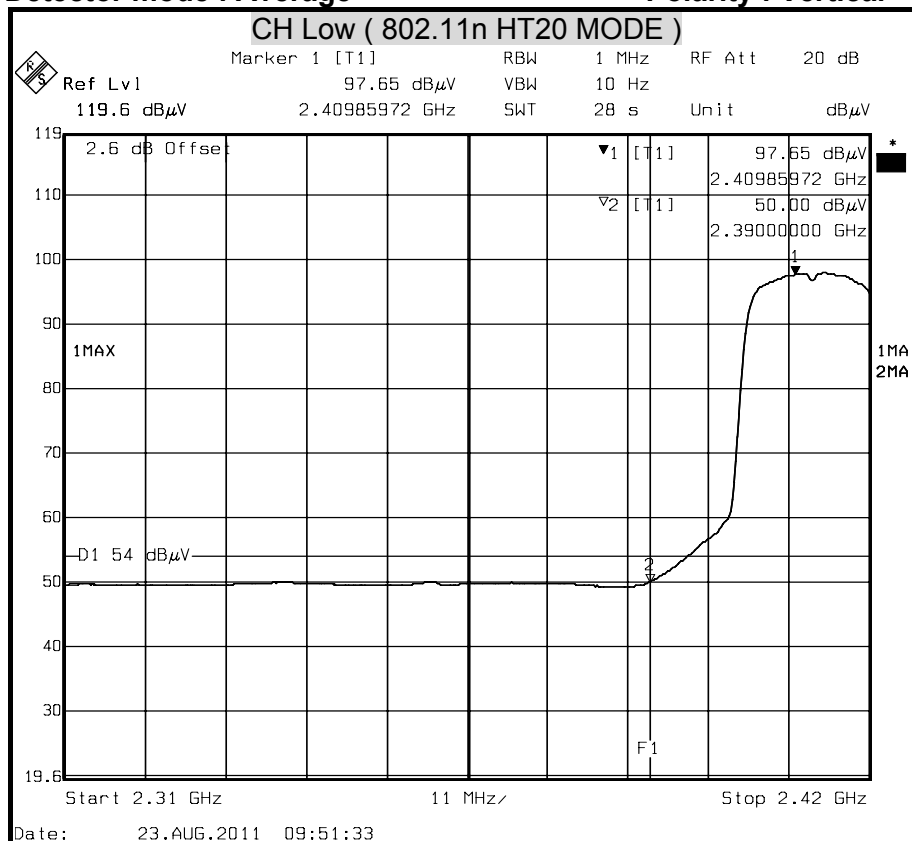




Detector mode : Peak

Polarity : Horizontal

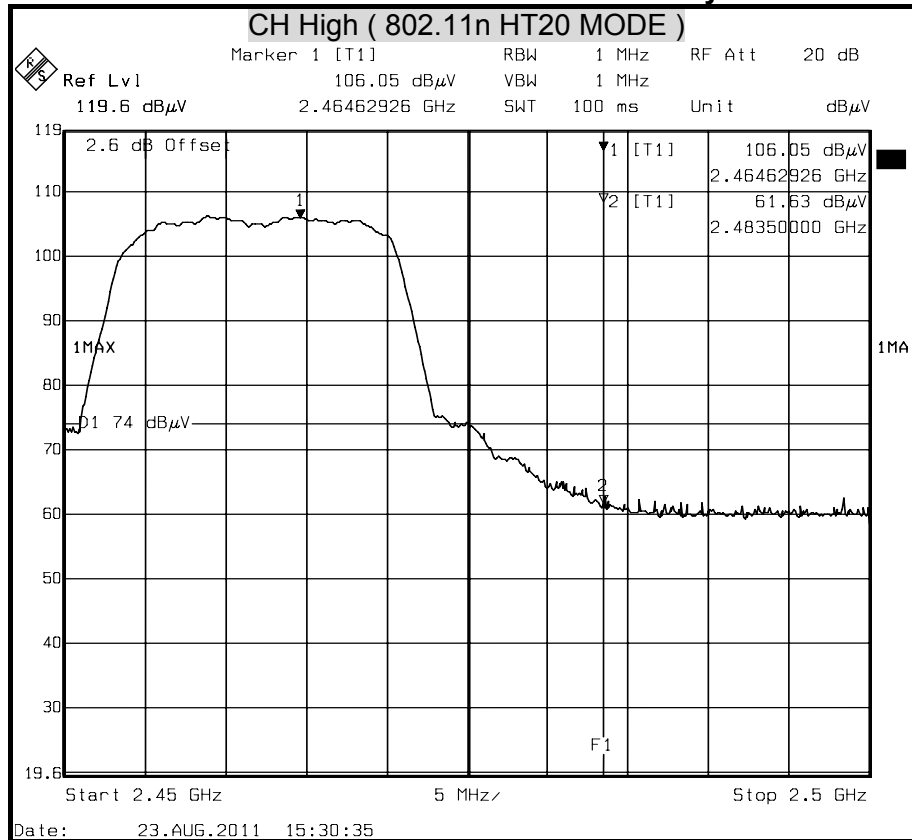

Detector mode : Average


Polarity : Horizontal

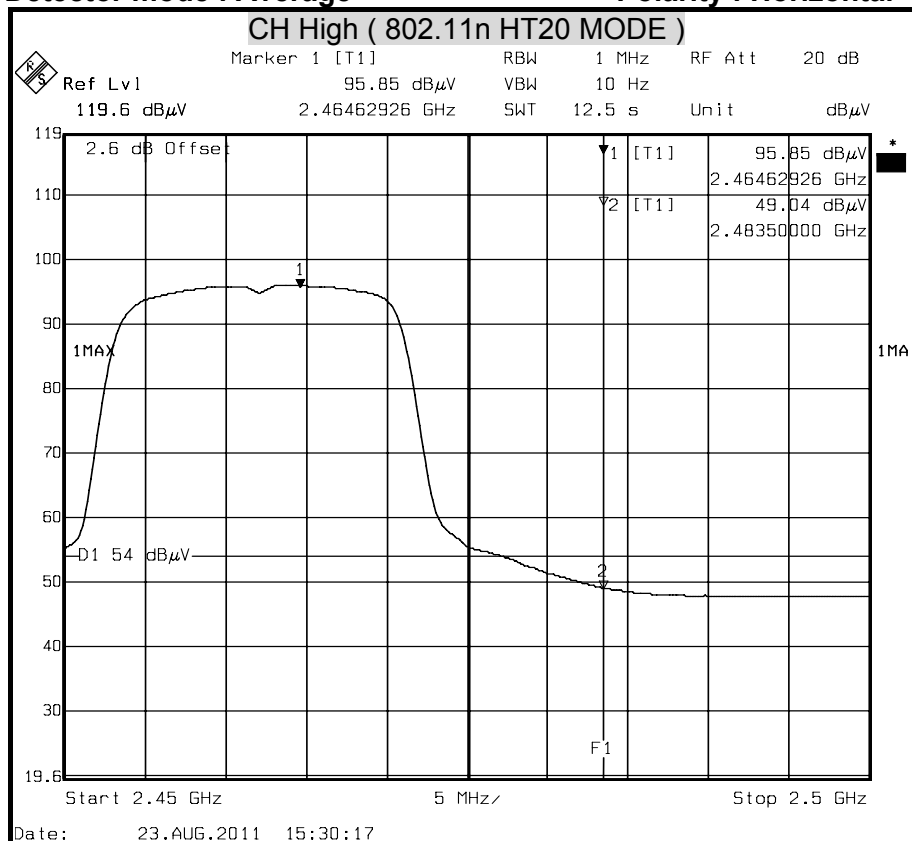




Detector mode : Peak

Polarity : Vertical

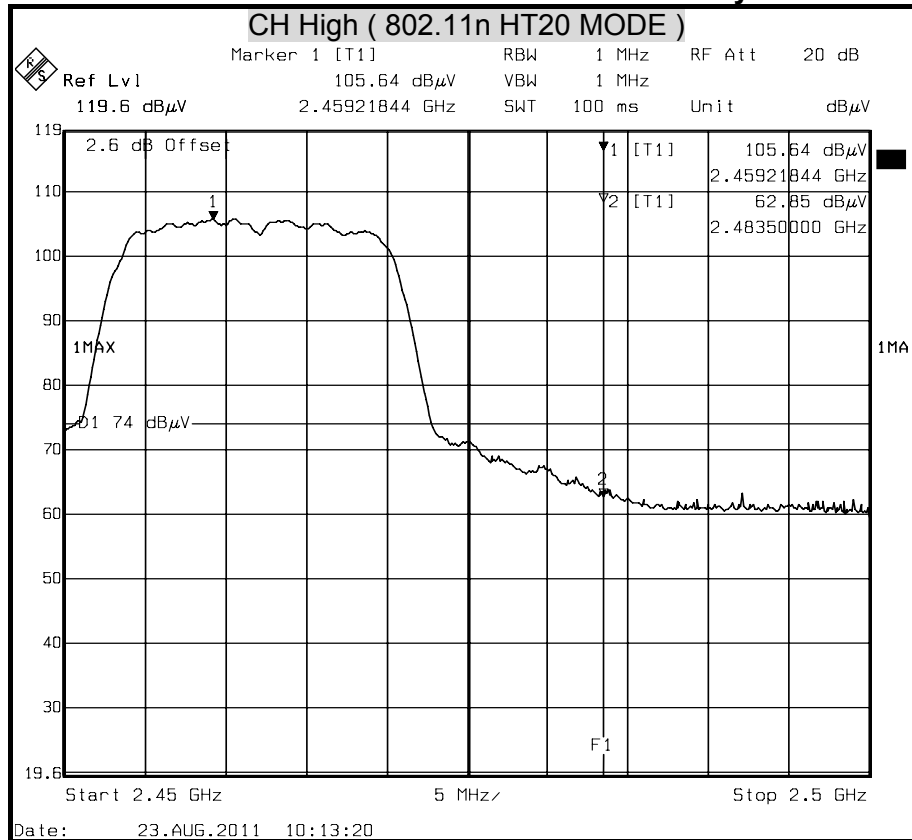

Detector mode : Average


Polarity : Vertical

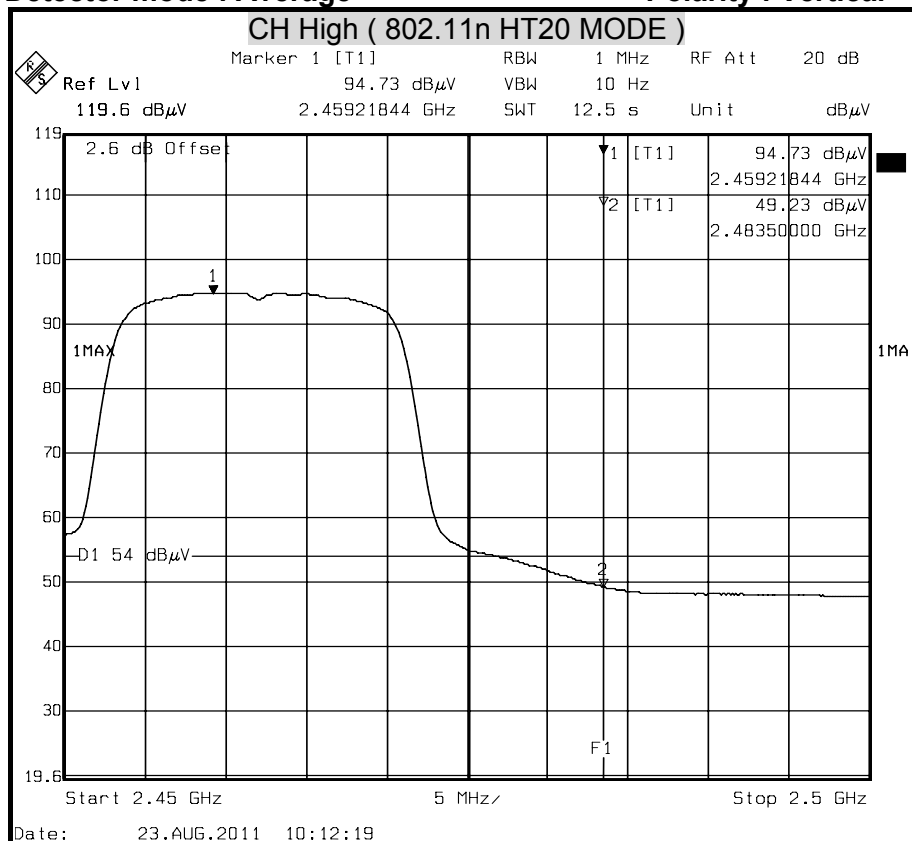




Detector mode : Peak

Polarity : Horizontal

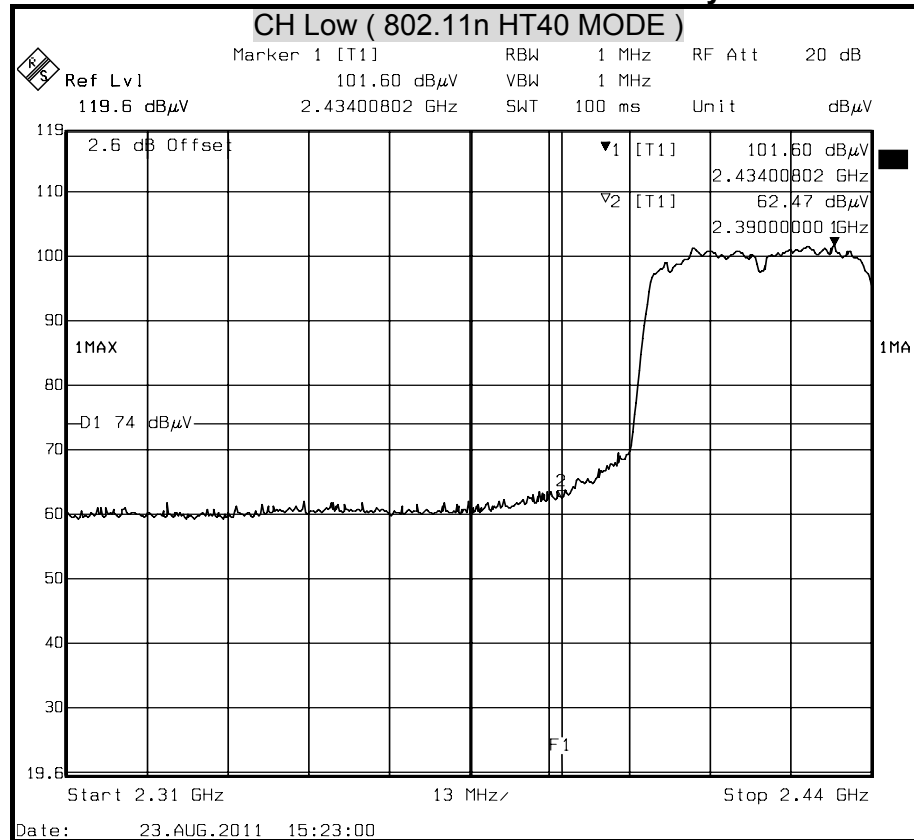

Detector mode : Average


Polarity : Horizontal

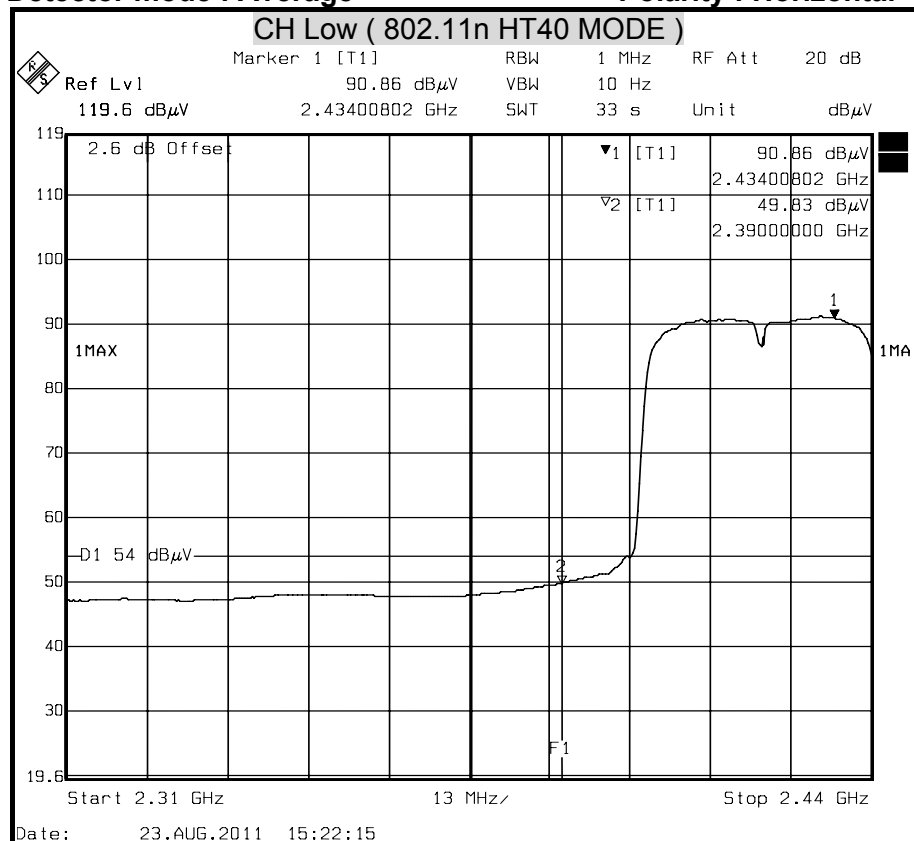




Detector mode : Peak

Polarity : Vertical

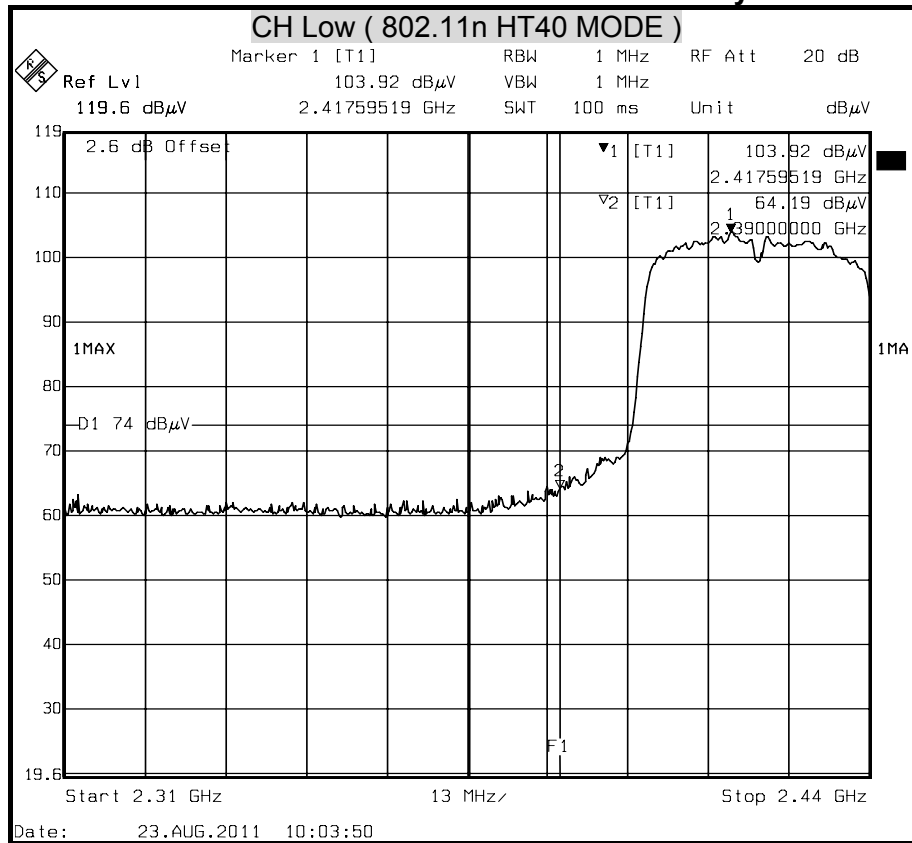

Detector mode : Average


Polarity : Vertical

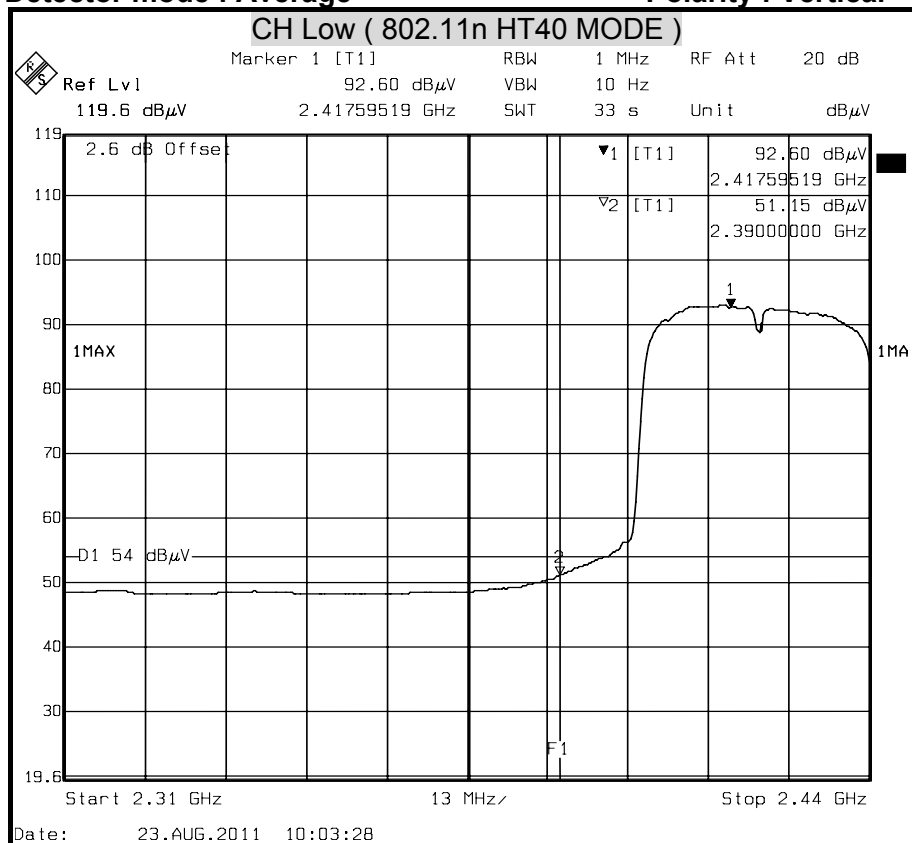




Detector mode : Peak



Polarity : Horizontal

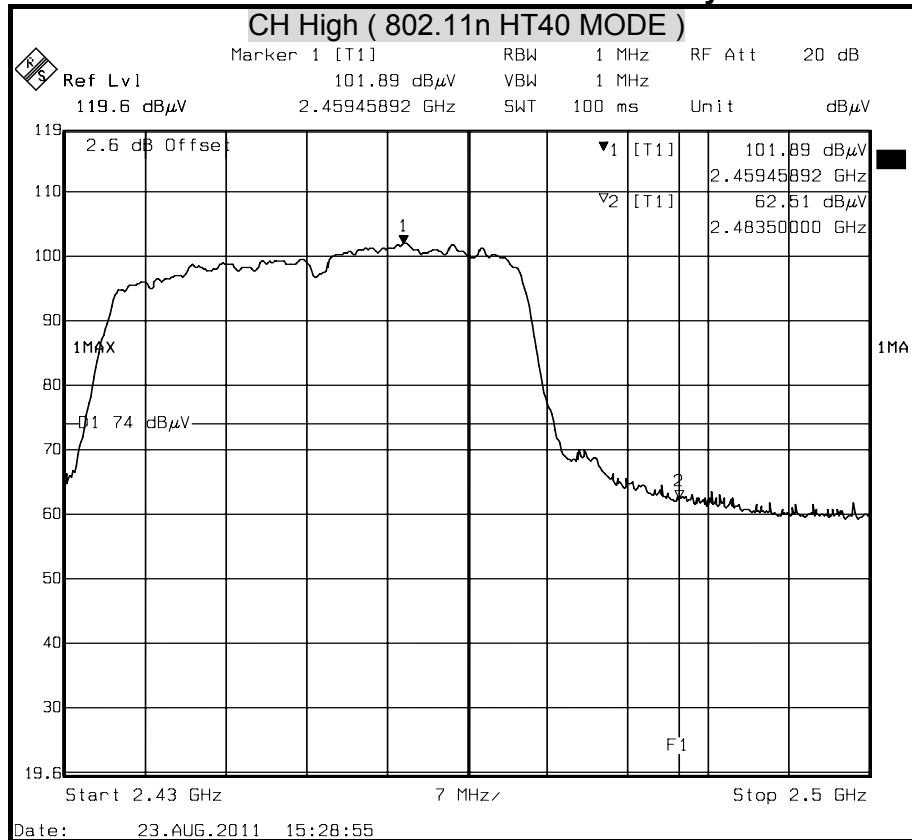

Detector mode : Average

Polarity : Horizontal

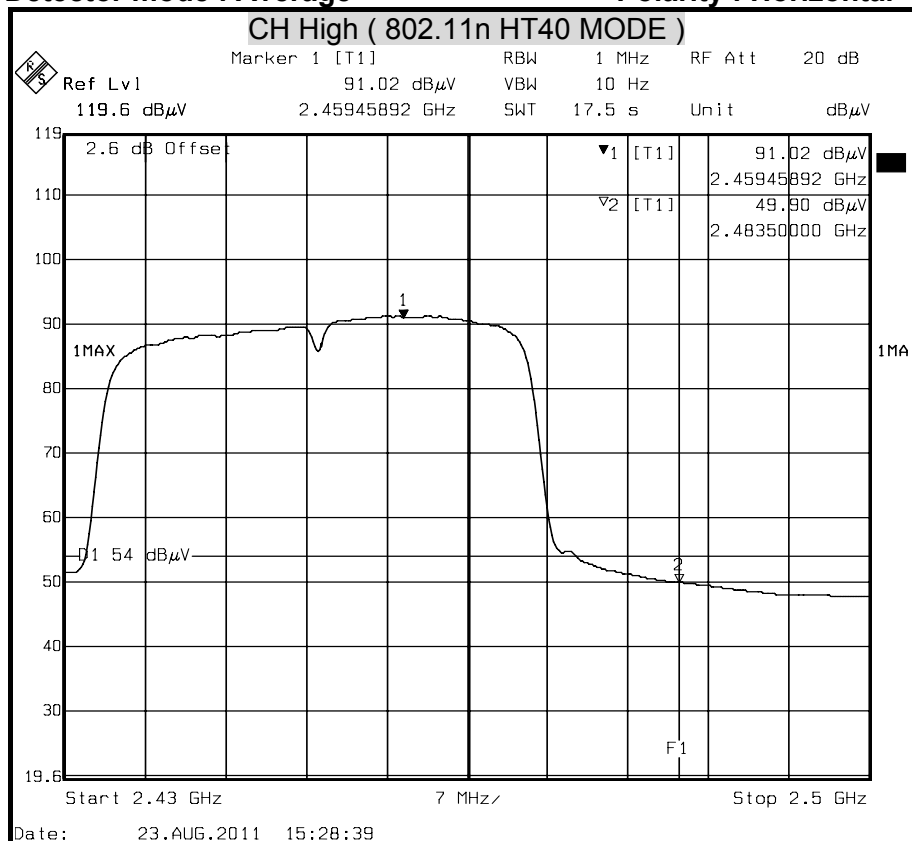

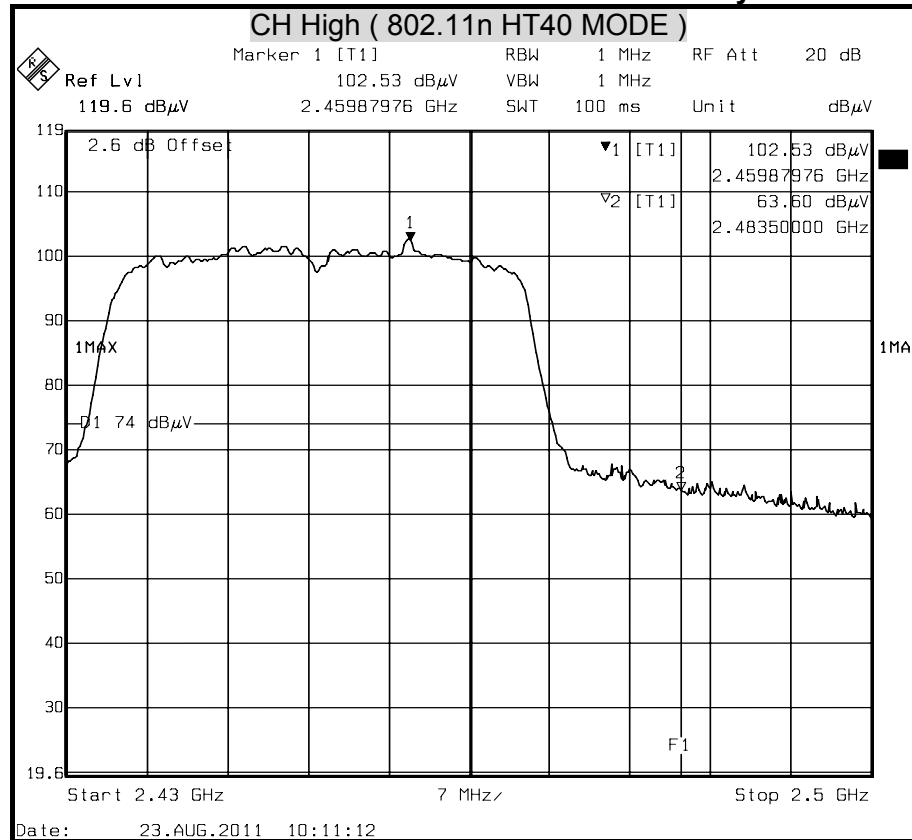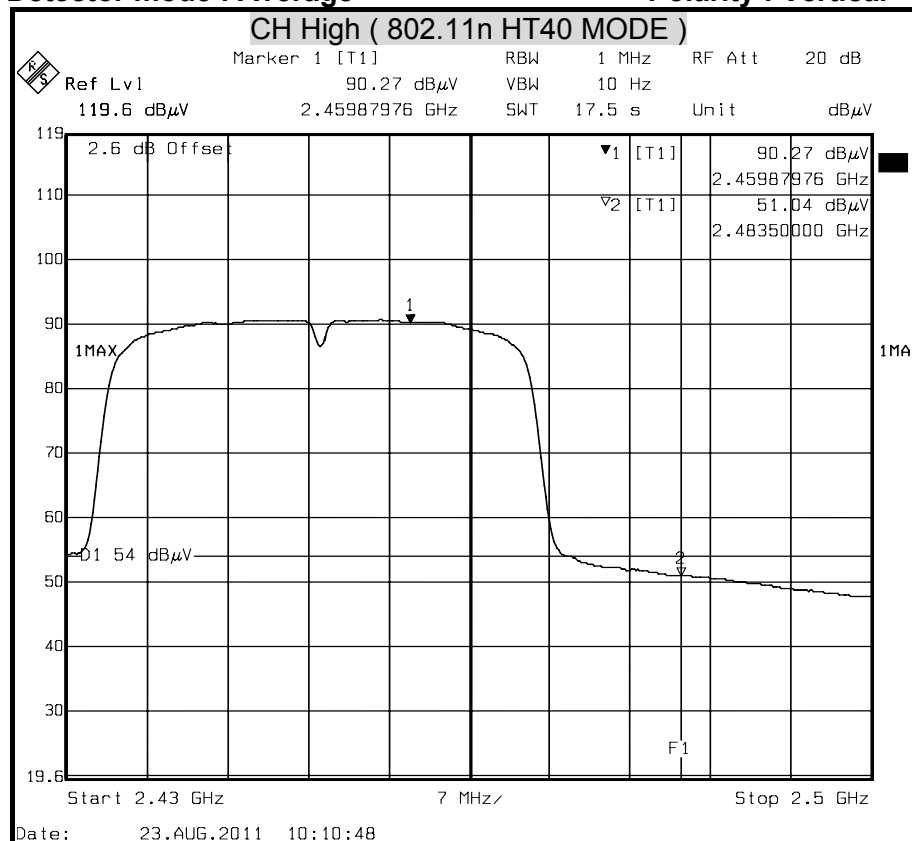**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**



8.7 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50


TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests:

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8121	8121-308	MAR. 09, 2012
	Rohde & Schwarz	ESH 3-Z5	840062/021	Aug. 02, 2012
TEST RECEIVER	Rohde & Schwarz	ESCS 30	100348	JUL. 03, 2012
TYPE N COAXIAL CABLE	CCS	BNC50	11	OCT. 04, 2012
Test S/W	e-3 (5.04211c) R&S (2.27)			



TEST SETUP

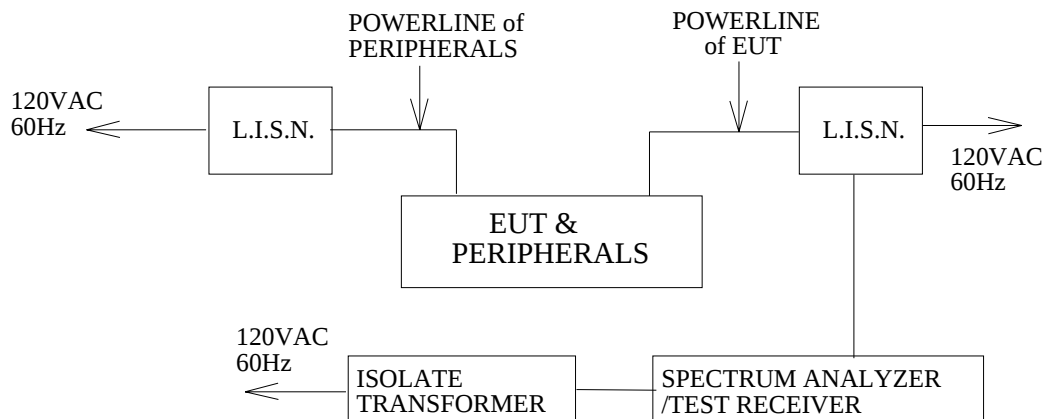

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS


No non-compliance noted.



CONDUCTED RF VOLTAGE MEASUREMENT

Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/12/01
Model	CDW561AM-U01	Test By	Ted Huang
Test Mode	Normal operating+Adapter 1	TEMP& Humidity	24.5°C, 49%

LINE

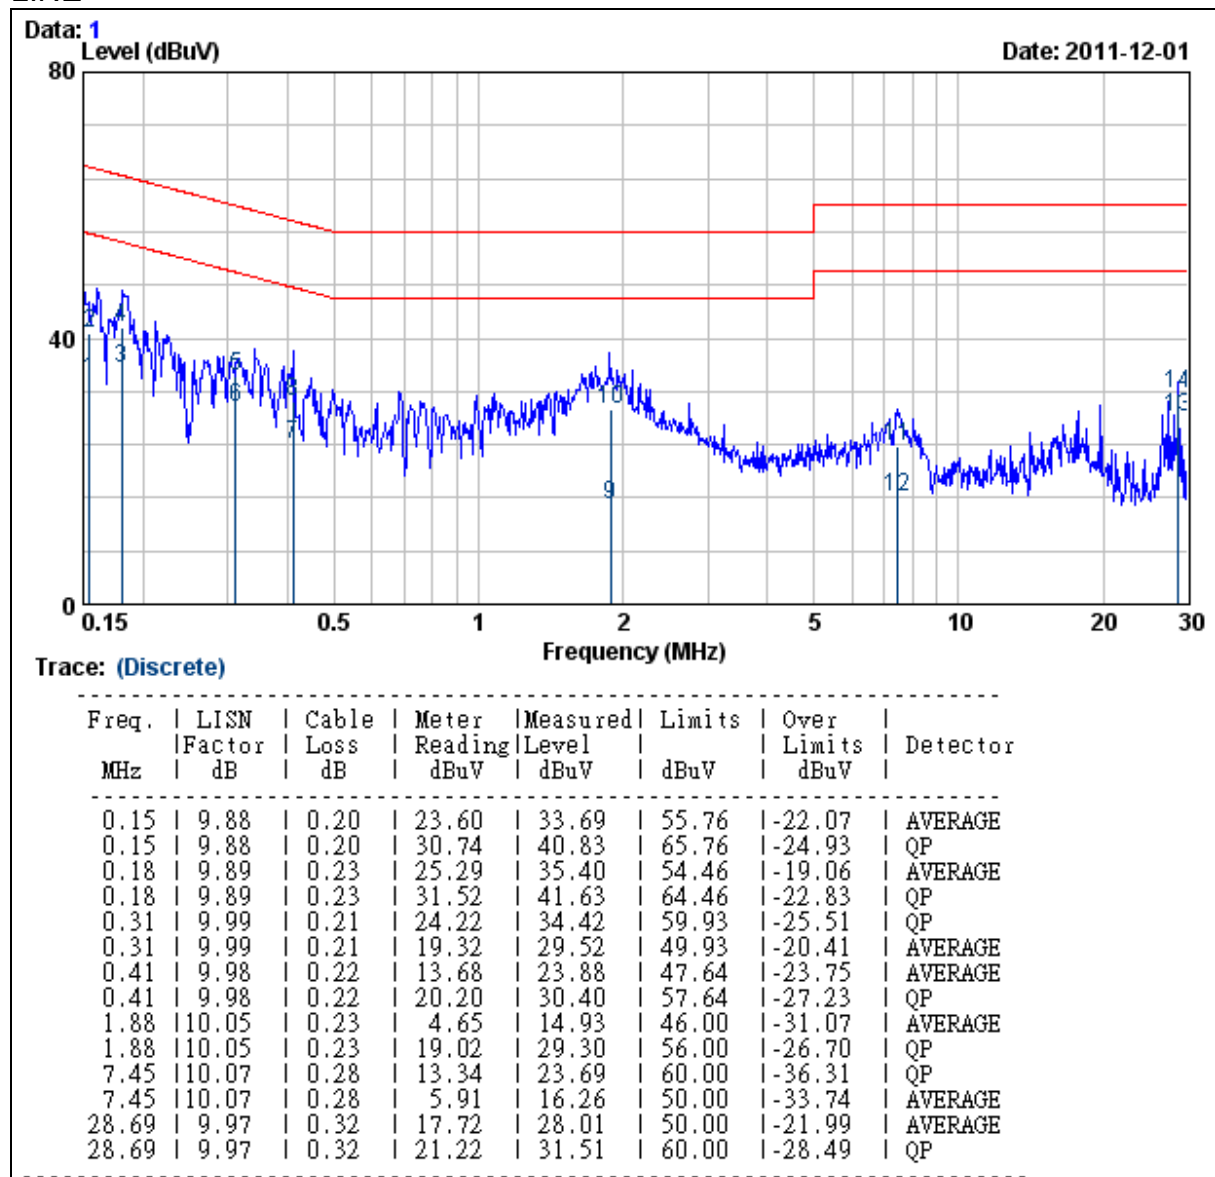


REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/12/01
Model	CDW561AM-U01	Test By	Ted Huang
Test Mode	Normal operating+Adapter 1	TEMP& Humidity	24.5°C, 49%

NEUTRAL

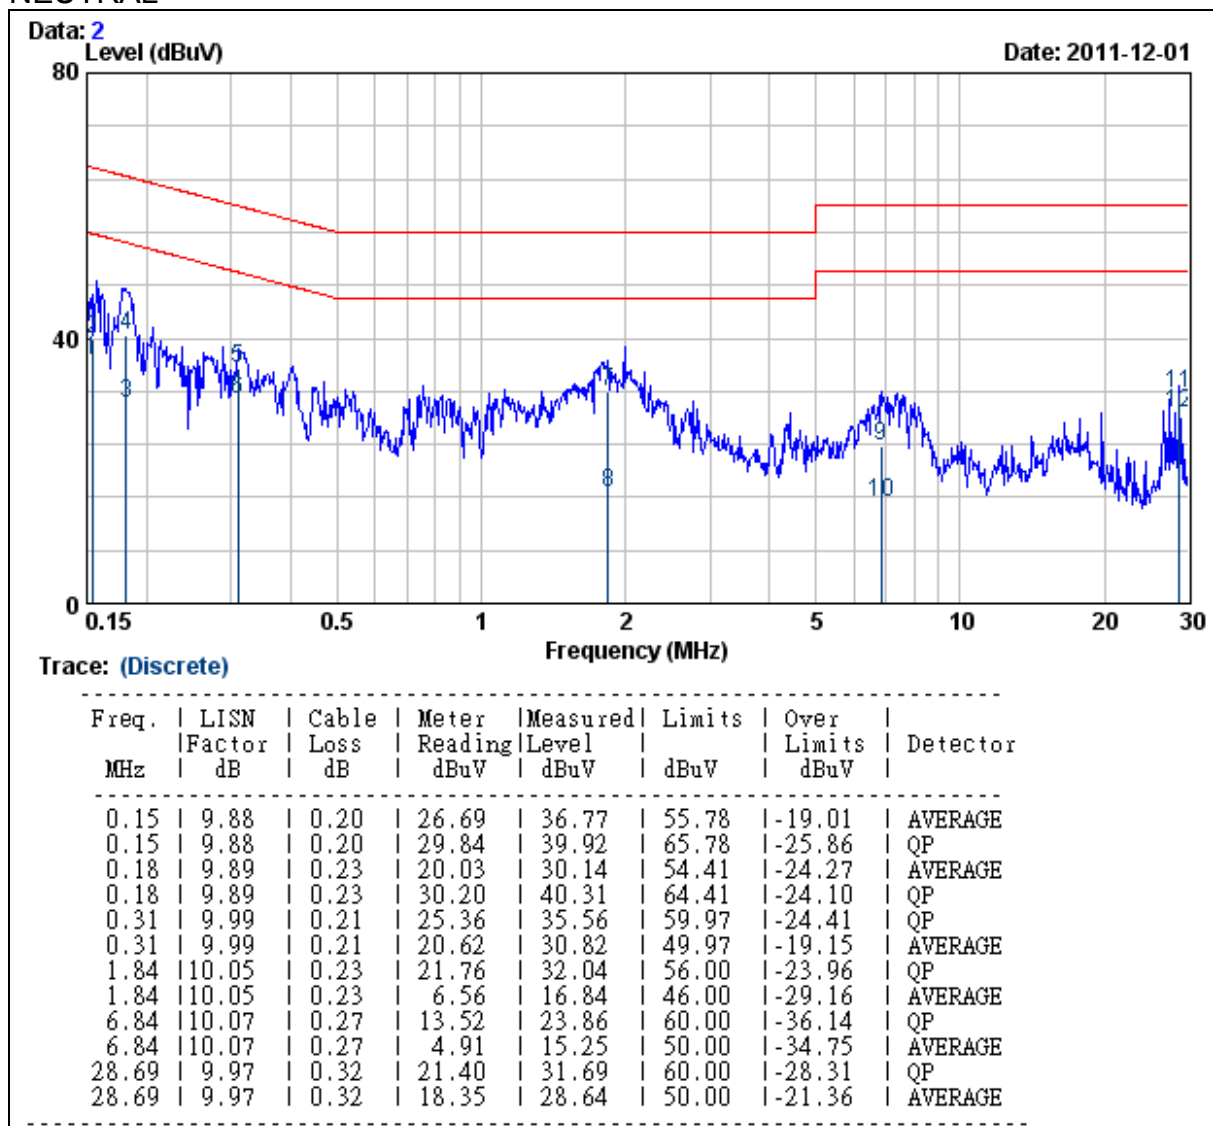


REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDE560AM-001	Test By	Shiang Su
Test Mode	Normal operating+Adapter 2	TEMP& Humidity	24.5°C, 49%

LINE

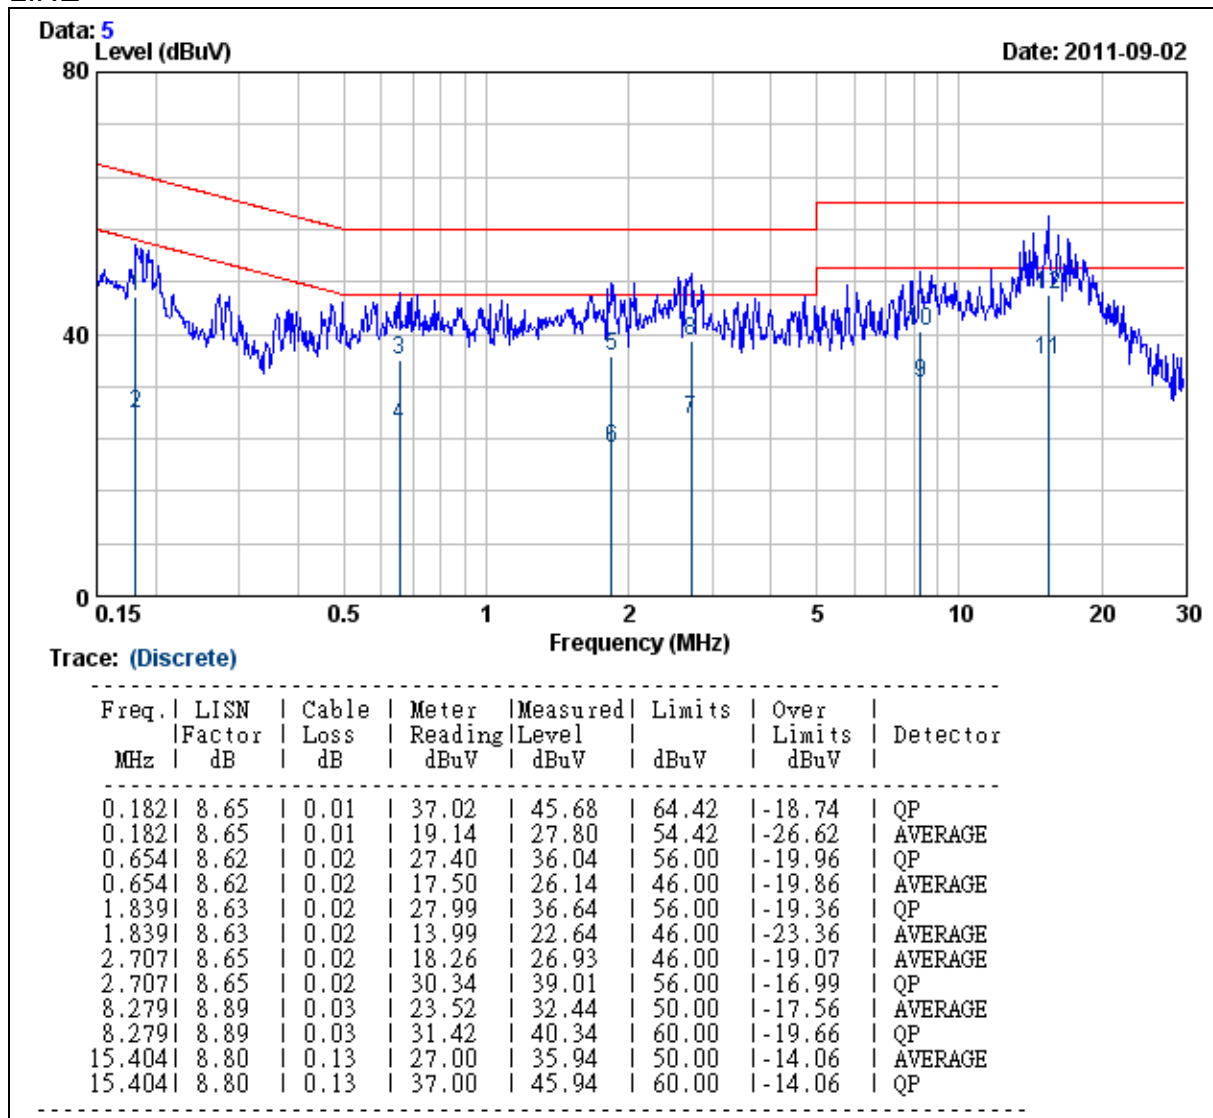


REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDE560AM-001	Test By	Shiang Su
Test Mode	Normal operating+Adapter 2	TEMP& Humidity	24.5°C, 49%

NEUTRAL

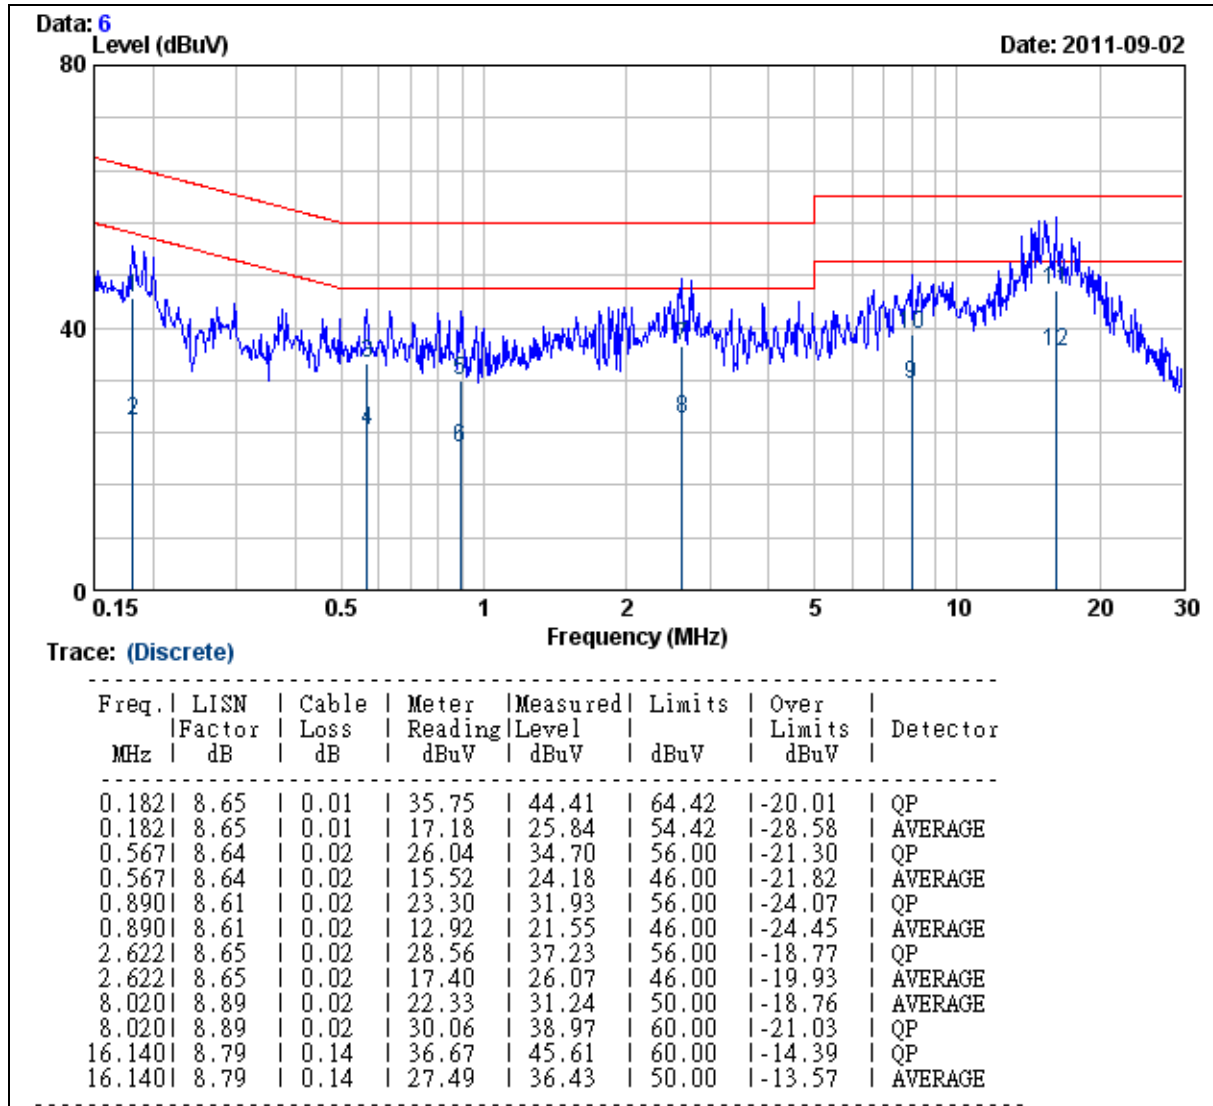


REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDE560AM-001	Test By	Shiang Su
Test Mode	Normal operating+Adapter 3	TEMP& Humidity	24.5°C, 49%

LINE

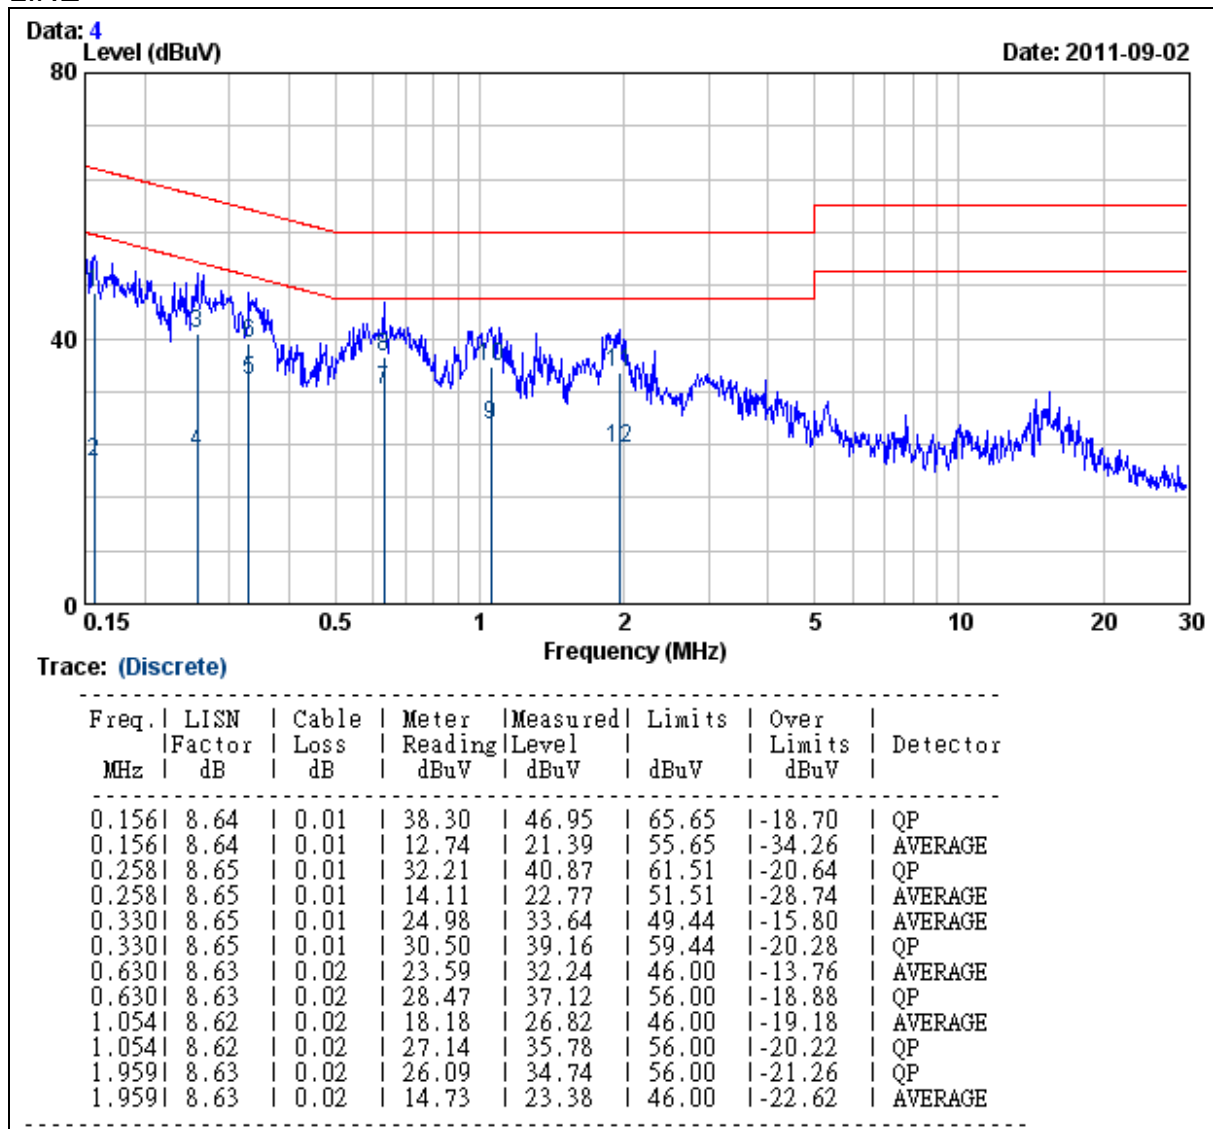


REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	WiFi Combo Router / WiFi Broadband Router	Test Date	2011/09/02
Model	CDE560AM-001	Test By	Shiang Su
Test Mode	Normal operating+Adapter 3	TEMP& Humidity	24.5°C, 49%

NEUTRAL

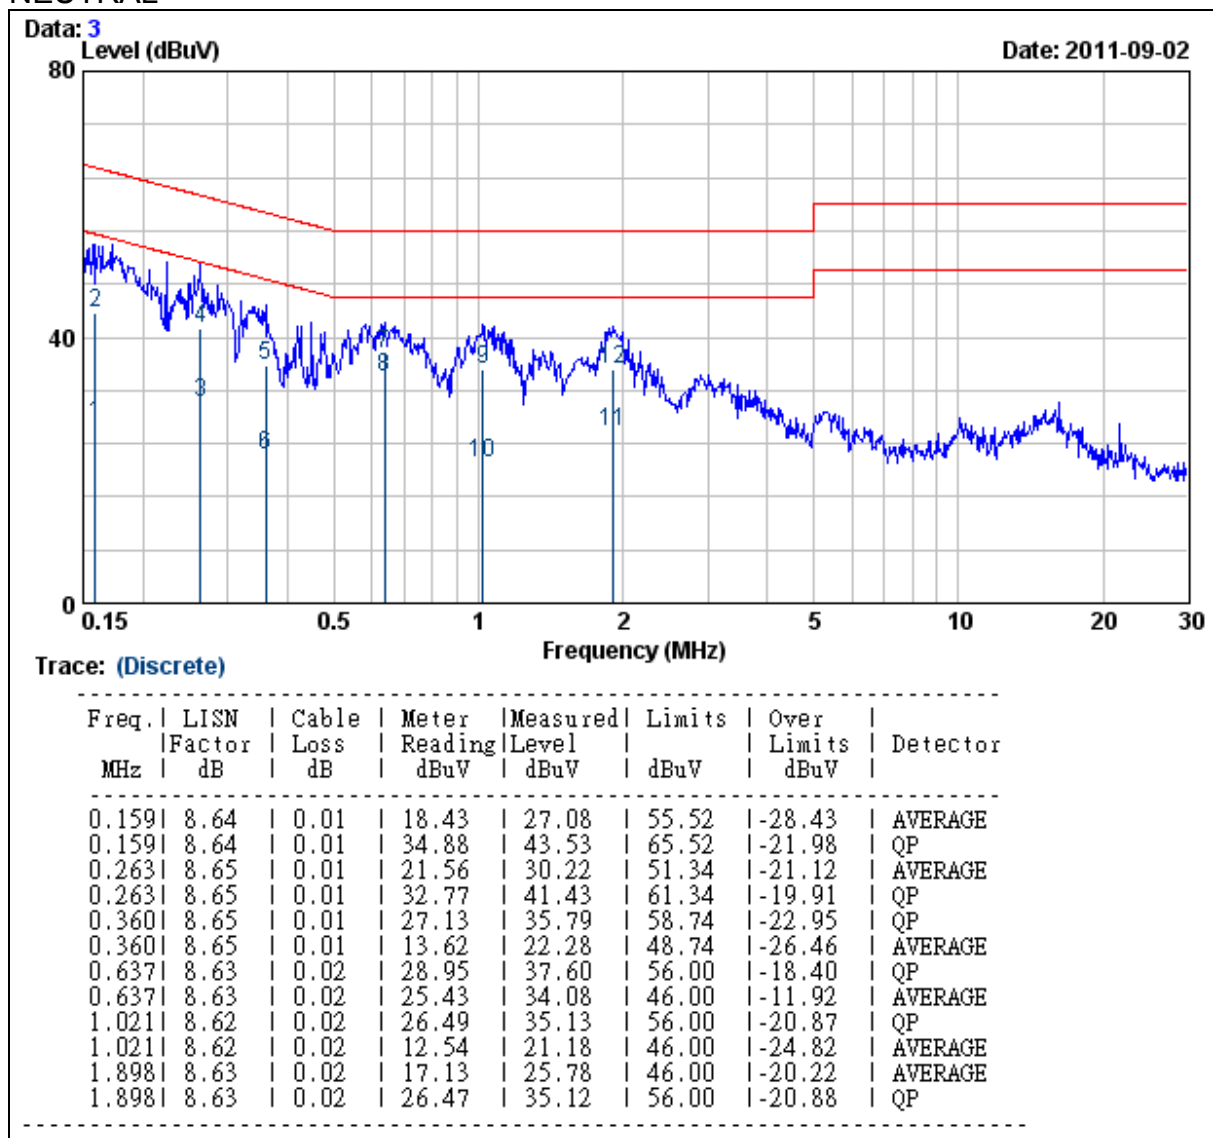

REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna spec. As below:

Replace antenna (2T2R)

Antenna 1

Type: Dipole Antenna

Model: GY111HT467-012

Gain: 2.35 dBi

Antenna 2

Type: Dipole Antenna

Model: C381-510150-A

Gain: 2 dBi