



Report No.:07268131

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s


Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M	EW0700
---	---	----	-----	--------

12	9k	30M	EW1449
----	----	-----	--------

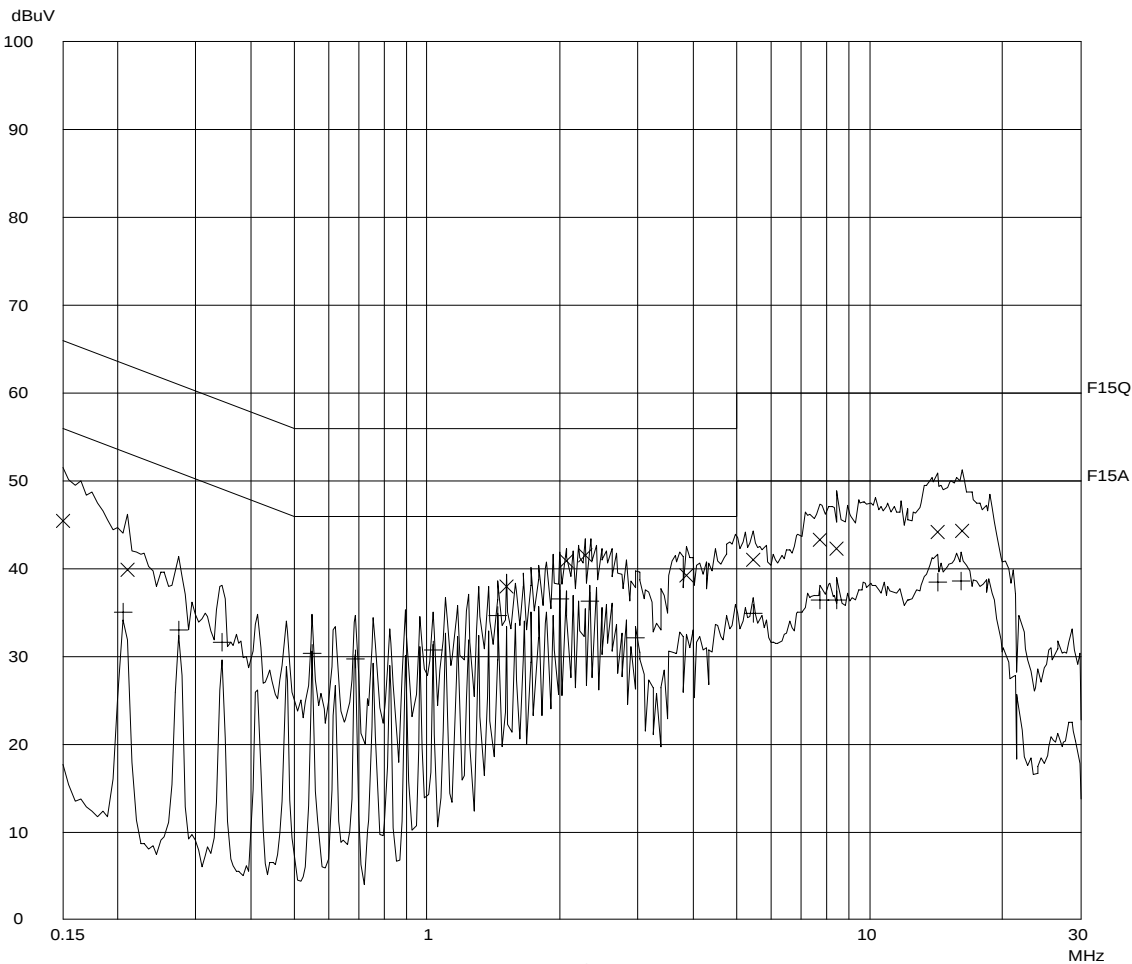



Report No.: 07268131
USB VOIP Talk Mode

Report No.:07268131

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	45.3	66.0	-20.7
0.21000	39.8	63.2	-23.4
1.51500	37.9	56.0	-18.1
2.06500	40.9	56.0	-15.1
2.27500	41.5	56.0	-14.5
3.86500	39.1	56.0	-16.9
5.45000	41.0	60.0	-19.0
7.73500	43.3	60.0	-16.7
8.43000	42.2	60.0	-17.8
14.23000	44.1	60.0	-15.9
16.18000	44.3	60.0	-15.7

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.20500	35.0	53.4	-18.4
0.27500	32.9	51.0	-18.1
0.34500	31.5	49.1	-17.6
0.55000	30.4	46.0	-15.6
0.69000	29.7	46.0	-16.3
1.03000	30.7	46.0	-15.3
1.44500	34.6	46.0	-11.4
1.99500	36.5	46.0	-9.5
2.34000	36.3	46.0	-9.7
2.96500	32.0	46.0	-14.0
5.45000	34.8	50.0	-15.2
7.74000	36.4	50.0	-13.6
8.43000	36.4	50.0	-13.6
14.24000	38.4	50.0	-11.6
16.14500	38.6	50.0	-11.4

* limit exceeded

Ctrl No.: N/A