

FCC TEST REPORT
for
L&K Precision Technology Co., Ltd

802.11/B/G/N Wireless Mini USB Dongle
Model No.:LP-8627S(100mW)

Prepared for : L&K Precision Technology Co., Ltd
Address : 6F, No. 236, Bo-ai St., Shulin District, New Taipei City 238,
Taiwan
Tel: + 886-2-86857300
Fax: + 886-2-86856179

Prepared By : Anbotek Compliance Laboratory Limited
Address : 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201207859F
Date of Test : Jul. 26~Aug. 13, 2012
Date of Report : Aug. 13, 2012

TABLE OF CONTENT

Description	Page
Test Report	1
1.GENERAL INFORMATION	4
1.1.Description of Device (EUT).....	4
1.2.Auxiliary Equipment Used during Test.....	5
1.3.Description of Test Facility	6
1.4.Measurement Uncertainty.....	6
3.TEST METHODOLOGY	7
3.1. Summary of Test Results.....	7
3.2. Description of Test Modes.....	7
3.3. List of channels:.....	8
4. CONDUCTED EMISSION TEST.....	9
4.1. Block Diagram of Test Setup	9
4.2. Power Line Conducted Emission Measurement Limits (15.207).....	9
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	10
4.6.Test equipment	10
4.7. Power Line Conducted Emission Measurement Results	10
5. FCC PART 15.247 REQUIREMENTS FOR DSSS & OFDM MODULATION.....	13
5.1 Test Setup	13
5.2 6dB Bandwidth	13
5.3 Maximum Peak output power test	21
5.4 Band Edges Measurement	29
5.5 Peak Power Spectral Density	38
5.6 Spurious Emission Test	45
5.7 Radiated Emissions.....	50
6. PHOTOGRAPH.....	65
6.1. Photo of Conducted Emission Measurement.....	65
6.2. Photo of Radiation Emission Test	66

Appendix I (1 Pages)

Appendix II (2 Pages)

TEST REPORT

Applicant : L&K Precision Technology Co., Ltd
 Manufacturer : Pei-Sing Electronic Factory
 EUT : 802.11/B/G/N Wireless Mini USB Dongle
 Model No. : LP-8627S(100mW)
 Serial No. : N/A
 Rating : DC 5V
 Trade Mark : N/A

Measurement Procedure Used:
 FCC Part15 Subpart C, Paragraph 15.247: 2010

The device described above is tested by Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited

Date of Test : Jul. 26~Aug. 13, 2012

Prepared by :




(Engineer / Andy Chen)

Reviewer :



(Project Manager / Jerry Du)

Approved & Authorized Signer :

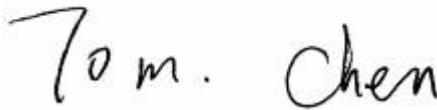

(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : 802.11/B/G/N Wireless Mini USB Dongle

Model Number : LP-8627S(100mW)

Test Power Supply : DC 5V

RF Transmission Frequency : 2412MHz~2462MHz (802.11b/802.11g/802.11n (HT20))
2422MHz~2452MHz (802.11n (HT40))

Channels : 11 For (802.11b/802.11g/802.11n (HT20))
7 For (802.11n (HT40))

Antenna Type : Integral

Antenna Gain : 2 dBi

Applicant Address : L&K Precision Technology Co., Ltd
: 6F, No. 236, Bo-ai St., Shulin District, New Taipei City 238, Taiwan

Manufacturer Address : Pei-Sing Electronic Factory
: 9 WuGang Road XiKeng Industrial Zone, HengGang Town,
ShenZhen City, GuangDong Province, China

Date of receiver : Jul. 26, 2012

Date of Test : Jul. 26~Aug. 13, 2012

1.2. Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
KEYBOARD	: Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Printer	: Manufacturer: Brother M/N: MFC-3360C S/N: N/A CE, FCC:DOC
Power Line	: Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m
Network Cable	: Non-Shielded, 1.5m

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotech Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010.

IC-Registration No.: 8058A-1

Anbotech Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, August 30, 2010.

Test Location

All Emissions tests were performed at

Anbotech Compliance Laboratory Limited. at 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC Part 15, Paragraph 15.247

3.1. Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107, 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15, Paragraph 15.247(b)(1)	Peak Output Power	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(2)	6dB Bandwidth	PASS	Complies
FCC Part 15, Paragraph 15.247(c)	100kHz Bandwidth of Frequency Band Edges	PASS	Complies
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(1)	Frequency Separation	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Number of Hopping Frequency	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Time of Occupancy	-	N/A
FCC Part 15, Paragraph 15.247(c)	Peak Power Density	PASS	Complies

* The digital circuit porting of the EUT has been tested and verified to comply with FCC Part 15, Subpart B., Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with FCC Part 15, Subpart B – Radio Receivers.

3.2. Description of Test Modes

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1Mbps data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6.5Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 13.5Mbps data rate (the worst case) are chosen for the final testing.

3.3. List of channels:

✓ - available


X - tested

Number	Frequency(MHz)		802.11 b/g/n (HT20)	802.11 b/g/n (HT40)
1	2412	✓	X	
2	2417	✓		
3	2422	✓		X
4	2427	✓		
5	2432	✓		
6	2437	✓	X	X
7	2442	✓		
8	2447	✓		
9	2452	✓		X
10	2457	✓		
11	2462	✓	X	

4. Conducted Emission Test

4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators

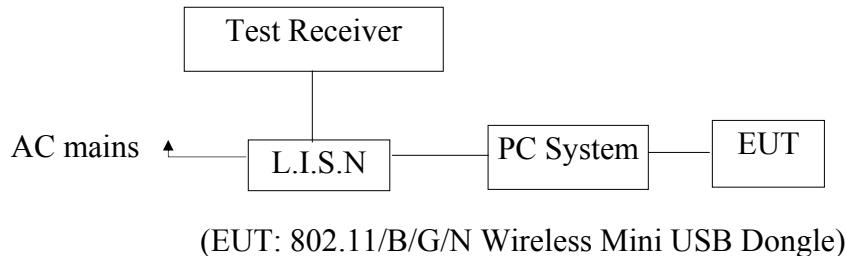

4.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : 802.11/B/G/N Wireless Mini USB Dongle
 Model Number : LP-8627S(100mW)
 Applicant : L&K Precision Technology Co., Ltd

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in test mode (ON) and measure it.

4.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 4.6.

4.6. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2012	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2012	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A

Conduction Uncertainty : $U_c = 3.4\text{dB}$

4.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

Please refer the following pages.


FCC ID:PCG-LP-8627S

CONDUCTED EMISSION TEST DATA

EUT: 802.11/B/G/N Wireless Mini USB Dongle M/N:LP-8627S(100mW)
 Operating Condition: On
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: AC 120V/60Hz for USB
 Comment: Live Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

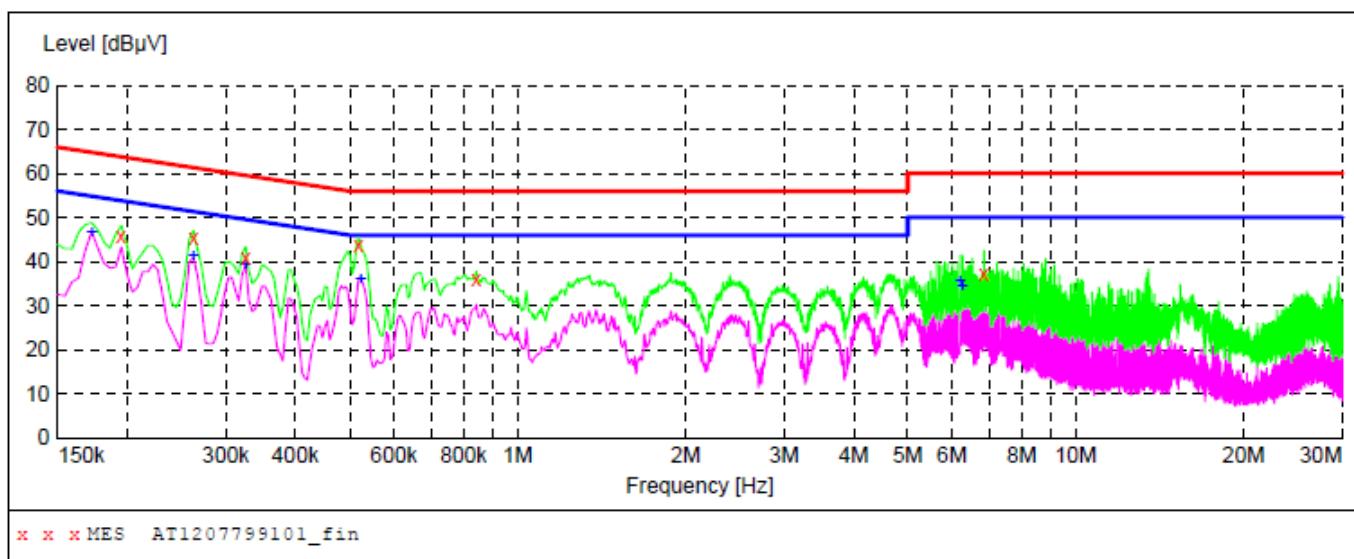**MEASUREMENT RESULT: "AT1207799101_fin"**

7/27/2012 9:42AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.195000	46.00	10.1	64	17.8	QP	L1	GND
0.262500	45.40	10.1	61	16.0	QP	L1	GND
0.325500	40.80	10.1	60	18.8	QP	L1	GND
0.519000	43.90	10.1	56	12.1	QP	L1	GND
0.843000	35.90	10.1	56	20.1	QP	L1	GND
6.845500	37.10	10.5	60	22.9	QP	L1	GND

MEASUREMENT RESULT: "AT1207799101_fin2"

7/27/2012 9:42AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.172500	46.70	10.1	55	8.1	AV	L1	GND
0.262500	41.30	10.1	51	10.1	AV	L1	GND
0.325500	39.10	10.1	50	10.5	AV	L1	GND
0.523500	36.00	10.1	46	10.0	AV	L1	GND
6.206500	35.60	10.5	50	14.4	AV	L1	GND
6.269500	34.60	10.5	50	15.4	AV	L1	GND


FCC ID:PCG-LP-8627S

CONDUCTED EMISSION TEST DATA

EUT: 802.11/B/G/N Wireless Mini USB Dongle M/N:LP-8627S(100mW)
 Operating Condition: On
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: AC 120V/60Hz for USB
 Comment: Neutral Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

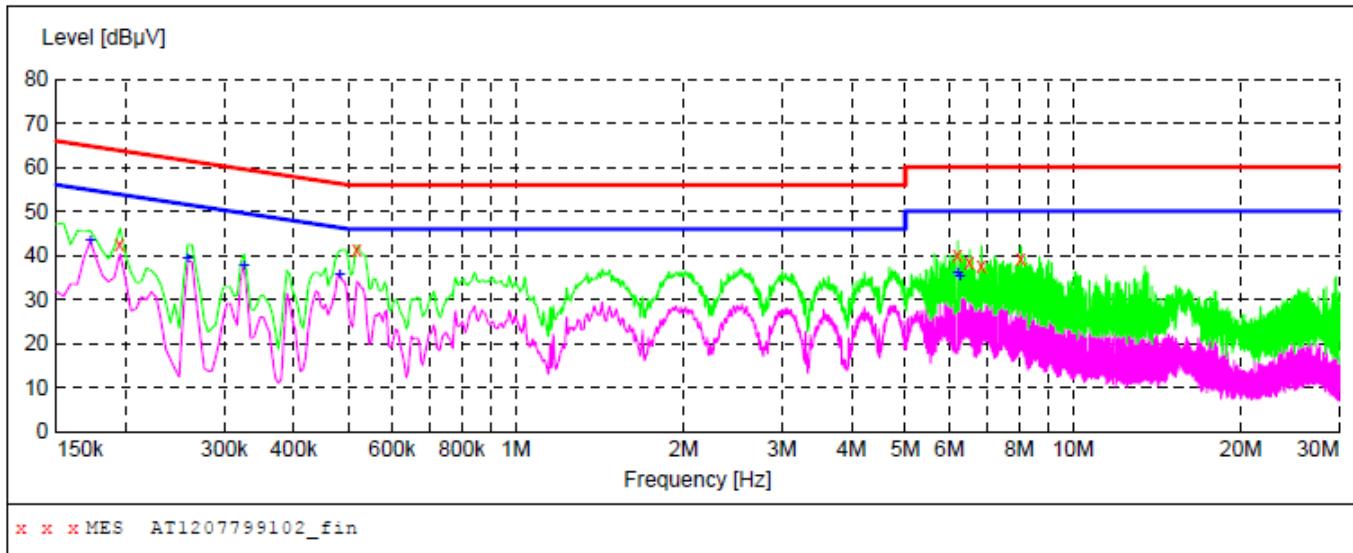**MEASUREMENT RESULT: "AT1207799102_fin"**

7/27/2012 9:45AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.195000	42.60	10.1	64	21.2	QP	N	GND
0.519000	41.30	10.1	56	14.7	QP	N	GND
6.206500	40.00	10.5	60	20.0	QP	N	GND
6.526000	38.30	10.5	60	21.7	QP	N	GND
6.845500	37.60	10.5	60	22.4	QP	N	GND
8.060500	39.10	10.5	60	20.9	QP	N	GND


MEASUREMENT RESULT: "AT1207799102_fin2"

7/27/2012 9:45AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.172500	43.20	10.1	55	11.6	AV	N	GND
0.258000	39.20	10.1	52	12.3	AV	N	GND
0.325500	37.70	10.1	50	11.9	AV	N	GND
0.483000	35.60	10.1	46	10.7	AV	N	GND
6.206500	36.20	10.5	50	13.8	AV	N	GND
6.269500	35.30	10.5	50	14.7	AV	N	GND

5. FCC Part 15.247 Requirements for DSSS & OFDM Modulation

5.1 Test Setup



5.2 6dB Bandwidth

a. Limit

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

b. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 200kHz(802.11b/802.11g/802.11n(HT20)), RBW=400kHz, VBW = 3*RBW, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

c. Test Setup See 5.1

d. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

e. Test Results

Pass

f. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	10.10		Pass
Mid	2437	10.00	>500	Pass
High	2462	10.00		Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.50		Pass
Mid	2437	17.80	>500	Pass
High	2462	16.60		Pass

Test mode: IEEE 802.11n (HT20)

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.60		Pass
Mid	2437	17.80	>500	Pass
High	2462	17.80		Pass


Test mode: IEEE 802.11n (HT40)

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2422	40.40		Pass
Mid	2437	46.40	>500	Pass
High	2452	42.40		Pass

Test Plots See the following page.


FCC ID:PCG-LP-8627S

Test Mode: 802.11b---Low

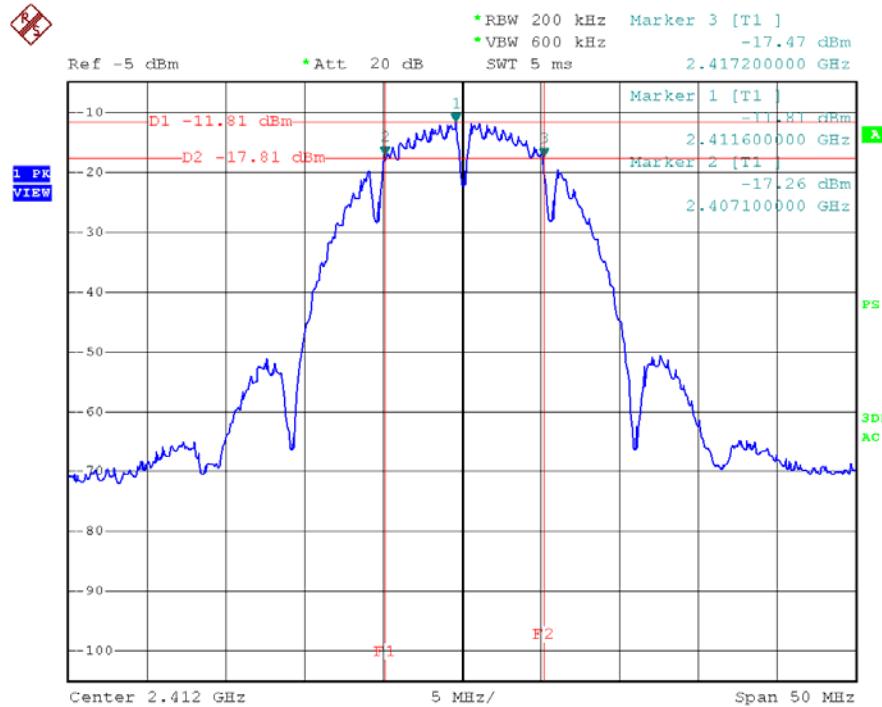

6dB-2412


Test Mode: 802.11b---Mid

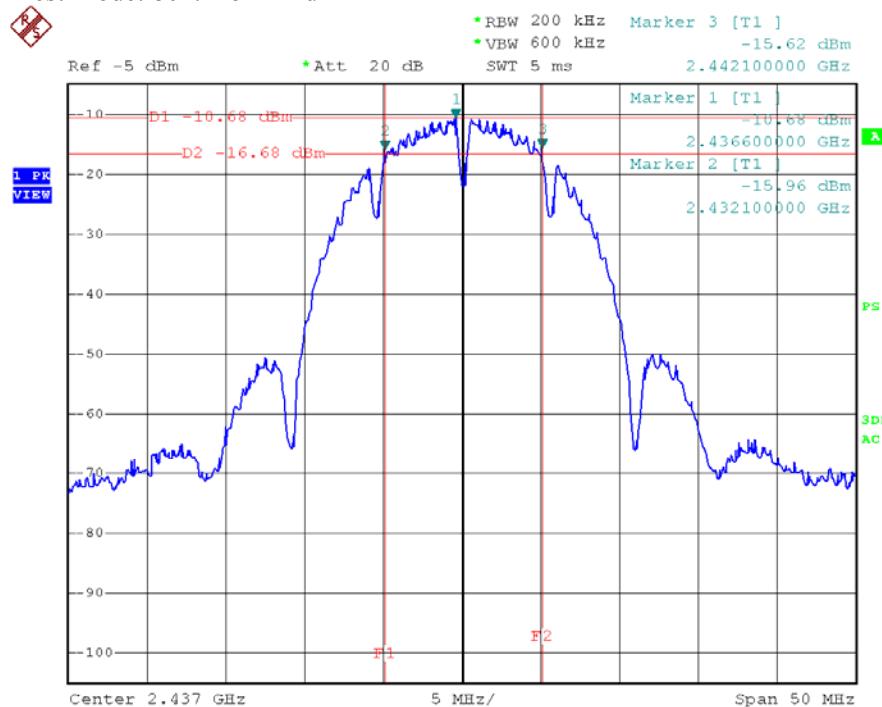

6dB-2437


FCC ID:PCG-LP-8627S

Test Mode: 802.11b---High

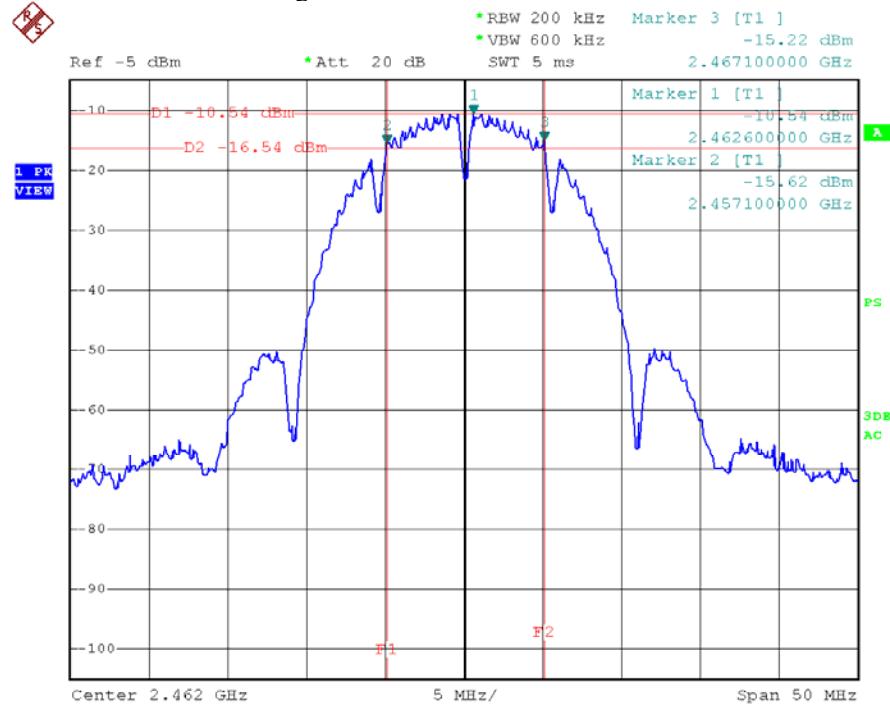

6dB-2462


Test Mode: 802.11g---Low

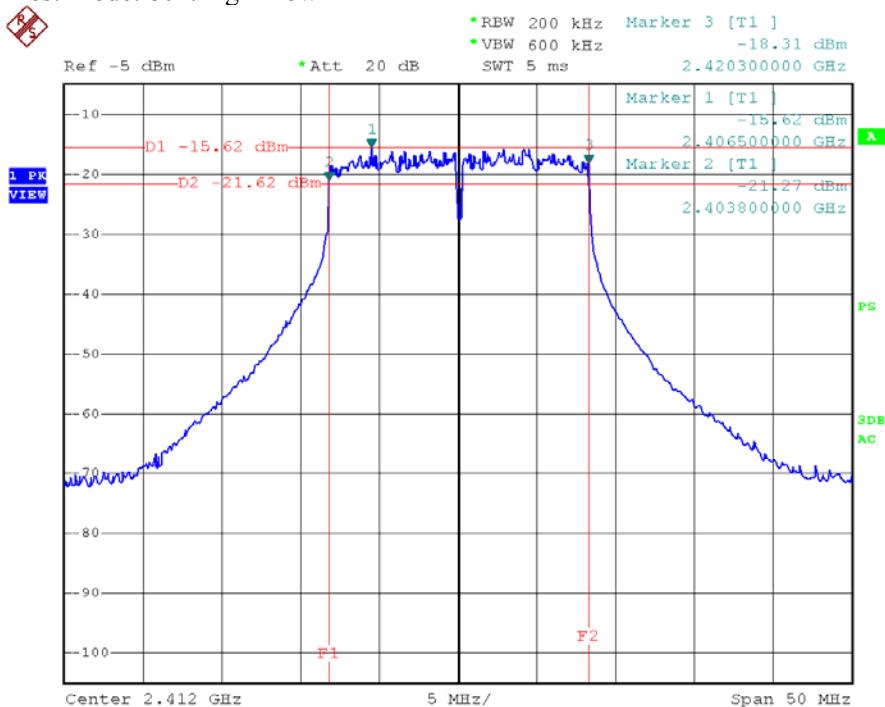

6dB-2412


FCC ID:PCG-LP-8627S

Test Mode: 802.11g---Mid

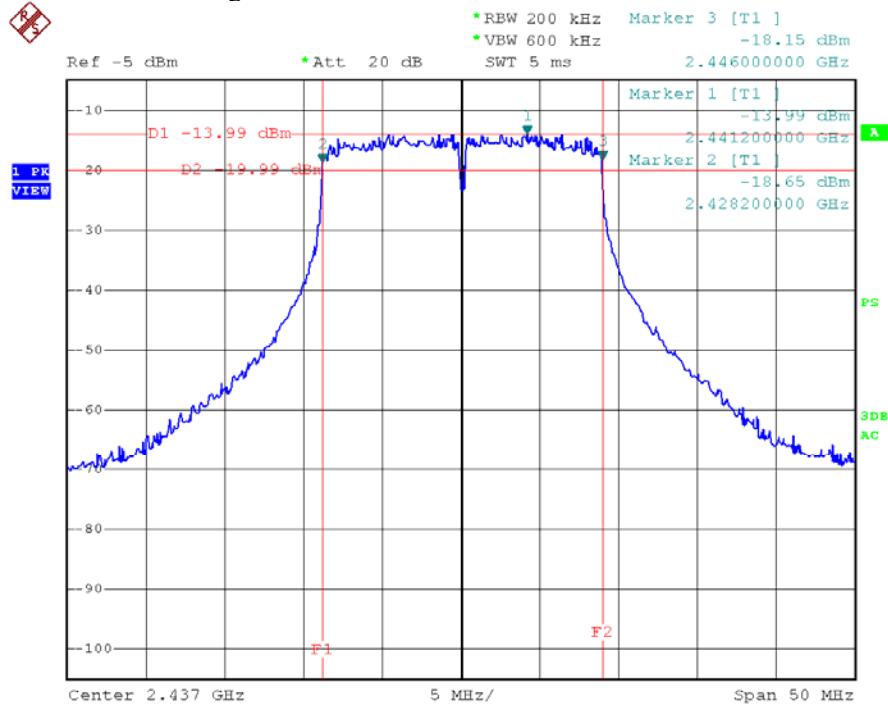


6dB-2437

Test Mode: 802.11g---High

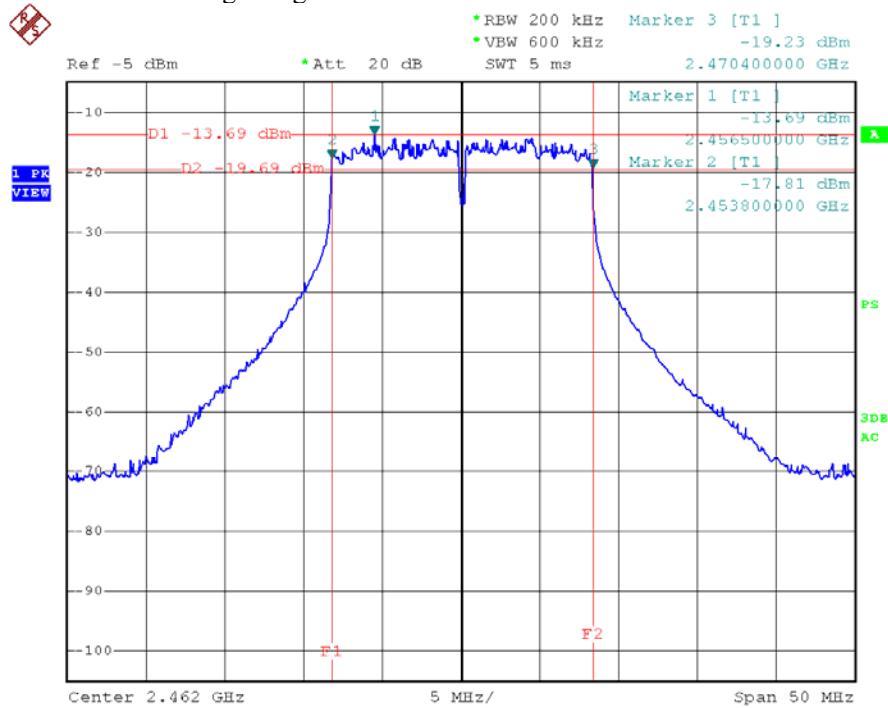


6dB-2462

Test Mode: 802.11n (HT20) ---Low

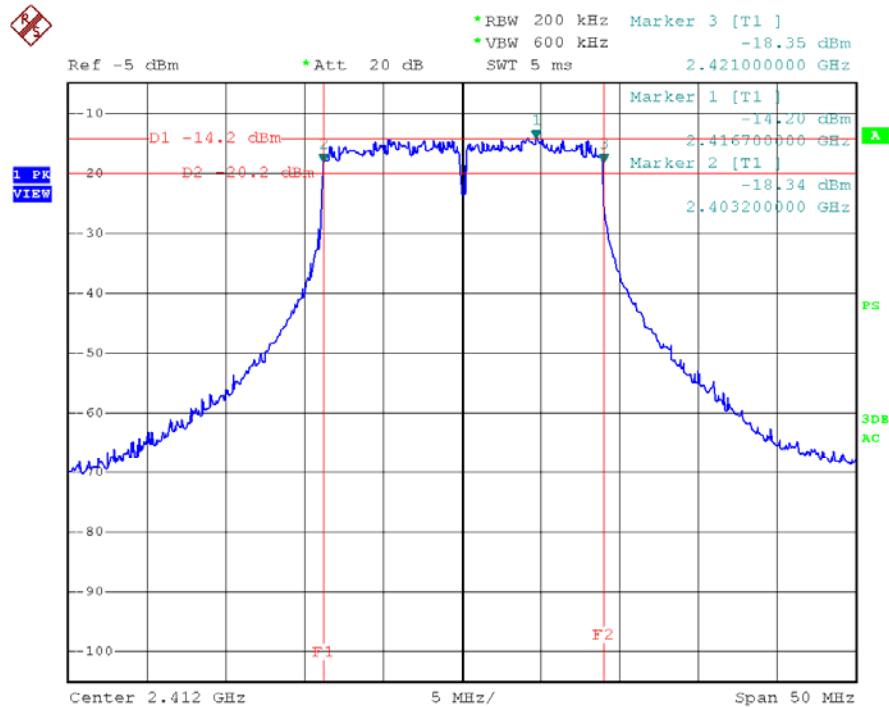


6dB-2412

Test Mode: 802.11n (HT20) ---Mid

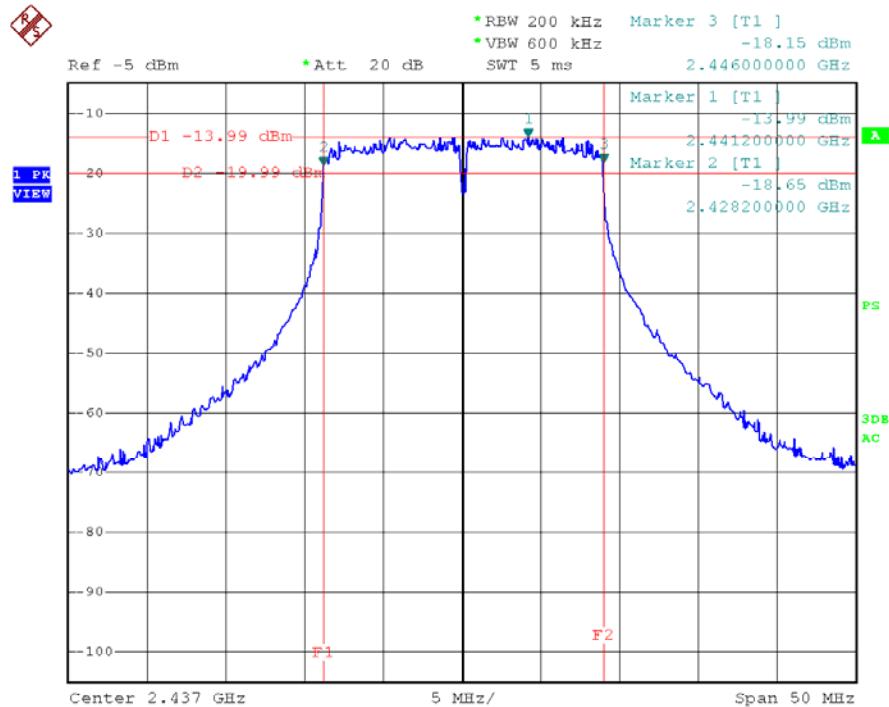


6dB-2437

Test Mode: 802.11n (HT20) ---High

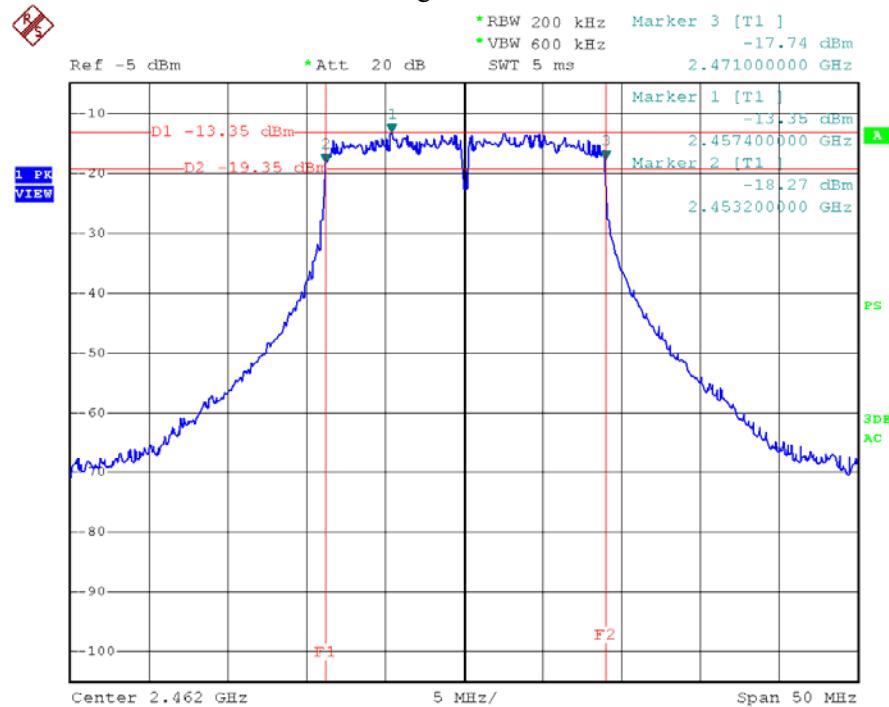

6dB-2462


Test Mode: 802.11n (HT40) ---Low

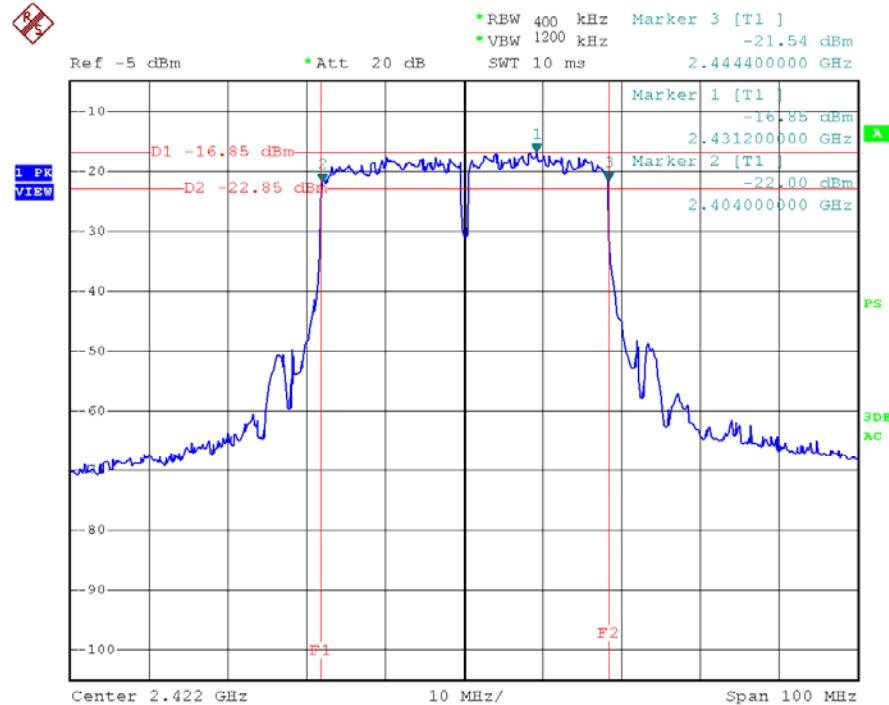

6dB-2422


FCC ID:PCG-LP-8627S

Test Mode: 802.11n (HT40) ---Mid

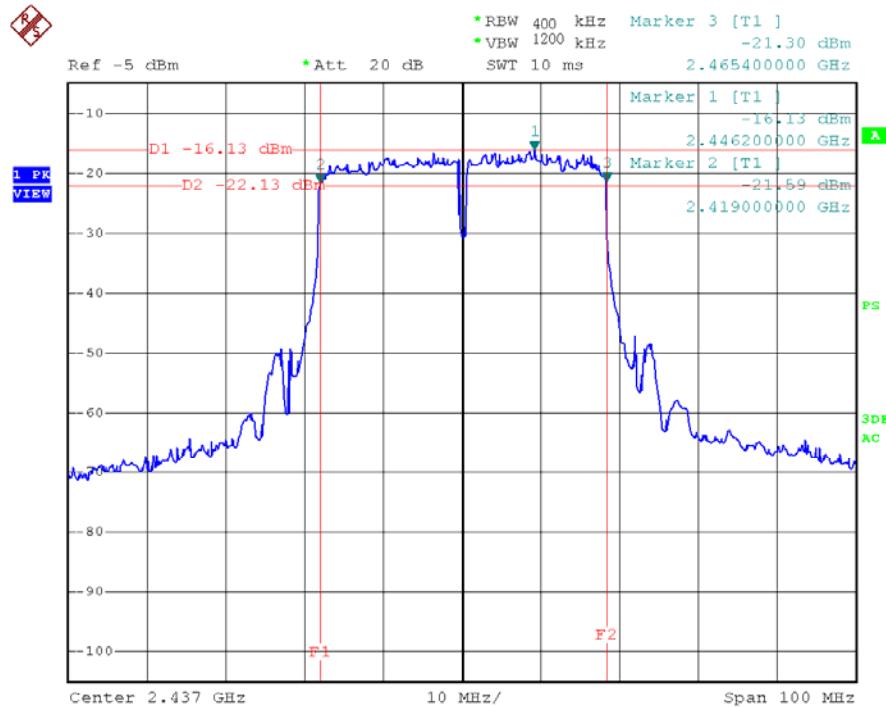

6dB-2437

Test Mode: 802.11n (HT40) ---High

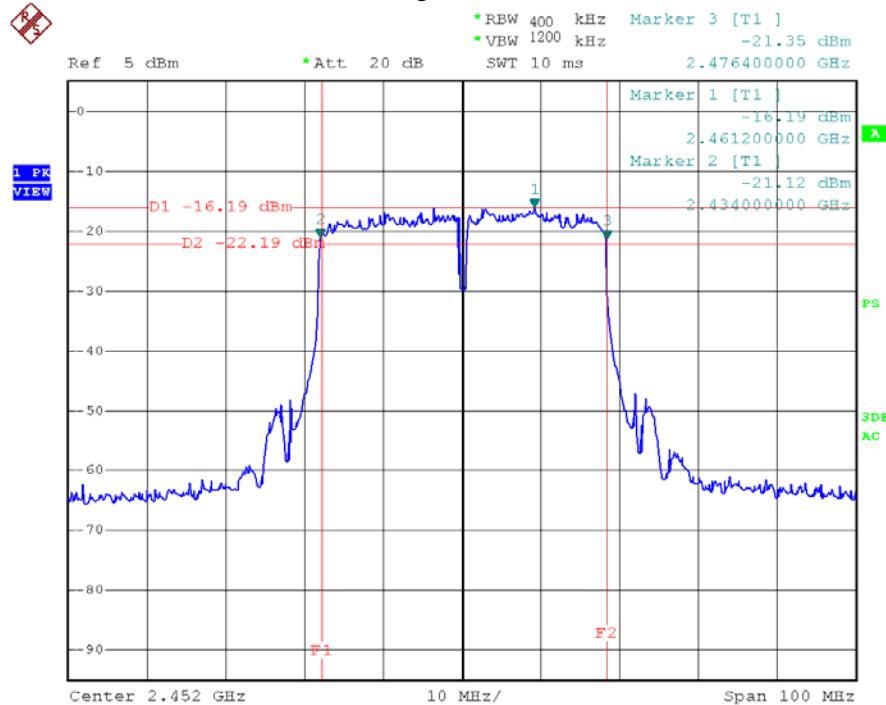

6dB-2452


5.3 Maximum Peak output power test

a. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt (30dBm).
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antenna of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

b. Configuration of Measurement



c. Data Rates

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 11Mbps data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 54Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 7Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 7Mbps data rate (the worst case) are chosen for the final testing.

d. Test Procedure

This test was according the kdb 58074 5.2.1.2 Measurement Procedure PK2:

1. This procedure provides an integrated measurement alternative when the maximum available RBW < EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Set the span to a value that is 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the EBW of the spectrum.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

e. Test Results

Pass

f. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Maximum transmit power	Limit		Result
		(dBm)	(dBm)	(watts)	
Low	2412	9.36	30	1	Pass
Mid	2437	9.08			Pass
High	2462	8.55			Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Maximum transmit power	Limit		Result
		(dBm)	(dBm)	(watts)	
Low	2412	9.26	30	1	Pass
Mid	2437	9.11			Pass
High	2462	9.62			Pass

Test mode: IEEE 802.11n (HT20)


Channel	Frequency (MHz)	Maximum transmit power	Limit		Result
		(dBm)	(dBm)	(watts)	
Low	2412	9.49	30	1	Pass
Mid	2437	9.68			Pass
High	2462	9.19			Pass

Test mode: IEEE 802.11n (HT40)

Channel	Frequency (MHz)	Maximum transmit power	Limit		Result
		(dBm)	(dBm)	(watts)	
Low	2422	9.22	30	1	Pass
Mid	2437	9.10			Pass
High	2452	9.85			Pass

FCC ID:PCG-LP-8627S


Test Mode: 802.11b ---Low

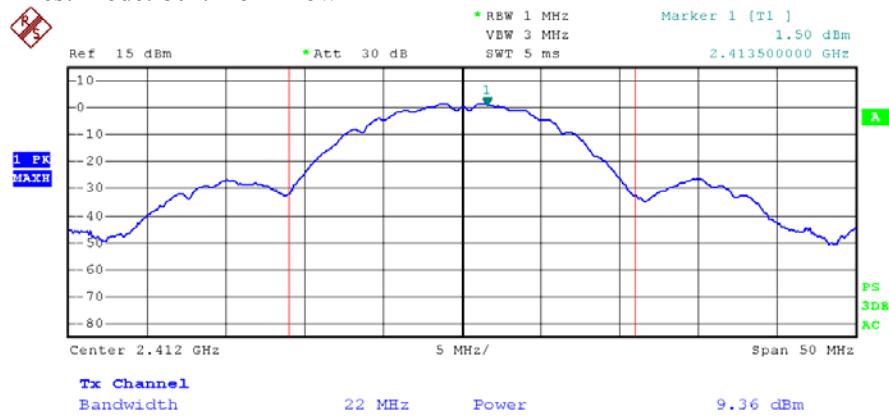

L

Date: 1.AUG.2012 15:32:16

Test Mode: 802.11b---Mid

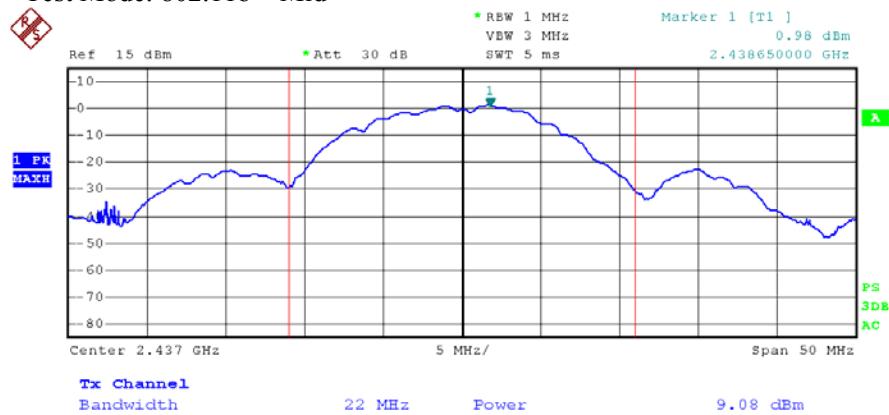


M

Date: 1.AUG.2012 15:33:05

FCC ID:PCG-LP-8627S


Test Mode: 802.11b---High

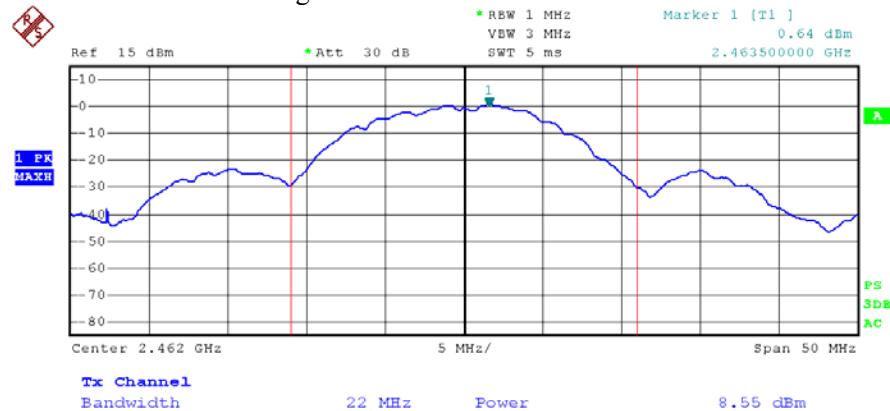

L

Date: 1.AUG.2012 15:34:12

Test Mode: 802.11g ---Low

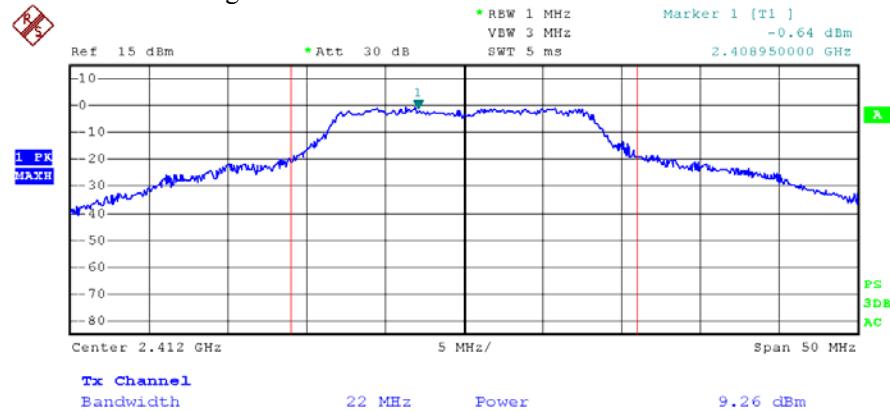


L

Date: 1.AUG.2012 15:36:30

FCC ID:PCG-LP-8627S


Test Mode: 802.11g---Mid

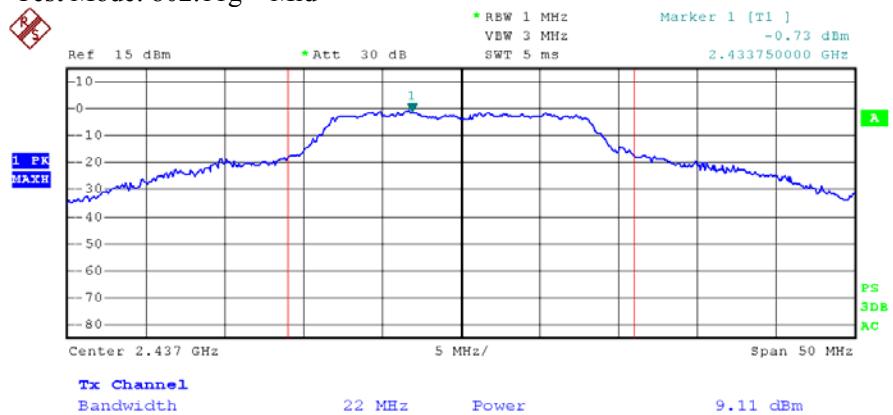

M

Date: 1.AUG.2012 15:35:54

Test Mode: 802.11g---High

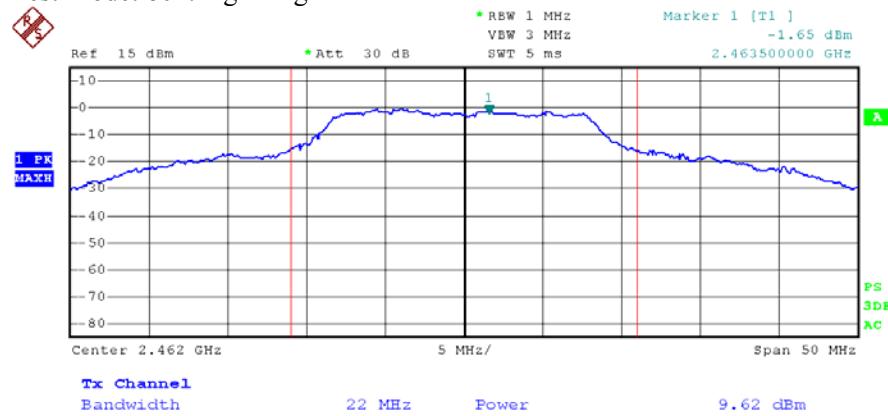


H

Date: 1.AUG.2012 15:35:09

FCC ID:PCG-LP-8627S


Test Mode: 802.11n (HT20) ---Low

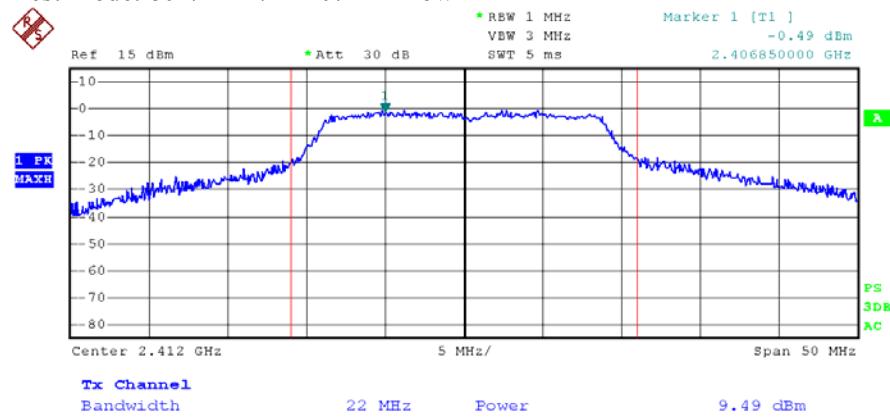

L

Date: 1.AUG.2012 15:37:32

Test Mode: 802.11n (HT20) ---Mid

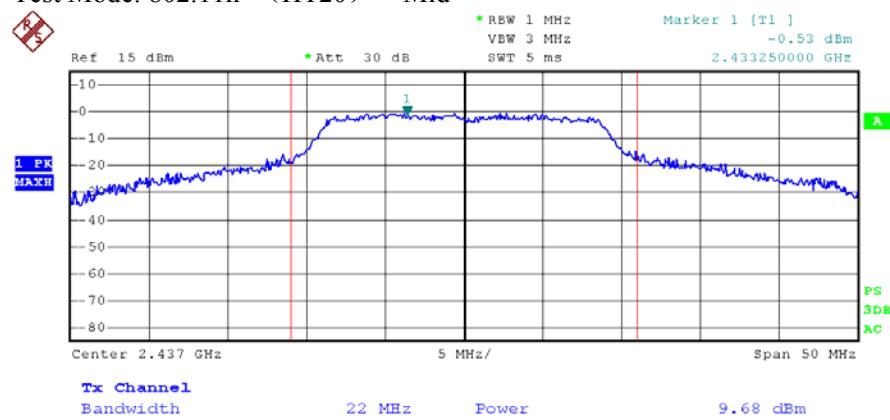


H

Date: 1.AUG.2012 15:38:24

FCC ID:PCG-LP-8627S


Test Mode: 802.11n (HT20) ---High

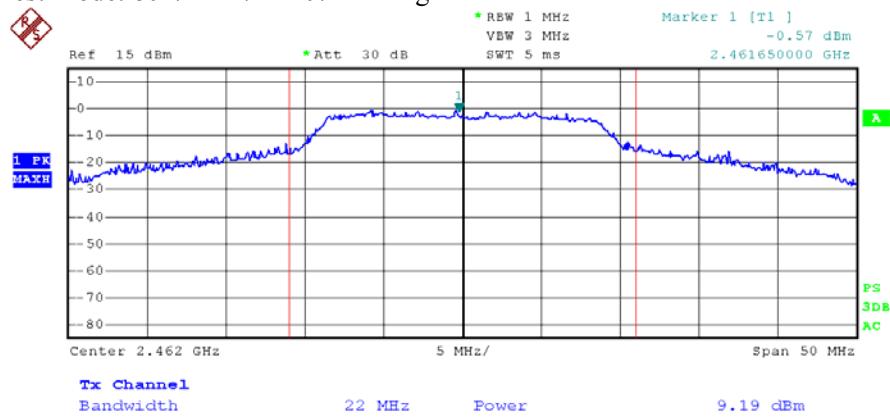

H

Date: 1.AUG.2012 15:39:46

Test Mode: 802.11n (HT40) ---Low

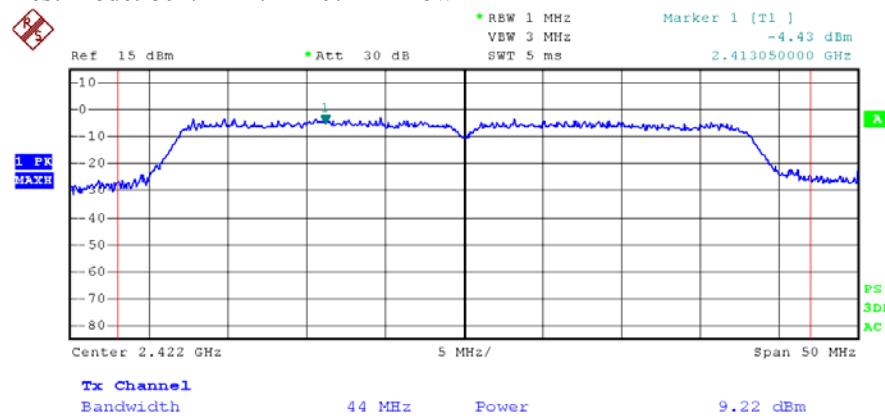


L

Date: 1.AUG.2012 15:42:38

FCC ID:PCG-LP-8627S


Test Mode: 802.11n (HT40) --- Mid

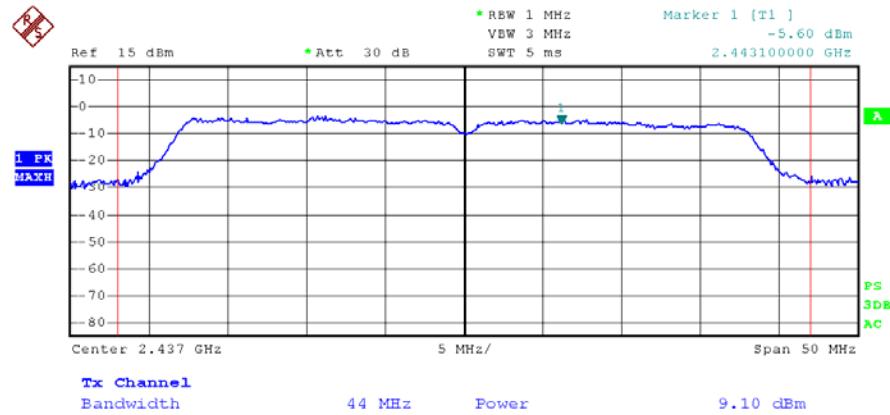

M

Date: 1.AUG.2012 15:42:01

Test Mode: 802.11n (HT40) ---High

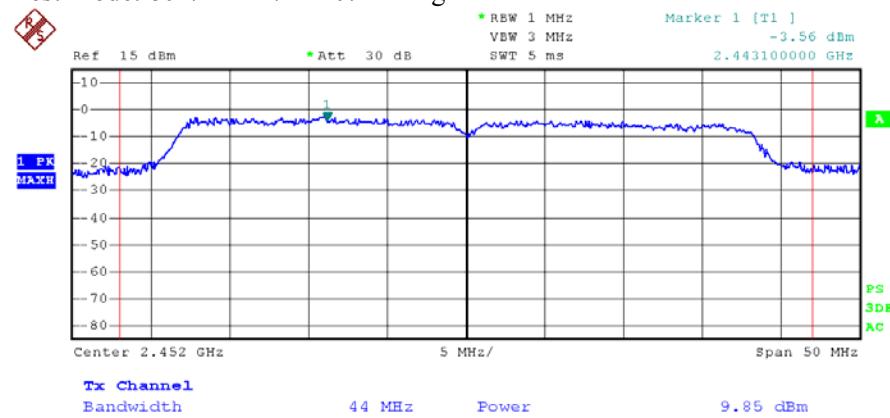

H

Date: 1.AUG.2012 15:41:17

5.4 Band Edges Measurement

a. Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).


b. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Peak detector: RBW=100KHz, VBW=100KHz, SWT=AUTO
Average detector: RBW=1MHz, VBW=10Hz, SWT=AUTO
The EUT is tested in 9*6*6 Chamber.
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

c. Test Setup

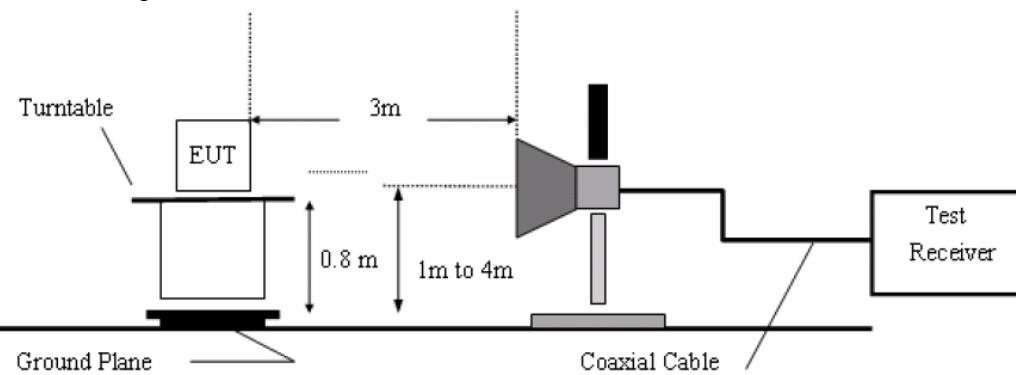

d. Test Results


Pass

e. Test Plots

See the following page.


FCC ID:PCG-LP-8627S

Test Mode: 802.11b ---Low

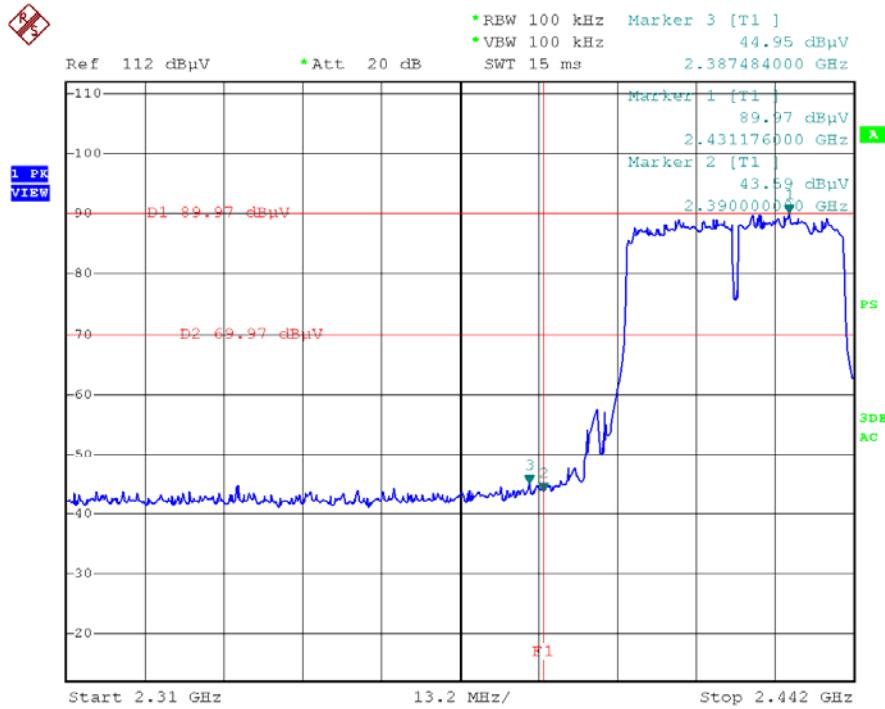

Bandedges-L

Date: 19.JUL.2012 22:19:44

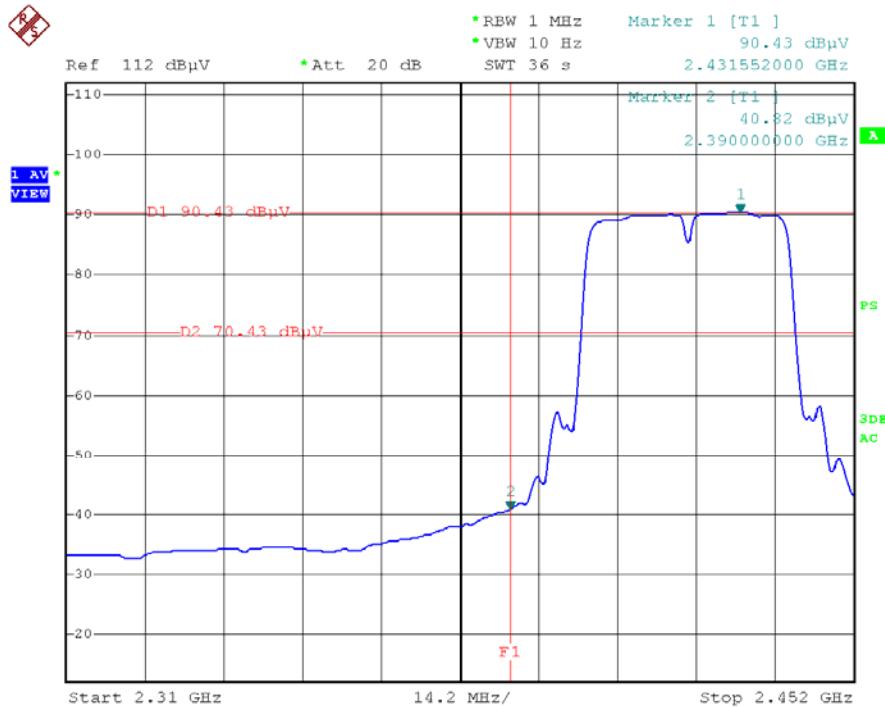


Bandedges-L-AV

Date: 19.JUL.2012 22:39:43


FCC ID:PCG-LP-8627S

Test Mode: 802.11b ---High

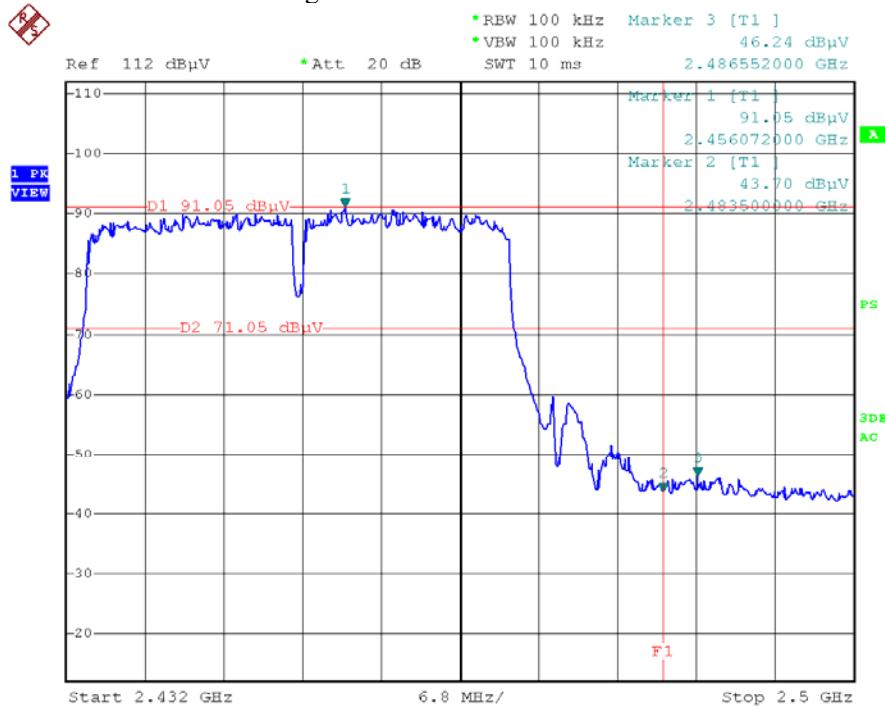

Bandedges-H

Date: 19.JUL.2012 22:22:06

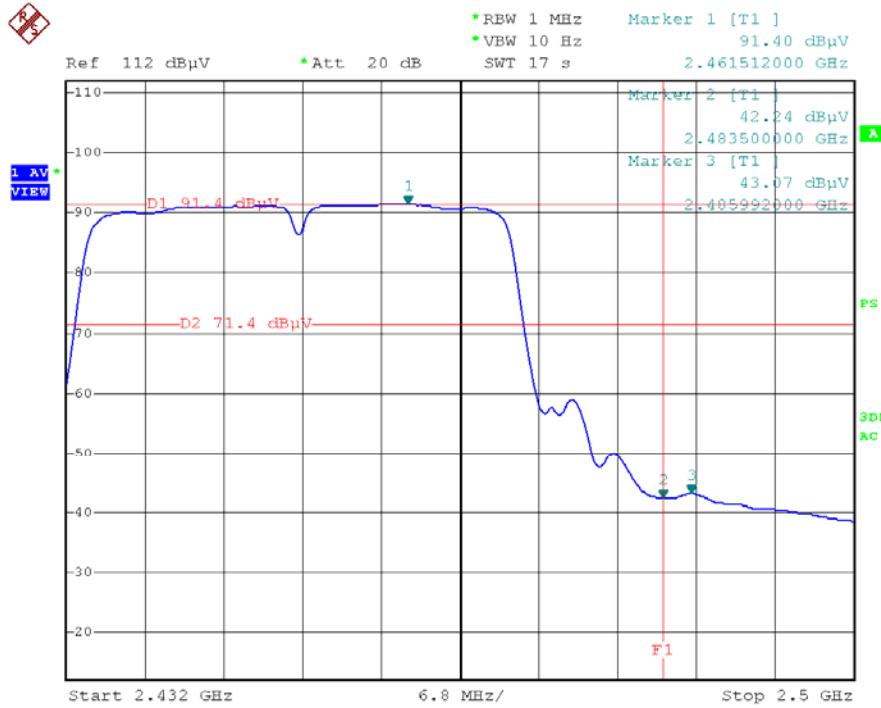


Bandedges-H-AV

Date: 19.JUL.2012 22:37:05


FCC ID:PCG-LP-8627S

Test Mode: 802.11g ---Low

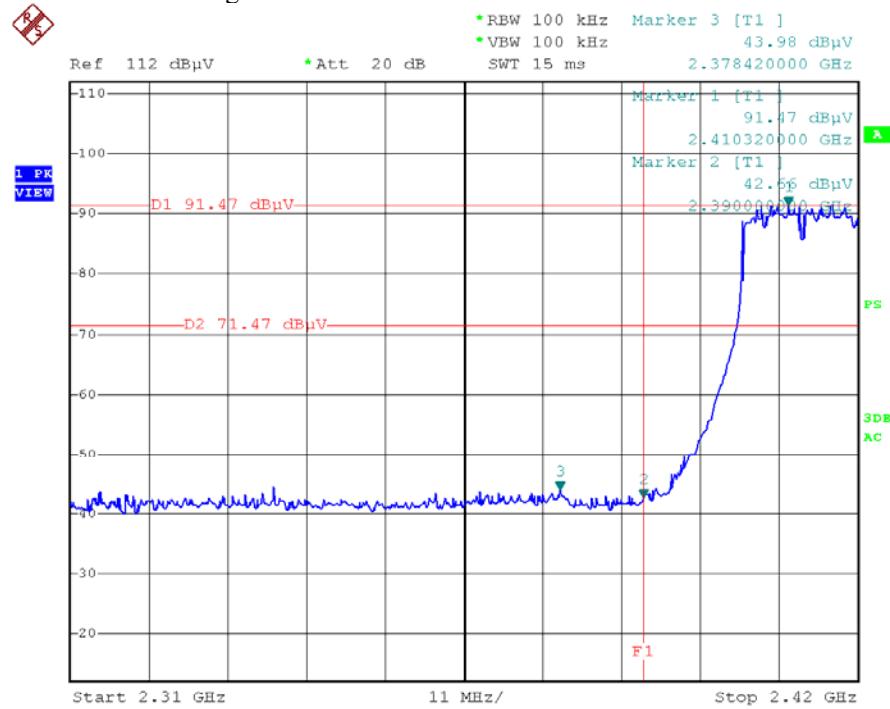

Bandedges-L


Date: 19.JUL.2012 22:14:28

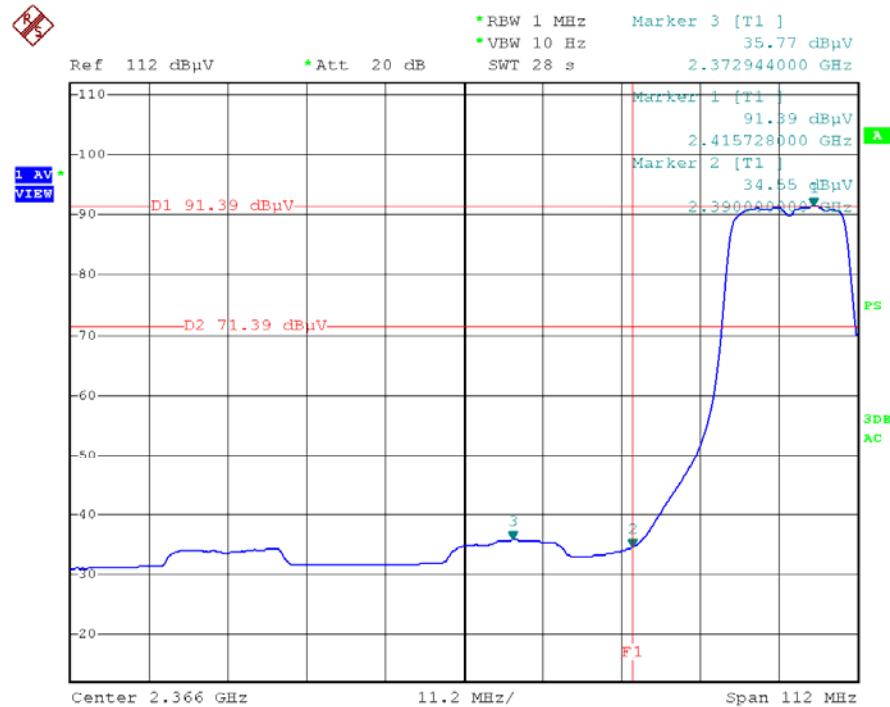

Bandedges-L-AV


Date: 19.JUL.2012 22:44:13

Test Mode: 802.11g ---High

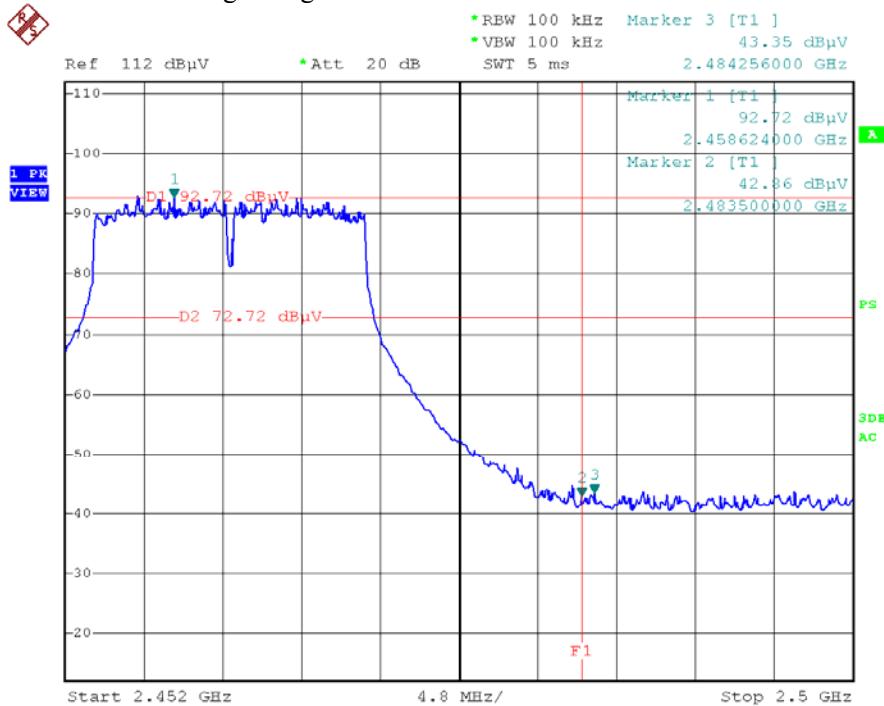

Bandedges-H

Date: 19.JUL.2012 22:26:36

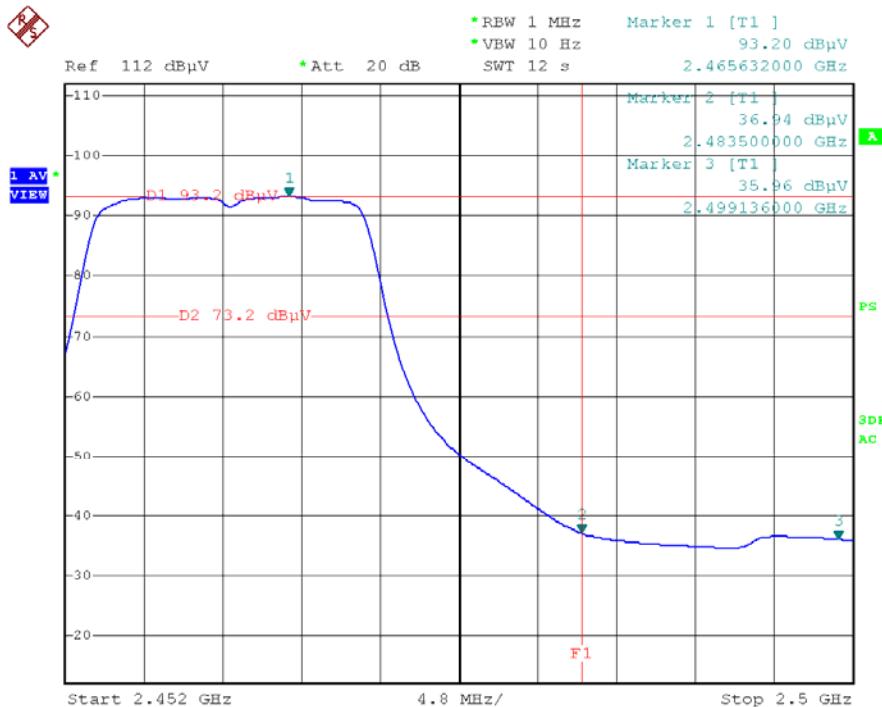


Bandedges-H-AV

Date: 19.JUL.2012 22:33:20


FCC ID:PCG-LP-8627S

Test Mode: 802.11n (HT20) ---Low

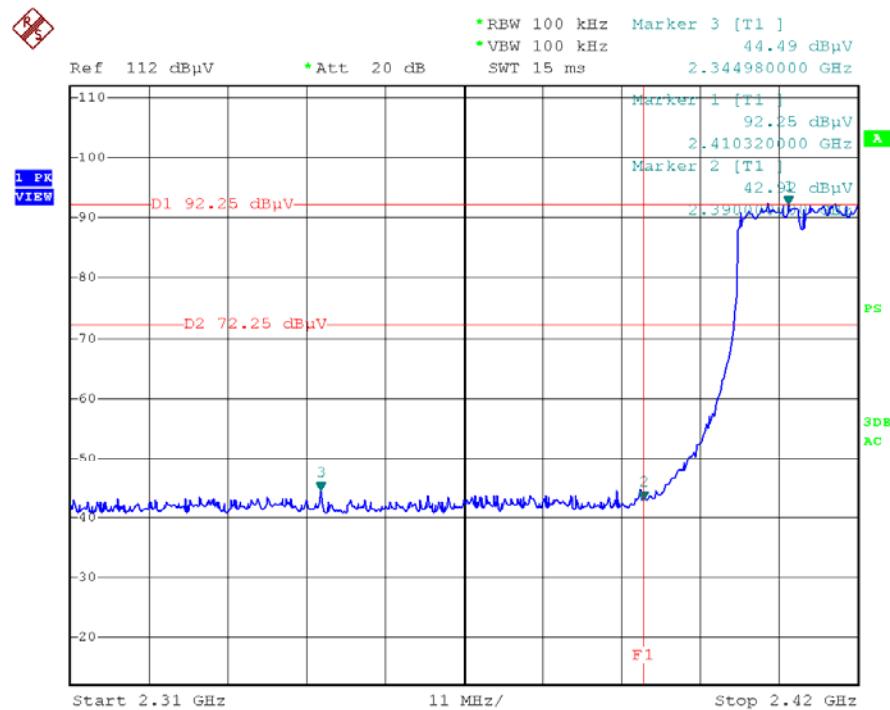

Bandedges-L

Date: 19.JUL.2012 22:16:20

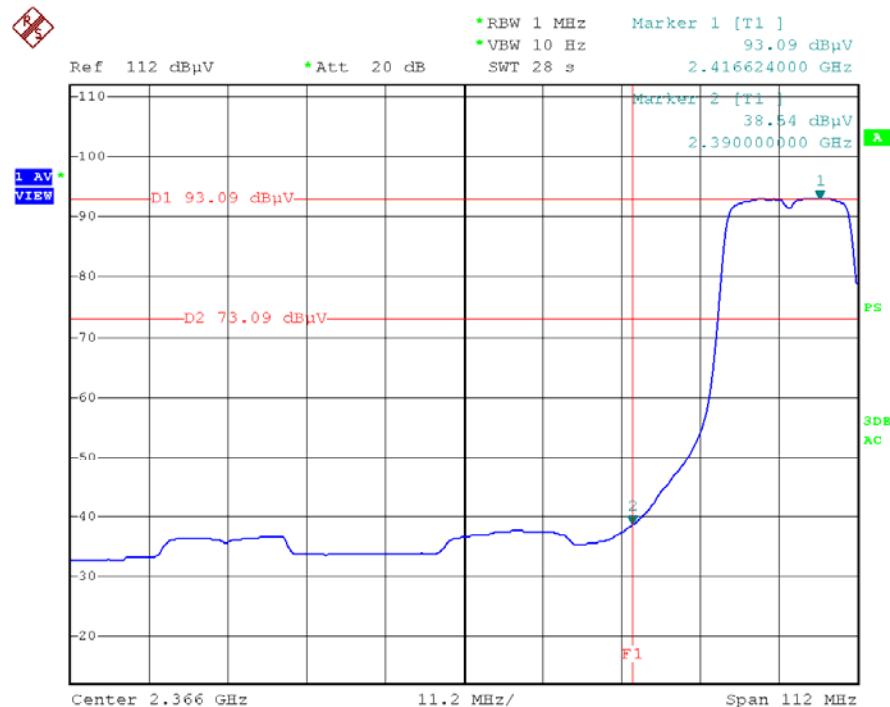


Bandedges-L-AV

Date: 19.JUL.2012 22:41:49


FCC ID:PCG-LP-8627S

Test Mode: 802.11n (HT20) ---High

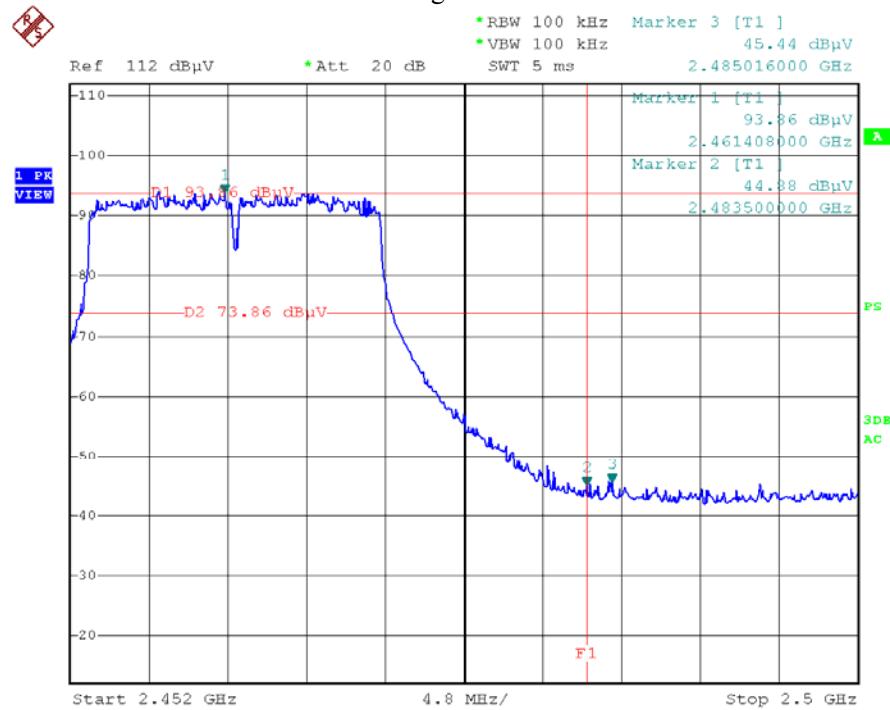

Bandedges-H

Date: 19.JUL.2012 22:24:54

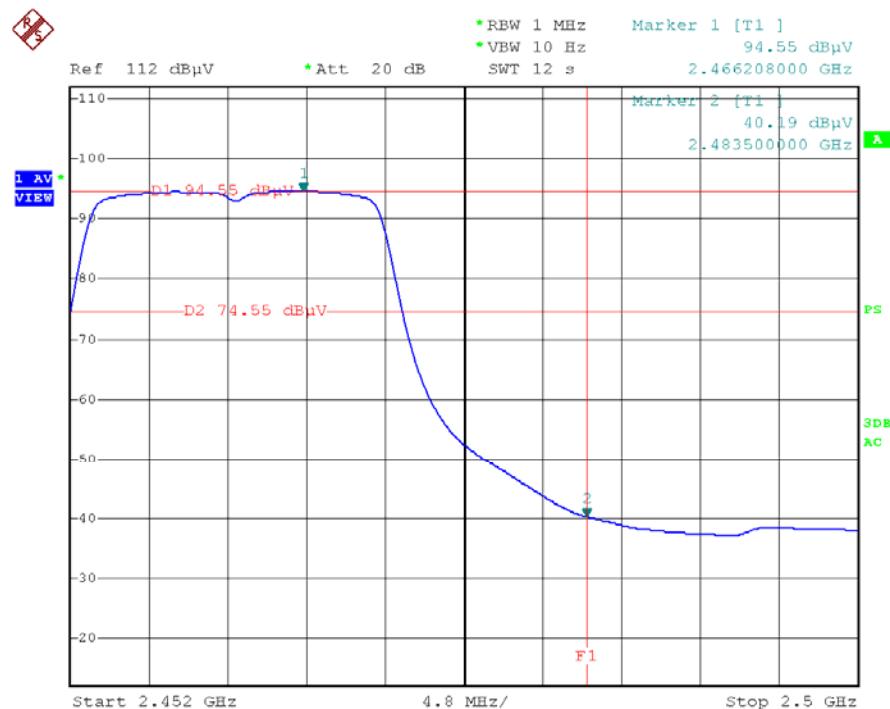


Bandedges-H-AV

Date: 19.JUL.2012 22:35:16


FCC ID:PCG-LP-8627S

Test Mode: 802.11n (HT40) ---Low

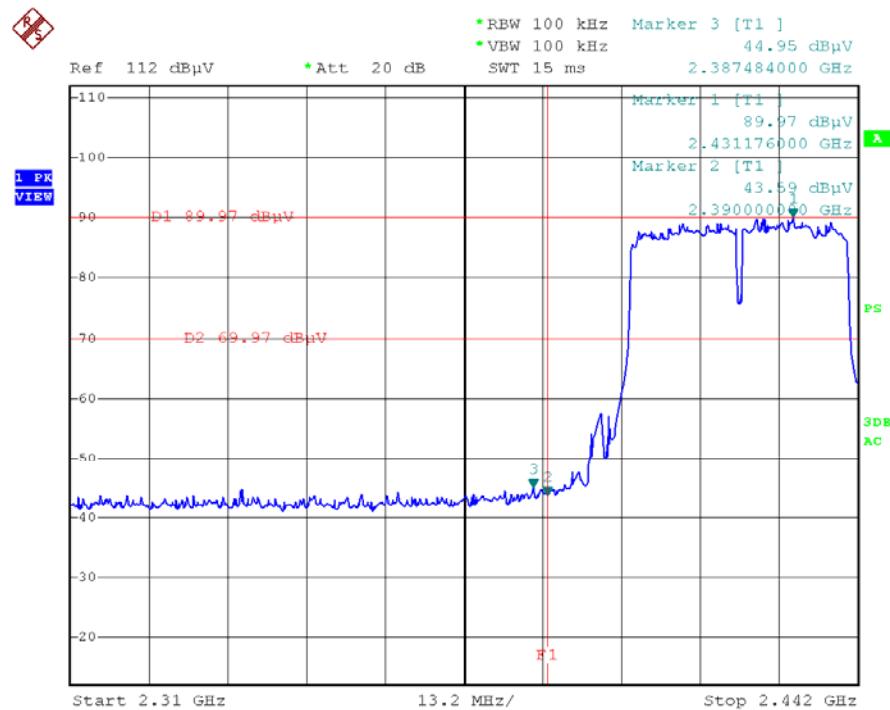

Bandedges-L

Date: 19.JUL.2012 22:19:44

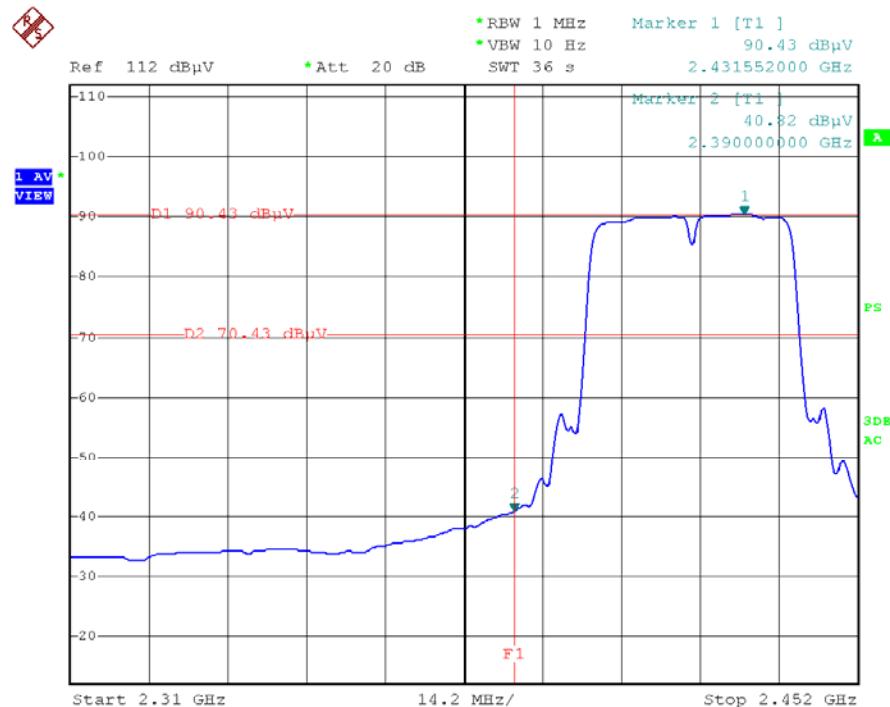


Bandedges-L-AV

Date: 19.JUL.2012 22:39:43


FCC ID:PCG-LP-8627S

Test Mode: 802.11n (HT40) ---High

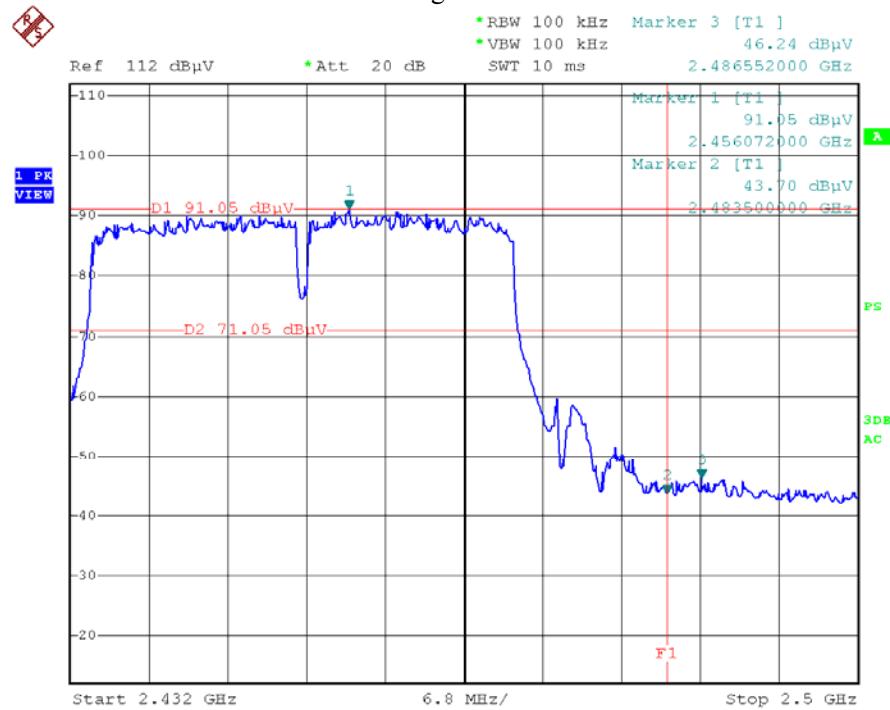

Bandedges-H

Date: 19.JUL.2012 22:22:06

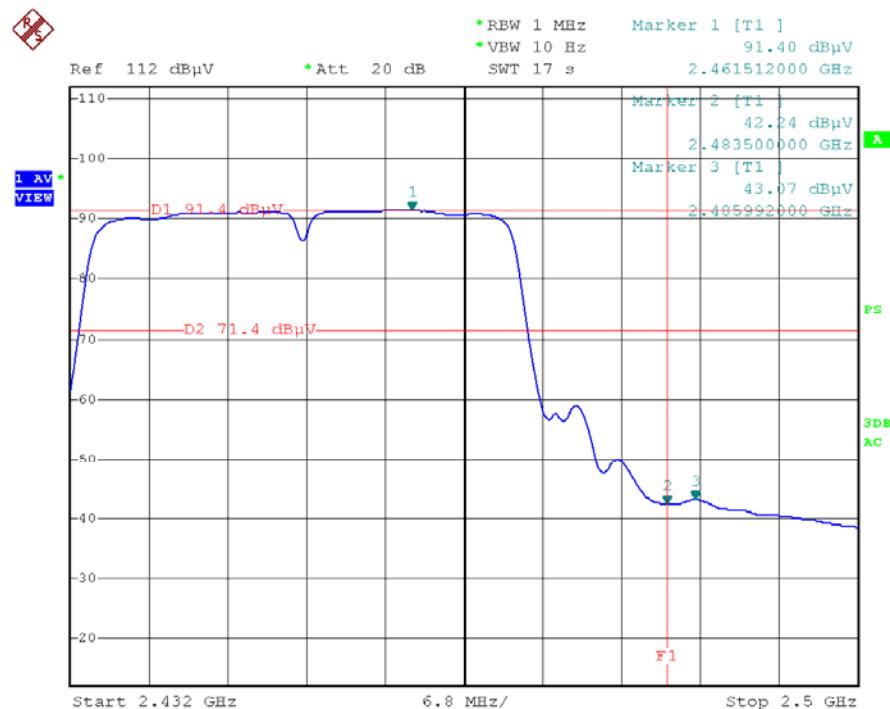

Bandedges-H-AV

Date: 19.JUL.2012 22:37:05

5.5 Peak Power Spectral Density

a. Limit

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

b. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5MHz, Sweep=500s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

c. Test Setup

See 5.1

d. Test Results

Pass

e. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Σ PPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2412	-27.12	-		Pass
Mid	2437	-25.63	-	8.00	Pass
High	2462	-25.16	-		Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Σ PPSD (dBm)	Limit (dBm)	Result
Low	2412	-25.90	-		Pass
Mid	2437	-27.26	-	8.00	Pass
High	2462	-28.26	-		Pass

Test mode: IEEE 802.11n (HT20)

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Σ PPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2412	-28.91	-		Pass
Mid	2437	-28.47	-	8.00	Pass
High	2462	-27.46	-		Pass

Test mode: IEEE 802.11n (HT40)


Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Σ PPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2422	-30.15	-		Pass
Mid	2437	-28.95	-	8.00	Pass
High	2452	-29.13	-		Pass

f. Test Plot

See the following pages

FCC ID:PCG-LP-8627S


802.11 b CH--Low

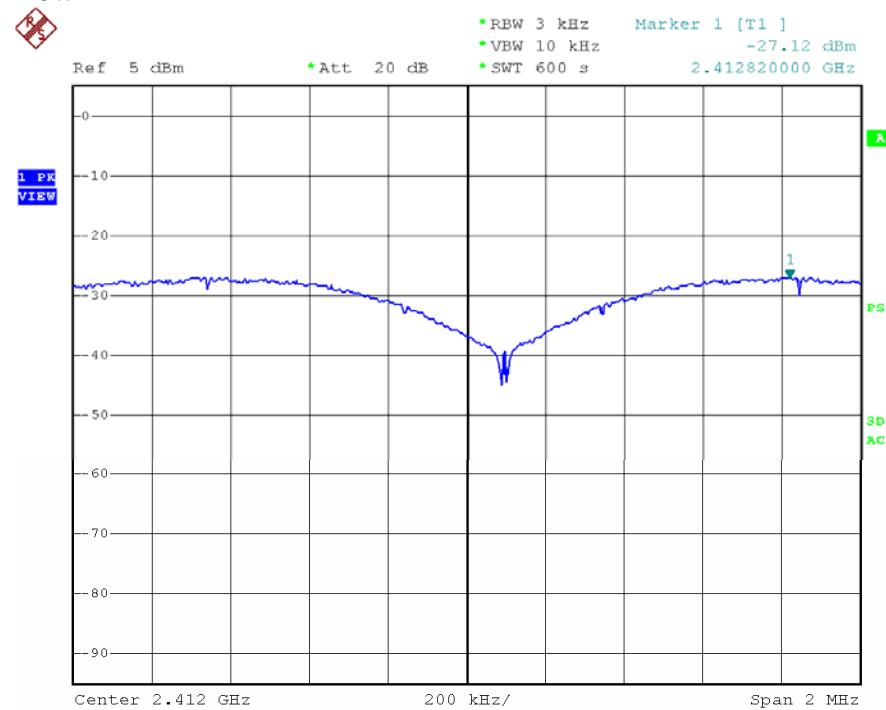

Power density-2412


I

CH--Mid

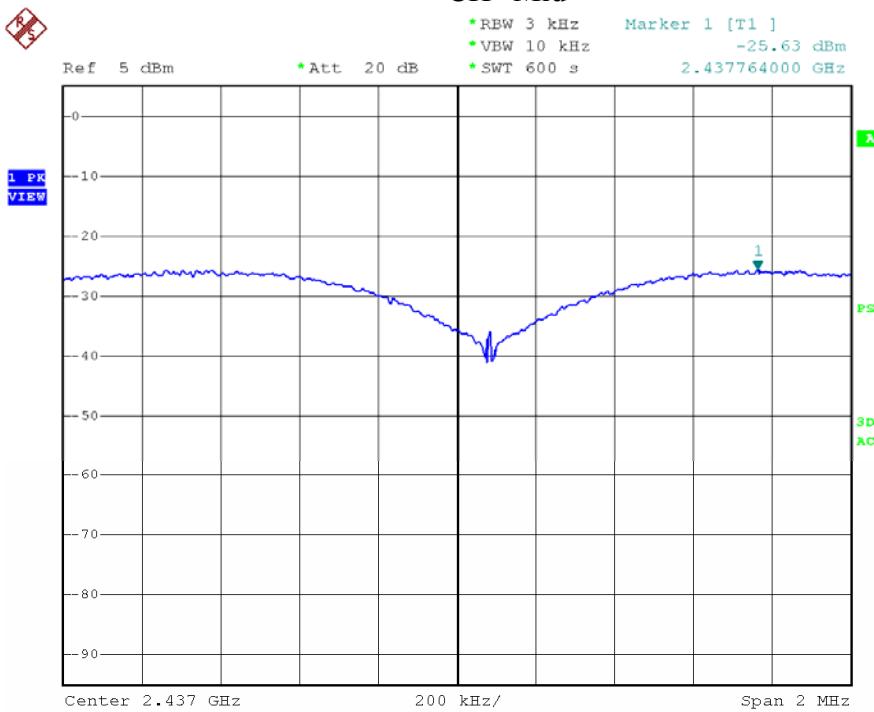


Power density-2437

FCC ID:PCG-LP-8627S

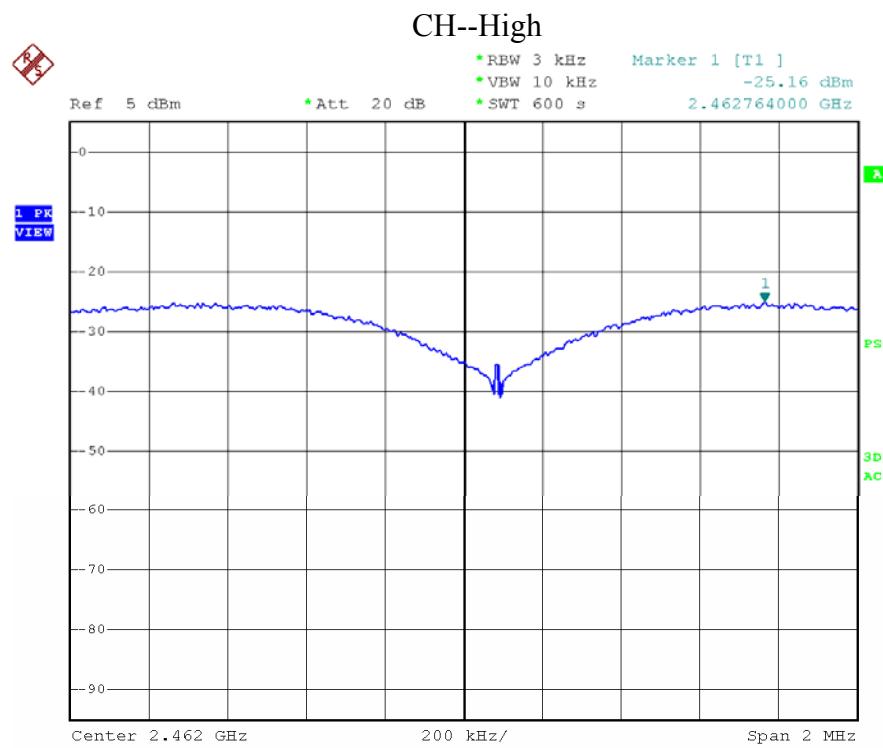


Power density-2462

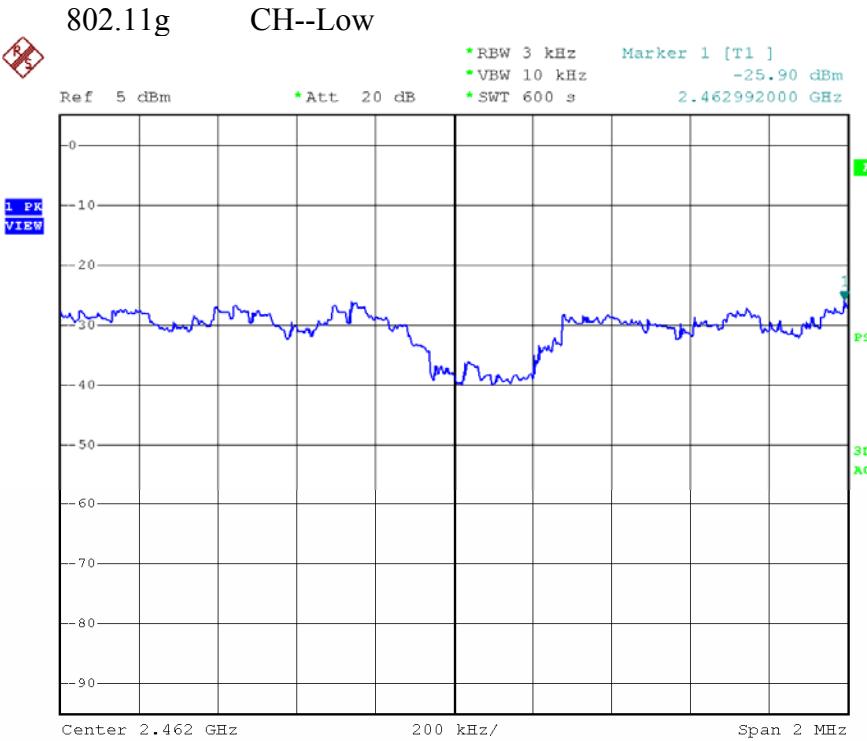


Power density-2462

CH--Mid

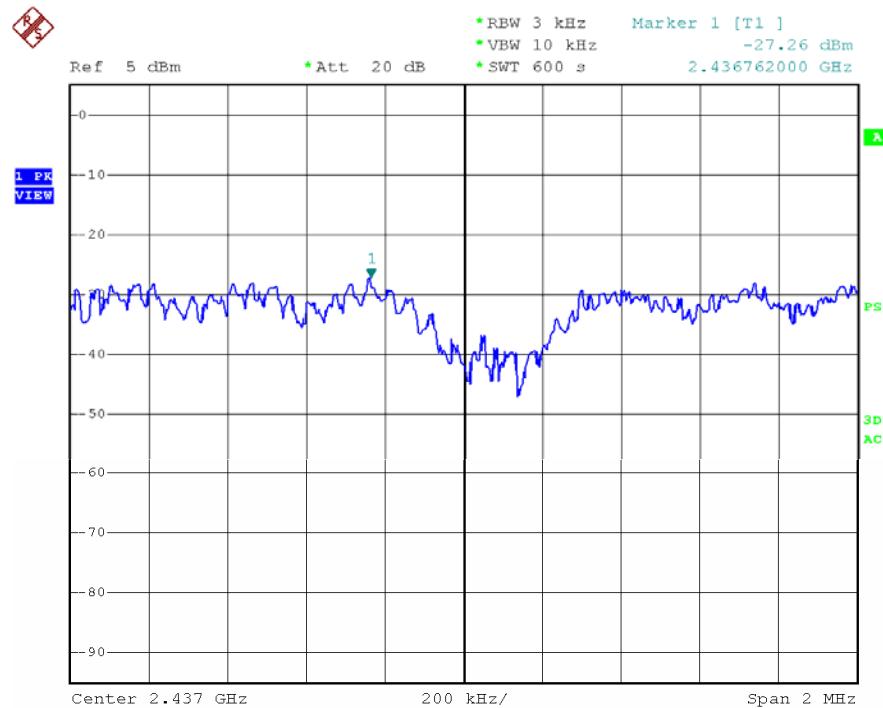


Power density-2437

CH--High

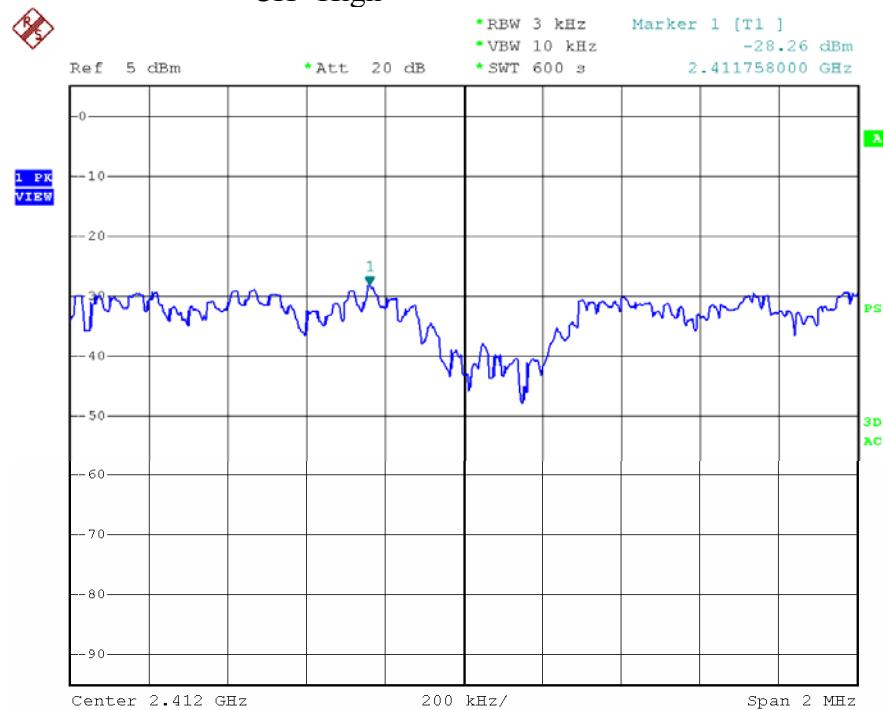


Power density-2412

802.11n (HT20) CH—Low

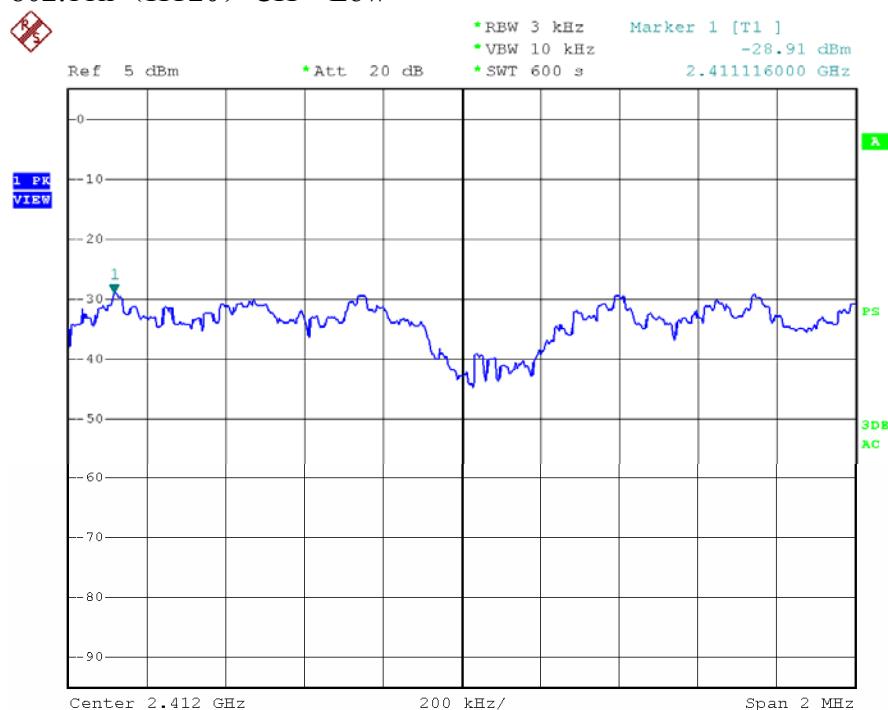


Power density-2412

CH—Mid

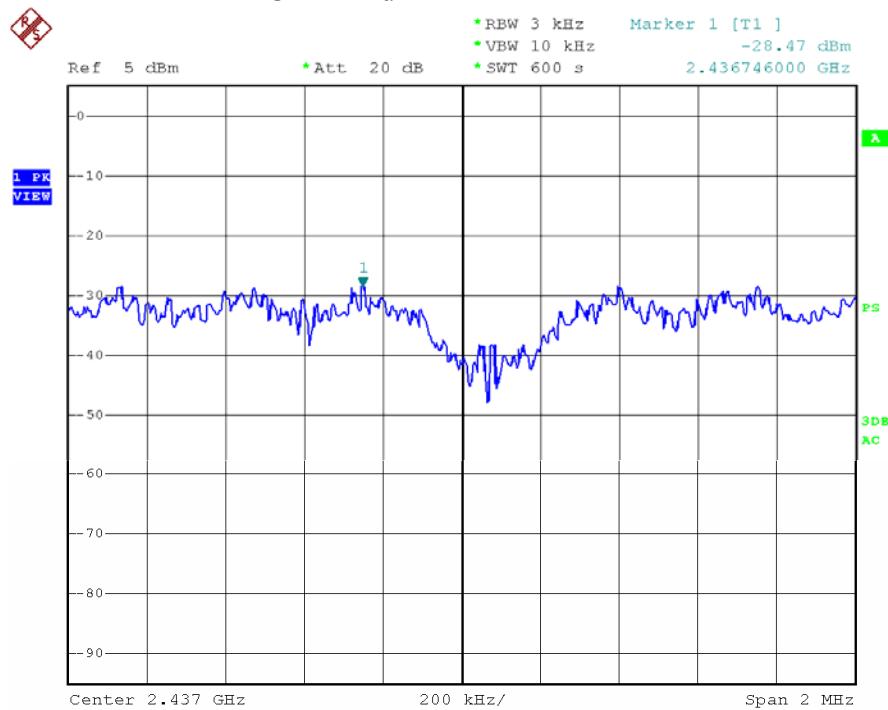


Power density-2437

CH—High

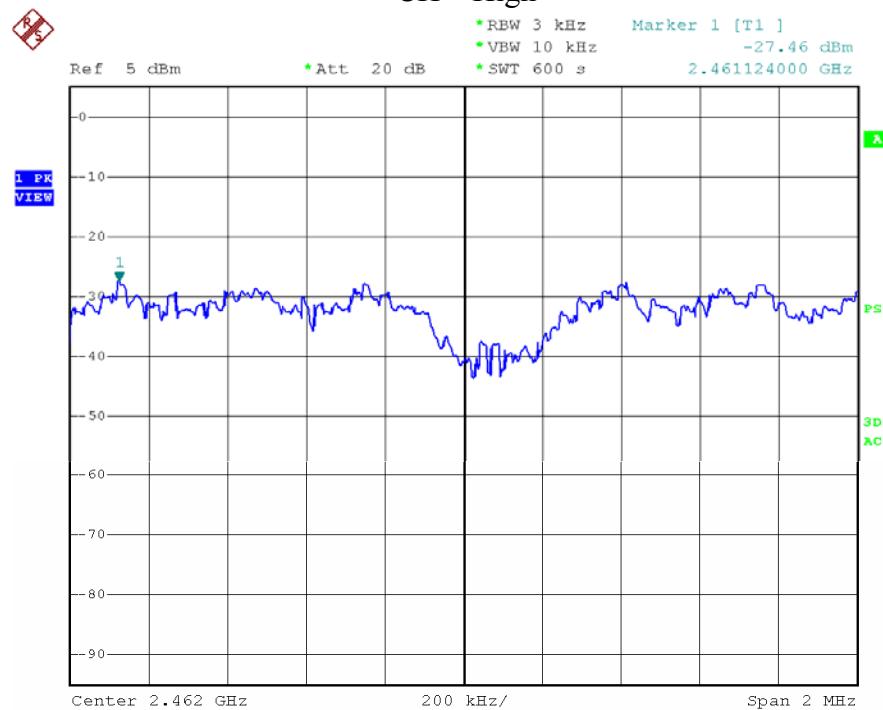


Power density-2462

802.11n (HT40) CH—Low

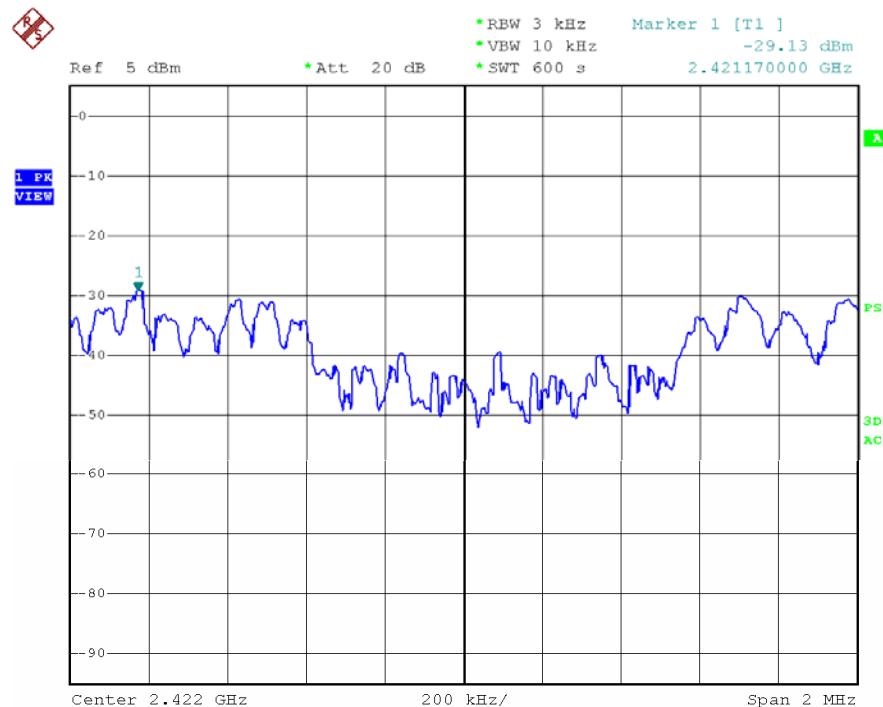


Power density-2422

CH—Mid

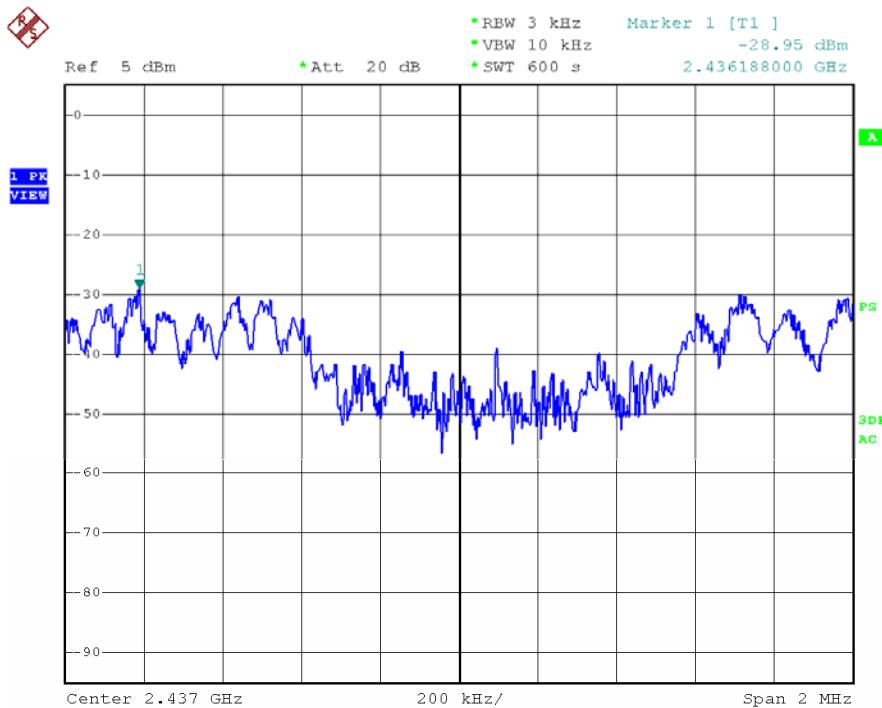

Power density-2437

CH—High

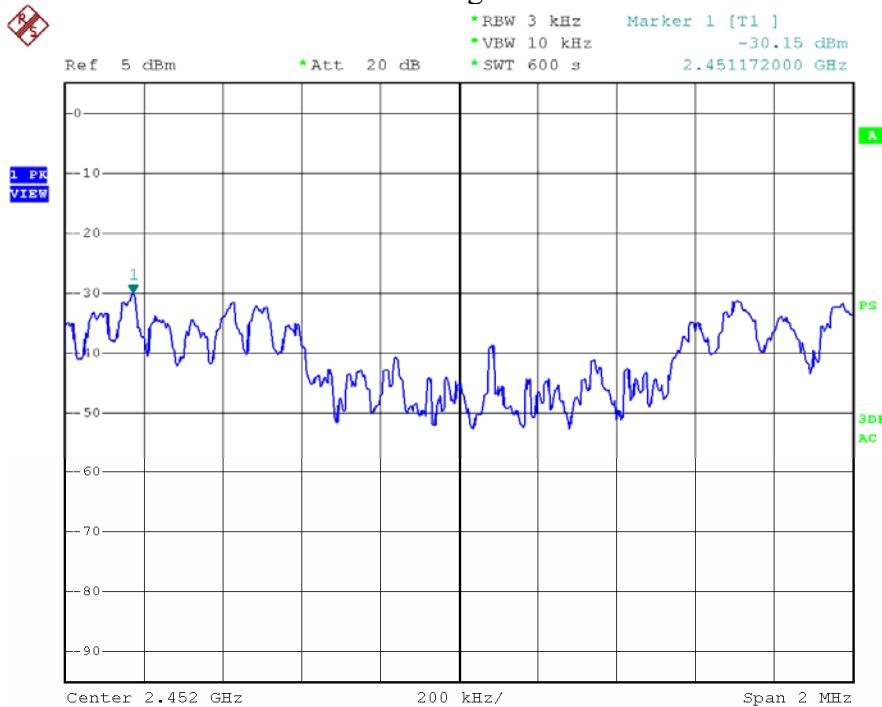

Power density-2452

5.6 Spurious Emission Test


5.6.1 Test Requirement: FCC Part15 Section 15.247(d)

5.6.2 Test method: ANSI C63.4: 2003 and KDB5508074 D01 meas guidance

5.6.3 limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.6.4 Test Setup:

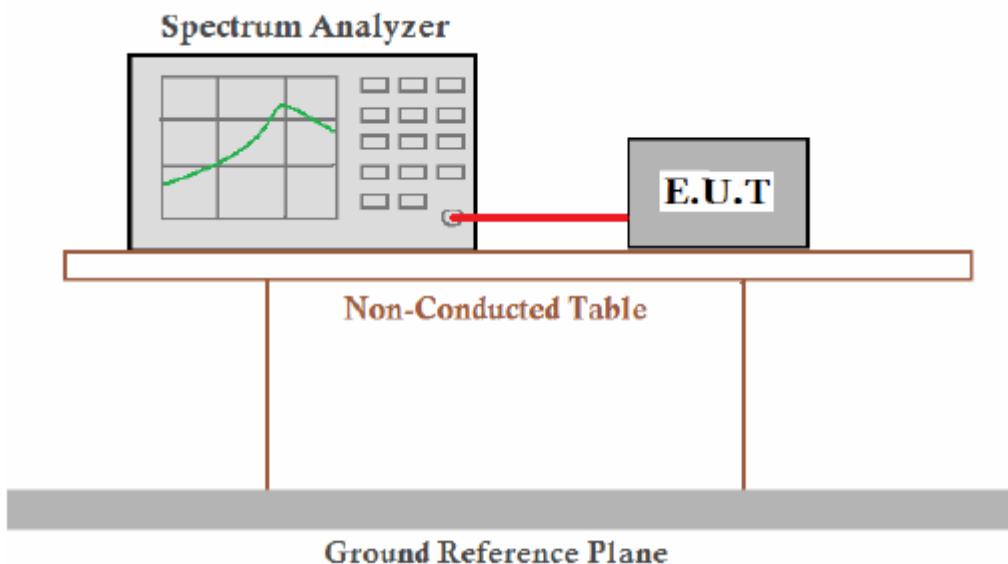

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.6.5 Test Plot as follows:

FCC ID:PCG-LP-8627S

802.11b


Low Channe



30M-10G

10G-25G

Middle Channel

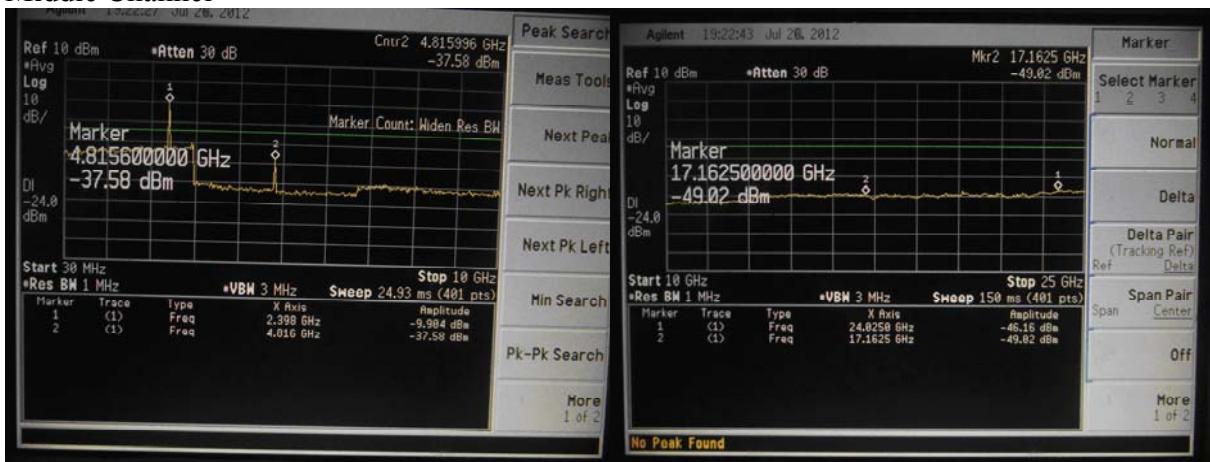

30M-10G

10G-25G

High Channel



30M-10G

10G-25G

FCC ID:PCG-LP-8627S

802.11g

Low Channe



30M-10G

10G-25G

Middle Channel



30M-10G

10G-25G

High Channel



30M-10G

10G-25G

FCC ID:PCG-LP-8627S

802.11n (HT20)

Low Channe



30M-10G

10G-25G

Middle Channel



30M-10G

10G-25G

High Channel




30M-10G

10G-25G

FCC ID:PCG-LP-8627S

802.11n (HT40)

Low Channel

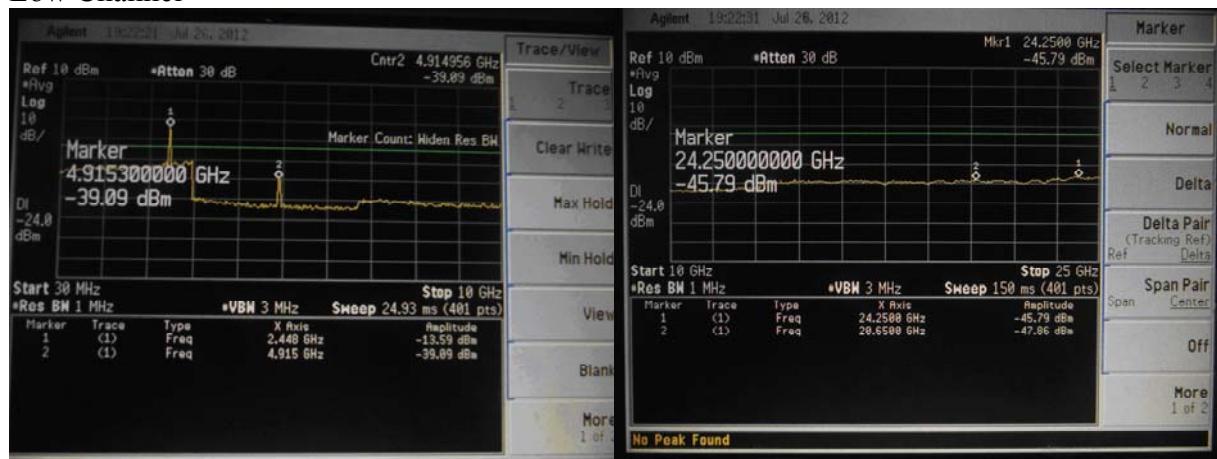

30M-10G

10G-25G

Middle Channel



30M-10G

10G-25G

High Channel



30M-10G

10G-25G

5.7 Radiated Emissions

5.7.1.1. Test Limits (< 30 MHZ)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

5.7.1.2. Test Limits (\geq 30 MHZ)

FIELD STRENGTH of Fundamental: 902-928 MHZ 2.4-2.4835 GHz 94 dB μ V/m @3m	FIELD STRENGTH of Harmonics 54 dB μ V/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dB μ V/m @3M 43.5 46 54dB μ V/m
---	---	--	---


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.7.2. Test Configuration:


5.7.2.1. 9k to 30MHz emissions:

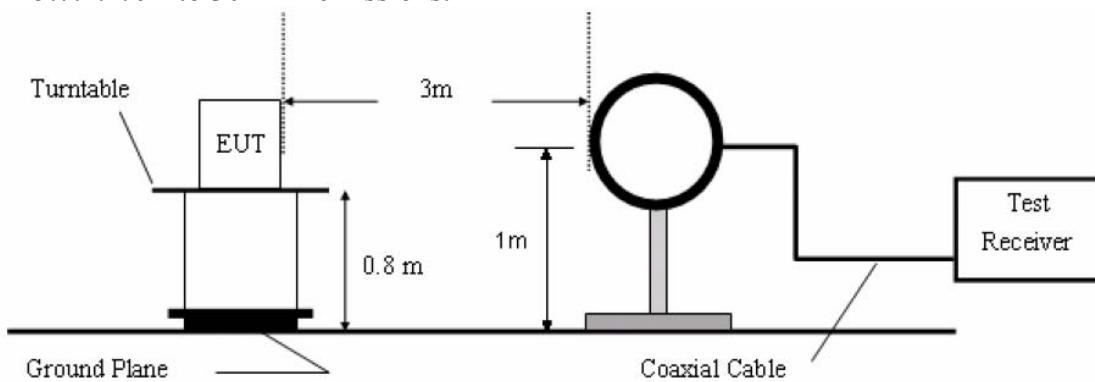

5.7.2.2. 30M to 1G emissions:

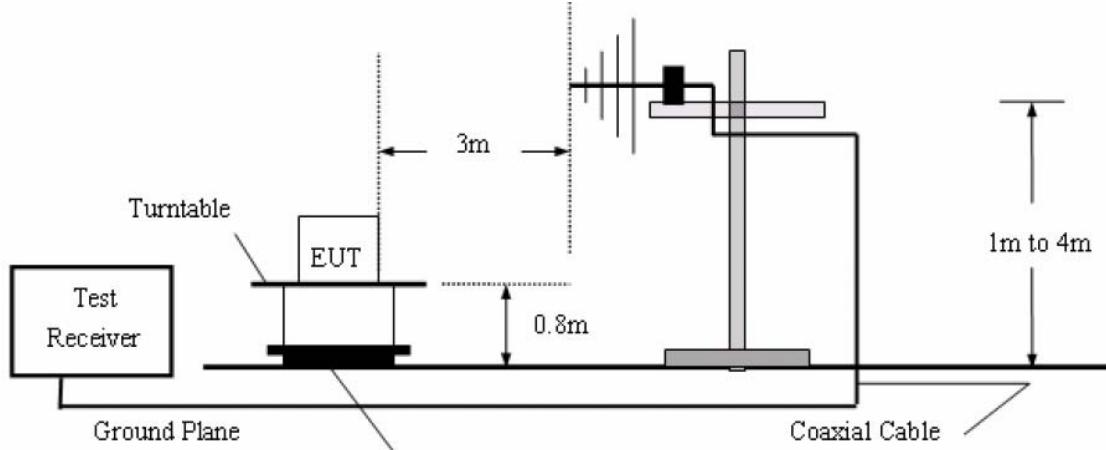

5.7.2.3. 1G to 40G emissions:

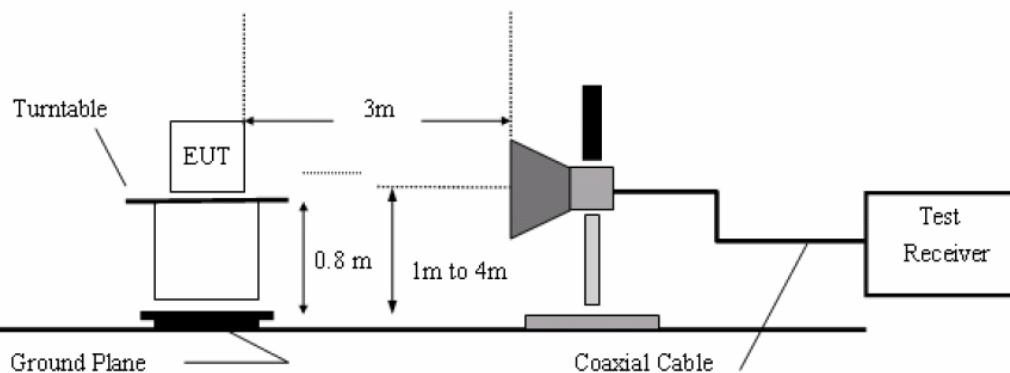

5.7.3. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Measurements are made on 9KHz to 30MHz and 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz.
 All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz.
 The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 5.6.4.

g. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.7.4. Test Results

Below 30MHz

There is no emissions were detected below 30MHz

From 30MHz to 1 GHz

Operation Mode: Normal link

Test Date:Jul.23 2012

Temperature: 25°C

Tested by: Andy Chen

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Detector Mode (PK/QP)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
60.0690	V	Peak	61.00	-25.23	35.77	40.00	-4.23
125.0066	V	Peak	64.63	-25.20	39.43	43.50	-4.07
159.7844	V	Peak	64.33	-26.49	37.84	43.50	-5.66
250.3011	V	Peak	63.83	-22.54	41.29	46.00	-4.71
480.5276	V	Peak	58.56	-19.63	38.89	46.00	-7.11
801.7862	V	Peak	53.24	-12.59	40.65	46.00	-5.35
125.0066	H	Peak	64.81	-30.00	34.81	43.50	-8.69
159.7844	H	Peak	71.35	-31.49	39.86	43.50	-3.64
250.3011	H	Peak	69.22	-26.27	42.95	46.00	-3.05
375.9384	H	Peak	60.96	-21.90	39.06	46.00	-6.94
480.5276	H	Peak	62.34	-19.90	42.44	46.00	-3.56
801.7862	H	Peak	55.41	-13.58	41.83	46.00	-4.17

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz and the IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Above 1 GHz**■ Above 1GHz**

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.01	31.79	8.61	24.17	45.24	74.00	-28.76	Vertical
7236.00	29.39	36.19	11.68	26.52	50.74	74.00	-23.26	Vertical
9648.00	29.94	38.07	14.16	25.44	56.73	74.00	-17.27	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	26.93	31.81	8.62	24.17	43.19	74.00	-30.81	Horizontal
7236.00	27.98	36.19	11.68	26.52	49.33	74.00	-24.67	Horizontal
9648.00	28.29	38.07	14.16	25.44	55.08	74.00	-18.92	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	19.24	31.79	8.61	24.17	35.47	54.00	-18.53	Vertical
7236.00	20.15	36.19	11.68	26.52	41.50	54.00	-12.50	Vertical
9648.00	21.48	38.07	14.16	25.44	48.27	54.00	-5.73	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	21.43	31.81	8.62	24.17	37.69	54.00	-16.31	Horizontal
7236.00	21.78	36.19	11.68	26.52	43.13	54.00	-10.87	Horizontal
9648.00	17.19	38.07	14.16	25.44	43.98	54.00	-10.02	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.63	31.85	8.66	24.12	46.02	74.00	-27.98	Vertical
7311.00	29.22	36.37	11.71	26.71	50.59	74.00	-23.41	Vertical
9748.00	30.93	38.27	14.25	25.38	58.07	74.00	-15.93	Vertical
12185.00	*					74.00		Vertical
14682.00	*					74.00		Vertical
17179.00	*					74.00		Vertical
4874.00	27.26	31.85	8.66	24.10	43.67	74.00	-30.33	Horizontal
7311.00	28.15	36.37	11.71	26.71	49.52	74.00	-24.48	Horizontal
9748.00	27.73	38.27	14.25	25.38	54.87	74.00	-19.13	Horizontal
12185.00	*					74.00		Horizontal
14682.00	*					74.00		Horizontal
17179.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	20.13	31.85	8.66	24.12	36.52	54.00	-17.48	Vertical
7311.00	20.16	36.37	11.71	26.71	41.53	54.00	-12.47	Vertical
9748.00	21.35	38.27	14.25	25.38	48.49	54.00	-5.51	Vertical
12185.00	*					54.00		Vertical
14682.00	*					54.00		Vertical
17179.00	*					54.00		Vertical
4874.00	22.06	31.85	8.66	24.10	38.47	54.00	-15.53	Horizontal
7311.00	21.75	36.37	11.71	26.71	43.12	54.00	-10.88	Horizontal
9748.00	16.33	38.27	14.25	25.38	43.47	54.00	-10.53	Horizontal
12185.00	*					54.00		Horizontal
14682.00	*					54.00		Horizontal
17179.00	*					54.00		Horizontal

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	28.99	31.89	8.70	24.05	45.53	74.00	-28.47	Vertical
7386.00	29.36	36.49	11.76	26.90	50.71	74.00	-23.29	Vertical
9848.00	27.95	38.62	14.31	25.30	55.58	74.00	-18.42	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	27.70	31.89	8.70	24.05	44.24	74.00	-29.78	Horizontal
7386.00	28.07	36.49	11.76	26.90	49.42	74.00	-24.58	Horizontal
9848.00	27.41	38.62	14.31	25.30	55.04	74.00	-18.96	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	19.54	31.89	8.70	24.05	38.08	54.00	-17.92	Vertical
7386.00	20.34	36.49	11.76	26.90	41.69	54.00	-12.31	Vertical
9848.00	18.67	38.62	14.31	25.30	48.30	54.00	-7.70	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	22.10	31.89	8.70	24.05	38.64	54.00	-15.38	Horizontal
7386.00	21.27	36.49	11.76	26.90	42.62	54.00	-11.38	Horizontal
9848.00	15.11	38.62	14.31	25.30	42.74	54.00	-11.26	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

.....

Test mode:		802.11g		Test channel:		lowest		
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.82	31.79	8.61	24.17	45.05	74.00	-28.95	Vertical
7236.00	28.47	36.19	11.68	26.52	49.82	74.00	-24.18	Vertical
9648.00	30.96	38.07	14.16	25.44	57.75	74.00	-16.25	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
18884.00	*					74.00		Vertical
4824.00	28.23	31.81	8.62	24.17	44.49	74.00	-29.51	Horizontal
7236.00	29.50	36.19	11.68	26.52	50.85	74.00	-23.15	Horizontal
9648.00	28.17	38.07	14.16	25.44	54.96	74.00	-19.04	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
18884.00	*					74.00		Horizontal
Average value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	24.22	31.79	8.61	24.17	40.45	54.00	-13.55	Vertical
7236.00	22.07	36.19	11.68	26.52	43.42	54.00	-10.58	Vertical
9648.00	16.46	38.07	14.16	25.44	43.25	54.00	-10.75	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
18884.00	*					54.00		Vertical
4824.00	24.03	31.81	8.62	24.17	40.29	54.00	-13.71	Horizontal
7236.00	22.80	36.19	11.68	26.52	44.15	54.00	-9.85	Horizontal
9648.00	16.97	38.07	14.16	25.44	43.76	54.00	-10.24	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
18884.00	*					54.00		Horizontal

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.35	31.79	8.61	24.17	45.58	74.00	-28.42	Vertical
7311.00	27.71	36.37	11.71	26.71	49.08	74.00	-24.92	Vertical
9748.00	28.16	38.27	14.25	25.38	55.30	74.00	-18.70	Vertical
12185.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4874.00	30.35	31.85	8.66	24.10	46.76	74.00	-27.24	Horizontal
7311.00	28.39	36.37	11.71	26.71	49.76	74.00	-24.24	Horizontal
9748.00	27.75	38.27	14.25	25.38	54.89	74.00	-19.11	Horizontal
12185.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	24.65	31.79	8.61	24.17	40.88	54.00	-13.12	Vertical
7311.00	21.21	36.37	11.71	26.71	42.58	54.00	-11.42	Vertical
9748.00	14.76	38.27	14.25	25.38	41.90	54.00	-12.10	Vertical
12185.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4874.00	26.25	31.85	8.66	24.10	42.66	54.00	-11.34	Horizontal
7311.00	19.99	36.37	11.71	26.71	41.36	54.00	-12.64	Horizontal
9748.00	15.65	38.27	14.25	25.38	42.79	54.00	-11.21	Horizontal
12185.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	28.07	31.85	8.66	24.12	44.46	74.00	-29.54	Vertical
7386.00	27.76	36.49	11.76	26.90	49.11	74.00	-24.89	Vertical
9848.00	27.00	38.62	14.31	25.30	54.63	74.00	-19.37	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	29.07	31.89	8.70	24.05	45.61	74.00	-28.39	Horizontal
7386.00	29.62	36.49	11.76	26.90	50.97	74.00	-23.03	Horizontal
9848.00	28.47	38.62	14.31	25.30	56.10	74.00	-17.90	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	23.57	31.85	8.66	24.12	39.96	54.00	-14.04	Vertical
7386.00	21.06	36.49	11.76	26.90	42.41	54.00	-11.59	Vertical
9848.00	15.10	38.62	14.31	25.30	42.73	54.00	-11.27	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	24.57	31.89	8.70	24.05	41.11	54.00	-12.89	Horizontal
7386.00	20.72	36.49	11.76	26.90	42.07	54.00	-11.93	Horizontal
9848.00	15.07	38.62	14.31	25.30	42.70	54.00	-11.30	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Test mode:	802.11n(HT20)		Test channel:		Lowest		
------------	---------------	--	---------------	--	--------	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.17	31.81	8.62	24.17	45.43	74.00	-28.57	Vertical
7236.00	28.92	36.19	11.68	26.52	50.27	74.00	-23.73	Vertical
9648.00	29.08	38.07	14.16	25.44	55.87	74.00	-18.13	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	28.83	31.81	8.62	24.17	43.09	74.00	-30.91	Horizontal
7236.00	27.33	36.19	11.68	26.52	48.68	74.00	-25.32	Horizontal
9648.00	27.18	38.07	14.16	25.44	53.97	74.00	-20.03	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	25.07	31.81	8.62	24.17	41.33	54.00	-12.67	Vertical
7236.00	21.02	36.19	11.68	26.52	42.37	54.00	-11.63	Vertical
9648.00	16.68	38.07	14.16	25.44	43.47	54.00	-10.53	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	28.83	31.81	8.62	24.17	43.09	54.00	-10.91	Horizontal
7236.00	21.10	36.19	11.68	26.52	42.45	54.00	-11.55	Horizontal
9648.00	17.48	38.07	14.16	25.44	44.27	54.00	-9.73	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11n(HT20)		Test channel:	Middle		
------------	---------------	--	---------------	--------	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	30.30	31.85	8.66	24.10	46.71	74.00	-27.29	Vertical
7311.00	28.54	36.37	11.71	26.71	49.91	74.00	-24.09	Vertical
9748.00	28.67	38.27	14.25	25.38	55.81	74.00	-18.19	Vertical
12185.00	*					74.00		Vertical
14682.00	*					74.00		Vertical
17179.00	*					74.00		Vertical
4874.00	28.63	31.85	8.66	24.10	45.04	74.00	-28.98	Horizontal
7311.00	27.79	36.37	11.71	26.71	49.16	74.00	-24.84	Horizontal
9748.00	28.46	38.27	14.25	25.38	55.60	74.00	-18.40	Horizontal
12185.00	*					74.00		Horizontal
14682.00	*					74.00		Horizontal
17179.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	26.30	31.85	8.66	24.10	42.71	54.00	-11.29	Vertical
7311.00	21.74	36.37	11.71	26.71	43.11	54.00	-10.89	Vertical
9748.00	15.27	38.27	14.25	25.38	42.41	54.00	-11.59	Vertical
12185.00	*					54.00		Vertical
14682.00	*					54.00		Vertical
17179.00	*					54.00		Vertical
4874.00	26.14	31.85	8.66	24.10	42.55	54.00	-11.45	Horizontal
7311.00	20.36	36.37	11.71	26.71	41.73	54.00	-12.27	Horizontal
9748.00	17.68	38.27	14.25	25.38	44.82	54.00	-9.18	Horizontal
12185.00	*					54.00		Horizontal
14682.00	*					54.00		Horizontal
17179.00	*					54.00		Horizontal

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	28.96	31.89	8.70	24.05	45.50	74.00	-28.50	Vertical
7386.00	28.20	36.49	11.76	26.90	49.55	74.00	-24.45	Vertical
9848.00	28.03	38.62	14.31	25.30	55.66	74.00	-18.34	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	28.29	31.89	8.70	24.05	44.83	74.00	-29.17	Horizontal
7386.00	28.08	36.49	11.76	26.90	49.43	74.00	-24.57	Horizontal
9848.00	27.79	38.62	14.31	25.30	55.42	74.00	-18.58	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	25.56	31.89	8.70	24.05	42.10	54.00	-11.90	Vertical
7386.00	21.50	36.49	11.76	26.90	42.85	54.00	-11.15	Vertical
9848.00	14.63	38.62	14.31	25.30	42.26	54.00	-11.74	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	25.47	31.89	8.70	24.05	42.01	54.00	-11.99	Horizontal
7386.00	22.54	36.49	11.76	26.90	43.89	54.00	-10.11	Horizontal
9848.00	16.87	38.62	14.31	25.30	44.50	54.00	-9.50	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Test mode:	802.11n(HT40)		Test channel:		Lowest		
------------	---------------	--	---------------	--	--------	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	28.91	31.82	8.63	24.15	45.21	74.00	-28.79	Vertical
7266.00	29.98	36.28	11.69	26.58	51.37	74.00	-22.63	Vertical
9688.00	29.97	38.13	14.21	25.41	56.90	74.00	-17.10	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	28.95	31.82	8.63	24.15	45.25	74.00	-28.75	Horizontal
7266.00	29.79	36.28	11.69	26.58	51.18	74.00	-22.82	Horizontal
9688.00	30.11	38.13	14.21	25.41	57.04	74.00	-16.96	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	24.41	31.82	8.63	24.15	40.71	54.00	-13.29	Vertical
7266.00	20.28	36.28	11.69	26.58	41.87	54.00	-12.33	Vertical
9688.00	16.57	38.13	14.21	25.41	43.50	54.00	-10.50	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	24.45	31.82	8.63	24.15	40.75	54.00	-13.25	Horizontal
7266.00	20.89	36.28	11.69	26.58	42.28	54.00	-11.72	Horizontal
9688.00	18.21	38.13	14.21	25.41	43.14	54.00	-10.86	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11n(HT40)		Test channel:	Middle		
------------	---------------	--	---------------	--------	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	30.30	31.85	8.66	24.10	46.71	74.00	-27.29	Vertical
7311.00	28.54	36.37	11.71	26.71	49.91	74.00	-24.09	Vertical
9748.00	28.67	38.27	14.25	25.38	55.81	74.00	-18.19	Vertical
12185.00	*					74.00		Vertical
14682.00	*					74.00		Vertical
17179.00	*					74.00		Vertical
4874.00	30.46	31.85	8.66	24.10	46.87	74.00	-27.13	Horizontal
7311.00	29.56	36.37	11.71	26.71	50.93	74.00	-23.07	Horizontal
9748.00	29.26	38.27	14.25	25.38	56.40	74.00	-17.60	Horizontal
12185.00	*					74.00		Horizontal
14682.00	*					74.00		Horizontal
17179.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	26.10	31.85	8.66	24.10	42.51	54.00	-11.49	Vertical
7311.00	21.84	36.37	11.71	26.71	43.21	54.00	-10.79	Vertical
9748.00	16.97	38.27	14.25	25.38	44.11	54.00	-9.89	Vertical
12185.00	*					54.00		Vertical
14682.00	*					54.00		Vertical
17179.00	*					54.00		Vertical
4874.00	25.06	31.85	8.66	24.10	41.47	54.00	-12.53	Horizontal
7311.00	21.16	36.37	11.71	26.71	42.53	54.00	-11.47	Horizontal
9748.00	15.06	38.27	14.25	25.38	42.20	54.00	-11.80	Horizontal
12185.00	*					54.00		Horizontal
14682.00	*					54.00		Horizontal
17179.00	*					54.00		Horizontal

Test mode:	802.11n(HT40)		Test channel:	Highest		
------------	---------------	--	---------------	---------	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	28.15	31.88	8.68	24.08	44.83	74.00	-29.37	Vertical
7356.00	28.56	36.45	11.74	26.84	49.91	74.00	-24.09	Vertical
9808.00	28.80	38.52	14.29	25.33	56.28	74.00	-17.72	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	29.10	31.88	8.68	24.08	45.58	74.00	-28.42	Horizontal
7356.00	28.66	36.45	11.74	26.84	50.01	74.00	-23.99	Horizontal
9808.00	29.16	38.52	14.29	25.33	56.84	74.00	-17.36	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	24.55	31.88	8.68	24.08	41.03	54.00	-12.97	Vertical
7356.00	22.06	36.45	11.74	26.84	43.41	54.00	-10.59	Vertical
9808.00	15.60	38.52	14.29	25.33	43.08	54.00	-10.92	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	24.80	31.88	8.68	24.08	41.28	54.00	-12.72	Horizontal
7356.00	19.56	36.45	11.74	26.84	40.91	54.00	-13.09	Horizontal
9808.00	16.86	38.52	14.29	25.33	44.34	54.00	-9.66	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal