

FCC PART 15.249 TEST REPORT

For

OKIN Refined Electric Technology Co., Ltd.

No.465 Xinnanyang Road,Wangjiangjing Development Zone,Jiaxing Zhejiang China

FCC ID: PCU-RF29

Report Type: Original Report	Product Type: REMOTE CONTROL
Test Engineer: <u>Matt yao</u>	
Report Number: <u>RSA190425003-00A</u>	
Report Date: <u>2019-05-09</u>	
Reviewed By: <u>Oscar Ye</u> <u>RF Leader</u>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION.....	10
APPLICABLE STANDARD	10
EUT SETUP	10
TEST EQUIPMENT SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA	19

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	OKIN Refined Electric Technology Co., Ltd.
Tested Model	RF29
Product Type	REMOTE CONTROL
Dimension	14mm(L)*4.5 mm(W)* 1.5mm(H)
Power Supply	DC 2*1.5V from batteries

All measurement and test data in this report was gathered from production sample serial number: 20190425003. (Assigned by BACL, Kunshan). The EUT was received on 2019-04-25.

Objective

This type approval report is prepared on behalf of *OKIN Refined Electric Technology Co., Ltd* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.249 DXX grant with FCC ID: PCU-CB1220.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 558074 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	40	2442
2	2404	...	...
...	...	...	...
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 1, 40 and 78.

All buttons triggered the same RF parameters (Contain bandwidth, power level, duty cycle).

EUT Exercise Software

EUT was tested in the engineering mode.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):

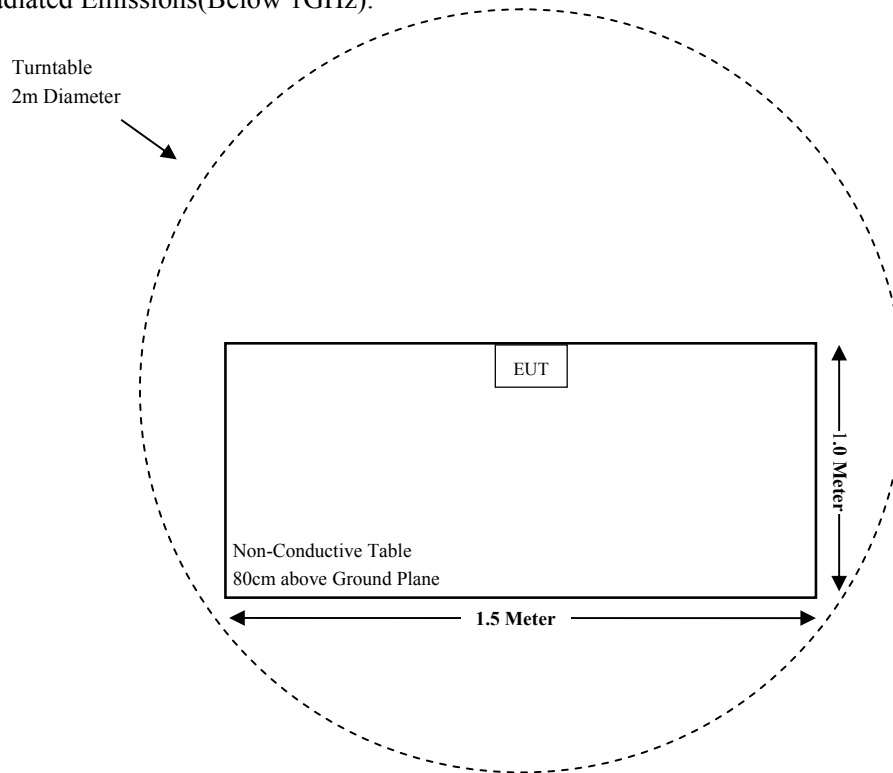

For Radiated Emissions(Above 1GHz):

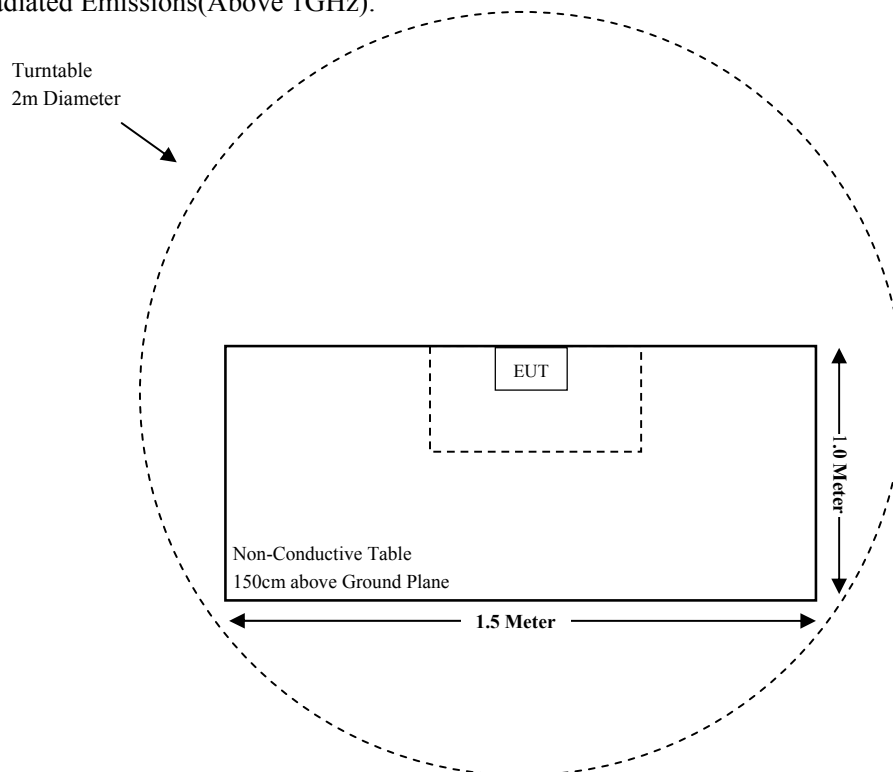

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Not Applicable (See Note)
15.205, §15.209, §15.249	Radiated Emissions& Out of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

Note: The EUT was powered by battery.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test(Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-14	2019-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test(Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2019-01-11	2022-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
MICRO-TRONICS	Notch Filter	BRM50702	G024	2018-08-05	2019-08-04
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
EM Electronics Corporation	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
Narda	Attenuator/2dB	2dB	002	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-30	2019-11-29
Narda	Attenuator/10dB	10dB	010	2018-08-15	2019-08-14
OKIN	RF Cable	OKINC01	C01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has a PCB antenna and antenna gain is 0dBi , which was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.

Result: Compliant.

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup

Below 1 GHz:

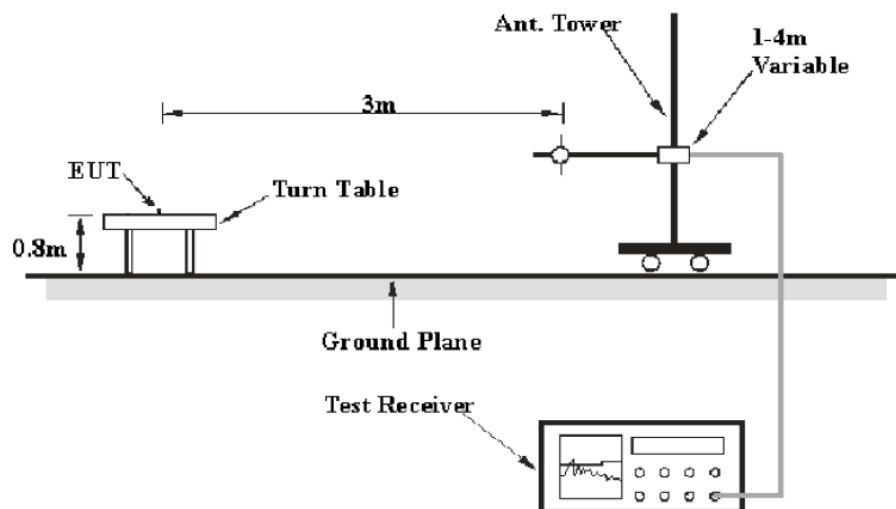

Above 1 GHz:

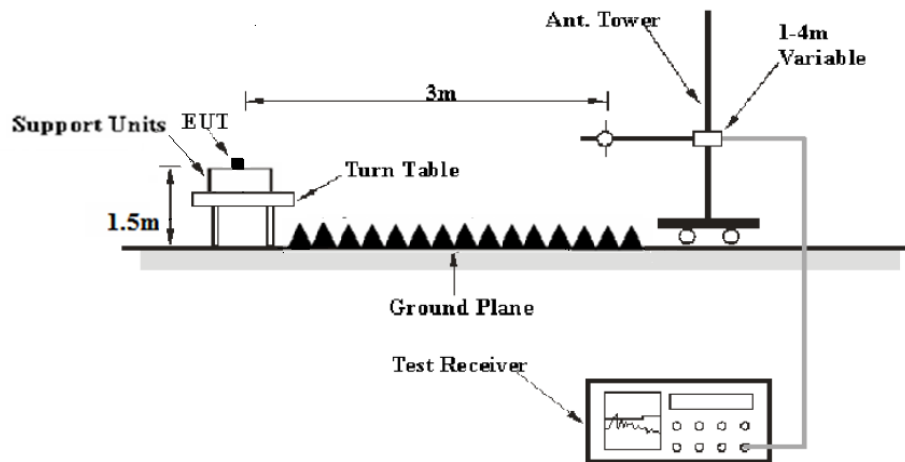

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249.

Test Data

Environmental Conditions


Temperature:	24.2°C
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Matt yao on 2019-05-04 to2019-05-05.

Test Mode: Transmitting

Spurious Emission Test:**30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low channel of operation in X-axis of orientation** was recorded)

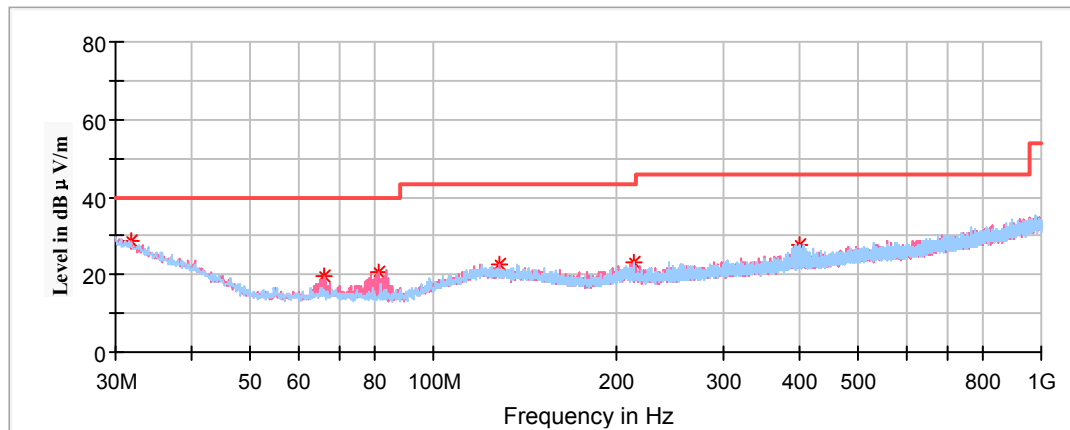

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	Maxpeak (dB μ V/m)	Height (cm)	Polar (H/V)				
31.940000	28.69	100.0	V	259.0	-5.2	40.00	11.31
66.253750	19.80	100.0	V	104.0	-17.5	40.00	20.20
81.410000	20.43	100.0	V	93.0	-17.7	40.00	19.57
128.333750	22.60	100.0	V	0.0	-11.5	43.50	20.90
213.330000	23.29	100.0	V	197.0	-12.3	43.50	20.21
399.570000	27.84	100.0	H	139.0	-8.2	46.00	18.16

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2403MHz


Full Spectrum

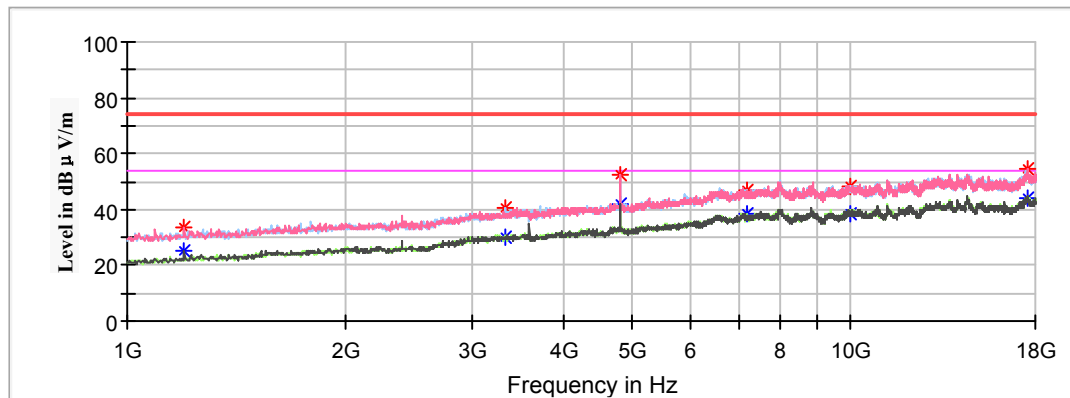

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1200.600000	---	24.88	200.0	V	72.0	-11.6	54.00	29.12
1200.600000	33.74	---	200.0	V	72.0	-11.6	74.00	40.26
3329.000000	---	30.32	200.0	H	0.0	-3.8	54.00	23.68
3329.000000	40.60	---	200.0	H	0.0	-3.8	74.00	33.40
4806.000000	---	41.75	150.0	V	129.0	-0.6	54.00	12.25
4806.000000	52.37	---	150.0	V	129.0	-0.6	74.00	21.63
7209.000000	---	38.70	150.0	H	165.0	5.7	54.00	15.30
7209.000000	46.89	---	150.0	H	165.0	5.7	74.00	27.11
9993.000000	---	38.61	150.0	H	47.0	8.2	54.00	15.39
9993.000000	48.50	---	150.0	H	47.0	8.2	74.00	25.50
17564.800000	---	44.35	200.0	V	30.0	14.2	54.00	9.65
17564.800000	54.37	---	200.0	V	30.0	14.2	74.00	19.63

Middle Channel: 2442MHz


Full Spectrum

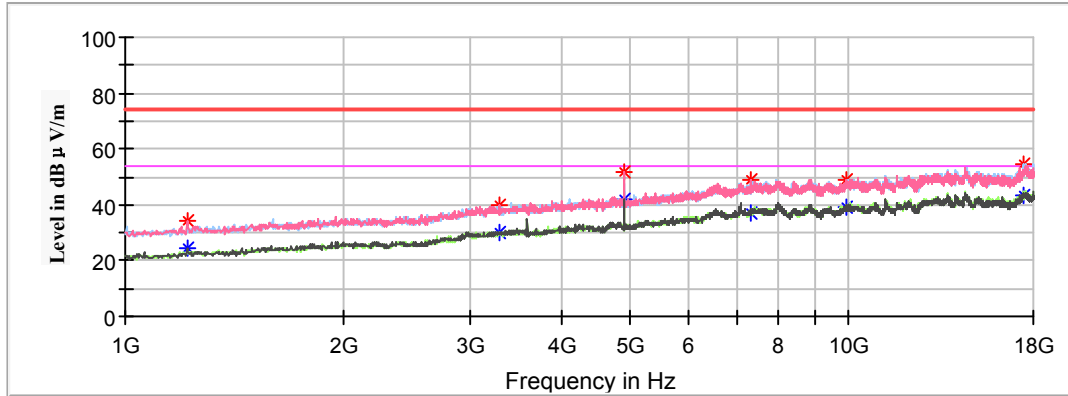

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1217.600000	---	24.24	200.0	V	266.0	-11.5	54.00	29.76
1217.600000	34.07	---	200.0	V	266.0	-11.5	74.00	39.93
3288.200000	---	29.92	150.0	V	336.0	-3.9	54.00	24.08
3288.200000	40.04	---	150.0	V	336.0	-3.9	74.00	33.96
4884.000000	---	42.20	200.0	V	111.0	-0.4	54.00	11.80
4884.000000	52.04	---	200.0	V	111.0	-0.4	74.00	21.96
7326.000000	---	37.07	200.0	V	15.0	5.9	54.00	16.93
7326.000000	48.85	---	200.0	V	15.0	5.9	74.00	25.15
9948.800000	---	39.09	150.0	V	70.0	8.2	54.00	14.91
9948.800000	49.25	---	150.0	V	70.0	8.2	74.00	24.75
17428.800000	---	43.63	150.0	H	64.0	13.9	54.00	10.37
17428.800000	54.67	---	150.0	H	64.0	13.9	74.00	19.33

High Channel: 2480MHz


Full Spectrum

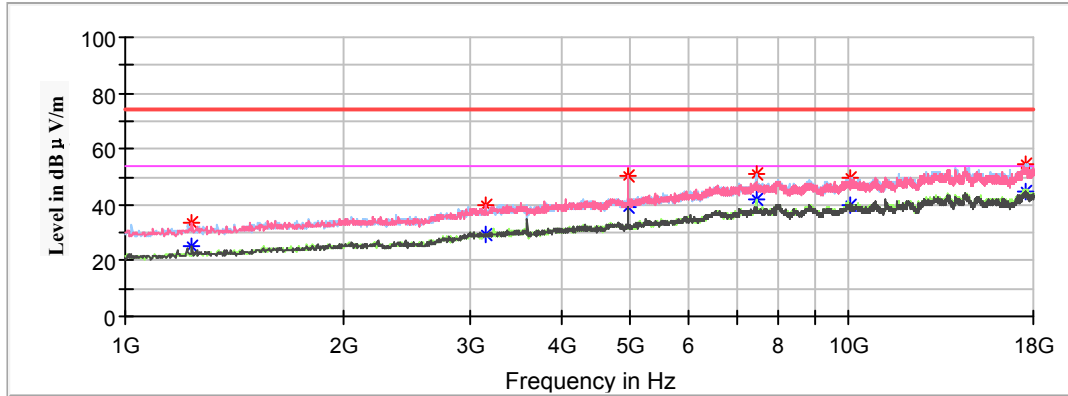


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1238.000000	---	25.17	200.0	V	40.0	-11.4	54.00	28.83
1238.000000	33.85	---	200.0	V	40.0	-11.4	74.00	40.15
3148.800000	---	29.60	150.0	V	98.0	-4.1	54.00	24.40
3148.800000	39.63	---	150.0	V	98.0	-4.1	74.00	34.37
4960.000000	---	39.22	150.0	V	112.0	-0.3	54.00	14.78
4960.000000	50.61	---	150.0	V	112.0	-0.3	74.00	23.39
7440.000000	---	41.78	150.0	H	161.0	6.0	54.00	12.22
7440.000000	50.86	---	150.0	H	161.0	6.0	74.00	23.14
10023.600000	---	39.60	200.0	V	196.0	8.3	54.00	14.40
10023.600000	49.54	---	200.0	V	196.0	8.3	74.00	24.46
17513.800000	---	44.91	150.0	H	304.0	14.3	54.00	9.09
17513.800000	54.61	---	150.0	H	304.0	14.3	74.00	19.39

18GHz-25GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

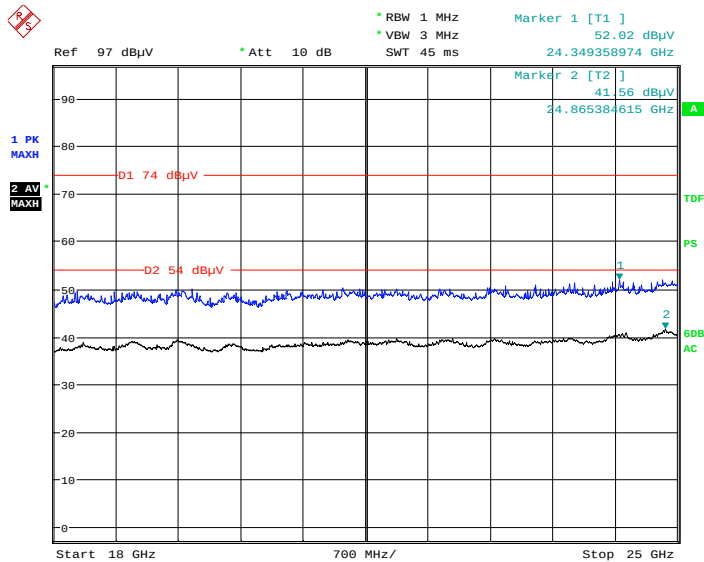Horizontal

Date: 5.MAY.2019 19:56:21

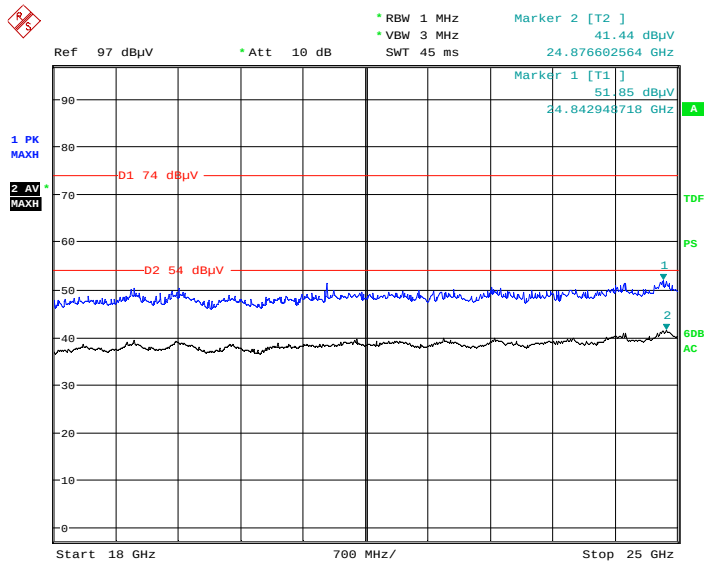Vertical

Date: 5.MAY.2019 20:21:04

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2403MHz								
2403.000000	79.05	---	150.0	H	79.0	2.8	114.00	34.95
2403.000000	---	78.98	150.0	H	79.0	2.8	94.00	15.02
2403.000000	84.48	---	100.0	V	340.0	2.8	114.00	29.52
2403.000000	---	84.43	100.0	V	340.0	2.8	94.00	9.57
2400.000000	---	36.42	200.0	H	285.0	2.7	54.00	17.58
2400.000000	46.66	---	200.0	H	285.0	2.7	74.00	27.34
Middle Channel: 2442MHz								
2442.000000	78.74	---	250.0	H	359.0	2.9	114.00	35.26
2442.000000	---	77.58	250.0	H	359.0	2.9	94.00	16.42
2442.000000	83.66	---	150.0	V	311.0	2.9	114.00	30.34
2442.000000	---	82.84	150.0	V	311.0	2.9	94.00	11.16
High Channel: 2480MHz								
2480.000000	80.88	---	200.0	H	60.0	3.0	114.00	33.12
2480.000000	---	80.80	200.0	H	60.0	3.0	94.00	13.20
2480.000000	84.60	---	150.0	V	278.0	3.0	114.00	29.40
2480.000000	---	84.55	150.0	V	278.0	3.0	94.00	9.45
2483.500000	46.50	---	200.0	H	108.0	3.1	74.00	27.50
2483.500000	---	36.41	200.0	H	108.0	3.1	54.00	17.59

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Matt yao on 2019-05-07.

Test Result: Compliant.

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2403	1.064
Middle	2442	1.142
High	2480	1.040

Delta 1 [T1]

Ref Lvl -0.24 dB

10 dBm 1.06412826 MHz

RBW 30 kHz RF Att 30 dB

VBW 100 kHz

SWT 8.5 ms Unit dBm

10.5 dB Offset

▼1 [T1] -28.92 dBm

▲1 [T1] -0.24 dB

1.06412826 MHz

-D1 -8.79 dBm

1MAX

D2 -28.79 dBm

1

1

1MAX

Center 2.403 GHz 300 kHz/ Span 3 MHz

Date: 7.MAY.2019 13:49:28

Delta 1 [T1] 0.07 dB

Ref Lvl 10 dBm

1.14228457 MHz

RBW 30 kHz

VBW 100 kHz

SWT 8.5 ms

RF Att 30 dB

Unit dBm

10.5 dB Offset

▼1 [T1] -30.00 dBm

▲1 [T1] 0.07 dBm

1.14228457 MHz

D1 -9.41 dBm

1MAX

D2 -29.41 dBm

1MA

Center 2.442 GHz

300 kHz/

Span 3 MHz

Date: 7.MAY.2019 13:48:09

Delta 1 [T1]

Ref Lvl 0.00 dB
10 dBm

RBW 30 kHz
SWT 8.5 ms

RF Att 30 dB

Unit dBm

10.5 dB Offset

▼1 [T1] -10.50 dBm
2.47951603 GHz
▲1 [T1] 0.00 dB
1.04008016 MHz

01 -10.20 dBm
02 -30.20 dBm

1MAX

Center 2.48 GHz
300 kHz/
Span 3 MHz

Date: 7.MAY.2019 13:50:58

Page 21 of 21