

# FCC TEST REPORT (15.247)

**REPORT NO.:** RF980320L04

**MODEL NO.:** AT-TQ2403

**RECEIVED:** Mar. 19, 2009

**TESTED:** Apr. 06 ~ Apr. 16, 2009

**ISSUED:** May 07, 2009

**APPLICANT:** Delta Networks, Inc.

**ADDRESS:** 252, Shang Ying Road, Kuei San, Taoyuan  
Shien 333, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan,  
R.O.C.

This test report consists of 125 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



## TABLE OF CONTENTS

|       |                                                         |    |
|-------|---------------------------------------------------------|----|
| 1.    | CERTIFICATION.....                                      | 6  |
| 2.    | SUMMARY OF TEST RESULTS .....                           | 7  |
| 2.1   | MEASUREMENT UNCERTAINTY .....                           | 7  |
| 3.    | GENERAL INFORMATION.....                                | 8  |
| 3.1   | GENERAL DESCRIPTION OF EUT .....                        | 8  |
| 3.2   | DESCRIPTION OF TEST MODES .....                         | 10 |
| 3.2.1 | CONFIGURATION OF SYSTEM UNDER TEST .....                | 11 |
| 3.2.2 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL ..... | 12 |
| 3.3   | GENERAL DESCRIPTION OF APPLIED STANDARDS .....          | 16 |
| 3.4   | DESCRIPTION OF SUPPORT UNITS .....                      | 16 |
| 4.    | TEST TYPES AND RESULTS (FOR 2.4GHz) .....               | 17 |
| 4.1   | RADIATED EMISSION MEASUREMENT .....                     | 17 |
| 4.1.1 | LIMITS OF RADIATED EMISSION MEASUREMENT.....            | 17 |
| 4.1.2 | TEST INSTRUMENTS .....                                  | 18 |
| 4.1.3 | TEST PROCEDURES .....                                   | 19 |
| 4.1.4 | DEVIATION FROM TEST STANDARD .....                      | 19 |
| 4.1.5 | TEST SETUP .....                                        | 20 |
| 4.1.6 | EUT OPERATING CONDITIONS .....                          | 20 |
| 4.1.7 | TEST RESULTS .....                                      | 21 |
| 4.2   | CONDUCTED EMISSION MEASUREMENT .....                    | 33 |
| 4.2.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT.....           | 33 |
| 4.2.2 | TEST INSTRUMENTS .....                                  | 33 |
| 4.2.3 | TEST PROCEDURES .....                                   | 34 |
| 4.2.4 | DEVIATION FROM TEST STANDARD .....                      | 34 |
| 4.2.5 | TEST SETUP .....                                        | 35 |
| 4.2.6 | EUT OPERATING CONDITIONS .....                          | 35 |
| 4.2.7 | TEST RESULTS .....                                      | 36 |
| 4.3   | 6dB BANDWIDTH MEASUREMENT .....                         | 44 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT.....                | 44 |
| 4.3.2 | TEST INSTRUMENTS .....                                  | 44 |
| 4.3.3 | TEST PROCEDURE .....                                    | 44 |
| 4.3.4 | DEVIATION FROM TEST STANDARD .....                      | 44 |
| 4.3.5 | TEST SETUP .....                                        | 45 |
| 4.3.6 | EUT OPERATING CONDITIONS .....                          | 45 |

|       |                                                       |    |
|-------|-------------------------------------------------------|----|
| 4.3.7 | TEST RESULTS .....                                    | 46 |
| 4.4   | MAXIMUM PEAK OUTPUT POWER .....                       | 51 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT ..... | 51 |
| 4.4.2 | INSTRUMENTS .....                                     | 51 |
| 4.4.3 | TEST PROCEDURES .....                                 | 51 |
| 4.4.4 | DEVIATION FROM TEST STANDARD .....                    | 51 |
| 4.4.5 | TEST SETUP .....                                      | 52 |
| 4.4.6 | EUT OPERATING CONDITIONS .....                        | 52 |
| 4.4.7 | TEST RESULTS .....                                    | 53 |
| 4.5   | POWER SPECTRAL DENSITY MEASUREMENT .....              | 55 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....    | 55 |
| 4.5.2 | TEST INSTRUMENTS .....                                | 55 |
| 4.5.3 | TEST PROCEDURE .....                                  | 55 |
| 4.5.4 | DEVIATION FROM TEST STANDARD .....                    | 56 |
| 4.5.5 | TEST SETUP .....                                      | 56 |
| 4.5.6 | EUT OPERATING CONDITION .....                         | 56 |
| 4.5.7 | TEST RESULTS .....                                    | 57 |
| 4.6   | BAND EDGES MEASUREMENT .....                          | 62 |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT .....                | 62 |
| 4.6.2 | TEST INSTRUMENTS .....                                | 62 |
| 4.6.3 | TEST PROCEDURE .....                                  | 62 |
| 4.6.4 | DEVIATION FROM TEST STANDARD .....                    | 62 |
| 4.6.5 | EUT OPERATING CONDITION .....                         | 62 |
| 4.6.6 | TEST RESULTS .....                                    | 63 |
| 4.7   | ANTENNA REQUIREMENT .....                             | 75 |
| 4.7.1 | STANDARD APPLICABLE .....                             | 75 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION .....                  | 75 |
| 5.    | TEST TYPES AND RESULTS (FOR 5.0GHz) .....             | 76 |
| 5.1   | RADIATED EMISSION MEASUREMENT .....                   | 76 |
| 5.1.1 | LIMITS OF RADIATED EMISSION MEASUREMENT .....         | 76 |
| 5.1.2 | TEST INSTRUMENTS .....                                | 77 |
| 5.1.3 | TEST PROCEDURES .....                                 | 78 |
| 5.1.4 | DEVIATION FROM TEST STANDARD .....                    | 78 |
| 5.1.5 | TEST SETUP .....                                      | 79 |
| 5.1.6 | EUT OPERATING CONDITIONS .....                        | 79 |
| 5.1.7 | TEST RESULTS .....                                    | 80 |
| 5.2   | CONDUCTED EMISSION MEASUREMENT .....                  | 89 |



|       |                                                                                        |     |
|-------|----------------------------------------------------------------------------------------|-----|
| 5.2.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT.....                                          | 89  |
| 5.2.2 | T E S T I N S T R U M E N T S.....                                                     | 89  |
| 5.2.3 | T E S T P R O C E D U R E S.....                                                       | 90  |
| 5.2.4 | D E V I A T I O N F R O M T E S T S T A N D A R D.....                                 | 90  |
| 5.2.5 | T E S T S E T U P.....                                                                 | 91  |
| 5.2.6 | E U T O P E R A T I N G C O N D I T I O N S.....                                       | 91  |
| 5.2.7 | T E S T R E S U L T S.....                                                             | 92  |
| 5.3   | 6d B B A N D W I D T H M E A S U R E M E N T.....                                      | 100 |
| 5.3.1 | L I M I T S O F 6d B B A N D W I D T H M E A S U R E M E N T.....                      | 100 |
| 5.3.2 | T E S T I N S T R U M E N T S.....                                                     | 100 |
| 5.3.3 | T E S T P R O C E D U R E.....                                                         | 100 |
| 5.3.4 | D E V I A T I O N F R O M T E S T S T A N D A R D.....                                 | 101 |
| 5.3.5 | T E S T S E T U P.....                                                                 | 101 |
| 5.3.6 | E U T O P E R A T I N G C O N D I T I O N S.....                                       | 101 |
| 5.3.7 | T E S T R E S U L T S.....                                                             | 102 |
| 5.4   | M A X I M U M P E A K O U T P U T P O W E R.....                                       | 106 |
| 5.4.1 | L I M I T S O F M A X I M U M P E A K O U T P U T P O W E R M E A S U R E M E N T..... | 106 |
| 5.4.2 | I N S T R U M E N T S.....                                                             | 106 |
| 5.4.3 | T E S T P R O C E D U R E S.....                                                       | 106 |
| 5.4.4 | D E V I A T I O N F R O M T E S T S T A N D A R D.....                                 | 106 |
| 5.4.5 | T E S T S E T U P.....                                                                 | 106 |
| 5.4.6 | E U T O P E R A T I N G C O N D I T I O N S.....                                       | 106 |
| 5.4.7 | T E S T R E S U L T S.....                                                             | 107 |
| 5.5   | P O W E R S P E C T R A L D E N S I T Y M E A S U R E M E N T.....                     | 108 |
| 5.5.1 | L I M I T S O F P O W E R S P E C T R A L D E N S I T Y M E A S U R E M E N T.....     | 108 |
| 5.5.2 | T E S T I N S T R U M E N T S.....                                                     | 108 |
| 5.5.3 | T E S T P R O C E D U R E.....                                                         | 108 |
| 5.5.4 | D E V I A T I O N F R O M T E S T S T A N D A R D.....                                 | 109 |
| 5.5.5 | T E S T S E T U P.....                                                                 | 109 |
| 5.5.6 | E U T O P E R A T I N G C O N D I T I O N.....                                         | 109 |
| 5.5.7 | T E S T R E S U L T S.....                                                             | 110 |
| 5.6   | B A N D E D G E S M E A S U R E M E N T.....                                           | 114 |
| 5.6.1 | L I M I T S O F B A N D E D G E S M E A S U R E M E N T.....                           | 114 |
| 5.6.2 | T E S T I N S T R U M E N T S.....                                                     | 114 |
| 5.6.3 | T E S T P R O C E D U R E.....                                                         | 114 |
| 5.6.4 | D E V I A T I O N F R O M T E S T S T A N D A R D.....                                 | 114 |
| 5.6.5 | E U T O P E R A T I N G C O N D I T I O N.....                                         | 115 |



A D T

|       |                                                                                            |     |
|-------|--------------------------------------------------------------------------------------------|-----|
| 5.6.6 | TEST RESULTS .....                                                                         | 115 |
| 5.7   | ANTENNA REQUIREMENT .....                                                                  | 122 |
| 5.7.1 | STANDARD APPLICABLE .....                                                                  | 122 |
| 5.7.2 | ANTENNA CONNECTED CONSTRUCTION .....                                                       | 122 |
| 6.    | PHOTOGRAPHS OF THE TEST CONFIGURATION .....                                                | 123 |
| 7.    | INFORMATION ON THE TESTING LABORATORIES .....                                              | 124 |
| 8.    | APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES<br>TO THE EUT BY THE LAB..... | 125 |

## 1. CERTIFICATION

**PRODUCT:** Enterprise Wlan AP

**MODEL:** AT-TQ2403

**BRAND:** ATI

**APPLICANT:** Delta Networks, Inc.

**TESTED:** Apr. 06 ~ Apr. 16, 2009

**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS:** FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (Model: AT-TQ2403) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Polly Chien , **DATE** : May 07, 2009  
Polly Chien / Specialist

**TECHNICAL**  
**ACCEPTANCE** : Long Chen , **DATE** : May 07, 2009  
Responsible for RF Long Chen / Senior Engineer

**APPROVED BY** : Gary Chang , **DATE** : May 07, 2009  
Gary Chang / Assistant Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| <b>APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)</b> |                                                                                        |               |                                                                                 |
|------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------------|---------------------------------------------------------------------------------|
| <b>Standard Section</b>                                          | <b>Test Type and Limit</b>                                                             | <b>Result</b> | <b>Remark</b>                                                                   |
| 15.207                                                           | AC Power Conducted Emission                                                            | PASS          | Meet the requirement of limit. Minimum passing margin is -23.17dB at 0.158MHz.  |
| 15.247(a)(2)                                                     | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System<br>Limit: min. 500kHz   | PASS          | Meet the requirement of limit.                                                  |
| 15.247(b)                                                        | Maximum Peak Output Power<br>Limit: max. 30dBm                                         | PASS          | Meet the requirement of limit.                                                  |
| 15.247(d)                                                        | Radiated Emissions<br>Limit: Table 15.209                                              | PASS          | Meet the requirement of limit. Minimum passing margin is -1.04dB at 2360.00MHz. |
| 15.247(e)                                                        | Power Spectral Density<br>Limit: max. 8dBm                                             | PASS          | Meet the requirement of limit.                                                  |
| 15.247(d)                                                        | Band Edge Measurement<br>Limit: 30dB less than the peak value of fundamental frequency | PASS          | Meet the requirement of limit.                                                  |

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| <b>MEASUREMENT</b>  | <b>FREQUENCY</b> | <b>UNCERTAINTY</b> |
|---------------------|------------------|--------------------|
| Conducted emissions | 150kHz~30MHz     | 2.44 dB            |
| Radiated emissions  | 30MHz ~ 200MHz   | 3.19 dB            |
|                     | 200MHz ~1000MHz  | 3.21 dB            |
|                     | 1GHz ~ 18GHz     | 2.26 dB            |
|                     | 18GHz ~ 40GHz    | 1.94 dB            |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                              |                                                                                                                                    |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT</b>                   | Enterprise Wlan AP                                                                                                                 |
| <b>MODEL NO.</b>             | AT-TQ2403                                                                                                                          |
| <b>FCC ID</b>                | PD5TQ2403                                                                                                                          |
| <b>POWER SUPPLY</b>          | 5 Vdc from adapter<br>56 Vdc from POE                                                                                              |
| <b>MODULATION TYPE</b>       | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM                                                                    |
| <b>MODULATION TECHNOLOGY</b> | DSSS, OFDM                                                                                                                         |
| <b>TRANSFER RATE</b>         | 802.11b:11/5.5/2/1Mbps<br>802.11g: 54/48/36/24/18/12/9/6Mbps<br>802.11a: 54/48/36/24/18/12/9/6Mbps<br>(*Turbo mode: up to 108Mbps) |
| <b>OPERATING FREQUENCY</b>   | <b>2.4GHz:</b> 2412 ~ 2462MHz<br><b>5.0GHz:</b> 5745.0 ~ 5825.0MHz                                                                 |
| <b>NUMBER OF CHANNEL</b>     | <b>2.4GHz:</b> 11<br>802.11g: 1 for turbo mode<br><b>5.0GHz:</b> 5<br>802.11a: 2 for turbo mode                                    |
| <b>OUTPUT POWER</b>          | 224.905mW for 2412 ~ 2462MHz<br>102.329mW for 5745 ~ 5825MHz                                                                       |
| <b>ANTENNA TYPE(S)</b>       | Dipole Antenna with 2.43dBi gain for 2.4GHz band<br>Dipole Antenna with 2.26dBi gain for 5.0GHz band                               |
| <b>DATA CABLE</b>            | NA                                                                                                                                 |
| <b>I/O PORTS</b>             | RJ45                                                                                                                               |
| <b>ACCESSORY DEVICES</b>     | Adapter                                                                                                                            |

**NOTE:**

1. The EUT was powered by the following adapter.

|                    |                                       |
|--------------------|---------------------------------------|
| <b>BRAND:</b>      | LEADER ELECTRONICS INC.               |
| <b>MODEL:</b>      | MU18-2050280-A1                       |
| <b>INPUT:</b>      | 100-240Vac, 50/60Hz, 0.6A             |
| <b>OUTPUT:</b>     | 5Vdc, 2.8A                            |
| <b>POWER LINE:</b> | 1.5 m non-shielded cable without core |

2. The EUT is an Enterprise Wlan AP. The functions of EUT listed as below:

|                                                                            | TEST STANDARD                              | REFERENCE REPORT |
|----------------------------------------------------------------------------|--------------------------------------------|------------------|
| <b>WLAN 802.11b/g</b>                                                      | FCC Part 15, Subpart C<br>(Section 15.247) | RF980320L04      |
| <b>WLAN 802.11a (5745~5825 MHz)</b>                                        |                                            |                  |
| <b>WLAN 802.11a<br/>(5180 ~ 5320MHz, 5500 ~ 5700MHz )</b>                  | FCC Part 15, Subpart E<br>(Section 15.407) | RF980320L04-1    |
| <b>WLAN 802.11a (For DFS report)<br/>(5260 ~ 5320MHz, 5500 ~ 5700MHz )</b> | FCC Part 15, Subpart E<br>(Section 15.407) | RF980320L04-2    |

3. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
4. The EUT operates in the 2.4GHz/5GHz frequency spectrum with throughput of up to 54Mbps.
5. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES

#### FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g:

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1       | 2412MHz   | 7       | 2442MHz   |
| 2       | 2417MHz   | 8       | 2447MHz   |
| 3       | 2422MHz   | 9       | 2452MHz   |
| 4       | 2427MHz   | 10      | 2457MHz   |
| 5       | 2432MHz   | 11      | 2462MHz   |
| 6       | 2437MHz   |         |           |

For 802.11g: One channel is provided to this EUT for turbo mode:

| CHANNEL | FREQUENCY |
|---------|-----------|
| 6       | 2437 MHz  |

#### FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a:


| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 149     | 5745MHz   | 161     | 5805MHz   |
| 153     | 5765MHz   | 165     | 5825MHz   |
| 157     | 5785MHz   |         |           |

For 802.11a: Two channels are provided to this EUT for turbo mode:


| CHANNEL | FREQUENCY |
|---------|-----------|
| 152     | 5760 MHz  |
| 160     | 5800 MHz  |

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

#### Test Mode A

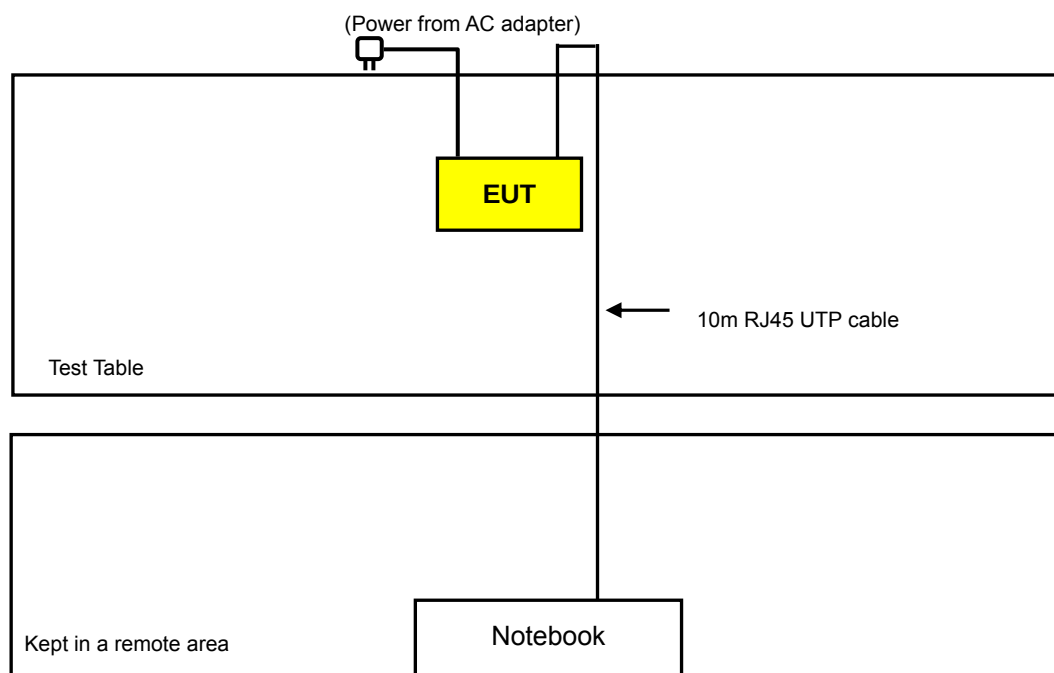

#### Test Mode B

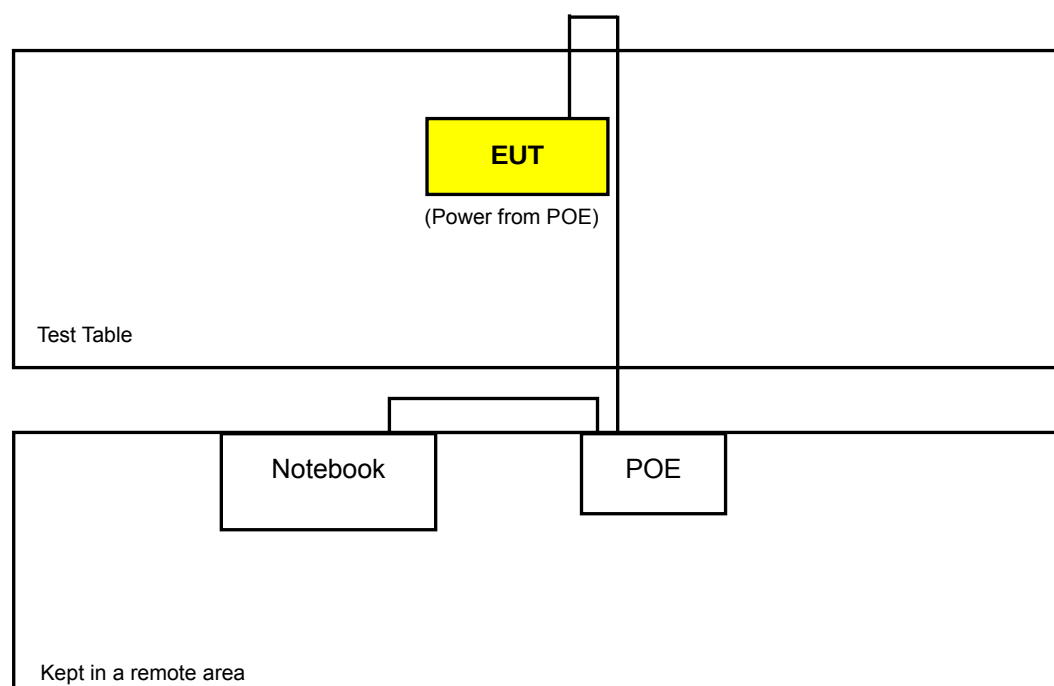

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

#### FOR 2.4GHz:

| EUT CONFIGURE MODE | APPLICABLE TO |       |     |      | DESCRIPTION           |
|--------------------|---------------|-------|-----|------|-----------------------|
|                    | RE $\geq$ 1G  | RE<1G | PLC | APCM |                       |
| A                  | √             | √     | √   | √    | Power from AC Adapter |
| B                  | -             | √     | √   | -    | Power from POE        |

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**NOTE**: “-” means no effect

#### RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE          | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|---------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A                  | 802.11b       | 1 to 11           | 1, 6, 11       | DSSS                  | DBPSK           | 1.0              | X    |
| A                  | 802.11g       | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6.0              | X    |
| A                  | 802.11g Turbo | 6                 | 6              | OFDM                  | QPSK            | 12.0             | X    |

#### RADIATED EMISSION TEST (BELOW 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE          | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|---------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A, B               | 802.11g       | 1 to 11           | 6              | OFDM                  | BPSK            | 6.0              | X    |
| A, B               | 802.11g Turbo | 6                 | 6              | OFDM                  | QPSK            | 12.0             | X    |

#### **POWER LINE CONDUCTED EMISSION TEST:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGUR E MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A, B                | 802.11g       | 2412~2462         | 1 to 11           | 6              | OFDM                  | BPSK            | 6.0              |
| A, B                | 802.11g Turbo | 2412~2462         | 6                 | 6              | OFDM                  | QPSK            | 12.0             |

#### **BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A                  | 802.11b       | 2412~2462         | 1 to 11           | 1, 11          | DSSS                  | DBPSK           | 1.0              | X    |
| A                  | 802.11g       | 2412~2462         | 1 to 11           | 1, 11          | OFDM                  | BPSK            | 6.0              | X    |
| A                  | 802.11g Turbo | 2412~2462         | 6                 | 6              | OFDM                  | QPSK            | 12.0             | X    |

#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A                  | 802.11b       | 2412~2462         | 1 to 11           | 1, 6, 11       | DSSS                  | DBPSK           | 1.0              |
| A                  | 802.11g       | 2412~2462         | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6.0              |
| A                  | 802.11g Turbo | 2412~2462         | 6                 | 6              | OFDM                  | QPSK            | 12.0             |

### FOR 5.0GHz:

| EUT CONFIGURE MODE | APPLICABLE TO |       |     |      | DESCRIPTION           |
|--------------------|---------------|-------|-----|------|-----------------------|
|                    | RE $\geq$ 1G  | RE<1G | PLC | APCM |                       |
| A                  | √             | √     | √   | √    | Power from AC Adapter |
| B                  | -             | √     | √   | -    | Power from POE        |

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**NOTE**: “-” means no effect

### RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A                  | 802.11a       | 5745~5825         | 149 to 165        | 149, 157, 165  | OFDM                  | BPSK            | 6.0              | X    |
| A                  | 802.11a Turbo | 5745~5825         | 152, 160          | 152, 160       | OFDM                  | QPSK            | 12.0             | X    |

### RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A, B               | 802.11a       | 5745~5825         | 149 to 165        | 149            | OFDM                  | BPSK            | 6.0              | X    |
| A, B               | 802.11a Turbo | 5745~5825         | 152               | 152            | OFDM                  | QPSK            | 12.0             | X    |

#### **POWER LINE CONDUCTED EMISSION TEST:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGUR E MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A, B                | 802.11a       | 5745~5825         | 149 to 165        | 149            | OFDM                  | BPSK            | 6.0              |
| A, B                | 802.11a Turbo | 5745~5825         | 152               | 152            | OFDM                  | QPSK            | 12.0             |

#### **BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGUR E MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A                   | 802.11a       | 5745~5825         | 149 to 165        | 149, 165       | OFDM                  | BPSK            | 6.0              |
| A                   | 802.11a Turbo | 5745~5825         | 152, 160          | 152, 160       | OFDM                  | QPSK            | 12.0             |

#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGUR E MODE | MODE          | FREQ. RANGE (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------------|---------------|-------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A                   | 802.11a       | 5745~5825         | 149 to 165        | 149, 157, 165  | OFDM                  | BPSK            | 6.0              |
| A                   | 802.11a Turbo | 5745~5825         | 152, 160          | 152, 160       | OFDM                  | QPSK            | 12.0             |

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT  | BRAND | MODEL NO.   | SERIAL NO.  | FCC ID    |
|-----|----------|-------|-------------|-------------|-----------|
| 1   | NOTEBOOK | DELL  | PP05L       | 25191592336 | E2K24CLNS |
| 2   | POE      | Cisco | DPSN-35FB A | NA          | NA        |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | 10m RJ45 cable                                      |
| 2   | 3m RJ45 cable                                       |

**NOTE:**

1. All power cords of the above support units are non shielded (1.8m).
2. Item 2 was provided by client.
3. Item 1, 2 acted as communication partners to transfer data.

## 4. TEST TYPES AND RESULTS (FOR 2.4GHz)

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES<br>(MHz) | FIELD STRENGTH<br>(microvolts/meter) | MEASUREMENT DISTANCE<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490        | 2400/F(kHz)                          | 300                              |
| 0.490 ~ 1.705        | 24000/F(kHz)                         | 30                               |
| 1.705 ~ 30.0         | 30                                   | 30                               |
| 30 ~ 88              | 100                                  | 3                                |
| 88 ~ 216             | 150                                  | 3                                |
| 216 ~ 960            | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER              | MODEL NO.                    | SERIAL NO.  | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|-----------------------------------------|------------------------------|-------------|---------------------|-------------------------|
| Test Receiver<br>ROHDE & SCHWARZ        | ESI7                         | 838496/016  | Dec. 29, 2008       | Dec. 28, 2009           |
| Spectrum Analyzer<br>ROHDE & SCHWARZ    | FSP40                        | 100039      | Dec. 08, 2008       | Dec. 07, 2009           |
| BILOG Antenna<br>SCHWARZBECK            | VULB9168                     | 9168-155    | Apr. 30, 2008       | Apr. 29, 2009           |
| HORN Antenna<br>SCHWARZBECK             | BBHA 9120D                   | 9120D-408   | Dec. 29, 2008       | Dec. 28, 2009           |
| HORN Antenna<br>SCHWARZBECK             | BBHA 9170                    | BBHA9170242 | Jan. 06, 2009       | Jan. 05, 2010           |
| Preamplifier<br>Agilent                 | 8449B                        | 3008A01960  | Nov. 03, 2008       | Nov. 02, 2009           |
| Preamplifier<br>Agilent                 | 8447D                        | 2944A10631  | Nov. 03, 2008       | Nov. 02, 2009           |
| RF signal cable<br>HUBER+SUHNNER        | SUCOFLEX 104                 | 274041/4    | Aug. 21, 2008       | Aug. 20, 2009           |
| RF signal cable<br>HUBER+SUHNNER        | SUCOFLEX 104                 | 283397/4    | Aug. 21, 2008       | Aug. 20, 2009           |
| Software<br>ADT.                        | ADT_Radiated_<br>V7.6.15.9.2 | NA          | NA                  | NA                      |
| Antenna Tower<br>inn-co GmbH            | MA 4000                      | 010303      | NA                  | NA                      |
| Antenna Tower Controller<br>inn-co GmbH | CO2000                       | 019303      | NA                  | NA                      |
| Turn Table<br>ADT.                      | TT100.                       | TT93021704  | NA                  | NA                      |
| Turn Table Controller<br>ADT.           | SC100.                       | SC93021704  | NA                  | NA                      |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 988962.
  5. The IC Site Registration No. is IC7450F-4.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

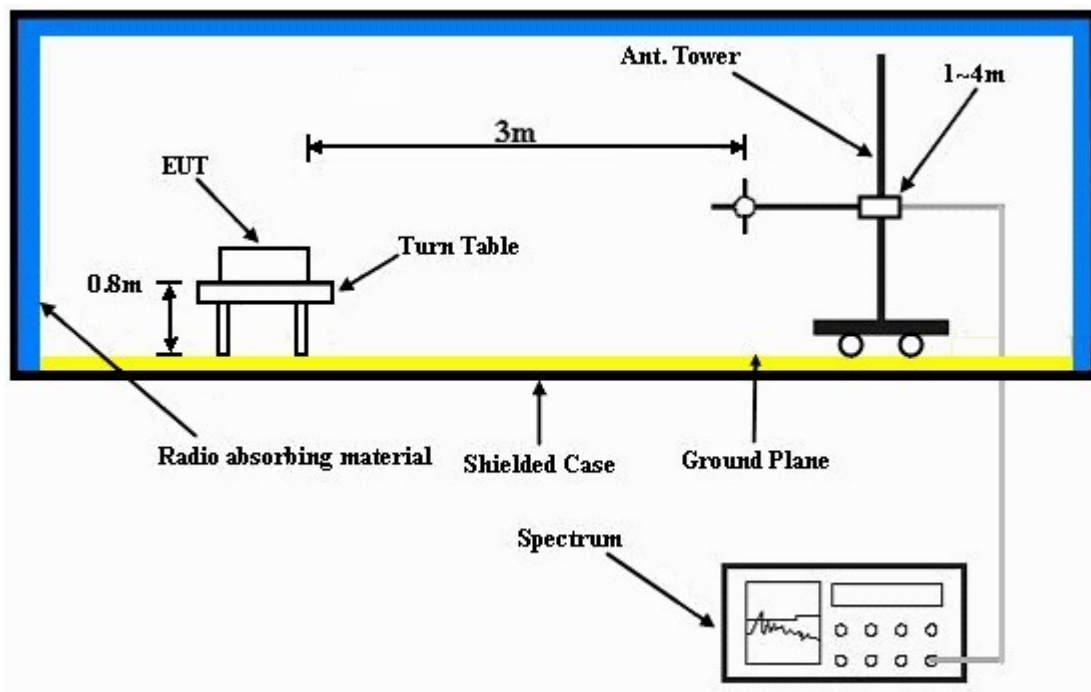

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared a notebook system to act as a communication partner and placed them outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

#### 4.1.7 TEST RESULTS

##### ABOVE 1GHz DATA: 802.11b DSSS MODULATION (NORMAL MODE)

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 1                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2323.00     | 60.66 PK                | 74.00          | -13.34      | 1.39 H             | 55                   | 28.64            | 32.02                    |
| 2                                                   | 2323.00     | 50.94 AV                | 54.00          | -3.06       | 1.39 H             | 55                   | 18.92            | 32.02                    |
| 3                                                   | *2412.00    | 108.62 PK               |                |             | 1.40 H             | 54                   | 76.24            | 32.38                    |
| 4                                                   | *2412.00    | 103.82 AV               |                |             | 1.40 H             | 54                   | 71.44            | 32.38                    |
| 5                                                   | 4824.00     | 51.31 PK                | 74.00          | -22.69      | 1.45 H             | 20                   | 12.74            | 38.56                    |
| 6                                                   | 4824.00     | 43.04 AV                | 54.00          | -10.96      | 1.45 H             | 20                   | 4.47             | 38.56                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2323.00     | 62.16 PK                | 74.00          | -11.84      | 1.18 V             | 335                  | 30.14            | 32.02                    |
| 2                                                   | 2323.00     | 52.64 AV                | 54.00          | -1.36       | 1.18 V             | 335                  | 20.62            | 32.02                    |
| 3                                                   | *2412.00    | 111.73 PK               |                |             | 1.18 V             | 335                  | 79.35            | 32.38                    |
| 4                                                   | *2412.00    | 106.87 AV               |                |             | 1.18 V             | 335                  | 74.49            | 32.38                    |
| 5                                                   | 4824.00     | 54.19 PK                | 74.00          | -19.81      | 1.42 V             | 198                  | 15.62            | 38.56                    |
| 6                                                   | 4824.00     | 50.43 AV                | 54.00          | -3.57       | 1.42 V             | 198                  | 11.87            | 38.56                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 57.12 PK                | 74.00          | -16.88      | 1.28 H             | 279                  | 25.10            | 32.02                    |
| 2                                                   | 2322.00     | 49.25 AV                | 54.00          | -4.75       | 1.28 H             | 279                  | 17.23            | 32.02                    |
| 3                                                   | *2437.00    | 108.35 PK               |                |             | 1.33 H             | 66                   | 75.87            | 32.48                    |
| 4                                                   | *2437.00    | 103.54 AV               |                |             | 1.33 H             | 66                   | 71.06            | 32.48                    |
| 5                                                   | 4874.00     | 49.64 PK                | 74.00          | -24.36      | 1.17 H             | 200                  | 10.96            | 38.67                    |
| 6                                                   | 4874.00     | 41.83 AV                | 54.00          | -12.17      | 1.17 H             | 200                  | 3.15             | 38.67                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 64.42 PK                | 74.00          | -9.58       | 1.20 V             | 342                  | 32.40            | 32.02                    |
| 2                                                   | 2322.00     | 52.91 AV                | 54.00          | -1.09       | 1.20 V             | 342                  | 20.89            | 32.02                    |
| 3                                                   | *2437.00    | 111.42 PK               |                |             | 1.22 V             | 310                  | 78.94            | 32.48                    |
| 4                                                   | *2437.00    | 106.39 AV               |                |             | 1.22 V             | 310                  | 73.91            | 32.48                    |
| 5                                                   | 4874.00     | 50.41 PK                | 74.00          | -23.59      | 1.21 V             | 140                  | 11.73            | 38.67                    |
| 6                                                   | 4874.00     | 44.74 AV                | 54.00          | -9.26       | 1.21 V             | 140                  | 6.06             | 38.67                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 11                 | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 56.76 PK                | 74.00          | -17.24      | 1.34 H             | 348                  | 24.74            | 32.02                    |
| 2                                                   | 2322.00     | 48.40 AV                | 54.00          | -5.60       | 1.34 H             | 348                  | 16.38            | 32.02                    |
| 3                                                   | *2462.00    | 108.45 PK               |                |             | 1.38 H             | 51                   | 75.87            | 32.58                    |
| 4                                                   | *2462.00    | 103.51 AV               |                |             | 1.38 H             | 51                   | 70.93            | 32.58                    |
| 5                                                   | 2483.50     | 58.67 PK                | 74.00          | -15.33      | 1.34 H             | 51                   | 26.01            | 32.66                    |
| 6                                                   | 2483.50     | 49.67 AV                | 54.00          | -4.33       | 1.34 H             | 51                   | 17.01            | 32.66                    |
| 7                                                   | 4924.00     | 48.82 PK                | 74.00          | -25.18      | 1.18 H             | 8                    | 10.03            | 38.79                    |
| 8                                                   | 4924.00     | 40.12 AV                | 54.00          | -13.88      | 1.18 H             | 8                    | 1.33             | 38.79                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 63.57 PK                | 74.00          | -10.43      | 1.15 V             | 342                  | 31.55            | 32.02                    |
| 2                                                   | 2322.00     | 52.83 AV                | 54.00          | -1.17       | 1.15 V             | 342                  | 20.81            | 32.02                    |
| 3                                                   | *2462.00    | 111.53 PK               |                |             | 1.14 V             | 335                  | 78.95            | 32.58                    |
| 4                                                   | *2462.00    | 106.58 AV               |                |             | 1.14 V             | 335                  | 74.00            | 32.58                    |
| 5                                                   | 2487.00     | 64.53 PK                | 74.00          | -9.47       | 1.16 V             | 335                  | 31.85            | 32.68                    |
| 6                                                   | 2487.00     | 52.90 AV                | 54.00          | -1.10       | 1.16 V             | 335                  | 20.22            | 32.68                    |
| 7                                                   | 4924.00     | 51.55 PK                | 74.00          | -22.45      | 1.43 V             | 39                   | 12.76            | 38.79                    |
| 8                                                   | 4924.00     | 47.30 AV                | 54.00          | -6.70       | 1.43 V             | 39                   | 8.51             | 38.79                    |

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.

### 802.11g OFDM MODULATION (NORMAL MODE)

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 1                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2324.00     | 59.01 PK                | 74.00          | -14.99      | 1.49 H             | 31                   | 26.98            | 32.03                    |
| 2                                                   | 2324.00     | 48.66 AV                | 54.00          | -5.34       | 1.49 H             | 31                   | 16.63            | 32.03                    |
| 3                                                   | 2390.00     | 62.41 PK                | 74.00          | -11.59      | 1.46 H             | 265                  | 30.12            | 32.29                    |
| 4                                                   | 2390.00     | 49.62 AV                | 54.00          | -4.38       | 1.46 H             | 265                  | 17.33            | 32.29                    |
| 5                                                   | *2412.00    | 108.94 PK               |                |             | 1.46 H             | 265                  | 76.56            | 32.38                    |
| 6                                                   | *2412.00    | 98.34 AV                |                |             | 1.46 H             | 265                  | 65.96            | 32.38                    |
| 7                                                   | 4824.00     | 46.55 PK                | 74.00          | -27.45      | 1.08 H             | 81                   | 7.98             | 38.56                    |
| 8                                                   | 4824.00     | 35.25 AV                | 54.00          | -18.75      | 1.08 H             | 81                   | -3.32            | 38.56                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2324.00     | 61.92 PK                | 74.00          | -12.08      | 1.20 V             | 341                  | 29.89            | 32.03                    |
| 2                                                   | 2324.00     | 51.40 AV                | 54.00          | -2.60       | 1.20 V             | 341                  | 19.37            | 32.03                    |
| 3                                                   | 2390.00     | 67.53 PK                | 74.00          | -6.47       | 1.42 V             | 57                   | 35.24            | 32.29                    |
| 4                                                   | 2390.00     | 52.74 AV                | 54.00          | -1.26       | 1.42 V             | 57                   | 20.45            | 32.29                    |
| 5                                                   | *2412.00    | 110.52 PK               |                |             | 1.42 V             | 57                   | 78.14            | 32.38                    |
| 6                                                   | *2412.00    | 99.43 AV                |                |             | 1.42 V             | 57                   | 67.05            | 32.38                    |
| 7                                                   | 4824.00     | 48.44 PK                | 74.00          | -25.56      | 1.22 V             | 168                  | 9.87             | 38.56                    |
| 8                                                   | 4824.00     | 36.68 AV                | 54.00          | -17.32      | 1.22 V             | 168                  | -1.89            | 38.56                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 61.35 PK                | 74.00          | -12.65      | 1.50 H             | 33                   | 29.33            | 32.02                    |
| 2                                                   | 2322.00     | 49.88 AV                | 54.00          | -4.12       | 1.50 H             | 33                   | 17.86            | 32.02                    |
| 3                                                   | *2437.00    | 111.83 PK               |                |             | 1.36 H             | 52                   | 79.35            | 32.48                    |
| 4                                                   | *2437.00    | 100.20 AV               |                |             | 1.36 H             | 52                   | 67.72            | 32.48                    |
| 5                                                   | 4974.00     | 46.70 PK                | 74.00          | -27.30      | 1.05 H             | 46                   | 7.80             | 38.90                    |
| 6                                                   | 4974.00     | 35.61 AV                | 54.00          | -18.39      | 1.05 H             | 46                   | -3.29            | 38.90                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 63.14 PK                | 74.00          | -10.86      | 1.21 V             | 342                  | 31.12            | 32.02                    |
| 2                                                   | 2322.00     | 52.37 AV                | 54.00          | -1.63       | 1.21 V             | 342                  | 20.35            | 32.02                    |
| 3                                                   | *2437.00    | 112.46 PK               |                |             | 1.21 V             | 350                  | 79.98            | 32.48                    |
| 4                                                   | *2437.00    | 101.09 AV               |                |             | 1.21 V             | 350                  | 68.61            | 32.48                    |
| 5                                                   | 4874.00     | 49.47 PK                | 74.00          | -24.53      | 1.19 V             | 154                  | 10.79            | 38.67                    |
| 6                                                   | 4874.00     | 37.60 AV                | 54.00          | -16.40      | 1.19 V             | 154                  | -1.08            | 38.67                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 11                 | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 61.10 PK                | 74.00          | -12.90      | 1.22 H             | 254                  | 29.08            | 32.02                    |
| 2                                                   | 2322.00     | 50.54 AV                | 54.00          | -3.46       | 1.22 H             | 254                  | 18.52            | 32.02                    |
| 3                                                   | 2360.00     | 62.12 PK                | 74.00          | -11.88      | 1.22 H             | 254                  | 29.95            | 32.17                    |
| 4                                                   | 2360.00     | 51.57 AV                | 54.00          | -2.43       | 1.22 H             | 254                  | 19.40            | 32.17                    |
| 5                                                   | *2462.00    | 108.91 PK               |                |             | 1.36 H             | 52                   | 76.33            | 32.58                    |
| 6                                                   | *2462.00    | 97.40 AV                |                |             | 1.36 H             | 52                   | 64.82            | 32.58                    |
| 7                                                   | 2483.50     | 61.60 PK                | 74.00          | -12.40      | 1.36 H             | 52                   | 28.94            | 32.66                    |
| 8                                                   | 2483.50     | 49.78 AV                | 54.00          | -4.22       | 1.36 H             | 52                   | 17.12            | 32.66                    |
| 9                                                   | 4924.00     | 46.62 PK                | 74.00          | -27.38      | 1.14 H             | 66                   | 7.83             | 38.79                    |
| 10                                                  | 4924.00     | 35.50 AV                | 54.00          | -18.50      | 1.14 H             | 66                   | -3.29            | 38.79                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 63.10 PK                | 74.00          | -10.90      | 1.00 V             | 343                  | 31.08            | 32.02                    |
| 2                                                   | 2322.00     | 52.63 AV                | 54.00          | -1.37       | 1.00 V             | 343                  | 20.61            | 32.02                    |
| 3                                                   | 2360.00     | 63.71 PK                | 74.00          | -10.29      | 1.00 V             | 343                  | 31.54            | 32.17                    |
| 4                                                   | 2360.00     | 52.96 AV                | 54.00          | -1.04       | 1.00 V             | 343                  | 20.79            | 32.17                    |
| 5                                                   | *2462.00    | 110.18 PK               |                |             | 1.38 V             | 136                  | 77.60            | 32.58                    |
| 6                                                   | *2462.00    | 98.65 AV                |                |             | 1.38 V             | 136                  | 66.07            | 32.58                    |
| 7                                                   | 4924.00     | 48.99 PK                | 74.00          | -25.01      | 1.24 V             | 152                  | 10.20            | 38.79                    |
| 8                                                   | 4924.00     | 37.61 AV                | 54.00          | -16.39      | 1.24 V             | 152                  | -1.18            | 38.79                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.



A D T

**802.11g OFDM MODULATION (TURBO MODE)**

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2322.00     | 60.12 PK                | 74.00          | -13.88      | 1.25 H             | 219                  | 28.10            | 32.02                    |
| 2                                                   | 2322.00     | 51.06 AV                | 54.00          | -2.94       | 1.25 H             | 219                  | 19.04            | 32.02                    |
| 3                                                   | 2360.00     | 60.54 PK                | 74.00          | -13.46      | 1.25 H             | 219                  | 28.37            | 32.17                    |
| 4                                                   | 2360.00     | 51.28 AV                | 54.00          | -2.72       | 1.25 H             | 219                  | 19.11            | 32.17                    |
| 5                                                   | *2437.00    | 106.72 PK               |                |             | 1.39 H             | 52                   | 74.24            | 32.48                    |
| 6                                                   | *2437.00    | 96.04 AV                |                |             | 1.39 H             | 52                   | 63.56            | 32.48                    |
| 7                                                   | 2483.50     | 59.63 PK                | 74.00          | -14.37      | 1.39 H             | 52                   | 26.97            | 32.66                    |
| 8                                                   | 2483.50     | 48.31 AV                | 54.00          | -5.69       | 1.39 H             | 52                   | 15.65            | 32.66                    |
| 9                                                   | 4874.00     | 46.47 PK                | 74.00          | -27.53      | 1.22 H             | 103                  | 7.79             | 38.67                    |
| 10                                                  | 4874.00     | 34.91 AV                | 54.00          | -19.09      | 1.22 H             | 103                  | -3.77            | 38.67                    |

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 2322.00     | 62.44 PK                | 74.00          | -11.56      | 1.20 V             | 342                  | 30.42            | 32.02                    |
| 2                                                 | 2322.00     | 52.88 AV                | 54.00          | -1.12       | 1.20 V             | 342                  | 20.86            | 32.02                    |
| 3                                                 | 2360.00     | 62.61 PK                | 74.00          | -11.39      | 1.25 V             | 310                  | 30.44            | 32.17                    |
| 4                                                 | 2360.00     | 52.59 AV                | 54.00          | -1.41       | 1.25 V             | 310                  | 20.42            | 32.17                    |
| 5                                                 | *2437.00    | 107.25 PK               |                |             | 1.40 V             | 56                   | 74.77            | 32.48                    |
| 6                                                 | *2437.00    | 97.20 AV                |                |             | 1.40 V             | 56                   | 64.72            | 32.48                    |
| 7                                                 | 2483.50     | 63.09 PK                | 74.00          | -10.91      | 1.40 V             | 56                   | 30.43            | 32.66                    |
| 8                                                 | 2483.50     | 48.98 AV                | 54.00          | -5.02       | 1.40 V             | 56                   | 16.32            | 32.66                    |
| 9                                                 | 4874.00     | 48.24 PK                | 74.00          | -25.76      | 1.28 V             | 156                  | 9.56             | 38.67                    |
| 10                                                | 4874.00     | 36.50 AV                | 54.00          | -17.50      | 1.28 V             | 156                  | -2.18            | 38.67                    |

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.



A D T

**BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION (NORMAL MODE)**

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6                 | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER              | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | A                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 109.62      | 34.91 QP                | 43.50          | -8.59       | 1.50 H             | 199                  | 23.44            | 11.47                    |
| 2                                                   | 249.60      | 43.73 QP                | 46.00          | -2.27       | 1.00 H             | 94                   | 29.93            | 13.80                    |
| 3                                                   | 440.14      | 38.76 QP                | 46.00          | -7.24       | 2.00 H             | 322                  | 19.70            | 19.06                    |
| 4                                                   | 500.42      | 40.74 QP                | 46.00          | -5.26       | 1.50 H             | 196                  | 20.31            | 20.44                    |
| 5                                                   | 659.85      | 39.08 QP                | 46.00          | -6.92       | 1.00 H             | 193                  | 15.04            | 24.04                    |
| 6                                                   | 770.67      | 40.87 QP                | 46.00          | -5.13       | 1.75 H             | 142                  | 15.16            | 25.71                    |
| 7                                                   | 881.50      | 44.87 QP                | 46.00          | -1.13       | 1.25 H             | 190                  | 17.33            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 51.29       | 34.34 QP                | 40.00          | -5.66       | 1.00 V             | 355                  | 21.19            | 13.16                    |
| 2                                                   | 109.62      | 38.12 QP                | 43.50          | -5.38       | 1.25 V             | 76                   | 26.65            | 11.47                    |
| 3                                                   | 132.95      | 38.12 QP                | 43.50          | -5.38       | 1.00 V             | 10                   | 25.76            | 12.36                    |
| 4                                                   | 500.42      | 43.26 QP                | 46.00          | -2.74       | 1.25 V             | 22                   | 22.83            | 20.44                    |
| 5                                                   | 770.67      | 40.77 QP                | 46.00          | -5.23       | 1.00 V             | 91                   | 15.06            | 25.71                    |
| 6                                                   | 881.50      | 41.27 QP                | 46.00          | -4.73       | 1.00 V             | 133                  | 13.72            | 27.54                    |

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6                 | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER (SYSTEM)     | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | B                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 329.32      | 36.72 QP                | 46.00          | -9.28       | 1.00 H             | 340                  | 21.69            | 15.03                    |
| 2                                                   | 440.14      | 39.66 QP                | 46.00          | -6.34       | 1.75 H             | 319                  | 20.60            | 19.06                    |
| 3                                                   | 500.42      | 41.06 QP                | 46.00          | -4.94       | 1.25 H             | 247                  | 20.62            | 20.44                    |
| 4                                                   | 659.85      | 38.23 QP                | 46.00          | -7.77       | 1.00 H             | 181                  | 14.19            | 24.04                    |
| 5                                                   | 770.67      | 39.99 QP                | 46.00          | -6.01       | 1.50 H             | 217                  | 14.27            | 25.71                    |
| 6                                                   | 881.50      | 44.84 QP                | 46.00          | -1.16       | 1.25 H             | 199                  | 17.30            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 41.57       | 33.99 QP                | 40.00          | -6.01       | 1.00 V             | 316                  | 19.12            | 14.87                    |
| 2                                                   | 109.62      | 36.78 QP                | 43.50          | -6.72       | 1.25 V             | 46                   | 25.31            | 11.47                    |
| 3                                                   | 132.95      | 37.38 QP                | 43.50          | -6.12       | 1.00 V             | 346                  | 25.03            | 12.36                    |
| 4                                                   | 500.42      | 41.67 QP                | 46.00          | -4.33       | 1.00 V             | 10                   | 21.23            | 20.44                    |
| 5                                                   | 770.67      | 41.19 QP                | 46.00          | -4.81       | 1.00 V             | 163                  | 15.48            | 25.71                    |
| 6                                                   | 881.50      | 40.68 QP                | 46.00          | -5.32       | 1.00 V             | 217                  | 13.13            | 27.54                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

# 802.11g OFDM MODULATION (TURBO MODE)

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6                 | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER              | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | A                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 249.60      | 43.74 QP                | 46.00          | -2.26       | 1.00 H             | 106                  | 29.94            | 13.80                    |
| 2                                                   | 440.14      | 39.31 QP                | 46.00          | -6.69       | 1.75 H             | 316                  | 20.26            | 19.06                    |
| 3                                                   | 500.42      | 40.45 QP                | 46.00          | -5.55       | 1.25 H             | 202                  | 20.01            | 20.44                    |
| 4                                                   | 659.85      | 39.60 QP                | 46.00          | -6.40       | 1.00 H             | 187                  | 15.56            | 24.04                    |
| 5                                                   | 770.67      | 44.24 QP                | 46.00          | -1.76       | 1.00 H             | 163                  | 18.52            | 25.71                    |
| 6                                                   | 881.50      | 44.51 QP                | 46.00          | -1.49       | 1.25 H             | 172                  | 16.97            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 49.34       | 33.56 QP                | 40.00          | -6.44       | 1.00 V             | 352                  | 20.22            | 13.34                    |
| 2                                                   | 109.62      | 37.32 QP                | 43.50          | -6.18       | 1.00 V             | 94                   | 25.85            | 11.47                    |
| 3                                                   | 132.95      | 36.83 QP                | 43.50          | -6.67       | 1.00 V             | 322                  | 24.47            | 12.36                    |
| 4                                                   | 249.60      | 39.58 QP                | 46.00          | -6.42       | 1.75 V             | 139                  | 25.78            | 13.80                    |
| 5                                                   | 500.42      | 43.45 QP                | 46.00          | -2.55       | 1.00 V             | 10                   | 23.02            | 20.44                    |
| 6                                                   | 770.67      | 41.55 QP                | 46.00          | -4.45       | 1.00 V             | 109                  | 15.84            | 25.71                    |
| 7                                                   | 881.50      | 39.87 QP                | 46.00          | -6.13       | 1.00 V             | 151                  | 12.33            | 27.54                    |
| 8                                                   | 914.55      | 42.50 QP                | 46.00          | -3.50       | 1.25 V             | 67                   | 14.41            | 28.10                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6                 | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER (SYSTEM)     | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | B                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 249.60      | 35.27 QP                | 46.00          | -10.73      | 1.00 H             | 280                  | 21.47            | 13.80                    |
| 2                                                   | 329.32      | 36.79 QP                | 46.00          | -9.21       | 1.00 H             | 10                   | 21.76            | 15.03                    |
| 3                                                   | 500.42      | 41.37 QP                | 46.00          | -4.63       | 1.25 H             | 244                  | 20.93            | 20.44                    |
| 4                                                   | 659.85      | 38.87 QP                | 46.00          | -7.13       | 1.00 H             | 169                  | 14.83            | 24.04                    |
| 5                                                   | 770.67      | 39.83 QP                | 46.00          | -6.17       | 1.00 H             | 349                  | 14.11            | 25.71                    |
| 6                                                   | 881.50      | 44.84 QP                | 46.00          | -1.16       | 1.25 H             | 178                  | 17.29            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 109.62      | 37.77 QP                | 43.50          | -5.73       | 1.00 V             | 103                  | 26.30            | 11.47                    |
| 2                                                   | 132.95      | 37.69 QP                | 43.50          | -5.81       | 1.25 V             | 70                   | 25.33            | 12.36                    |
| 3                                                   | 500.42      | 42.36 QP                | 46.00          | -3.64       | 1.00 V             | 10                   | 21.92            | 20.44                    |
| 4                                                   | 624.85      | 35.75 QP                | 46.00          | -10.25      | 1.25 V             | 193                  | 12.66            | 23.09                    |
| 5                                                   | 770.67      | 40.24 QP                | 46.00          | -5.76       | 1.00 V             | 232                  | 14.52            | 25.71                    |
| 6                                                   | 836.78      | 43.33 QP                | 46.00          | -2.67       | 1.25 V             | 91                   | 16.65            | 26.69                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15 ~ 0.5                  | 66 to 56                     | 56 to 46 |
| 0.5 ~ 5                     | 56                           | 46       |
| 5 ~ 30                      | 60                           | 50       |

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER       | MODEL NO.           | SERIAL NO.     | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------------|---------------------|----------------|---------------------|-------------------------|
| Test Receiver<br>ROHDE & SCHWARZ | ESCS30              | 100291         | Nov. 19, 2008       | Nov. 18, 2009           |
| RF signal cable<br>Woken         | 5D-FB               | Cable-HYC01-01 | Dec. 31, 2008       | Dec. 30, 2009           |
| LISN<br>ROHDE & SCHWARZ          | ESH3-Z5             | 100312         | Jun. 13, 2008       | Jun. 12, 2009           |
| LISN<br>ROHDE & SCHWARZ          | ESH2-Z5             | 100104         | Dec. 04, 2008       | Dec. 03, 2009           |
| Software<br>ADT                  | ADT_Cond_<br>V7.3.7 | NA             | NA                  | NA                      |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

#### 4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

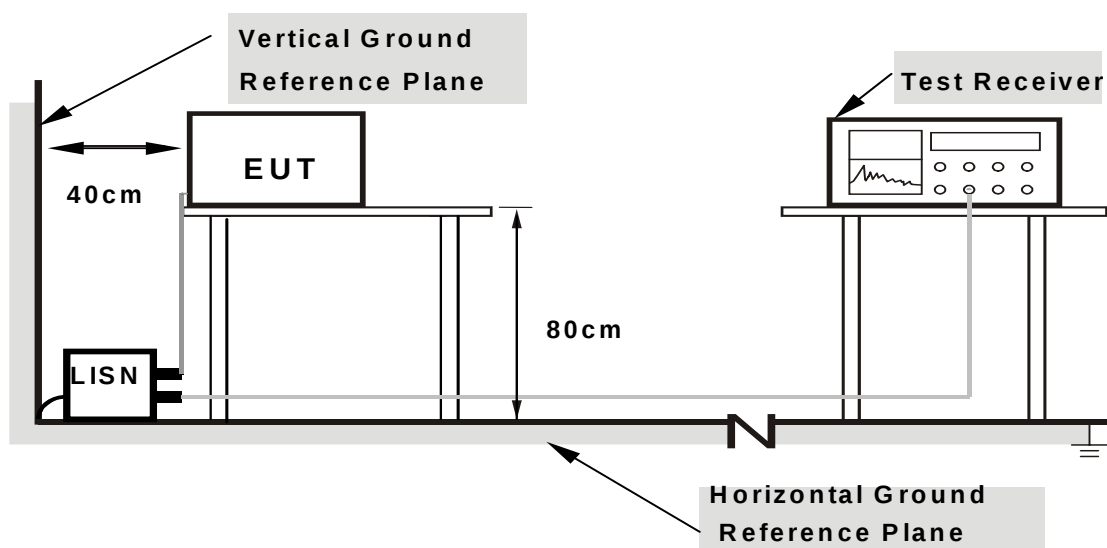

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


## 4.2.7 TEST RESULTS

### CONDUCTED WORST-CASE DATA: 802.11g OFDM MODULATION (NORMAL MODE)

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE              | Line 1        |
| MODULATION TYPE          | BPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiu               |                    |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
|    |                |                         |                            |     |                             |     |                    |       |                |     |
| 1  | 0.154          | 0.13                    | 41.34                      | -   | 41.47                       | -   | 65.79              | 55.79 | -24.32         | -   |
| 2  | 0.170          | 0.13                    | 38.96                      | -   | 39.09                       | -   | 64.98              | 54.98 | -25.89         | -   |
| 3  | 0.197          | 0.13                    | 36.32                      | -   | 36.45                       | -   | 63.74              | 53.74 | -27.29         | -   |
| 4  | 0.431          | 0.14                    | 30.56                      | -   | 30.70                       | -   | 57.23              | 47.23 | -26.53         | -   |
| 5  | 3.598          | 0.34                    | 26.23                      | -   | 26.57                       | -   | 56.00              | 46.00 | -29.43         | -   |
| 6  | 23.742         | 1.20                    | 17.87                      | -   | 19.07                       | -   | 60.00              | 50.00 | -40.93         | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

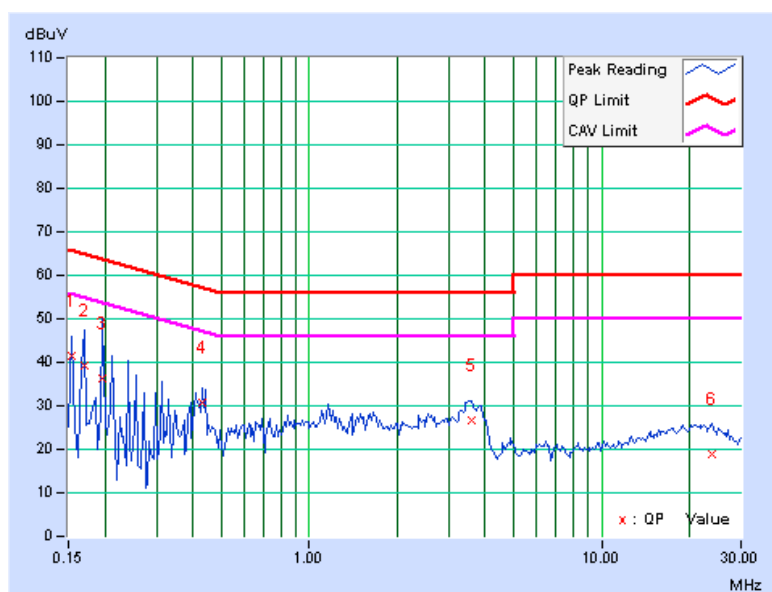

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE              | Line 2        |
| MODULATION TYPE          | BPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiu               |                    |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
| 1  | 0.154          | 0.14                    | 41.74                      | -   | 41.88                       | -   | 65.79              | 55.79 | -23.91         | -   |
| 2  | 0.205          | 0.15                    | 35.19                      | -   | 35.34                       | -   | 63.42              | 53.42 | -28.08         | -   |
| 3  | 0.298          | 0.15                    | 27.48                      | -   | 27.63                       | -   | 60.29              | 50.29 | -32.65         | -   |
| 4  | 0.423          | 0.16                    | 32.61                      | -   | 32.77                       | -   | 57.38              | 47.38 | -24.61         | -   |
| 5  | 3.809          | 0.38                    | 26.47                      | -   | 26.85                       | -   | 56.00              | 46.00 | -29.15         | -   |
| 6  | 19.832         | 0.97                    | 17.81                      | -   | 18.78                       | -   | 60.00              | 50.00 | -41.22         | -   |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

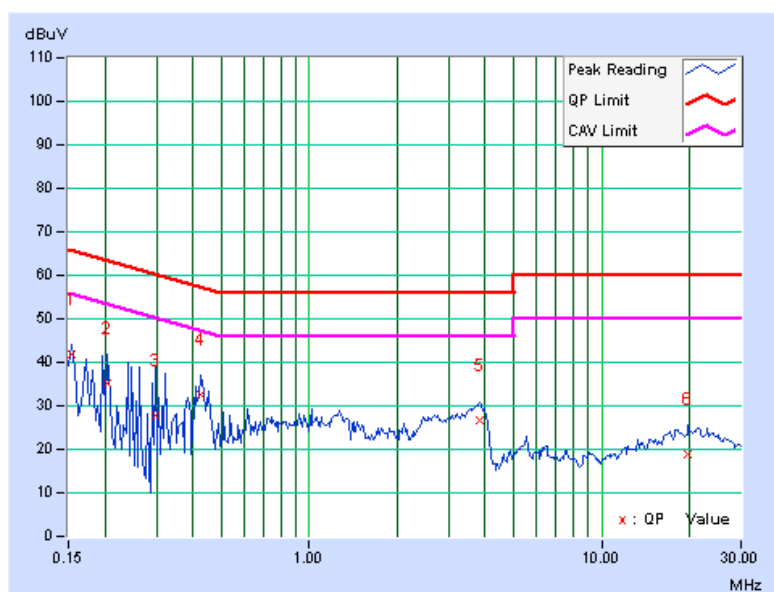

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE                | Line 1        |
| MODULATION TYPE          | BPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiu               |                      |               |

| No | Freq.  | Corr. | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|-------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |        |       | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)  | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.158  | 0.13  | 29.31         | -   | 29.44          | -   | 65.58     | 55.58 | -36.14 | -   |
| 2  | 0.271  | 0.13  | 35.07         | -   | 35.20          | -   | 61.08     | 51.08 | -25.88 | -   |
| 3  | 0.537  | 0.15  | 26.65         | -   | 26.80          | -   | 56.00     | 46.00 | -29.20 | -   |
| 4  | 1.133  | 0.19  | 24.67         | -   | 24.86          | -   | 56.00     | 46.00 | -31.14 | -   |
| 5  | 2.680  | 0.28  | 25.56         | -   | 25.84          | -   | 56.00     | 46.00 | -30.16 | -   |
| 6  | 10.262 | 0.67  | 26.97         | -   | 27.64          | -   | 60.00     | 50.00 | -32.36 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

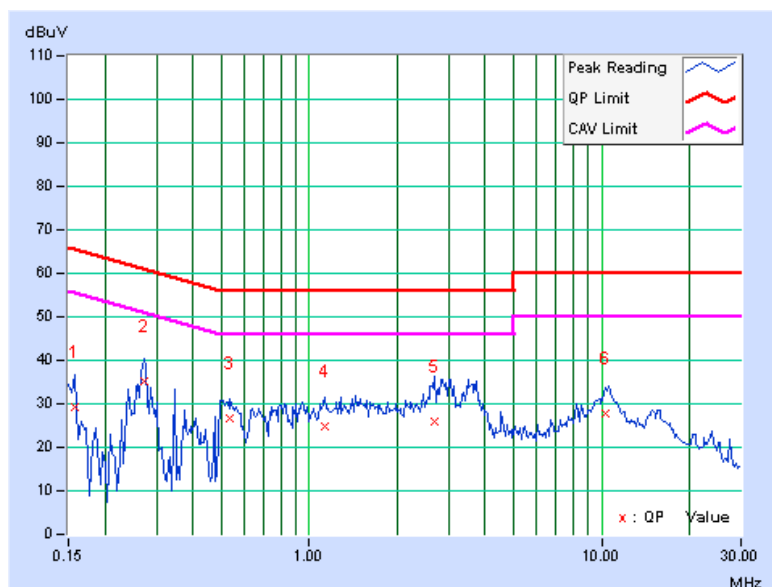

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE                | Line 2        |
| MODULATION TYPE          | BPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiu               |                      |               |

| No | Freq.  | Corr. | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|-------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |        |       | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)  | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.259  | 0.15  | 33.45         | -   | 33.60          | -   | 61.45     | 51.45 | -27.85 | -   |
| 2  | 0.392  | 0.16  | 26.99         | -   | 27.15          | -   | 58.02     | 48.02 | -30.87 | -   |
| 3  | 0.986  | 0.20  | 15.94         | -   | 16.14          | -   | 56.00     | 46.00 | -39.86 | -   |
| 4  | 3.020  | 0.32  | 30.93         | -   | 31.25          | -   | 56.00     | 46.00 | -24.75 | -   |
| 5  | 10.730 | 0.68  | 27.79         | -   | 28.47          | -   | 60.00     | 50.00 | -31.53 | -   |
| 6  | 20.629 | 0.97  | 24.92         | -   | 25.89          | -   | 60.00     | 50.00 | -34.11 | -   |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

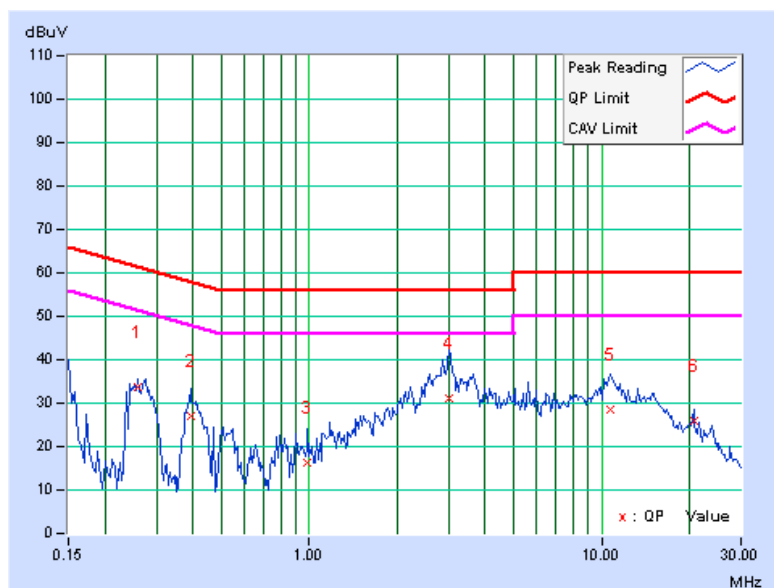


# 802.11g OFDM MODULATION (TURBO MODE)

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE              | Line 1        |
| MODULATION TYPE          | QPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiu               |                    |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
| 1  | 0.162          | 0.13                    | 40.37                      | -   | 40.50                       | -   | 65.38              | 55.38 | -24.88         | -   |
| 2  | 0.181          | 0.13                    | 37.75                      | -   | 37.88                       | -   | 64.43              | 54.43 | -26.55         | -   |
| 3  | 0.220          | 0.13                    | 34.07                      | -   | 34.20                       | -   | 62.81              | 52.81 | -28.61         | -   |
| 4  | 0.420          | 0.14                    | 29.55                      | -   | 29.69                       | -   | 57.46              | 47.46 | -27.77         | -   |
| 5  | 3.504          | 0.34                    | 26.12                      | -   | 26.46                       | -   | 56.00              | 46.00 | -29.54         | -   |
| 6  | 18.680         | 1.09                    | 18.57                      | -   | 19.66                       | -   | 60.00              | 50.00 | -40.34         | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

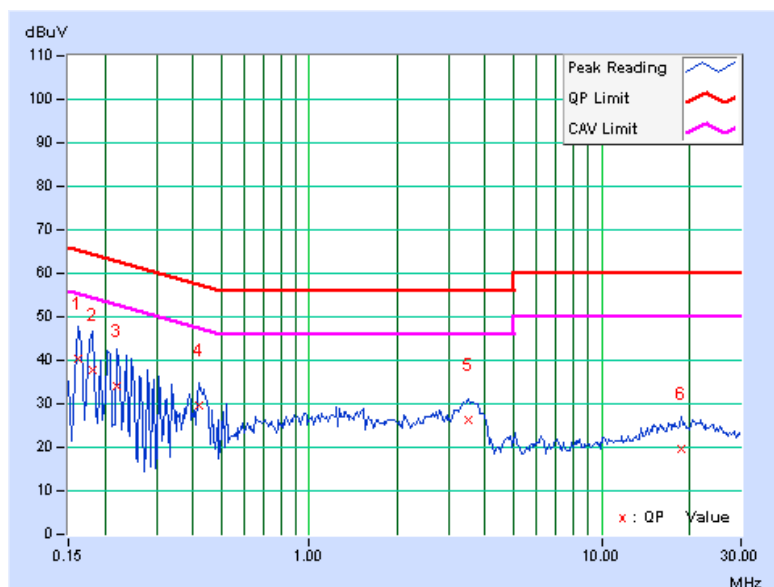

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE              | Line 2        |
| MODULATION TYPE          | QPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiu               |                    |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
| 1  | 0.158          | 0.14                    | 41.60                      | -   | 41.74                       | -   | 65.58              | 55.58 | -23.84         | -   |
| 2  | 0.181          | 0.15                    | 38.41                      | -   | 38.56                       | -   | 64.43              | 54.43 | -25.87         | -   |
| 3  | 0.209          | 0.15                    | 35.09                      | -   | 35.24                       | -   | 63.26              | 53.26 | -28.02         | -   |
| 4  | 0.420          | 0.16                    | 32.89                      | -   | 33.05                       | -   | 57.46              | 47.46 | -24.41         | -   |
| 5  | 3.688          | 0.37                    | 26.26                      | -   | 26.63                       | -   | 56.00              | 46.00 | -29.37         | -   |
| 6  | 21.453         | 0.95                    | 17.93                      | -   | 18.88                       | -   | 60.00              | 50.00 | -41.12         | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

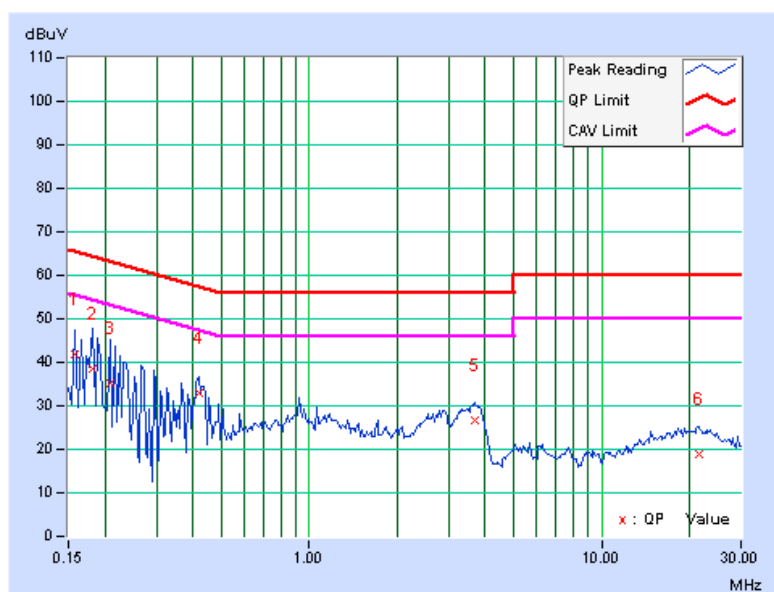

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE                | Line 1        |
| MODULATION TYPE          | QPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiu               |                      |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
| 1  | 0.150          | 0.13                    | 36.71                      | -   | 36.84                       | -   | 66.00              | 56.00 | -29.16         | -   |
| 2  | 0.263          | 0.13                    | 36.00                      | -   | 36.13                       | -   | 61.33              | 51.33 | -25.19         | -   |
| 3  | 2.988          | 0.30                    | 29.28                      | -   | 29.58                       | -   | 56.00              | 46.00 | -26.42         | -   |
| 4  | 3.727          | 0.35                    | 27.78                      | -   | 28.13                       | -   | 56.00              | 46.00 | -27.87         | -   |
| 5  | 10.492         | 0.68                    | 27.29                      | -   | 27.97                       | -   | 60.00              | 50.00 | -32.03         | -   |
| 6  | 20.629         | 1.16                    | 24.79                      | -   | 25.95                       | -   | 60.00              | 50.00 | -34.05         | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

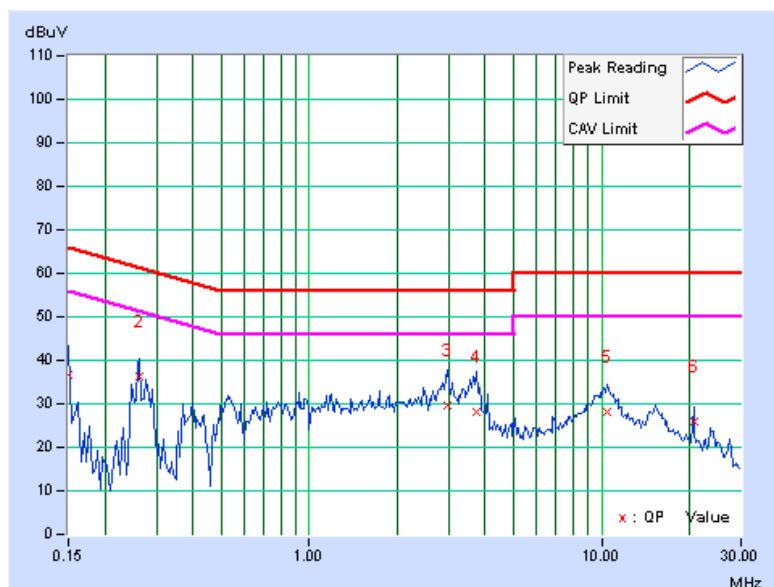

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 6               | PHASE                | Line 2        |
| MODULATION TYPE          | QPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiu               |                      |               |

| No | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.259  | 0.15   | 31.82         | -   | 31.97          | -   | 61.45     | 51.45 | -29.48 | -   |
| 2  | 0.400  | 0.16   | 26.83         | -   | 26.99          | -   | 57.85     | 47.85 | -30.86 | -   |
| 3  | 0.537  | 0.17   | 18.62         | -   | 18.79          | -   | 56.00     | 46.00 | -37.21 | -   |
| 4  | 2.875  | 0.31   | 30.79         | -   | 31.10          | -   | 56.00     | 46.00 | -24.90 | -   |
| 5  | 10.098 | 0.66   | 27.71         | -   | 28.37          | -   | 60.00     | 50.00 | -31.63 | -   |
| 6  | 20.625 | 0.97   | 15.02         | -   | 15.99          | -   | 60.00     | 50.00 | -44.01 | -   |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

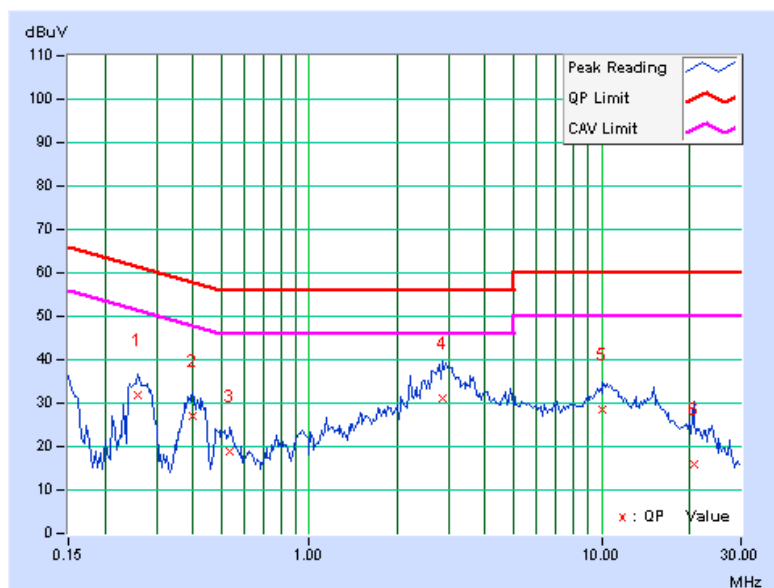

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|-----------|------------|---------------------|-------------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100040     | Jul. 04, 2008       | Jul. 03, 2009           |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

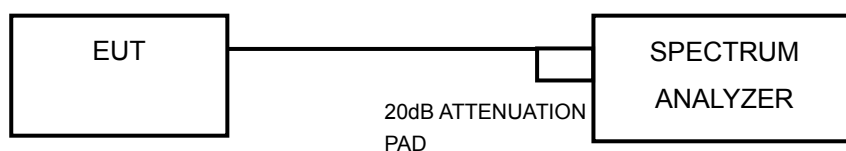

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


### 4.3.7 TEST RESULTS

#### 802.11b DSSS MODULATION (NORMAL MODE):

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | DBPSK        | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1       | 2412                    | 12.10               | 0.5                 | PASS        |
| 6       | 2437                    | 12.60               | 0.5                 | PASS        |
| 11      | 2462                    | 11.17               | 0.5                 | PASS        |


#### CH 1

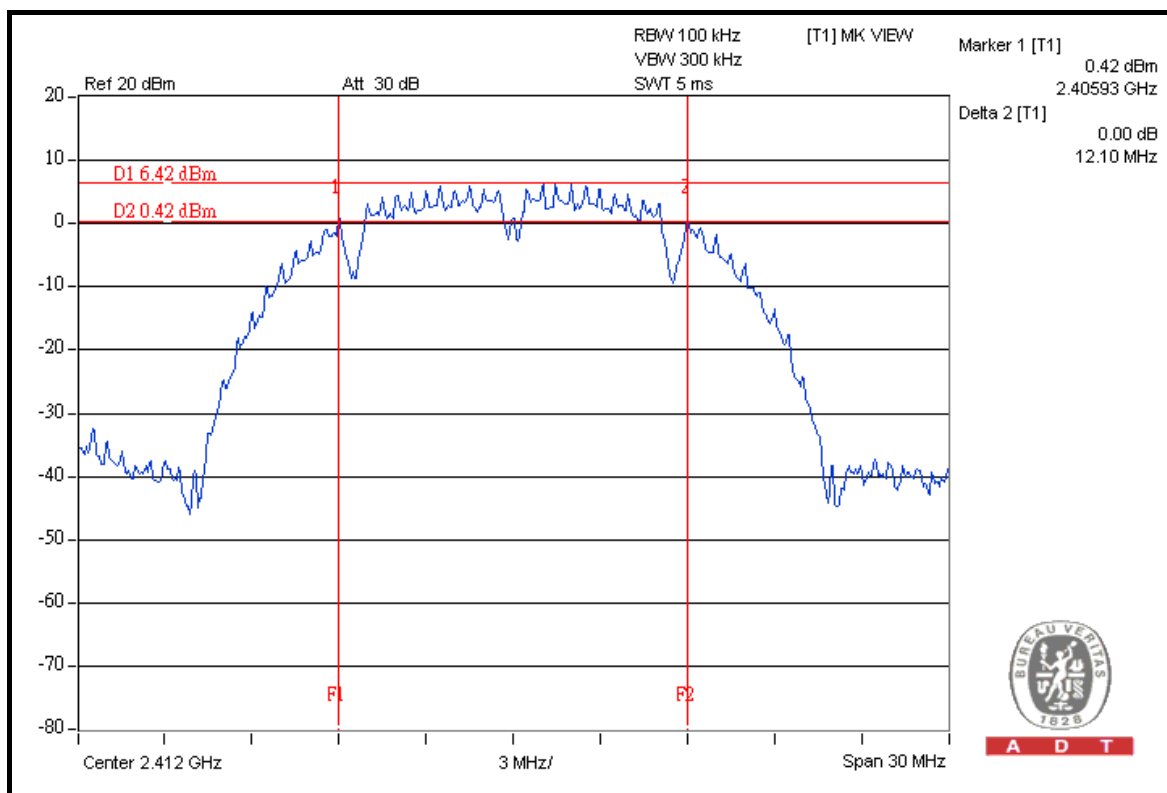




A D T

## CH 6

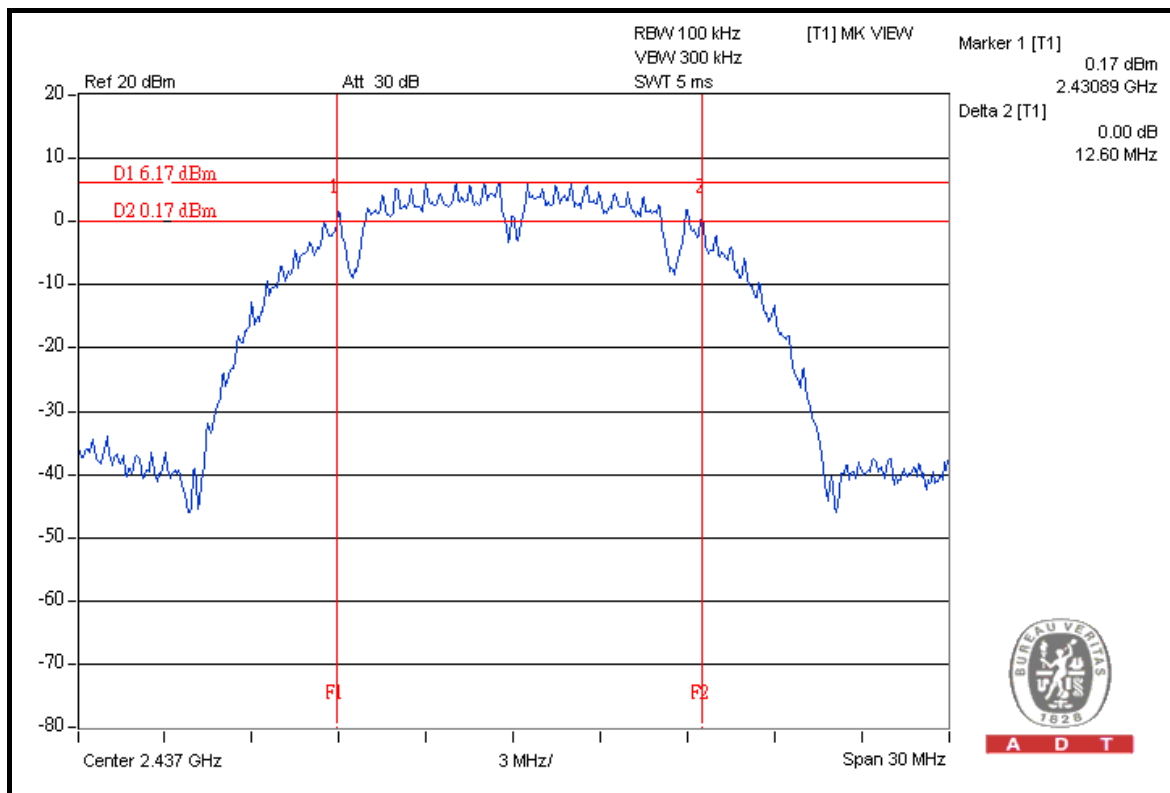

A D T

## CH 11

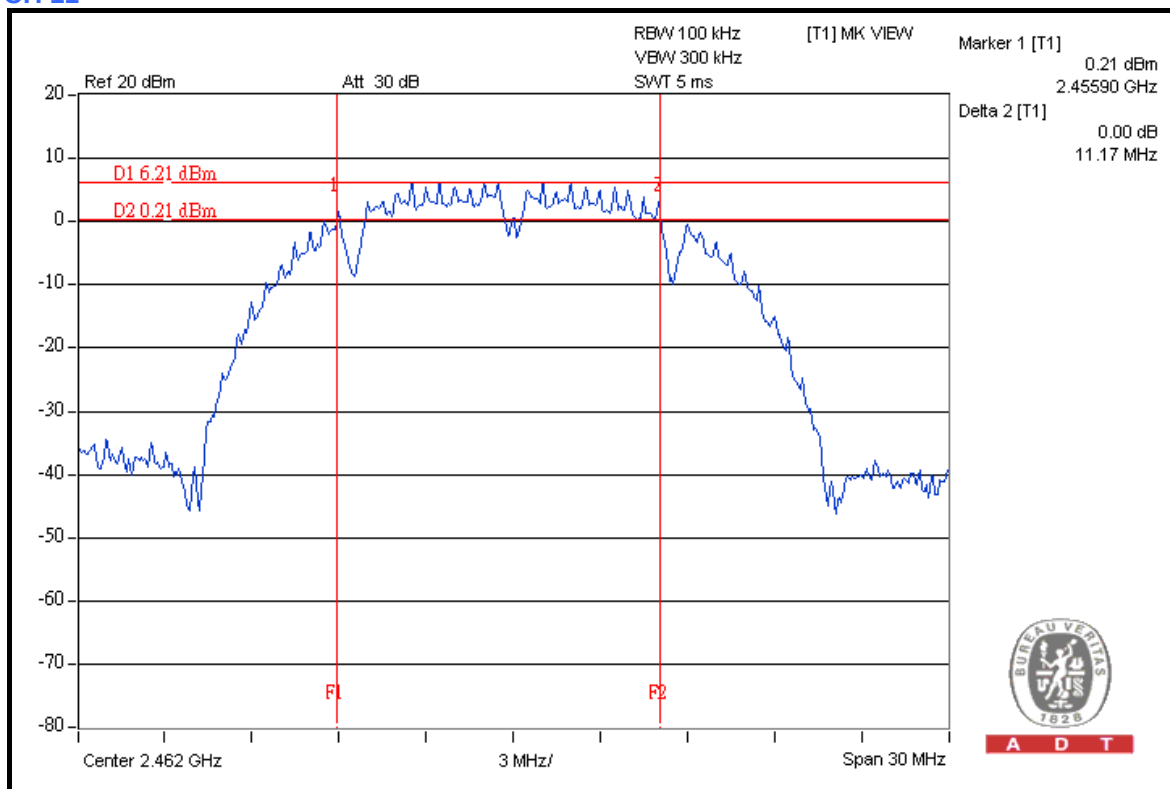

A D T

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | BPSK         | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |

| CHANNEL | CHANNEL<br>FREQUENCY<br>(MHz) | 6dB<br>BANDWIDTH<br>(MHz) | MINIMUM LIMIT<br>(MHz) | PASS / FAIL |
|---------|-------------------------------|---------------------------|------------------------|-------------|
| 1       | 2412                          | 16.45                     | 0.5                    | PASS        |
| 6       | 2437                          | 16.44                     | 0.5                    | PASS        |
| 11      | 2462                          | 16.51                     | 0.5                    | PASS        |

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms [T1] MK VIEW

Marker 1 [T1] -4.68 dBm 2.40374 GHz

Delta 2 [T1] 0.00 dB 16.45 MHz

D1 1.32 dBm D2 -4.68 dBm


Center 2.412 GHz 3 MHz/ Span 30 MHz

A D T




A D T

## CH 6

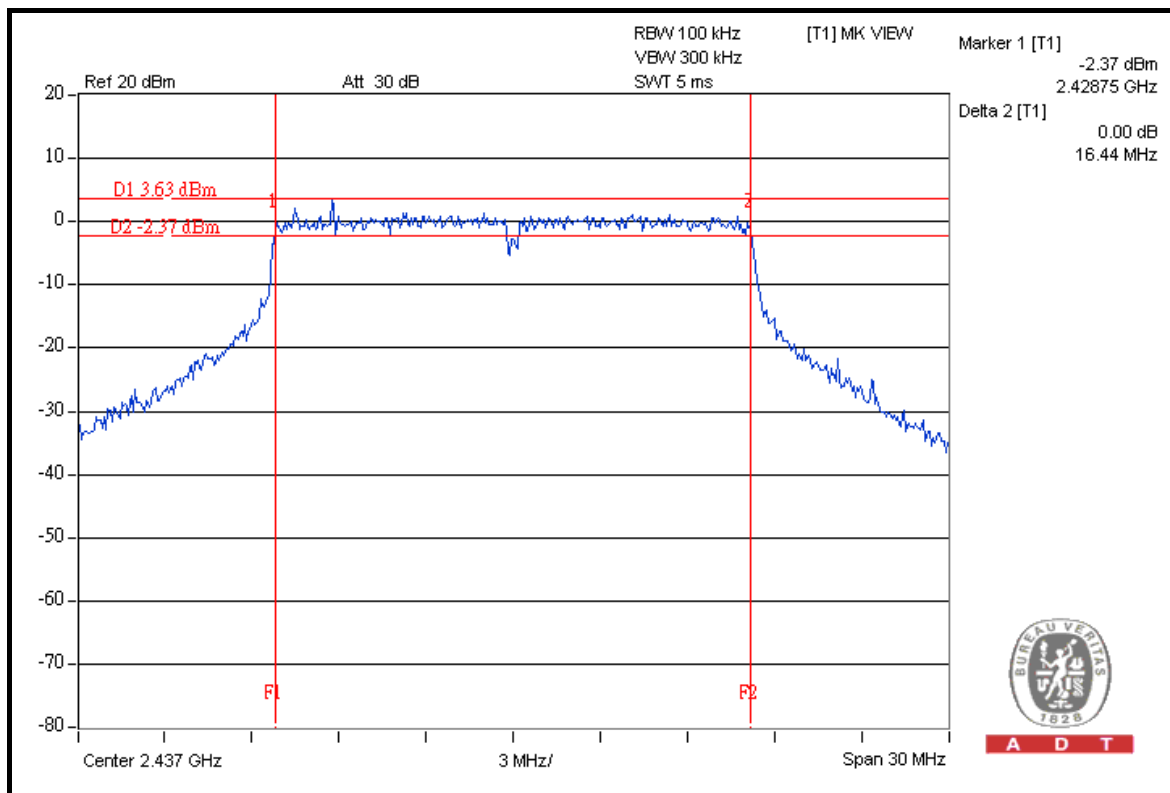

A D T

## CH 11

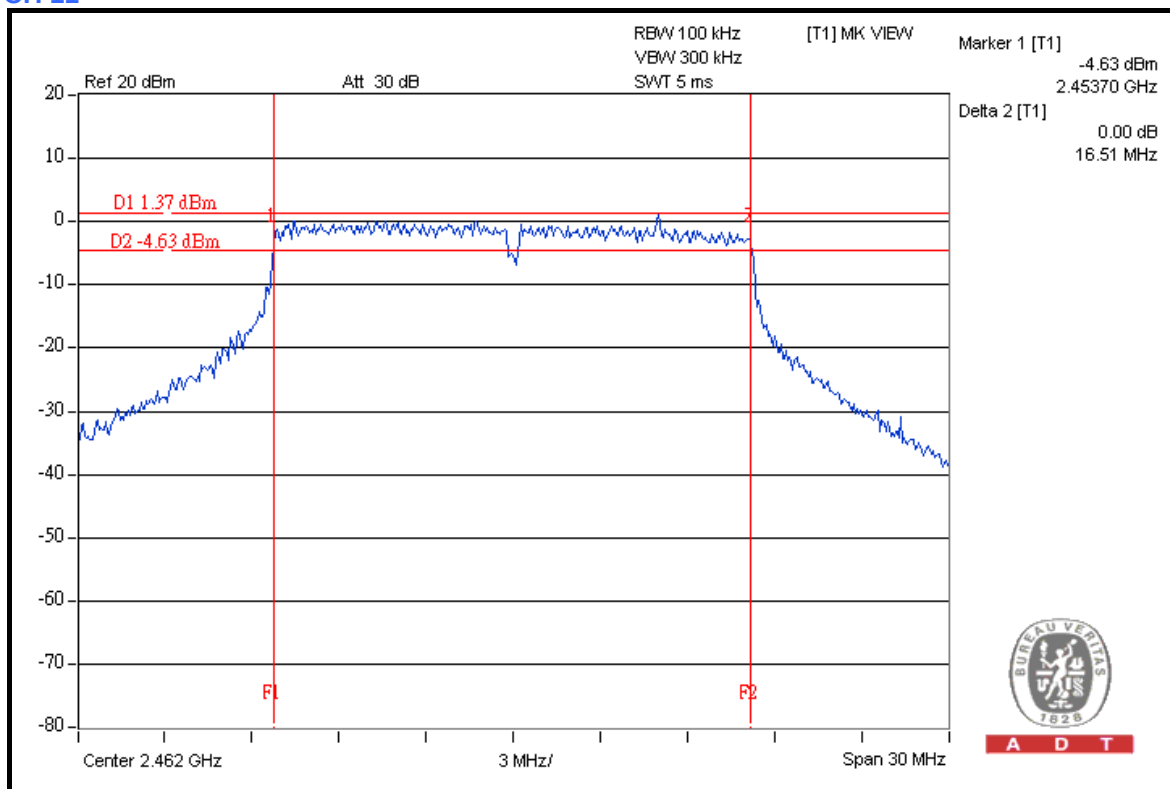

A D T




A D T

### 802.11g OFDM MODULATION (TURBO MODE)

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | QPSK         | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 6       | 2437                    | 32.66               | 0.5                 | PASS        |

### CH 6

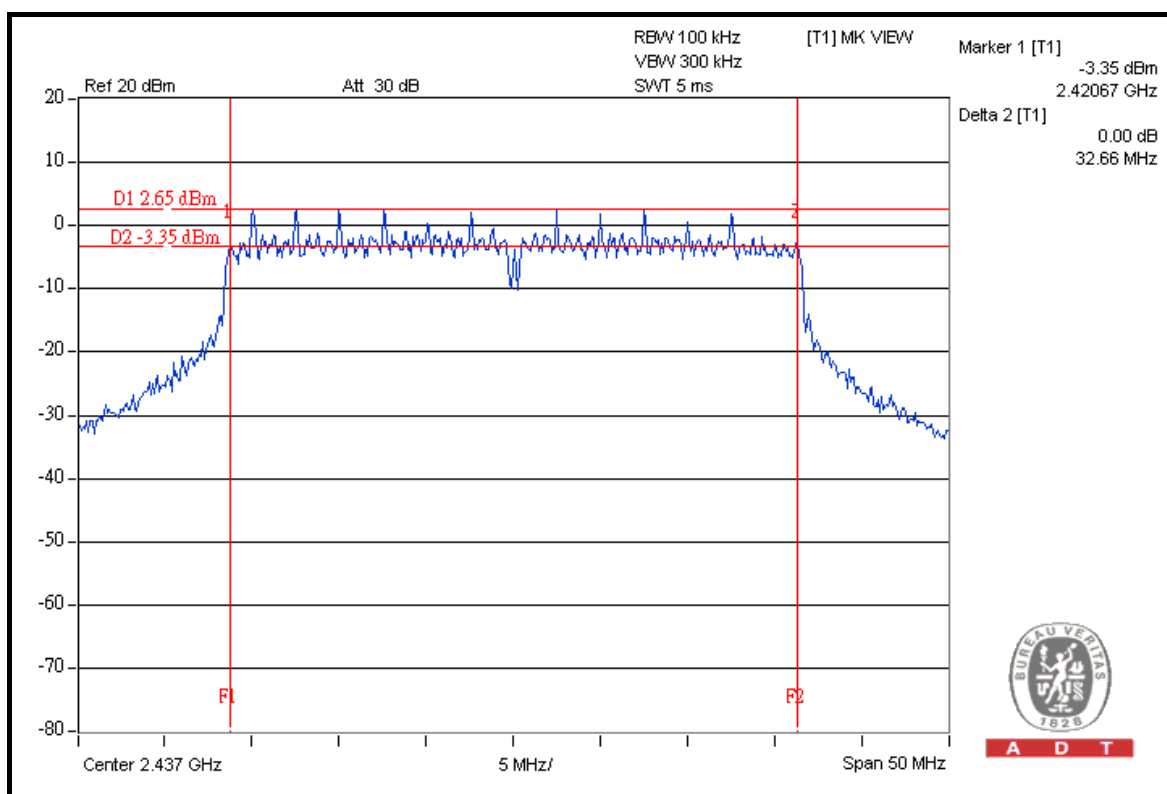

A D T

#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | CALIBRATED UNTIL |
|----------------------------|-----------|------------|---------------------|------------------|
| Peak Power meter           | ML2495A   | 0842014    | Oct. 23, 2008       | Oct. 22, 2009    |
| Pulse Power Sensor         | MA2411B   | 0738138    | Aug. 04, 2008       | Aug. 03, 2009    |

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


##### 4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

##### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.5 TEST SETUP

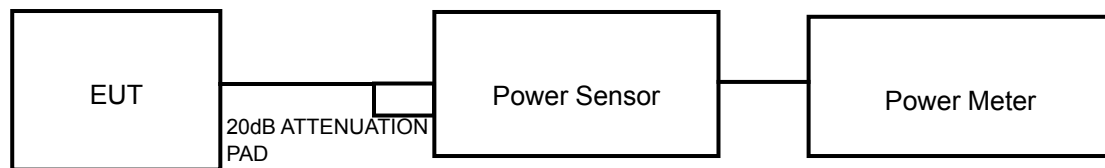

#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

#### 4.4.7 TEST RESULTS

##### 802.11b DSSS MODULATION (NORMAL MODE):

|                        |              |                                 |                        |
|------------------------|--------------|---------------------------------|------------------------|
| <b>MODULATION TYPE</b> | DBPSK        | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 991hPa |
| <b>INPUT POWER</b>     | 120Vac, 60Hz | <b>TEST MODE</b>                | A                      |
| <b>TESTED BY</b>       | Brad Wu      |                                 |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 1       | 2412                    | 80.538                 | 19.06                   | 30                     | PASS        |
| 6       | 2437                    | 80.910                 | 19.08                   | 30                     | PASS        |
| 11      | 2462                    | 80.353                 | 19.05                   | 30                     | PASS        |

##### 802.11g OFDM MODULATION (NORMAL MODE):

|                        |              |                                 |                        |
|------------------------|--------------|---------------------------------|------------------------|
| <b>MODULATION TYPE</b> | BPSK         | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 991hPa |
| <b>INPUT POWER</b>     | 120Vac, 60Hz | <b>TEST MODE</b>                | A                      |
| <b>TESTED BY</b>       | Brad Wu      |                                 |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 1       | 2412                    | 127.644                | 21.06                   | 30                     | PASS        |
| 6       | 2437                    | 224.905                | 23.52                   | 30                     | PASS        |
| 11      | 2462                    | 127.350                | 21.05                   | 30                     | PASS        |

### 802.11g OFDM MODULATION (TURBO MODE):

|                        |              |                                 |                        |
|------------------------|--------------|---------------------------------|------------------------|
| <b>MODULATION TYPE</b> | QPSK         | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 991hPa |
| <b>INPUT POWER</b>     | 120Vac, 60Hz | <b>TEST MODE</b>                | A                      |
| <b>TESTED BY</b>       | Brad Wu      |                                 |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 6       | 2437                    | 200.447                | 23.02                   | 30                     | PASS        |

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|-----------|------------|---------------------|-------------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100040     | Jul. 04, 2008       | Jul. 03, 2009           |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T


## 4.5.7 TEST RESULTS

### 802.11b DSSS MODULATION (NORMAL MODE):

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | DBPSK        | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz ) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|--------------------------|---------------------------------|---------------------|-------------|
| 1       | 2412                     | -4.69                           | 8                   | PASS        |
| 6       | 2437                     | -4.66                           | 8                   | PASS        |
| 11      | 2462                     | -4.56                           | 8                   | PASS        |


### CH 1

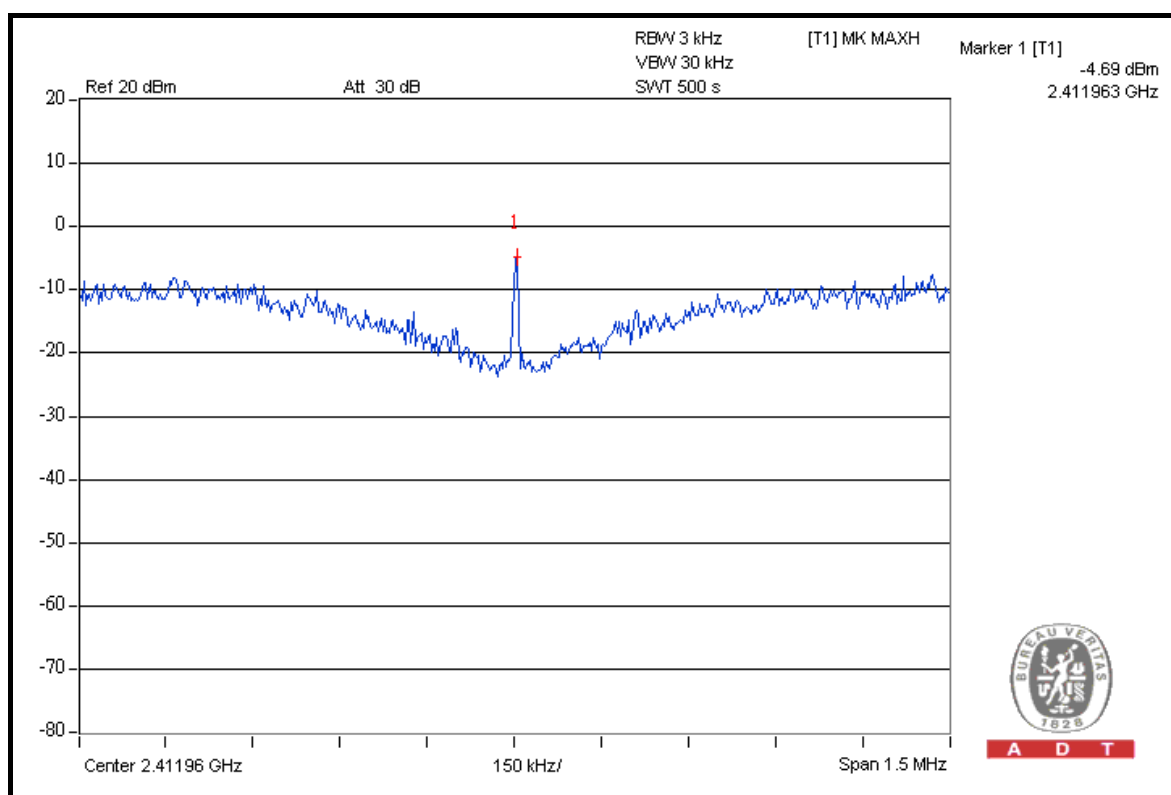




A D T

## CH 6

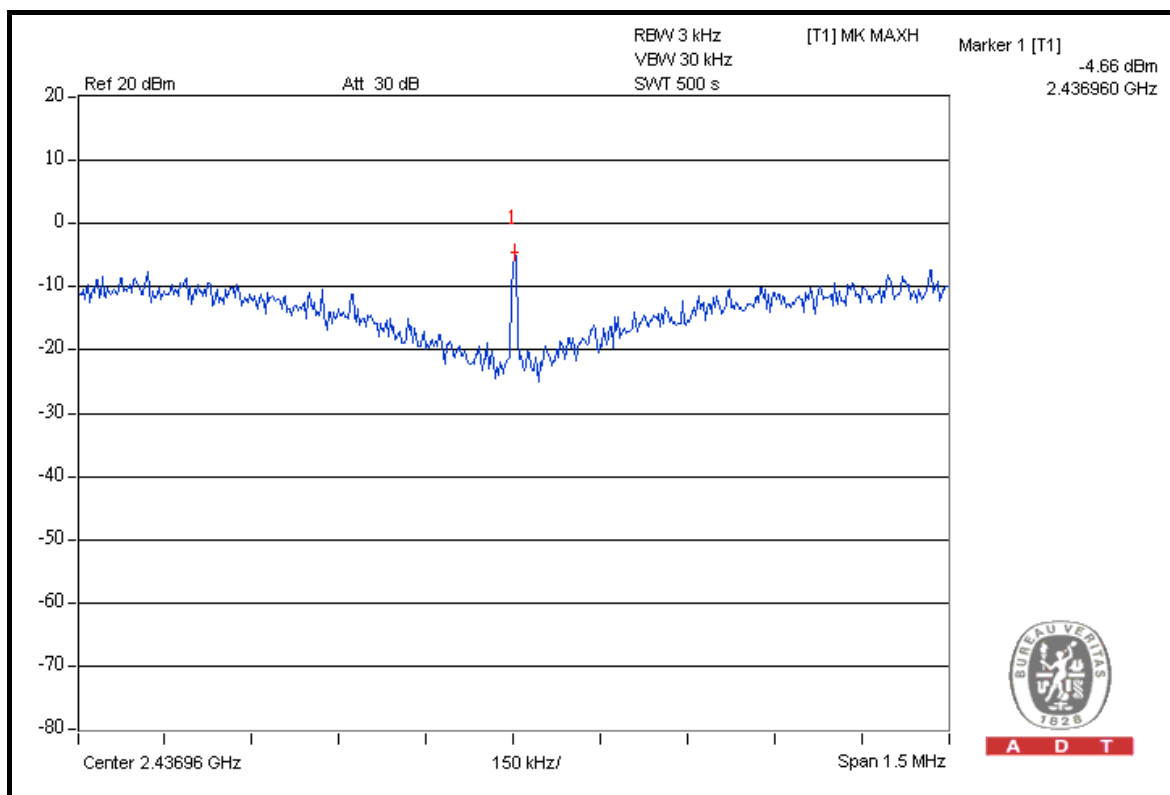

## CH 11

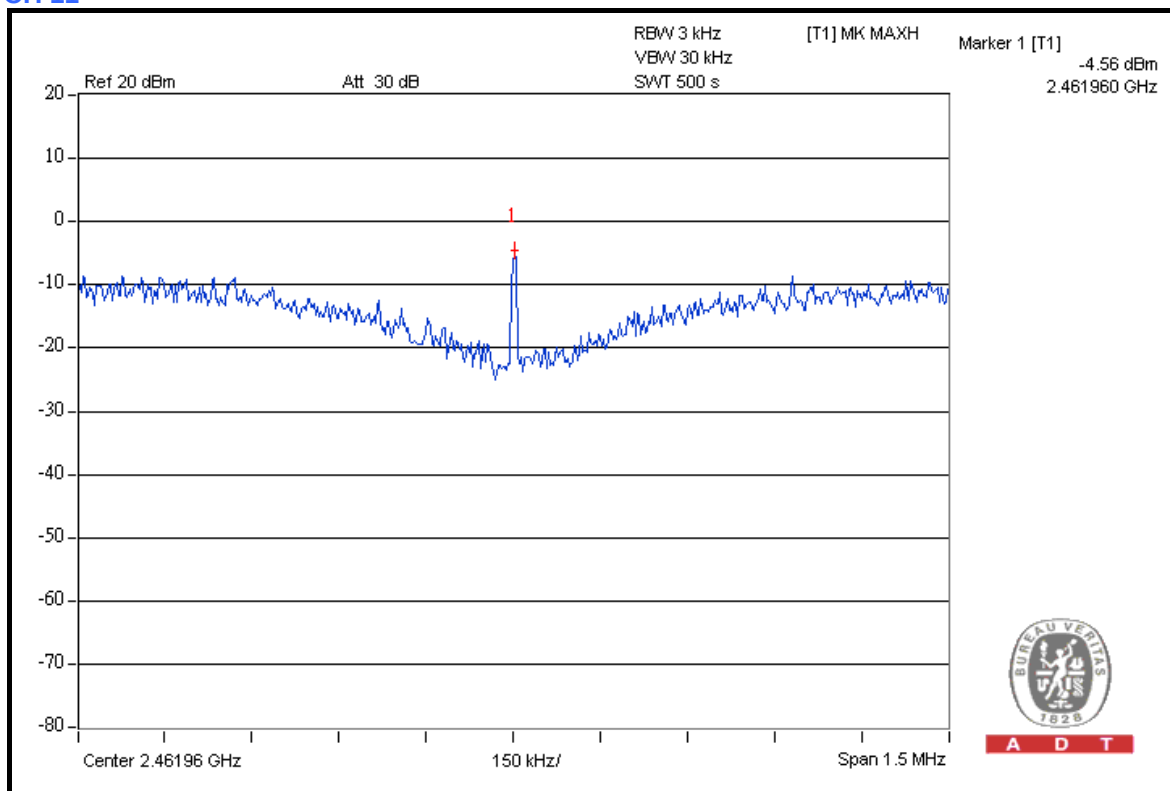




A D T

**802.11g OFDM MODULATION (NORMAL MODE):**

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | BPSK         | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |


| CHANNEL | CHANNEL FREQUENCY (MHz ) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|--------------------------|---------------------------------|---------------------|-------------|
| 1       | 2412                     | -12.43                          | 8                   | PASS        |
| 6       | 2437                     | -10.02                          | 8                   | PASS        |
| 11      | 2462                     | -12.26                          | 8                   | PASS        |

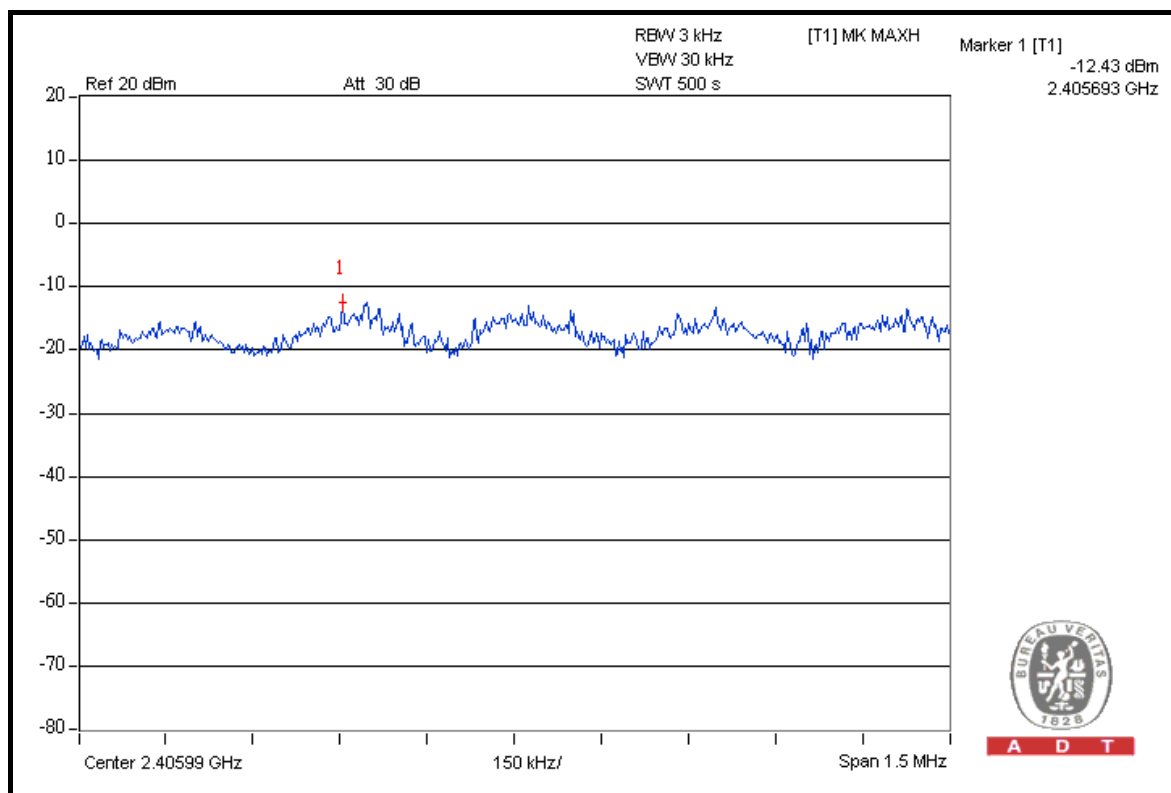**CH 1**




A D T

## CH 6

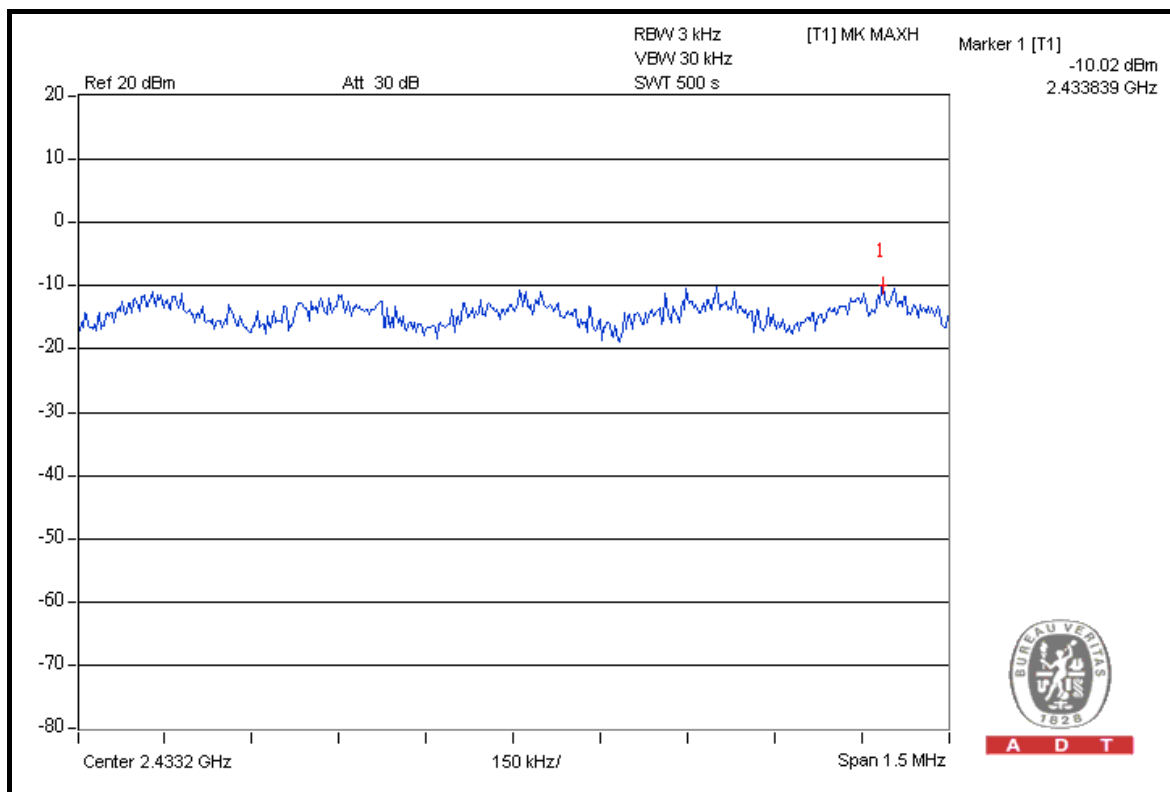

## CH 11

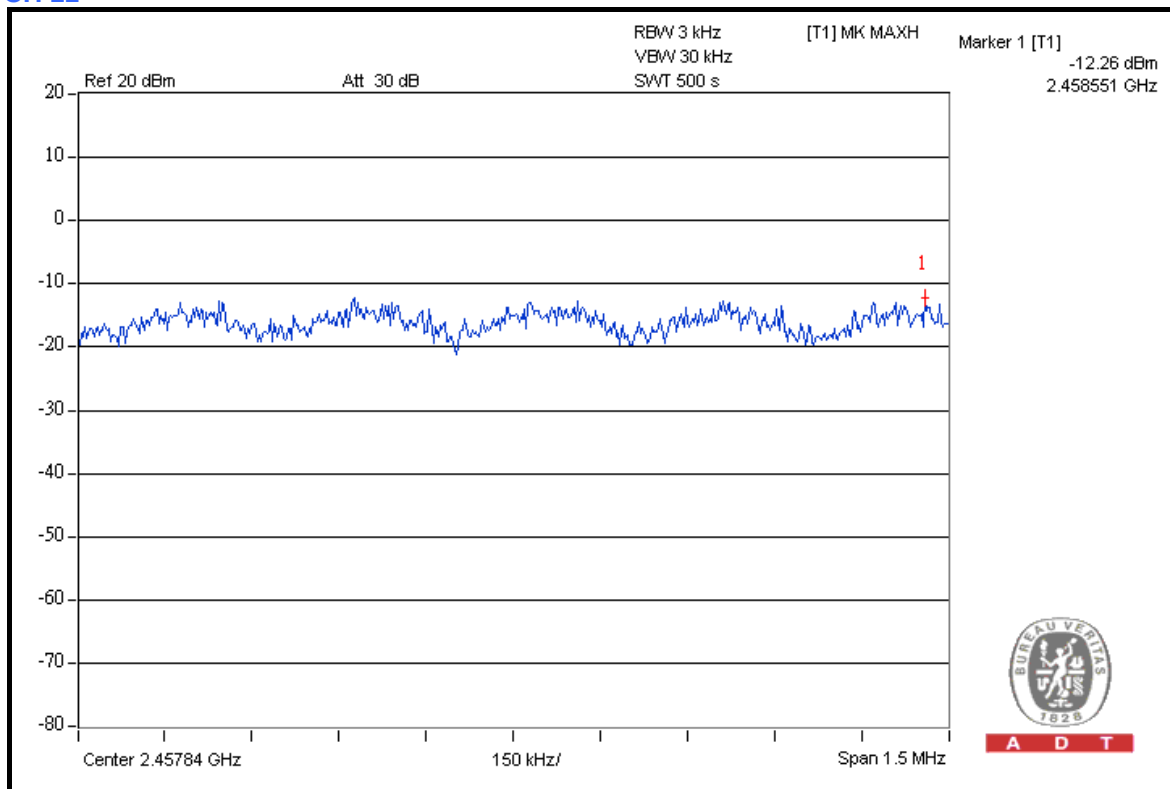




A D T

### 802.11g OFDM MODULATION (TURBO MODE)

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | QPSK         | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz ) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|--------------------------|---------------------------------|---------------------|-------------|
| 6       | 2437                     | -5.54                           | 8                   | PASS        |

### CH 6

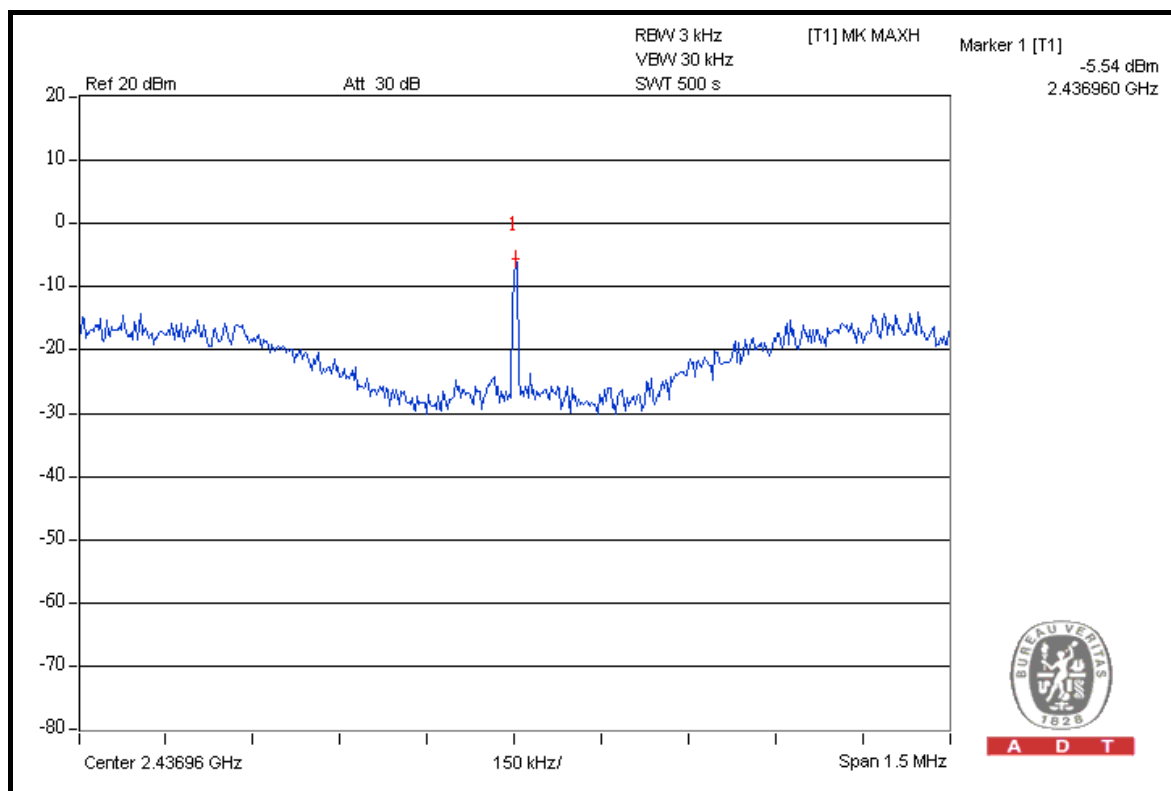

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|-----------|------------|---------------------|-------------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100040     | Jul. 04, 2008       | Jul. 03, 2009           |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 300kHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW =100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

#### 802.11b DSSS MODULATION

##### NOTE 1:

The band edge emission plot on the next page shows 50.12dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.73dBuV/m (Peak), so the maximum field strength in restrict band is  $111.73 - 50.12 = 61.61\text{dBuV/m}$  which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 54.62dBc between carrier maximum power and local maximum emission in restrict band (2.3270GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.87dBuV/m (Average), so the maximum field strength in restrict band is  $106.87 - 54.62 = 52.25\text{dBuV/m}$  which is under 54dBuV/m limit.



##### NOTE 2:

The band edge emission plot on the next second page shows 51.73dBc between carrier maximum power and local maximum emission in restrict band (2.4876GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.53dBuV/m (Peak), so the maximum field strength in restrict band is  $111.53 - 51.73 = 59.80\text{dBuV/m}$  which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 56.79dBc between carrier maximum power and local maximum emission in restrict band (2.4880GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.58dBuV/m (Average), so the maximum field strength in restrict band is  $106.58 - 56.79 = 49.79\text{dBuV/m}$  which is under 54dBuV/m limit.




A D T

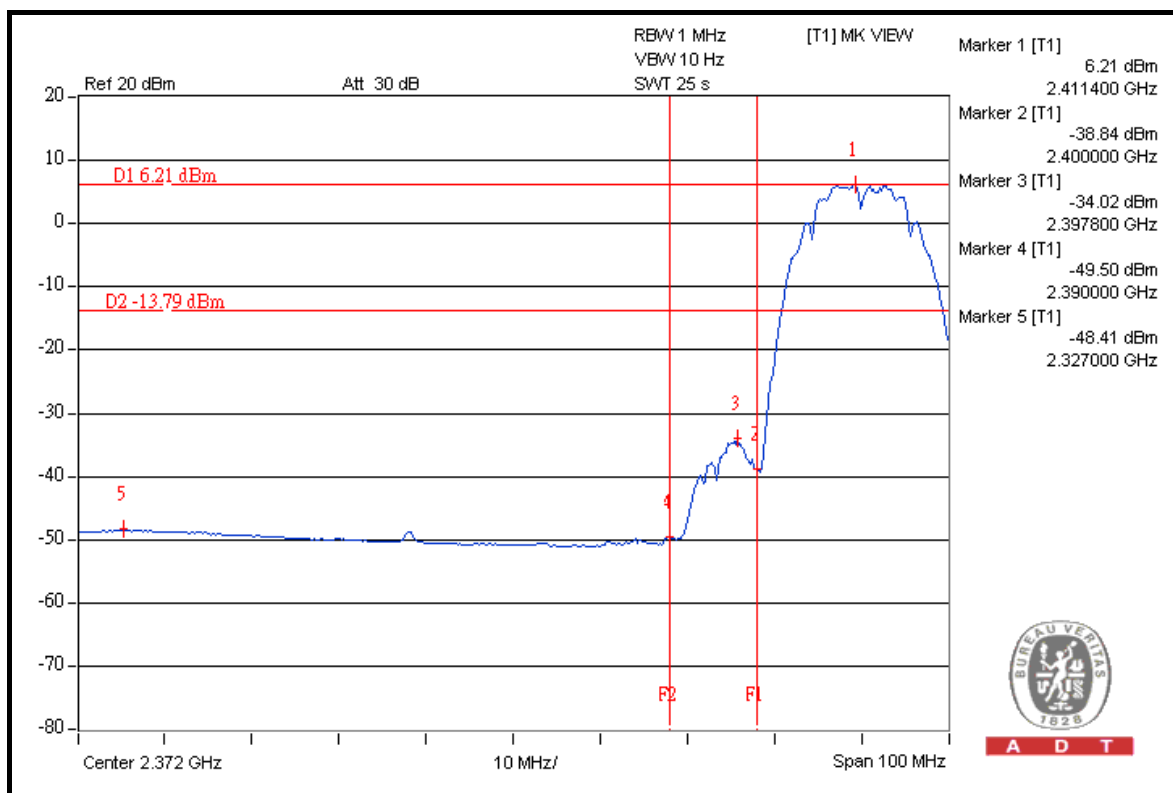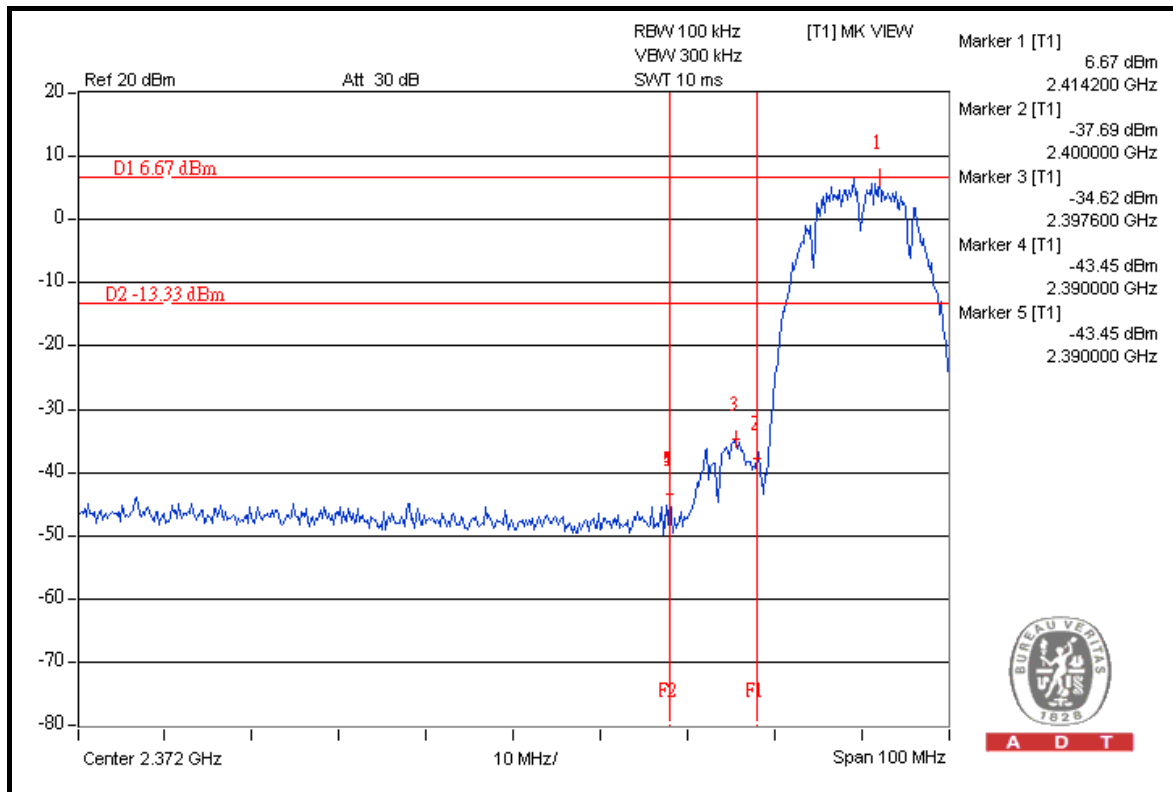




A D T

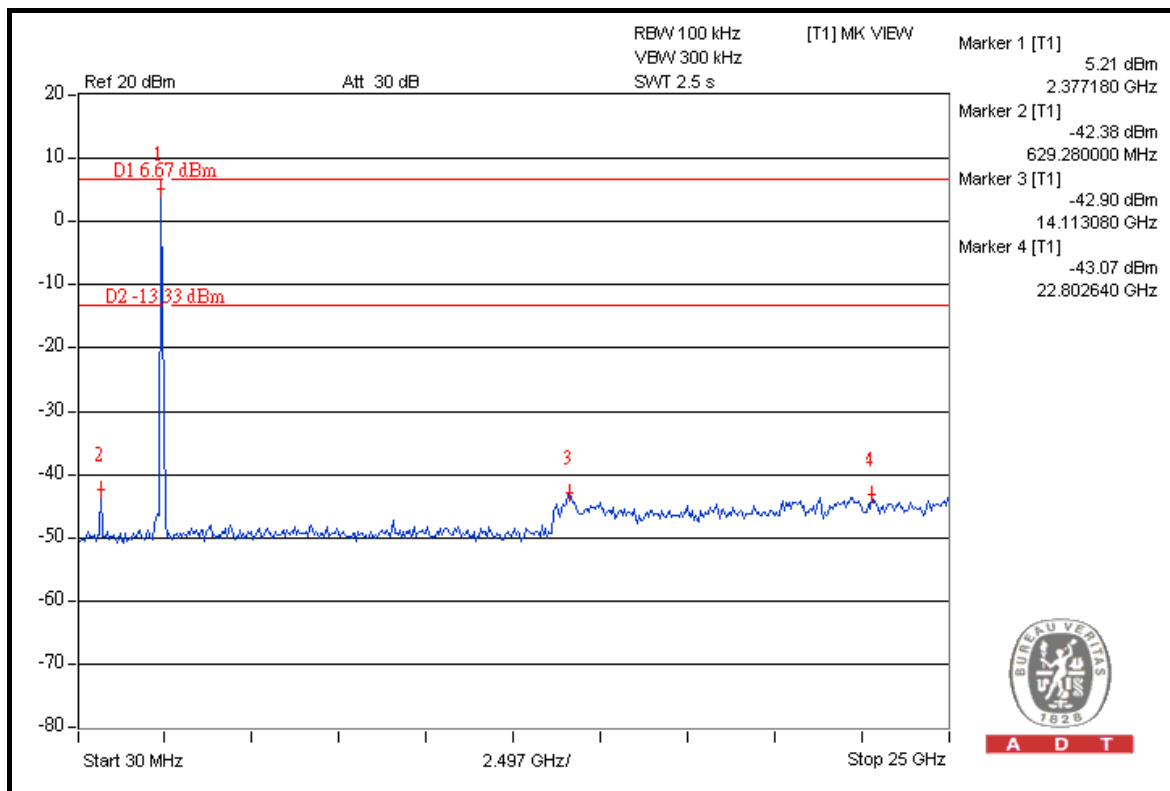


A D T

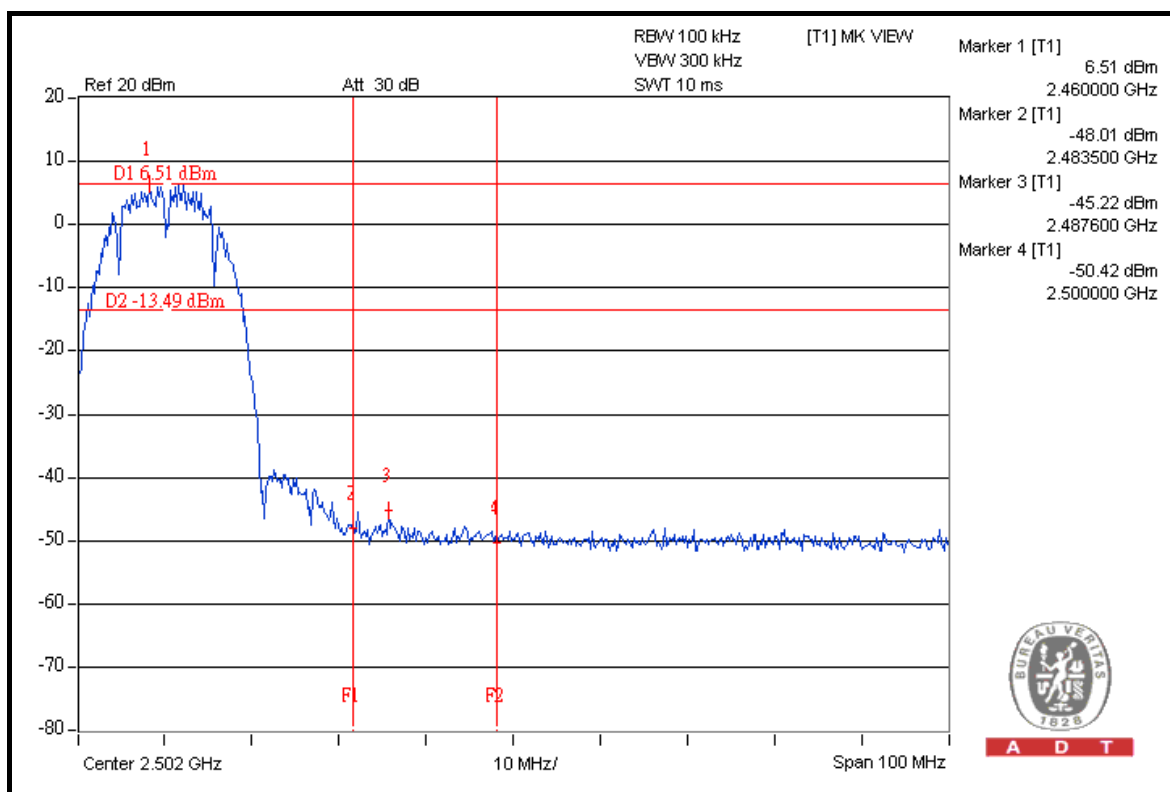


A D T



A D T

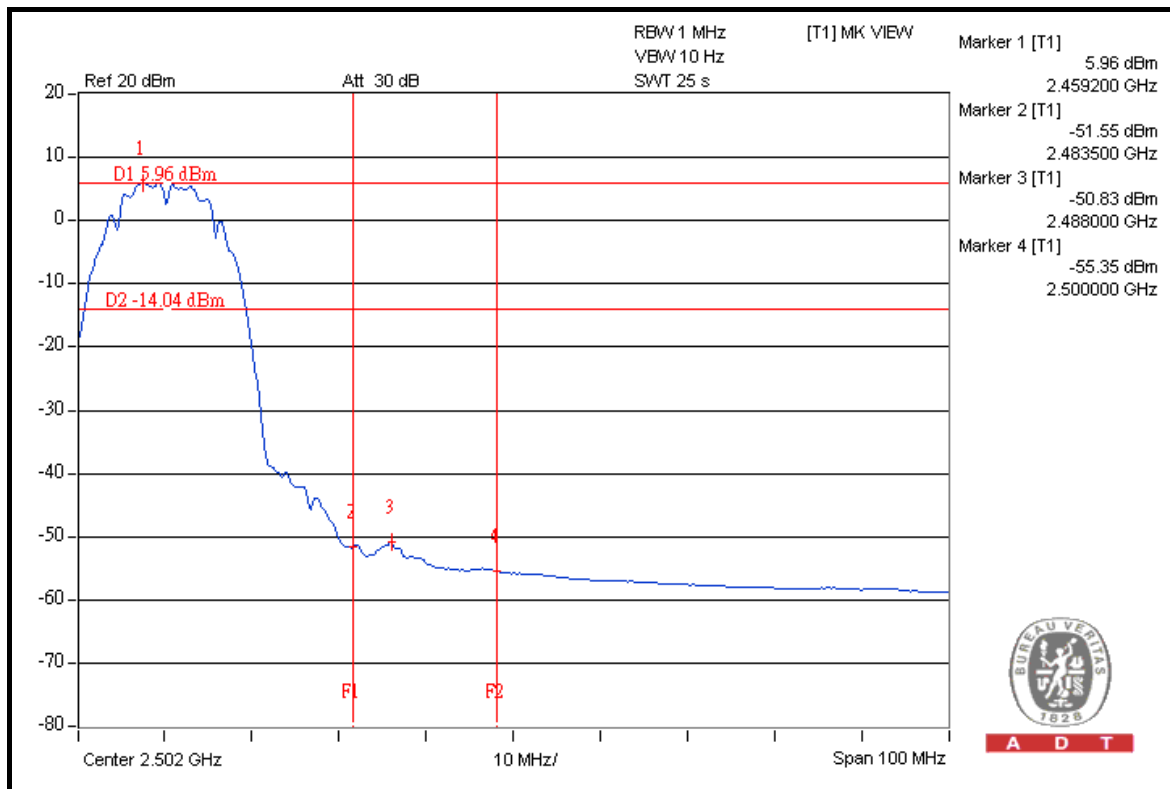

A D T

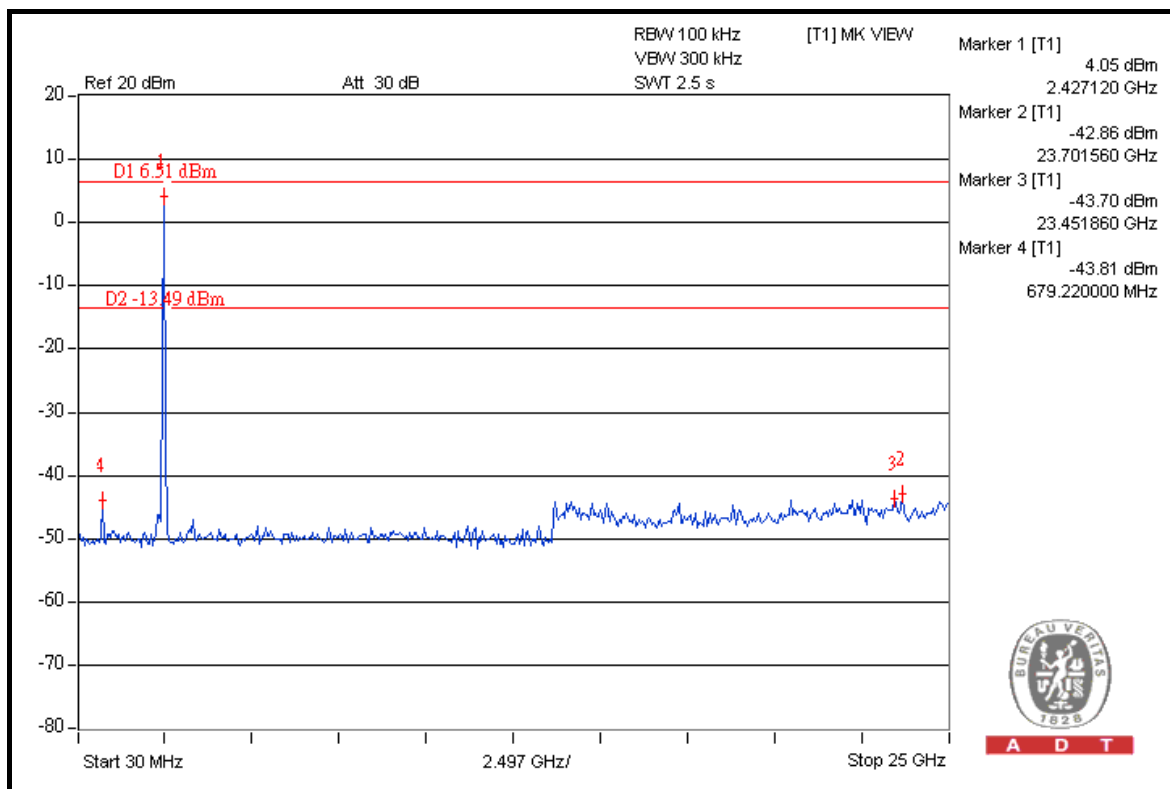

A D T

## 802.11g OFDM MODULATION (NORMAL MODE)

### NOTE 1:

The band edge emission plot on the next page shows 46.53dBc between carrier maximum power and local maximum emission in restrict band (2.3372GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.52dBuV/m (Peak), so the maximum field strength in restrict band is  $110.52 - 46.53 = 63.99\text{dBuV/m}$  which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 48.69dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.43dBuV/m (Average), so the maximum field strength in restrict band is  $99.43 - 48.69 = 50.74\text{dBuV/m}$  which is under 54dBuV/m limit.



### NOTE 2:

The band edge emission plot on the next second page shows 47.34dBc between carrier maximum power and local maximum emission in restrict band (2.4838GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.18dBuV/m (Peak), so the maximum field strength in restrict band is  $110.18 - 47.34 = 62.84\text{dBuV/m}$  which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 51.31dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.65dBuV/m (Average), so the maximum field strength in restrict band is  $98.65 - 51.31 = 47.34\text{dBuV/m}$  which is under 54dBuV/m limit.




A D T

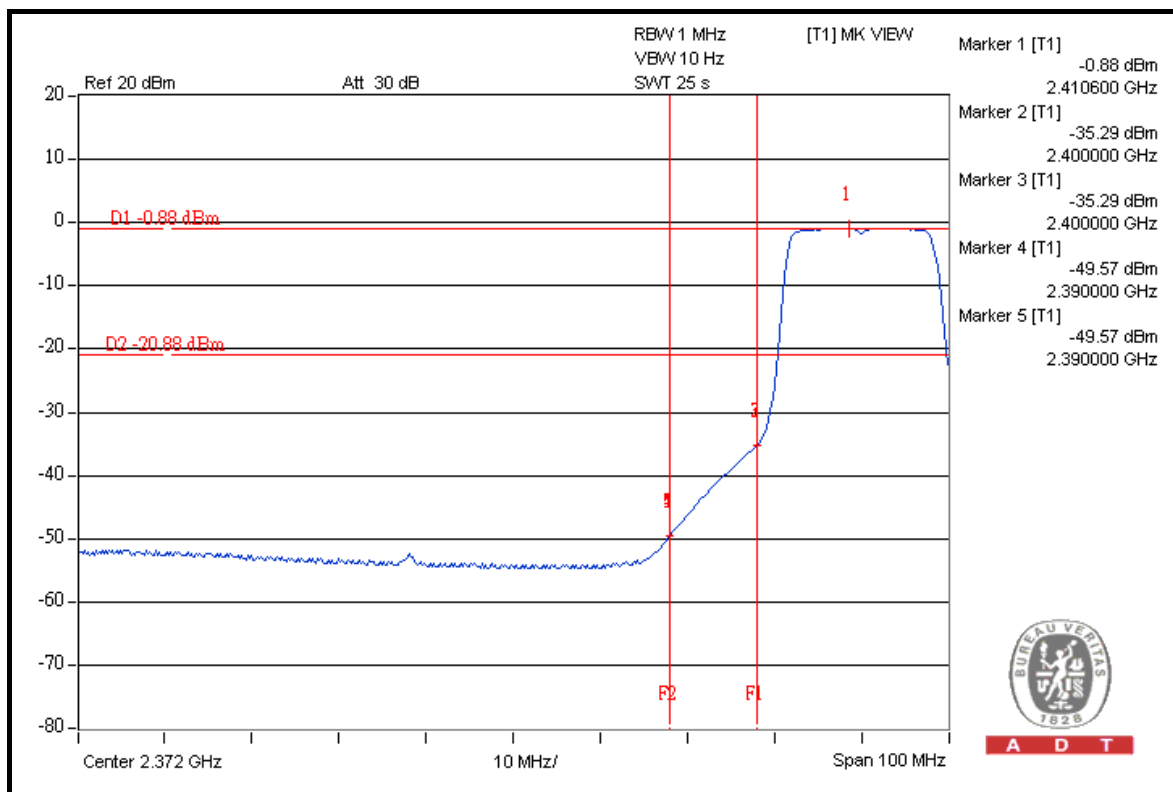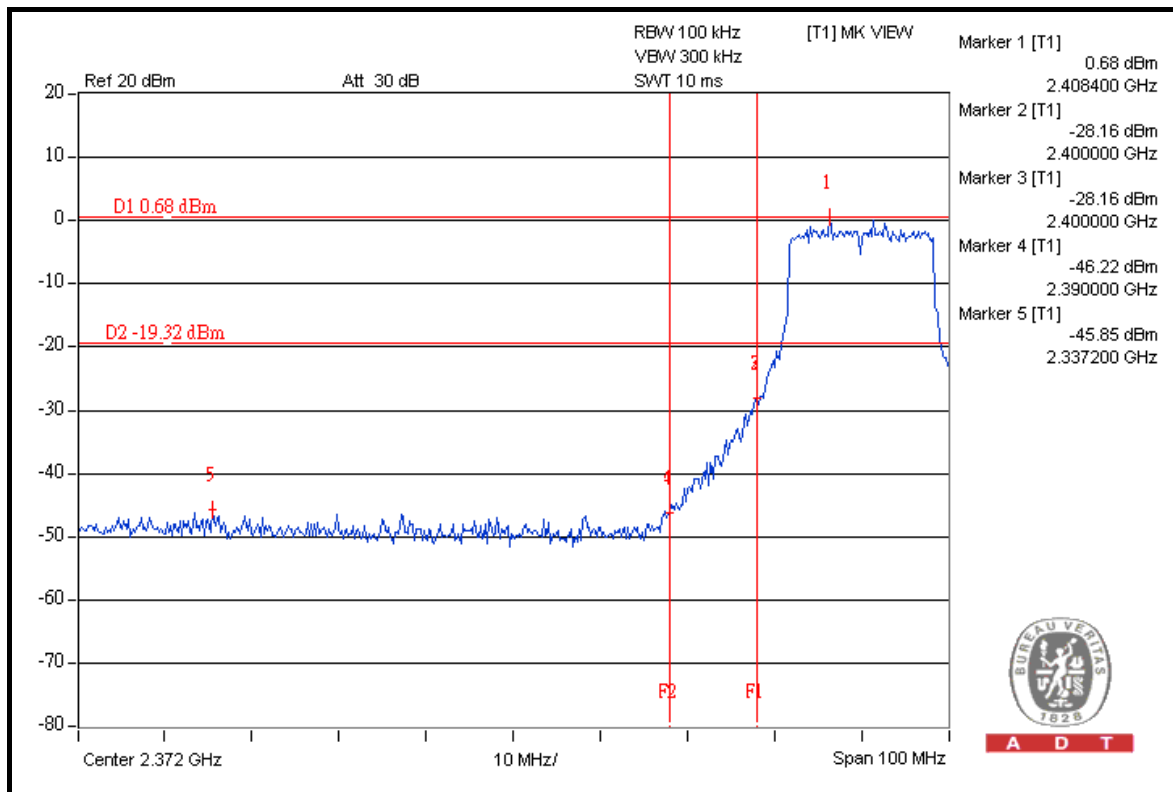




A D T

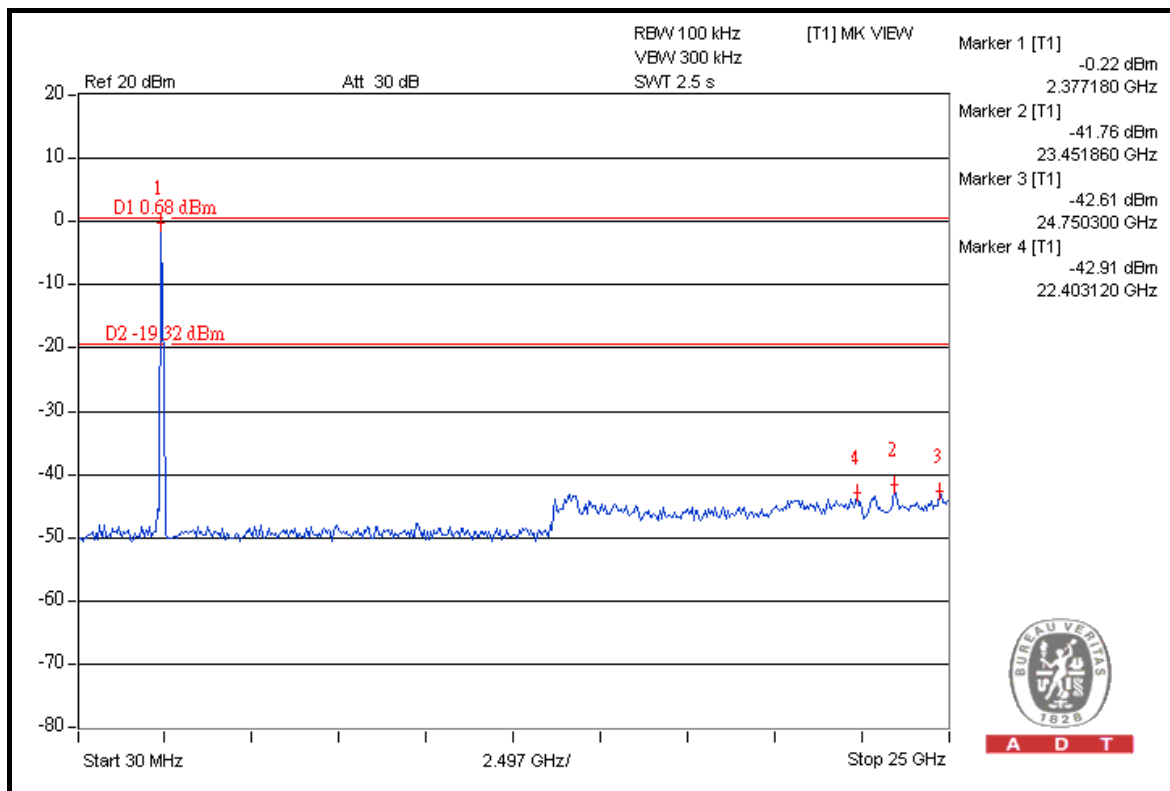



A D T

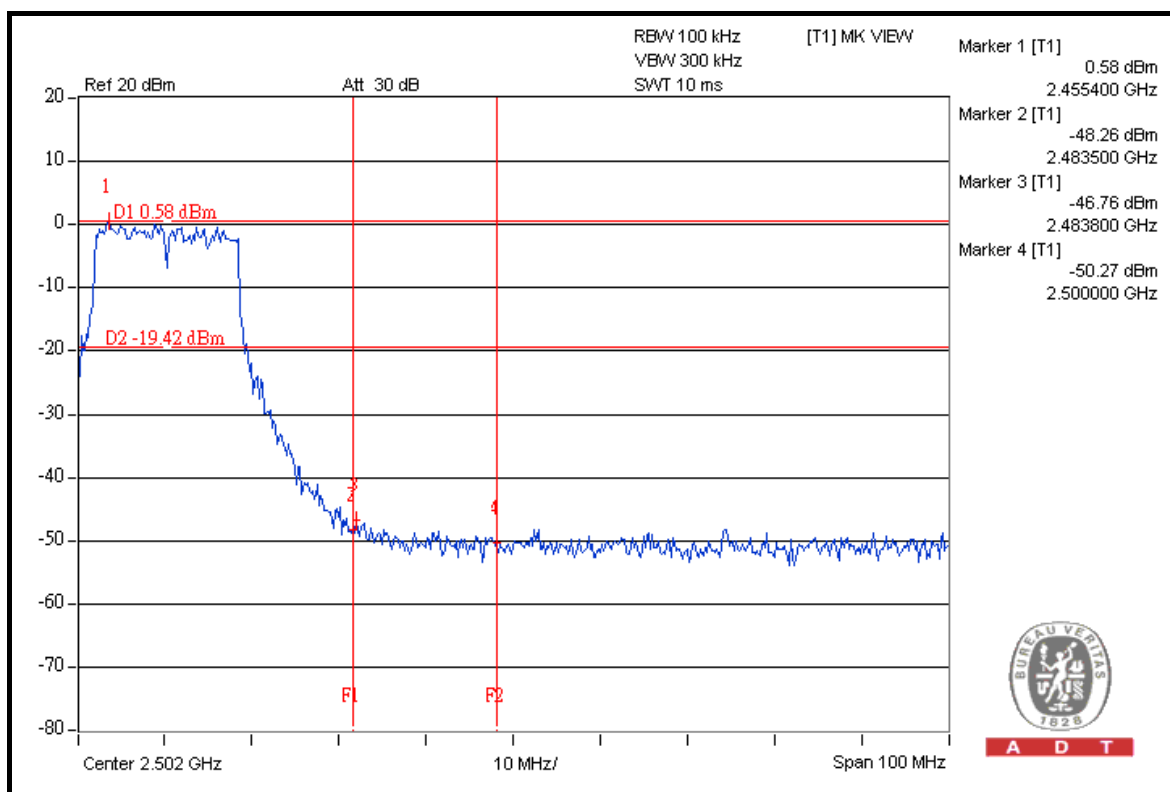

A D T



A D T

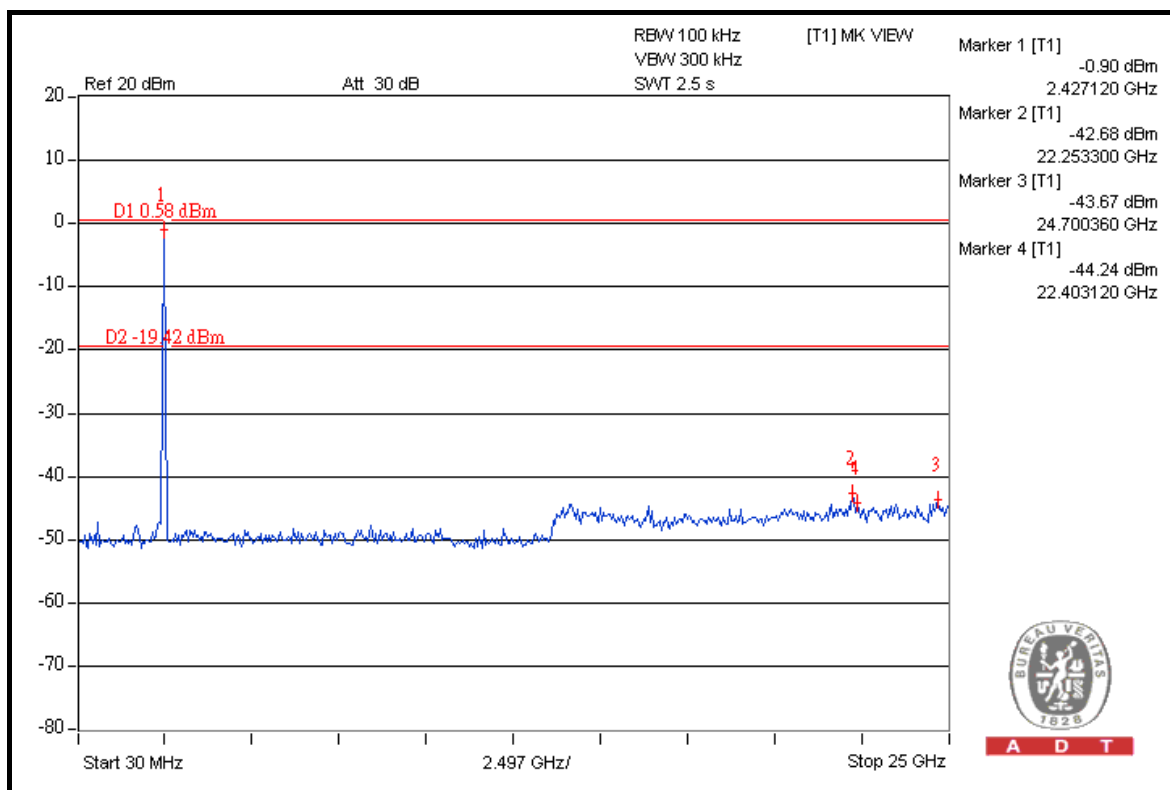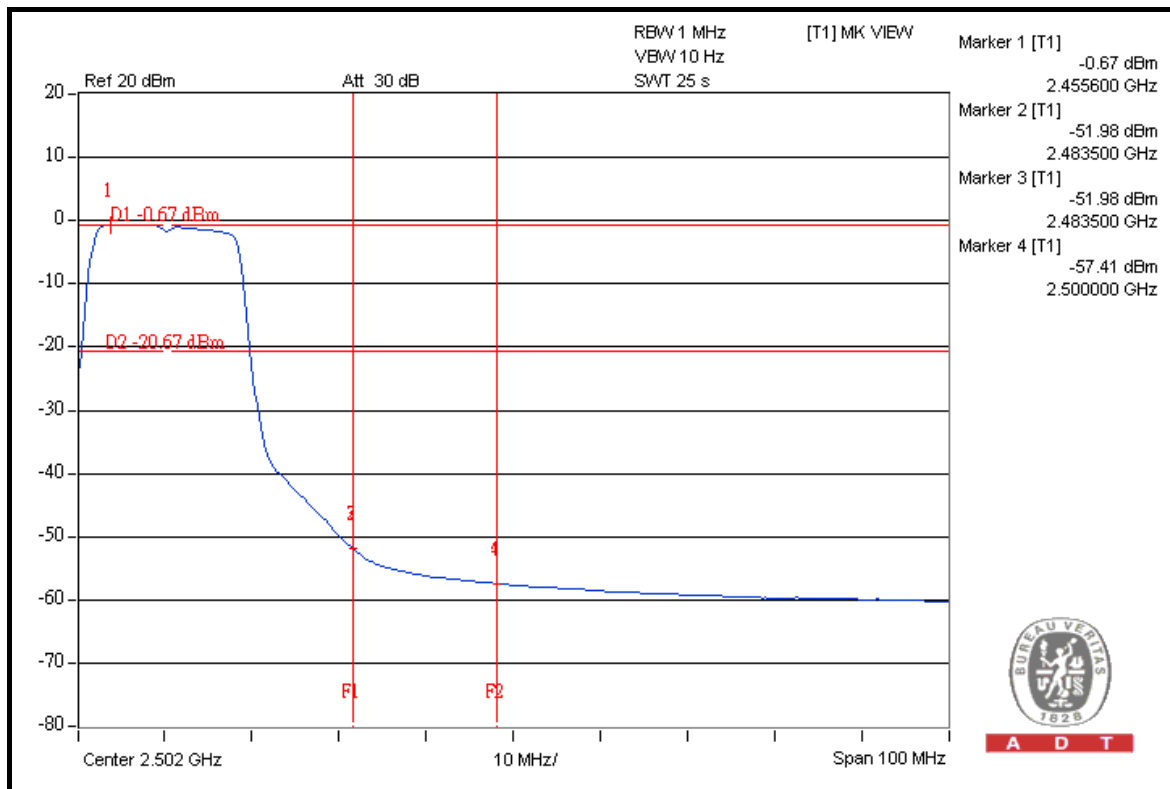

## 802.11g OFDM MODULATION (TURBO MODE)

### NOTE 1:

The band edge emission plot on the next page shows 47.52dBc between carrier maximum power and local maximum emission in restrict band (2.3194GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 107.25dBuV/m (Peak), so the maximum field strength in restrict band is  $107.25 - 47.52 = 59.73\text{dBuV/m}$  which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 48.20dBc between carrier maximum power and local maximum emission in restrict band (2.3198GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 97.20dBuV/m (Average), so the maximum field strength in restrict band is  $97.20 - 48.20 = 49.00\text{dBuV/m}$  which is under 54dBuV/m limit.


### NOTE 2:

The band edge emission plot on the next second page shows 50.11dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 107.25dBuV/m (Peak), so the maximum field strength in restrict band is  $107.25 - 50.11 = 57.14\text{dBuV/m}$  which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 51.44dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 97.20dBuV/m (Average), so the maximum field strength in restrict band is  $97.20 - 51.44 = 45.76\text{dBuV/m}$  which is under 54dBuV/m limit.



A D T

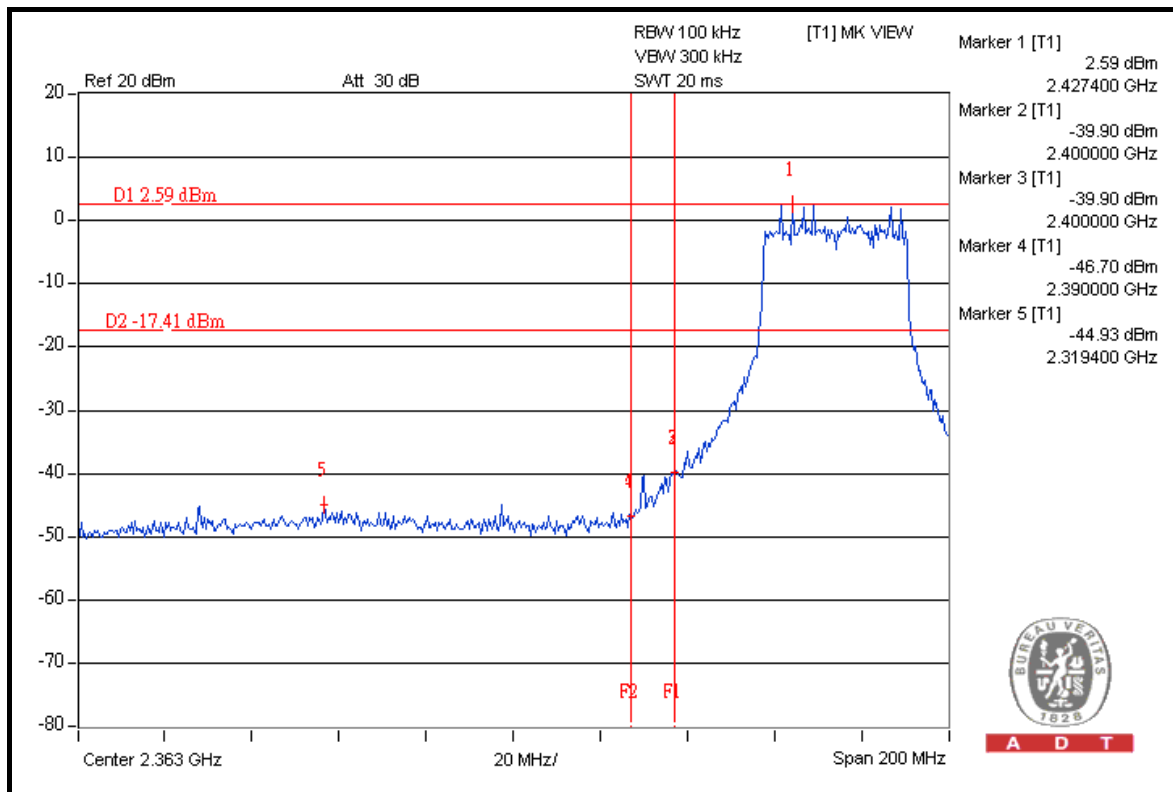


A D T

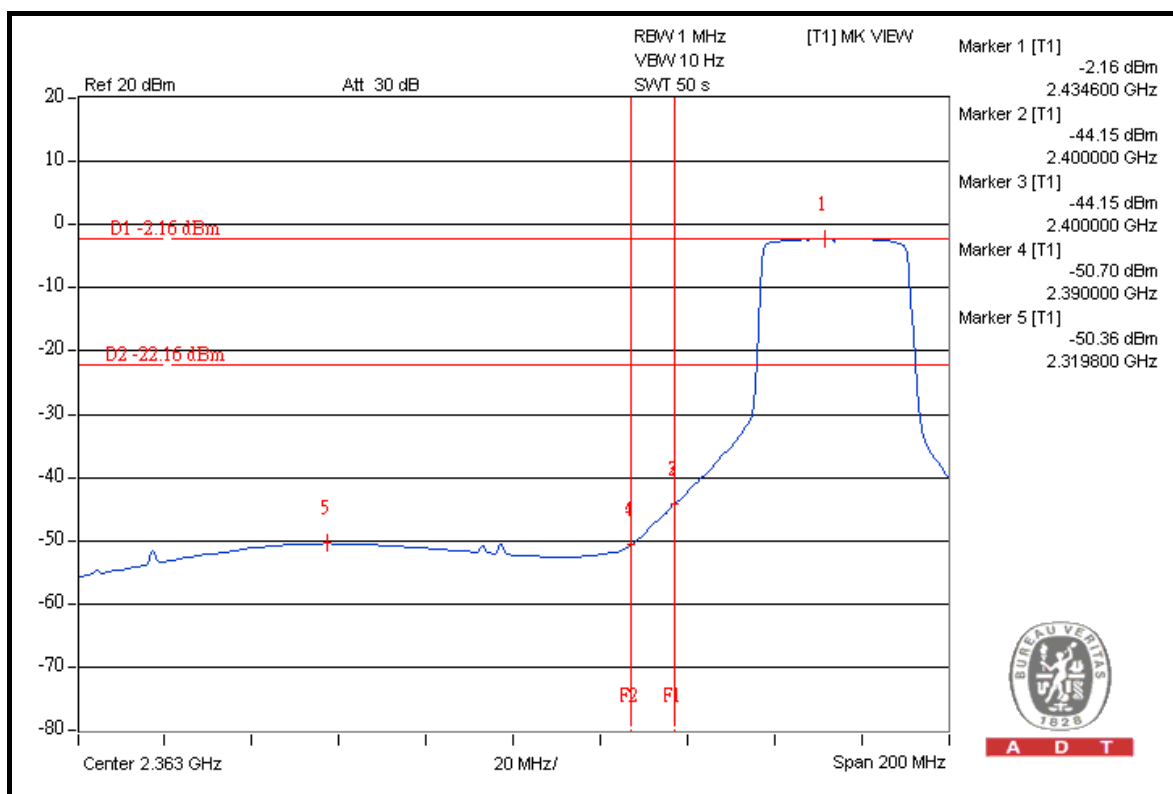


A D T



A D T

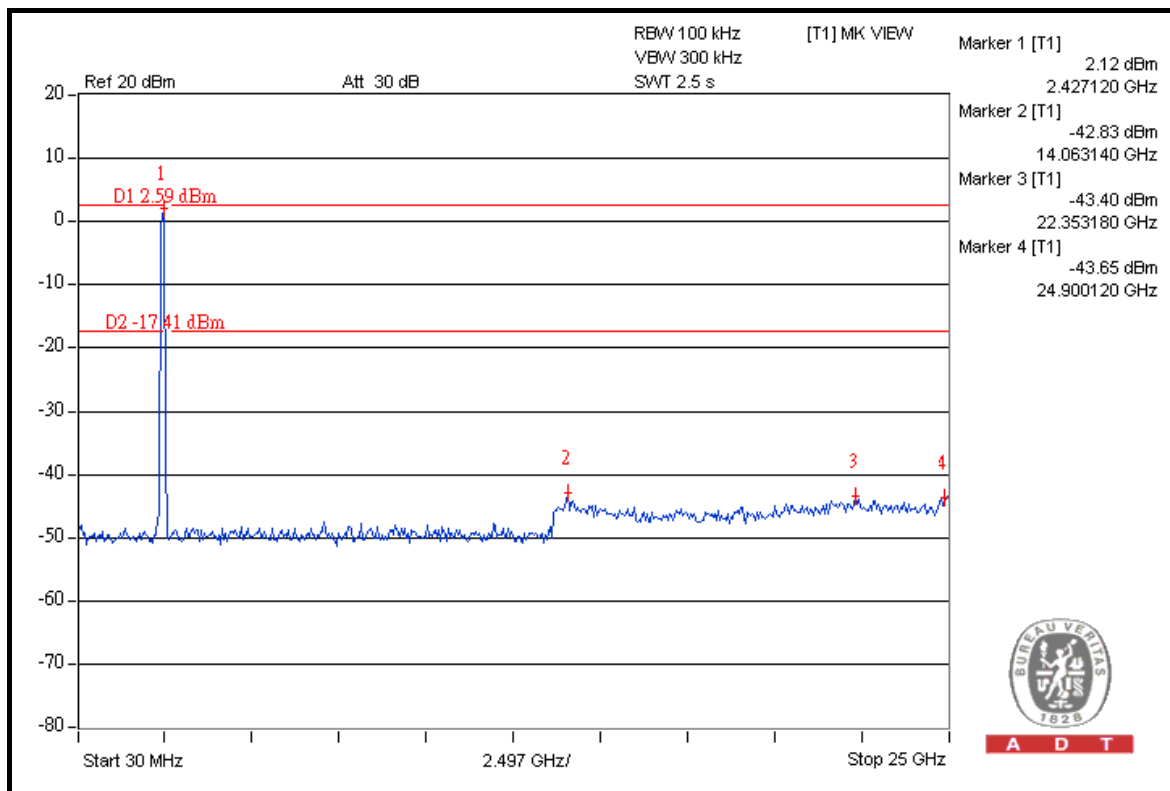


A D T

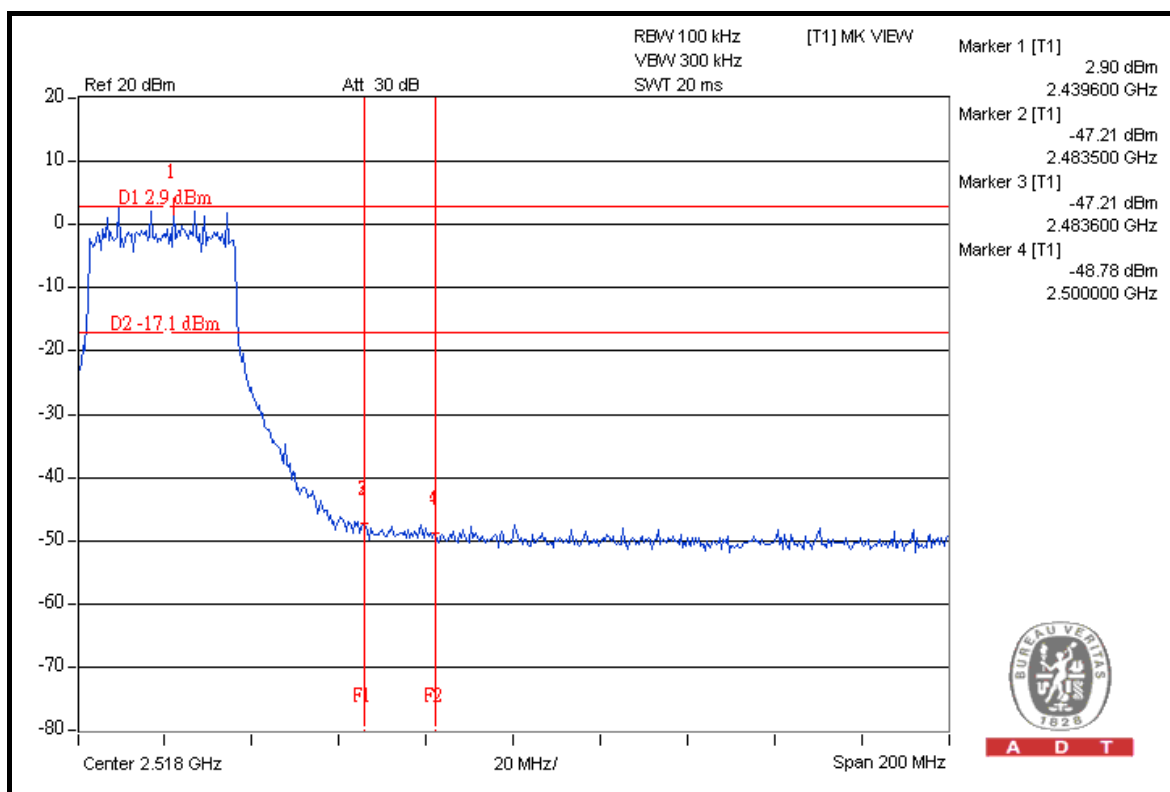


A D T



A D T

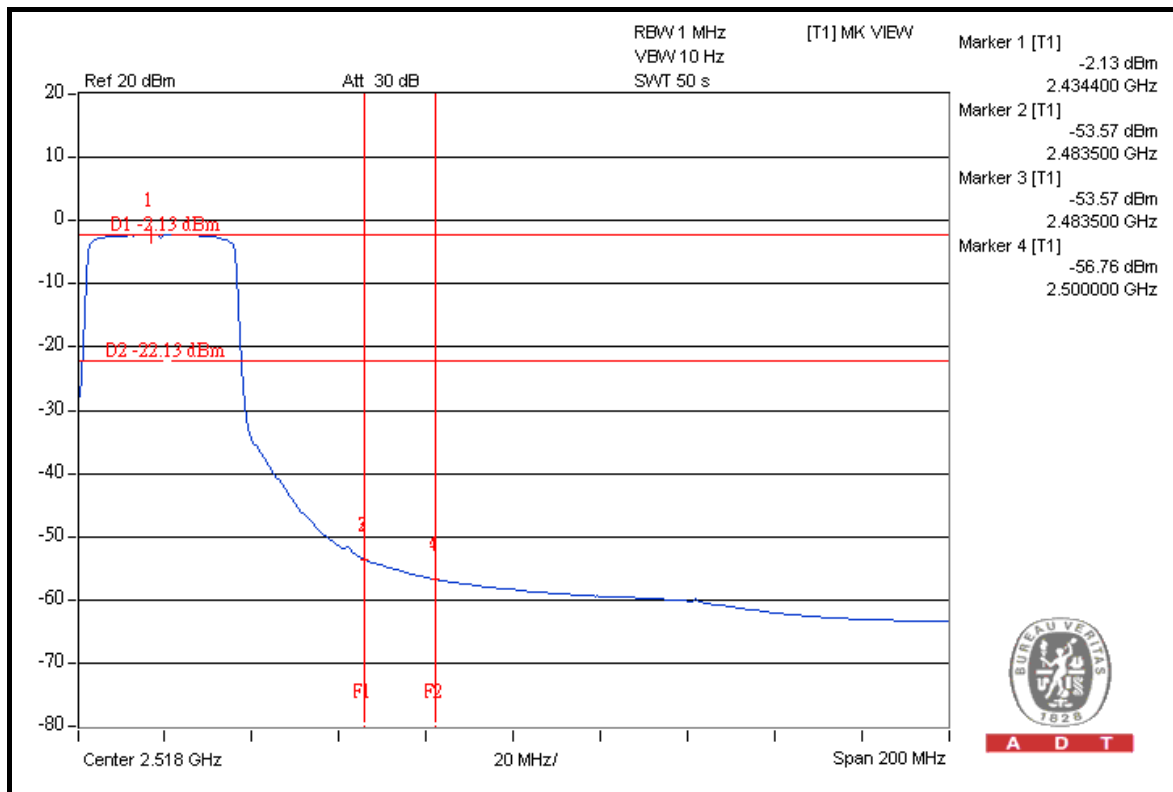

A D T

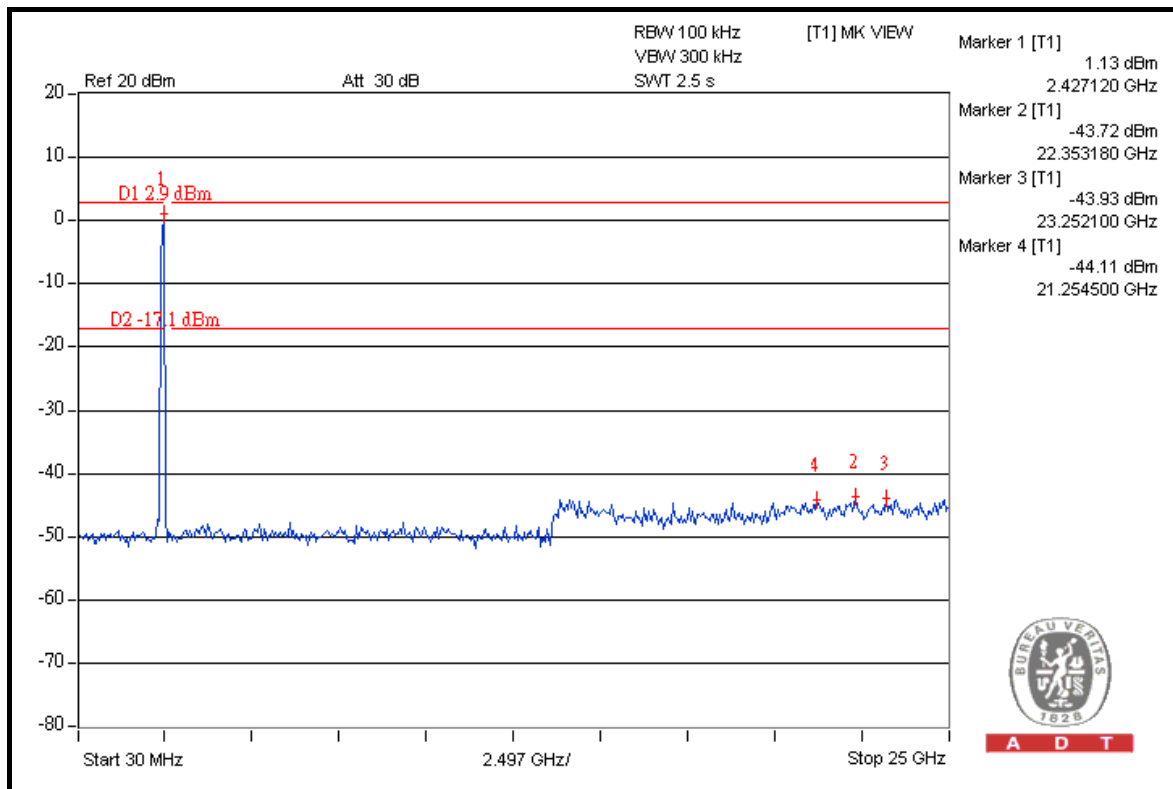

A D T

## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Dipole antenna with R-SMA antenna connector. The maximum gain of the antenna is 2.43dBi.

## 5. TEST TYPES AND RESULTS (FOR 5.0GHz)

### 5.1 RADIATED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES<br>(MHz) | FIELD STRENGTH<br>(microvolts/meter) | MEASUREMENT DISTANCE<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490        | 2400/F(kHz)                          | 300                              |
| 0.490 ~ 1.705        | 24000/F(kHz)                         | 30                               |
| 1.705 ~ 30.0         | 30                                   | 30                               |
| 30 ~ 88              | 100                                  | 3                                |
| 88 ~ 216             | 150                                  | 3                                |
| 216 ~ 960            | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 5.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER              | MODEL NO.                    | SERIAL NO.  | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|-----------------------------------------|------------------------------|-------------|---------------------|-------------------------|
| Test Receiver<br>ROHDE & SCHWARZ        | ESI7                         | 838496/016  | Dec. 29, 2008       | Dec. 28, 2009           |
| Spectrum Analyzer<br>ROHDE & SCHWARZ    | FSP40                        | 100039      | Dec. 08, 2008       | Dec. 07, 2009           |
| BILOG Antenna<br>SCHWARZBECK            | VULB9168                     | 9168-155    | Apr. 30, 2008       | Apr. 29, 2009           |
| HORN Antenna<br>SCHWARZBECK             | BBHA 9120D                   | 9120D-408   | Dec. 29, 2008       | Dec. 28, 2009           |
| HORN Antenna<br>SCHWARZBECK             | BBHA 9170                    | BBHA9170242 | Jan. 06, 2009       | Jan. 05, 2010           |
| Preamplifier<br>Agilent                 | 8449B                        | 3008A01960  | Nov. 03, 2008       | Nov. 02, 2009           |
| Preamplifier<br>Agilent                 | 8447D                        | 2944A10631  | Nov. 03, 2008       | Nov. 02, 2009           |
| RF signal cable<br>HUBER+SUHNNER        | SUCOFLEX 104                 | 274041/4    | Aug. 21, 2008       | Aug. 20, 2009           |
| RF signal cable<br>HUBER+SUHNNER        | SUCOFLEX 104                 | 283397/4    | Aug. 21, 2008       | Aug. 20, 2009           |
| Software<br>ADT.                        | ADT_Radiated_<br>V7.6.15.9.2 | NA          | NA                  | NA                      |
| Antenna Tower<br>inn-co GmbH            | MA 4000                      | 010303      | NA                  | NA                      |
| Antenna Tower Controller<br>inn-co GmbH | CO2000                       | 019303      | NA                  | NA                      |
| Turn Table<br>ADT.                      | TT100.                       | TT93021704  | NA                  | NA                      |
| Turn Table Controller<br>ADT.           | SC100.                       | SC93021704  | NA                  | NA                      |
| 26GHz ~ 40GHz Amplifier                 | EM26400                      | 07026401    | Aug. 27, 2008       | Aug. 26, 2009           |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 988962.
  5. The IC Site Registration No. is IC7450F-4.

### 5.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.1.5 TEST SETUP

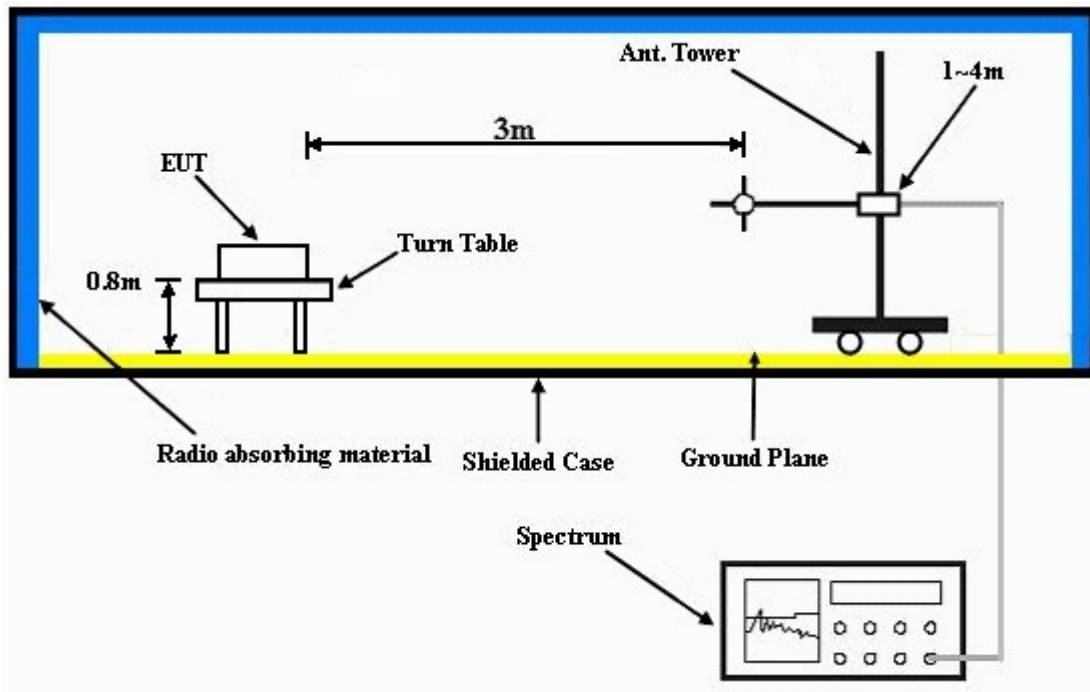

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

## 5.1.7 TEST RESULTS

### ABOVE 1GHz DATA: 802.11a OFDM MODULATION (NORMAL MODE)

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 149                | FREQUENCY RANGE    | 1 ~ 40GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | #5725.00    | 60.78 PK                | 78.27          | -17.49      | 1.72 H             | 322                  | 20.75            | 40.03                    |
| 2                                                   | #5725.00    | 44.75 AV                | 67.43          | -22.68      | 1.72 H             | 322                  | 4.72             | 40.03                    |
| 3                                                   | *5745.00    | 98.27 PK                |                |             | 1.46 H             | 288                  | 58.20            | 40.07                    |
| 4                                                   | *5745.00    | 87.43 AV                |                |             | 1.46 H             | 288                  | 47.36            | 40.07                    |
| 5                                                   | 11490.00    | 58.93 PK                | 74.00          | -15.07      | 1.22 H             | 321                  | 7.78             | 51.15                    |
| 6                                                   | 11490.00    | 46.71 AV                | 54.00          | -7.29       | 1.22 H             | 321                  | -4.44            | 51.15                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | #5725.00    | 67.98 PK                | 88.62          | -20.64      | 1.45 V             | 110                  | 27.95            | 40.03                    |
| 2                                                   | #5725.00    | 52.33 AV                | 76.70          | -24.37      | 1.45 V             | 110                  | 12.30            | 40.03                    |
| 3                                                   | *5745.00    | 108.62 PK               |                |             | 1.36 V             | 273                  | 68.55            | 40.07                    |
| 4                                                   | *5745.00    | 96.70 AV                |                |             | 1.36 V             | 273                  | 56.63            | 40.07                    |
| 5                                                   | 11490.00    | 62.67 PK                | 74.00          | -11.33      | 1.35 V             | 138                  | 11.52            | 51.15                    |
| 6                                                   | 11490.00    | 48.47 AV                | 54.00          | -5.53       | 1.35 V             | 138                  | -2.68            | 51.15                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.
  7. "#": The radiated frequency is out the restricted band.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 157                | FREQUENCY RANGE    | 1 ~ 40GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5785.00    | 98.31 PK                |                |             | 1.42 H             | 281                  | 58.15            | 40.16                    |
| 2                                                   | *5785.00    | 87.49 AV                |                |             | 1.42 H             | 281                  | 47.33            | 40.16                    |
| 3                                                   | 11570.00    | 59.74 PK                | 74.00          | -14.26      | 1.35 H             | 154                  | 8.71             | 51.03                    |
| 4                                                   | 11570.00    | 47.75 AV                | 54.00          | -6.25       | 1.35 H             | 154                  | -3.28            | 51.03                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5785.00    | 108.69 PK               |                |             | 1.47 V             | 275                  | 68.53            | 40.16                    |
| 2                                                   | *5785.00    | 96.75 AV                |                |             | 1.47 V             | 275                  | 56.59            | 40.16                    |
| 3                                                   | 11570.00    | 62.92 PK                | 74.00          | -11.08      | 1.48 V             | 111                  | 11.89            | 51.03                    |
| 4                                                   | 11570.00    | 49.29 AV                | 54.00          | -4.71       | 1.48 V             | 111                  | -1.74            | 51.03                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The limit value is defined as per 15.247.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 165                | FREQUENCY RANGE    | 1 ~ 40GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5825.00    | 98.71 PK                |                |             | 1.39 H             | 246                  | 58.46            | 40.25                    |
| 2                                                   | *5825.00    | 87.95 AV                |                |             | 1.39 H             | 246                  | 47.70            | 40.25                    |
| 3                                                   | #5850.00    | 56.64 PK                | 78.71          | -22.07      | 1.64 H             | 321                  | 16.34            | 40.30                    |
| 4                                                   | #5850.00    | 42.95 AV                | 67.95          | -25.00      | 1.64 H             | 321                  | 2.65             | 40.30                    |
| 5                                                   | 11650.00    | 58.54 PK                | 74.00          | -15.46      | 1.06 H             | 45                   | 7.65             | 50.89                    |
| 6                                                   | 11650.00    | 46.68 AV                | 54.00          | -7.32       | 1.06 H             | 45                   | -4.21            | 50.89                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5825.00    | 108.23 PK               |                |             | 1.42 V             | 118                  | 67.98            | 40.25                    |
| 2                                                   | *5825.00    | 97.14 AV                |                |             | 1.42 V             | 118                  | 56.89            | 40.25                    |
| 3                                                   | #5850.00    | 62.98 PK                | 88.23          | -25.25      | 1.64 V             | 83                   | 22.68            | 40.30                    |
| 4                                                   | #5850.00    | 48.29 AV                | 77.14          | -28.85      | 1.64 V             | 83                   | 7.99             | 40.30                    |
| 5                                                   | 11650.00    | 62.18 PK                | 74.00          | -11.82      | 1.00 V             | 295                  | 11.29            | 50.89                    |
| 6                                                   | 11650.00    | 47.94 AV                | 54.00          | -6.06       | 1.00 V             | 295                  | -2.95            | 50.89                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.  
6. The limit value is defined as per 15.247.  
7. “#”: The radiated frequency is out the restricted band.

### 802.11a OFDM MODULATION (TURBO MODE)

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 152                | FREQUENCY RANGE    | 1 ~ 40GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | #5725.00    | 60.76 PK                | 76.80          | -16.04      | 1.63 H             | 297                  | 20.73            | 40.03                    |
| 2                                                   | #5725.00    | 46.94 AV                | 66.56          | -19.62      | 1.63 H             | 297                  | 6.91             | 40.03                    |
| 3                                                   | *5760.00    | 96.80 PK                |                |             | 1.62 H             | 298                  | 56.69            | 40.11                    |
| 4                                                   | *5760.00    | 86.56 AV                |                |             | 1.62 H             | 298                  | 46.45            | 40.11                    |
| 5                                                   | 11520.00    | 58.66 PK                | 74.00          | -15.34      | 1.15 H             | 63                   | 7.55             | 51.12                    |
| 6                                                   | 11520.00    | 46.93 AV                | 54.00          | -7.07       | 1.15 H             | 63                   | -4.18            | 51.12                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | #5725.00    | 69.41 PK                | 83.94          | -14.53      | 1.36 V             | 283                  | 29.38            | 40.03                    |
| 2                                                   | #5725.00    | 55.03 AV                | 74.08          | -19.05      | 1.36 V             | 283                  | 15.00            | 40.03                    |
| 3                                                   | *5760.00    | 103.94 PK               |                |             | 1.38 V             | 350                  | 63.83            | 40.11                    |
| 4                                                   | *5760.00    | 94.08 AV                |                |             | 1.38 V             | 350                  | 53.97            | 40.11                    |
| 5                                                   | 11520.00    | 61.60 PK                | 74.00          | -12.40      | 1.63 V             | 186                  | 10.49            | 51.12                    |
| 6                                                   | 11520.00    | 49.55 AV                | 54.00          | -4.45       | 1.63 V             | 186                  | -1.56            | 51.12                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.
  7. "#": The radiated frequency is out the restricted band.



A D T

| EUT TEST CONDITION       |                            | MEASUREMENT DETAIL |                           |
|--------------------------|----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 160                | FREQUENCY RANGE    | 1 ~ 40GHz                 |
| INPUT POWER              | 120Vac, 60 Hz              | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH<br>1000hPa | TESTED BY          | Mark Liao                 |
| TEST MODE                | A                          |                    |                           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5800.00    | 96.82 PK                |                |             | 1.55 H             | 276                  | 56.63            | 40.19                    |
| 2                                                   | *5800.00    | 86.59 AV                |                |             | 1.55 H             | 276                  | 46.40            | 40.19                    |
| 3                                                   | #5850.00    | 53.79 PK                | 76.82          | -23.03      | 1.15 H             | 189                  | 13.49            | 40.30                    |
| 4                                                   | #5850.00    | 40.47 AV                | 66.59          | -26.12      | 1.15 H             | 189                  | 0.17             | 40.30                    |
| 5                                                   | 11600.00    | 59.18 PK                | 74.00          | -14.82      | 1.32 H             | 94                   | 8.20             | 50.98                    |
| 6                                                   | 11600.00    | 47.69 AV                | 54.00          | -6.31       | 1.32 H             | 94                   | -3.29            | 50.98                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5800.00    | 103.98 PK               |                |             | 1.12 V             | 356                  | 63.79            | 40.19                    |
| 2                                                   | *5800.00    | 94.09 AV                |                |             | 1.12 V             | 356                  | 53.90            | 40.19                    |
| 3                                                   | #5850.00    | 61.44 PK                | 83.98          | -22.54      | 1.13 V             | 356                  | 21.14            | 40.30                    |
| 4                                                   | #5850.00    | 45.52 AV                | 74.09          | -28.57      | 1.13 V             | 356                  | 5.22             | 40.30                    |
| 5                                                   | 11600.00    | 60.91 PK                | 74.00          | -13.09      | 1.52 V             | 106                  | 9.93             | 50.98                    |
| 6                                                   | 11600.00    | 48.77 AV                | 54.00          | -5.23       | 1.52 V             | 106                  | -2.21            | 50.98                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.  
6. The limit value is defined as per 15.247.  
7. “#”: The radiated frequency is out the restricted band.



A D T

**BELOW 1GHz WORST-CASE DATA : 802.11a OFDM MODULATION (NORMAL MODE)**

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 157               | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER              | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | A                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 249.60      | 43.61 QP                | 46.00          | -2.39       | 1.00 H             | 88                   | 29.80            | 13.80                    |
| 2                                                   | 440.14      | 38.58 QP                | 46.00          | -7.42       | 1.75 H             | 154                  | 19.53            | 19.06                    |
| 3                                                   | 500.42      | 40.88 QP                | 46.00          | -5.12       | 1.25 H             | 214                  | 20.44            | 20.44                    |
| 4                                                   | 659.85      | 39.73 QP                | 46.00          | -6.27       | 1.00 H             | 187                  | 15.69            | 24.04                    |
| 5                                                   | 770.67      | 43.10 QP                | 46.00          | -2.90       | 1.50 H             | 157                  | 17.38            | 25.71                    |
| 6                                                   | 881.50      | 44.23 QP                | 46.00          | -1.77       | 1.25 H             | 184                  | 16.69            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 47.40       | 33.12 QP                | 40.00          | -6.88       | 1.25 V             | 316                  | 19.38            | 13.74                    |
| 2                                                   | 109.62      | 37.71 QP                | 43.50          | -5.79       | 1.00 V             | 103                  | 26.24            | 11.47                    |
| 3                                                   | 132.95      | 37.57 QP                | 43.50          | -5.93       | 1.00 V             | 10                   | 25.21            | 12.36                    |
| 4                                                   | 249.60      | 39.26 QP                | 46.00          | -6.74       | 1.75 V             | 124                  | 25.45            | 13.80                    |
| 5                                                   | 500.42      | 43.34 QP                | 46.00          | -2.66       | 1.25 V             | 13                   | 22.91            | 20.44                    |
| 6                                                   | 770.67      | 42.89 QP                | 46.00          | -3.11       | 1.25 V             | 133                  | 17.18            | 25.71                    |
| 7                                                   | 881.50      | 40.05 QP                | 46.00          | -5.95       | 1.00 V             | 157                  | 12.50            | 27.54                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 157               | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER (SYSTEM)     | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | B                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 329.32      | 37.14 QP                | 46.00          | -8.86       | 1.25 H             | 328                  | 22.11            | 15.03                    |
| 2                                                   | 440.14      | 41.84 QP                | 46.00          | -4.16       | 1.75 H             | 325                  | 22.79            | 19.06                    |
| 3                                                   | 500.42      | 40.80 QP                | 46.00          | -5.20       | 1.25 H             | 136                  | 20.36            | 20.44                    |
| 4                                                   | 550.97      | 36.34 QP                | 46.00          | -9.66       | 1.25 H             | 196                  | 14.85            | 21.49                    |
| 5                                                   | 659.85      | 39.01 QP                | 46.00          | -6.99       | 1.00 H             | 175                  | 14.97            | 24.04                    |
| 6                                                   | 770.67      | 40.11 QP                | 46.00          | -5.89       | 1.50 H             | 157                  | 14.39            | 25.71                    |
| 7                                                   | 881.50      | 44.84 QP                | 46.00          | -1.16       | 1.25 H             | 184                  | 17.30            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 41.57       | 35.32 QP                | 40.00          | -4.68       | 1.25 V             | 256                  | 20.45            | 14.87                    |
| 2                                                   | 109.62      | 38.46 QP                | 43.50          | -5.04       | 1.00 V             | 109                  | 26.99            | 11.47                    |
| 3                                                   | 132.95      | 36.95 QP                | 43.50          | -6.55       | 1.00 V             | 223                  | 24.60            | 12.36                    |
| 4                                                   | 440.14      | 36.30 QP                | 46.00          | -9.70       | 1.00 V             | 55                   | 17.25            | 19.06                    |
| 5                                                   | 500.42      | 40.38 QP                | 46.00          | -5.62       | 1.25 V             | 19                   | 19.95            | 20.44                    |
| 6                                                   | 550.97      | 37.86 QP                | 46.00          | -8.14       | 1.75 V             | 253                  | 16.37            | 21.49                    |
| 7                                                   | 751.23      | 39.18 QP                | 46.00          | -6.82       | 1.25 V             | 4                    | 13.67            | 25.51                    |
| 8                                                   | 770.67      | 42.19 QP                | 46.00          | -3.81       | 1.00 V             | 235                  | 16.47            | 25.71                    |
| 9                                                   | 881.50      | 41.09 QP                | 46.00          | -4.91       | 1.00 V             | 175                  | 13.55            | 27.54                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

# 802.11a OFDM MODULATION (TURBO MODE)

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 152               | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER              | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | A                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 249.60      | 44.07 QP                | 46.00          | -1.93       | 1.00 H             | 100                  | 30.26            | 13.80                    |
| 2                                                   | 440.14      | 38.28 QP                | 46.00          | -7.72       | 1.75 H             | 184                  | 19.22            | 19.06                    |
| 3                                                   | 500.42      | 39.95 QP                | 46.00          | -6.05       | 1.25 H             | 226                  | 19.52            | 20.44                    |
| 4                                                   | 659.85      | 38.99 QP                | 46.00          | -7.01       | 1.00 H             | 181                  | 14.95            | 24.04                    |
| 5                                                   | 770.67      | 42.56 QP                | 46.00          | -3.44       | 1.50 H             | 154                  | 16.84            | 25.71                    |
| 6                                                   | 881.50      | 44.65 QP                | 46.00          | -1.35       | 1.25 H             | 184                  | 17.11            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 49.34       | 33.73 QP                | 40.00          | -6.27       | 1.00 V             | 37                   | 20.40            | 13.34                    |
| 2                                                   | 109.62      | 37.33 QP                | 43.50          | -6.17       | 1.00 V             | 142                  | 25.86            | 11.47                    |
| 3                                                   | 132.95      | 38.11 QP                | 43.50          | -5.39       | 1.00 V             | 208                  | 25.76            | 12.36                    |
| 4                                                   | 249.60      | 39.71 QP                | 46.00          | -6.29       | 1.50 V             | 154                  | 25.90            | 13.80                    |
| 5                                                   | 500.42      | 43.19 QP                | 46.00          | -2.81       | 1.00 V             | 16                   | 22.75            | 20.44                    |
| 6                                                   | 770.67      | 43.96 QP                | 46.00          | -2.04       | 1.75 V             | 118                  | 18.24            | 25.71                    |
| 7                                                   | 881.50      | 39.67 QP                | 46.00          | -6.33       | 1.00 V             | 157                  | 12.12            | 27.54                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

| EUT TEST CONDITION       |                           | MEASUREMENT DETAIL |               |
|--------------------------|---------------------------|--------------------|---------------|
| CHANNEL                  | Channel 152               | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER (SYSTEM)     | 120Vac, 60 Hz             | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 22deg. C, 67%RH<br>999hPa | TESTED BY          | Antony Lee    |
| TEST MODE                | B                         |                    |               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 329.32      | 38.02 QP                | 46.00          | -7.98       | 1.25 H             | 19                   | 22.99            | 15.03                    |
| 2                                                   | 440.14      | 41.42 QP                | 46.00          | -4.58       | 1.75 H             | 340                  | 22.37            | 19.06                    |
| 3                                                   | 500.42      | 42.17 QP                | 46.00          | -3.83       | 1.50 H             | 151                  | 21.74            | 20.44                    |
| 4                                                   | 659.85      | 39.08 QP                | 46.00          | -6.92       | 1.00 H             | 169                  | 15.04            | 24.04                    |
| 5                                                   | 770.67      | 40.59 QP                | 46.00          | -5.41       | 1.50 H             | 193                  | 14.88            | 25.71                    |
| 6                                                   | 881.50      | 44.15 QP                | 46.00          | -1.85       | 2.25 H             | 157                  | 16.61            | 27.54                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 43.51       | 34.26 QP                | 40.00          | -5.74       | 1.25 V             | 250                  | 19.75            | 14.51                    |
| 2                                                   | 109.62      | 38.52 QP                | 43.50          | -4.98       | 1.25 V             | 100                  | 27.05            | 11.47                    |
| 3                                                   | 132.95      | 37.62 QP                | 43.50          | -5.88       | 1.00 V             | 64                   | 25.27            | 12.36                    |
| 4                                                   | 519.86      | 41.79 QP                | 46.00          | -4.21       | 1.00 V             | 10                   | 20.95            | 20.84                    |
| 5                                                   | 751.23      | 39.10 QP                | 46.00          | -6.90       | 1.25 V             | 1                    | 13.59            | 25.51                    |
| 6                                                   | 770.67      | 41.26 QP                | 46.00          | -4.74       | 1.25 V             | 235                  | 15.55            | 25.71                    |
| 7                                                   | 881.50      | 39.31 QP                | 46.00          | -6.69       | 1.00 V             | 19                   | 11.76            | 27.54                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

## 5.2 CONDUCTED EMISSION MEASUREMENT

### 5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15 ~ 0.5                  | 66 to 56                     | 56 to 46 |
| 0.5 ~ 5                     | 56                           | 46       |
| 5 ~ 30                      | 60                           | 50       |

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 5.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER       | MODEL NO.        | SERIAL NO.     | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------------|------------------|----------------|---------------------|-------------------------|
| Test Receiver<br>ROHDE & SCHWARZ | ESCS30           | 100291         | Nov. 19, 2008       | Nov. 18, 2009           |
| RF signal cable<br>Woken         | 5D-FB            | Cable-HYC01-01 | Dec. 31, 2008       | Dec. 30, 2009           |
| LISN<br>ROHDE & SCHWARZ          | ESH3-Z5          | 100312         | Jun. 13, 2008       | Jun. 12, 2009           |
| LISN<br>ROHDE & SCHWARZ          | ESH2-Z5          | 100104         | Dec. 04, 2008       | Dec. 03, 2009           |
| Software<br>ADT                  | ADT_Conc_ V7.3.7 | NA             | NA                  | NA                      |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

### 5.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 5.2.5 TEST SETUP

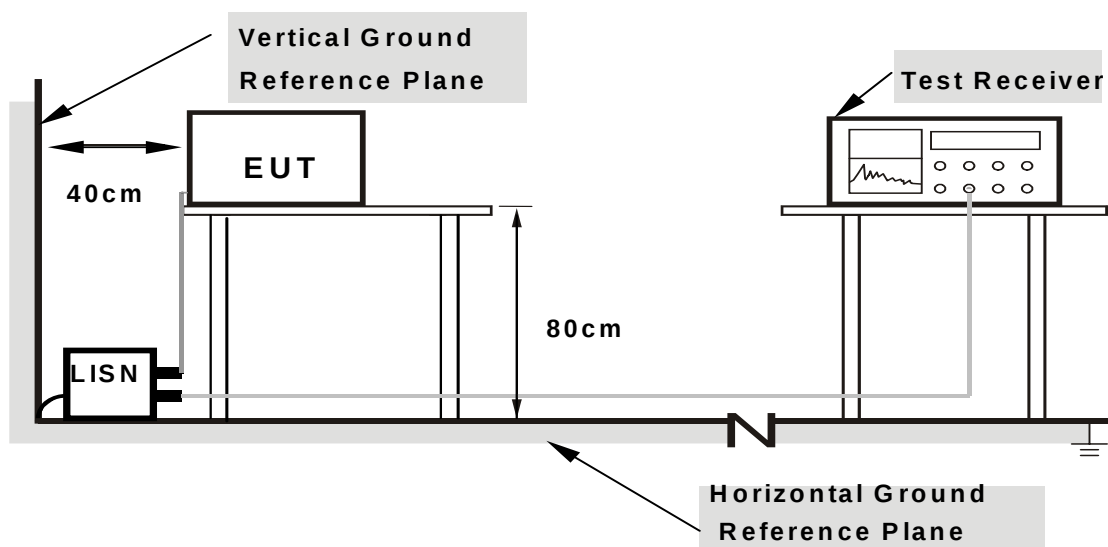

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


## 5.2.7 TEST RESULTS

### CONDUCTED WORST-CASE DATA: 802.11a OFDM MODULATION (NORMAL MODE):

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 157             | PHASE              | Line 1        |
| MODULATION TYPE          | BPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiu               |                    |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
| 1  | 0.162          | 0.13                    | 41.66                      | -   | 41.79                       | -   | 65.38              | 55.38 | -23.59         | -   |
| 2  | 0.177          | 0.13                    | 39.30                      | -   | 39.43                       | -   | 64.61              | 54.61 | -25.18         | -   |
| 3  | 0.205          | 0.13                    | 36.81                      | -   | 36.94                       | -   | 63.42              | 53.42 | -26.48         | -   |
| 4  | 0.427          | 0.14                    | 33.80                      | -   | 33.94                       | -   | 57.30              | 47.30 | -23.36         | -   |
| 5  | 3.504          | 0.34                    | 28.35                      | -   | 28.69                       | -   | 56.00              | 46.00 | -27.31         | -   |
| 6  | 20.379         | 1.16                    | 26.26                      | -   | 27.42                       | -   | 60.00              | 50.00 | -32.58         | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

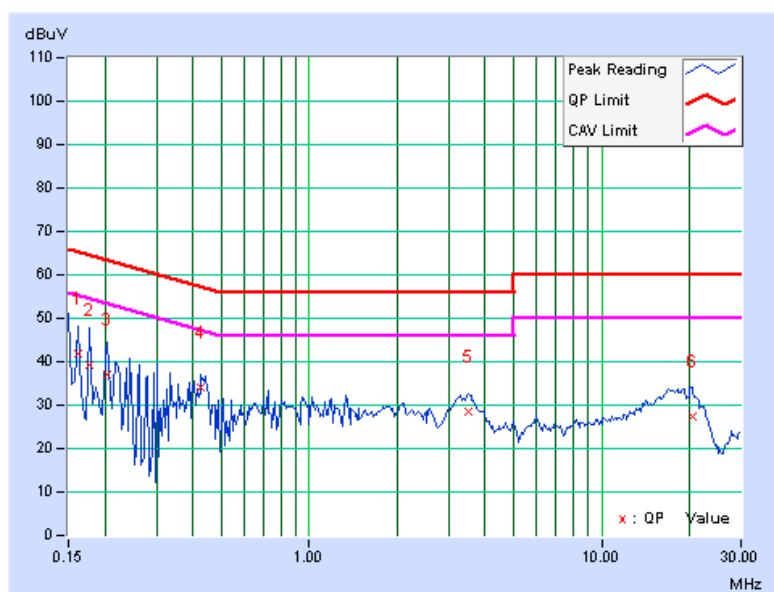

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 157             | PHASE              | Line 2        |
| MODULATION TYPE          | BPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiui              |                    |               |

|    | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| No |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.158  | 0.14   | 42.27         | -   | 42.41          | -   | 65.58     | 55.58 | -23.17 | -   |
| 2  | 0.170  | 0.14   | 40.62         | -   | 40.76          | -   | 64.98     | 54.98 | -24.22 | -   |
| 3  | 0.216  | 0.15   | 35.15         | -   | 35.30          | -   | 62.96     | 52.96 | -27.65 | -   |
| 4  | 0.423  | 0.16   | 35.00         | -   | 35.16          | -   | 57.38     | 47.38 | -22.22 | -   |
| 5  | 3.816  | 0.38   | 27.43         | -   | 27.81          | -   | 56.00     | 46.00 | -28.19 | -   |
| 6  | 18.738 | 0.94   | 26.13         | -   | 27.07          | -   | 60.00     | 50.00 | -32.93 | -   |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

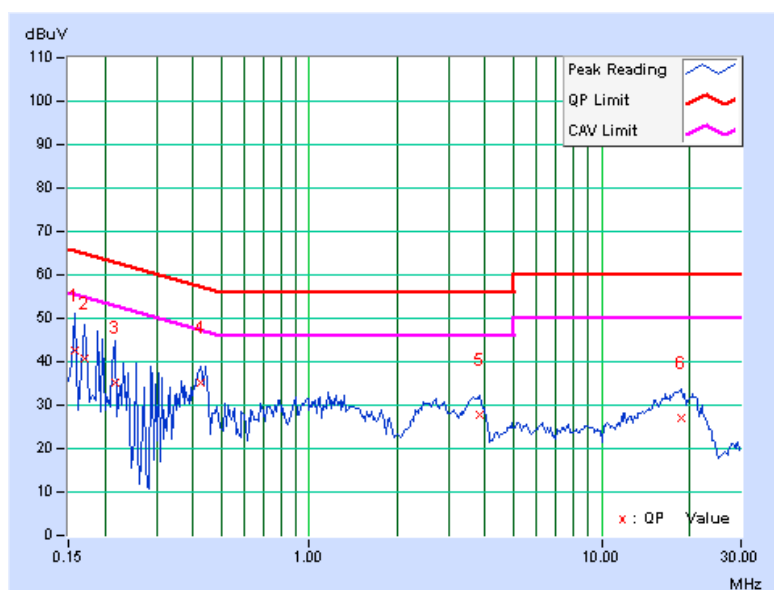

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 157             | PHASE                | Line 1        |
| MODULATION TYPE          | BPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiu               |                      |               |

|    | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| No |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.255  | 0.13   | 35.94         | -   | 36.07          | -   | 61.58     | 51.58 | -25.50 | -   |
| 2  | 0.400  | 0.14   | 25.74         | -   | 25.88          | -   | 57.85     | 47.85 | -31.97 | -   |
| 3  | 0.545  | 0.15   | 27.73         | -   | 27.88          | -   | 56.00     | 46.00 | -28.12 | -   |
| 4  | 2.859  | 0.29   | 26.75         | -   | 27.04          | -   | 56.00     | 46.00 | -28.96 | -   |
| 5  | 10.250 | 0.67   | 27.15         | -   | 27.82          | -   | 60.00     | 50.00 | -32.18 | -   |
| 6  | 23.809 | 1.20   | 20.36         | -   | 21.56          | -   | 60.00     | 50.00 | -38.44 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

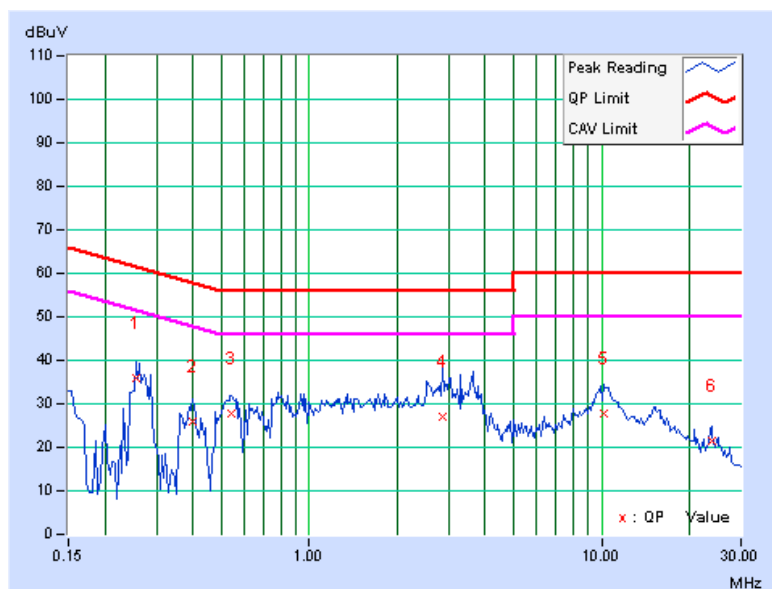

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 157             | PHASE                | Line 2        |
| MODULATION TYPE          | BPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 6.0Mbps                 | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiui              |                      |               |

|    | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| No |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.154  | 0.14   | 29.93         | -   | 30.07          | -   | 65.79     | 55.79 | -35.72 | -   |
| 2  | 0.283  | 0.15   | 30.21         | -   | 30.36          | -   | 60.73     | 50.73 | -30.37 | -   |
| 3  | 0.417  | 0.16   | 25.59         | -   | 25.75          | -   | 57.51     | 47.51 | -31.75 | -   |
| 4  | 3.016  | 0.32   | 30.81         | -   | 31.13          | -   | 56.00     | 46.00 | -24.87 | -   |
| 5  | 10.730 | 0.68   | 26.15         | -   | 26.83          | -   | 60.00     | 50.00 | -33.17 | -   |
| 6  | 15.004 | 0.82   | 21.29         | -   | 22.11          | -   | 60.00     | 50.00 | -37.89 | -   |

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

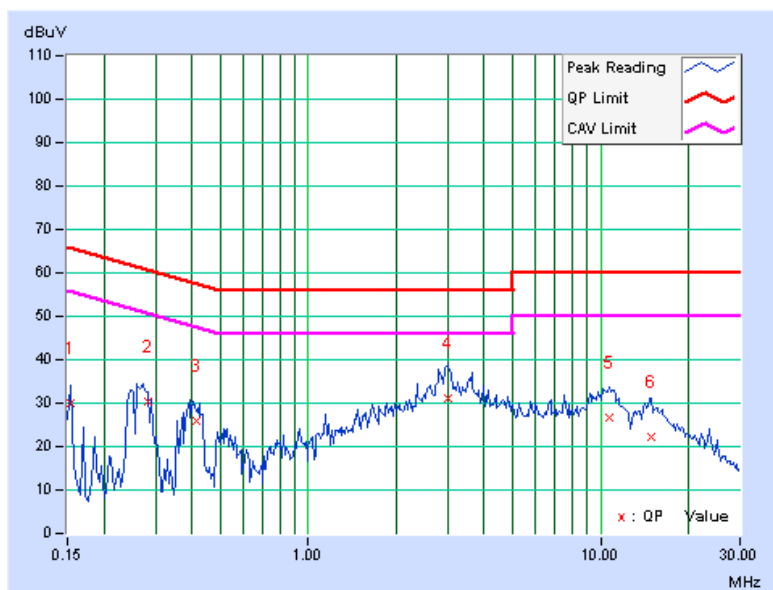


# 802.11a OFDM MODULATION (TURBO MODE)

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 152             | PHASE              | Line 1        |
| MODULATION TYPE          | QPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiu               |                    |               |

|    | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| No |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.154  | 0.13   | 42.47         | -   | 42.60          | -   | 65.79     | 55.79 | -23.19 | -   |
| 2  | 0.189  | 0.13   | 38.14         | -   | 38.27          | -   | 64.08     | 54.08 | -25.81 | -   |
| 3  | 0.213  | 0.13   | 36.72         | -   | 36.85          | -   | 63.11     | 53.11 | -26.26 | -   |
| 4  | 0.435  | 0.14   | 30.27         | -   | 30.41          | -   | 57.15     | 47.15 | -26.74 | -   |
| 5  | 3.754  | 0.35   | 24.97         | -   | 25.32          | -   | 56.00     | 46.00 | -30.68 | -   |
| 6  | 20.598 | 1.16   | 19.24         | -   | 20.40          | -   | 60.00     | 50.00 | -39.60 | -   |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

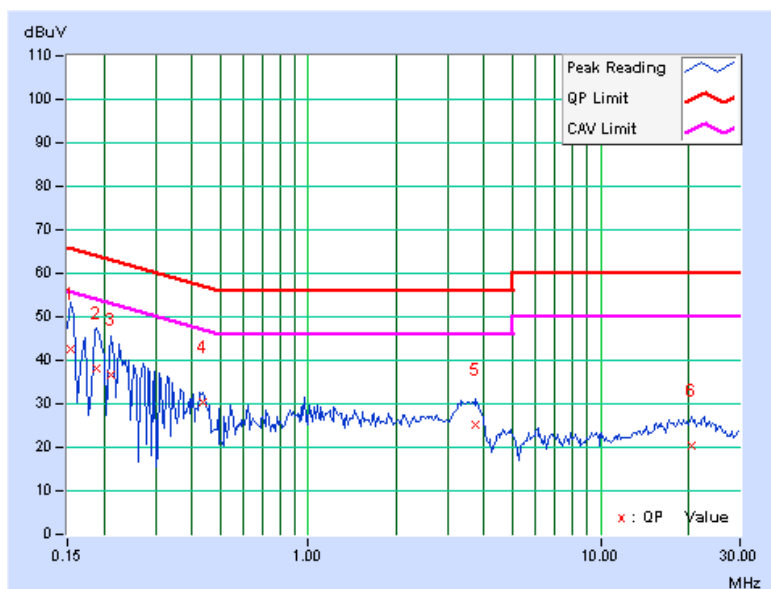

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL |               |
|--------------------------|-------------------------|--------------------|---------------|
| CHANNEL                  | Channel 152             | PHASE              | Line 2        |
| MODULATION TYPE          | QPSK                    | INPUT POWER        | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH      | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE          | A             |
| TESTED BY                | Lori Chiui              |                    |               |

|    | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| No |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.166  | 0.14   | 40.88         | -   | 41.02          | -   | 65.18     | 55.18 | -24.15 | -   |
| 2  | 0.181  | 0.15   | 38.96         | -   | 39.11          | -   | 64.43     | 54.43 | -25.32 | -   |
| 3  | 0.224  | 0.15   | 34.63         | -   | 34.78          | -   | 62.66     | 52.66 | -27.88 | -   |
| 4  | 0.427  | 0.16   | 32.04         | -   | 32.20          | -   | 57.30     | 47.30 | -25.10 | -   |
| 5  | 3.813  | 0.38   | 25.30         | -   | 25.68          | -   | 56.00     | 46.00 | -30.32 | -   |
| 6  | 14.809 | 0.81   | 15.60         | -   | 16.41          | -   | 60.00     | 50.00 | -43.59 | -   |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

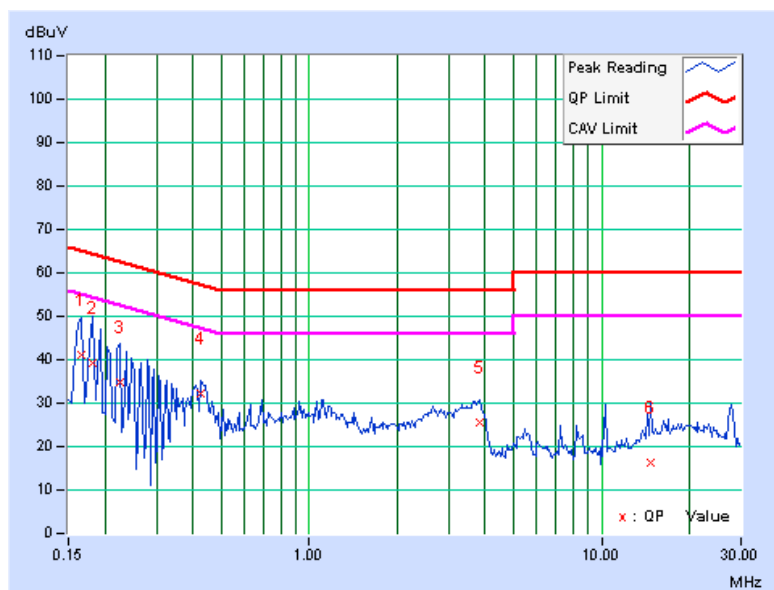

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 152             | PHASE                | Line 1        |
| MODULATION TYPE          | QPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiu               |                      |               |

|    | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| No |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.255  | 0.13   | 35.67         | -   | 35.80          | -   | 61.58     | 51.58 | -25.77 | -   |
| 2  | 0.408  | 0.14   | 25.09         | -   | 25.23          | -   | 57.69     | 47.69 | -32.46 | -   |
| 3  | 0.521  | 0.15   | 27.91         | -   | 28.06          | -   | 56.00     | 46.00 | -27.94 | -   |
| 4  | 3.613  | 0.34   | 28.74         | -   | 29.08          | -   | 56.00     | 46.00 | -26.92 | -   |
| 5  | 10.195 | 0.67   | 27.84         | -   | 28.51          | -   | 60.00     | 50.00 | -31.49 | -   |
| 6  | 23.816 | 1.20   | 20.02         | -   | 21.22          | -   | 60.00     | 50.00 | -38.78 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

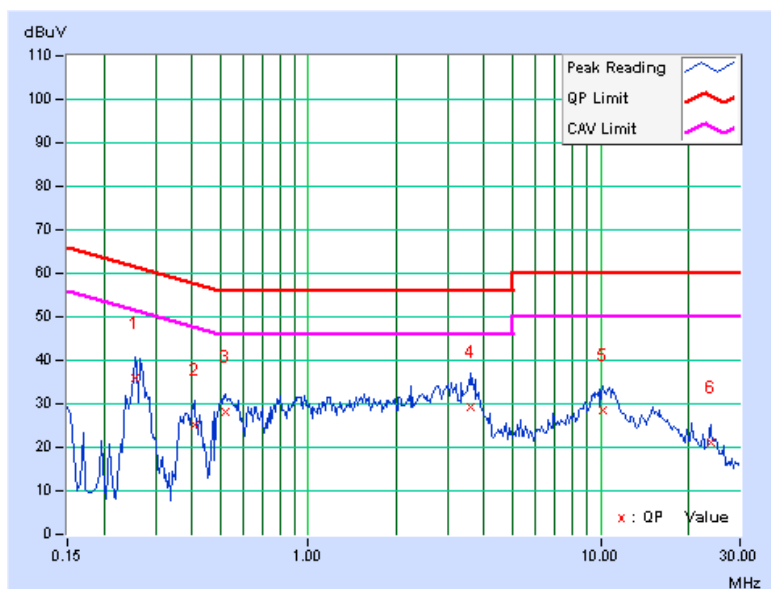

| EUT TEST CONDITION       |                         | MEASUREMENT DETAIL   |               |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL                  | Channel 152             | PHASE                | Line 2        |
| MODULATION TYPE          | QPSK                    | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE            | 12.0Mbps                | 6dB BANDWIDTH        | 9kHz          |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa | TEST MODE            | B             |
| TESTED BY                | Lori Chiui              |                      |               |

|    | Freq.  | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| No |        | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    | [MHz]  | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.252  | 0.15   | 31.39         | -   | 31.54          | -   | 61.71     | 51.71 | -30.16 | -   |
| 2  | 0.380  | 0.16   | 26.35         | -   | 26.51          | -   | 58.27     | 48.27 | -31.76 | -   |
| 3  | 0.513  | 0.17   | 20.17         | -   | 20.34          | -   | 56.00     | 46.00 | -35.66 | -   |
| 4  | 2.508  | 0.29   | 26.44         | -   | 26.73          | -   | 56.00     | 46.00 | -29.27 | -   |
| 5  | 10.566 | 0.68   | 27.17         | -   | 27.85          | -   | 60.00     | 50.00 | -32.15 | -   |
| 6  | 20.633 | 0.97   | 15.60         | -   | 16.57          | -   | 60.00     | 50.00 | -43.43 | -   |

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

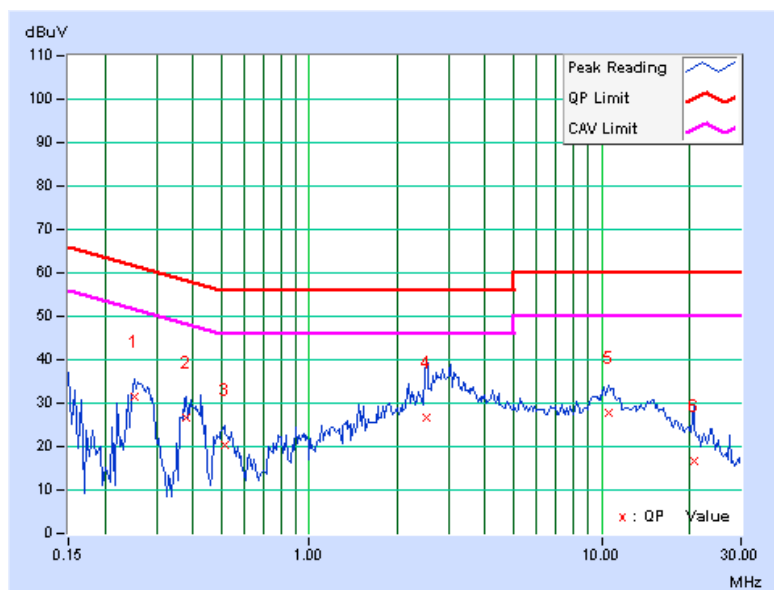

### 5.3 6dB BANDWIDTH MEASUREMENT

#### 5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

#### 5.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | CALIBRATED UNTIL |
|----------------------------|-----------|------------|---------------------|------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100040     | Jul. 04, 2008       | Jul. 03, 2009    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.3.5 TEST SETUP



#### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


### 5.3.7 TEST RESULTS

#### 802.11a OFDM MODULATION (NORMAL MODE):

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | BPSK         | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 149     | 5745                    | 16.48               | 0.5                 | PASS        |
| 157     | 5785                    | 16.48               | 0.5                 | PASS        |
| 165     | 5825                    | 16.49               | 0.5                 | PASS        |


#### CH 149

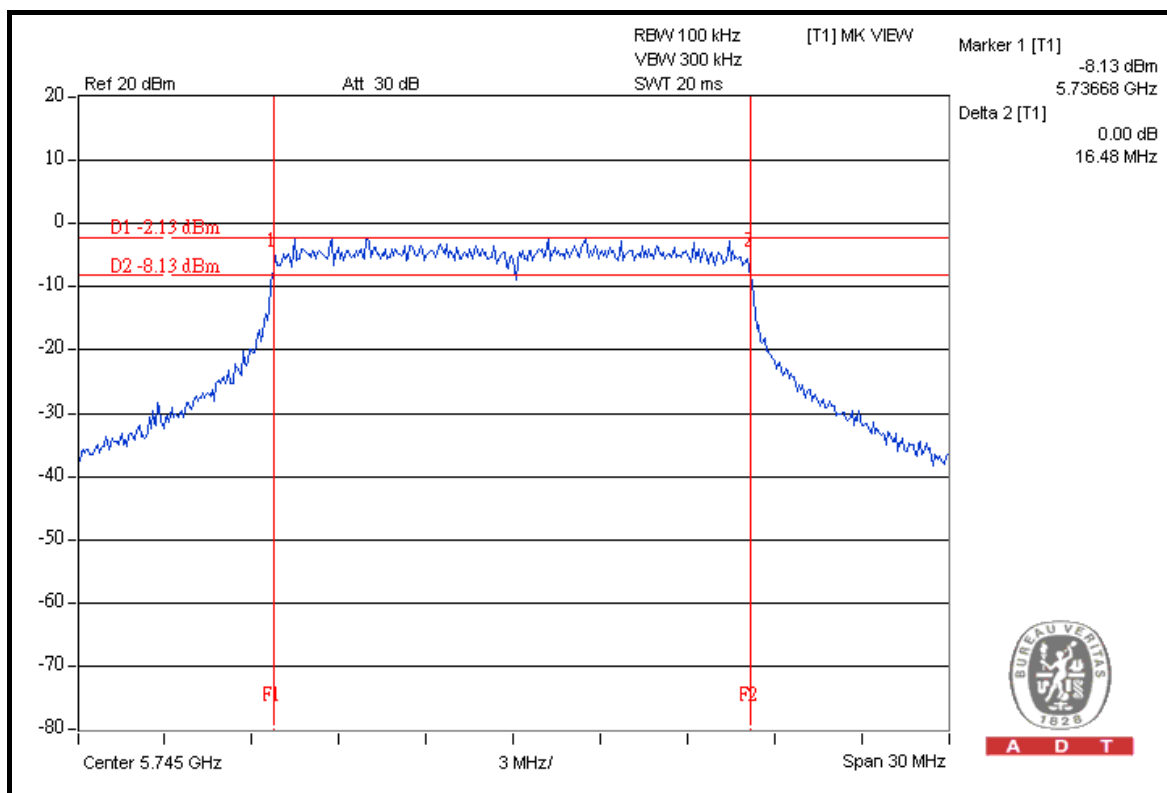




A D T

## CH 157

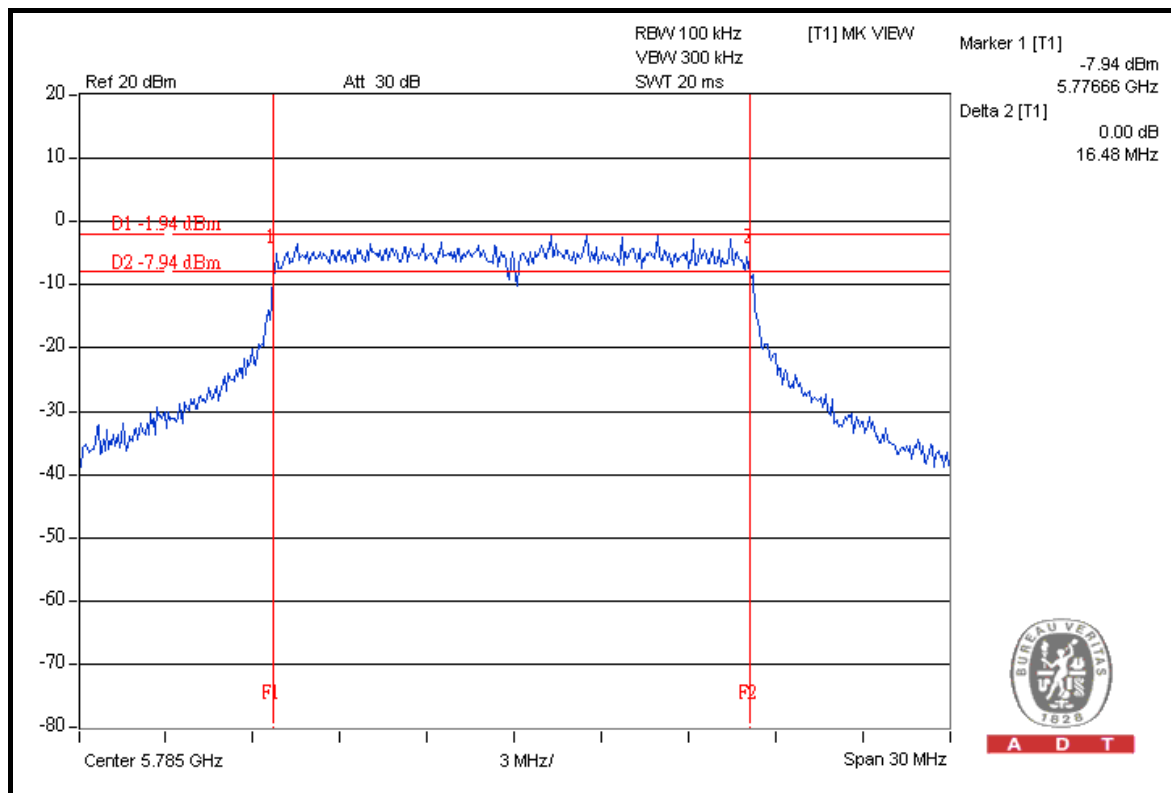

## CH 165

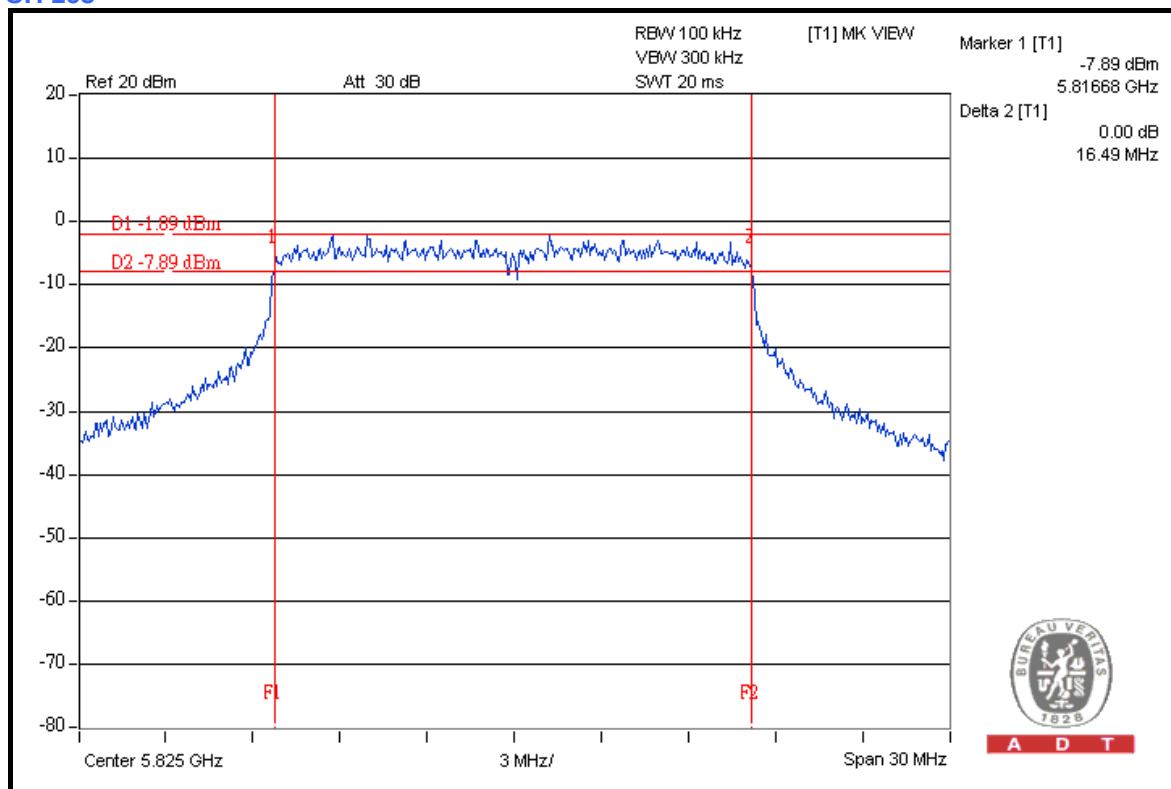

### 802.11a OFDM MODULATION (TURBO MODE):


|                        |              |                                 |                        |
|------------------------|--------------|---------------------------------|------------------------|
| <b>MODULATION TYPE</b> | QPSK         | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 991hPa |
| <b>INPUT POWER</b>     | 120Vac, 60Hz | <b>TEST MODE</b>                | A                      |
| <b>TESTED BY</b>       | Brad Wu      |                                 |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 157     | 5760                    | 32.68               | 0.5                 | PASS        |
| 165     | 5800                    | 32.55               | 0.5                 | PASS        |




A D T

## CH 152

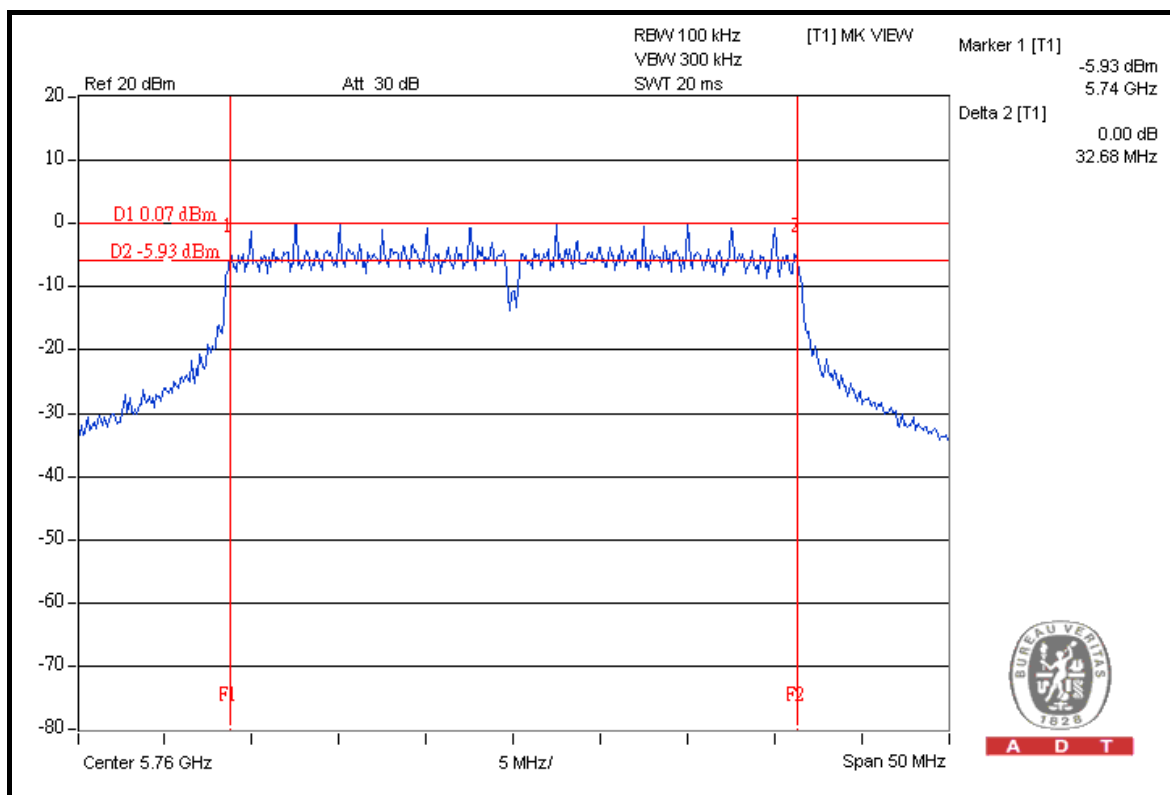

## CH 160

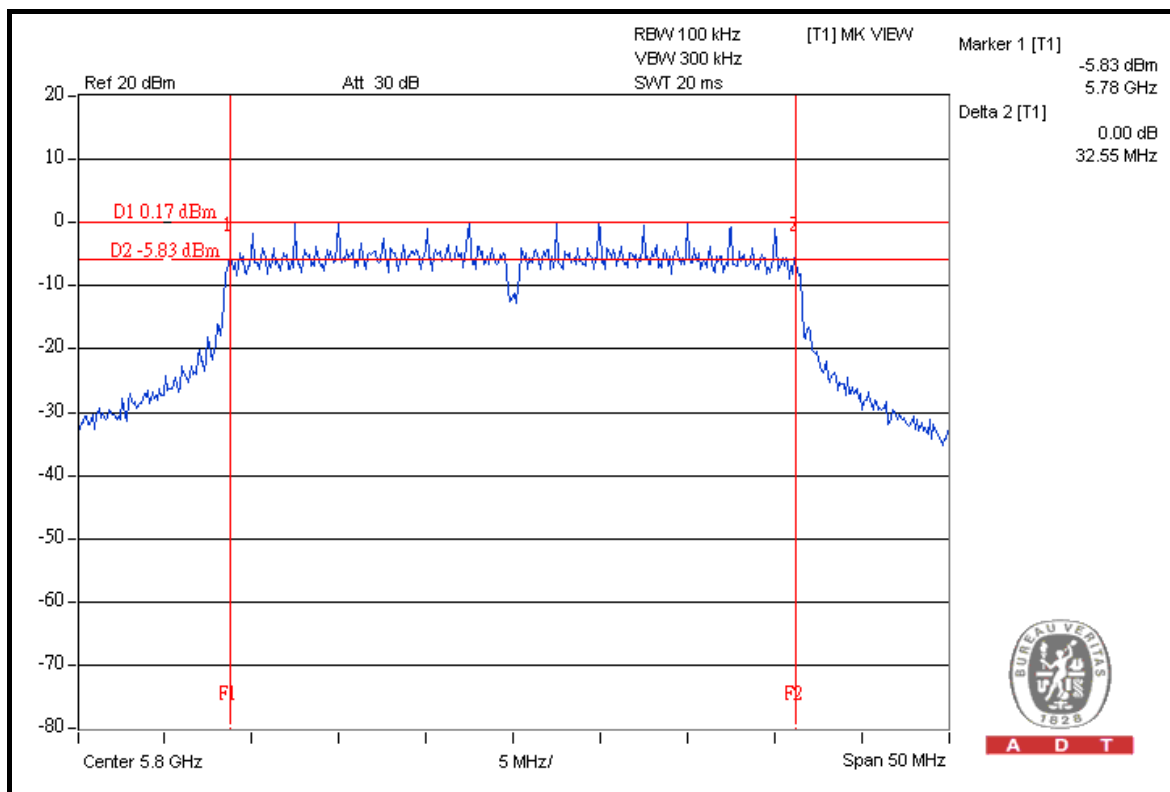

## 5.4 MAXIMUM PEAK OUTPUT POWER

### 5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 5.4.2 INSTRUMENTS

| DESCRIPTION & MANUFACTURER  | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | CALIBRATED UNTIL |
|-----------------------------|-----------|------------|---------------------|------------------|
| High Speed Peak Power Meter | ML2495A   | 0824012    | Aug. 04, 2008       | Aug. 03, 2009    |
| Power Sensor                | MA2411B   | 0738138    | Aug. 04, 2008       | Aug. 03, 2009    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


### 5.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.4.5 TEST SETUP

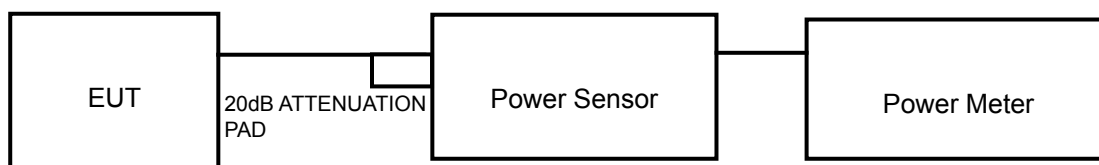

### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6.

## 5.4.7 TEST RESULTS

### 802.11a OFDM MODULATION (NORMAL MODE):

|                        |              |                                 |                        |
|------------------------|--------------|---------------------------------|------------------------|
| <b>MODULATION TYPE</b> | BPSK         | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 991hPa |
| <b>INPUT POWER</b>     | 120Vac, 60Hz | <b>TEST MODE</b>                | A                      |
| <b>TESTED BY</b>       | Brad Wu      |                                 |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 149     | 5745                    | 100.462                | 20.02                   | 30                     | PASS        |
| 157     | 5785                    | 102.094                | 20.09                   | 30                     | PASS        |
| 165     | 5825                    | 100.925                | 20.04                   | 30                     | PASS        |

### 802.11a OFDM MODULATION (TURBO MODE):

|                        |              |                                 |                        |
|------------------------|--------------|---------------------------------|------------------------|
| <b>MODULATION TYPE</b> | QPSK         | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 991hPa |
| <b>INPUT POWER</b>     | 120Vac, 60Hz | <b>TEST MODE</b>                | A                      |
| <b>TESTED BY</b>       | Brad Wu      |                                 |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 152     | 5760                    | 102.329                | 20.10                   | 30                     | PASS        |
| 160     | 5800                    | 101.391                | 20.06                   | 30                     | PASS        |

## 5.5 POWER SPECTRAL DENSITY MEASUREMENT

### 5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 5.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | CALIBRATED UNTIL |
|----------------------------|-----------|------------|---------------------|------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100040     | Jul. 04, 2008       | Jul. 03, 2009    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

#### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 5.5.5 TEST SETUP



#### 5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6.



A D T


## 5.5.7 TEST RESULTS

### 802.11a OFDM MODULATION (NORMAL MODE):

|                 |              |                          |                        |
|-----------------|--------------|--------------------------|------------------------|
| MODULATION TYPE | BPSK         | ENVIRONMENTAL CONDITIONS | 25deg.C, 65%RH, 991hPa |
| INPUT POWER     | 120Vac, 60Hz | TEST MODE                | A                      |
| TESTED BY       | Brad Wu      |                          |                        |

| CHANNEL | CHANNEL FREQUENCY (MHz ) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|--------------------------|---------------------------------|---------------------|-------------|
| 149     | 5745                     | -9.07                           | 8                   | PASS        |
| 157     | 5785                     | -9.10                           | 8                   | PASS        |
| 165     | 5825                     | -9.17                           | 8                   | PASS        |


### CH 149

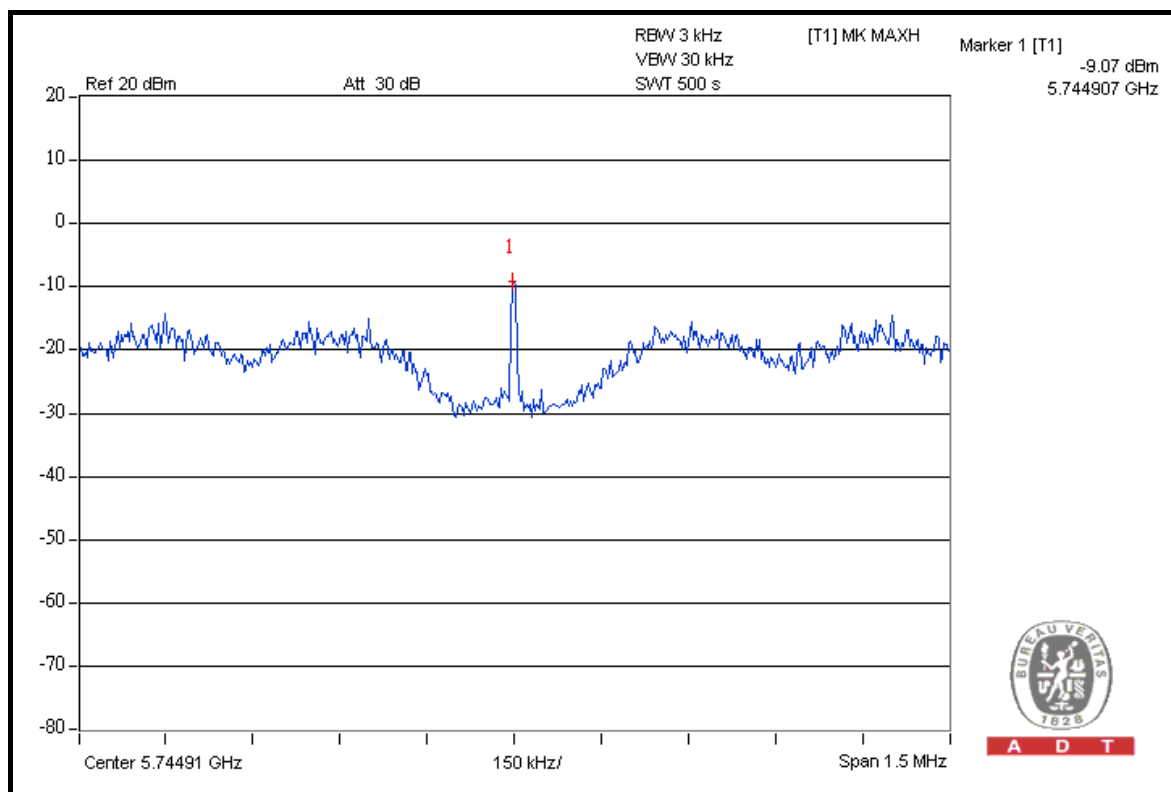




A D T

## CH 157

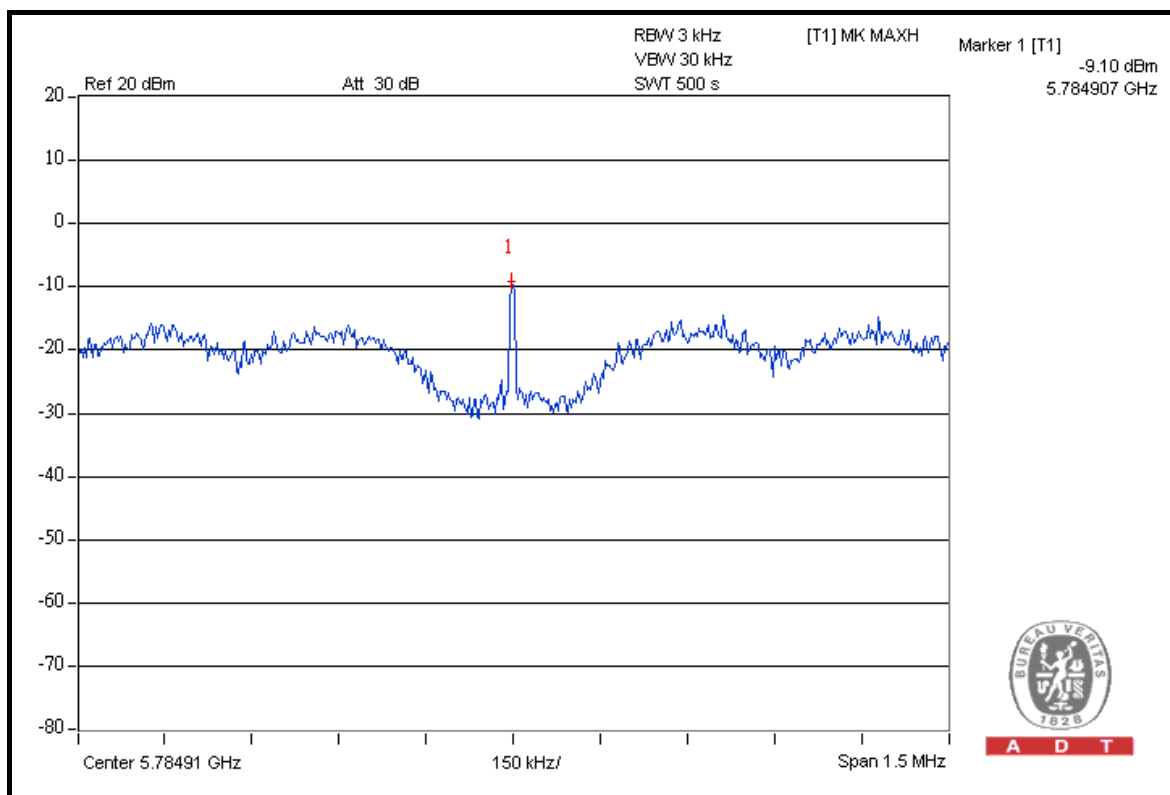

## CH 165

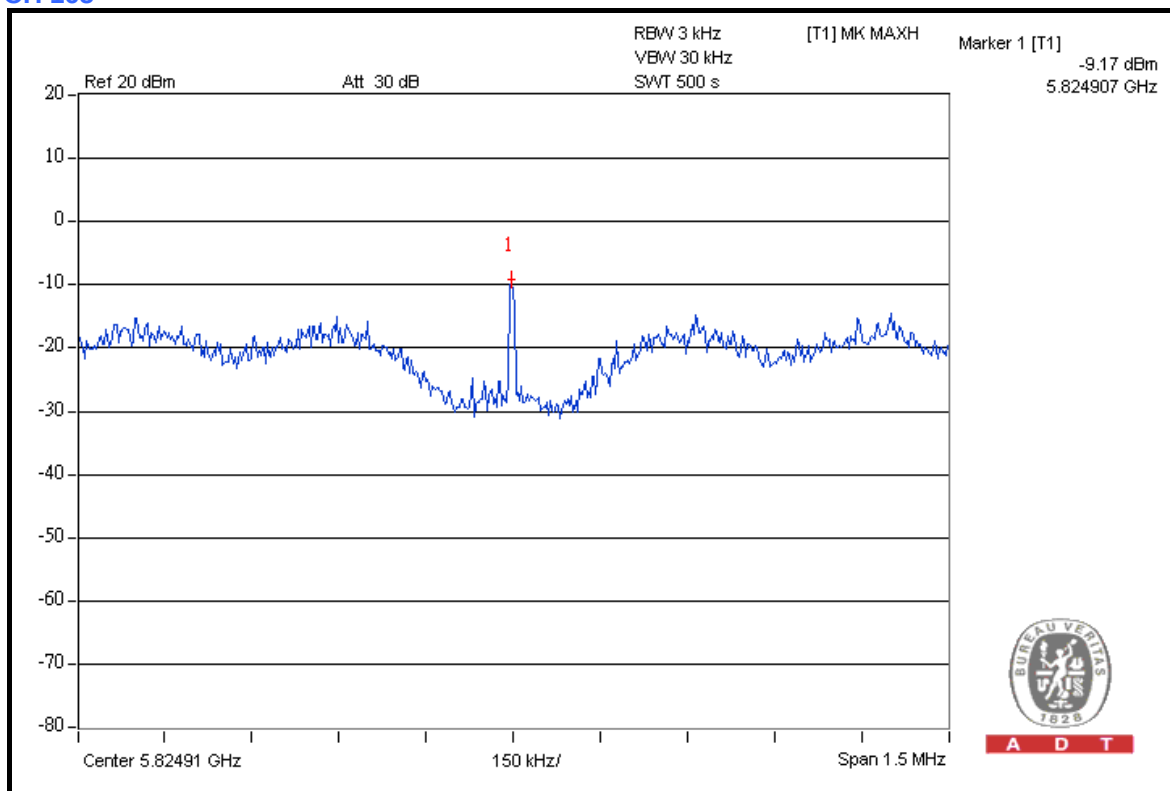

**A D T****802.11a OFDM MODULATION (TRUBO MODE):**


|                        |              |                                 |                        |
|------------------------|--------------|---------------------------------|------------------------|
| <b>MODULATION TYPE</b> | QPSK         | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 991hPa |
| <b>INPUT POWER</b>     | 120Vac, 60Hz | <b>TEST MODE</b>                | A                      |
| <b>TESTED BY</b>       | Brad Wu      |                                 |                        |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz )</b> | <b>RF POWER LEVEL IN 3kHz BW (dBm)</b> | <b>MAXIMUM LIMIT (dBm)</b> | <b>PASS / FAIL</b> |
|----------------|---------------------------------|----------------------------------------|----------------------------|--------------------|
| 152            | 5760                            | -17.13                                 | 8                          | PASS               |
| 160            | 5800                            | -16.89                                 | 8                          | PASS               |




A D T

## CH 152

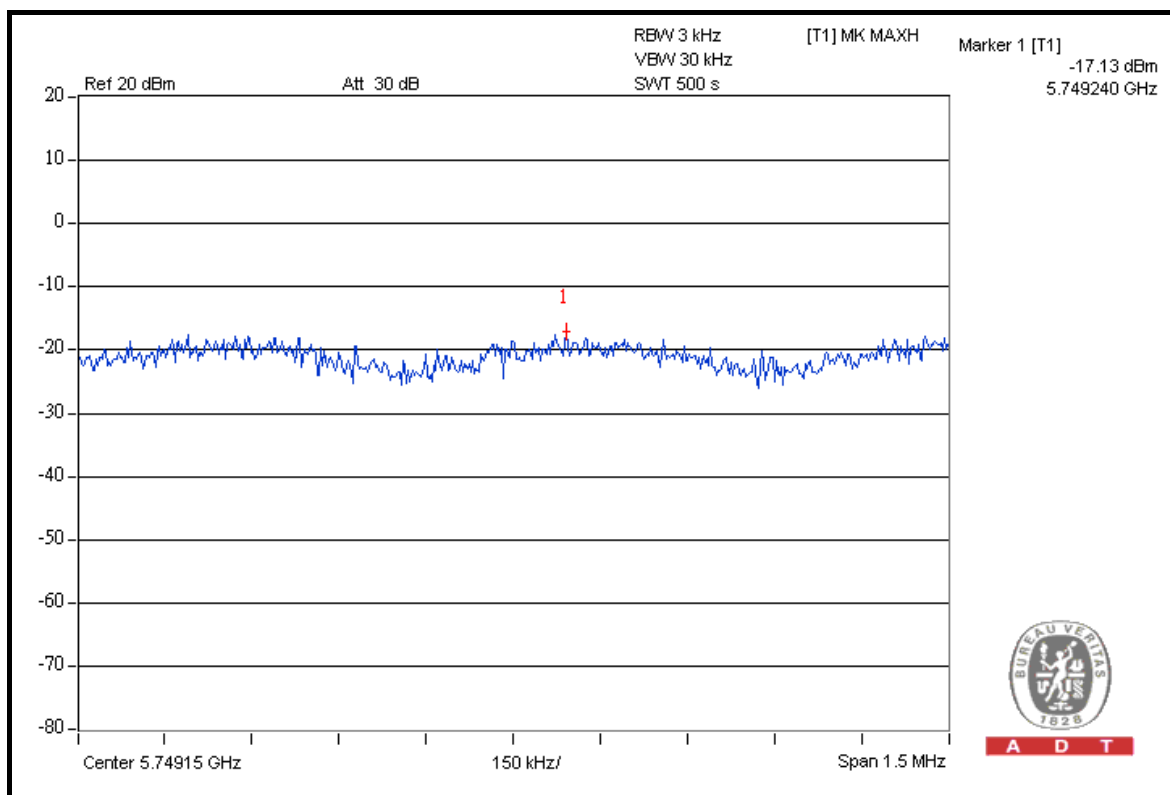

## CH 160

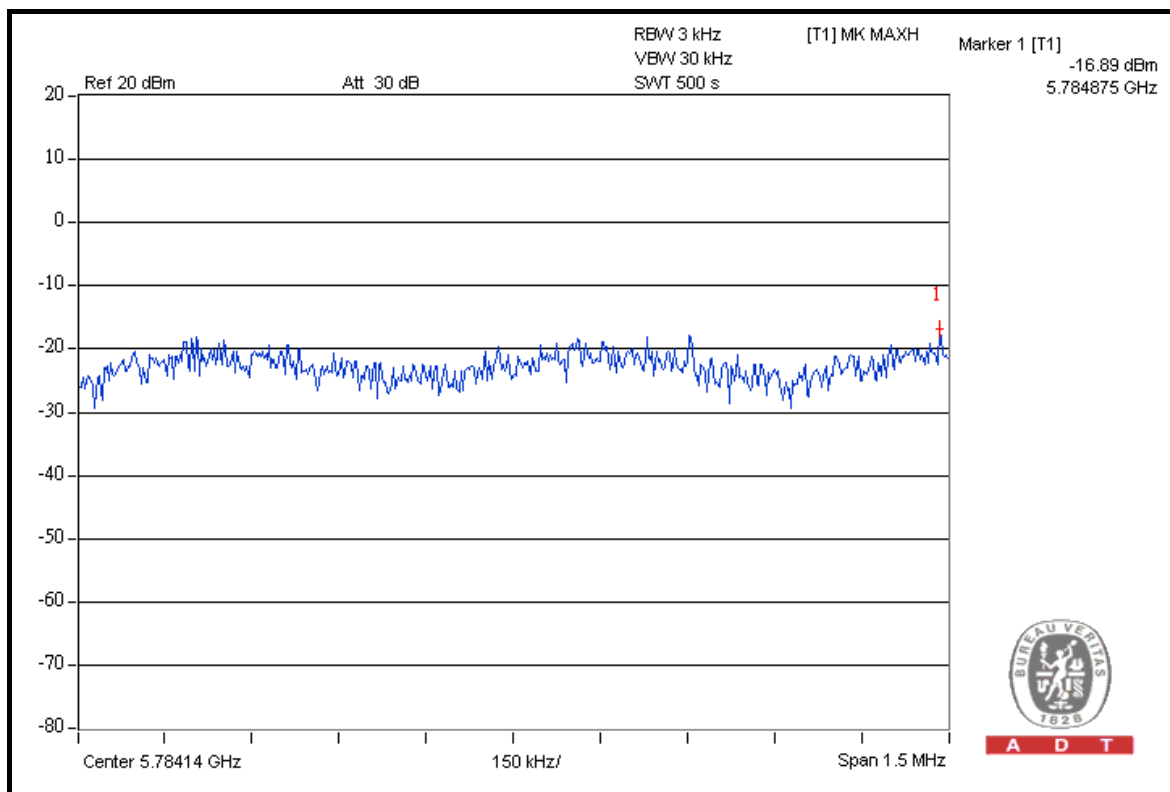

## 5.6 BAND EDGES MEASUREMENT

### 5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | CALIBRATED UNTIL |
|----------------------------|-----------|------------|---------------------|------------------|
| R&S SPECTRUM ANALYZER      | FSP40     | 100040     | Jul. 04, 2008       | Jul. 03, 2009    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.6.5 EUT OPERATING CONDITION

Same as Item 5.3.6.



### 5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).





A D T

## 802.11a OFDM MODULATION (NORMAL MODE):

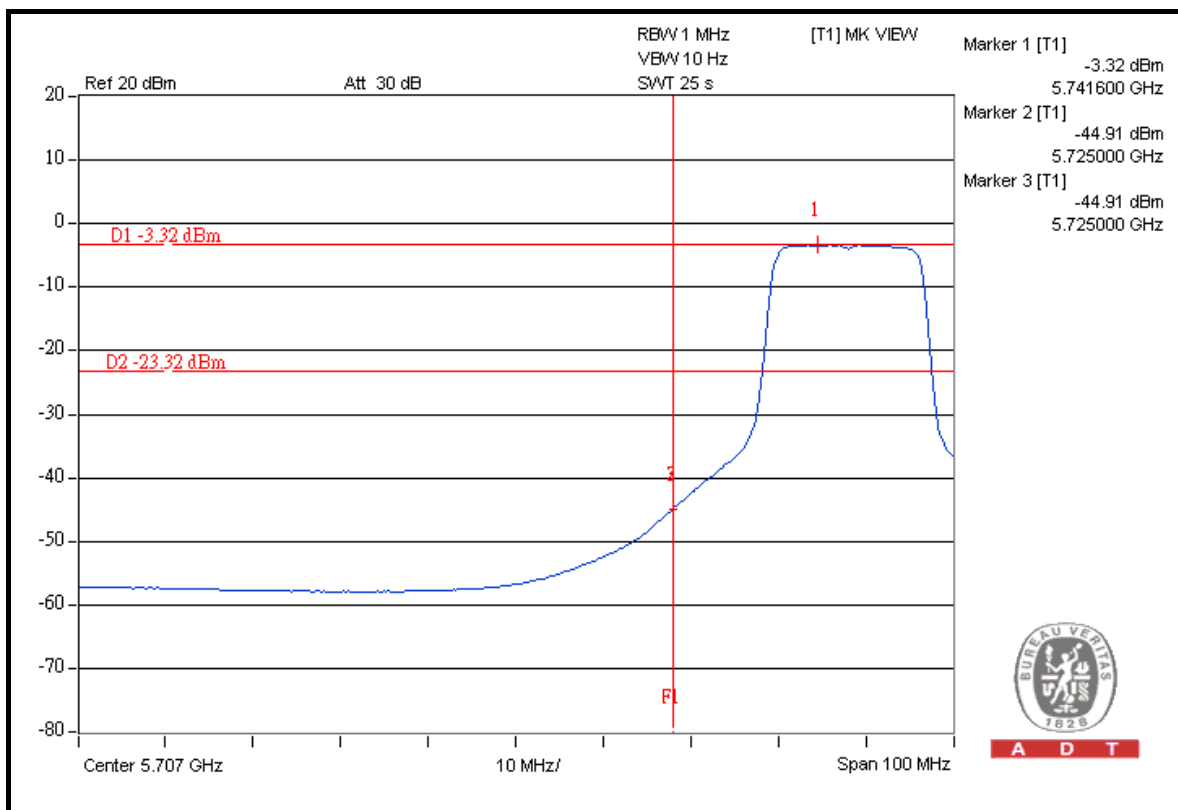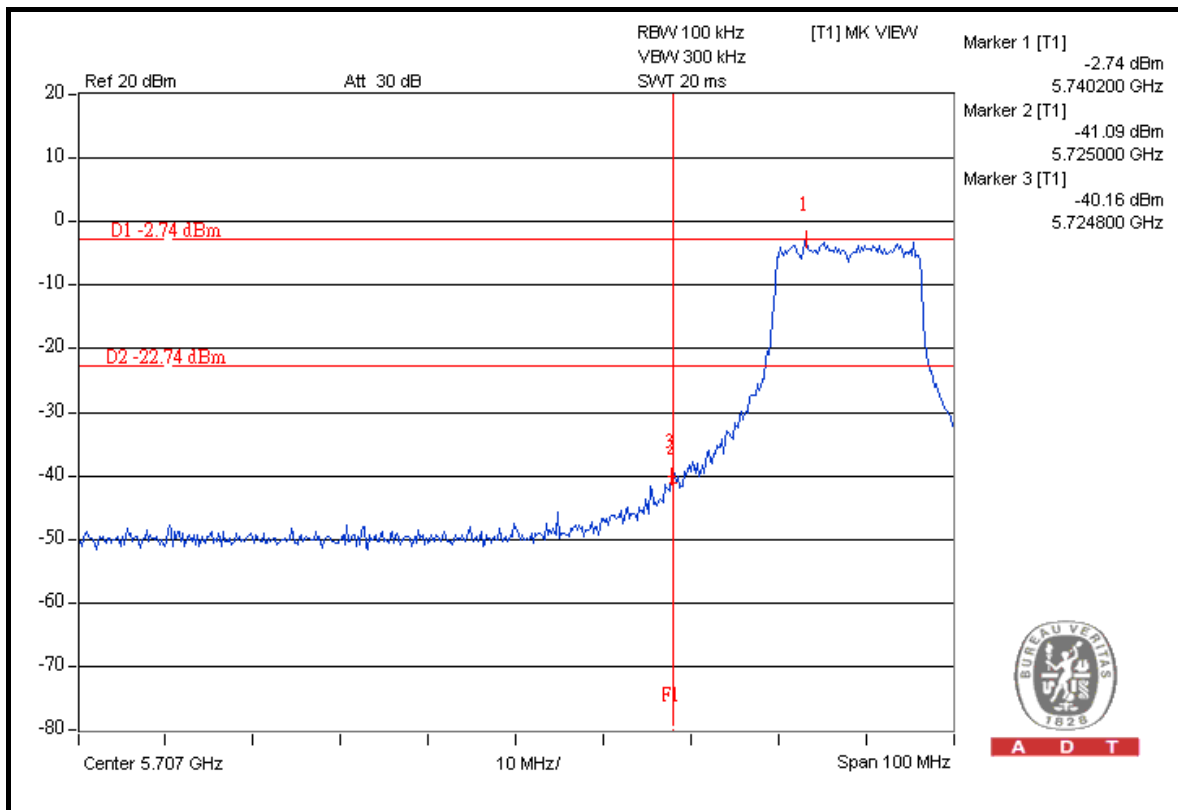





A D T

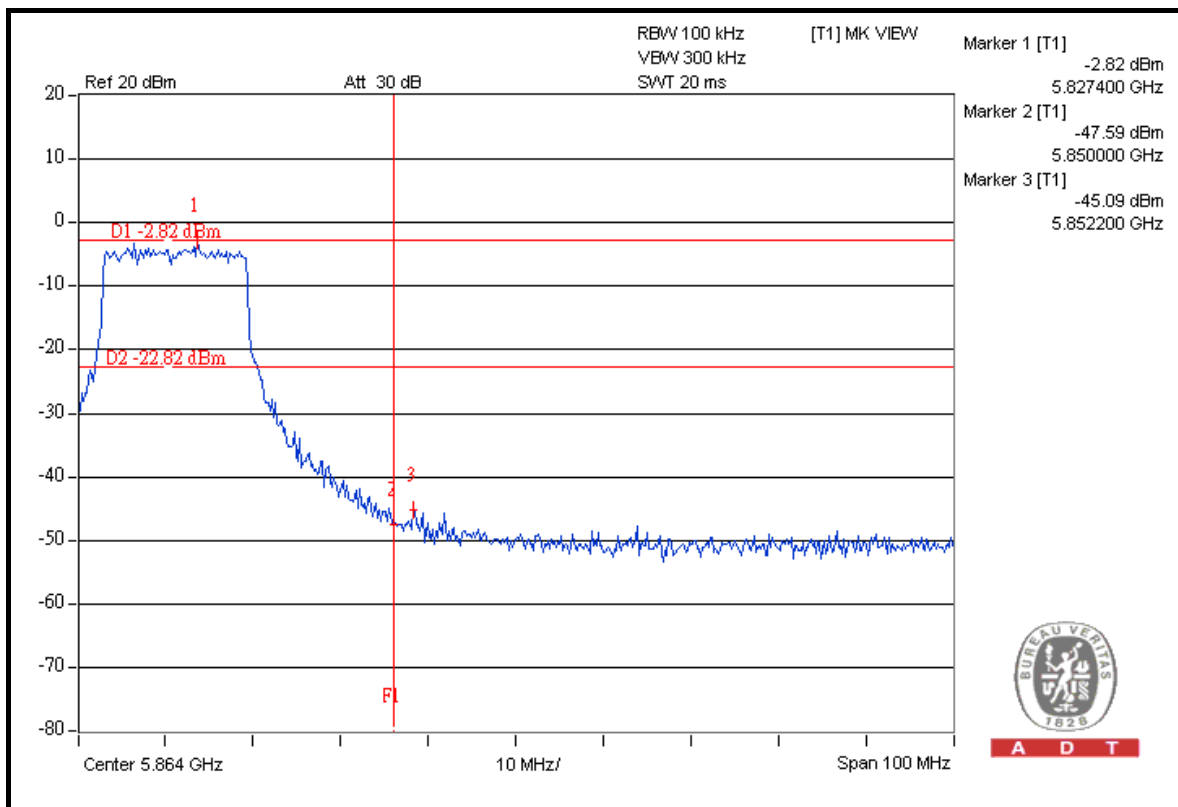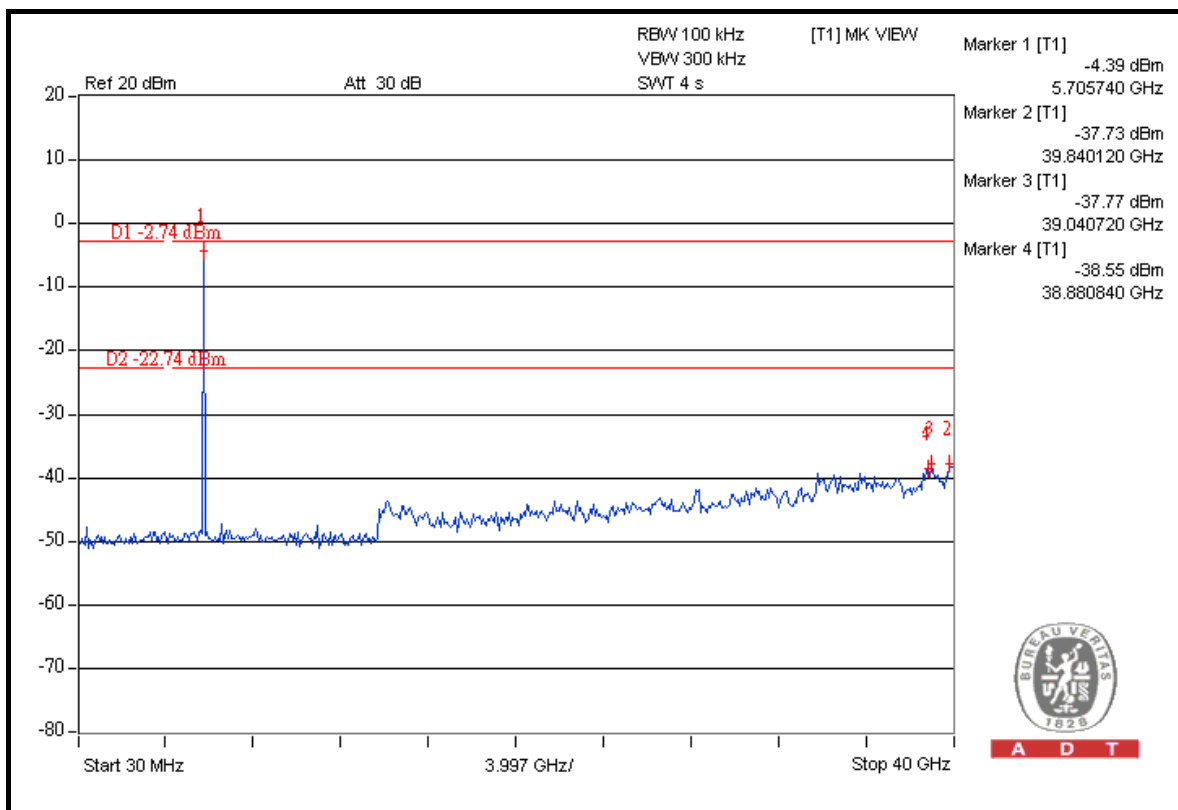



A D T

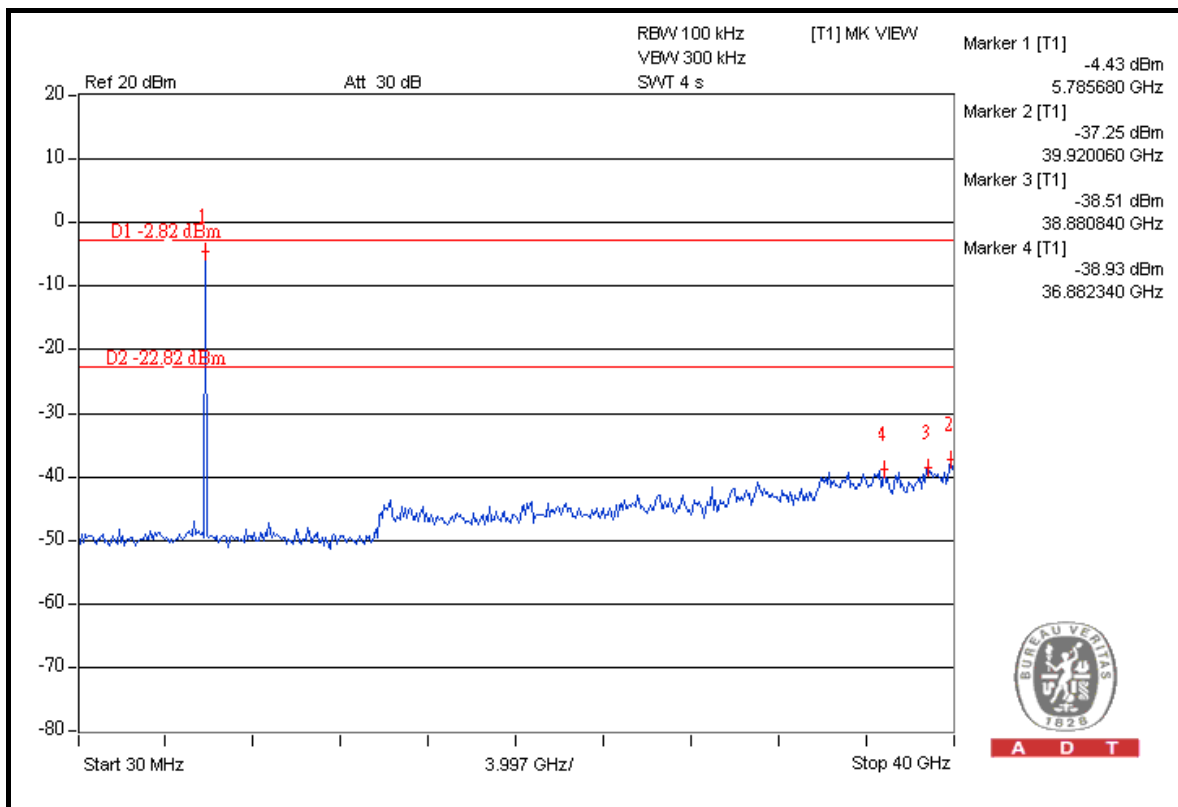
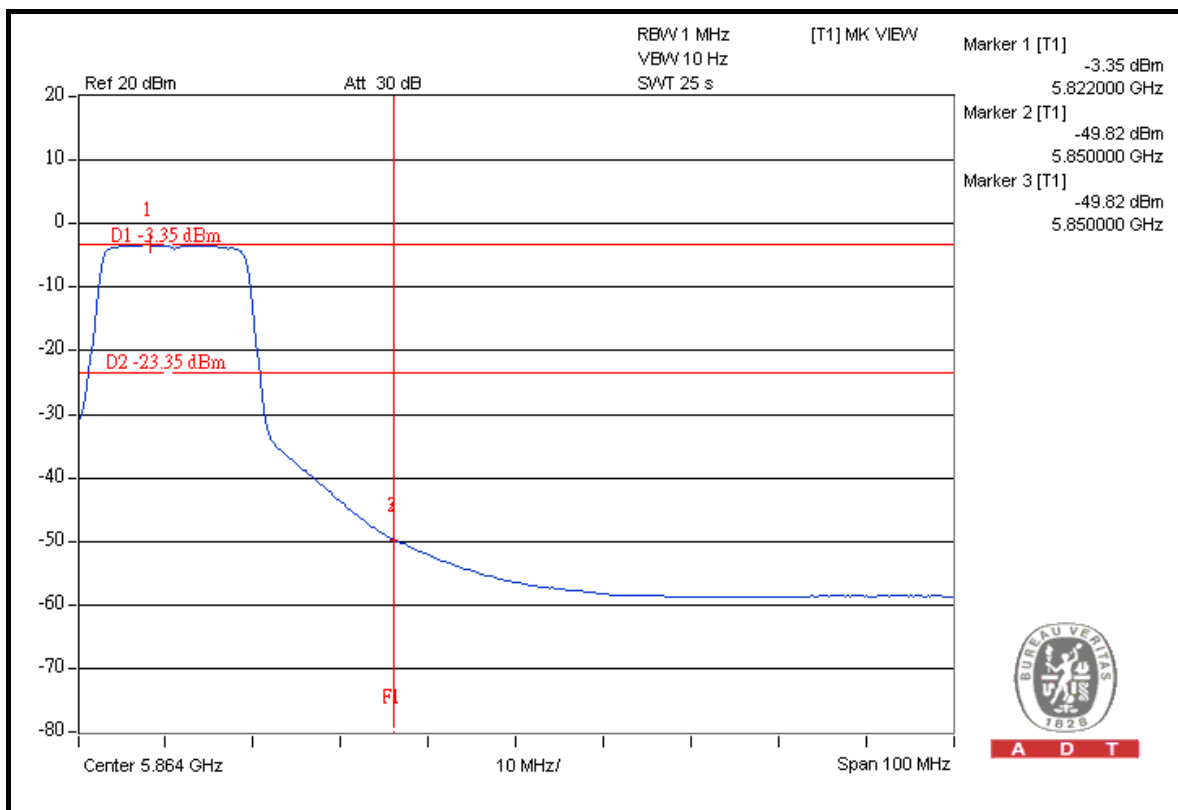




A D T


## 802.11a OFDM MODULATION (TURBO MODE):

### CH 152

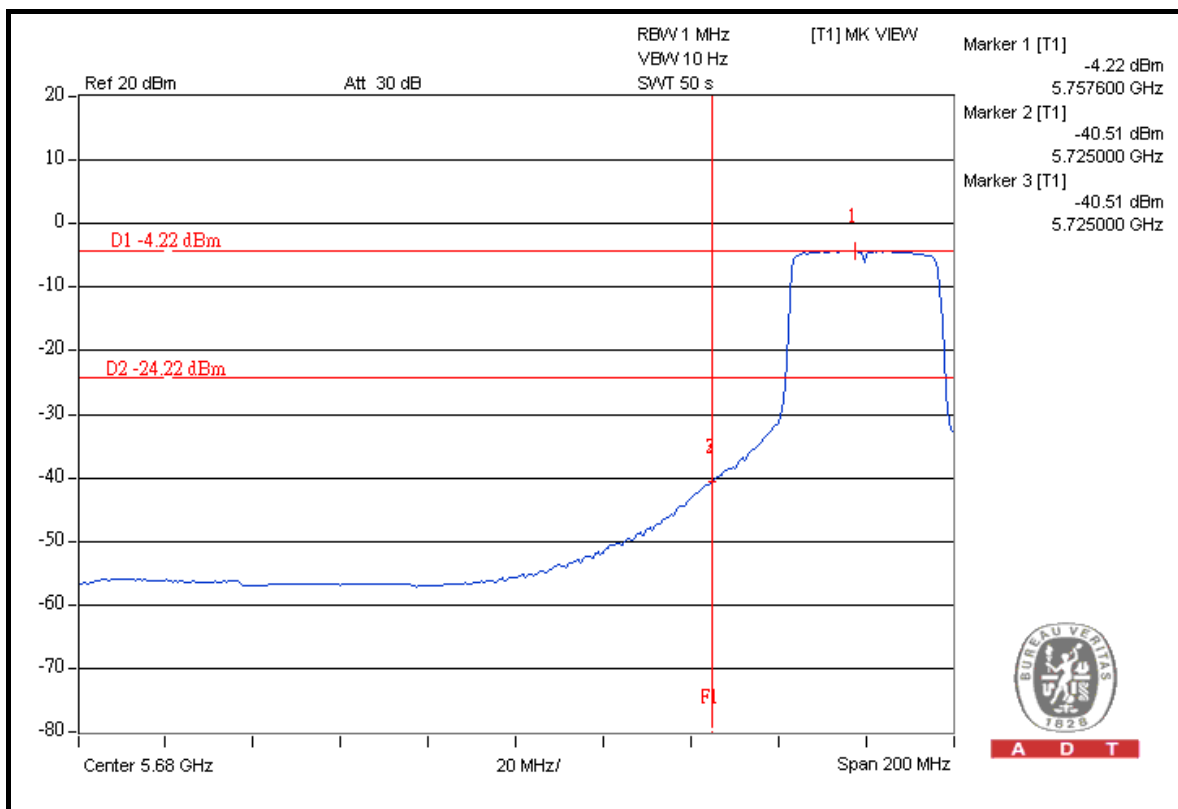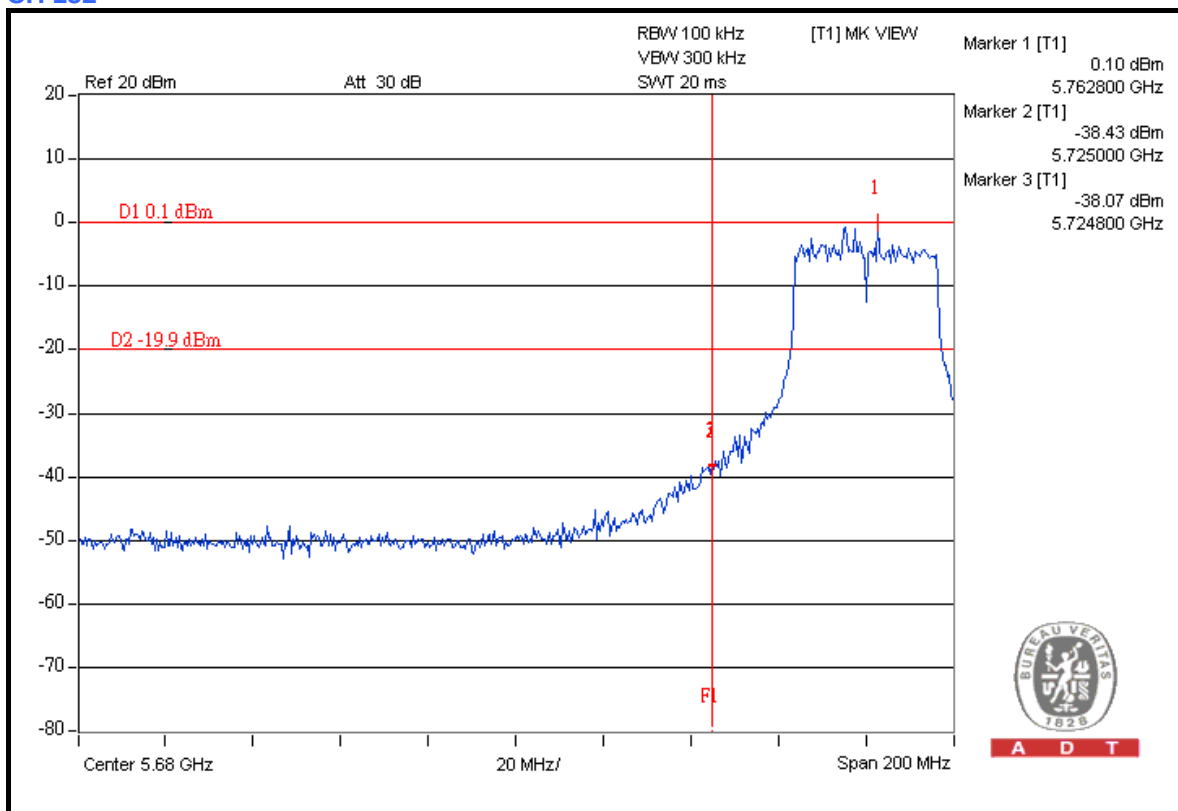




A D T

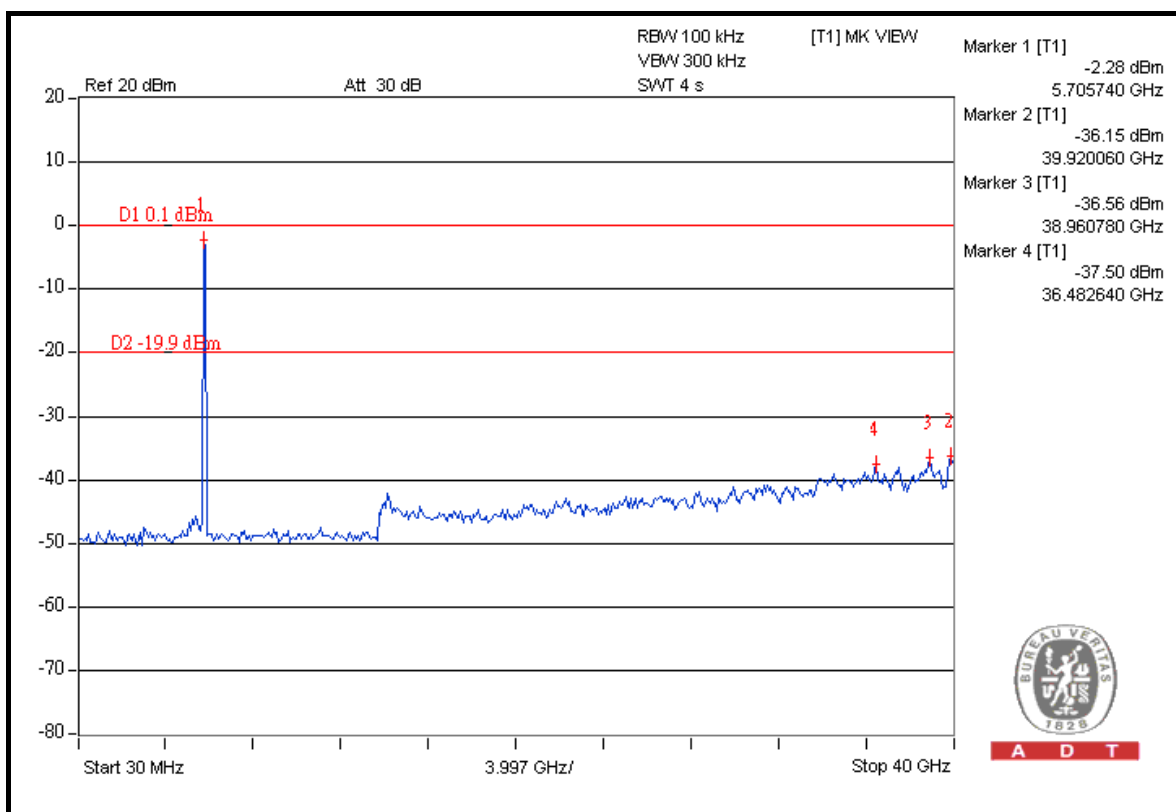

A D T



## CH 160

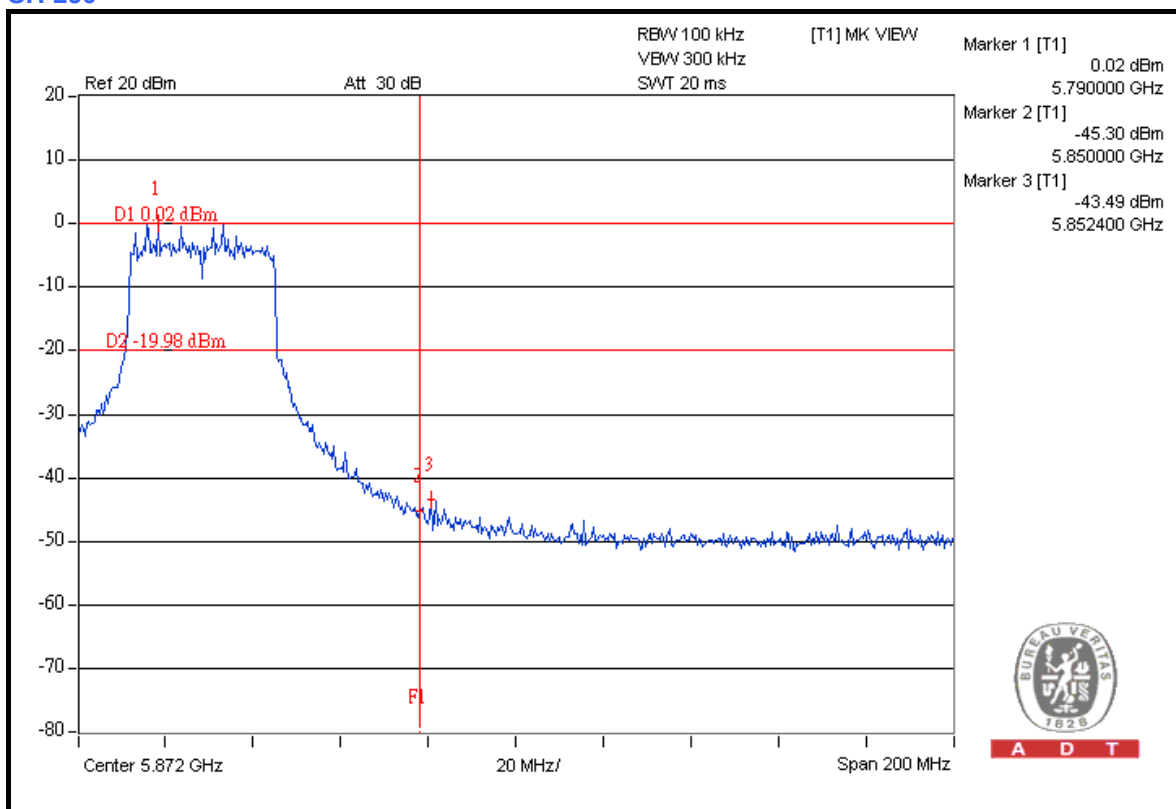

A D T



A D T

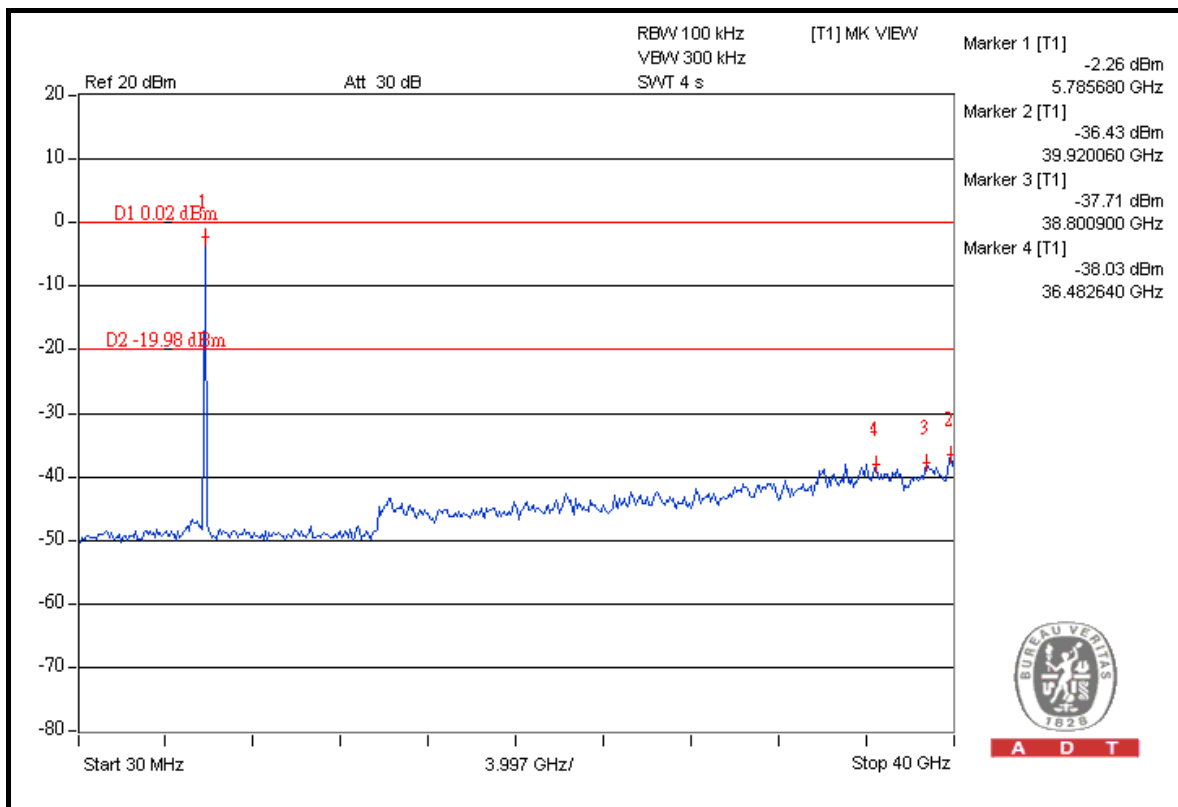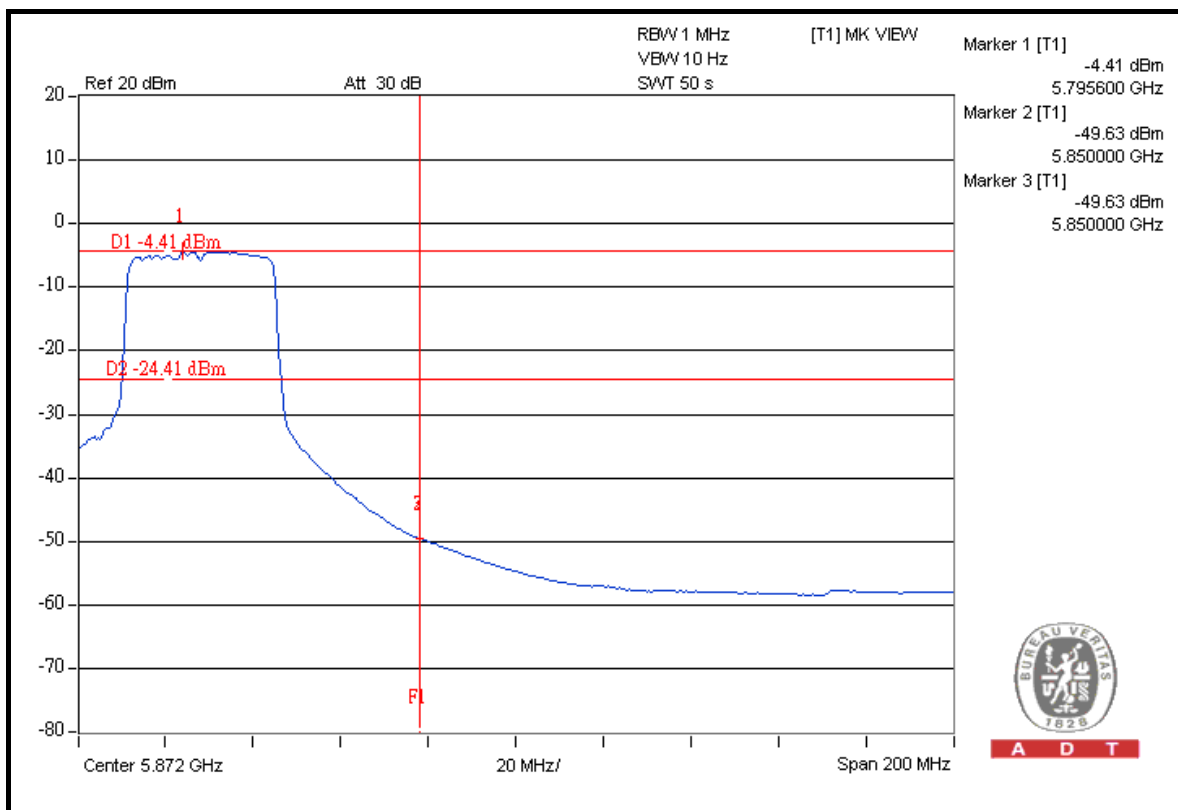

## 5.7 ANTENNA REQUIREMENT

### 5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 5.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with R-SMA antenna connector. The maximum gain of the antenna is 2.26dBi.

## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

|                    |                       |
|--------------------|-----------------------|
| <b>USA</b>         | FCC, NVLAP            |
| <b>Germany</b>     | TUV Rheinland         |
| <b>Japan</b>       | VCCI                  |
| <b>Norway</b>      | NEMKO                 |
| <b>Canada</b>      | INDUSTRY CANADA , CSA |
| <b>R.O.C.</b>      | TAF, BSMI, NCC        |
| <b>Netherlands</b> | Telefication          |
| <b>Singapore</b>   | GOST-ASIA(MOU)        |
| <b>Russia</b>      | CERTIS(MOU)           |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## **8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**--- END ---**