



# TEST REPORT

EUT Description	<b>WLAN and BT, 2x2 PCIe M.2 2230 adapter card</b>
Brand Name	<b>Intel® Wi-Fi 6E AX210</b>
Model Name	<b>AX210NGW</b>
FCC/IC ID	<b>PD9AX210NG/ 1000M-AX210NG</b>
Date of Test Start/End	<b>2021-01-19 /2021-01-27</b>
Features	<b>802.11ax, Dual Band, 2x2 Wi-Fi 6 + Bluetooth® 5.2</b> (see section 5)

Applicant	<b>Intel Mobile Communications</b>
Address	<b>100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA</b>
Contact Person	<b>Steven Hackett</b>
Telephone/Fax/ Email	<b>steven.c.hackett@intel.com</b>

Reference Standards	<b>FCC CFR Title 47 Part 15 C FCC CFR Title 47 Part 15 E</b> (see section 1)
---------------------	---

Test Report identification	<b>200921-01.TR01</b>
Revision Control	<b>Rev. 01</b> <b>This test report revision replaces any previous test report revision</b> (see section 8)

The test results relate only to the samples tested.

This report shall not be reproduced, except in full, without the written approval of the laboratory.

Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Khodor Rida  
(Test Engineer Lead)

Cheiel IN  
(Technical Manager)

**Intel Corporation S.A.S – WRF Lab**  
**425 rue de Goa – Le Cargo B6 - 06600, Antibes, France**  
**Tel. +33493001400 / Fax +33493001401**

# Table of Contents

---

## 1. Table of Contents

1. Standards, reference documents and applicable test methods .....	3
2. General conditions, competences and guarantees .....	3
3. Environmental Conditions .....	3
4. Test samples .....	4
5. EUT Features .....	5
6. Remarks and comments .....	5
7. Test Verdicts summary .....	5
8. Document Revision History .....	6
A.1    MEASUREMENT SYSTEM.....	7
A.2    TEST EQUIPMENT LIST .....	9
A.3    MEASUREMENT UNCERTAINTY EVALUATION .....	10
B.1    TEST CONDITIONS.....	11
B.2    RADIATED SPURIOUS EMISSION .....	12
B.2.1    802.11 B/G/N/AX 2.4GHz .....	12
B.2.2    BLE .....	14
B.2.3    BT .....	16
B.2.4    802.11 A/G/N/AX U-NII-1 .....	18
B.2.5    802.11 A/G/N/AX U-NII-2A .....	20
B.2.6    802.11 A/G/N/AX U-NII-2C .....	22
B.2.7    802.11 A/G/N/AX U-NII-3.....	24
C.1    RADIATED TEST SETUP .....	26
C.2    TEST SAMPLE .....	27

## 1. Standards, reference documents and applicable test methods

FCC

1. FCC Title 47 CFR part 15 - Subpart C – §15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz. 2019-10-01 Edition
2. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2019-10-01 Edition
3. FCC Title 47 eCFR part 15 – Subpart E - Unlicensed National Information Infrastructure Devices. 2020-07-30 Online edition
4. FCC Title 47 CFR part 15 – Subpart C – §15.209 Radiated emission limits; general requirements. 2019-10-01 Edition
5. FCC OET KDB 558074 D01 v05r02 - Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules.
6. FCC OET KDB 789033 D02 v02r01 General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E).
7. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
8. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 2. General conditions, competences and guarantees

- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

## 3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	21°C ± 2°C
Humidity	40% ± 10%

#### 4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	200611-03.S01	WiFi 6E Module	AX210NGW	WFM:9C297662CA5F	2020-07-15	Used for 30MHz – 40GHz Spurious Emissions tests
	200504-04.S07	Laptop	Latitude 5401	BVHLK13	2020-06-02	
	200504-04.S07	Extender	ADEXELEC	-	2020-06-02	
	200921-01.S01	Wieson Antenna	-	-	2020-09-28	
	200921-01.S02	Wieson Antenna	-	-	2020-09-28	

## 5. EUT Features

The herein information is provided by the customer.

Brand Name	Intel® Wi-Fi 6E AX210																										
Model Name	AX210NGW																										
Software Version	DRTU 00940_21_350120_0W																										
Driver Version	99.0.55.2 V0.13.2.15																										
Prototype / Production	Production																										
Supported Radios	802.11b/g/n/ax 802.11a/n/ac/ax Bluetooth 5.2	2.4GHz (2400.0 – 2483.5 MHz) 5.2GHz (5150.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5895.0 MHz) 2.4GHz (2400.0 – 2483.5 MHz)																									
Antenna Information	<table border="1"> <tr> <td>Transmitter</td> <td>Chain A (Main)</td> <td>Chain B (Aux)</td> </tr> <tr> <td>Manufacturer</td> <td>Wieson</td> <td>Wieson</td> </tr> <tr> <td>Antenna type</td> <td>Dipole</td> <td>Dipole</td> </tr> <tr> <td>Part number</td> <td>NA</td> <td>NA</td> </tr> <tr> <td>Declared Antenna gain (dBi) - 2.4GHz</td> <td>+3.10</td> <td>+3.10</td> </tr> <tr> <td>Declared Antenna gain (dBi) – 5.2 &amp; 5.3GHz</td> <td>+4.11</td> <td>+4.11</td> </tr> <tr> <td>Declared Antenna gain (dBi) – 5.5GHz</td> <td>+5.17</td> <td>+5.17</td> </tr> <tr> <td>Declared Antenna gain (dBi) – 5.8 GHz</td> <td>+5.17</td> <td>+5.17</td> </tr> </table>			Transmitter	Chain A (Main)	Chain B (Aux)	Manufacturer	Wieson	Wieson	Antenna type	Dipole	Dipole	Part number	NA	NA	Declared Antenna gain (dBi) - 2.4GHz	+3.10	+3.10	Declared Antenna gain (dBi) – 5.2 & 5.3GHz	+4.11	+4.11	Declared Antenna gain (dBi) – 5.5GHz	+5.17	+5.17	Declared Antenna gain (dBi) – 5.8 GHz	+5.17	+5.17
Transmitter	Chain A (Main)	Chain B (Aux)																									
Manufacturer	Wieson	Wieson																									
Antenna type	Dipole	Dipole																									
Part number	NA	NA																									
Declared Antenna gain (dBi) - 2.4GHz	+3.10	+3.10																									
Declared Antenna gain (dBi) – 5.2 & 5.3GHz	+4.11	+4.11																									
Declared Antenna gain (dBi) – 5.5GHz	+5.17	+5.17																									
Declared Antenna gain (dBi) – 5.8 GHz	+5.17	+5.17																									
Document	<table border="1"> <tr> <td>Filename</td> <td>Date of receipt</td> </tr> <tr> <td>ARY121-0009-002-H0 Antenna SPEC (20200529)</td> <td>2020-12-14</td> </tr> </table>			Filename	Date of receipt	ARY121-0009-002-H0 Antenna SPEC (20200529)	2020-12-14																				
Filename	Date of receipt																										
ARY121-0009-002-H0 Antenna SPEC (20200529)	2020-12-14																										
Additional information	The EUT class is a client connected to Low-Power Acces point																										

## 6. Remarks and comments

For each tested band, the worst case identified from modular test report among low, mid and high channel and the different modes has been tested in this report.

## 7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainty

	FCC part	RSS part	Test name	Verdict
802.11 b/g/n/ax 2.4GHz	15.247 (d) 15.209	RSS-247 Clause 5.5 RSS-Gen A1 Clause 8.9	Spurious Emission (radiated)	P
BLE	15.247 (d) 15.209	RSS-247 Clause 5.5 RSS-GEN A1 Clause 8.9	Spurious Emission (radiated)	P
BT	15.247 (d) 15.209	RSS-247 Clause 5.5 RSS-GEN A1 Clause 8.9	Spurious Emission (radiated)	P
802.11 a/n/ac/ax – U-NII-1	15.407 (b) (1) 15.209	RSS-247 Clause 6.2.1.2 RSS-GEN A1, Clause 8.9	Spurious Emission (radiated)	P
802.11 a/n/ac/ax – U-NII-2A	15.407 (b) (2) 15.209	RSS-247 Clause 6.2.2.2 RSS-GEN A1, Clause 8.9	Spurious Emission (radiated)	P
802.11 a/n/ac/ax – U-NII-2C	15.407 (b) (3) 15.209 (a)	RSS-247 Clause 6.2.3.2 RSS-GEN A1 Clause 8.9	Spurious Emission (radiated)	P
802.11 a/n/ac/ax – U-NII- 3	15.407 (b) (3) 15.209	RSS-247 Clause 6.2.4.2 RSS-GEN A1 Clause 8.9	Spurious Emission (radiated)	P

## 8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	A.Lounes	First Issue
Rev. 01	K. RIDA	Declared Antenna Gain update


# Annex A. Test & System Description

## A.1 Measurement System

Measurements were performed using the following setups, made in accordance to the general provisions of ANSI 63.10-2013 Test Procedures.

The DUT is installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

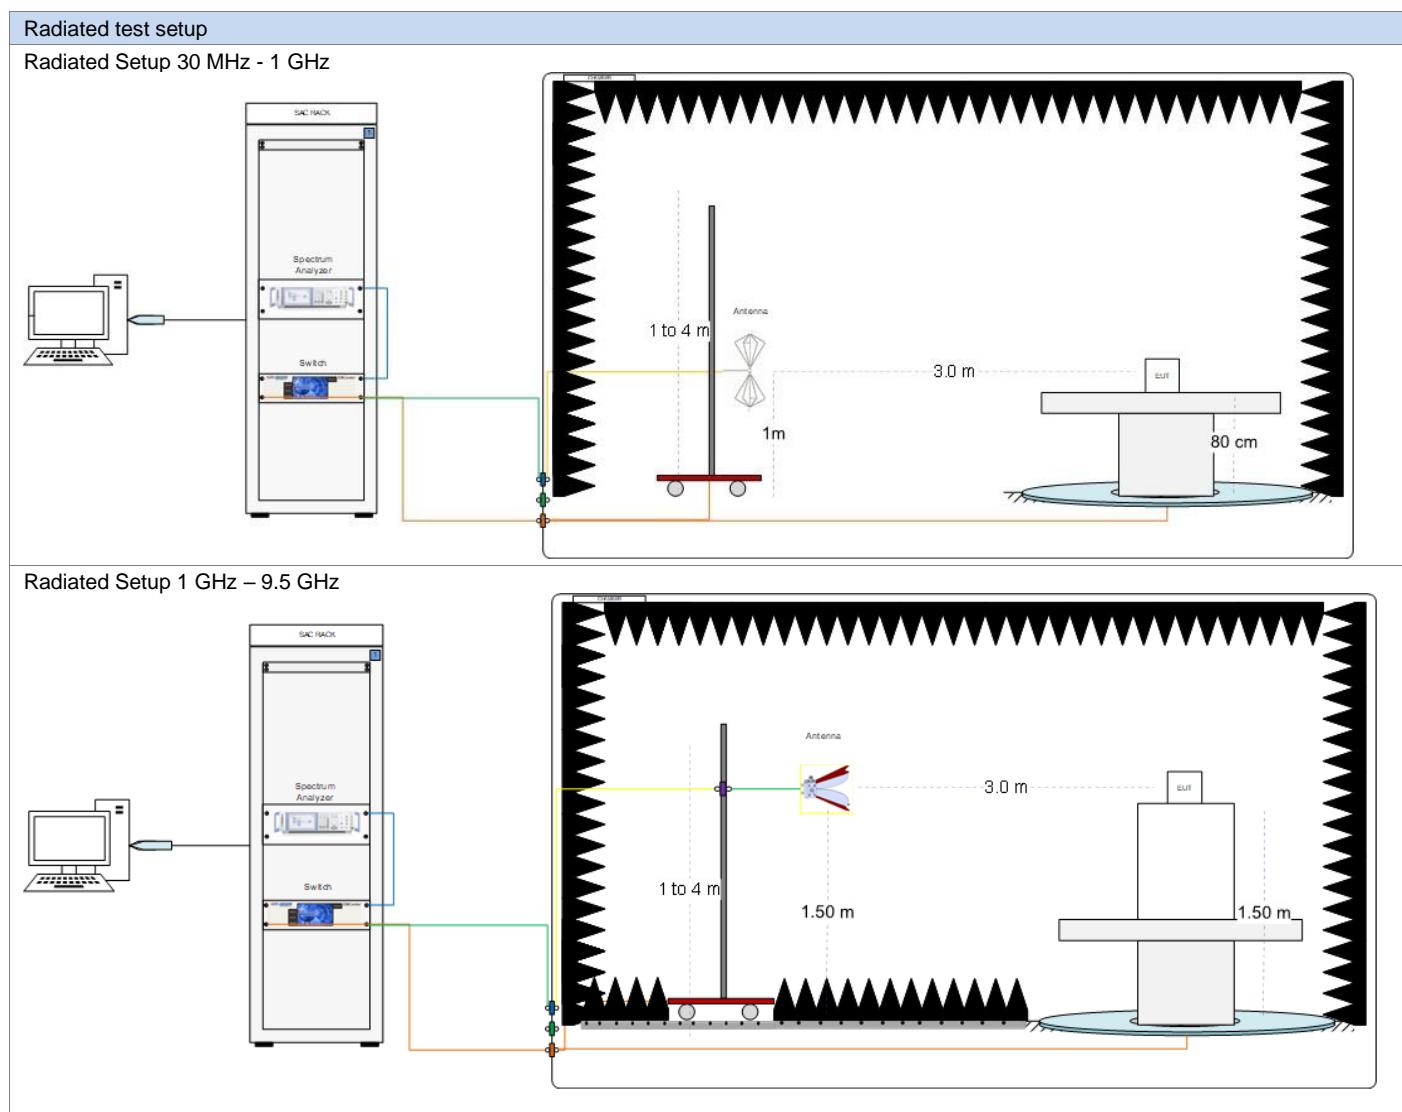

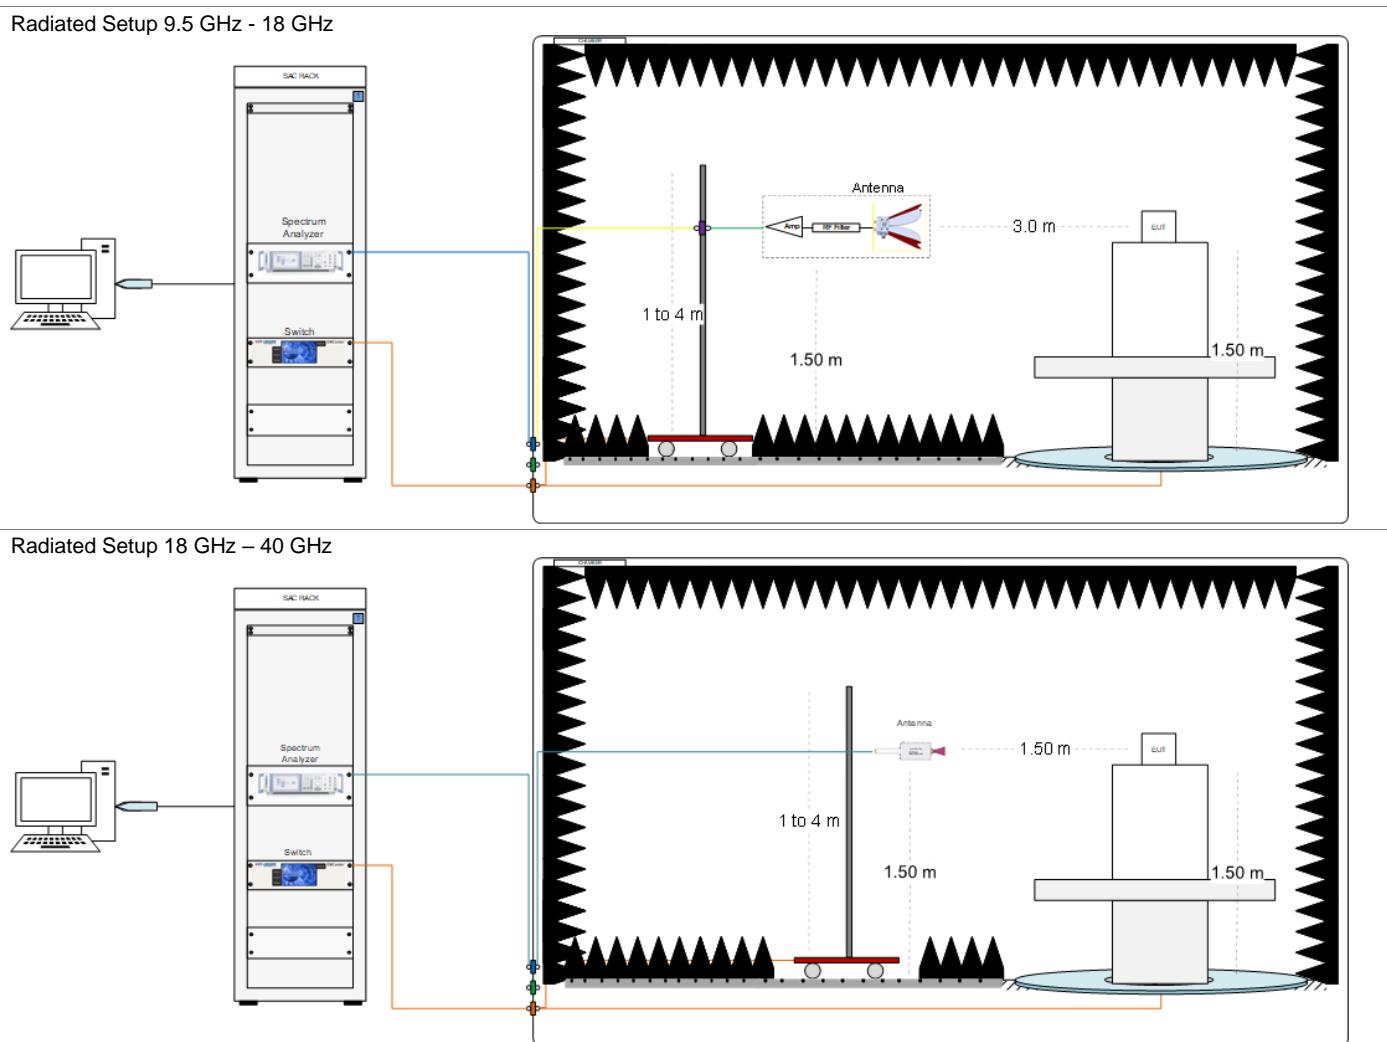

### Sample Calculation

The spurious received voltage  $V(\text{dB}\mu\text{V})$  in the spectrum Analyzer is converted to Electric field strength using the transducer factor  $F$  corresponding to the Rx path Loss:

$$F (\text{dB}/\text{m}) = \text{Rx Antenna Factor} (\text{dB}/\text{m}) + \text{Cable losses} (\text{dB}) - \text{Amplifiers Gain} (\text{dB})$$

$$E (\text{dB}\mu\text{V}/\text{m}) = V(\text{dB}\mu\text{V}) + F (\text{dB}/\text{m})$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$  is the field strength of the emission at the distance specified by the limit, in  $\text{dB}\mu\text{V}/\text{m}$

$E_{\text{Meas}}$  is the field strength of the emission at the measurement distance, in  $\text{dB}\mu\text{V}/\text{m}$

$D_{\text{Meas}}$  is the measurement distance, in m

$D_{\text{SpecLimit}}$  is the distance specified by the limit, in m

## A.2 Test Equipment List

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
1076	Spectrum analyzer	FSW43	101847	Rohde & Schwarz	2020-11-02	2022-11-02
0993	BiConical antenna 25 MHz – 1 GHz	UBAA9115+BBVU9135 +DGA9552N	0286+CH 9044	Schwarzbeck	2019-11-22	2021-11-22
0141	Double Ridged Horn Antenna 1 GHz – 18 GHz	3117	00157736	ETS Lindgren	2020-04-01	2022-04-01
0325	Double Ridged Horn Antenna 1 GHz – 18 GHz	3117	00157734	ETS Lindgren	2019-08-12	2021-08-12
0139	Horn Antenna 3116+ Amplifier 18GHz – 26.5GHz	3116	00167100	ETS Lindgren	2020-03-19	2022-03-19
0140	Horn Antenna 3116+ Amplifier 26.5GHz – 40GHz	3116	00169638	ETS Lindgren	2020-04-06	2022-04-06
0135	Anechoic chamber	FACT 3	5720	ETS Lindgren	2020-07-06	2022-01-07
0530	Measurement Software	EMC32 V10.40.10	100401	Rohde & Schwarz	N/A	N/A
0797	Temperature & Humidity logger	RA12E-TH1-RAS	RA12-D0EB1A	AVTECH	2019-07-04	2021-07-04
0147	Switch & Positioning	EMC center	00159757	ETS Lindgren	N/A	N/A
1033	Antenna tower	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A
0136	Turntable	-		ETS Lindgren	N/A	N/A
0859	RF Cable 2.5m	0500990992500KE	19.23.395	Radiall	2020-11-27	2021-05-27
0809	RF Cable 7.0m	R286304009	-	Radiall	2020-08-24	2021-02-24
1098	RF Cable 1.5m	CBL-1.5M-SMSM+	202879	Mini-Circuit	2020-11-26	2021-05-26
1099	RF Cable 7.0m	0501051057000GX	19.35.850	Radiall	2020-11-27	2021-05-27
0371	RF Cable 1.0m	UFB311A-0-0590- 50U50U	MFR 64639 223230-001	MICRO-COAX	2020-11-27	2021-05-27
0263	RF Cable 1.0m	UFA147A	-	Utilflex	2020-08-25	2021-02-25
0206	RF Cable 1.0m	UFA147A-0-0480- 200200	MFR 64639223720-003	Micro-Coax	2020-08-24	2021-02-24
0616	Power Sensor	NRP-Z81	104385	Rohde & Schwarz	2020-04-08	2022-04-08

N/A: Not Applicable

### A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of  $k = 2$  to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Radiated tests <1GHz	±5.26	dB
Radiated tests 1GHz – 40 GHz	±4.85	dB

# Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Engineer
Radiated spurious emissions	A. Lounes

## B.1 Test Conditions

For 802.11b,g and a modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax20 (20 MHz channel bandwidth), 802.11n40 & 802.11ax40 (40MHz channel bandwidth), 802.11ac80 & 802.11ax80 (80MHz channel bandwidth) and 802.11ac160 & 802.11ax160 (160MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11b	20	1Mbps
	802.11g, a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80	VHT0
		160	VHT0
	802.11ax	20	HE0
		40	HE0
		80	HE0
		160	HE0
MIMO	802.11n	20/40	HT8
	802.11ac	80/160	VHT0
	802.11ax	20/40/80/160	HE0

## B.2 Radiated spurious emission

### B.2.1 802.11 b/g/n/ax 2.4GHz

#### Standard references

FCC part	RSS part	Limits																							
15.247 (d) 15.209	RSS-247 Clause 5.5 RSS-Gen A1 Clause 8.9	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th><th>Field Strength (µV/m)</th><th>Field Strength (dBµV/m)</th><th>Meas. Distance (m)</th></tr> </thead> <tbody> <tr> <td>30-88</td><td>100</td><td>40</td><td>3</td></tr> <tr> <td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr> <tr> <td>216-960</td><td>200</td><td>46</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>54</td><td>3</td></tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function corresponding to 20 dB above the indicated values in the table.</p>				Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)																						
30-88	100	40	3																						
88-216	150	43.5	3																						
216-960	200	46	3																						
Above 960	500	54	3																						

#### Test procedure

The radiated setups shown in section Test & System Description were used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

Test Results**30 MHz – 1 GHz, 802.11ax20, HE0, Chain A****Radiated Spurious – CH7**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	---
249.6	37.6	46.0	8.4	H
266.2	36.7	46.0	9.3	H

**1 GHz – 26.5 GHz, 802.11ax20, HE0, Chain A****Radiated Spurious – CH7**

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	---
2254.0	54.6	---	74.0	19.4	V
2254.0	---	47.6	54.0	6.4	V
2673.5	59.3	---	74.0	14.7	V
2673.5	---	50.3	54.0	3.7	V
2734.0	58.8	---	74.0	15.2	V
2734.0	---	49.1	54.0	5.0	V
7300.5	47.6	---	74.0	26.4	V
7300.5	---	38.3	54.0	15.7	V
23972.2	---	31.0	54.0	23.0	H
23972.2	43.2	---	74.0	30.8	V

## B.2.2 BLE

### Standards references

FCC part	RSS part	Limits																							
15.247 (d) 15.209	RSS-247 Clause 5.5 RSS-Gen A1 Clause 8.9	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th><th>Field Strength (<math>\mu</math>V/m)</th><th>Field Strength (dB<math>\mu</math>V/m)</th><th>Meas. Distance (m)</th></tr> </thead> <tbody> <tr> <td>30-88</td><td>100</td><td>40</td><td>3</td></tr> <tr> <td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr> <tr> <td>216-960</td><td>200</td><td>46</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>54</td><td>3</td></tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>				Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)																						
30-88	100	40	3																						
88-216	150	43.5	3																						
216-960	200	46	3																						
Above 960	500	54	3																						

### Test procedure

The radiated setups shown in section Test & System Description were used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

Test Results**30 MHz – 1 GHz, BLE****Radiated Spurious – CH0**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	---
37.9	22.4	40.0	17.6	V

**1 GHz – 26.5 GHz, BLE****Radiated Spurious – CH0**

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	---
1330.0	52.6	---	74.0	21.4	H
1330.0	---	40.5	54.0	13.5	H
17824.5	53.4	---	74.0	20.6	V
17824.5	---	42.3	54.0	11.7	0
22726.5	41.8	---	74.0	32.2	V
22726.5	---	30.5	54.0	23.5	H

**B.2.3 BT**Standard references

FCC part	RSS part	Limits																							
15.247 (d) 15.209 (a)	RSS-247 Clause 5.5  RSS GEN A1 Clause 8.9	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th><th>Field Strength (<math>\mu</math>V/m)</th><th>Field Strength (dB<math>\mu</math>V/m)</th><th>Meas. Distance (m)</th></tr> </thead> <tbody> <tr> <td>30-88</td><td>100</td><td>40</td><td>3</td></tr> <tr> <td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr> <tr> <td>216-960</td><td>200</td><td>46</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>54</td><td>3</td></tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>				Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)																						
30-88	100	40	3																						
88-216	150	43.5	3																						
216-960	200	46	3																						
Above 960	500	54	3																						

Test procedure

The radiated setups shown in section Test & System Description were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height from 1 m to 4 m, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

Test Results**30 MHz – 1 GHz, BR – GFSK****Radiated Spurious – CH0 DH5**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	---
37.9	24.9	40.0	15.1	V

**1 GHz – 26.5 GHz, BR – GFSK****Radiated Spurious – CH0 DH5**

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	---
2999.0	58.1	---	74.0	15.9	H
2999.0	---	45.0	54.0	9.0	H
12009.5	48.1	---	74.0	25.9	V
12009.5	---	38.3	54.0	15.7	V
23658.0	---	30.8	54.0	23.2	V
23658.0	44.1	---	74.0	29.9	H

**B.2.4 802.11 a/g/n/ax U-NII-1**Standard references

FCC part	Limits																																			
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																																			
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th> <th>Field Strength (<math>\mu</math>V/m)</th> <th>Field Strength (<math>\text{dB}\mu</math>V/m)</th> <th>Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/f(kHz)</td> <td>-</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/f(kHz)</td> <td>-</td> <td>300</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>-</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>				Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength ( $\text{dB}\mu$ V/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength ( $\text{dB}\mu$ V/m)	Meas. Distance (m)																																	
0.009-0.490	2400/f(kHz)	-	300																																	
0.490-1.705	24000/f(kHz)	-	300																																	
1.705-30.0	30	-	30																																	
30-88	100	40	3																																	
88-216	150	43.5	3																																	
216-960	200	46	3																																	
Above 960	500	54	3																																	

Test procedure

The radiated setup shown in section Test & System Description was used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

Test Results**30 MHz – 1 GHz, 802.11ax160, HE0, Chain A****Radiated Spurious – CH50**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	---
249.6	38.6	46.0	7.4	H

**1 GHz – 40 GHz, 802.11ax160, HE0, Chain A****Radiated Spurious – CH50**

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	---
1330.0	52.6	---	74.0	21.4	H
1330.0	---	40.5	54.0	13.5	H
6474.4	51.7	---	68.2	16.5	V
7474.5	51.2	---	74.0	22.8	H
23961.8	---	31.0	54.0	23.0	V
23961.8	43.9	---	74.0	30.1	H
39775.8	55.8	---	74.0	18.2	V
39775.8	---	47.4	54.0	6.6	V

## B.2.5 802.11 a/g/n/ax U-NII-2A

### Standard references

FCC part	Limits																				
15.407 (a) (2)	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th><th>Field Strength (<math>\mu</math>V/m)</th><th>Field Strength (dB<math>\mu</math>V/m)</th><th>Meas. Distance (m)</th></tr> </thead> <tbody> <tr> <td>30-88</td><td>100</td><td>40</td><td>3</td></tr> <tr> <td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr> <tr> <td>216-960</td><td>200</td><td>46</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>54</td><td>3</td></tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

### Test procedure

The radiated setups shown in section Test & System Description were used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

Test Results**30 MHz – 1 GHz, 802.11ax80, HE0, Chain A+B****Radiated Spurious – CH58**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	---
137.3	40.4	43.5	3.1	H
249.6	42.0	46.0	4.0	H

**1 GHz – 40 GHz, 802.11ax80, HE0, Chain A+B****Radiated Spurious – CH58**

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	---
3000.0	59.2	---	68.2	9.0	V
6569.2	51.1	---	68.2	17.1	V
23914.1	---	31.0	54.0	23.0	H
23914.1	44.0	---	74.0	30.0	V
39806.2	56.8	---	74.0	17.2	V
39806.2	---	47.2	54.0	6.8	V

## B.2.6 802.11 a/g/n/ax U-NII-2C

### Standard references

FCC part	RSS clause	Limits																				
15.407 (b) (3)	RSS-247 Clause 6.2.3 (2)	For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.																				
15.209	RSS-GEN A1, Clause 8.9	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th> <th>Field Strength (<math>\mu</math>V/m)</th> <th>Field Strength (dB<math>\mu</math>V/m)</th> <th>Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)																			
30-88	100	40	3																			
88-216	150	43.5	3																			
216-960	200	46	3																			
Above 960	500	54	3																			

### Test procedure

The radiated setups shown in section Test & System Description were used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height from 1 m to 4 m, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

Test Results**30 MHz – 1 GHz, 802.11n20, HT8, Chain A+B****Radiated Spurious – CH120**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	---
137.3	41.4	43.5	2.1	H
249.6	41.3	46.0	4.7	H

**1 GHz – 40 GHz, 802.11n20, HT8, Chain A+B****Radiated Spurious – CH120**

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	---
6392.0	61.7	---	68.2	6.5	V
6999.8	45.8	---	68.2	22.4	V
11199.5	49.2	---	74.0	24.8	V
11199.5	---	39.6	54.0	14.4	V
22366.2	44.3	---	74.0	29.7	V
22366.2	---	33.8	54.0	20.2	V
39797.0	56.1	---	74.0	17.9	V
39797.0	---	47.1	54.0	6.9	V

## B.2.7 802.11 a/g/n/ax U-NII-3

### Standard references

FCC part	RSS clause	Limits																				
15.407 (b) (4)	RSS-247 Clause 6.2.4.2	For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.																				
15.209	RSS-GEN A1, Clause 8.9	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1"> <thead> <tr> <th>Freq Range (MHz)</th> <th>Field Strength (μV/m)</th> <th>Field Strength (dB<math>\mu</math>V/m)</th> <th>Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dB $\mu$ V/m)	Meas. Distance (m)																			
30-88	100	40	3																			
88-216	150	43.5	3																			
216-960	200	46	3																			
Above 960	500	54	3																			

### Test procedure

The radiated setups shown in section Test & System Description were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height from 1 m to 4 m, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

Test Results**30 MHz – 1 GHz, 802.11n20, HT8, Chain A+B****Radiated Spurious – CH157**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	---
131.9	23.5	43.5	20.0	H

**1 GHz – 40 GHz, 802.11n20, HT8, Chain A+B****Radiated Spurious – CH157**

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	---
6285.6	61.4	---	68.2	6.8	V
11571.2	51.4	---	74.0	22.6	V
11571.2	---	42.1	54.0	11.9	V
23106.1	42.8	---	74.0	31.2	V
23106.1	---	33.1	54.0	20.9	V
39839.4	55.6	---	74.0	18.4	V
39839.4	---	47.0	54.0	7.0	V