

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information										
Brand	ODM		RMN	Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)		
HP Inc.	Wistron		TPN-W164	Yes		convertible PC		1.61		
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor		Type		Antenna Part number (Main/Tx2)			Antenna Part number (Aux/Tx1)			
WNC		PIFA		025.90215.0001 (81EAB615.G52)			025.90216.0001 (81EAB615.G53)			
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	2.43	2.5	2.37	2.73	2.38	2.38	2.57	2.75	2.62	2.85
Aux	2.08	2.58	2.58	2.51	2.93	2.93	2.36	2.65	2.54	2.83
Module Information										
Model		Form factor and suffixes								
AX211NGW		Intel Garfield Peak 2 AX211 Wi-Fi 6e +Bluetooth 5.2 M.2 2230 160MHz CNVi WW WLAN								
BE201NGW		Intel Fillmore Peak 2 BE201 M.2 2230 Wi-Fi 7 +Bluetooth 5.4 non-vPro WW WLAN								
Antenna Vendor Address										
Wistron NeWeb Corp.,20 Park Avenue II, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C.										

Antenna manufacturer	Company name	WNC
	Address	No. 20, Yuanqu 2nd Rd., Baoshan Township, Hsinchu County 300092 , Taiwan (R.O.C.)
Test location	Company name	Sporton
	Address	No 52 HwaYa 1 st Road, HwaYa Technology Park, Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Test Personnel	Name(Full name)	Ken.Lin
	E-mail	KenLin@sporton.com.tw
	Tel/Mobile	+886 3 327 3456 Ext 546
Testing date		2024/10/7

1. **Applicable test methods**

ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the “Conical Cut test method”, the detail description is described as below.


The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna, Eleven conical cuts are required to capture data at every 15 degrees from the EUT, with the top (0 degrees) and bottom (180 degrees) cuts not being measured. Typically, the EUT will remain affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle. The EUT will then be rotated around the full 360 degrees of phi rotation. The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.

		θ -Axis	Φ -Axis
Passive	Step size	15°~165° step: 15°	0°~345° step: 15°
	N / M (Points)	12	24

2. **Test & System Description**

a. Test setup

Typical Setup for ETS-Lindgren AMS-8500:

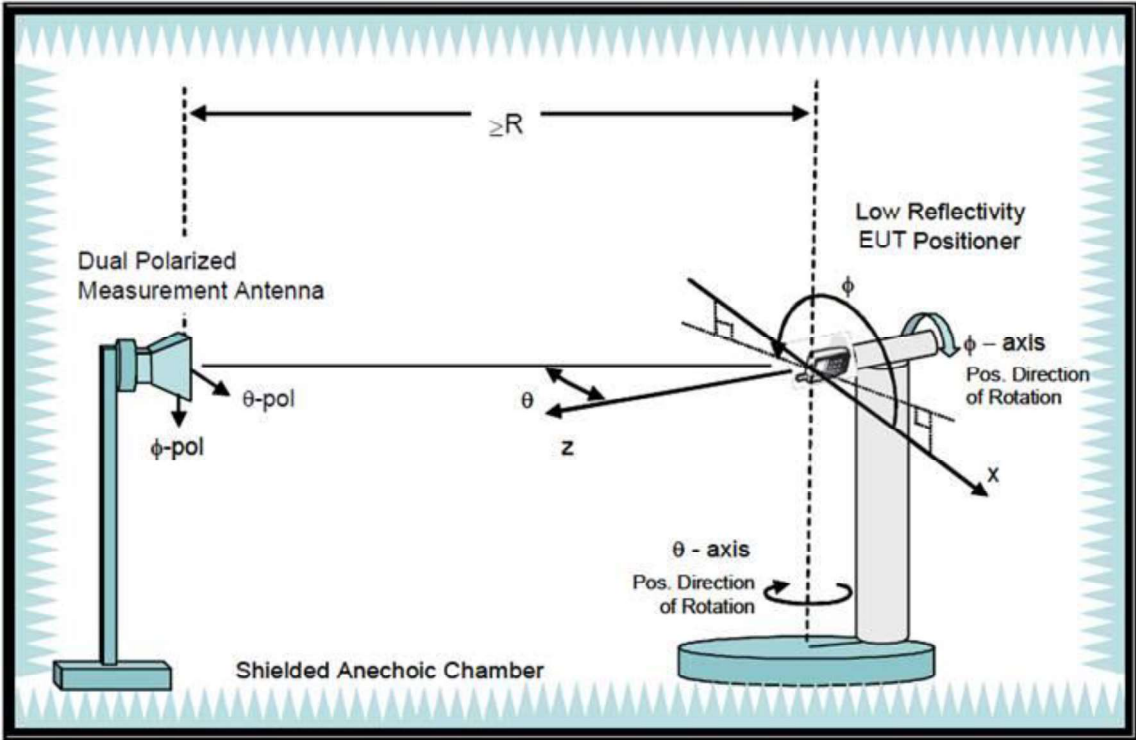

b. Equipment list

Equipment Description	Manufacturer	Identification no.	Current Calibration	Next Calibration
			Date	Date
Network Analyzer	Agilent	E5071C	2024/01/07	2025/01/06
Measurement Software	ETS-Lindgren	EMQuest	N/A	N/A
Multi Axis Positioning System(MAPS™)	ETS-Lindgren	EMCO 2115	N/A	N/A
Multi Axis Positioning System(MAPS™)	ETS-Lindgren	EMCO 2110	N/A	N/A
MAPS™ Controller	ETS-Lindgren	EMCO 2090	N/A	N/A
Horn Antenna	ETS-Lindgren	3164-10	2024/03/03	2025/03/02
ETS OTA Chamber	ETS-Lindgren	AMS-8500	2024/03/03	2025/03/02
Cable	ETS-Lindgren	RFC SMS-100- NMR Series	N/A	N/A

Note: Chamber calibration included full set of implements

Antenna Information


Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
P/N: 81EAB615.G52 (025.902I5.0001) Main Antenna (TX2)	Wistron Neweb Corp.	PIFA	(P/N: 20632-001R-37) 50 ohm Coaxial length: 511mm diameter: 1.37mm	2400-2495	2.43	3.51	3	1.08
				5150-5250	2.50	4.09	3	1.59
				5250-5350	2.37	3.98	3	1.61
				5470-5725	2.73	4.41	3	1.68
				5725-5850	2.38	4.09	3	1.71
				5850-5895	2.38	4.09	3	1.71
				5925-6425	2.57	4.39	3	1.82
				6425-6525	2.75	4.58	3	1.83
				6525-6875	2.62	4.52	3	1.90
				6875-7125	2.85	4.80	3	1.95
P/N: 81EAB615.G53 (025.902I6.0001) Aux Antenna (TX1)	Wistron Neweb Corp.	PIFA	(P/N: 20632-001R-37) 50 ohm Coaxial length: 558mm diameter: 1.37mm	2400-2495	2.08	3.23	3	1.15
				5150-5250	2.58	4.31	3	1.73
				5250-5350	2.58	4.33	3	1.75
				5470-5725	2.51	4.34	3	1.83
				5725-5850	2.93	4.78	3	1.85
				5850-5895	2.93	4.78	3	1.85
				5925-6425	2.36	4.33	3	1.97
				6425-6525	2.65	4.64	3	1.99
				6525-6875	2.54	4.61	3	2.07
				6875-7125	2.83	4.95	3	2.12

Main Antenna


Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	2.43

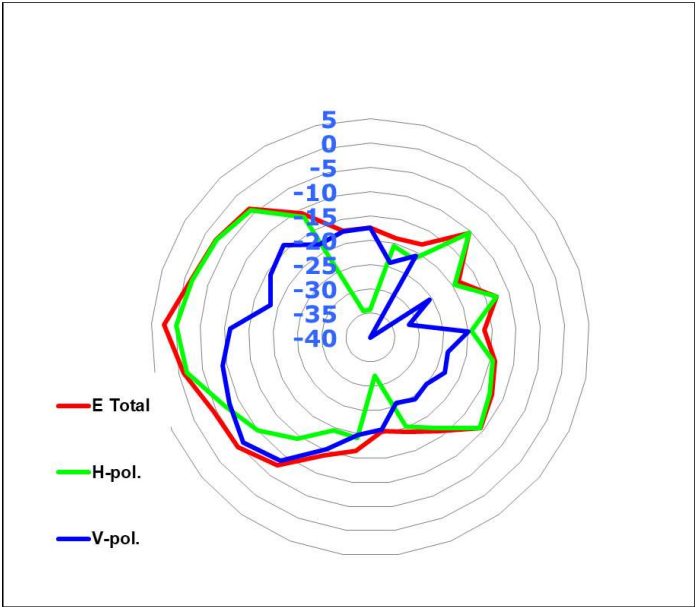


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.50

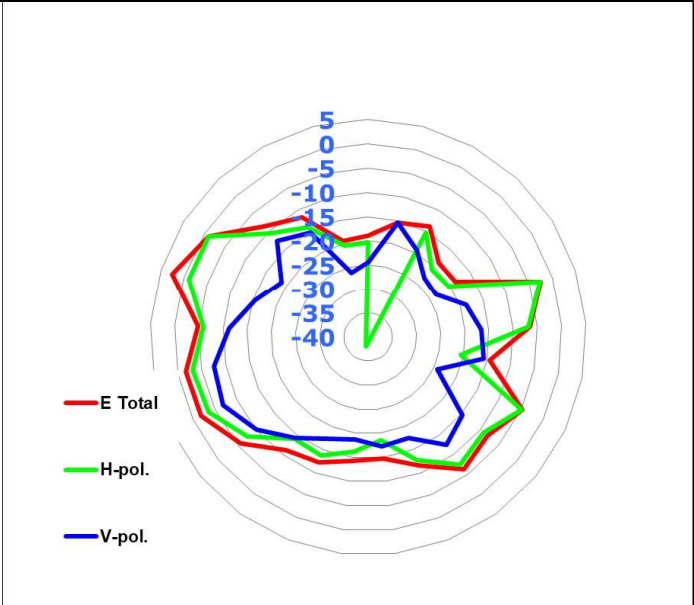


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.37

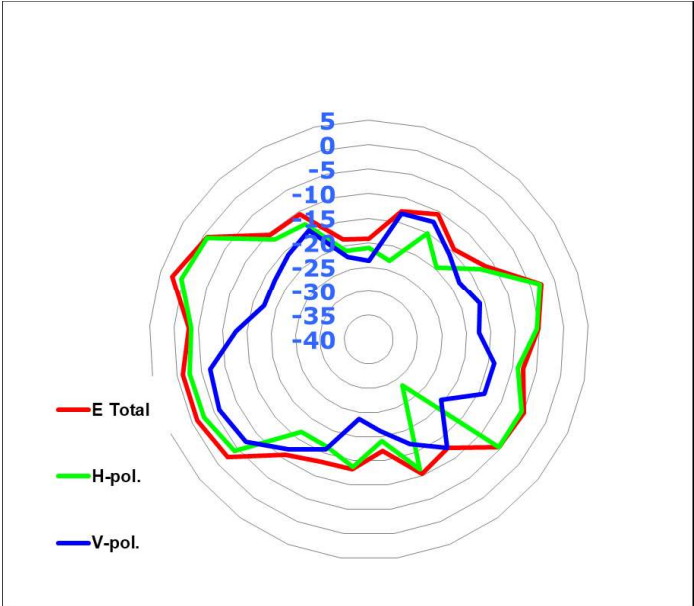


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.73

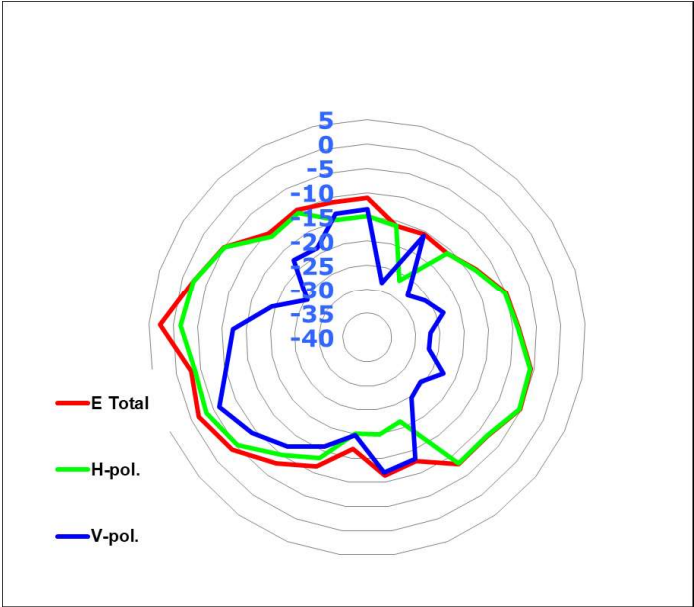


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.38

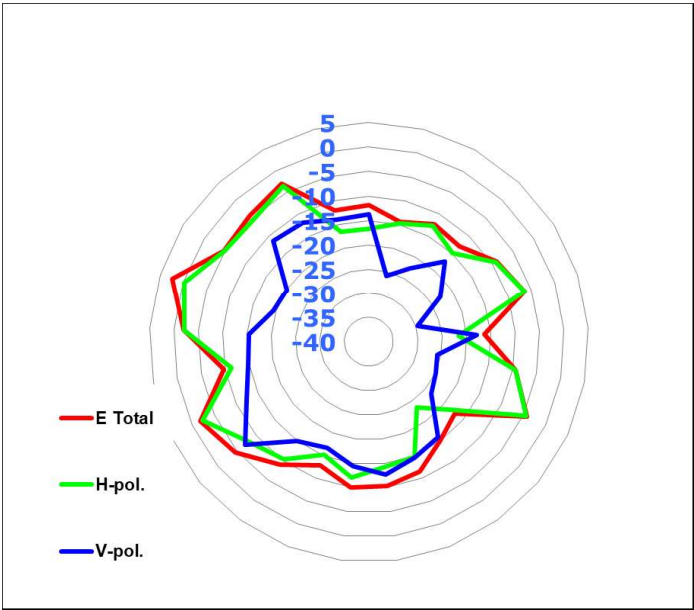


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.38

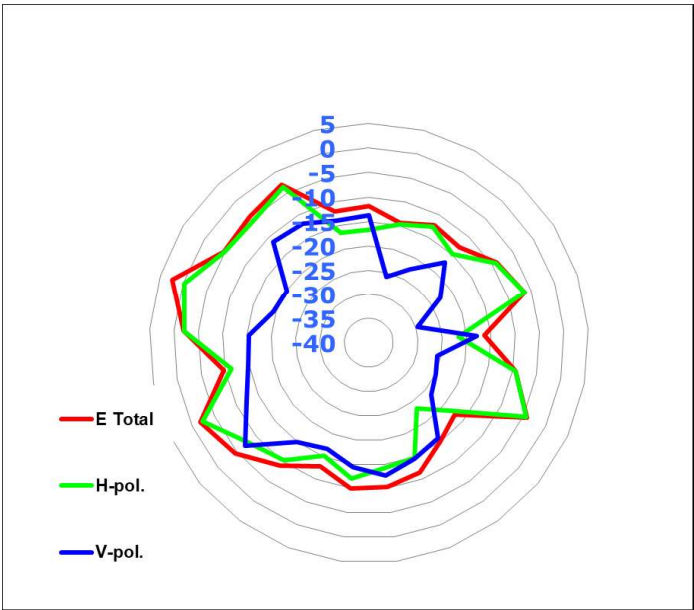


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.57

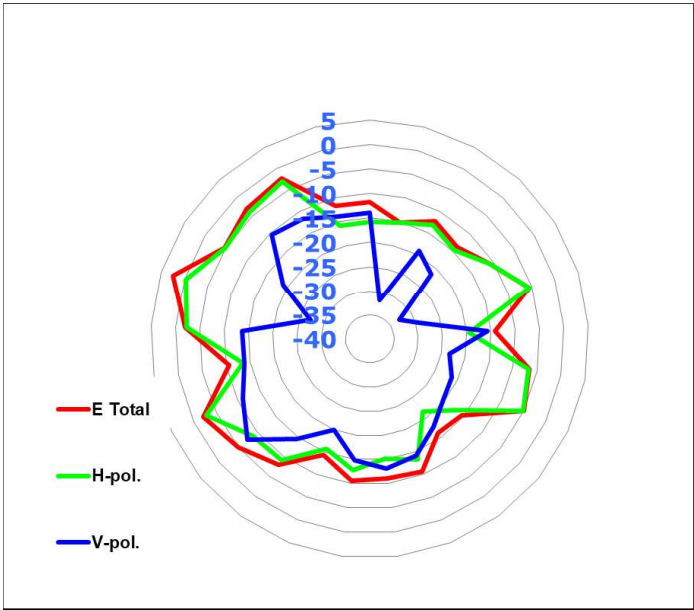


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	2.75

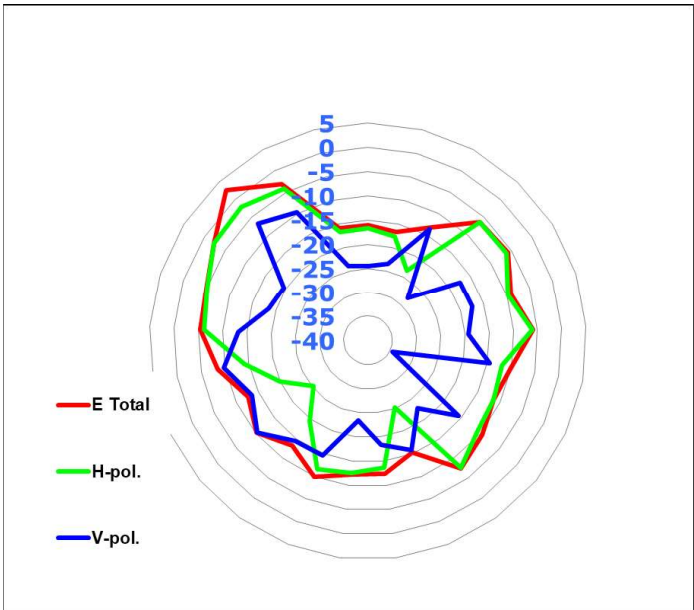


Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.62

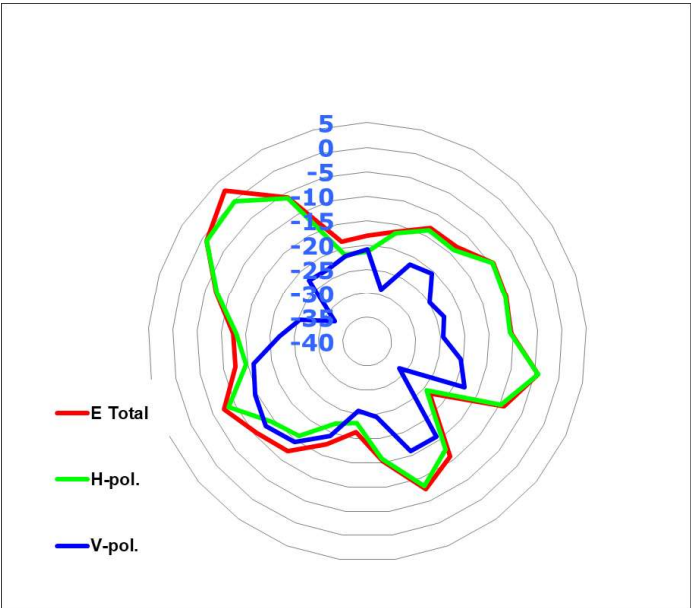

Max Antenna 2D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.85

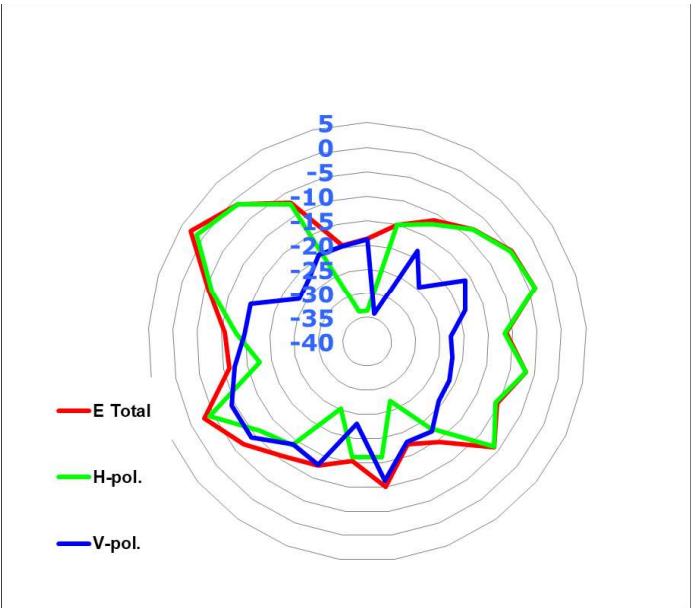

Auxiliary Antenna


Max Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	2.08

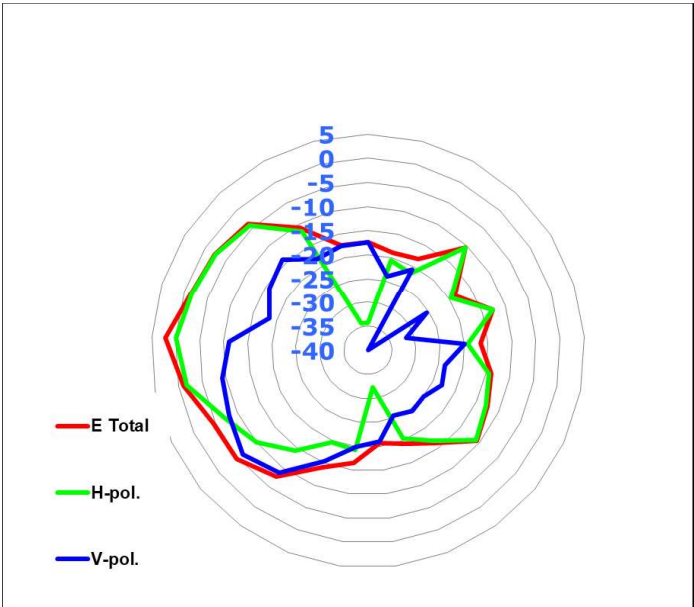


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.58

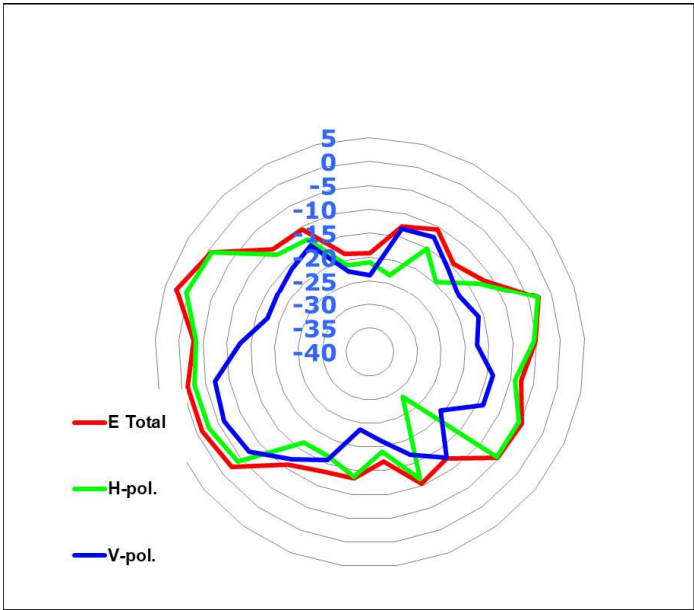


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.58

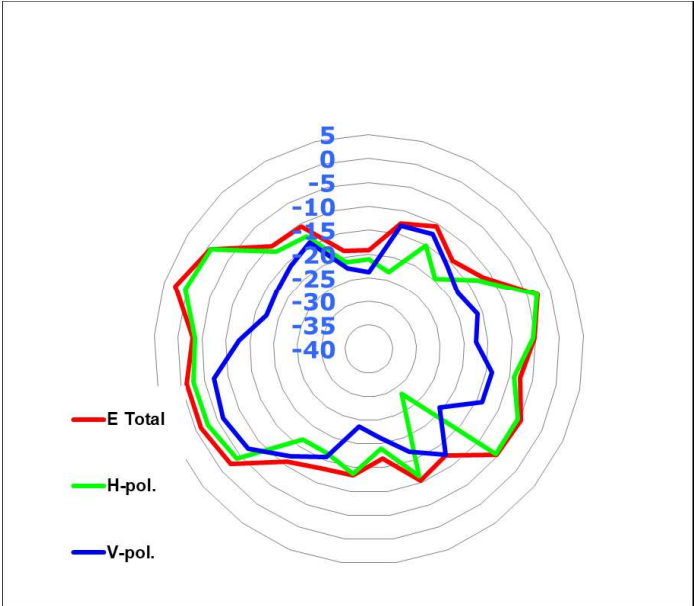


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.51

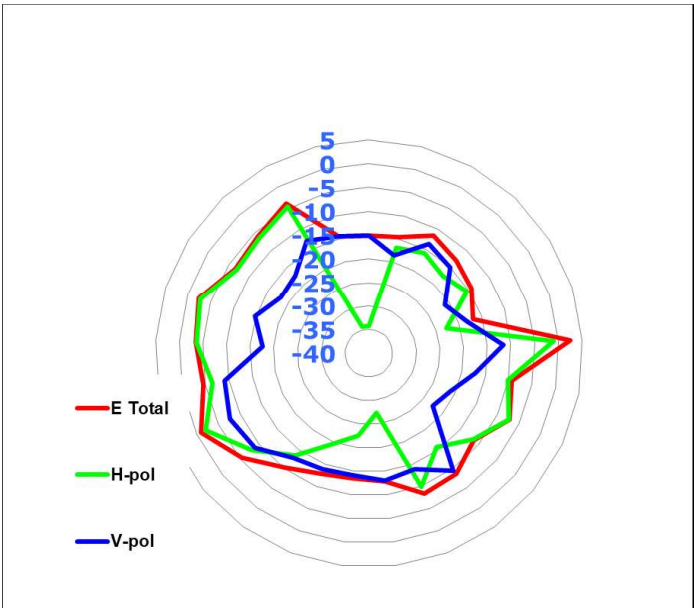


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.93

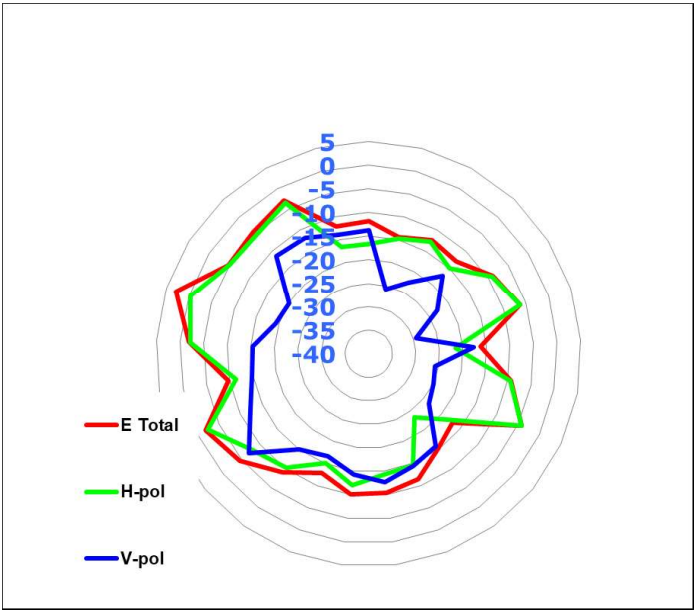


Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.93

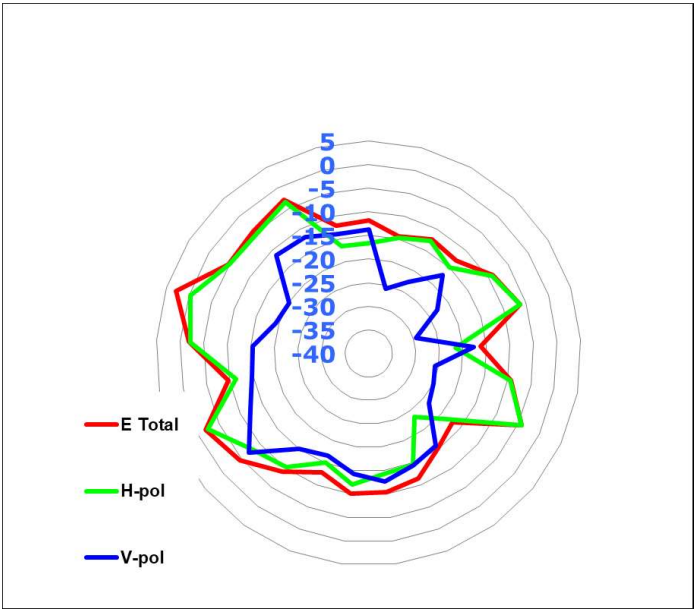


Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.36

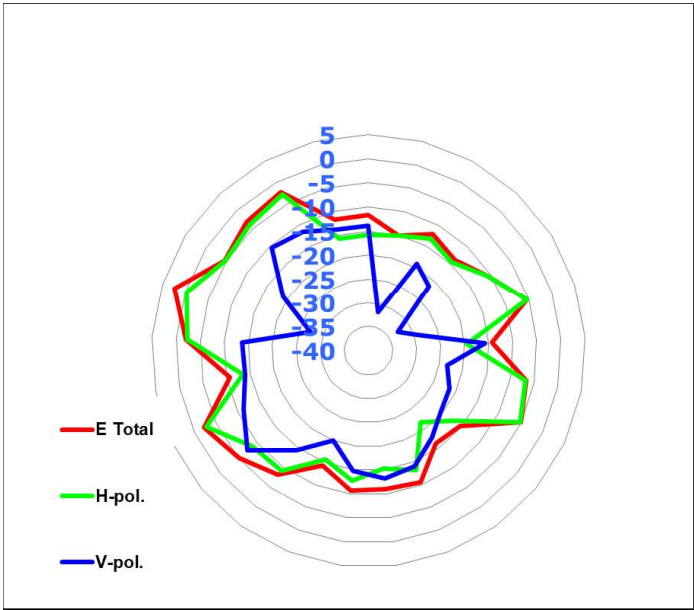


Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	2.65

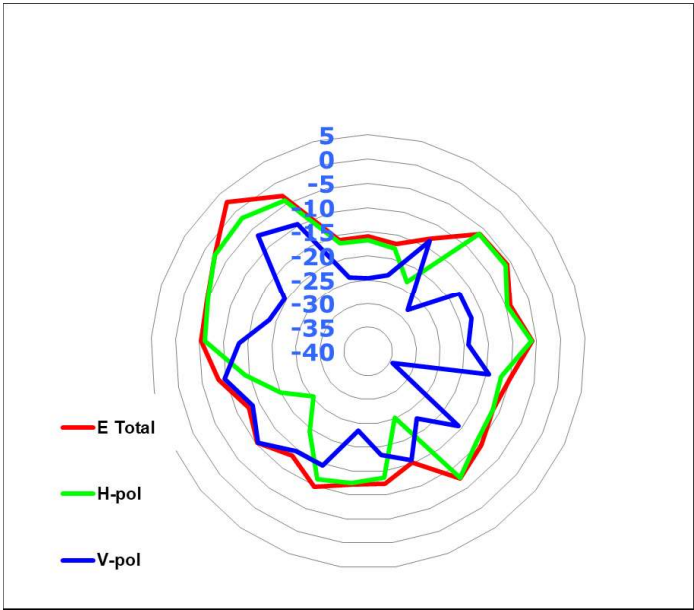

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.54

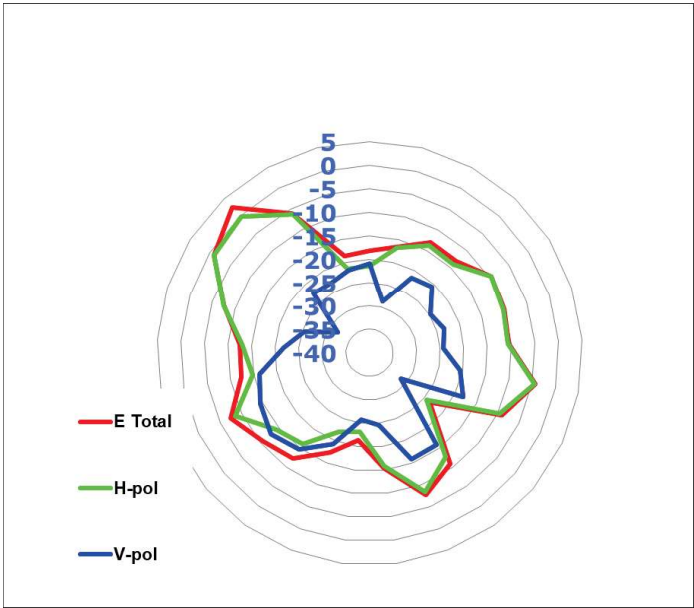

Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	2.83

