

**Nemko****TEST REPORT**Date: ESPOO 24.08.2004Page: 1 (21)Appendices -Number:
No. 1 / 1**1032367**Date of handing in: 18.08.2004

Tested by:

Pekka Kälviäinen, Test Engineer

Reviewed by:

Jyrki Leino, Market Access Manager

SORT OF EQUIPMENT:

Triple band (900/1800/1900) EGPRS GSM WCDMA Mobile phone with BT

MARKETING NAME:

TYPE:

MANUFACTURER:

RM-1**GSM 1900****Nokia Corporation**

CLIENT:

Nokia Corporation

ADDRESS:

P.O.Box 68, FI-33721 Tampere, Finland

TELEPHONE:

+358 40 8200564 / Tero Huhtala

TEST LABORATORY:

Nemko Oy

FCC REG. NO.

91087 August 27, 2001

IC FILE NO.

IC 4627 July 2, 2003**SUMMARY:**

In regard to the performed tests the equipment under test fulfils the requirements defined in the test specifications, see page 2 for details

The test results are valid for the tested unit only. Without a written permission of Nemko Oy it is allowed to copy this report as a whole, but not partially.

Summary of performed tests and test results

<i>Section in CFR 47</i>	<i>Section in RSS-133</i>		<i>Result</i>
24.232, (b)	6.2	Radiated RF output	-
2.1049, (h)	5.6	99% occupied bandwidth	X
24.238 (a)	6.3	Band-edge compliance	PASS
24.238 (a), 2.1053	6.3	Spurious radiated emissions	PASS
24.235, 2.1055 (a)(1)(b)	7	Frequency stability, temperature variation	PASS
24.235, 2.1055 (d)(1)(2)	7	Frequency stability, voltage variation	PASS

Explanations:

PASS The EUT passed that particular test.

FAIL The EUT failed that particular test.

X The measurement was done, but there is no applicable performance criteria.

- The measurement was not done

Contents

Summary of performed tests and test results.....	2
1. EUT and Accessory Information	4
1.1 EUT description.....	4
1.2 EUT and accessories.....	4
2. Standards and measurement methods	5
3. Test results	5
3.1 99% occupied bandwidth	5
3.1.1 Test method and limit.....	5
3.1.2 Limit.....	5
3.1.3 EUT operation mode	6
3.1.4 Test results	6
3.1.5 EUT operation mode	7
3.1.6 Test results	7
3.2 Band-edge compliance	8
3.2.1 Test method and limit.....	8
3.2.2 Limit.....	8
3.2.3 EUT operation mode	9
3.2.4 Test results	9
3.2.5 EUT operation mode	11
3.2.6 Test results	11
3.3 Spurious radiated emission.....	13
3.3.1 Test method and limit.....	13
3.3.2 Limit.....	13
3.3.3 EUT operation mode	14
3.3.4 Test results	14
3.3.5 EUT operation mode	15
3.3.6 Test results	15
3.4 Frequency stability. temperature variation	16
3.4.1 Test method and limit.....	16
3.4.2 Limit.....	16
3.4.3 EUT operation mode	17
3.4.4 Test results	17
3.5 Frequency stability. voltage variation	18
3.5.1 Test method and limit.....	18
3.5.2 Limit.....	18
3.5.3 EUT operation mode	19
3.5.4 Test results	19
4. List of test equipment	20
5. Photographs	21

1. EUT and Accessory Information

1.1 EUT description

The EUT is a triple band (900/1800/1900MHz) EGPRS GSM WCDMA mobile phone with BT.

1.2 EUT and accessories

	<i>unit</i>	<i>type</i>	S/N
<i>EUT1</i>	Mobile phone	RM-1	004400271747543
<i>EUT2</i>	Mobile phone	RM-1	004400271747204
Accessories	Battery Dummy Battery Antenna adapter	BL-5C SD-2 Special fixed, EUT2	067040063563401721 LK 50 02309K

2. Standards and measurement methods

The test were performed in guidance of the CFR 47 part 24, part 2, ANSI/TIA/EIA-603-A and RSS-133 (Issue 2, Rev. 1, 1999)

3. Test results


3.1 99% occupied bandwidth

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT1
<i>Site name</i>	Nemko Oy / Perkkaa
<i>Section in CRF 47</i>	§ 2.1049, (h)
<i>Section in RSS-133</i>	5.6
<i>Date of testing</i>	23.08.2004
<i>Test equipment</i>	42, 519, 545, X2
<i>Test conditions</i>	24 °C, 56 % RH
<i>Test result</i>	PASS

3.1.1 Test method and limit

The test was performed inside a shielded room. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

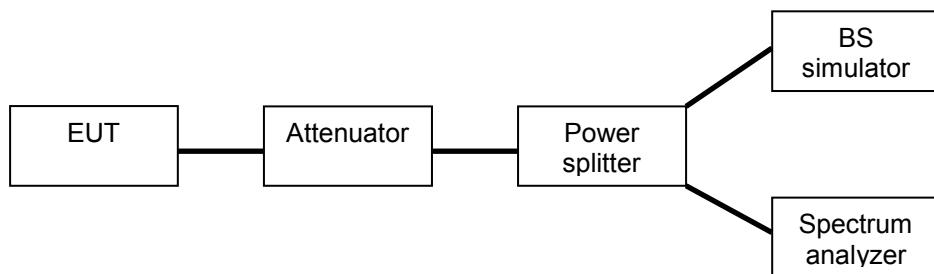

3.1.2 Limit

<i>Power level</i>	<i>99% occupied bandwidth</i>
0	--


3.1.3 EUT operation mode

<i>EUT operation mode</i>	GSM 1900, TX ON, 1 time slot transmission, audio PRBS 2E9-1 modulation, GMSK modulation
<i>EUT channel</i>	661
<i>EUT power level</i>	0 (+ 30 dBm)

3.1.4 Test results

<i>Channel</i>	<i>99% occupied bandwidth kHz</i>
661	244.96

The 99% occupied bandwidth was calculated from the trace data of the spectrum analyzer.

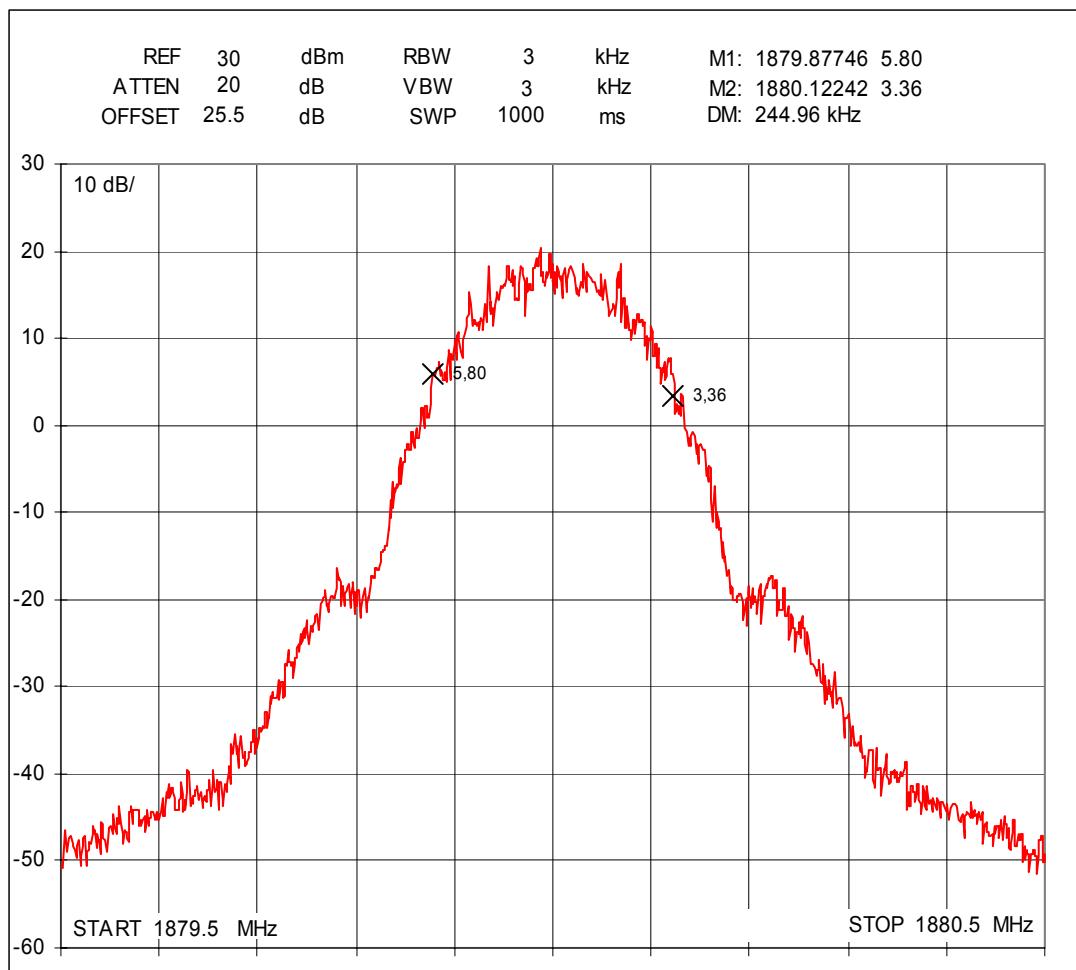

Spectrum analyzer plot channel 661, GMSK modulation


3.1.5 EUT operation mode

<i>EUT operation mode</i>	GSM 1900, TX ON, 1 time slot transmission, audio PRBS 2E9-1 modulation, 8PSK modulation (edge)
<i>EUT channel</i>	661
<i>EUT power level</i>	0 (+ 30 dBm)

3.1.6 Test results

<i>Channel</i>	<i>99% occupied bandwidth kHz</i>
661	236.89

The 99% occupied bandwidth was calculated from the trace data of the spectrum analyzer.

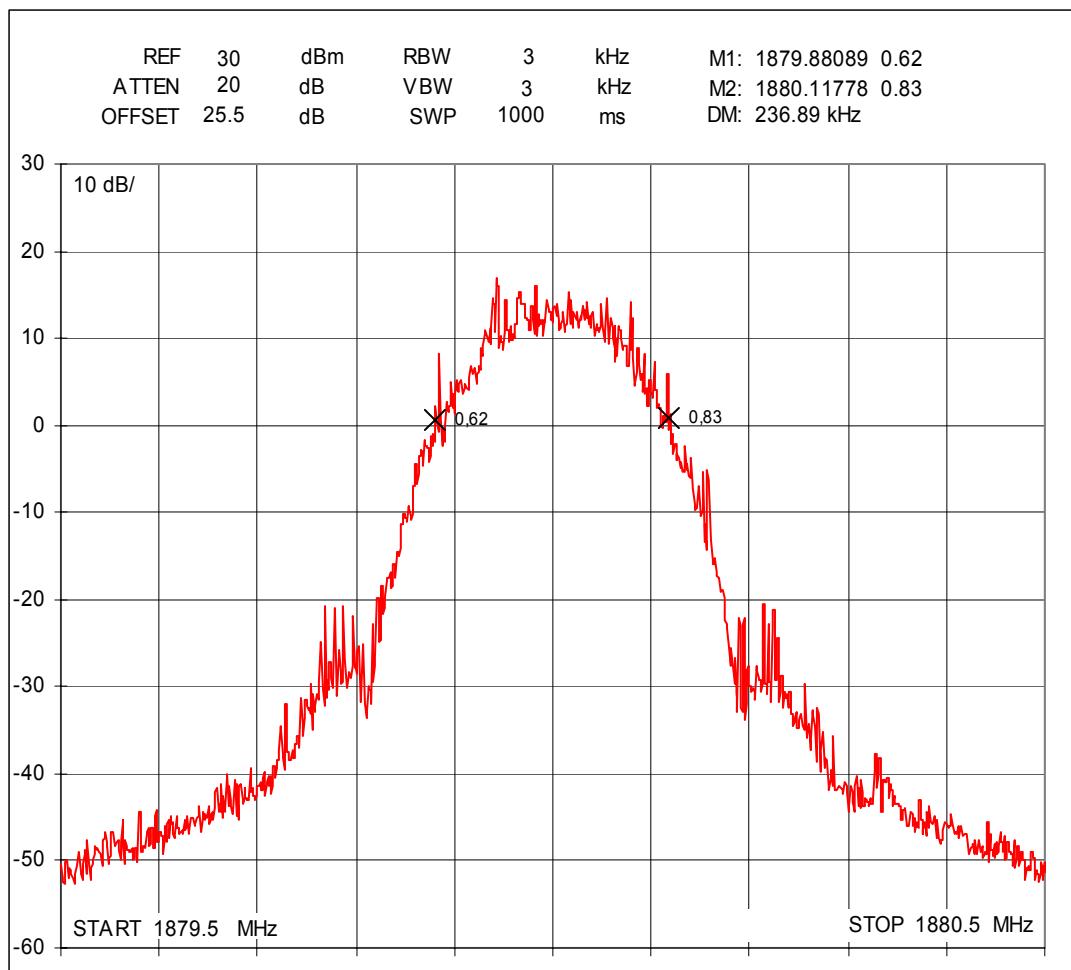

Spectrum analyzer plot channel 661, 8PSK modulation (edge)


3.2 Band-edge compliance

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2
<i>Site name</i>	Nemko Oy / Perkkaa
<i>Section in CRF 47</i>	§ 24.238 (a)
<i>Section in RSS-133</i>	6.3
<i>Date of testing</i>	23.08.2004
<i>Test equipment</i>	42, 519, 545, X2
<i>Test conditions</i>	24 °C, 56 % RH
<i>Test result</i>	PASS

3.2.1 Test method and limit

The test was performed inside a shielded room. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

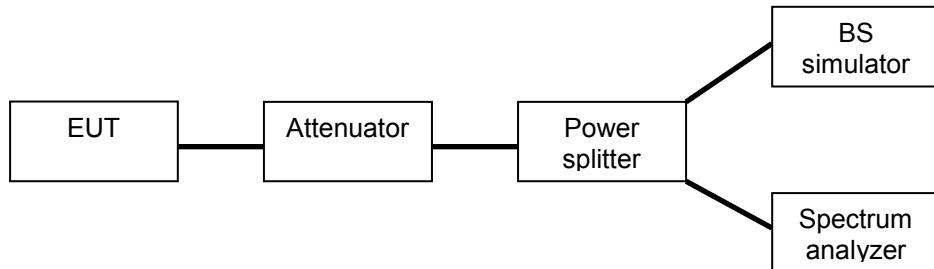

3.2.2 Limit

<i>Frequency MHz</i>	<i>Band-edge compliance dBm</i>
< 1850 or 1910 <	≤ -13


3.2.3 EUT operation mode

<i>EUT operation mode</i>	GSM 1900, TX ON, 1 time slot transmission, audio PRBS 2E9-1 modulation, GMSK modulation
<i>EUT channel</i>	512, 810
<i>EUT power level</i>	0 (+ 30 dBm)

3.2.4 Test results


The line in the spectrum analyzer plot is the -13dBm limit line. The band edge is at the middle of the screen. The results were corrected with combined attenuation of the cables, attenuator and power divider set as "offset" in the spectrum analyzer.

<i>Channel</i>	<i>Band-edge compliance MHz / dBm</i>	<i>Limit Frequency MHz / dBm</i>
512	1849.996 / -16.90	< 1850 or 1910 < / ≤ -13

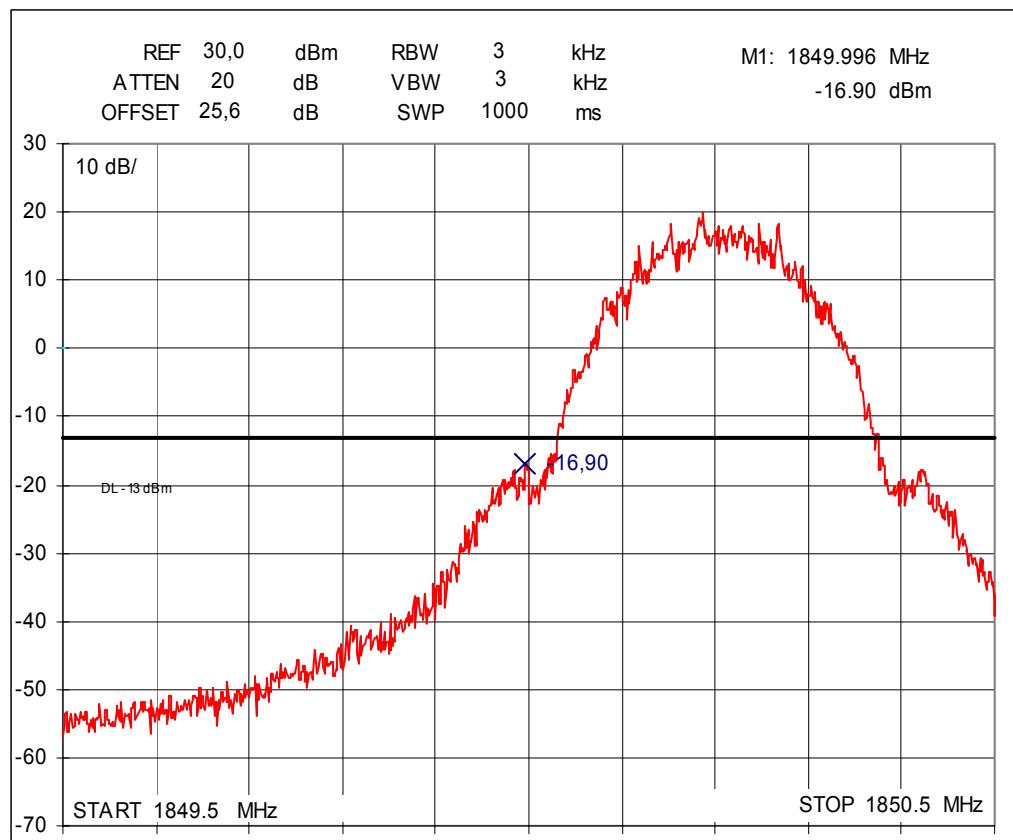

Spectrum analyzer plot channel 512, GMSK modulation

Channel	Band-edge compliance MHz / dBm	Limit Frequency MHz / dBm
810	1910.018 / -15.40	< 1850 or 1910 < / ≤ -13

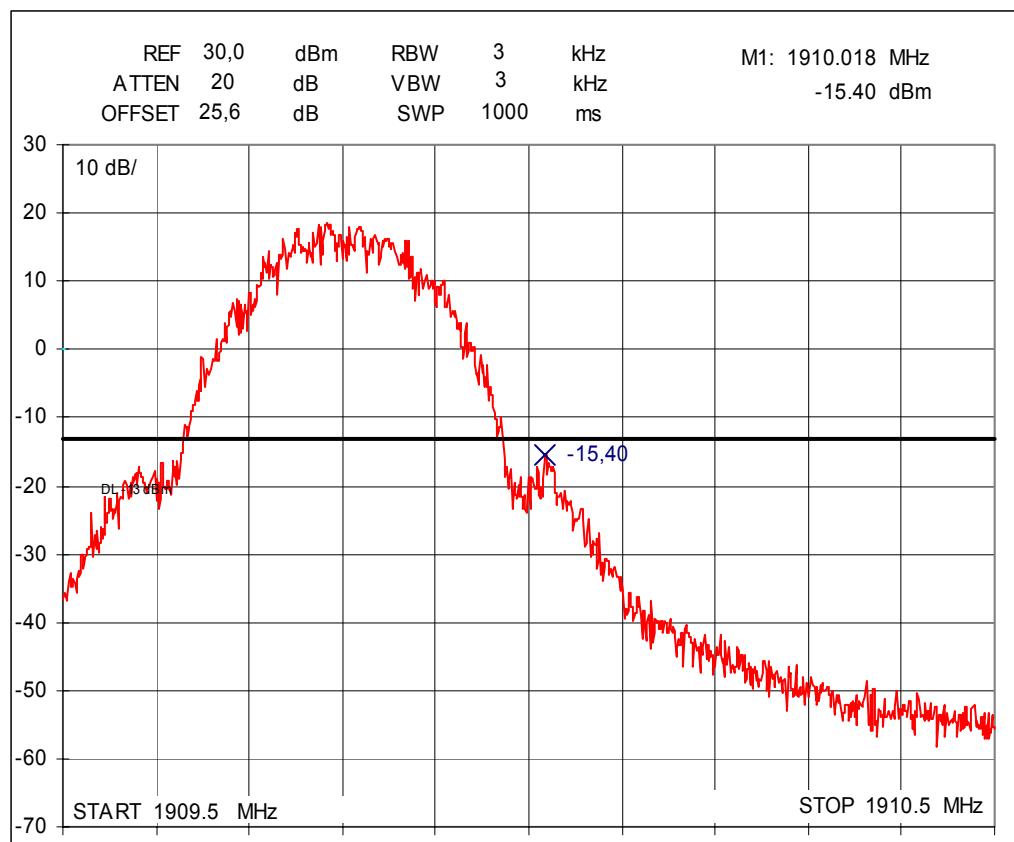

Spectrum analyzer plot channel 810, GMSK modulation


3.2.5 EUT operation mode

<i>EUT operation mode</i>	GSM 1900, TX ON, 1 time slot transmission, audio PRBS 2E9-1 modulation, 8PSK modulation (edge)
<i>EUT channel</i>	512, 810
<i>EUT power level</i>	0 (+ 30 dBm)

3.2.6 Test results


The line in the spectrum analyzer plot is the -13dBm limit line. The band edge is at the middle of the screen. The results were corrected with combined attenuation of the cables, attenuator and power divider set as "offset" in the spectrum analyzer.

<i>Channel</i>	<i>Band-edge compliance MHz / dBm</i>	<i>Limit</i>
		<i>Frequency MHz / dBm</i>
512	1849.984 / -18.60	< 1850 or 1910 < / ≤ -13

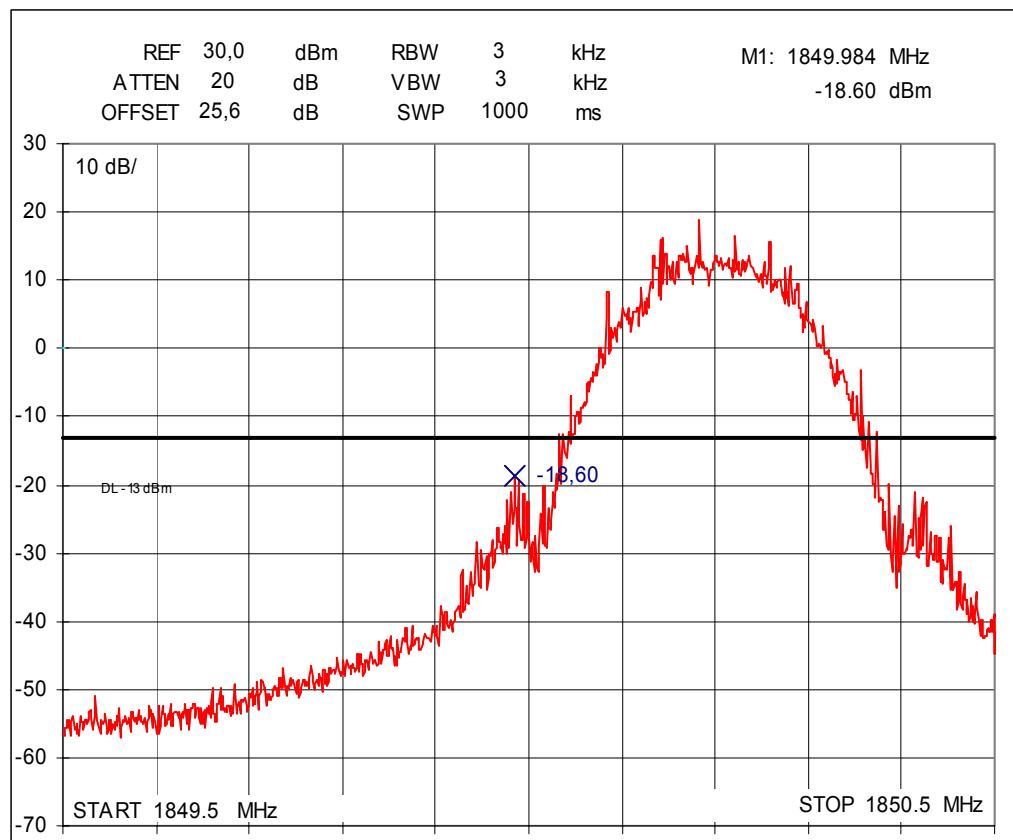

Spectrum analyzer plot channel 512, 8PSK modulation (edge)

Channel	Band-edge compliance MHz / dBm	Limit
810	1910.012 / -19.70	Frequency MHz / dBm

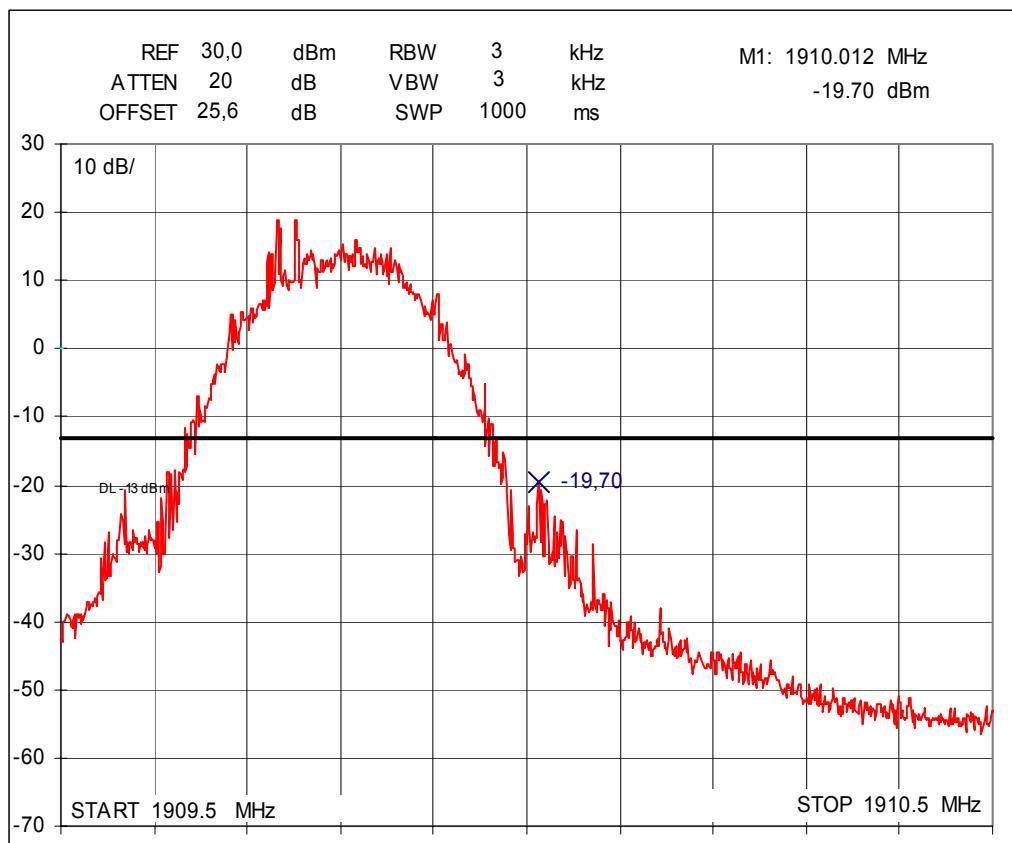

Spectrum analyzer plot channel 810, 8PSK modulation (edge)

3.3 Spurious radiated emission

<i>EUT</i>	EUT1
<i>Site name</i>	Nemko Oy / Perkkaa
<i>Section in CRF 47</i>	§ 24.238 (a), § 2.1053
<i>Section in RSS-133</i>	6.3
<i>Date of testing</i>	20.08.2004
<i>Test equipment</i>	350, 42, 525, 319, 544, 184, 542, 543, 545, 550, 552, X1
<i>Test conditions</i>	24 °C, 58 % RH
<i>Test Result</i>	PASS

3.3.1 Test method and limit

The test was performed inside a semi anechoic shielded room. For the duration of the test the EUT was placed on a non-conductive support 0.8 m high standing on the turntable. In the corner of the chamber there was a communication antenna, which was connected to the BS simulator located outside the room. The radiated power from the EUT was measured with an antenna fixed to a antenna tower. The tower and turn table were remotely controlled to turn the EUT and change the antenna polarization. The measured signal was routed from the measuring antenna to the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

- The maximum power level was searched at each frequency by rotating the turntable and adjusting the measuring antenna polarization and height (from 1- 4 m). This level (P_{EUT}) was recorded. The measurements were performed the EUT at all three orthogonal planes
- The EUT was replaced with a substituting antenna.
- The substituting antenna was fed with the power (P_{Gen}) giving a convenient reading on the spectrum analyzer and the measuring antenna height was adjusted to obtain a maximum reading at spectrum analyzer. That reading (P_{Subst}) on spectrum analyzer was recorded.

3.3.2 Limit

<i>Frequency MHz</i>	<i>Level dBm</i>
30 - 19100	- 13

3.3.3 EUT operation mode

<i>EUT operation mode</i>	GSM 1900, TX ON, 1 time slot transmission, audio PRBS 2E9-1 modulation, GMSK modulation
<i>EUT channel</i>	661
<i>EUT power level</i>	0 (+ 30 dBm)

3.3.4 Test results

The formula below was used to calculate the EIRP of the spurious emissions. If there were no emissions closer than 20 dB below the limit line, then the emission levels were measured at the transmitter's harmonics.

$$P_{Emission[dBm]} = P_{Measured[dB]} - P_{Subst[dB]} - L_{Cable[dB]} + G_{Antenna[dBi]} + P_{Gen[dBm]}$$

Where

$P_{Measured[dBm]}$ measured emission level

$P_{Subst[dBm]}$ measured emission level from substitutive antenna

$L_{Cable[dB]}$ loss of the cable between substitutive antenna and signal generator

$G_{Antenna[dBi]}$ gain of the substitutive antenna

$P_{Gen[dBm]}$ signal generator power fed to the substitutive antenna

Calculation example:

$$\begin{aligned}
 P_{3700.4[dBm]} &= -37.2_{Measured[dB]} - (-31.3)_{Subst[dB]} - 3.28_{Cable[dB]} + 10.31_{Antenna[dBi]} + (-40)_{Gen[dBm]} \\
 &= -38.9_{[dBm]}
 \end{aligned}$$

TX GSM 1900 (ch 661)

Frequency MHz	Result dBm	Result nW	Limit dBm	Margin dB
3760.0	-45.1	31.1	-13	32.1
5640.0	-38.9	129	-13	25.9
7520.0	-45.7	26.8	-13	32.7
9400.0	-44.6	35.0	-13	31.6
11280.0	-40.2	96.4	-13	27.2

3.3.5 EUT operation mode

<i>EUT operation mode</i>	GSM 1900, TX ON, 1 time slot transmission, audio PRBS 2E9-1 modulation, 8PSK modulation (edge)
<i>EUT channel</i>	661
<i>EUT power level</i>	0 (+ 30 dBm)

3.3.6 Test results

The formula below was used to calculate the EIRP of the spurious emissions. If there were no emissions closer than 20 dB below the limit line, then the emission levels were measured at the transmitter's harmonics.

$$P_{Emission[dBm]} = P_{Measured[dB]} - P_{Subst[dB]} - L_{Cable[dB]} + G_{Antenna[dBi]} + P_{Gen[dBm]}$$

Where

$P_{Measured[dBm]}$ measured emission level

$P_{Subst[dBm]}$ measured emission level from substitutive antenna

$L_{Cable[dB]}$ loss of the cable between substitutive antenna and signal generator

$G_{Antenna[dBi]}$ gain of the substitutive antenna

$P_{Gen[dBm]}$ signal generator power fed to the substitutive antenna

Calculation example:

$$\begin{aligned}
 P_{3700.4[dBm]} &= -39.0_{Measured[dB]} - (-31.3)_{Subst[dB]} - 3.28_{Cable[dB]} + 10.31_{Antenna[dBi]} + (-40)_{Gen[dBm]} \\
 &= -40.7_{[dBm]}
 \end{aligned}$$

TX GSM 1900 (ch 661), edge

Frequency MHz	Result dBm	Result nW	Limit dBm	Margin dB
3760.0	-47.0	20.1	-13	34.0
5640.0	-40.7	85.8	-13	27.7
7520.0	-46.6	21.8	-13	33.6
9400.0	-45.4	29.1	-13	32.4
11280.0	-41.2	76.6	-13	28.2

3.4 Frequency stability. temperature variation


The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2
<i>Site name</i>	Nemko Oy / Perkkaa
<i>Section in CRF 47</i>	24.235. 2.1055 (a)(1)(b)
<i>Section in RSS-133</i>	7
<i>Date of testing</i>	18.-19.08.2004
<i>Test equipment</i>	545. 157
<i>Test conditions</i>	24 °C. 56 % RH
<i>Test result</i>	PASS

3.4.1 Test method and limit

The test was performed EUT placed inside a temperature chamber. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

- a) The climate chamber temperature was set to the minimum value and the temperature was allowed to stabilize.
- b) The EUT was placed in the chamber
- c) The EUT was set in idle mode for 45 minutes.
- d) The EUT was set to transmit.
- e) The transmit frequency error was measured immediately
- f) The steps c - e were repeated for each temperature

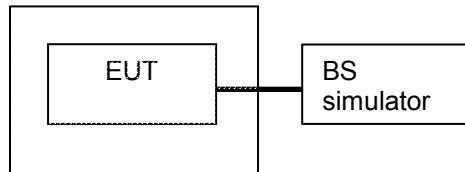

3.4.2 Limit

<i>Frequency error ppm</i>
± 2.5

3.4.3 EUT operation mode

<i>EUT operation mode</i>	GSM 1900. TX ON. 1 time slot transmission. audio PRBS 2E9-1 modulation. GMSK modulation
<i>EUT channel</i>	661
<i>EUT power level</i>	0 (+ 30 dBm)

3.4.4 Test results

<i>Temperature [°C]</i>	<i>Deviation [Hz]</i>	<i>Deviation [ppm]</i>
-30	*)	*)
-20	36	0,019
-10	30	0,016
0	27	0,014
10	21	0,011
20	20	0,011
30	27	0,014
40	21	0,011
50	20	0,011

Frequency deviation. temperature variation

Note: *) The phone did not work at this temperature

3.5 Frequency stability. voltage variation

The test was performed as a compliance test. The test parameters concerned were as follows:

EUT	EUT2
<i>Site name</i>	Nemko Oy / Perkkaa
<i>Section in CRF 47</i>	24.235. 2.1055 (d)(1)(2)
<i>Section in RSS-133</i>	7
<i>Date of testing</i>	23.08.2004
<i>Test equipment</i>	545. 76
<i>Test conditions</i>	24 °C. 56 % RH
<i>Test result</i>	PASS

3.5.1 Test method and limit

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and in 0.1V increments the battery cut-off point.



3.5.2 Limit

Frequency error ppm
± 2.5

3.5.3 EUT operation mode

<i>EUT operation mode</i>	GSM 1900. TX ON. 1 time slot transmission. audio PRBS 2E9-1 modulation. GMSK modulation
<i>EUT channel</i>	661
<i>EUT power level</i>	0 (+ 30 dBm)

3.5.4 Test results

<i>Battery level</i>	<i>Voltage [V]</i>	<i>Deviation [Hz]</i>	<i>Deviation [ppm]</i>
<i>Nominal</i>	3.9	26	0,014
<i>Cut off-point</i>	3.24	27	0,014

Frequency deviation. voltage variation

4. List of test equipment

Each active test equipment is calibrated once a year. antennas every 18 months and other passive equipments every 24 months.

Nr.	Equipment	Type	Manufacturer	Serial number
42	Spectrum analyzer	8566B	Hewlett Packard	2637A04102
76	Power supply	B32-30R	Oltronix	537
157	Temp. test chamber	VMT 04/240	Vötsch	31884
184	Temp. & humidity meter	H MI 32	Vaisala	63837
319	Antenna	CBL6112	Chase	2018
348	Shielded room	RFSD-100	Euroshield Oy	1320
350	Semianechoic shielded room	RFD-F-100	Euroshield Oy	1327
351	RF generator	SMT 06	Rohde & Schwarz	845715/001
519	RF High-Power Attenuator	765-20	Narda	
525	Double-Ridged Horn	3115	Emco	6691
542	Double-Ridged Horn	3115	Emco	00023905
543	RF-amplifier	JCA018-501	JCA Technologies	103
544	RF-amplifier	ZFL-2000VH2	Mini-Circuits	D01080
545	GSM MS Test System	CMU	Rohde & Schwarz	836536/049
552	Highpass Filter	WHK2.3/18G-10SS	Wainwright Instruments	1
550	Notch Filter	WRCD1800/2000-0.2/40-5SSSD	Wainwright Instruments	1
X1	RF-Generator	8341B	Hewlett Packard	2802A01090
X2	Power splitter	1870A	Weinschel	1798
X3	Antenna	3125-1880	ETS	00028029

5. Photographs

See "1032367_test_setup_photographs"