



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>



Dates of Tests: March 09 ~ 22, 2012
 Test Report S/N: LR500111203G
 Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

PFNDC10HD

APPLICANT

Digital Multimedia Technology Co., Ltd.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Digital Cable Settop-Box
Manufacturer	:	Digital Multimedia Technology Co.,Ltd.
Model name	:	DC10HD
Variant Model name	:	DMS2004UHD
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C-63.4-2003
Frequency Range	:	2425MHz ~ 2475MHz
Max. Output Power	:	Max 0.52dBm – Conducted
Data of issue	:	March 22, 2012

This test report is issued under the authority of:

Kyu-Hyun Lee, Manager

The test was supervised by:

Ki-Hun Cho, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S	-----	3
2. INFORMATION'S ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6dB BANDWIDTH	-----	6
3.2.2 PEAK OUTPUT POWER	-----	9
3.2.3 POWER SPECTRAL DENSITY	-----	12
3.2.4 BAND – EDGE & SPURIOUS	-----	15
3.2.5 FIELD STRENGTH OF HARMONICS	-----	21
3.2.6 AC CONDUCTED EMISSIONS	-----	25
APPENDIX	-----	
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	27

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2012-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2013-04-24	EMC accredited Lab.
FCC	U.S.A	610755	2014-04-27	FCC filing
FCC	U.S.A	649054	2013-04-13	FCC CAB
VCCI	JAPAN	R2133(10m), C2307	2014-06-21	VCCI registration
VCCI	JAPAN	T-2009	2013-12-23	VCCI registration
IC	CANADA	IC5799	2012-05-14	IC filing

2. Information's about test item

2-1 Client & Manufacturer

Company name : Digital Multimedia Technology Co.,Ltd.
 Address : 2nd Fl., 926, Gwanyang-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea
 Tel / Fax : TEL : +82-31-420-7501 / FAX : +82-31-420-7502

2-2 Equipment Under Test (EUT)

Trade name : Digital Cable Settop-Box
 FCC ID : PFNDC10HD
 Model name : DC10HD
 Variant Model name : DMS2004UHD
 Serial number : Identical prototype
 Date of receipt : March 05, 2011
 EUT condition : Pre-production, not damaged
 Antenna type : PCB Pattern antenna
 (M/N: GP_P405_RDD_01709) Max Gain 3.244 dBi
 Frequency Range : 2425MHz ~ 2475MHz (DSSS)
 RF output power : Max 0.52dBm - Conducted
 Number of channels : 11
 Type of Modulation : O-QPSK
 Channel spacing : 5MHz
 Power Source : 5Vdc (by AC/DC Adaptor: M/N : EDF0500150A1BA)
 Firmware version : V1.0.0

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2425	2450	2475

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Industrial PC	MHG-10	11MH-G006	MFLO
TV monitor	LT-26H6TVH	DO8090SR100075	N/A
IR Sensor	N/A	N/A	N/A

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.247(d)	Band Edge & Spurious	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

The Digital Multimedia Technology Co., Ltd. FCC ID: PFNDC10HD unit complies with the requirement of §15.203. The antenna is PCB Pattern Antenna.

The sample was tested according to the following specification:
FCC Parts 15.247; ANSI C-63.4-2003

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 10 MHz

VBW = 100 kHz (VBW = RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2425	1.577	Complies
2450	1.592	Complies
2475	1.585	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

6 dB Bandwidth > 500kHz

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low Channel

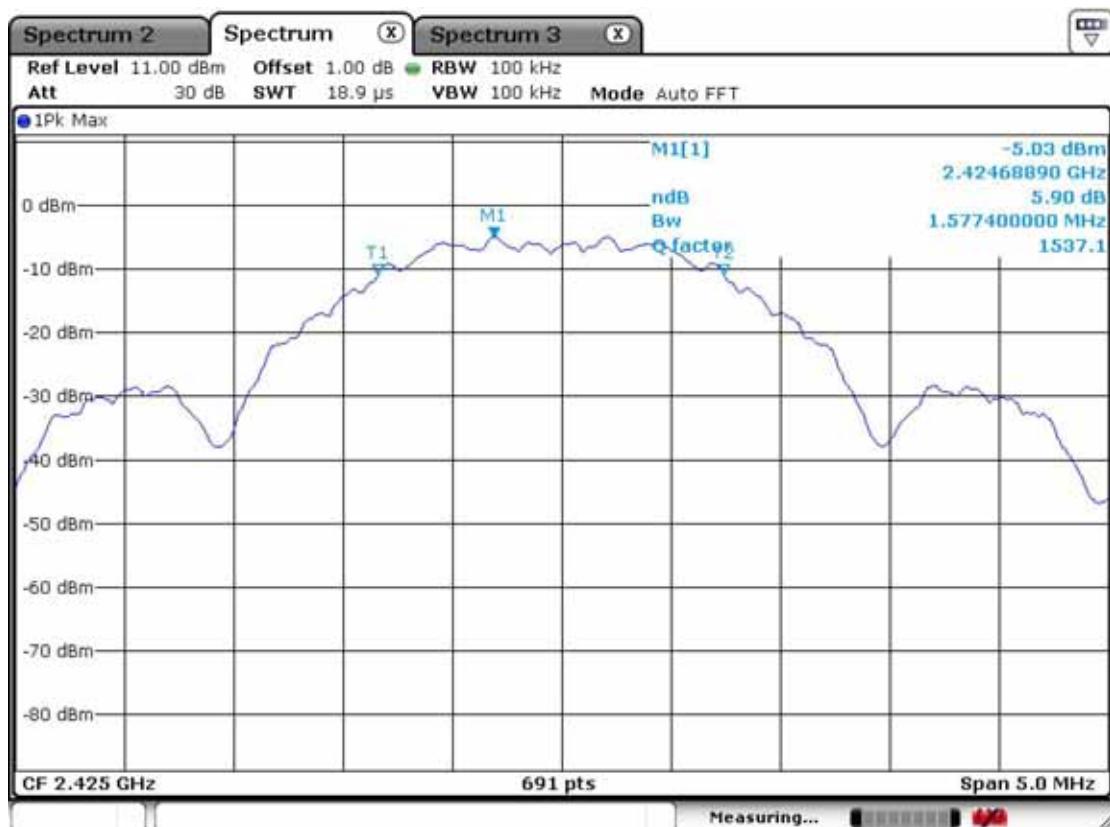

Mid Channel



High Channel

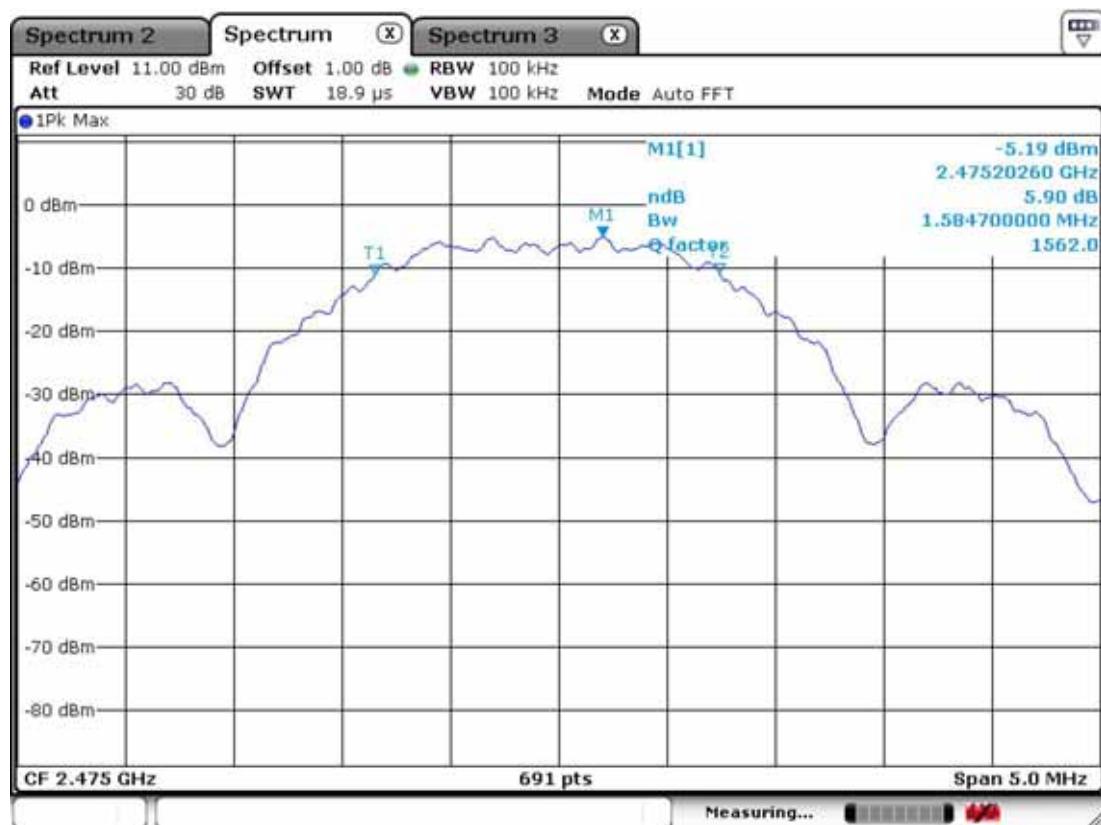

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1MHz Span = auto

VBW = 1MHz (VBW = RBW) Sweep = auto

Detector function = peak

Measurement Data:


Frequency (MHz)	Test Results		
	dBm	mW	Result
2425	0.40	1.096	Complies
2450	0.52	1.127	Complies
2475	0.46	1.111	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	< 1W
-------------------	------


Low Channel

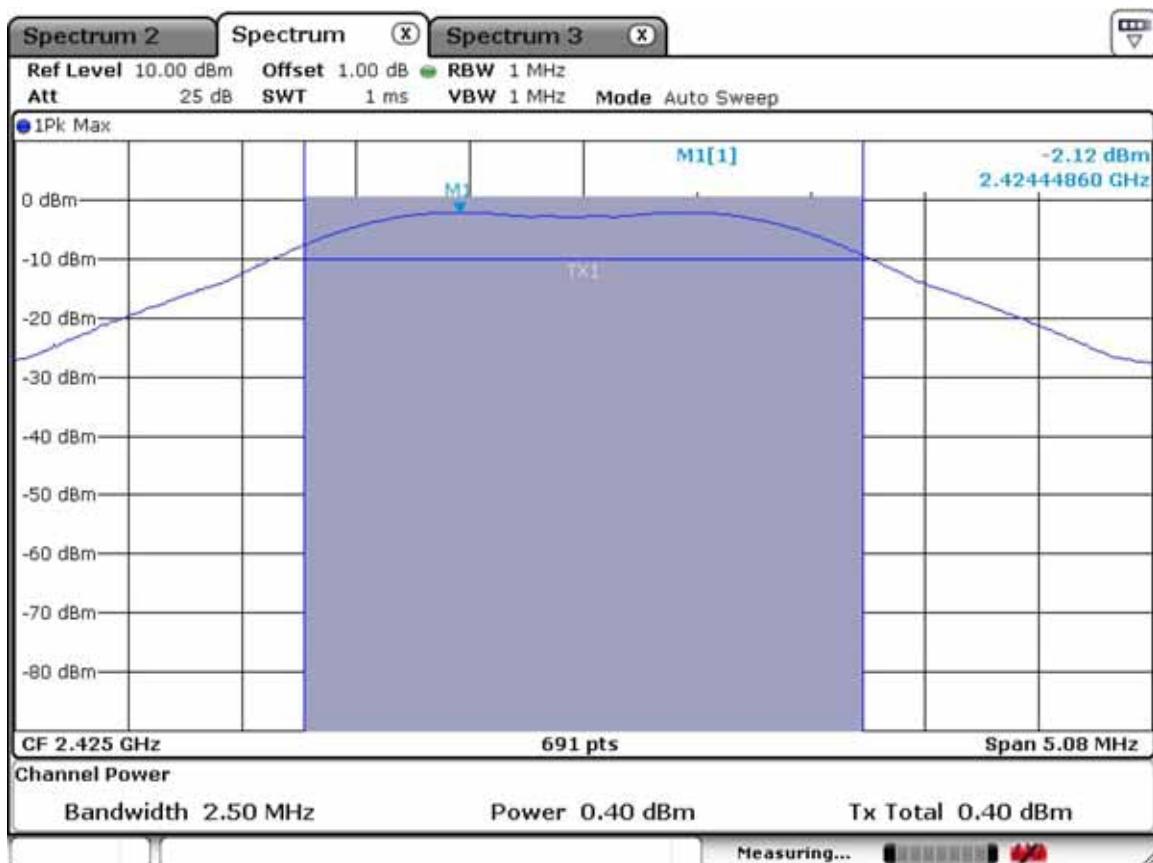

Mid Channel

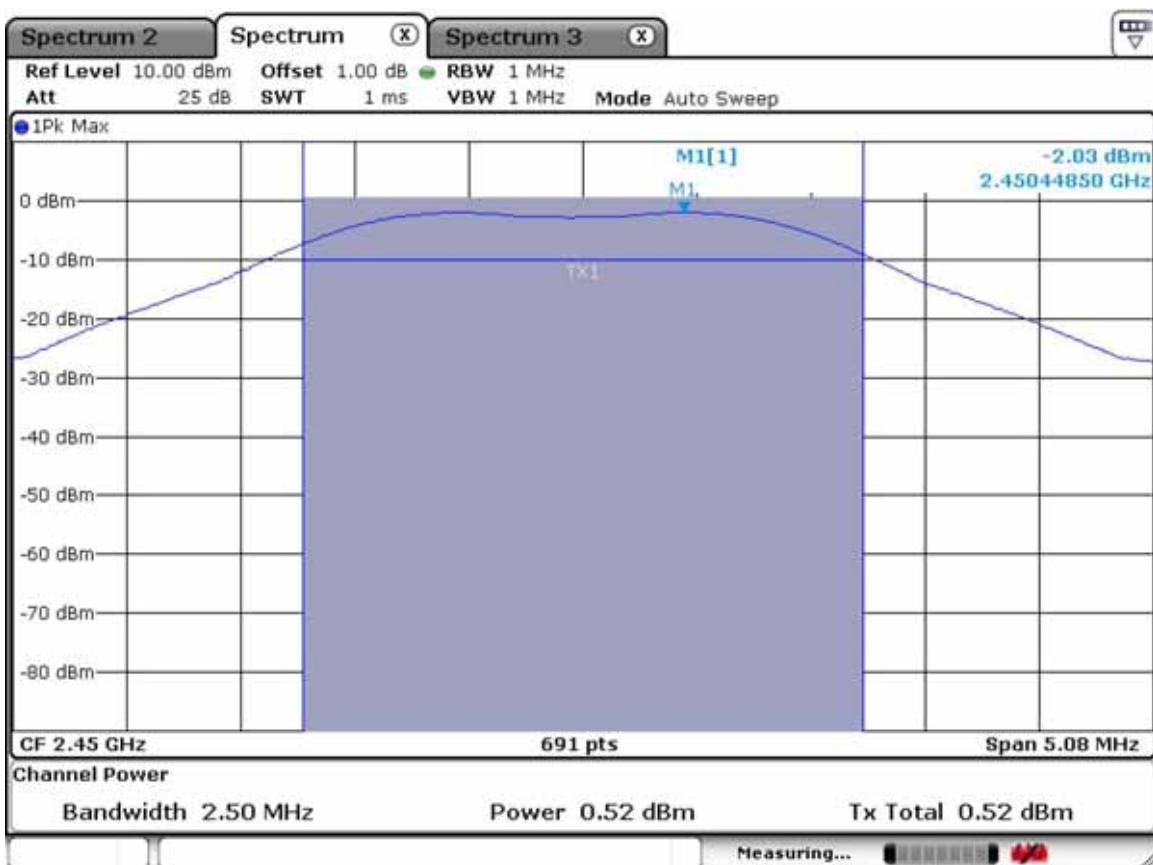

High Channel

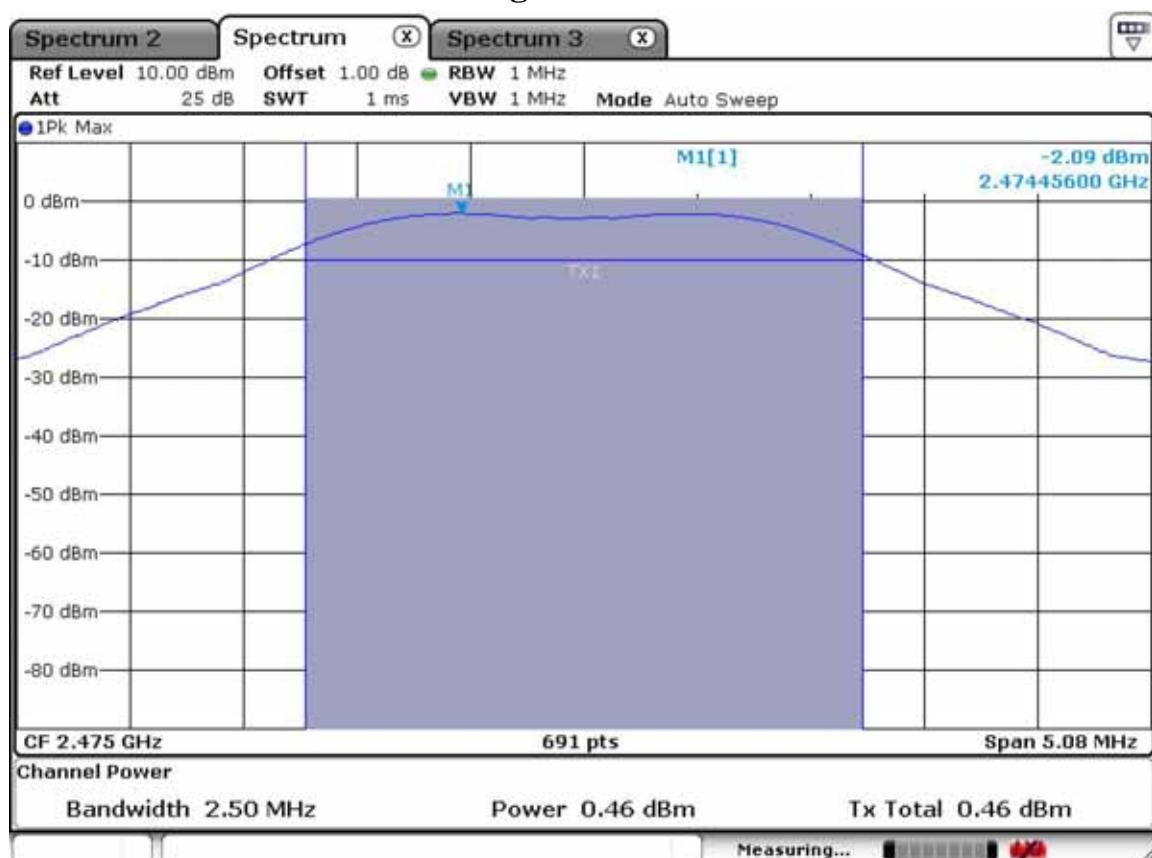

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz	Span = 300 kHz
VBW = 10 kHz	Sweep = 100 sec
Detector function = peak	Trace = max hold

Measurement Data:

Frequency (MHz)	Test Results	
	dBm	Result
2425	-15.19	Complies
2450	-15.46	Complies
2475	-15.45	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	< 8dBm @ 3kHz BW
------------------------	------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Low Channel

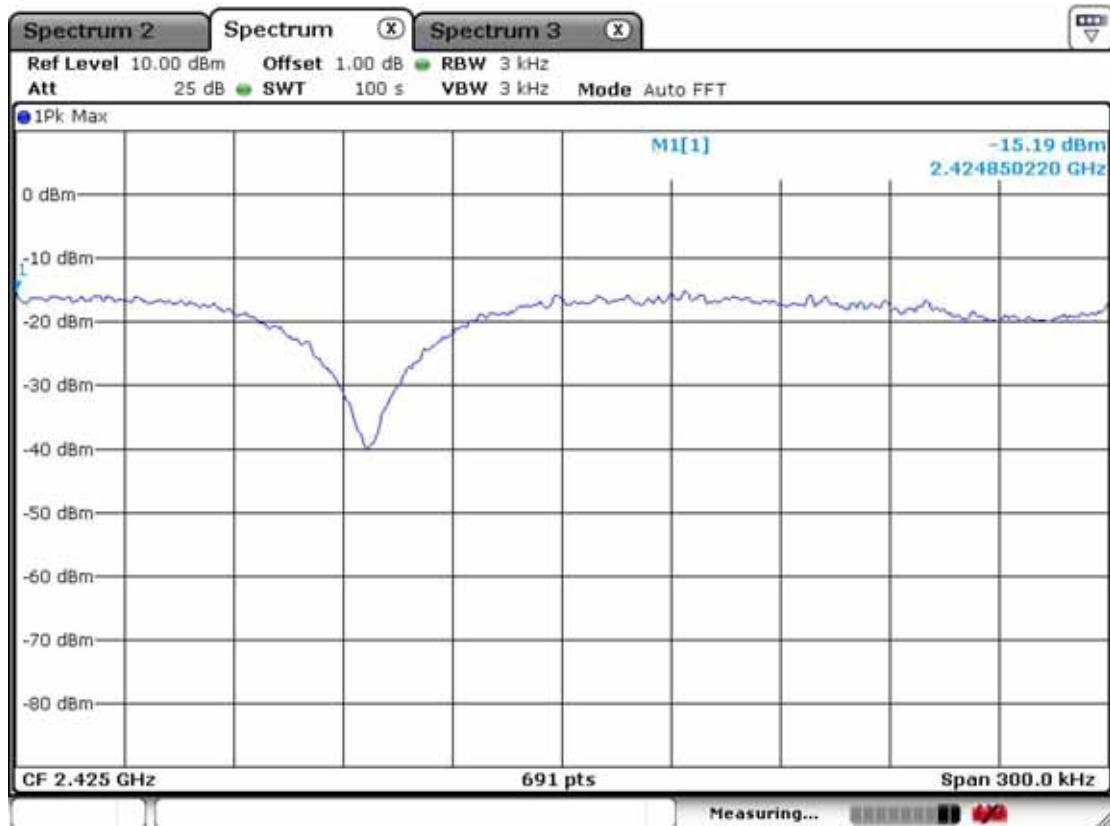

Mid Channel

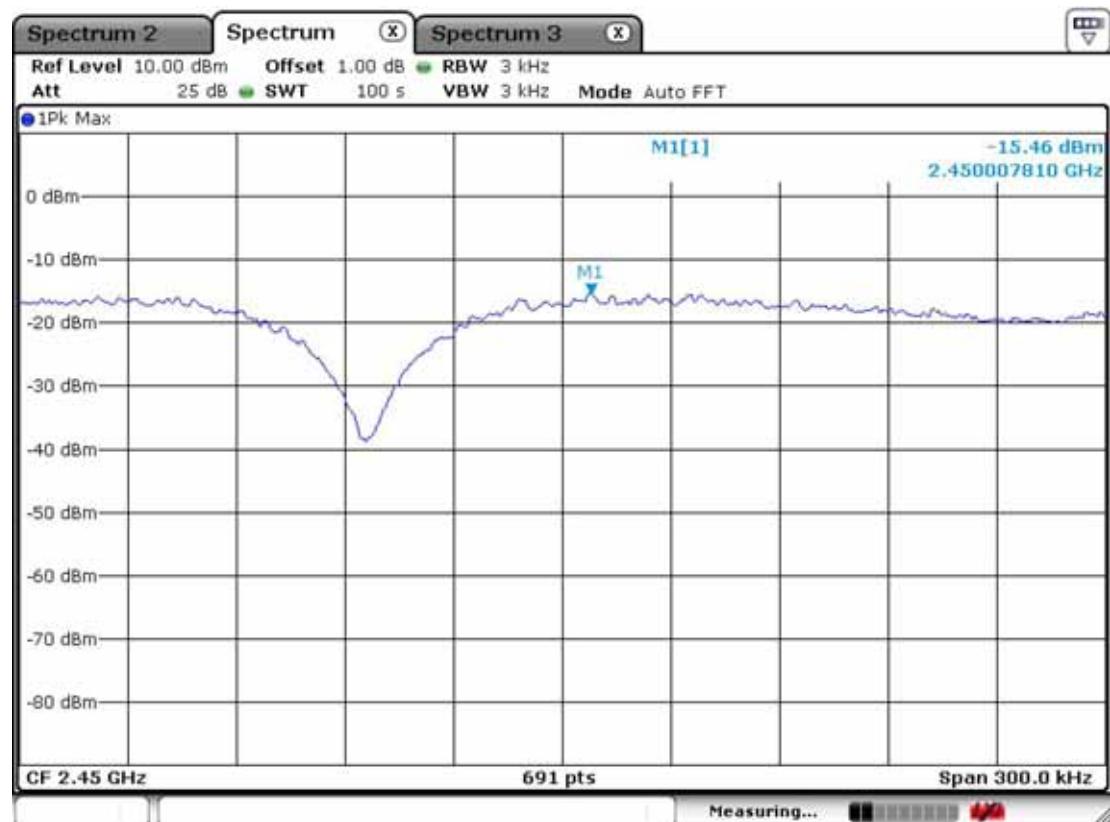

High Channel

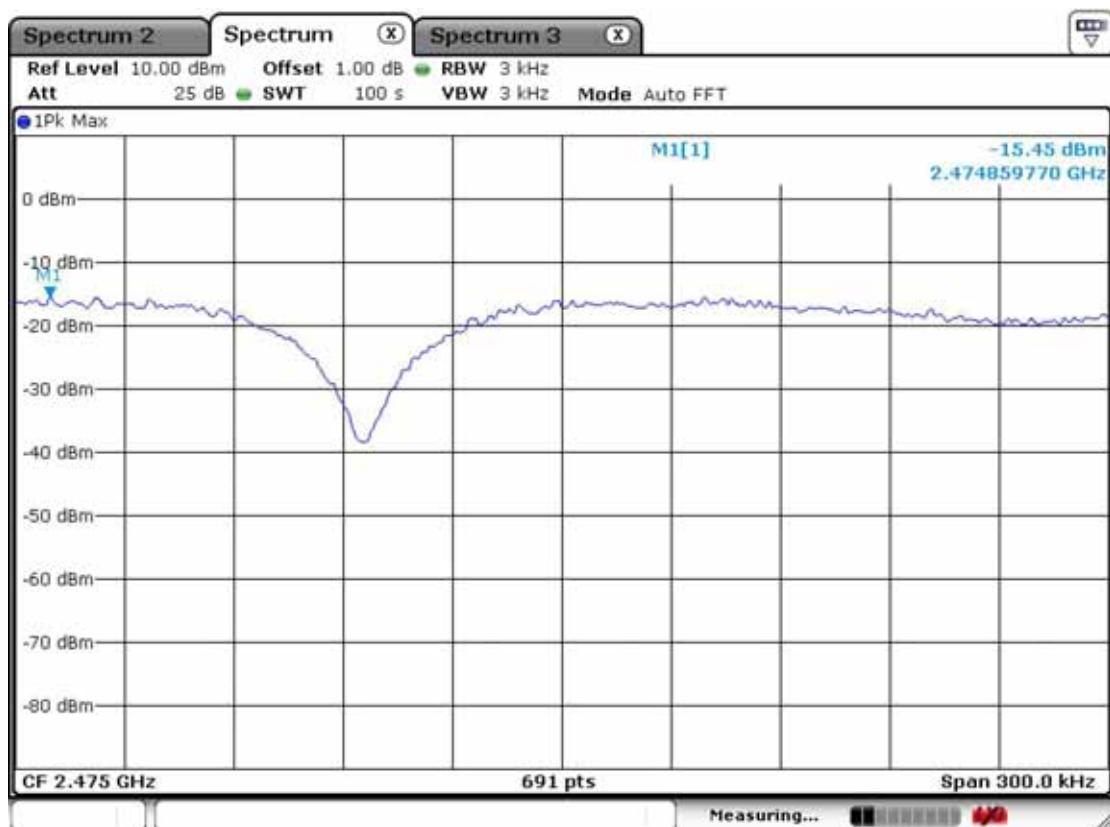

3.2.4 Band - edge & Spurious

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 20/80 MHz Detector function = peak

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK: RBW = VBW = 1MHz. Sweep=Auto



Average: RBW = 1MHz, VBW = 10Hz, Sweep = Auto

Measurement Distance: 3m

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

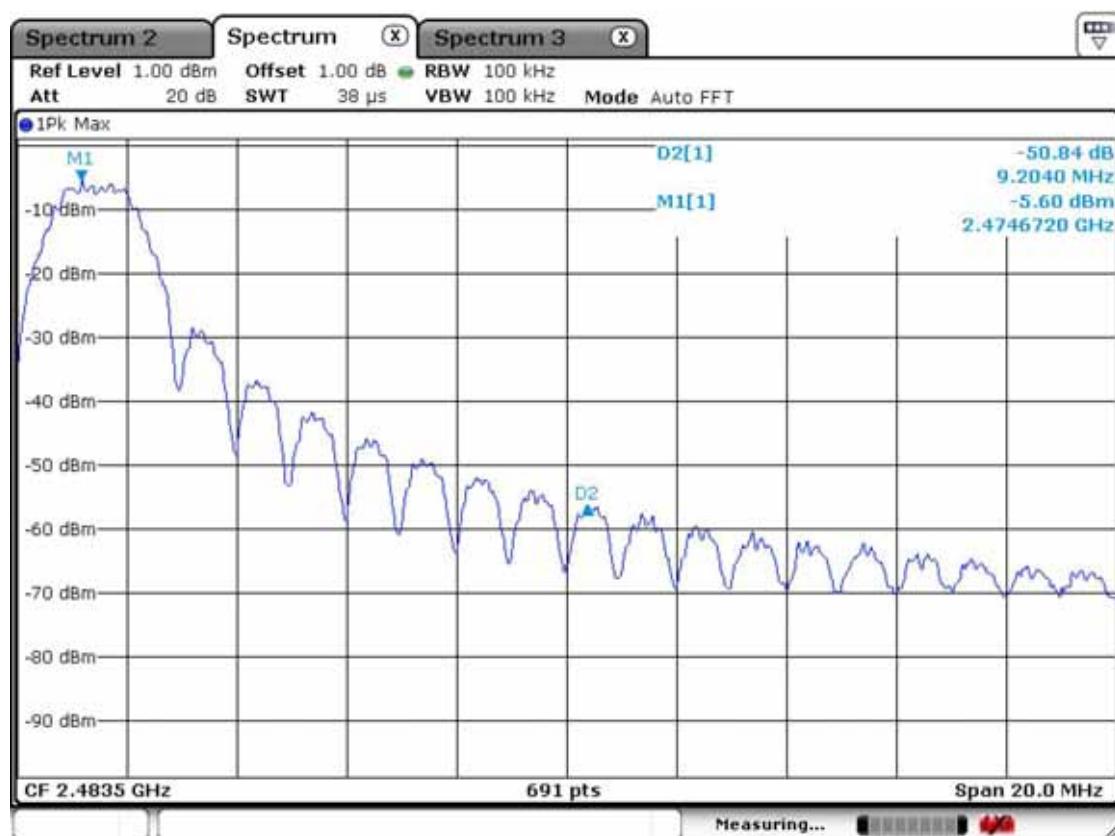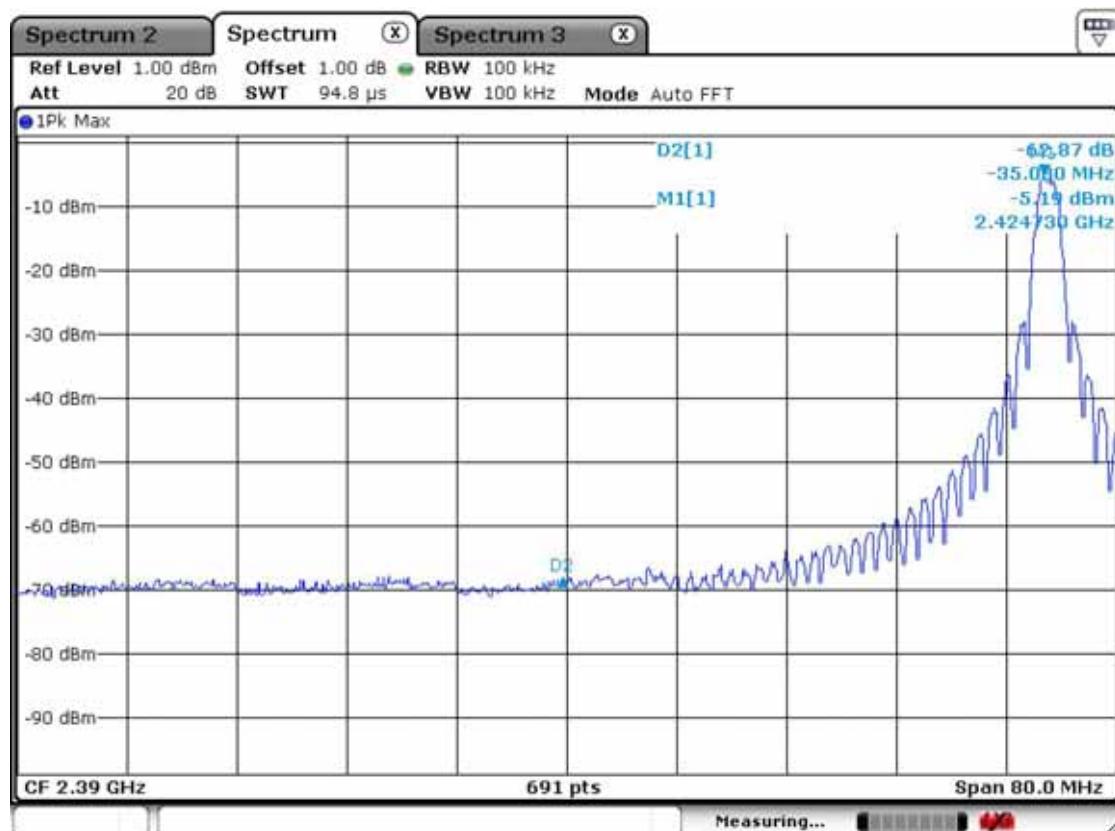Band-edge

Band-edges in the restricted band 2310-2390 MHz measurement


Frequency [MHz]	Reading [dBuV/m]	Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp. Gain	Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
2390.0	42.2 55.1	V	25.4	37.1	4.0	54.0 74.0	34.5 47.4	19.6 26.7			

Band-edges in the restricted band 2483.5-2500 MHz measurement


Frequency [MHz]	Reading [dBuV/m]	Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
			Antenna	Amp. Gain	Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
2483.5	46.8 59.5	V	25.4	37.1	4.0	54.0 74.0	39.1 51.8	15.0 22.3			

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.


Low channel

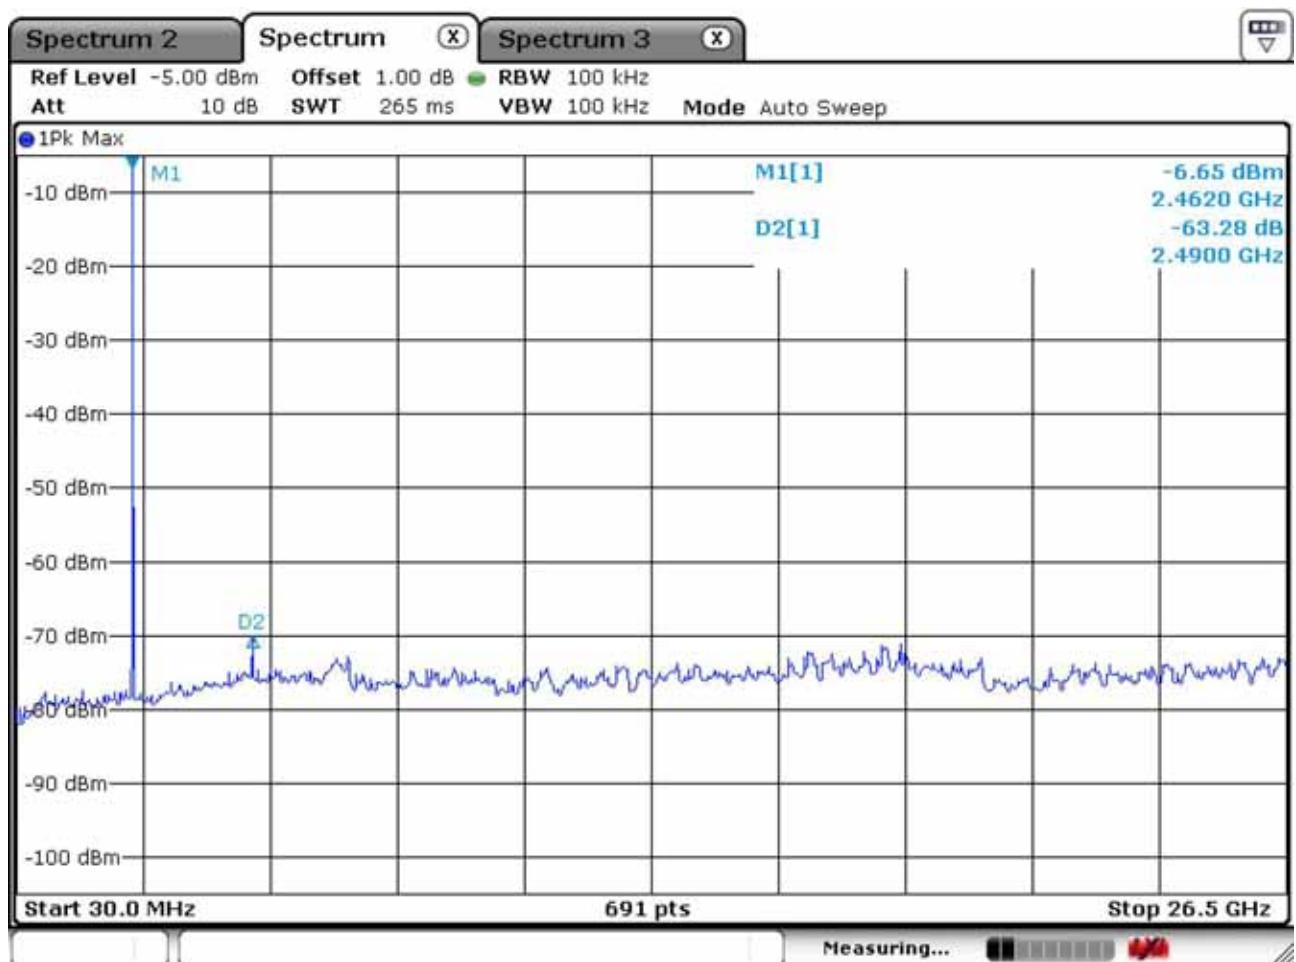Frequency Range = 30 MHz ~ 10th harmonic.

Mid channel

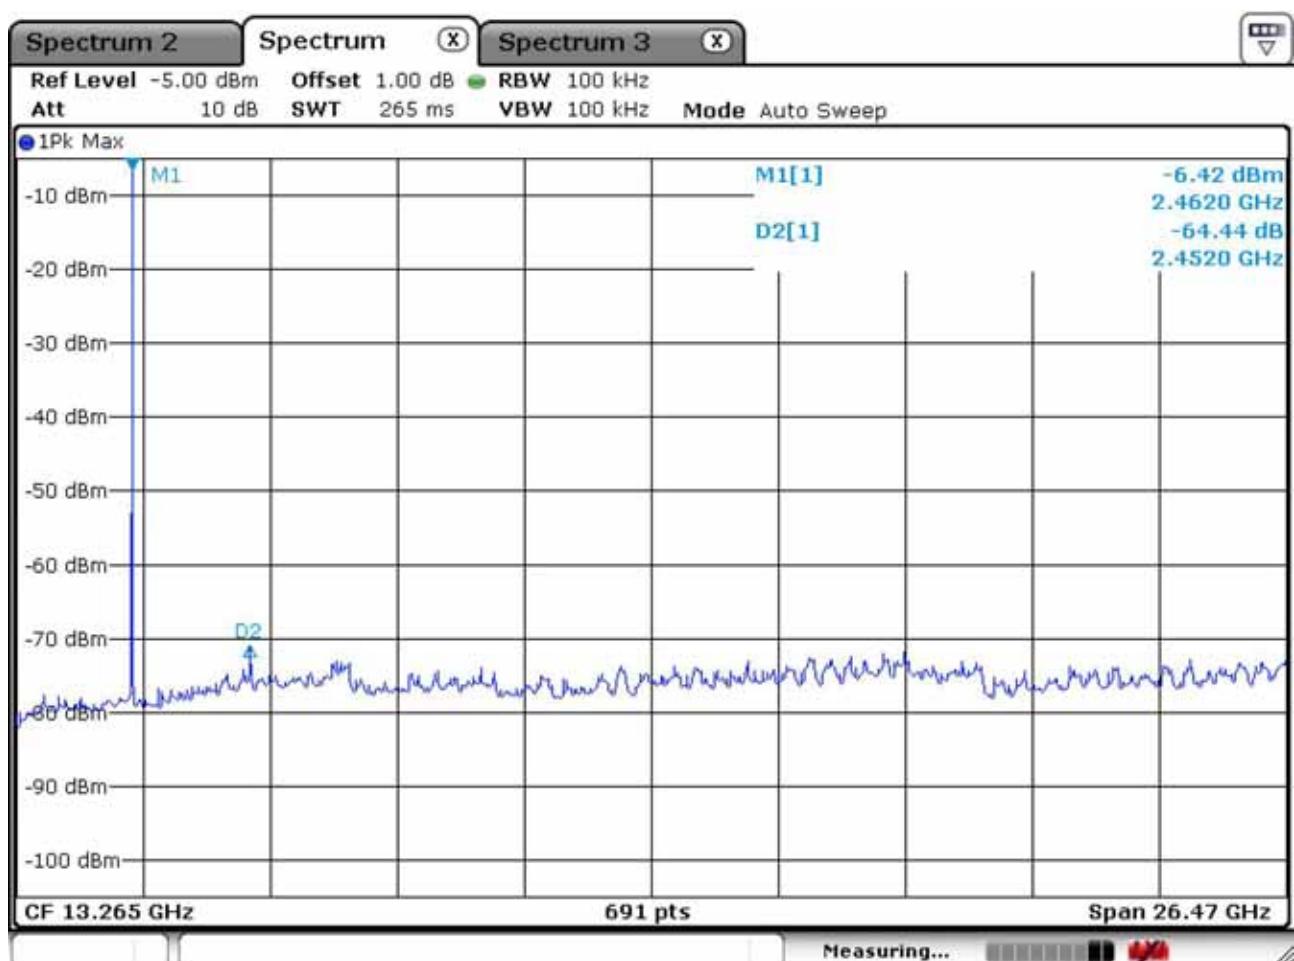Frequency Range = 30 MHz ~ 10th harmonic.

High channel
Frequency Range = 30 MHz ~ 10th harmonic.

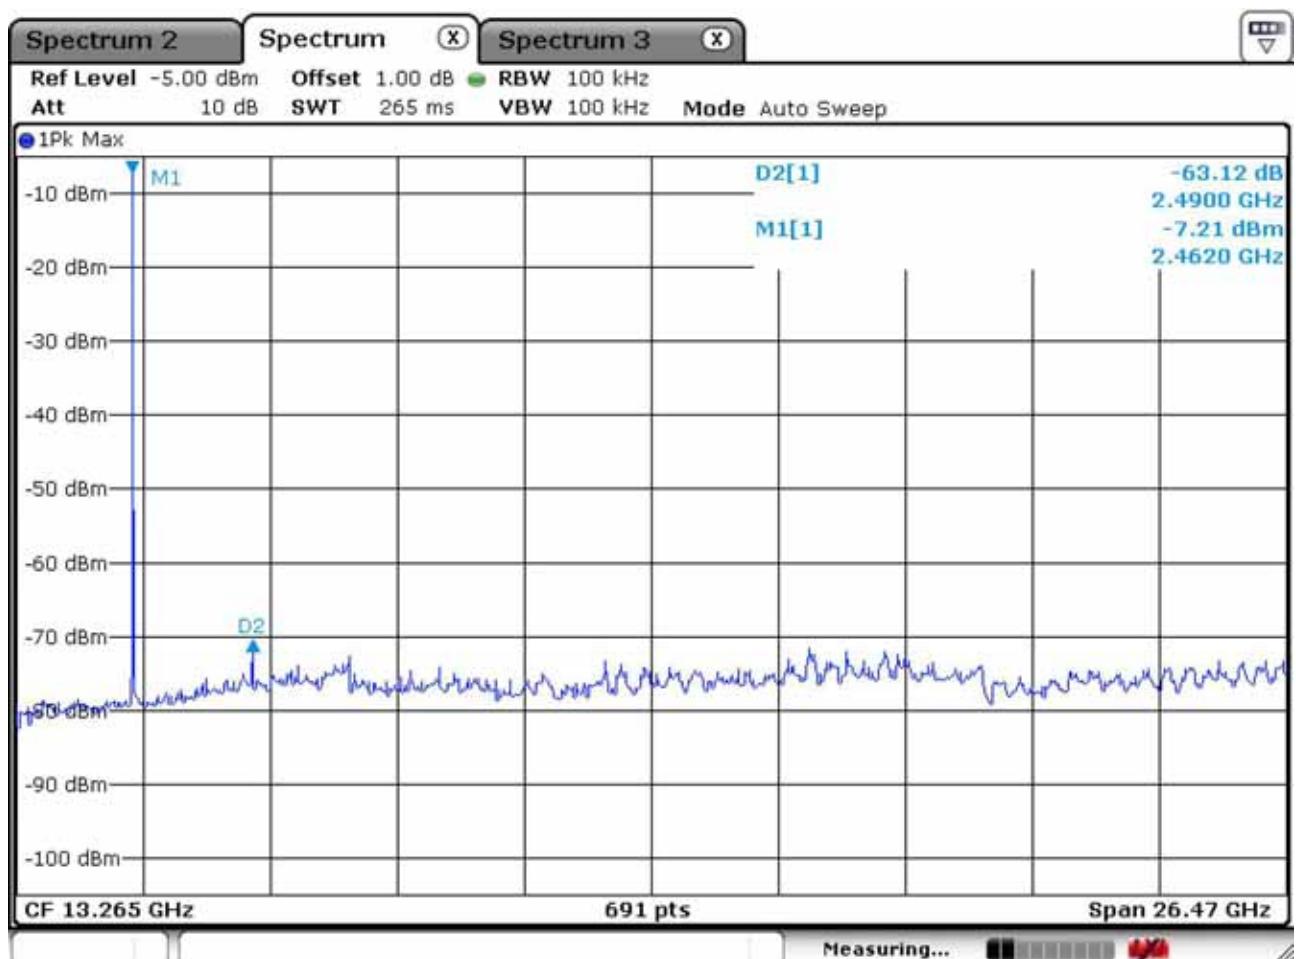

3.2.5 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)
= 1 MHz (1 GHz ~ 10th harmonic)

VBW RBW

Span = 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit include from 9KHz to 30MHz.
- The three antennas were used with this EUT during the Testing.
- The used antenna is “R-AN2400-1901RS” and it gave the worse case emissions.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
0.009 ~ 0.490	2400/F(kHz) (@ 300m)
0.490 ~ 1.705	24000/F(kHz) (@ 30m)
1.705 ~ 30	30(@ 30m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
				Antenna	Amp. Gain	Cable						
[MHz]	AV / Peak											
4850.0	42.1	53.9	V	31.4	36.5	5.7	54.0	74.0	42.8	54.6	11.2	19.4
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
				Antenna	Amp. Gain	Cable						
[MHz]	AV / Peak											
4901.0	43.6	55.2	V	31.4	36.5	5.7	54.0	74.0	44.3	55.9	9.7	18.1
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
				Antenna	Amp. Gain	Cable						
[MHz]	AV / Peak											
4950.0	41.5	52.1	V	31.4	36.5	5.7	54.0	74.0	42.2	52.8	11.8	21.2
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

No other emissions were detected at a level greater than 20dB below limit.

Radiated Emissions – Wireless + QAM-B mode


243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel. +82-31-3236008,9
Fax. +82-31-3236010

EUT/Model No.: DC10HD

TEST MODE: Wireless + QAM B mode

Temp Humi : 3 / 23

Tested by: PARK.H.W

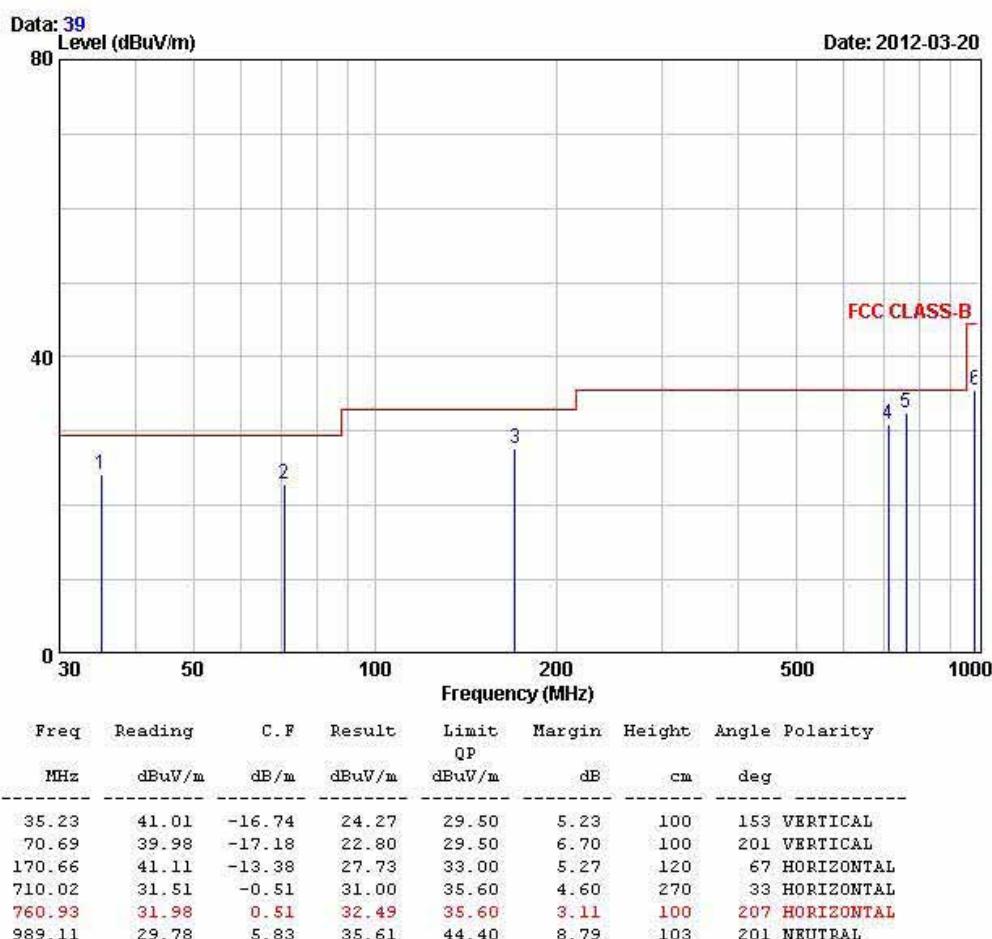

3.2.6 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 20dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Class B


Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

AC Conducted Emissions – Wireless + QAM-B mode – Line

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax :+82-31-3236010

BUT / Model No. : DC10HD Phase : LINE
 Test Mode : Wireless + QAM-B mode Test Power : 120 / 60
 Temp./Humid. : 22 / 31 Test Engineer : Park H W

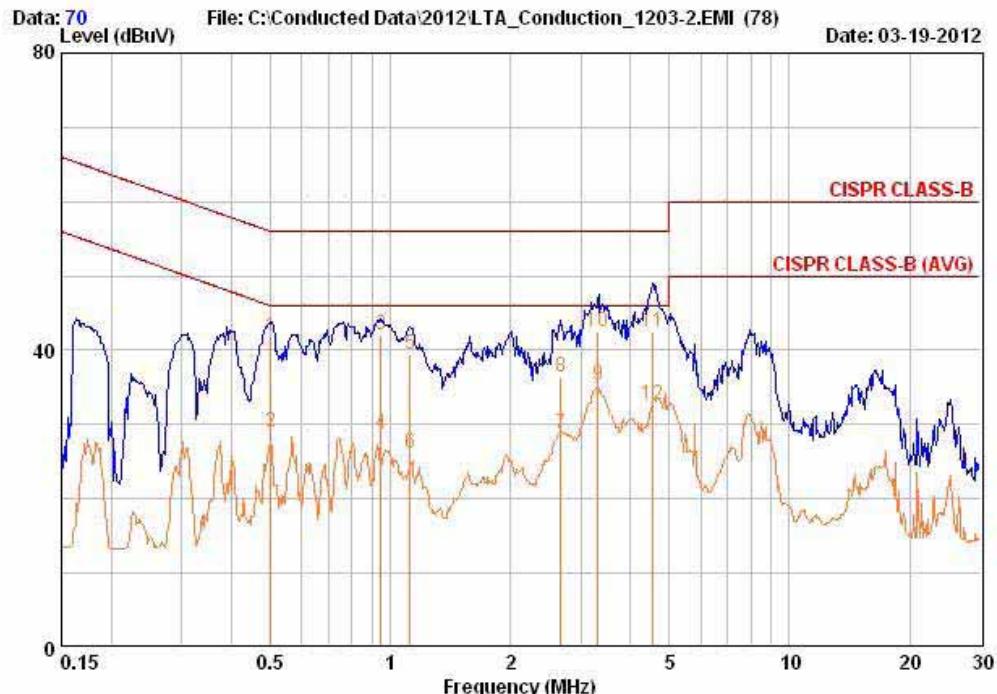


Freq MHz	RD QP	RD AV	C. F dB	Result dBuV	Result dBuV	Limit QP	Limit AV	Margin QP	Margin AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.502	32.22	19.32	9.61	41.83	28.93	56.00	46.00	14.17	17.07
0.946	32.33	19.13	9.70	42.03	28.83	56.00	46.00	13.97	17.17
1.119	29.73	16.33	9.72	39.45	26.05	56.00	46.00	16.55	19.95
2.677	26.78	19.08	9.72	36.49	28.79	56.00	46.00	19.51	17.21
3.310	32.70	25.70	9.71	42.41	35.41	56.00	46.00	13.59	10.59
4.543	32.75	22.95	9.72	42.47	32.67	56.00	46.00	13.53	13.33

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – Wireless + QAM-B mode – Neutral

243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax :+82-31-3236010

BUT / Model No. : DC10HD Phase : NEUTRAL
 Test Mode : Wireless + QAM-B mode Test Power : 120 / 60
 Temp./Humid. : 22 / 31 Test Engineer : Park H W

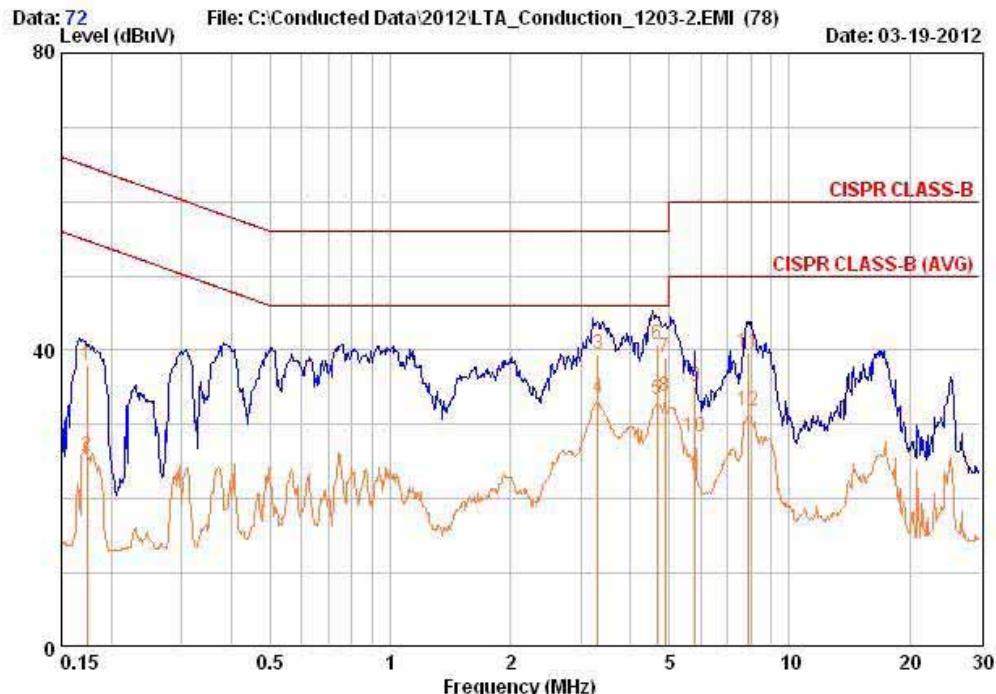

Freq MHz	RD QP	RD AV	C. F dB	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.174	28.34	16.24	9.56	37.90	25.80	64.77	54.77	26.87	28.97
3.310	29.80	23.80	9.68	39.48	33.48	56.00	46.00	16.52	12.52
4.660	30.95	23.65	9.72	40.68	33.38	56.00	46.00	15.32	12.62
4.883	29.16	23.96	9.75	38.91	33.71	56.00	46.00	17.09	12.29
5.811	25.31	18.51	9.76	35.08	28.28	60.00	50.00	24.92	21.72
7.857	30.00	22.00	9.75	39.75	31.75	60.00	50.00	20.25	18.25

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Spectrum Analyzer (~30GHz)	FSV-30	100757	R&S	1 year	2012-01-10
2	Signal Generator (~3.2GHz)	8648C	3623A02597	HP	1 year	2011-03-30
3	Signal Generator (1~20GHz)	83711B	US34490456	HP	1 year	2011-03-30
4	Attenuator (3dB)	8491A	37822	HP	2 year	2010-10-08
5	Attenuator (10dB)	8491A	63196	HP	2 year	2010-10-08
6	Attenuator (30dB)	8498A	3318A10929	HP	2 year	2011-01-05
7	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	1 year	2011-03-30
8	EMI Test Receiver (~1GHz)	ESCI7	100722	R&S	1 year	2011-10-07
9	RF Amplifier (~1.3GHz)	8447D	2439A09058	HP	2 year	2010-10-08
10	RF Amplifier (1~18GHz)	8449B	3008A02126	HP	2 year	2010-03-29
11	Horn Antenna (1~18GHz)	BBHA 9120D	9120D122	SCHWARZBECK	2 year	2010-12-24
12	Horn Antenna (18 ~ 40GHz)	SAS-574	154	Schwarzbeck	2 year	2010-11-25
13	Horn Antenna (18 ~ 40GHz)	SAS-574	155	Schwarzbeck	2 year	2010-11-25
14	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	2 year	2010-10-07
15	Dipole Antenna	VHA9103	2116	SCHWARZBECK	2 year	2010-11-25
16	Dipole Antenna	VHA9103	2117	SCHWARZBECK	2 year	2010-11-25
17	Dipole Antenna	VHA9105	2261	SCHWARZBECK	2 year	2010-11-25
18	Dipole Antenna	VHA9105	2262	SCHWARZBECK	2 year	2010-11-25
19	Hygro-Thermograph	THB-36	0041557-01	ISUZU	2 year	2010-04-12
20	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
21	Power Divider	11636A	6243	HP	2 year	2010-10-08
22	DC Power Supply	6622A	3448A03079	HP	-	-
23	Frequency Counter	5342A	2826A12411	HP	1 year	2011-03-30
24	Power Meter	EPM-441A	GB32481702	HP	1 year	2011-03-30
25	Power Sensor	8481A	US41030291	HP	1 year	2011-10-07
26	Audio Analyzer	8903B	3729A18901	HP	1 year	2011-10-07
27	Modulation Analyzer	8901B	3749A05878	HP	1 year	2011-10-07
28	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2011-10-07
29	Stop Watch	HS-3	601Q09R	CASIO	2 year	2010-03-31
30	LISN	ENV216	100408	R&S	1 year	2011-10-07
31	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	2 year	2010-05-13
32	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	-	-
33	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	-	-
34	Loop Antenna	FMZB 1516	151602/94	SCHWARZBECK	2 year	2011-04-05