

TEST REPORT

Part 15C



Equipment under test Flat Panel Detector
Model name FXRD-1717NAW
Derivative Model FXRD-1717NBW
FCC ID PFRFXRD-1717NAW
Trade mark 
vieworks
Applicant Vieworks Co., Ltd.
Manufacturer Vieworks Co., Ltd.
Date of test(s) 2015.04.01 ~ 2015.04.14
Date of issue 2015.04.17

Issued to

Vieworks Co., Ltd.
41-3, Burim-ro 170beon-gil, Dongan-gu,
Anyang-si, Gyeonggi-do, 431-060, Republic of Korea
Tel: +82-70-4496-1860 / Fax: +82-31-386-8631

Issued by

KES Co., Ltd.
C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si,
Gyeonggi-do, 431-716, Korea
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

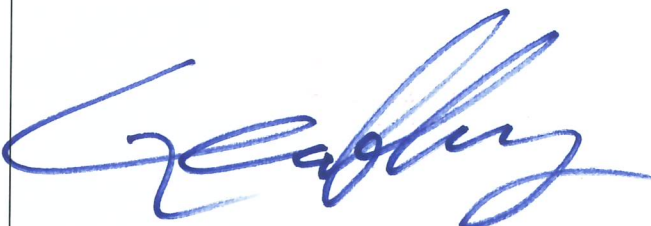Test and report completed by :	Report approval by :
	
Kwang-Yeol Choo / Test engineer	Jeff Do / Technical manager



Revision history

Revision	Date of issue	Test report No.	Description
-	2015.04.17	KES-RF-15T0028	Initial



TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Information about derivative model	4
1.3.	Frequency/channel operations	5
1.4.	Device modifications.....	5
1.5.	Directional antenna gain for MIMO (correlated)	5
2	Summary of tests	6
2.1	Worst-Case and Mode	6
3.	Test results.....	7
3.1	Radiated spurious emissions.....	7
Appendix A.	Measurement equipment	19
Appendix B.	Test setup photo	20

1. General information

Applicant Viewworks Co., Ltd.
Applicant address 41-3, Burim-ro 170beon-gil, Dongan-gu,
Anyang-si, Gyeonggi-do, 431-060 Republic of Korea
Test site KES Co., Ltd.
Test site address C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Rule part(s) Part 15.247C
Test device serial No. ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test Flat Panel Detector
Frequency range 2 412 MHz ~ 2 462 MHz(802.11b/g/n_HT20), 2 422 MHz ~ 2 452 MHz(802.11n_HT40)
5 745 MHz ~ 5 825 MHz(802.11a/n_HT20), 5 755 MHz ~ 5 795 MHz(802.11n_HT40)
5 180 MHz ~ 5 240 MHz(802.11a/n_HT20), 5 190 MHz ~ 5 230 MHz(802.11n_HT40)
Model FXRD-1717NAW(Basic), FXRD-1717NBW(Derivative model)
Modulation technique DSSS, OFDM
Number of channels 2 412 MHz ~ 2 462 MHz(802.11b/g/n_HT20) : 11 ch
2 422 MHz ~ 2 452 MHz(802.11n_HT40) : 7 ch
5 745 MHz ~ 5 825 MHz(802.11a/n_HT20) : 5 ch
5 755 MHz ~ 5 795 MHz(802.11n_HT40) : 2 ch
5 180 MHz ~ 5 240 MHz(802.11a/n_HT20) : 4 ch
5 190 MHz ~ 5 230 MHz(802.11n_HT40) : 2 ch
Antenna specification PCB antenna(I-PEX)
Power source 24 V dc // 1 A

Note:

- Certificated module is mounted in the EUT as following
 - Applicant: SparkLAN communications, Inc
 - FCC ID: RYK-WPEA-121N
- The manufacturer is declared the extremes of operating temperature range and operating voltage range as follows:

Operating voltage range DC 21.6 V ~ DC 26.4 V
Operating temperature rang 0 °C to +40 °C
- Duty cycle is > 98%
- Contains transmitter Module does not use DFS band.

1.2. Information about derivative model

This is to notify that FXRD-1717NAW / FXRD-1717NBW are same Hardware, Software and components. But *scintillator layer are different. Scintillator is a phosphor that produces scintillations.

Model	Scintillator layer
FXRD-1717NAW	CsI (Cesium Iodide)
FXRD-1717NBW	Gd ₂ O ₂ S:Tb (Gadolinium Oxysulfide)

1.3. Frequency/channel operations

Ch.	Frequency (MHz)	Mode
1	2 412	11b/g/n_HT20
⋮	⋮	⋮
6	2 437	11b/g/n_HT20
⋮	⋮	⋮
11	2 462	11b/g/n_HT20

Ch.	Frequency (MHz)	Mode
3	2 422	11n_HT40
⋮	⋮	⋮
6	2 437	11n_HT40
⋮	⋮	⋮
9	2 452	11n_HT40

Ch.	Frequency (MHz)	Mode
149	5 745	802.11a/n_HT20
⋮	⋮	⋮
157	5 785	802.11a/n_HT20
⋮	⋮	⋮
165	5 825	802.11a/n_HT20

Ch.	Frequency (MHz)	Mode
151	5 755	11n_HT40
⋮	⋮	⋮
159	5 795	11n_HT40

1.4. Device modifications

N/A

1.5. Directional antenna gain for MIMO (correlated)

Model : AEi-2450/5500DP-C1.13[Viewworks]

ANT1 Gain (dBi)	ANT2 Gain (dBi)	Total Gain (dBi)	Note
2.55	-0.45	4.19	For 2.4 GHz
0.37	2.10	4.29	For 5.7 GHz

$$-Ant\ Gain = 10 \log[10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20}]^2 / N_{ANT}$$

2 Summary of tests

FCC Part Sections	Parameter	Test results
15.205 15.209	Radiated spurious emission	Pass

Test procedures;

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003/2009), the guidance provided in KDB 558074 D01 v03r02, KDB 662911 D01 v02r01 were used in the measurement of the EUT.

2.1 Worst-Case and Mode

The worst-case data rates are determined to be as follows for each mode, based on the investigation s by measuring the average power, peak power across all the data rates.
all tests were made with following data rates:

802.11b mode : 11 Mbps.
802.11g mode : 54 Mbps.
802.11a mode : 6 Mbps.
802.11n HT20 mode : MCS8.
802.11n HT40 mode : MCS8.

The EUT antenna has been tested in X, Y and Z axis.


The worst case position is X-axis(below 1GHz), X-axis(above 1GHz). Each axis were recorded in this report.

3. Test results


3.1 Radiated spurious emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

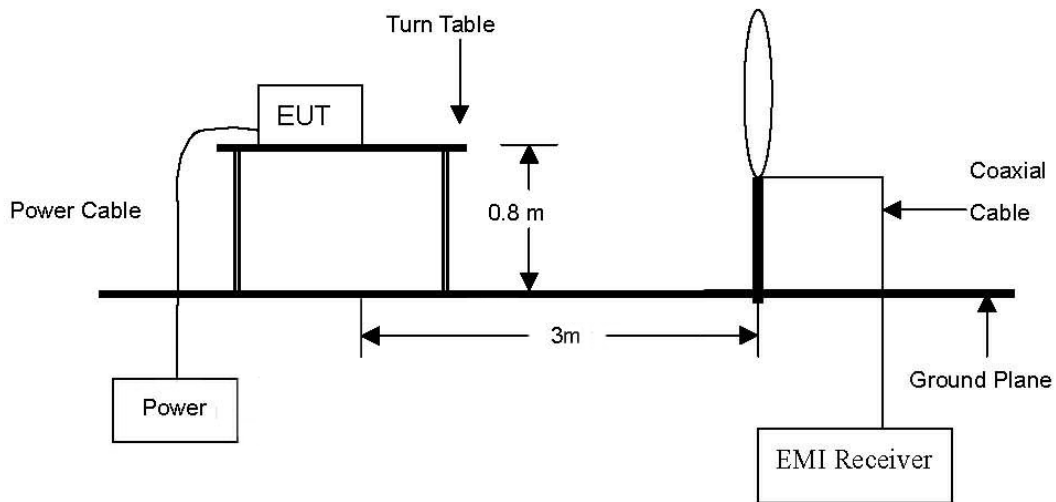

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

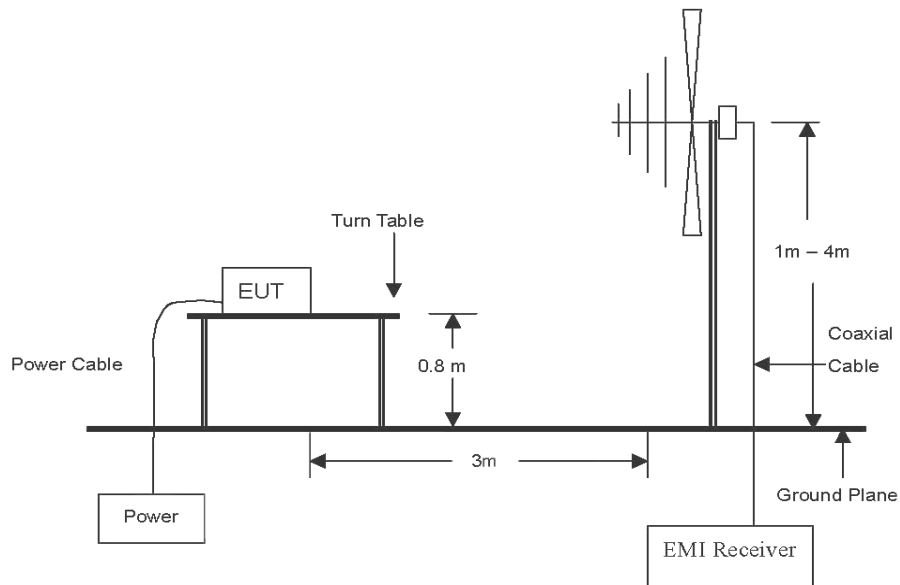

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.

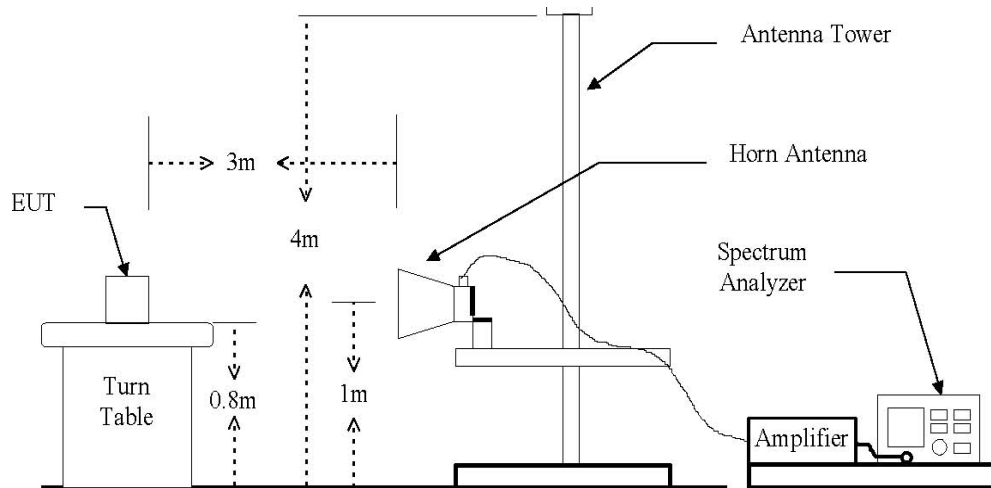

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 12.0 of KDB 558074 D01 v03r02 and ANSI C63.4-2003/2009

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site or open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet

Note.

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 200 Hz for Quasi-peak detection (QP) at frequency below 9 kHz~ 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 9 kHz for Quasi-peak detection (QP) at frequency below 150 kHz~ 30 MHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1 GHz. (Detect mode: RMS(power), Averaging 100)

To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ($\mu V/m$)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test results (Below 30 MHz)

Measurement Condition

Ambient temperature : 11 °C

Relative humidity : 54 % R.H.

The frequency spectrum from 9 kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

Radiated emissions		Ant.	Correction factors			Total	Limit	
Frequency (MHz)	Reading (dBμV)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	F _d (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Not detected for below 30 MHz								

Note.

1. All spurious emission at channels are almost the same below 30 MHz, so that 802.11b 2437 MHz and 802.11a 5785 MHz were chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss + F_d
3. $F_d = 40\log(D_m / D_s)$

Where:

- F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters

Test results (Below 1 000 MHz)

Measurement Condition

Ambient temperature : 11 °C
Relative humidity : 54 % R.H.

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

802.11b / 2432 MHz

Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
31.65	23.55	V	12.53	0.23	36.31	40.00	3.69
55.95	18.69	V	12.32	0.79	31.80	40.00	8.20
69.11	24.79	V	10.24	0.91	35.94	40.00	4.06

802.11a / 5785 MHz

Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
31.65	23.10	V	12.53	0.23	35.86	40.00	4.14
35.82	20.74	V	12.75	0.62	34.11	40.00	5.89
69.11	23.26	V	10.24	0.91	34.41	40.00	5.59

Note.

1. All spurious emission at channels are almost the same below 1 000 MHz, so that 802.11b 2432 MHz and 802.11a 5785 MHz were chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss
3. Detector mode: Quasi peak

Test results (Above 1 000 MHz)

Measurement Condition

Ambient temperature : 11 °C

Relative humidity : 54 % R.H.

The frequency spectrum from 1 GHz to 25 GHz and 40 GHz was investigated. No Emissions were found above 20 dB below the limit.

802.11b / 2412 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 389.78	44.34	PK	H	3.58	-	47.92	74.00	26.08
2 388.27	40.12	PK	V	3.58	-	43.70	74.00	30.30
4 824.00	33.46	PK	H	13.68	-	47.14	74.00	26.86
4 824.00	33.98	PK	V	13.68	-	47.66	74.00	26.34

802.11b / 2437 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4 874.00	32.58	PK	H	14.01	-	46.59	74.00	27.41
4 874.00	32.12	PK	V	14.01	-	46.13	74.00	27.87

802.11b / 2462 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 498.12	38.19	PK	H	4.27	-	42.46	74.00	31.54
2 489.81	40.36	PK	V	4.21	-	44.57	74.00	29.43
4 924.00	33.38	PK	H	14.34	-	47.72	74.00	26.28
4 924.00	33.29	PK	V	14.34	-	47.63	74.00	26.37

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

802.11g / 2412 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 389.72	45.56	PK	H	3.58	-	49.14	74.00	24.86
2 389.79	40.51	PK	V	3.58	-	44.09	74.00	29.91
4 824.00	34.41	PK	H	13.68	-	48.09	74.00	25.91
4 824.00	34.47	PK	V	13.68	-	48.15	74.00	25.85

802.11g / 2437 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4 874.00	34.66	PK	H	14.01	-	48.67	74.00	25.33
4 874.00	33.10	PK	V	14.01	-	47.11	74.00	26.89

802.11g / 2462 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 487.83	38.51	PK	H	4.20	-	42.71	74.00	31.29
2 495.74	39.04	PK	V	4.25	-	43.29	74.00	30.71
4 924.00	32.61	PK	H	14.34	-	46.95	74.00	27.05
4 924.00	34.12	PK	V	14.34	-	48.46	74.00	25.54

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

802.11n_HT20 / 2412 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 389.54	46.11	PK	H	3.58	-	49.69	74.00	24.31
2 389.76	44.52	PK	V	3.58	-	48.10	74.00	25.90
4 824.00	34.00	PK	H	13.68	-	47.68	74.00	26.32
4 824.00	33.16	PK	V	13.68	-	46.84	74.00	27.16

802.11n_HT20 / 2437 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4 874.00	34.96	PK	H	14.01	-	48.97	74.00	25.03
4 874.00	34.38	PK	V	14.01	-	48.39	74.00	25.61

802.11n_HT20 / 2462 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 494.26	38.09	PK	H	4.24	-	42.33	74.00	31.67
2 498.52	39.20	PK	V	4.27	-	43.47	74.00	30.53
4 924.00	33.38	PK	H	14.34	-	47.72	74.00	26.28
4 924.00	33.81	PK	V	14.34	-	48.15	74.00	25.85

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

802.11n_HT40 / 2422 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 388.23	39.59	PK	H	3.58	-	43.17	74.00	30.83
2 388.81	45.82	PK	V	3.58	-	49.40	74.00	24.60
4 844.00	32.14	PK	H	13.81	-	45.95	74.00	28.05
4 844.00	33.39	PK	V	13.81	-	47.20	74.00	26.80

802.11n_HT40 / 2437 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4 874.00	33.41	PK	H	14.01	-	47.42	74.00	26.58
4 874.00	32.38	PK	V	14.01	-	46.39	74.00	27.61

802.11n_HT40 / 2452 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 490.41	39.54	PK	H	4.22	-	43.76	74.00	30.24
2 489.57	44.10	PK	V	4.21	-	48.31	74.00	25.69
4 904.00	34.78	PK	H	14.21	-	48.99	74.00	25.01
4 904.00	34.18	PK	V	14.21	-	48.39	74.00	25.61

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

802.11a / 5745 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 490.00	29.18	PK	H	35.75	-	64.93	74.00	9.07
11 490.00	16.69	AV	V	35.75	-	52.44	54.00	1.56
11 490.00	29.64	PK	H	35.75	-	65.39	74.00	8.61
11 490.00	16.42	AV	V	35.75	-	52.17	54.00	1.83

802.11a / 5785 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 570.00	30.91	PK	H	36.10	-	67.01	74.00	6.99
11 570.00	16.64	AV	V	36.10	-	52.74	54.00	1.26
11 570.00	29.04	PK	H	36.10	-	65.14	74.00	8.86
11 570.00	16.72	AV	V	36.10	-	52.82	54.00	1.18

802.11a / 5825 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 650.00	29.38	PK	H	36.45	-	65.83	74.00	8.17
11 650.00	16.28	AV	V	36.45	-	52.73	54.00	1.27
11 650.00	30.24	PK	H	36.45	-	66.69	74.00	7.31
11 650.00	16.54	AV	V	36.45	-	52.99	54.00	1.01

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)+Distance
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

802.11n_HT20 / 5745 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 490.00	29.16	PK	H	35.75	-	64.91	74.00	9.09
11 490.00	16.70	AV	V	35.75	-	52.45	54.00	1.55
11 490.00	29.81	PK	H	35.75	-	65.56	74.00	8.44
11 490.00	16.36	AV	V	35.75	-	52.11	54.00	1.89

802.11n_HT20 / 5785 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 570.00	29.02	PK	H	36.10	-	65.12	74.00	8.88
11 570.00	16.41	AV	V	36.10	-	52.51	54.00	1.49
11 570.00	29.11	PK	H	36.10	-	65.21	74.00	8.79
11 570.00	16.58	AV	V	36.10	-	52.68	54.00	1.32

802.11n_HT20 / 5825 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 650.00	30.21	PK	H	36.45	-	66.66	74.00	7.34
11 650.00	16.44	AV	V	36.45	-	52.89	54.00	1.11
11 650.00	29.56	PK	H	36.45	-	66.01	74.00	7.99
11 650.00	16.71	AV	V	36.45	-	53.16	54.00	0.84

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)+Distance
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

802.11n_HT40 / 5755 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 510.00	29.87	PK	H	35.84	-	65.71	74.00	8.29
11 510.00	16.66	AV	V	35.84	-	52.50	54.00	1.50
11 510.00	29.47	PK	H	35.84	-	65.31	74.00	8.69
11 510.00	16.69	AV	V	35.84	-	52.53	54.00	1.47

802.11n_HT40 / 5795 MHz

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detector mode	Pol.	AFCL (dB)	DCF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11 590.00	29.50	PK	H	36.19	-	65.69	74.00	8.31
11 590.00	16.63	AV	V	36.19	-	52.82	54.00	1.18
11 590.00	29.47	PK	H	36.19	-	65.66	74.00	8.34
11 590.00	16.20	AV	V	36.19	-	52.39	54.00	1.61

Note.

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AFCL(Ant. factor – Amp. gain + Cable loss) + DCF(Duty cycle Correction Factor)+Distance
5. DCF(Duty cycle Correction Factor) = 10log(1/Duty cycle)

Appendix A. Measurement equipment


Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV30	101389	1 year	2016.01.22
Spectrum analyzer	Agilent	N9010A	MY51440103	1 year	2016.01.26
Power Meter	Anritsu	ML2495A	1438001	1 year	2016.01.22
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2016.01.26
Vector signal generator	R&S	SMBV100A	1407.6004K02	1 year	2015.07.24
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2016.01.23
Loop antenna	R&S	HFH2-Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-broadband antenna	Schwarzbeck	VULB 9168	9168-385	2 years	2015.05.09
Horn antenna	A.H.	SAS-571	414	2 years	2017.02.09
Horn antenna	Schwarzbeck	BBHA 9170	BBHA9170551	2 years	2015.09.04
Preamplifier	HP	8447F	2805A02570	1 year	2016.01.23
Preamplifier	HP	8449B	3008A00538	1 years	2015.07.23
Preamplifier	Schwarzbeck	BBV 9721	9721-003	1 years	2015.09.04
Attenuator	HP	8494B	2630A12857	1 year	2016.01.22
EMI Test Receiver	R & S	ESVS10	826008/014	1 year	2016.04.01
EMI Receiver/Signal Analyzer	Narda S.T.S / PMM	PMM 9010F	020WW31006	1 year	2016.04.01
HIGH PASS FILTER	WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS	1	1 year	2015.07.23
HIGH PASS FILTER	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2015.07.23
LOW PASS FILTER	WEINSCHL	WLK1.0/18G-10TT	1	1 year	2015.07.23

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Desktop	DELL	OPTIPLEX990	95KYVBX
Monitor	SAMSUNG	LS23C340	ZXPCHTMFB01032M
Adapter	11ssan Elecom(shen yang) Co., Ltd.	A2514_DPN	CN07BN4400591 BSK28F6NF841
Mouse	Logitech	M-U0026	1248HS021ZRS
Keyboard	Logitech	Y-S0002	-

Appendix B. Test setup photo

Radiated Emission (30MHz~1GHz)

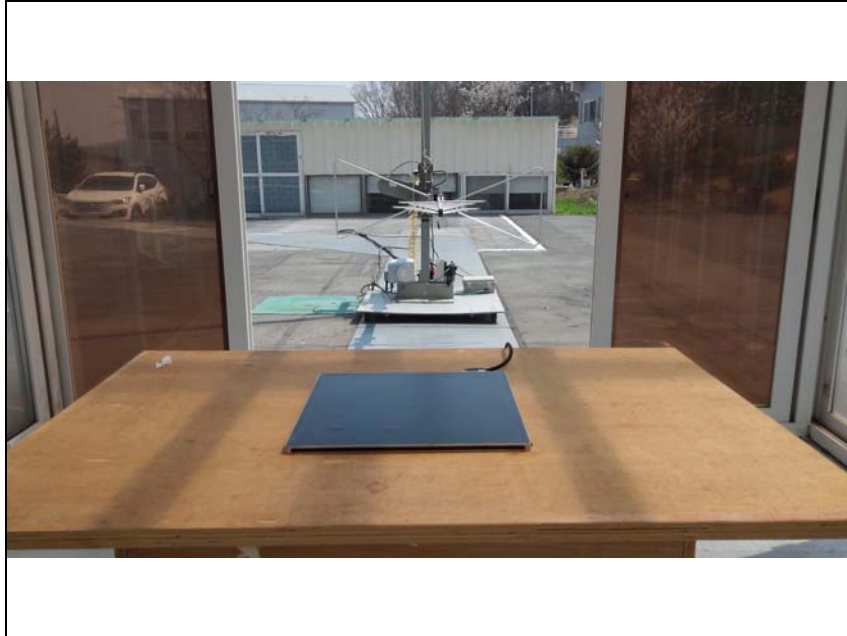

Radiated Emission (Above 1GHz)

