



## JungAng EMC Co., Ltd.

109-2, Yepyung-ri, Kumsa-myun, Youju-kun, Kyungki-do, KOREA  
TEL: 82 31 764 0125      FAX: 82 31 764 0126

### FCC EMI TEST REPORT

**Date of Test** : March 30, 2001

**Test Report No** : 01JAC007.FCC

**Test Site** : JungAng EMC Co., Ltd., Korea(31040/SIT 1300F2)

**Trade Name** : N/A

**Manufacturer** : SSKOREA CO., LTD.

**Address** : 456-1, Noknae-Dong, Ansan-City, Kyunggi-do, Korea

**Contact Person** : JEONG-KYU, PARK

Tel No. : 82-31-491-1032~3

Fax No. : 82-31-491-1034

**Product** : Handy Drive

**Model** : HD-2500

**Fcc Rule Part(s)** : FCC Part 15 Subpart B

**Classification** : Class B

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C.63.4-1992.

I attest to the accuracy of data and all measurement reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualification of all persons taking them.

TaeHyun Nam  
President-JungAng EMC Co., Ltd.  
<http://www.jaemc.co.kr>

<b>TABLE OF CONTENTS</b>	<b>PAGE</b>
<b>1. Description of device</b>	<b>3</b>
<b>1.1 General</b>	<b>3</b>
<b>1.2 EUT Description</b>	<b>3</b>
<b>2. Test facility</b>	<b>4</b>
<b>3. Summary of results</b>	<b>4</b>
<b>3.1 Electromagnetic Emission</b>	<b>4</b>
<b>3.2 Modifications to the EUT</b>	<b>4</b>
<b>4. Tested system details</b>	<b>5</b>
<b>4.1 Peripherals and Others</b>	<b>5</b>
<b>4.2 Type of Cables Used</b>	<b>5</b>
<b>4.3 System layout on EUT and peripherals</b>	<b>6</b>
<b>5. Test result</b>	<b>7</b>
<b>5.1 RFI Voltage Measurement</b>	<b>7</b>
<b>5.2 RFI Field Strength Measurement</b>	<b>11</b>
<b>5.3 Minimum Margin</b>	<b>13</b>
<b>5.4 Sample Calculations</b>	<b>13</b>
<b>6. Test Equipments</b>	<b>14</b>
<b>7. Measurement Photos</b>	<b>15</b>
<b>7.1 Setup with RFI Voltage Emission Level</b>	<b>15</b>
<b>7.2 Setup with RFI Field Strength Emission Level</b>	<b>16</b>
<b>Appendix 1 Photos of EUT</b>	<b>17</b>
<b>Appendix 2 ID Label and Location</b>	<b>19</b>
<b>Appendix 3 System Circuit Diagram</b>	<b>22</b>
<b>Appendix 4 User's Manual</b>	<b>24</b>

## 1. DESCRIPTION OF DEVICE

---

### 1.1 General

Responsible Party	<b>SSKOREA CO., LTD.</b>		
Contact Person	JEONG-KYU, PARK	Tel No. : 82-31-491-1032	Fax No. : 82-31-491-1034
Manufacturer	<b>SSKOREA CO., LTD.</b> 456-1, Noknae-Dong, Ansan-City, Kyunggi-do, Korea		

- Trade name **N/A**
- Model name **HD-2500**
- EUT Type **Hardy Drive**
- Classification **FCC Part 15 Subpart B Class B**
- Clock Speed **Main Clock : 48 MHz**
- Rule Part(s) **FCC Part 15 & Part 2**
- Test Procedure(s) **ANSI C63.4(1992)**
- Date of Tests **March. 30, 2001**
- Place of Tests **JungAng EMC Co., Ltd.**

### 1.2 EUT Description

The EUT is a small size of Handy Drive, As using personal computer (Desktop,Notebook) adapted USB interface, Handy Drive will contribute to copy, save and share huge data more easily and conveniently using USB power itself without additional power.

**Note.** This report may be reproduced in full. Partial reproduction may only be made with the written permission of the laboratory. The results in this report is only applied to the sample(s) tested.

**Note.** Please refer to the duties and responsibilities of the Responsible Party attached.

## 2. TEST FACILITY

---

The open field test site and conducted measurement facility used for this measurement, is located following address. This site was fully described in a report dated Nov. 24, 1998, that was submitted to the FCC. Our site and facility had been accepted in a letter dated Nov. 24, 1998(31040/SIT) :

JungAng EMC Co., Ltd.

Address : 109-2, Yepyung-ri, Kumsa-myun, Youju-kun, Kyungki-do, Korea

The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992.

## 3. SUMMARY OF RESULTS

---

### 3.1 Electromagnetic Emission

RFI Voltage Measurement.....**PASS**

RFI Field Strength Measurement.....**PASS**

Although the measured emissions indicate that the EUT complies with the required limits, some measurement are close to these limits.

When the uncertainty of measurement is considered, there is some possibility that the EUT may not be compliant.

### 3.2 Modifications to the EUT : **None**

## 4. TESTED SYSTEM DETAILS

---

### 4.1 Peripherals and Others :

Description	Model Name	Serial No.	Manufacturer	FCC ID
Computer	KAYAK	5064-7432A034598	HP	DoC
Printer	C2106A	3217S91901	HP	B94C2106X
Monitor	VX700	M902080938	Gateway	BGBTFV8705K
Keyboard	RT235BTW	B13BC90L39GU	Compaq	AQ6-22K15
PS2 Mouse	M-S34	F13490N5BGF	Compaq	DZL211029
Serial Mouse #1	OK-520	00DAC0231	A4 TECH	DoC
Serial Mouse #2	Pro Mouse II	96002117	NEOTEC	FSUGMZC7
Joystick	GAMEPAD USB	S1050910000564	CREATIVE	-

### 4.2 Type of Cables Used:

Device from	Device to	Type of Cable	Length	Type of shield
Computer	Monitor	Signal cable	1.0	shielded
Computer	Printer	Signal cable	1.8	shielded
Computer	Keyboard	Signal cable	2.0	shielded
Computer	PS2 Mouse	Signal cable	1.5	shielded
Computer	Mouse #1,#2	Signal cable	1.5	shielded
Computer	Joystick	Signal cable	1.5	shielded
Computer	Smart Drive	Signal cable	1.5	shielded
Computer	Main Power	Power cable	1.5	Non-shielded
Monitor	Main Power	Power cable	1.5	Non-shielded
Printer	Main Power	Power cable	1.5	Non-shielded

## 4.3 System layout on EUT and peripherals

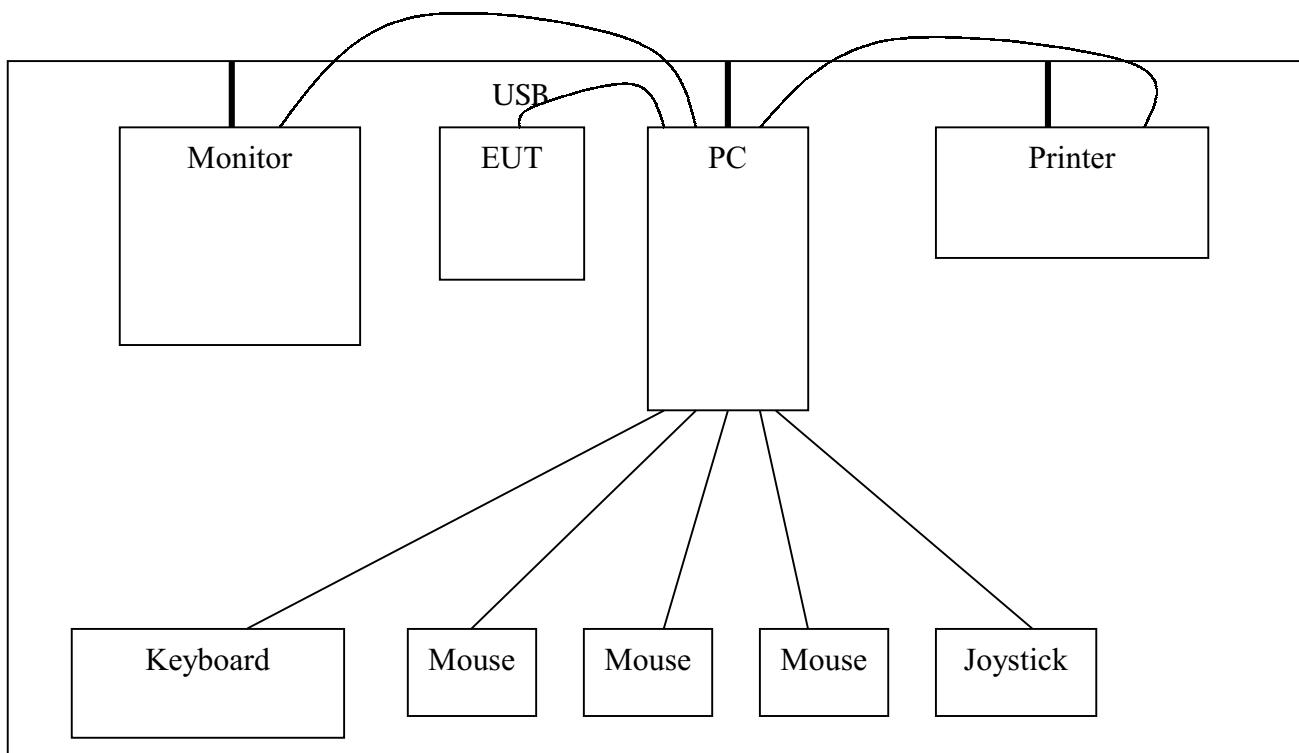


Figure 4-1 System layout

## 5. TEST RESULT

---

### 5.1 RFI Voltage Measurement

#### 5.1.1 Measurement Instrumentation Used

(model/serial no./manufacturer/last calibration/next calibration)

Signal Analyzer.....(PMM9000/3100J70602/PMM/10 Oct. 2000/Oct. 2001)

L.I.S.N.....(L3-25/1110K70403/PMM/01 Sep. 2000/Sep. 2001)

Coaxial cable.....(RG213U/---/MARLOW/-/-)

Shield Room.....(JASH01/JAC01/DAIL EMC/---/---)

#### 5.1.2 Measurement Procedure

The power line conducted interference measurement were performed according to ANSI C63.4-1992 in a Shielded room placed on a table, 0.8 m high over a metal floor.

It was located more than required distance away from the shielded enclosure wall.

Deviations from the standard was none. The EUT was plugged into the LISN and the frequency range of interest scanned. **We measured device in normal operation mode.**  
We reported at maximum emission levels.

#### 5.1.3 Operation Modes

EUT was tested according to the specifications given by the manufacturer, and exercised in the most unfavorable manner.

“H” pattern was displayed on the CRT and printed on the printer .

#### 5.1.4 Measurement Uncertainty

Measurement uncertainty of RFI Voltage Measurement test was estimated at  $\pm 1.8$  dB( $k=2$ )

### 5.1.5 Test Data

## RFI Voltage Measurement Results (0.45 MHz to 30 MHz)

Operating mode : **Normal operation mode**

Test procedure : ANSI C63.4-1992

Date of measurement : Mar. 30, 2001

Temperature : 21.2 degree C

Humidity : 45 %

Model : HD-2500

FREQ(MHz)	LEVEL(dBuV)	LINE	LIMIT(dBuV)	Result(dBuV)	MARGIN(dBuV)
0.527	34.80	N	48.00	34.80	-13.20
0.741	34.60	H		34.60	-13.40
1.237	34.10	H		34.10	-13.90
1.487	33.40	H		33.40	-14.60
2.846	37.70	H		37.70	-10.30
3.463	37.00	H		37.00	-11.00
4.328	39.90	H		39.90	-8.10
4.824	42.60	H		42.60	-5.40
5.320	44.50	H		44.50	-3.50
5.450	45.90	H		45.90	-2.10
5.690	45.20	H		45.20	-2.80

Table 1. Line Conducted Emission Tabulated Data

Note :

1. All modes of operation were investigated and the worst-case emissions are reported. See attached Plots.
2. The limit for Class B digital device is  $250 \mu\text{V}$  ( $48.0 \text{ dB}\mu\text{V}$ ) from 450 KHz to 30 MHz
3. Line H = Hot Line N = Neutral


\*\* Measurement using CISPR quasi-peak mode

Line N = Neutral

1/25/2009

---


Tested by Hyung-Seok Lee

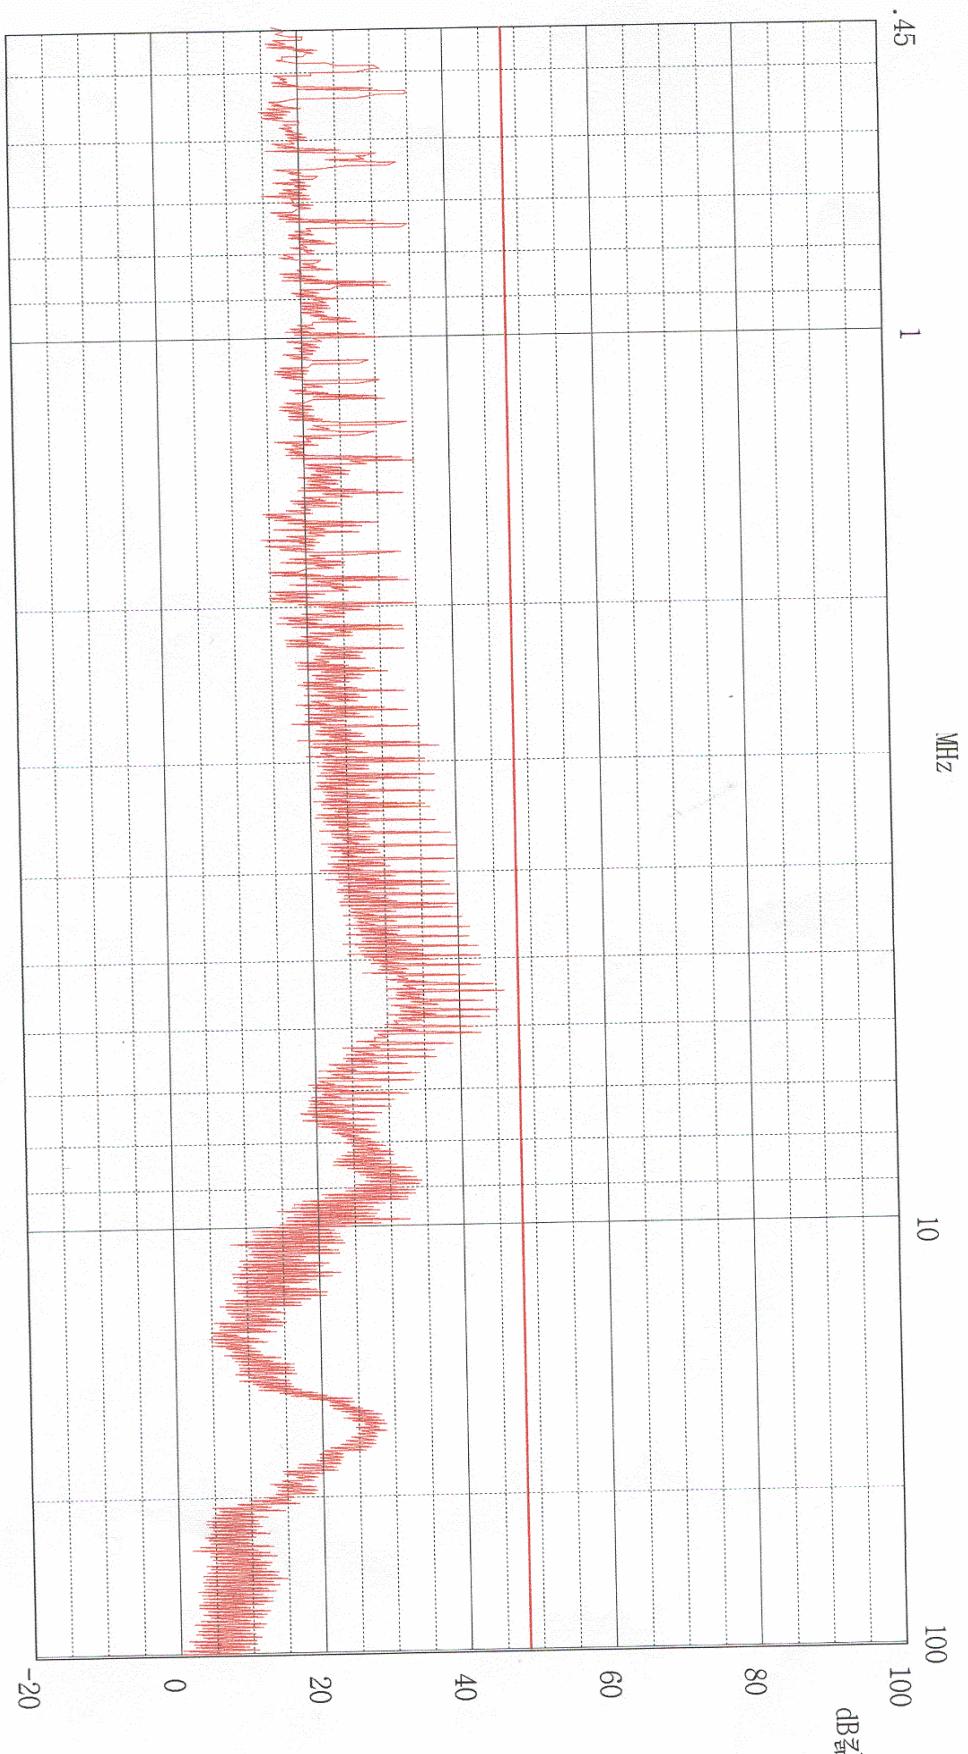**PLOTS OF EMISSIONS**

## PLOTS OF EMISSIONS

P M M 9 0 0 0 for Windows

Name: 03033-N Date: 03 30 2001 Time: 13:18

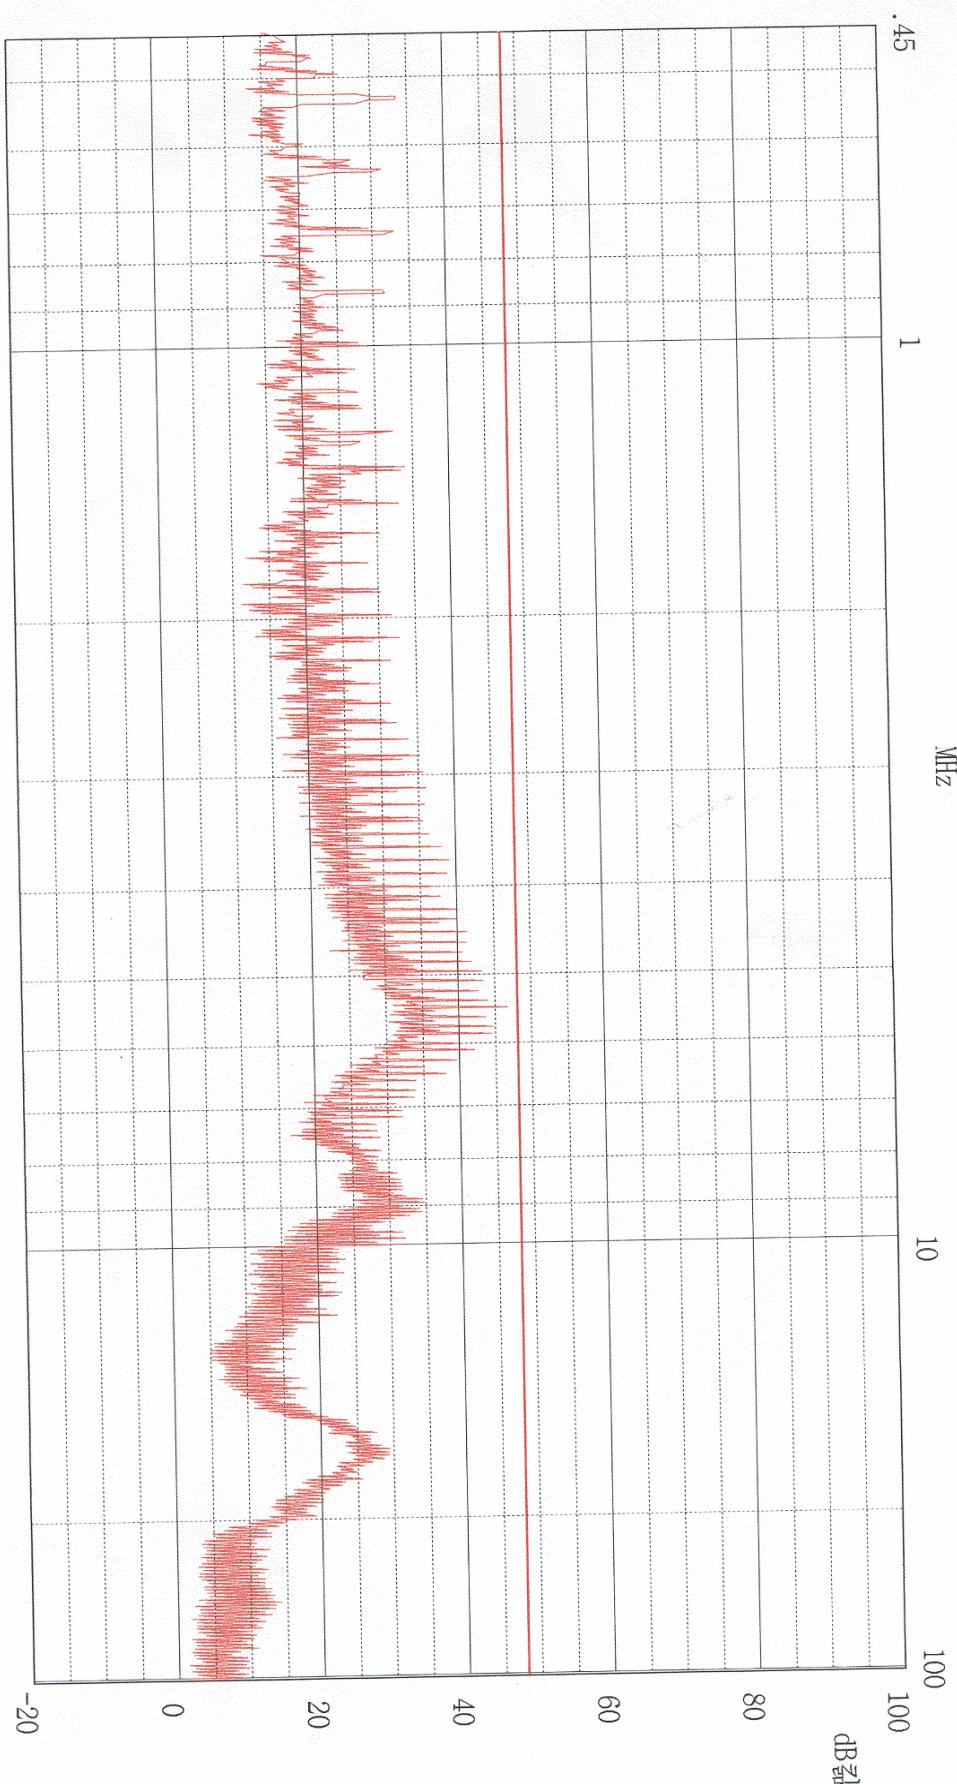

Limit : Fcc-b      Detector: Peak

TEST SITE : BWS TECH LAB.  
TEST MODE : NEUTRAL  
MODEL : HD-2500  
CLASSIFICATION : FCC PART 15, CLASS B

## 5.2 RFI Field Strength Measurement

### 5.2.1 Measurement Instrumentation Used

Signal Analyzer.....(PMM9000/3100J70602/PMM/10 Oct. 2000/Oct. 2001)

Spectrum Analyzer.....(R3261/61720002/Advantest/25 Aug. 2000/Aug. 2001)

Biconical antenna.....(BC01/0020J70501/PMM/10 Oct. 2000/Oct. 2001)

Log periodic antenna.....(LP01/0020J70501/PMM/10 Oct. 2000/Oct. 2001)

Coaxial cable.....(RG213U/---/MARLOW/---)

### 5.2.2 Measurement Procedure

Final test was performed according to ANSI C63.4-1992 at the open field site .  
Deviations from the standard were none.

The EUT was placed in a 0.8 m high table along with the peripherals. The turn table was separated from the antenna with the distance of 3 meter. Cables were placed in a position to produce maximum emissions as determined by experimentation, and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities. **We measured device in normal operation mode.**  
We reported at maximum emission levels.

### 5.2.3 Operation Modes

EUT was tested according to the specifications given by the manufacturer, and exercised in the most unfavorable manner.

“H” pattern was displayed on the CRT and printed on the printer .

### 5.2.4 Measurement Uncertainty

Measurement uncertainty of RFI Field Strength Measurement test was estimated at  $\pm 3.5$  dB( $k=2$ )

### 5.2.5 Test Data

#### RFI Field Strength Measurement Results(30 MHz to 1000 MHz)

Operating mode : **Normal operation mode**

Test procedure : ANSI C63.4-1992

Date of measurement : Mar. 30, 2001

Temperature : 18.2 degree C

Humidity : 43 %

Model : **HD-2500**

MEASUREMENT FREQ (MHz)	MEASUREMENT LEVEL (dBuV)	ANTENNA POLARITY (H/V)	ANTENNA FACTOR (dB)	CABLE LOSS (dB)	LIMIT (dBuV)	FIELD STRENGTH (dBuV/m)	MARGIN (dBuV/m)
47.99	20.10	V	10.00	1.37	40.00	31.47	-8.53
120.01	15.20	V	11.56	2.22		28.98	-14.52
132.80	7.40	V	14.51	2.36		24.27	-19.23
143.98	8.40	V	14.53	2.47		25.40	-18.10
168.02	10.70	H	13.56	2.67		26.93	-19.07
192.96	9.90	H	13.89	2.89		26.68	-19.32
229.06	17.20	V	11.40	3.20		31.80	-14.20
232.28	27.10	V	11.49	3.23		41.82	-4.18
240.01	25.80	V	11.71	3.30		40.81	-5.19
336.07	10.40	H	14.77	3.89		29.06	-16.94
497.94	8.10	H	17.98	4.92		31.00	-15.00
599.98	7.50	H	19.24	5.44		32.18	-13.82

Table 2. Radiated Measurements at 3meters.

**Note :**

1. All modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B digital device is 100  $\mu$ V/m (40.0 dB $\mu$ V/m) from 30 MHz to 88 MHz, 150  $\mu$ V/m (43.5 dB $\mu$ V/m) from 88 MHz to 216 MHz, 200  $\mu$ V/m(46.0 dB $\mu$ V/m) from 216 MHz to 960 MHz and 500  $\mu$ V/m (54.0 dB $\mu$ V/m) from above 960 MHz.

\* AFCL = Antenna Factor and Cable Loss

\*\* Measurements using CISPR quasi-peak mode. Above 1 GHz, peak detector function mode is using a resolution bandwidth of 1 MHz and a video bandwidth of 1 MHz.

The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.



Tested by **Hyung-Seok Lee**



## 6. TEST EQUIPMENTS

---

The listing below denotes the test equipments utilized for the test(s).

<u>Nomenclature</u>	<u>Manufacture Model Number</u>	<u>Serial Number</u>	<u>Calibration Date</u>
Signal Analyzer (9kHz - 1.2GHz)	PMM PMM 9000	3100J70602	00/10/10
Spectrum Analyzer (9kHz - 2.6GHz)	ADVANTEST R3261C	61720002	00/08/25
Amplifier (0.1MHz-1.3GHz)	HP 8447D	2944A08872	-
LISN	PMM L3-25	1110k70403	00/09/01
Biconical Antenna	PMM BC01	0020J70501	00/10/10
Log Periodic Antenna	PMM LP01	0020J70501	00/10/10
Dipole Antenna	SWALZBECK VBA6106A	1277	00/09/05
Dipole Antenna	SWALZBECK UHA9105	91052168	00/09/05
Plotter	HP 7475A	007475A	-
Shield Room 7m x 4m x 4m	SEMITECH -	000815	
Turn Table	JAEMC JAC-2	980723	
Antenna Mast	Dail EMC	970815	

## 7. MEASUREMENT PHOTOS

---

### 7.1 Setup with the Maximized RFI Voltage Emission Level



## 7.2 Setup with the Maximized RFI Field Strength Emission Level

