

## HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

Product Compliance Division, EMC Team  
 SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA  
 TEL : +82 31 639 8518 FAX : +82 31 639 8525

## CERTIFICATION

**Manufacture;**  
**HYUNDAI IMAGEQUEST CO., LTD.**

**SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI,  
 KYOUNKI-DO, 467-701, KOREA**

**HYUNDAI IMAGEQUEST FRN : 0005-8664-39**

**Date of Issue : August 10, 2005**

**Test Report No.: HCT-F05-0802**

**Test Site: HYUNDAI CALIBRATION & CERTIFICATION  
 TECHNOLOGIES CO., LTD.**

**HCT FRN : 0005-8664-21**

**FCC ID :**

**PJIL17C00000**

**MODEL /TYPE:**

**L73D/L17C00000**

<b>Rule Part(s):</b>	<b>Part 15 &amp; 2</b>
<b>Equipment Class:</b>	<b>FCC Class B Peripheral Device(JBP)</b>
<b>Standard(s):</b>	<b>FCC Class B: (CISPR 22)</b>
<b>EUT Type:</b>	<b>17 " LCD Monitor</b>
<b>Max. Resolution(s):</b>	<b>Analog:1280 X 1024(@75Hz), Digital: 1280 X 1024(@60Hz)</b>
<b>Model(s):</b>	<b>L73D</b>
<b>Port/Connector(s)</b>	<b>15-pinD-sub(Analog RGB),DVI-D (Digital TMDS) connector, AUDIO IN/OUT, USB 2 downstream ports</b>
<b>LCD Panel</b>	<b>Samsung Electronics (LTM170EU-L21)</b>

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Ki-Soo Kim

Report prepared by : Ki-Soo Kim  
 Manager of EMC Tech. Part



**HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.**

## TABLE OF CONTENTS

	PAGE
<b>REPORT COVER</b>	<b>1</b>
<b>TABLE OF CONTENTS</b>	<b>2</b>
1.1    SCOPE	3
2.1    INTRODUCTION (SITE DESCRIPTION)	4
3.1    PRODUCTION INFORMATION	5-6
4.1    DESCRIPTION OF TESTS (CONDUCTED)	7
4.3    DESCRIPTION OF TESTS (RADIATED)	8
5.1    LIST OF SUPPORT EQUIPMENT	9-11
6.1    TEST DATA (CONDUCTED)	12-20
7.1    TEST DATA (RADIATED)	21-22
8.1    SAMPLE CALCULATIONS	23
9.1    TEST EQUIPMENT	24
10.1   TEST SOFTWARE USED	25
11.1   CONCLUSION	26

**ATTACHMENT A :**           **FCC ID LABEL & LOCATION**

**ATTACHMENT B :**           **EXTERNAL PHOTOGRAPHS**

**ATTACHMENT C :**           **BLOCK DIAGRAM**

**ATTACHMENT D :**           **TEST SETUP PHOTOGRAPHS**

**ATTACHMENT E :**           **USER'S MANUAL**

**ATTACHMENT F :**           **INTERNAL PHOTOGRAPHS**

# MEASUREMENT REPORT

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

<b>Applicant Name:</b>	HYUNDAI IMAGEQUEST
<b>Address:</b>	SAN 136-1, AMI-RI , BUBAL-EUP, ICHEON-SI, KYOUINKI-DO, 467-701,KOREA

- **FCC ID : PJIL17C00000**
- Equipment Class: FCC Class B Peripheral Device (JPB)
- EUT Type: 17 " LCD MONITOR
- Model(s): L73D
- LCD Panel: Samsung Electronics (LTM170EU-L21)
- Max. Resolution: Analog:1280 X 1024(@75Hz), Digital: 1280 X 1024(@60Hz)
- Frequency Range: V-Sync: 56Hz – 75Hz , H-Sync: 31KHz – 80KHz
- Cable(s): Shielded D-Sub (with ferrite on both ends), Shielded DVI-D (with ferrite on both ends) , Shielded AUDIO (with ferrite on both ends), Shielded USB
- Power Cord: Unshielded
- Rule Part(s): FCC Part 15 Subpart B
- Test Procedure(s): ANSI C63.4 (2003)
- Dates of Tests: July11, 2005 ~ July 15, 2005
- Place of Tests: 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUUNGKI-DO,467-701,KOREA

## 2.1 INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSIC63.4-2001) was used in determining radiated and conducted emissions emanating from **HYUNDAI IMAGEQUEST CO.,LTD. 17-inch LCD Monitor FCC ID: PJIL17C00000**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO, 467-701,KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23,2003 (Confirmation Number: EA90661)

## 3.1 PRODUCT INFORMATION

### 3.2 Equipment Description

Equipment Under Test (EUT) is the **HYUNDAI IMAGEQUEST CO.,Ltd.** ( Model : L73D ) 17-inch **LCD Monitor**

**FCC ID: : PJIL17C00000**

Maximum Resolution(s) : Analog:1280 × 1024(@75Hz),  
Digital: 1280 × 1024(@60Hz)

Frequency Range(s): H-Sync: 31KHz – 80KHz  
V-Sync: 56Hz – 75 Hz

Pixel Pitch: 0.264 × 0.264 mm

Power Supply: AC 100-240V ,1.0A

Power Cord: *Unshielded* AC power cord

Port(s)/Input Connector(s): 15-pin D-sub RGB connector, DVI-D TMDS connector, AUDIO IN/OUT, USB port

Cable(s) : Shielded D-Sub (with ferrite on both ends), Shielded DVI-D (with ferrite on both ends),  
Shielded AUDIO (with ferrite on both ends), Shielded USB


Dimensions (W × H × D): 373 × 420 × 200mm(W × H × D)

Weight (Net): 4.4Kg unpacked


### EMI Suppression Devices:

Modifications were made to the device. Please refer to the next page.

**1. Attach aluminum tape on the frame**

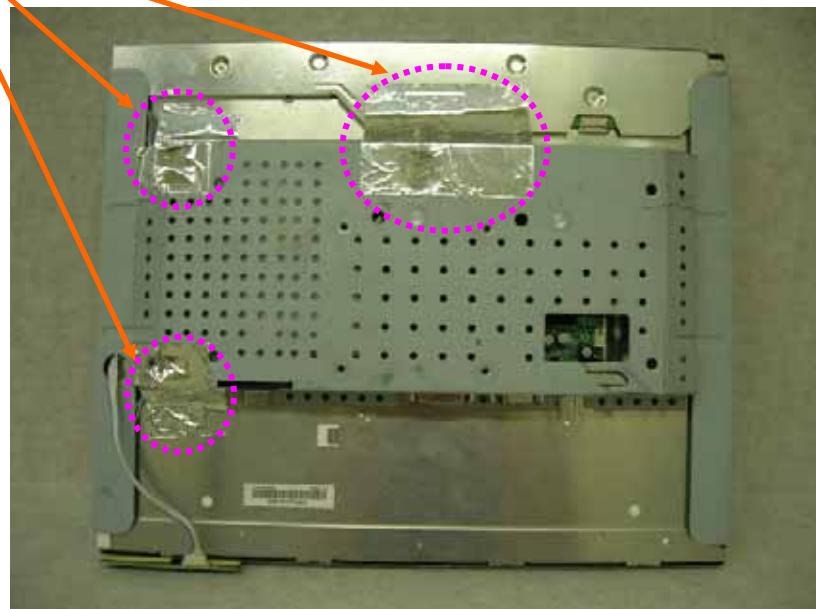

**2. Attach a gasket on the main frame to contact the lcd panel.**

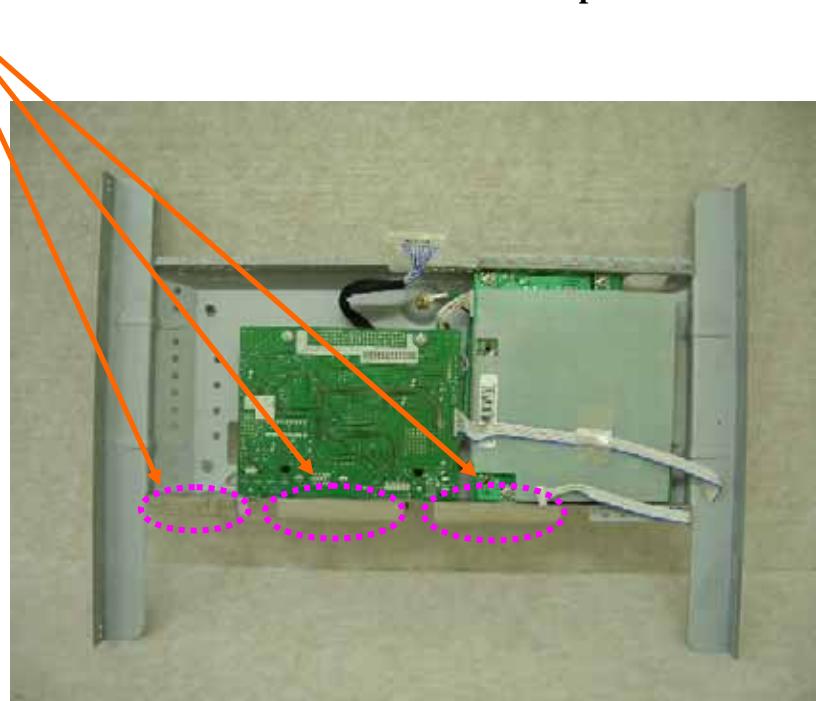

## 4.1 Description of Tests(Conducted)

### 4.2 Powerline Conducted RFI (150kHz- 30MHz)

The power line conducted RFI measurements were performed according to CISPR 22.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table which is 0.8 meters in height and 0.40 meters away from the vertical wall of the shielded enclosure. Power to the EUT is provided through a Rohde & Schwarz 50 Ω / 50 uH Line Impedance Stabilization Network (LISN) and the support equipment through a separate Solar 50 Ω / 50 uH Line- Conducted Test Facility LISN. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME. The spectrum was scanned from 150kHz to 30 MHz. Each maximum EME was remeasured using an EMI receiver. The detector function of the receiver was set to CISPR quasi- peak and average mode with the bandwidth set to 9 kHz. Each emission was maximized consistent with the typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum Diagram emission. Excess cable lengths were bundled at the center with 30- 40cm. in length. The worst-case configuration is noted in the test report and the photographs are attached. Each EME reported was calibrated using the Rohde & Schwarz SMX signal generator and are listed on Table 1. RFI Conducted FCC Class B

<b>RFI CONDUCTED</b>	<b>CISPR 22 CLASS B</b> <b>Limits dB(uV/m)</b>	
	<b>CISPR 22</b> <b>Quasi-Peak</b>	<b>CISPR 22</b> <b>Average</b>
<b>150kHz - 0.5MHz</b>	<b>66-56**</b>	<b>56-46**</b>
<b>0.5MHz - 5MHz</b>	<b>56</b>	<b>46</b>
<b>5MHz - 30MHz</b>	<b>60</b>	<b>50</b>

\*\*Limits decreases linearly with the logarithm of frequency

Table 1. RFI Conducted Limits

## 4.3 Description of Tests(Radiated)

### Radiated Emissions

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The spectrum was scanned from 30 to 300 MHz using biconical antenna, 300 to 1000 MHz using log- periodic antenna, and above 1 GHz using linearly polarized horn antennas. Final measurements were made outdoors at 10-meter test range using Dipole antennas and EMI receiver. For frequencies above 1 GHz, horn antennas were used. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The EMI receiver detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120 kHz. The EUT, support equipment, and interconnecting cables were arranged to the configuration that produces the maximum EME emission found during preliminary scan. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Horizontal and vertical antenna polarizations were checked. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/ or support equipment, and powering the monitor the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

ITE Radiated Limits			
Frequency (MHz)	FCC Limit @ 3m. Quasi- Peak dB[ $\mu$ V/m]	FCC Limit @ 10m.* Quasi – Peak dB [ $\mu$ V/m]	CISPR Limit @ 10m. Quasi-Peak dB [ $\mu$ V/m]
<b>30-88</b>	<b>40.0</b>	<b>29.5</b>	<b>30.0</b>
<b>88-216</b>	<b>43.5</b>	<b>33.0</b>	<b>30.0</b>
<b>216-230</b>	<b>46.0</b>	<b>35.6</b>	<b>30.0</b>
<b>230-960</b>	<b>46.0</b>	<b>35.6</b>	<b>37.0</b>
<b>960-1000</b>	<b>54.0</b>	<b>43.5</b>	<b>37.0</b>
<b>&gt; 1000</b>	<b>54.0</b>	<b>43.5</b>	<b>No Specified Limit</b>
<b>* Limit extrapolated 20 dB/decade</b>			

**Table 2. Radiated Class B limits @ 10-meters**

## 5.1 Support Equipment Used

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
LCD MONITOR (EUT)	HYUNDAI IMAGEQUEST CO., LTD.	L73D	PJIL17C00000	P.C
P.C	H/P	HP Pavilion 8921	DoC	EUT
KEY BOARD	H/P	5181	DoC	P.C
MOUSE	Microsoft	IntelliMouse optical USB and PS/2 Compatible	DoC	P.C
SERIAL MOUSE	Logitech	M-M28	DoC	P.C
PRINTER	H/P	C4569A	DoC	P.C
Headset	HYUNDAI	JPC-914MV	DoC	EUT
USB Stick Memory	Epsoline	NANO Drive 128M	DoC	EUT

## 5.2 Cable Description

		Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
LCD Monitor (EUT)	Power	N	N/A	1.8(P)
	D Sub	N/A	Y	1.8(D)
	DVI	N/A	Y	1.8(D)
	Audio in	N/A	Y	1.8(D)
	Audio out	N/A	Y	1.8(D)
	USB interface cable	N/A	Y	1.8(D)
PC		N	N/A	1.8(P)
Key Board		N/A	Y	1.8(D)
Mouse		N/A	Y	1.8(D)
Serial Mouse		N/A	Y	1.8(D)
Printer		N	Y	1.8(P,D)
Headset		N/A	Y	2.7(D)

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

### 5.3 Noise Suppression Parts on Cable. (I/O CABLE)

		Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
LCD Monitor (EUT)	D Sub	Y	BOTH END	Y	BOTH END
	DVI	Y	BOTH END	Y	BOTH END
	Audio in	Y	BOTH END	Y	BOTH END
	Audio out	N	N/A	Y	BOTH END
	USB interface cable	Y	BOTH END	Y	BOTH END
PC		N	N/A	N/A	N/A
Key Board		N	N/A	Y	PC END
Mouse		Y	PC END	Y	PC END
Serial Mouse		N	N/A	Y	PC END
Printer		N	N/A	Y	BOTH END
Headset		N	N/A	Y	PC END

## 6.1 LINE-CONDUCTED TEST DATA


**HCT**

### EMC TEST LAB

EUT: L73D  
 Manufacturer: HYUNDAI IMAGEQUEST  
 Operating Condition: 1280 X 1024 75Hz  
 Test Site: SHIELD ROOM  
 Operator: KS, KIM  
 Test Specification: CISPR 22 CLASS B  
 Comment: H

#### SCAN TABLE: "CISPR 22 Voltage"

CISPR 22 Voltage						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

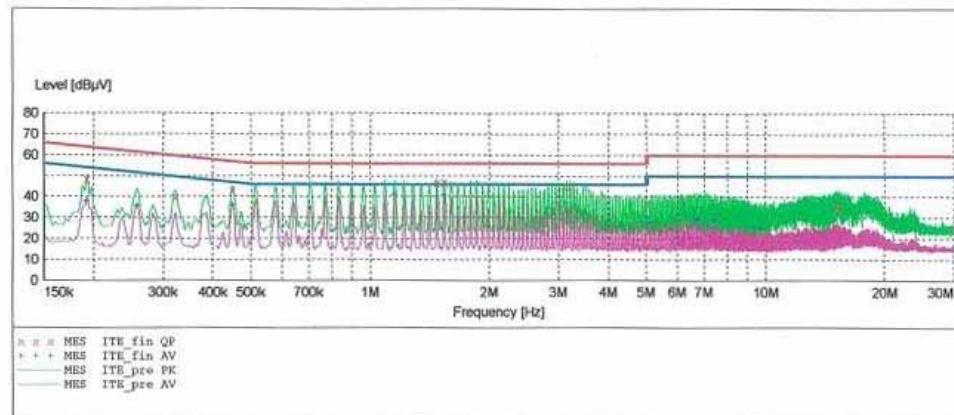

#### MEASUREMENT RESULT: "ITE\_fin\_QP"

7/11/2005 4:16PM	Frequency	Level	Transd	Limit	Margin	Line	PE
	MHz	dB $\mu$ V	dB	dB $\mu$ V	dB		
	0.192600	48.60	10.1	64	15.3	---	---
	0.322600	40.00	10.1	60	19.6	---	---
	0.450100	43.20	10.1	57	13.7	---	---
	1.475000	46.70	10.2	56	9.3	---	---
	1.540000	46.80	10.2	56	9.2	---	---
	3.140000	45.30	10.2	56	10.7	---	---
	5.000000	37.10	10.3	56	18.9	---	---
	15.145000	36.40	10.5	60	23.6	---	---
	15.385000	33.80	10.5	60	26.2	---	---

**MEASUREMENT RESULT: "ITE\_fin AV"**

7/11/2005 4:16PM


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.192600	38.20	10.1	54	15.7	---	---
0.257600	35.70	10.1	52	15.8	---	---
0.450100	36.10	10.1	47	10.8	---	---
1.155000	41.20	10.1	46	4.8	---	---
1.475000	40.20	10.2	46	5.8	---	---
1.540000	40.80	10.2	46	5.2	---	---
5.000000	30.70	10.3	46	15.3	---	---
6.730000	29.60	10.3	50	20.4	---	---
7.435000	28.60	10.3	50	21.4	---	---

**HCT**
**EMC TEST LAB**

EUT: L73D  
 Manufacturer: HYUNDAI IMAGEQUEST  
 Operating Condition: 1280 X 1024 75Hz  
 Test Site: SHIELD ROOM  
 Operator: KS,KIM  
 Test Specification: CISPR 22 CLASS B  
 Comment: N

**SCAN TABLE: "CISPR 22 Voltage"**

CISPR 22 Voltage						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

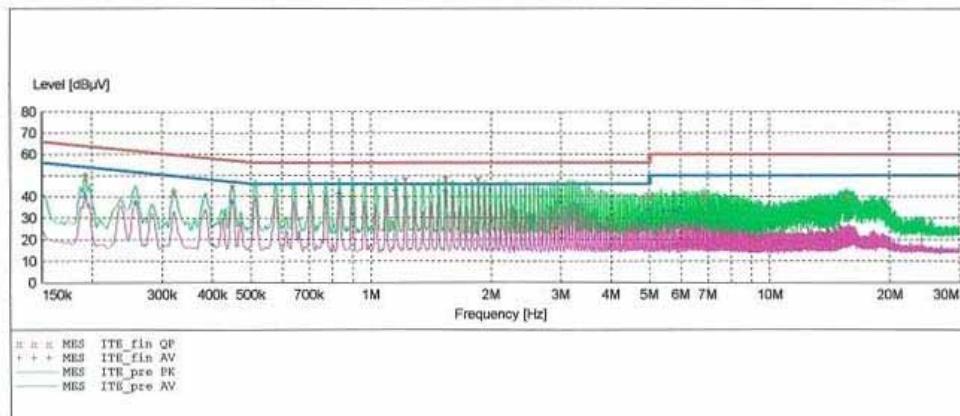
**MEASUREMENT RESULT: "ITE\_fin\_QP"**

7/11/2005 4:12PM	Frequency	Level	Transd	Limit	Margin	Line	PE
	MHz	dB $\mu$ V	dB	dB $\mu$ V	dB		
	0.192600	49.50	10.1	64	14.5	---	---
	0.320100	41.70	10.1	60	18.0	---	---
	0.450100	44.60	10.1	57	12.3	---	---
	1.220000	47.70	10.2	56	8.3	---	---
	1.540000	48.30	10.2	56	7.7	---	---
	1.860000	48.00	10.3	56	8.0	---	---
	5.000000	39.60	10.3	56	16.4	---	---
	6.860000	40.40	10.3	60	19.6	---	---
	15.515000	39.80	10.5	60	20.2	---	---

**MEASUREMENT RESULT: "ITE\_fin AV"**

7/11/2005 4:12PM


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.192600	40.10	10.1	54	13.8	---	---
0.257600	37.30	10.1	52	14.2	---	---
0.450100	37.90	10.1	47	9.0	---	---
0.835000	41.40	10.1	46	4.6	---	---
1.155000	42.90	10.1	46	3.1	---	---
1.540000	42.50	10.2	46	3.5	---	---
5.000000	33.50	10.3	46	12.5	---	---
5.450000	33.20	10.3	50	16.8	---	---
5.770000	33.30	10.3	50	16.7	---	---

**HCT**
**EMC TEST LAB**

EUT: L73D  
 Manufacturer: HYUNDAI IMAGEQUEST  
 Operating Condition: 1280 X 1024 60Hz  
 Test Site: SHIELD ROOM  
 Operator: KS, KIM  
 Test Specification: CISPR 22 CLASS B  
 Comment: H

**SCAN TABLE: "CISPR 22 Voltage"**

CISPR 22 Voltage						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

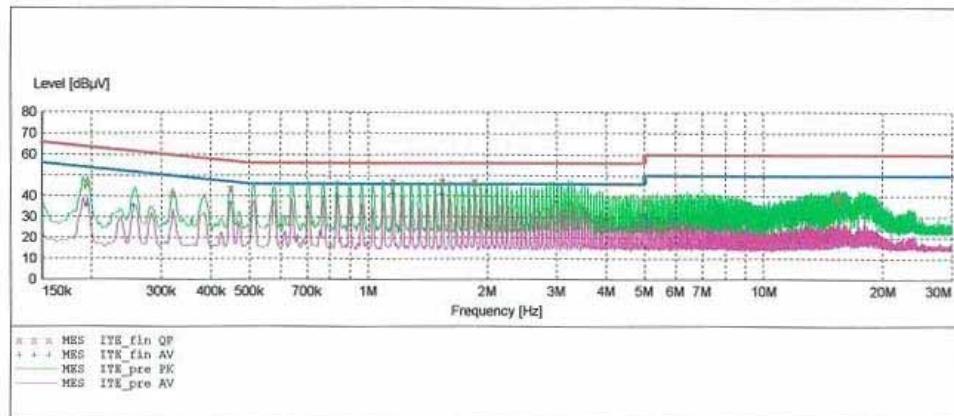
**MEASUREMENT RESULT: "ITE\_fin QP"**

7/11/2005 4:23PM	Frequency	Level	Transd	Limit	Margin	Line	PE
	MHz	dB $\mu$ V	dB	dB $\mu$ V	dB		
	0.195100	46.20	10.1	64	17.6	---	---
	0.320100	41.00	10.1	60	18.7	---	---
	0.450100	43.40	10.1	57	13.5	---	---
	1.155000	47.00	10.1	56	9.0	---	---
	1.540000	47.10	10.2	56	8.9	---	---
	1.860000	46.80	10.3	56	9.2	---	---
	5.000000	37.40	10.3	56	18.6	---	---
	15.445000	40.30	10.5	60	19.7	---	---
	15.575000	38.40	10.5	60	21.6	---	---

**MEASUREMENT RESULT: "ITE\_fin AV"**

7/11/2005 4:23PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.195100	35.90	10.1	54	17.9	---	---
0.255100	35.50	10.1	52	16.1	---	---
0.450100	36.30	10.1	47	10.6	---	---
0.835000	40.00	10.1	46	6.0	---	---
1.155000	41.30	10.1	46	4.7	---	---
1.540000	41.10	10.2	46	4.9	---	---
5.000000	30.90	10.3	46	15.1	---	---
5.065000	29.90	10.3	50	20.1	---	---
6.025000	29.30	10.3	50	20.7	---	---


**HCT**
**EMC TEST LAB**

EUT: L73D  
 Manufacturer: HYUNDAI IMAGEQUEST  
 Operating Condition: 1280 X 1024 60Hz  
 Test Site: SHIELD ROOM  
 Operator: KS, KIM  
 Test Specification: CISPR 22 CLASS B  
 Comment: N

**SCAN TABLE: "CISPR 22 Voltage"**

Short Description: CISPR 22 Voltage

Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer Bandw.
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

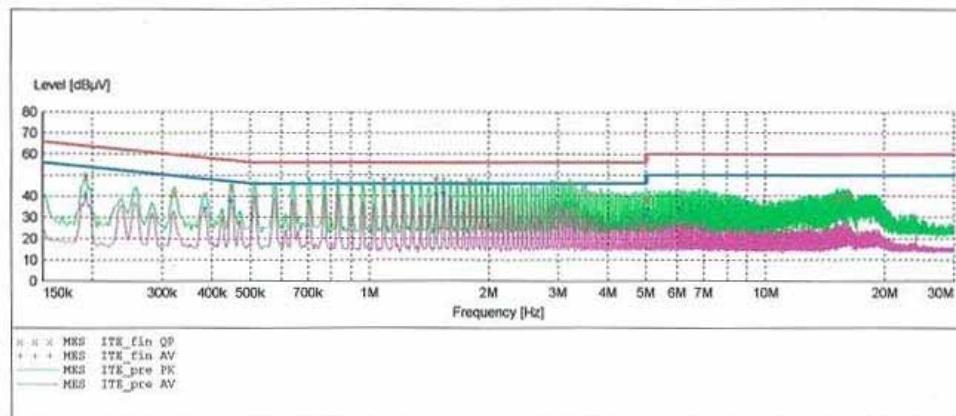
**MEASUREMENT RESULT: "ITE\_fin\_QP"**

7/11/2005 4:27PM						
Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.192600	49.20	10.1	64	14.7	----	----
0.322600	41.00	10.1	60	18.7	----	----
0.450100	44.20	10.1	57	12.7	----	----
1.090000	47.30	10.1	56	8.7	----	----
1.475000	47.50	10.2	56	8.5	----	----
1.795000	46.80	10.3	56	9.2	----	----
5.000000	38.40	10.3	56	17.6	----	----
15.310000	39.10	10.5	60	20.9	----	----
16.205000	40.50	10.5	60	19.5	----	----

**MEASUREMENT RESULT: "ITE\_fin AV"**

7/11/2005 4:27PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.192600	40.10	10.1	54	13.8	---	---
0.385100	34.40	10.1	48	13.7	---	---
0.447600	38.00	10.1	47	8.9	---	---
1.155000	42.10	10.1	46	3.9	---	---
1.475000	41.10	10.2	46	4.9	---	---
1.540000	41.30	10.2	46	4.7	---	---
5.000000	31.10	10.3	46	14.9	---	---
5.060000	33.70	10.3	50	16.3	---	---
6.085000	33.70	10.3	50	16.3	---	---

**NOTES:**

1. All modes of operation were investigated and the worst-case emissions are reported.
2. The CISPR RFI conducted limits are listed on Table 1 (Page 7).
3. Line H = Phase Line N = Neutral Line

---

\*\* Measurements using CISPR quasi-peak mode.

## 7.1 RADIATED TEST DATA

- Analog mode(D-Sub)

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
39.8	6.0	11.5	1.3	V	18.8	30.0	11.2
43.7	7.1	11.9	1.4	V	20.4	30.0	9.6
63.6	8.8	10.7	1.8	V	21.3	30.0	8.7
93.7	12.6	8.1	2.2	V	22.9	30.0	7.1
122.3	5.3	11.7	2.5	V	19.5	30.0	10.5
217.3	9.9	10.2	3.3	V	23.4	30.0	6.6
242.1	8.2	11.0	3.5	V	22.7	37.0	14.3
284.1	15.2	12.5	3.9	H	31.6	37.0	5.4
347.6	12.2	13.8	4.3	V	30.3	37.0	6.7
396.2	12.5	15.0	4.6	V	32.1	37.0	4.9
436.5	9.7	16.4	4.8	H	30.9	37.0	6.1
528.2	8.5	17.7	5.2	H	31.4	37.0	5.6

Radiated Measurements at 10-meters.

**1280 X 1024 (@75Hz)**

- Digital mode(DVI)

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
48.2	6.0	12.3	1.5	V	19.8	30.0	10.2
63.4	8.2	10.7	1.8	V	20.7	30.0	9.3
82.8	12.2	7.8	2.0	V	22.0	30.0	8.0
97.3	10.8	8.7	2.2	V	21.7	30.0	8.3
122.7	10.1	11.7	2.5	V	24.3	30.0	5.7
220.6	8.8	10.3	3.4	V	22.5	30.0	7.5
242.1	9.3	11.0	3.5	V	23.8	37.0	13.2
283.3	13.4	12.4	3.9	H	29.7	37.0	7.3
398.2	11.5	15.0	4.6	V	31.1	37.0	5.9
421.7	9.9	15.8	4.7	H	30.4	37.0	6.6
528.5	9.3	17.7	5.2	H	32.2	37.0	4.8
541.7	8.1	18.0	5.3	V	31.4	37.0	5.6

Radiated Measurements at 10-meters.

**1280 X 1024 (@60Hz)**

NOTES:

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. The radiated limits are listed on Table 2 (Page 8).

---

\*\* AFCL = Antenna Factor (Roberts dipole) and Cable Loss .

\*\*\* Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

## 8.1 Sample Calculations

$$\text{dB } \mu\text{V} = 20 \log_{10}(\text{mV/m})$$

### 8.2 Example 1:

**@ 250.0 KHz**

Class B limit	= 56.0 dB $\mu$ V
Reading	= 48.3 dB $\mu$ V (calibrated level)

<b>Margin</b>	= 48.3 - 56.0 = - 7.7 dB $\mu$ V
	= <b>7.7 dB below limit</b>

### 8.3 Example 2:

**@ 638.1 MHz**

Class B limit	= 37.0 dB $\mu$ V/m
Reading	= 4.8 dB $\mu$ V/m (calibrated level)
Antenna Factor + Cable Loss	= 22.9 dB
Total	= 32.2 dB $\mu$ V/m

<b>Margin</b>	= 32.2 - 37.0 = -4.8
	= <b>4.8 dB below limit</b>

## 9.1 Test Equipment

<u>Type</u>	<u>Manufacture</u>	<u>Model Number</u>	<u>CAL Due Date</u>
EMI Test Receiver	Rohde & Schwarz	ESCI40	2005.11.16
EMI Test Receiver	Rohde & Schwarz	ESVS30	2006.07.01
EMI Test Receiver	Rohde & Schwarz	ESCI	2005.09.13
LISN	Rohde & Schwarz	ESH2-Z5	2006.04.26
Attenuator	Rohde & Schwarz	ESH3-Z2	2005.11.16
TRILOG Antenna	Schwarzbeck	9160	2006.03.31
Antenna Position Tower	HD	MA240	N/A
Turn Table	EMCO	1050	N/A
Power Analyzer	Voltech	PM 3300	2006.03.22
Reference Network Impedance	Voltech	IEC 555	N/A
AC Power Source	PACIFIC	Magnetic Module	N/A
AC Power Source	PACIFIC	360-AMX	2005.11.25
Controller	HD GmbH	HD 100	N/A
SlideBar	HD GmbH	KMS 560	N/A
PULSE LIMITER	Rohde & Schwarz	ESH3-Z2	2005.11.16

## 10.1 Test Software Used

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

NOTE: This is a sample of the basic program used during the test. However, during testing, a different software program may be used; whichever determines the worst-case condition. In addition, the program used also depends on the number and type of devices being tested.

Actual program used is the "H" pattern in Notepad under Windows environment. All resolution modes (1280 x 1024, 1152 x 864, 1024 x 768, 832 x 624, 800 x 600, 640x480, 720x400) were investigated and tested

## 11.1 Conclusion

The data collected shows that the HYUNDAI IMAGEQUEST CO., LTD. 17-inch LCD Monitor

**FCC ID: PJIL17C00000**

complies with §15.107 and §15.109 of the FCC Rules.