

User and Installation Guide

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

iFinity))TM Wireless Audio Receiver

Model R800

wireless
multi channel

Amphony[®]

LEGAL LIMITATIONS

REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS YOUR EXCLUSIVE REMEDY. WE SHALL NOT BE HELD LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESSED OR IMPLIED WARRANTY ON THIS EQUIPMENT, NOR FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF, OR INABILITY TO USE, THIS EQUIPMENT. UNDER NO CIRCUMSTANCES SHALL OUR LIABILITY, IF ANY, EXCEED THE PURCHASE PRICE PAID FOR THIS EQUIPMENT, EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW. EXCEPT AS PROVIDED HEREIN, WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. WE RESERVE THE RIGHT TO REFUSE TO HONOR THIS WARRANTY IF WE DETERMINE ANY OF THE ABOVE EXCEPTIONS TO HAVE CAUSED THIS EQUIPMENT NOT TO HAVE PERFORMED PROPERLY. THIS WARRANTY SHALL BE VOID IF ANY FACTORY-APPLIED IDENTIFICATION MARK, INCLUDING BUT NOT LIMITED TO SERIAL NUMBERS AND WARRANTY LABELS, HAS BEEN ALTERED OR REMOVED. THIS WARRANTY SHALL ALSO BE VOID IF THE TRANSMITTER OR AMPLIFIER HAVE BEEN OPENED BY AN UNAUTHORIZED PERSON.

This warranty gives you specific legal rights which may vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on the duration of an implied warranty, so those limitations may not apply to you.

Note: No responsibility is assumed for the presence of interference outside of Amphony's control, such as other transmitters or cordless phones, which may hamper proper signal reception.

Contents

Unpacking	3
Connecting the receiver	3
Pairing the receiver with the transmitter	4
Selecting the audio channels	4
Placing the receiver	6
Troubleshooting	7
Technical specifications	9
Safety information	10
Limited Warranty	12


Note: This product requires an iFinity Audio Transmitter, Model T800 for operation (not included).

Unpacking: Check that this package contains:

One iFinity Wireless Audio receiver, one 7.5 V AC adapter (wallwart), one dual RCA cable.

Step 1 Connecting the receiver

Connect the DC power input of the receiver with the supplied 7.5 V AC adapter (wallwart). Connect the receiver to active loudspeakers, active subwoofers or an audio amplifier via the supplied RCA audio cable.

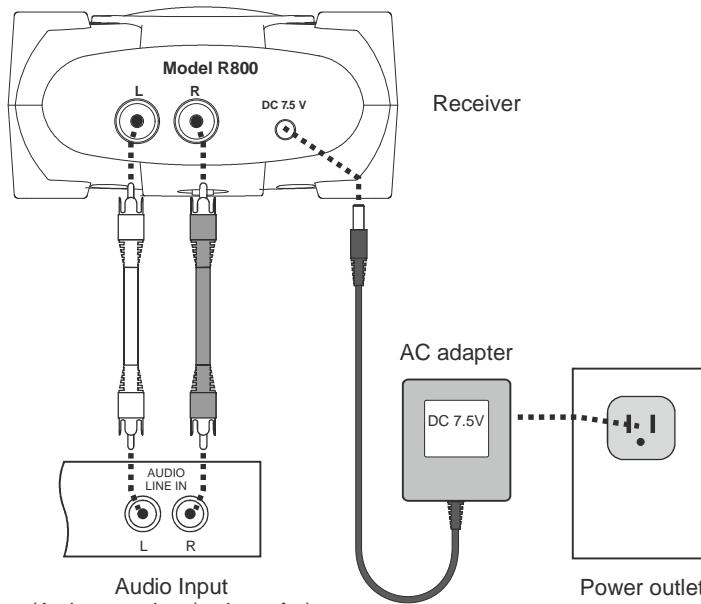

Limited warranty

WHAT YOUR WARRANTY COVERS

This warranty extends only to the original user of the equipment ("you", "your") and is limited to the purchase price of each part. Amphony and its affiliated companies ("we", "our", "us") warrant this Wireless Audio Receiver against defects in materials or workmanship as follows.

LABOR: For a period of ninety (90) days from the original date of purchase, if we determine that the equipment is defective subject to the limitations of this warranty, we will replace it at no charge for labor. We warrant any such work done against defects in materials or workmanship for the remaining portion of the original warranty period.

PARTS: For a period of one (1) year from the original date of purchase, we will supply, at no charge, new or rebuilt replacement parts in exchange for parts we determine are defective subject to the limitations of this warranty. We warrant any such replacement parts against defects in materials or workmanship for the remaining portion of the original warranty period.

Note: "Parts" means items included in this package. It does *not* include other parts purchased separately.

WHAT YOUR WARRANTY DOES NOT COVER

This warranty *does not* cover consumer instruction, physical setup or adjustment of any consumer electronic equipment, or signal transmission problems.

This warranty *does not* cover cosmetic damage, damage due to the affixing of any attachment not provided with the product, loss of parts, connecting the product to any but the specified receptacles, lightning, electrical surges, fire, flood, or other acts of God, accident, misuse, abuse, repair or alteration by other than authorized service personnel, negligence, commercial or institutional use, or improper or neglected maintenance.

This warranty *does not* cover equipment sold AS IS or WITH ALL FAULTS, equipment removal or reinstallation, shipping damage if the equipment was not packed and shipped in the manner we prescribe, nor equipment purchased, serviced, or operated outside the contiguous United States of America.

CLEANING

- Unplug the product before cleaning.
- When the system gets dirty, wipe it with a clean, soft cloth. If necessary, wipe it with a soft cloth, slightly dampened with soapy water. Wipe dry immediately with a dry cloth.
- Never use benzene, aerosol cleaners, thinner, alcohol or any volatile cleaning agent.
- Do not use abrasive cleaners, as they may damage the finish.

SERVICE

- Do not open the cabinet of any components. Opening the cabinets may present a shock hazard, and any modification to this product will void your warranty.
- Do not attempt to service the unit yourself.
- Please refer any service to an authorized Amphony service center.

ATTENTION!

Do not connect the receiver to passive speakers! Use the Model 880 Wireless Audio amplifier to connect to passive speakers.

Step 2**Pairing the receiver with the transmitter**

In order to receive audio, the receiver must first be paired with your iFinity audio transmitter.

Press the pairing button of your iFinity Model T800 transmitter (please refer to your iFinity transmitter user manual for further details). The transmitter network status light will start flashing quickly.

Press the pairing button of your iFinity wireless audio receiver within 5 minutes. This button is located at the bottom of the receiver (please see picture on next page). Once the receiver locks to the transmitter signal, the receiver network status light will light continuously. You now should be able to hear the audio.

You can pair up to 4 wireless receivers with one transmitter. Pair each wireless receiver as shown above.

Description of the receiver network status light

Flashing Slowly: Not paired to any transmitter signal


Flashing Quickly: Pairing Mode

Always On: Audio is being received

Step 3**Selecting the audio channels**

Select the wireless audio channels which the receiver should receive by using a small screwdriver and toggling the red switch at the bottom of the receiver.

Receiver bottom view

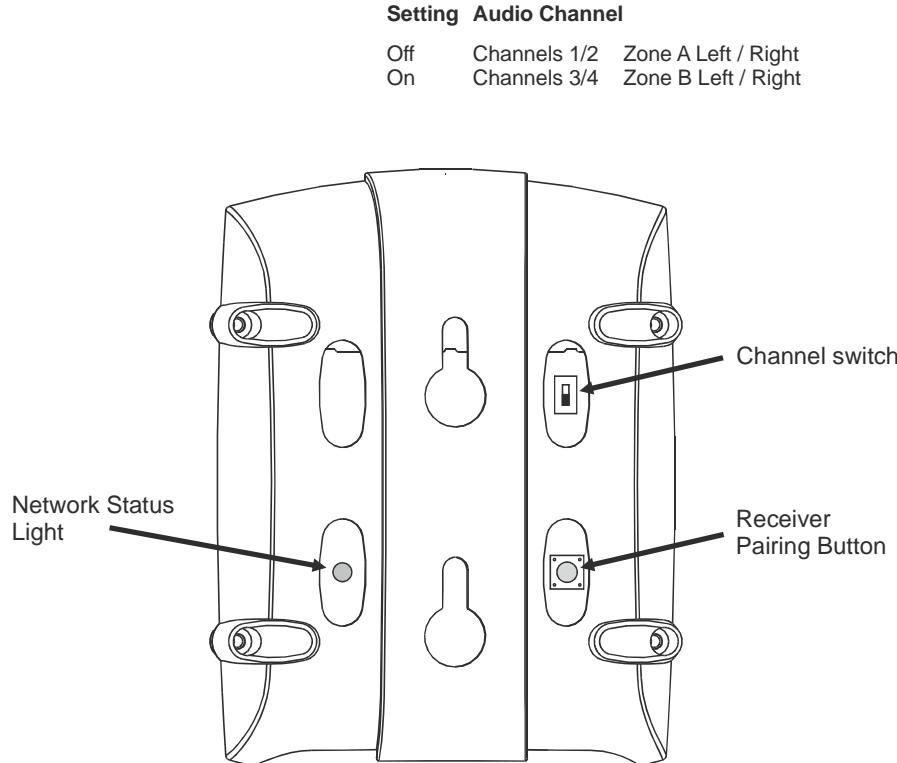**Setting Audio Channel**

Off	Channels 1/2	Zone A Left / Right
On	Channels 3/4	Zone B Left / Right

IMPORTANT SAFETY INFORMATION**READ THESE SAFETY INSTRUCTIONS CAREFULLY AND HEED ALL WARNINGS IN THIS MANUAL.****POWER SOURCE**

To protect against electric shock, fire or personal injury, please observe the following:

- This product has been designed to work with 120-volt AC current using the supplied AC adapters. Connection to a line voltage other than that or use of non-compatible AC adapters may create a safety and fire hazard and may damage the product.
- Do not run power cords under rugs or carpets or place heavy objects on them.
- Damaged or deformed power cords are hazardous and should be replaced immediately by a qualified service technician.

LOCATION

- Do not use this product outdoors or in cars.
- Do not place this product in direct sunlight, or near heat sources.
- Keep this product away from strong magnetic objects.

CARE

- Do not place any object containing water or other liquids on this product.
- Do not remove the cabinet. Touching parts inside the cabinet could result in electric shock and damage to the product.

NON-USE PERIODS

- When the product is not being used for a long period of time, unplug the product.

Technical Specifications:Output level: **1 Vrms**Frequency response: **2 Hz ... 20 kHz**Number of wireless audio channels: **4**Signal-to-noise ratio: **typ. 91 dB (A weighted)**Total harmonic distortion: **typ. -90 dB**Channel separation: **typ. 90 dB**

Copyright (C) 2016 Amphony. All rights reserved.

The information contained herein is subject to change without notice. Revisions may be issued to advise of such changes and/or additions.

All product names, trade names, or corporate names mentioned in this document are acknowledged to be the proprietary property of the registered owners.

FCC ID: PMJR800

This device complies with part 15 of the FCC Rules. Operation is subjected to the following two conditions: 1) This device may not cause harmful interference and 2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


Step 4 Placing the receiver

For best reception, we recommend that the receiver be placed within the line of sight from the transmitter. If possible, the receiver should be placed right side up.


Example 1 below shows the optimum placement of the receiver. If no line of sight is possible, place the receiver such that there is the minimum possible number of walls and obstacles between the transmitter and receiver.

You can mount the receiver vertically as shown in Example 2 by using the 2 screw openings at the bottom. In this case, the operating range is reduced compared to mounting the receiver right side up.

Note: This product will not work properly from within an enclosed metal cabinet.

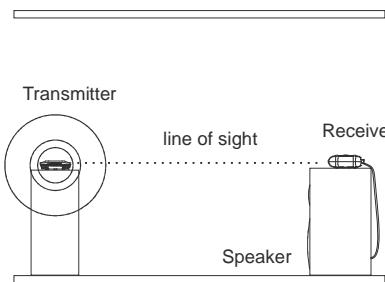

Example 1: Amplifier placed on top of a speaker

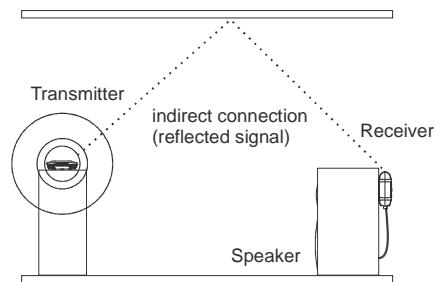

Example 2: Amplifier mounted vertically behind a speaker

Troubleshooting

Problem	Possible Cause	Solution
No audio at receiver	No wireless signal	Check that your iFinity transmitter is plugged in.
	Receiver not paired	Pair the receiver with your iFinity transmitter.
	Faulty AC adapter or faulty power outlet	Check the receiver power supply.
	Strong interference	See under "Strong Interference" on next page.
	Audio volume too low	See below under "Audio volume too low".
Audio is distorted	Strong interference	See under "Strong Interference" on next page.
Receiver audio level is too low	Audio volume too low	Connect transmitter to an adjustable audio output
	Transmitter volume control set too low	Adjust the transmitter volume control to achieve desired audio level.
Audio drops out intermittently or crackles	Strong interference	See under "Strong Interference" on next page.
	Unstable power supply	See under "Unstable power supply" below.
Audio drops out intermittently or crackles	Strong interference	See under "Strong Interference" on next page.
	Unstable power supply	Ensure that the power outlet delivers a stable voltage. Very strong surges or voltage fluctuations may cause audio dropouts. Try using a surge protector.

Problem	Possible Cause	Solution
Transmitter range is extremely short	Strong interference	In some cases, there may be strong interference preventing proper reception of the audio signal which can be caused by wireless networks or cordless phones. Either eliminate the interference, locate the base unit of the cordless phone in another room, set the wireless network to use the 5.8 GHz frequency band rather than 2.4 GHz, relocate the transmitter, relocate or reorient the receiver to improve reception. Also, try to lower the power output of your wireless LAN router.
	Too many obstacles	Audio will drop out if there are too many obstacles between the transmitter and the receiver, try relocating the transmitter or receiver to improve reception.
Transmitter affects wireless LAN speed	iFinity Transmitter or Receiver too close to wireless LAN device	Increase the distance between the iFinity transmitter or iFinity receiver and your wireless LAN router.

For up-to-date troubleshooting advice, visit www.amphony.com