



# FCC TEST REPORT

**REPORT NO.:** RF910107R01

**MODEL NO.:** CP-108

**RECEIVED:** January 7, 2002

**TESTED:** January 8 ~ January 19, 2002

**APPLICANT:** INVENTEC APPLIANCES CORP.

**ADDRESS:** No. 37, Wu-Kung-Wu Rd., Wu-Ku Industrial Park,  
Wu-Ku Hsiang, Taipei Hsien, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



**NVLAP**<sup>®</sup>  
Lab Code: 200102-0

## Table of Contents

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4	TEST TYPES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	9
4.1.2	TEST INSTRUMENTS .....	9
4.1.3	TEST PROCEDURES .....	10
4.1.4	TEST SETUP .....	10
4.1.5	EUT OPERATING CONDITIONS .....	11
4.1.6	TEST RESULTS .....	12
4.2	RADIATED EMISSION MEASUREMENT .....	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	18
4.2.2	TEST INSTRUMENTS .....	19
4.2.3	TEST PROCEDURES .....	20
4.2.4	TEST SETUP .....	21
4.2.5	EUT OPERATING CONDITIONS .....	21
4.2.6	TEST RESULTS .....	22
4.3	6dB BANDWIDTH MEASUREMENT .....	27
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	27
4.3.2	TEST INSTRUMENTS .....	27
4.3.3	TEST PROCEDURE .....	28
4.3.4	TEST SETUP .....	28
4.3.5	EUT OPERATING CONDITIONS .....	28
4.3.6	TEST RESULTS .....	29
4.4	MAXIMUM PEAK OUTPUT POWER .....	33
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	33
4.4.2	TEST INSTRUMENTS .....	33
4.4.3	TEST PROCEDURES .....	34
4.4.4	TEST SETUP .....	34
4.4.5	EUT OPERATING CONDITIONS .....	34

4.4.6	TEST RESULTS.....	35
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	36
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	36
4.5.2	TEST INSTRUMENTS .....	36
4.5.3	TEST PROCEDURE .....	37
4.5.4	TEST SETUP .....	37
4.5.5	EUT OPERATING CONDITIONS.....	37
4.5.6	TEST RESULTS.....	38
4.6	BAND EDGES MEASUREMENT .....	42
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	42
4.6.2	TEST INSTRUMENTS .....	42
4.6.3	TEST PROCEDURE .....	42
4.6.4	EUT OPERATING CONDITION .....	43
4.6.5	TEST RESULTS.....	43
4.7	ANTENNA REQUIREMENT.....	46
4.7.1	STANDARD APPLICABLE.....	46
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	46
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	47
6	INFORMATION ON THE TESTING LABORATORIES .....	49



## 1 CERTIFICATION

**PRODUCT :** 2.4GHz PCMCIA Card  
**BRAND NAME :** INVENTEC  
**MODEL NO. :** CP-108  
**APPLICANT :** INVENTEC APPLIANCES CORP.  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992, Canada RSS 210,  
New Zealand RFS 29

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on from Jan. 8, 2002 to Jan. 19, 2002, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY: James Lee, DATE: Jan. 24, 2002  
James Lee

CHECKED BY: Demi Chen, DATE: Jan. 24, 2002  
Demi Chen

APPROVED BY: Alan Lane, DATE: Jan. 24, 2002  
Dr. Alan Lane  
Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dB <sub>u</sub> V	PASS	Meet the requirement of limit Minimum passing margin is -9.52dB <sub>u</sub> V at 22.571MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.1dB <sub>u</sub> V at 2088.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	2.4GHz PCMCIA Card
<b>MODEL NO.</b>	CP-108
<b>POWER SUPPLY</b>	3.3VDC from notebook
<b>MODULATION TYPE</b>	CCK, BPSK, QPSK
<b>RADIO TECHNOLOGY</b>	DSSS
<b>TRANSFER RATE</b>	1/2/5.5/11Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	13.78dBm
<b>ANTENNA TYPE</b>	Patch antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:** For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 2.4GHz PCMCIA Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR 47 Part 15, Subpart C. (15.247)**  
**ANSI C63.4 : 1992, Canada RSS 210, New Zealand RFS 29**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-19O-B220	FCC DoC Approved
2	PRINTER	HP	2225C+	3123S97230	DSI6XU2225
3	MODEM	ACEEX	1414	980020510	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

**NOTE:** All power cords of the above support units are non shielded (1.8m).

## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.45 – 30	48	-

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	834115/016	Feb. 21, 2002
ROHDE & SCHWARZ Artificial Mains Network (For EUT)	ESH2-Z5	892107/003	July 10, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Dec. 2, 2002
EMCO L.I.S.N. (For peripherals)	3825/2	9504-2359	July 10, 2002
Software	Cond-V2J	NA	NA
RF cable (JYEBAO)	RG-58A/U	Cable-C03.01	July 11, 2002
Terminator (For EMCO LISN)	NA	E1-01-300	Feb. 20, 2002
Terminator (For EMCO LISN)	NA	E1-01-301	Feb. 20, 2002
Shielded Room	Site 3	ADT-C03	NA
VCCI Site Registration No.	Site 3	C-274	NA


NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. “\*”: These equipment are used for conducted telecom port test only (if tested).

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 TEST SETUP

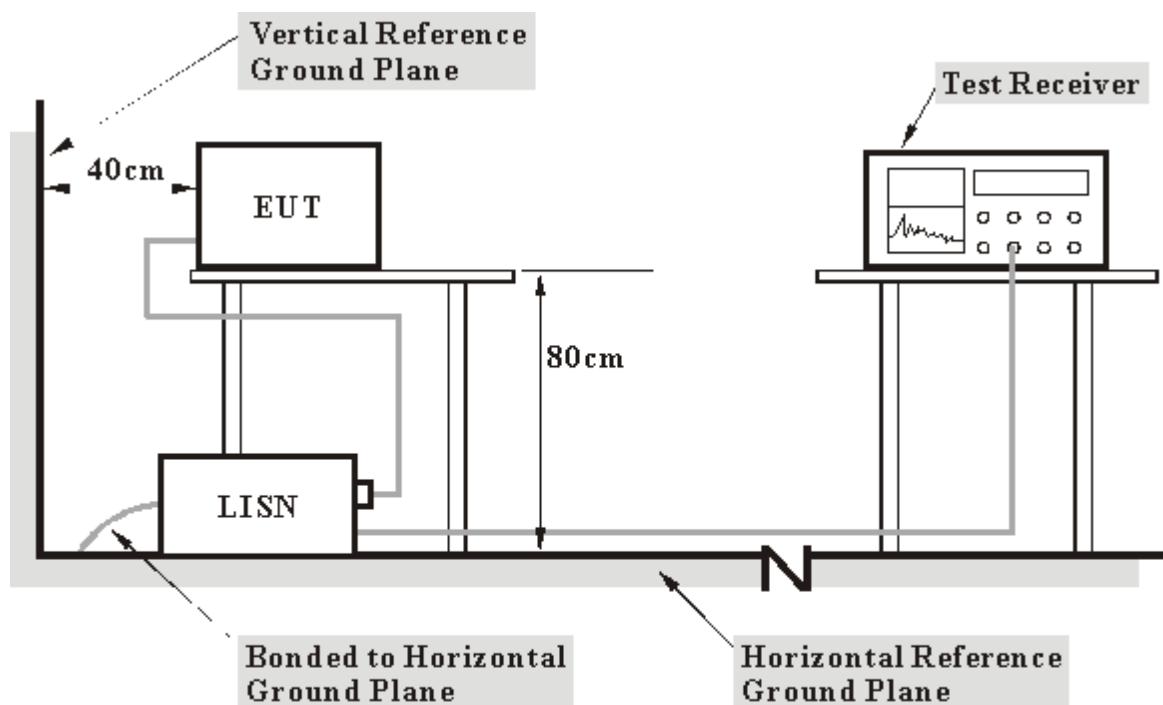

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.5 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.


## 4.1.6 TEST RESULTS

<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 50%RH, 1005 hPa		<b>TESTED BY:</b> James Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.454	0.11	33.18	-	33.29	-	48.00	-	-14.71	-
2	0.677	0.15	24.33	-	24.48	-	48.00	-	-23.52	-
3	2.945	0.25	27.59	-	27.84	-	48.00	-	-20.16	-
4	5.324	0.32	27.07	-	27.39	-	48.00	-	-20.61	-
5	13.802	0.48	30.78	-	31.26	-	48.00	-	-16.74	-
6	22.571	0.55	37.21	-	37.76	-	48.00	-	-10.24	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

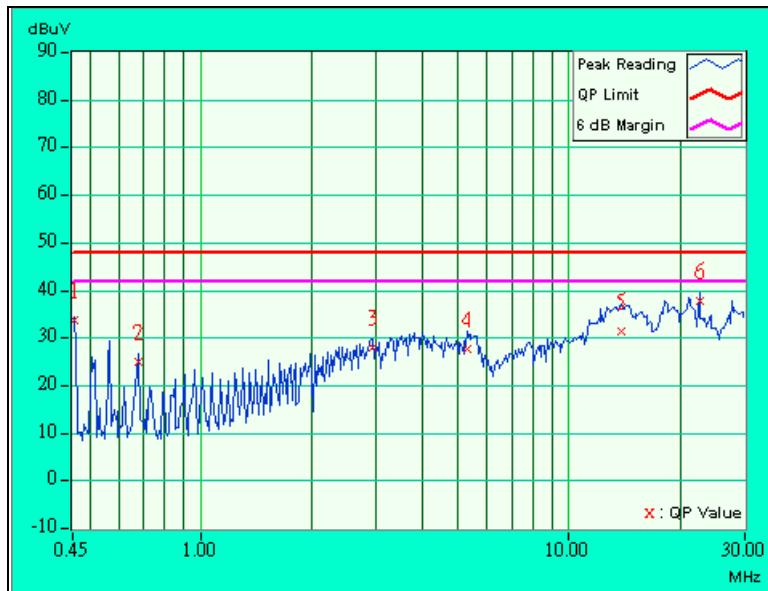


<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 50%RH, 1005 hPa		<b>TESTED BY:</b> James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.450	0.11	31.97	-	32.08	-	48.00	-	-15.92	-
2	0.903	0.18	25.02	-	25.20	-	48.00	-	-22.80	-
3	3.892	0.29	31.98	-	32.27	-	48.00	-	-15.73	-
4	5.470	0.32	21.85	-	22.17	-	48.00	-	-25.83	-
5	14.434	0.58	30.12	-	30.70	-	48.00	-	-17.30	-
6	22.571	0.95	37.53	-	38.48	-	48.00	-	-9.52	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

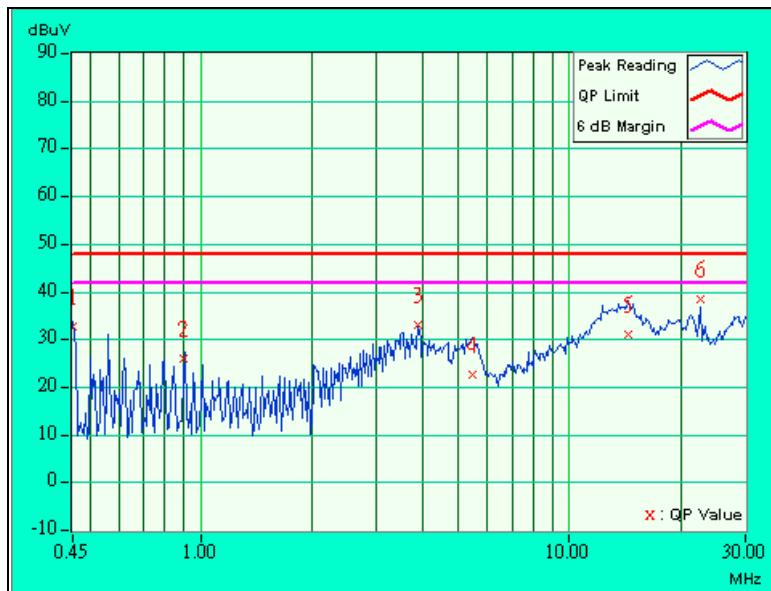


<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 50%RH, 1005 hPa		<b>TESTED BY:</b> James Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.509	0.12	29.30	-	29.42	-	48.00	-	-18.58	-
2	0.794	0.17	24.53	-	24.70	-	48.00	-	-23.30	-
3	2.833	0.24	27.44	-	27.68	-	48.00	-	-20.32	-
4	3.907	0.30	29.31	-	29.61	-	48.00	-	-18.39	-
5	14.153	0.48	30.70	-	31.18	-	48.00	-	-16.82	-
6	21.298	0.57	32.49	-	33.06	-	48.00	-	-14.94	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

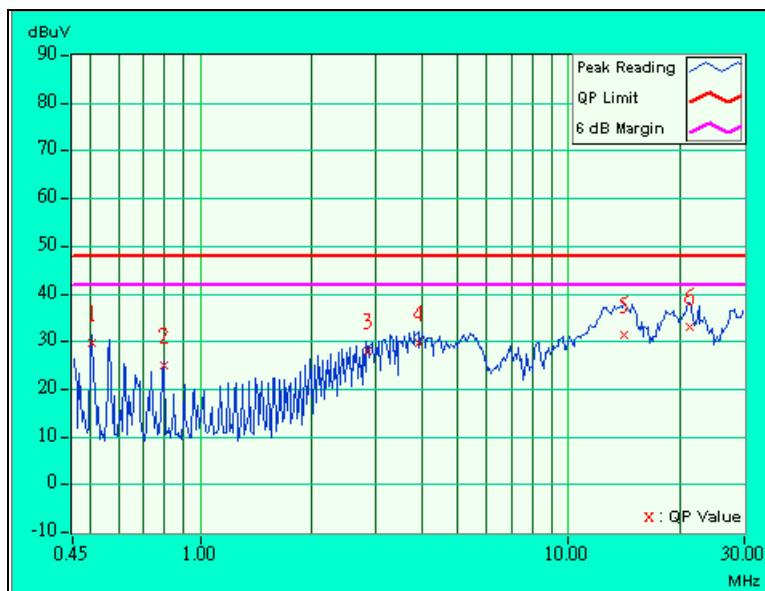


<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 50%RH, 1005 hPa		<b>TESTED BY:</b> James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.454	0.11	31.10	-	31.21	-	48.00	-	-16.79	-
2	0.962	0.19	24.05	-	24.24	-	48.00	-	-23.76	-
3	3.286	0.26	30.88	-	31.14	-	48.00	-	-16.86	-
4	3.790	0.29	28.05	-	28.34	-	48.00	-	-19.66	-
5	14.559	0.58	30.18	-	30.76	-	48.00	-	-17.24	-
6	22.571	0.95	35.68	-	36.63	-	48.00	-	-11.37	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

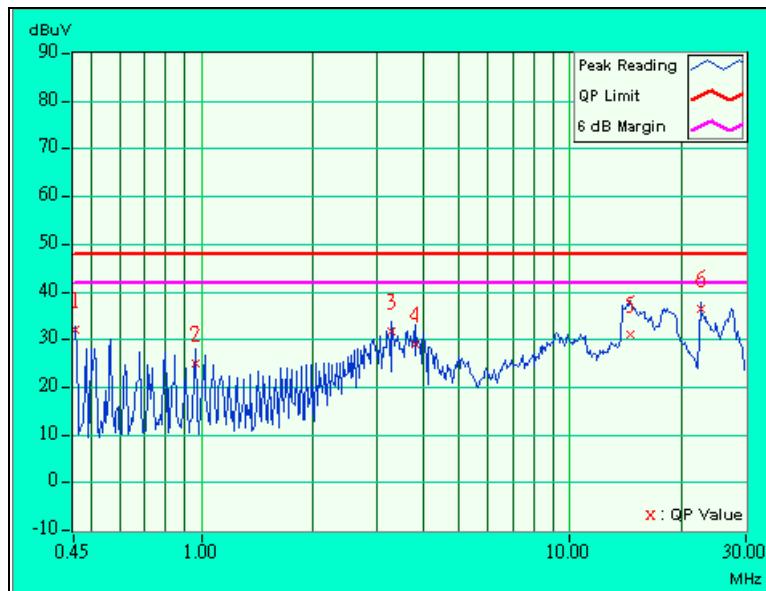


<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 50%RH, 1005 hPa		<b>TESTED BY:</b> James Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.454	0.11	31.75	-	31.86	-	48.00	-	-16.14	-
2	0.567	0.13	28.26	-	28.39	-	48.00	-	-19.61	-
3	2.723	0.24	25.98	-	26.22	-	48.00	-	-21.78	-
4	5.563	0.33	23.82	-	24.15	-	48.00	-	-23.85	-
5	14.532	0.49	29.64	-	30.13	-	48.00	-	-17.87	-
6	22.571	0.55	36.44	-	36.99	-	48.00	-	-11.01	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

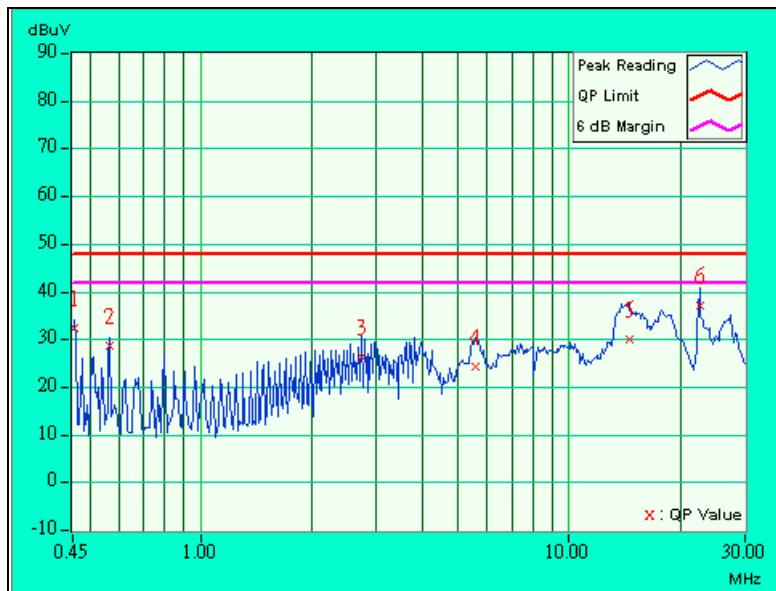


<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Netural (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 50%RH, 1005 hPa		<b>TESTED BY:</b> James Lee

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.454	0.11	30.76	-	30.87	-	48.00	-	-17.13	-
2	0.567	0.13	27.90	-	28.03	-	48.00	-	-19.97	-
3	3.458	0.27	31.88	-	32.15	-	48.00	-	-15.85	-
4	3.848	0.29	25.12	-	25.41	-	48.00	-	-22.59	-
5	14.571	0.58	30.04	-	30.62	-	48.00	-	-17.38	-
6	22.571	0.95	36.48	-	37.43	-	48.00	-	-10.57	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

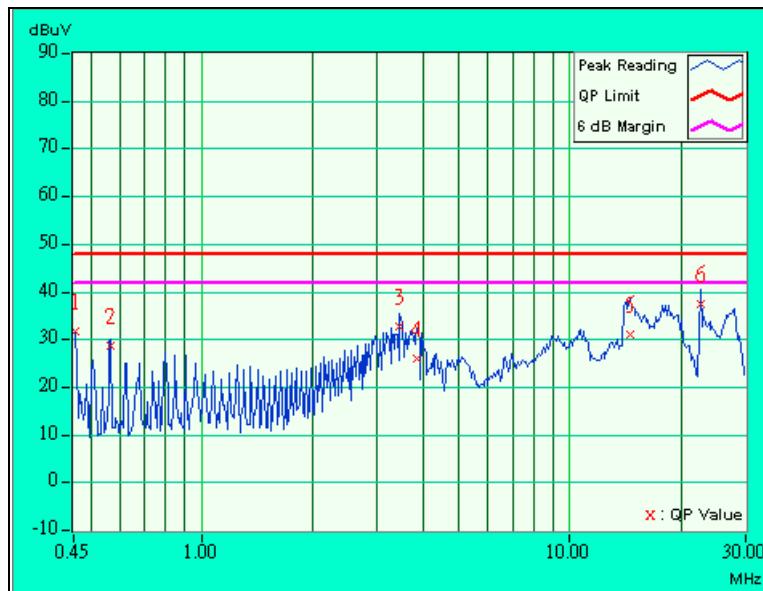

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

<b>Frequencies (MHz)</b>	<b>Field Strength of Fundamental</b>	
	<b>uV/m</b>	<b>dBuV/m</b>
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
* HP Preamplifier	8447D	2944A08485	May 7, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
VCCI Site Registration No.	Site 5	R-1039	NA

**NOTE:**

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
3. “\*” = These equipment are used for the final measurement.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz.


#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 TEST SETUP

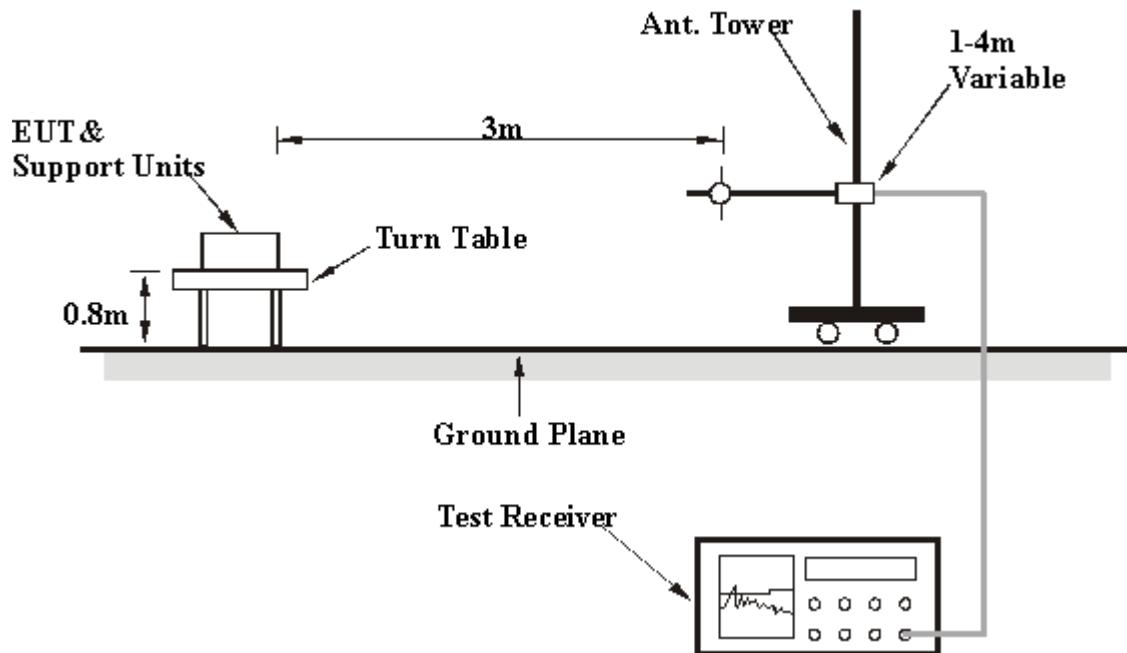

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

## 4.2.6 TEST RESULTS

<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70 % RH, 1050 hPa	<b>TESTED BY:</b> Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	176.00	29.4 QP	43.50	-14.10	1.09H	218	19.00	9.08	1.33	0.00	-10.41
2	220.00	31.6 QP	46.00	-14.40	1.13H	291	20.00	10.12	1.51	0.00	-11.63
3	308.00	31.3 QP	46.00	-14.70	1.06H	4	16.00	13.38	1.91	0.00	-15.30
4	484.00	34.4 QP	46.00	-11.60	1.37H	352	15.00	16.96	2.47	0.00	-19.43
5	528.00	34.2 QP	46.00	-11.80	1.69H	6	14.00	17.62	2.60	0.00	-20.22
6	616.00	34.7 QP	46.00	-11.30	1.13H	143	13.00	18.82	2.89	0.00	-21.71
7	748.50	34.4 QP	46.00	-11.60	1.04H	46	11.00	20.14	3.26	0.00	-23.40
8	792.00	34.3 QP	46.00	-11.70	1.08H	91	10.40	20.60	3.31	0.00	-23.91

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70 % RH, 1050 hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	220.00	31.6 QP	46.00	-14.40	1.27V	212	20.00	10.12	1.51	0.00	-11.63
2	308.00	32.3 QP	46.00	-13.70	1.23V	355	17.00	13.38	1.91	0.00	-15.29
3	440.00	33.7 QP	46.00	-12.30	1.23V	38	15.00	16.32	2.38	0.00	-18.70
4	528.00	32.2 QP	46.00	-13.80	1.20V	357	12.00	17.62	2.60	0.00	-20.22
5	660.00	34.3 QP	46.00	-11.70	1.33V	267	12.00	19.25	3.05	0.00	-22.29
6	748.50	36.4 QP	46.00	-9.60	1.26V	306	13.00	20.14	3.26	0.00	-23.41
7	792.00	33.9 QP	46.00	-12.10	1.39V	176	10.00	20.60	3.31	0.00	-23.91

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70 % RH, 1050 hPa		<b>TESTED BY:</b> Gary Chang

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.0	49.2 PK	74.00	-24.80	1.32H	349	54.00	25.20	4.86	34.90	4.84
2	*2413.0	98.2 PK	-	-	1.52H	23	66.00	27.11	5.10	0.00	-32.22
3	*2413.0	90.2 AV	-	-	1.52H	23	58.00	27.11	5.10	0.00	-32.22
4	4076.0	49.9 PK	74.00	-24.10	1.57H	8	47.50	30.13	6.78	34.52	-2.39
5	4824.0	51.0 PK	74.00	-23.00	1.49H	345	47.00	31.43	7.23	34.63	-4.02
6	6113.3	49.7 PK	74.00	-24.30	1.38H	234	43.30	32.80	8.23	34.60	-6.43

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.0	48.2 PK	74.00	-25.80	1.04V	6	53.00	25.20	4.86	34.90	4.84
2	*2413.0	94.8 PK	-	-	1.84V	357	62.54	27.11	5.10	0.00	-32.21
3	*2413.0	88.2 AV	-	-	1.84V	357	56.00	27.11	5.10	0.00	-32.21
4	4076.0	51.1 PK	74.00	-22.90	1.53V	351	48.70	30.13	6.78	34.52	-2.39
5	4824.0	52.0 PK	74.00	-22.00	1.01V	6	48.00	31.43	7.23	34.63	-4.02
6	6113.2	49.5 PK	74.00	-24.50	1.47V	5	43.10	32.80	8.23	34.60	-6.43
7	8151.0	53.5 PK	74.00	-20.50	1.47V	351	42.00	36.66	9.67	34.87	-11.45
8	8151.0	47.5 AV	54.00	-6.50	1.47V	351	36.00	36.66	9.67	34.87	-11.45

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. “\*”: Fundamental frequency
5. The other emission levels were very low against the limit.

<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70 % RH, 1050 hPa	<b>TESTED BY:</b> Gary Chang	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.0	52.9 PK	74.00	-21.10	1.08H	100	57.42	25.41	4.96	34.90	4.53
2	2063.0	51.0 AV	54.00	-3.00	1.08H	100	55.52	25.41	4.96	34.90	4.53
3	*2437.0	100.7 PK	-	-	1.22H	304	68.30	27.33	5.08	0.00	-32.40
4	*2437.0	93.4 AV	-	-	1.22H	304	61.00	27.33	5.08	0.00	-32.40
5	4126.0	49.7 PK	74.00	-24.30	1.85H	336	47.20	30.32	6.70	34.56	-2.46
6	4874.0	52.1 PK	74.00	-21.90	1.20H	49	48.00	31.47	7.21	34.63	-4.06
7	6188.2	49.5 PK	74.00	-24.50	1.85H	4	43.00	33.14	8.01	34.60	-6.55

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.0	49.5 PK	74.00	-24.50	1.02V	354	54.00	25.41	4.96	34.90	4.53
2	2437.0	96.7 PK	-	-	1.07V	10	64.30	27.33	5.08	0.00	-32.41
3	2437.0	90.4 AV	-	-	1.07V	10	58.00	27.33	5.08	0.00	-32.41
4	4126.0	50.5 PK	74.00	-23.50	1.44V	16	48.00	30.32	6.70	34.56	-2.46
5	4874.0	51.1 PK	74.00	-22.90	1.00V	349	47.00	31.47	7.21	34.63	-4.05

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. “\*”: Fundamental frequency
5. The other emission levels were very low against the limit.

<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70 % RH, 1050 hPa	<b>TESTED BY:</b> Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.0	53.7 PK	74.00	-20.30	1.02H	101	58.00	25.62	5.02	34.90	4.26
2	2088.0	51.9 AV	54.00	-2.10	1.02H	101	56.17	25.62	5.02	34.90	4.26
3	*2463.0	100.8 PK	-	-	1.18H	50	68.43	27.33	5.08	0.00	-32.40
4	*2463.0	93.4 AV	-	-	1.18H	50	61.00	27.33	5.08	0.00	-32.40
5	2486.0	48.7 PK	74.00	-25.30	1.02H	322	51.00	27.54	5.06	34.90	2.31
6	4176.0	50.5 PK	74.00	-23.50	1.00H	12	48.00	30.41	6.68	34.58	-2.51
7	4924.0	54.1 PK	74.00	-19.90	1.69H	352	50.00	31.51	7.21	34.62	-4.11
8	4924.0	44.1 AV	54.00	-9.90	1.69H	352	40.00	31.51	7.21	34.62	-4.10
9	6263.4	51.2 PK	74.00	-22.80	1.14H	356	44.20	33.48	8.13	34.60	-7.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.0	49.7 PK	74.00	-24.30	1.38V	354	54.00	25.62	5.02	34.90	4.26
2	*2463.0	100.4 PK	-	-	1.38V	182	68.00	27.33	5.08	0.00	-32.41
3	*2463.0	92.4 AV	-	-	1.38V	182	60.00	27.33	5.08	0.00	-32.41
4	2486.0	49.8 PK	74.00	-24.20	1.37V	6	52.10	27.54	5.06	34.90	2.31
5	4176.0	50.0 PK	74.00	-24.00	1.17V	34	47.50	30.41	6.68	34.58	-2.51
6	4924.0	51.3 PK	74.00	-22.70	1.22V	327	47.20	31.51	7.21	34.62	-4.10
7	6263.3	52.0 PK	74.00	-22.00	2.02V	66	45.00	33.48	8.13	34.60	-7.01
8	8350.9	55.1 PK	74.00	-18.90	1.69V	345	43.00	36.74	10.20	34.83	-12.11
9	8350.9	48.3 AV	54.00	-5.70	1.69V	345	36.20	36.74	10.20	34.83	-12.11

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. “\*”: Fundamental frequency
5. The other emission levels were very low against the limit.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.6 TEST RESULTS


<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	19 deg. C, 65%RH, 1005 hPa
<b>TESTED BY:</b> Bruce Shiau			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.14	0.5	PASS
6	2437	11.14	0.5	PASS
11	2462	11.14	0.5	PASS


CH1

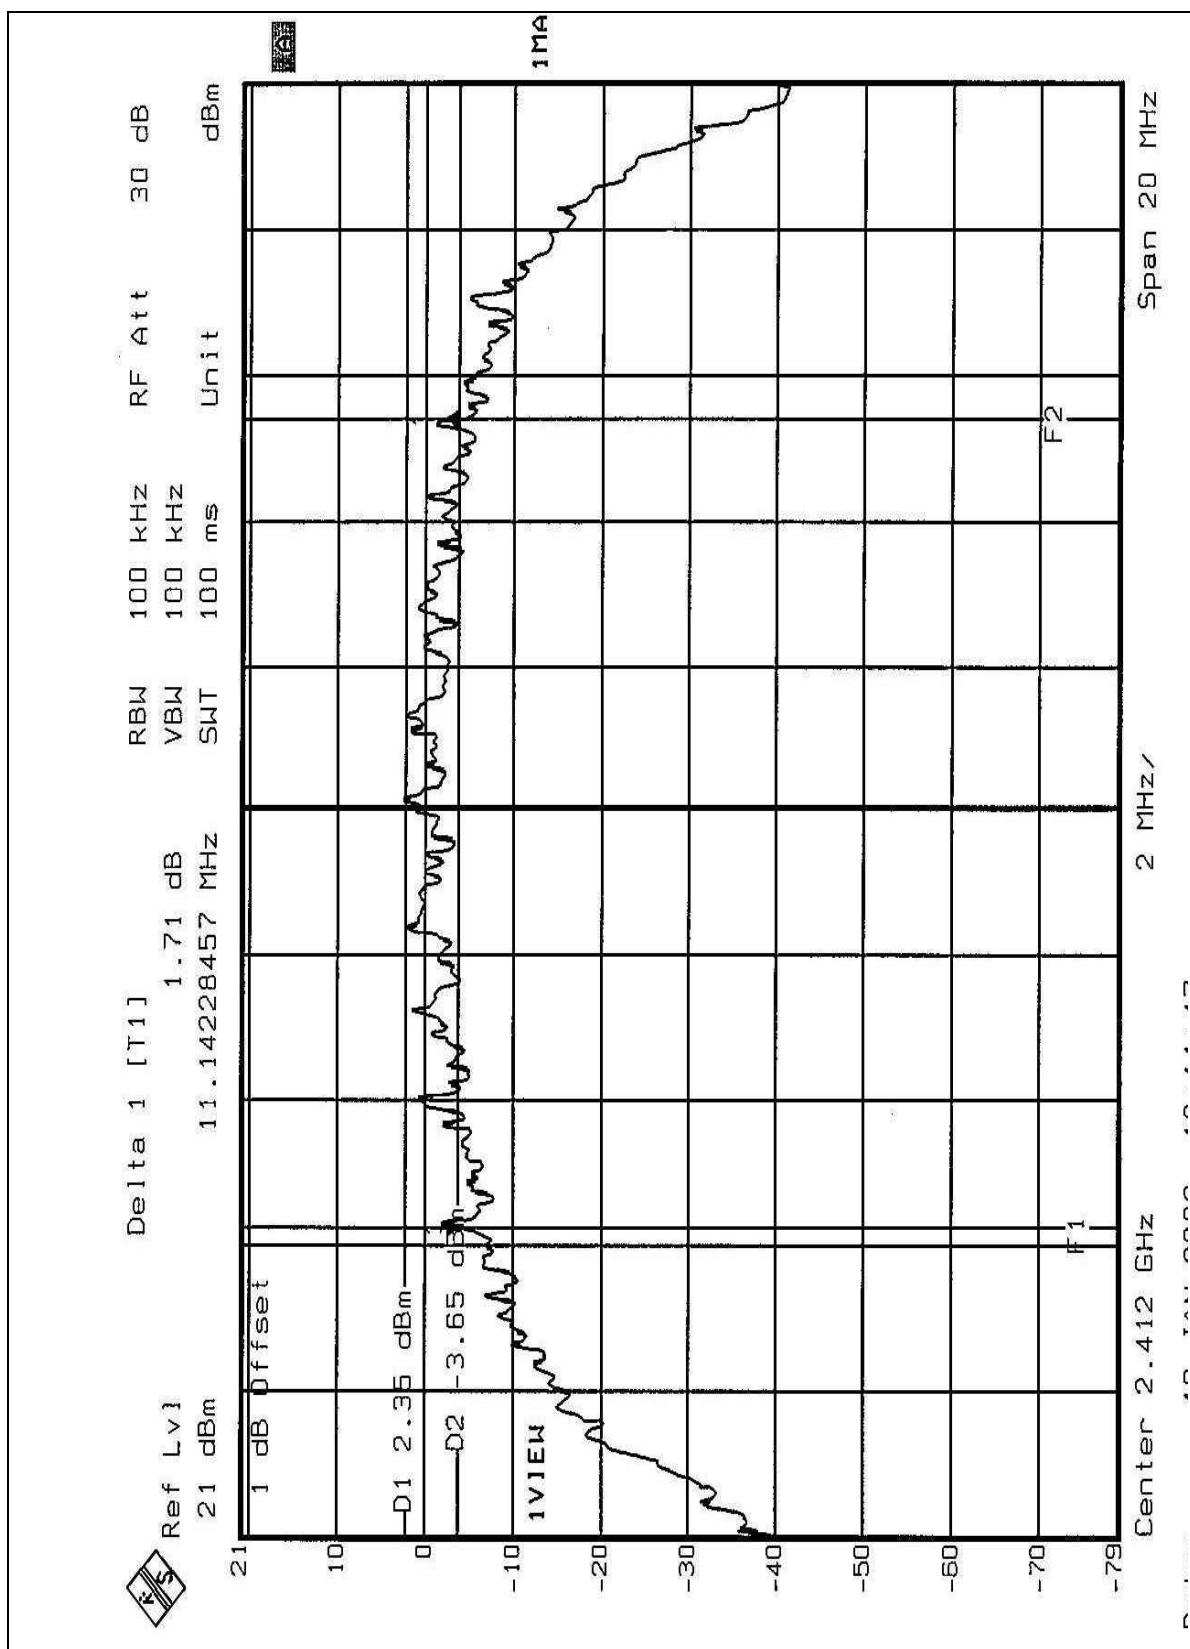

CH6

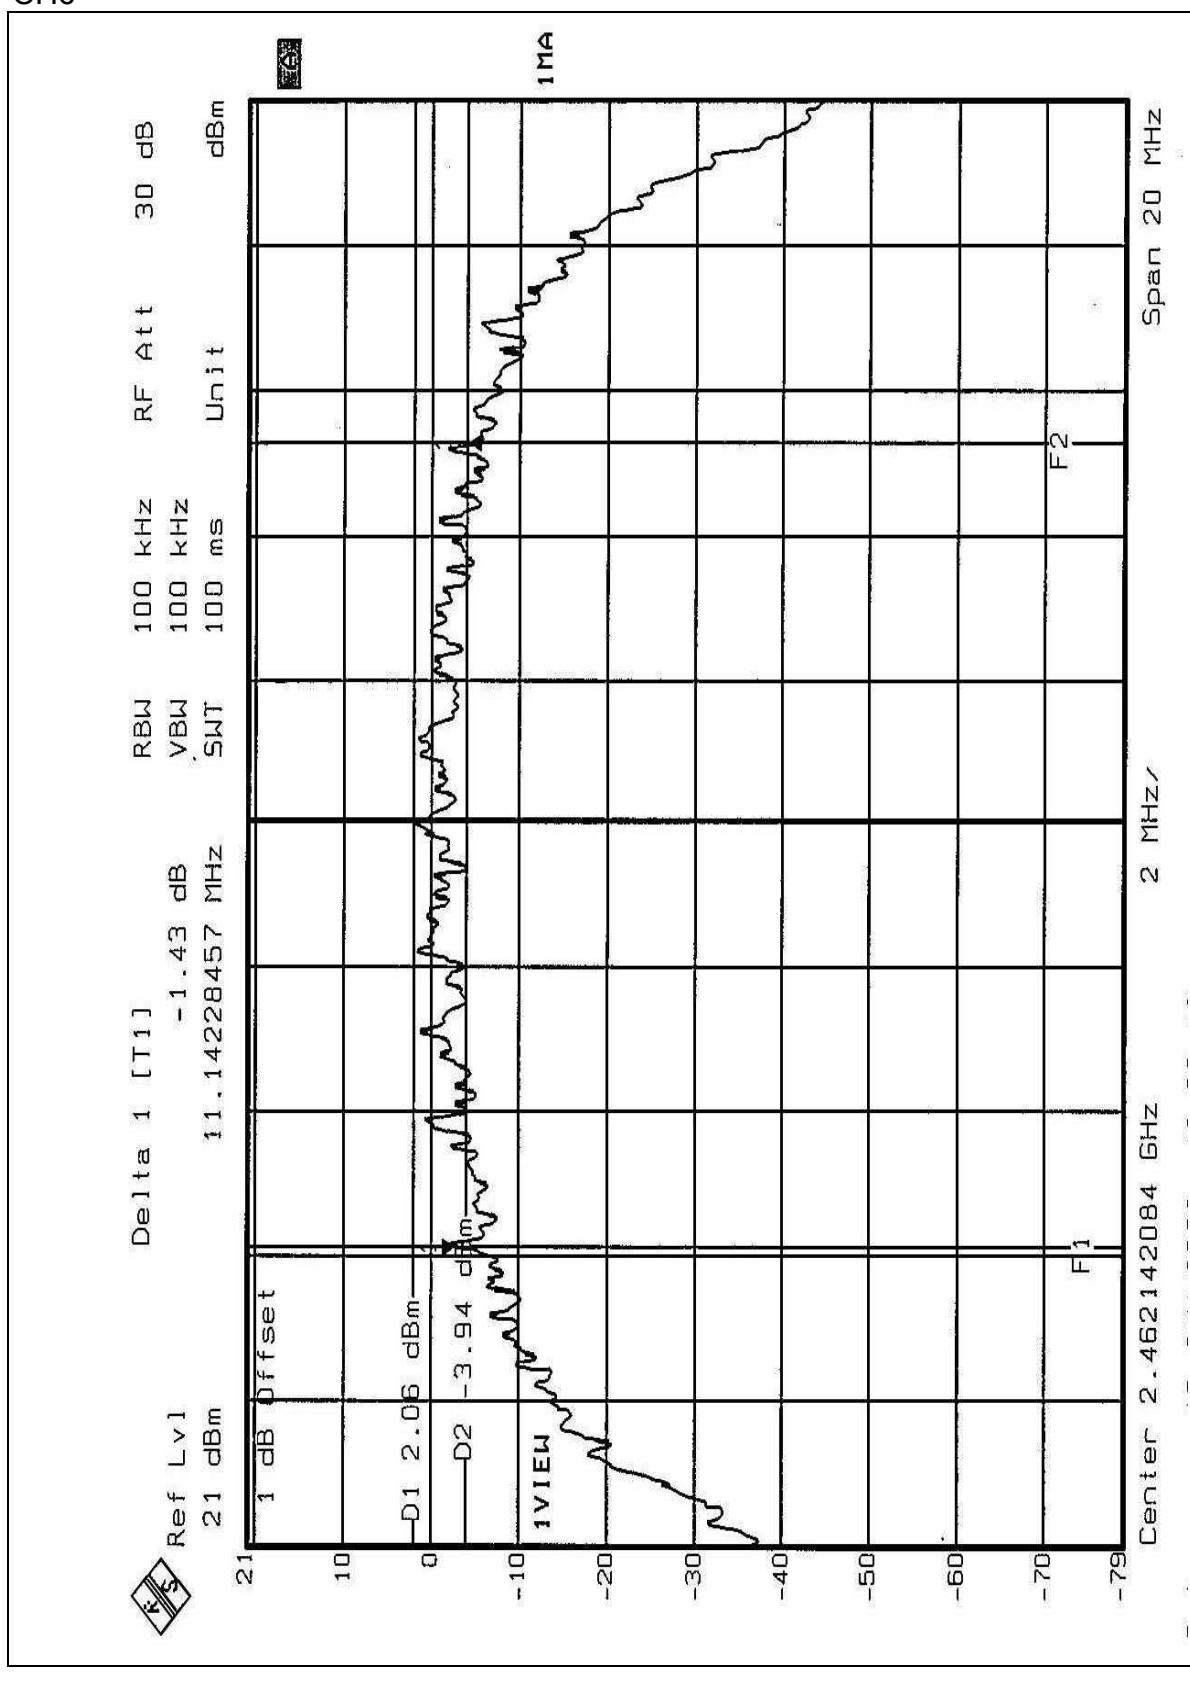

CH11

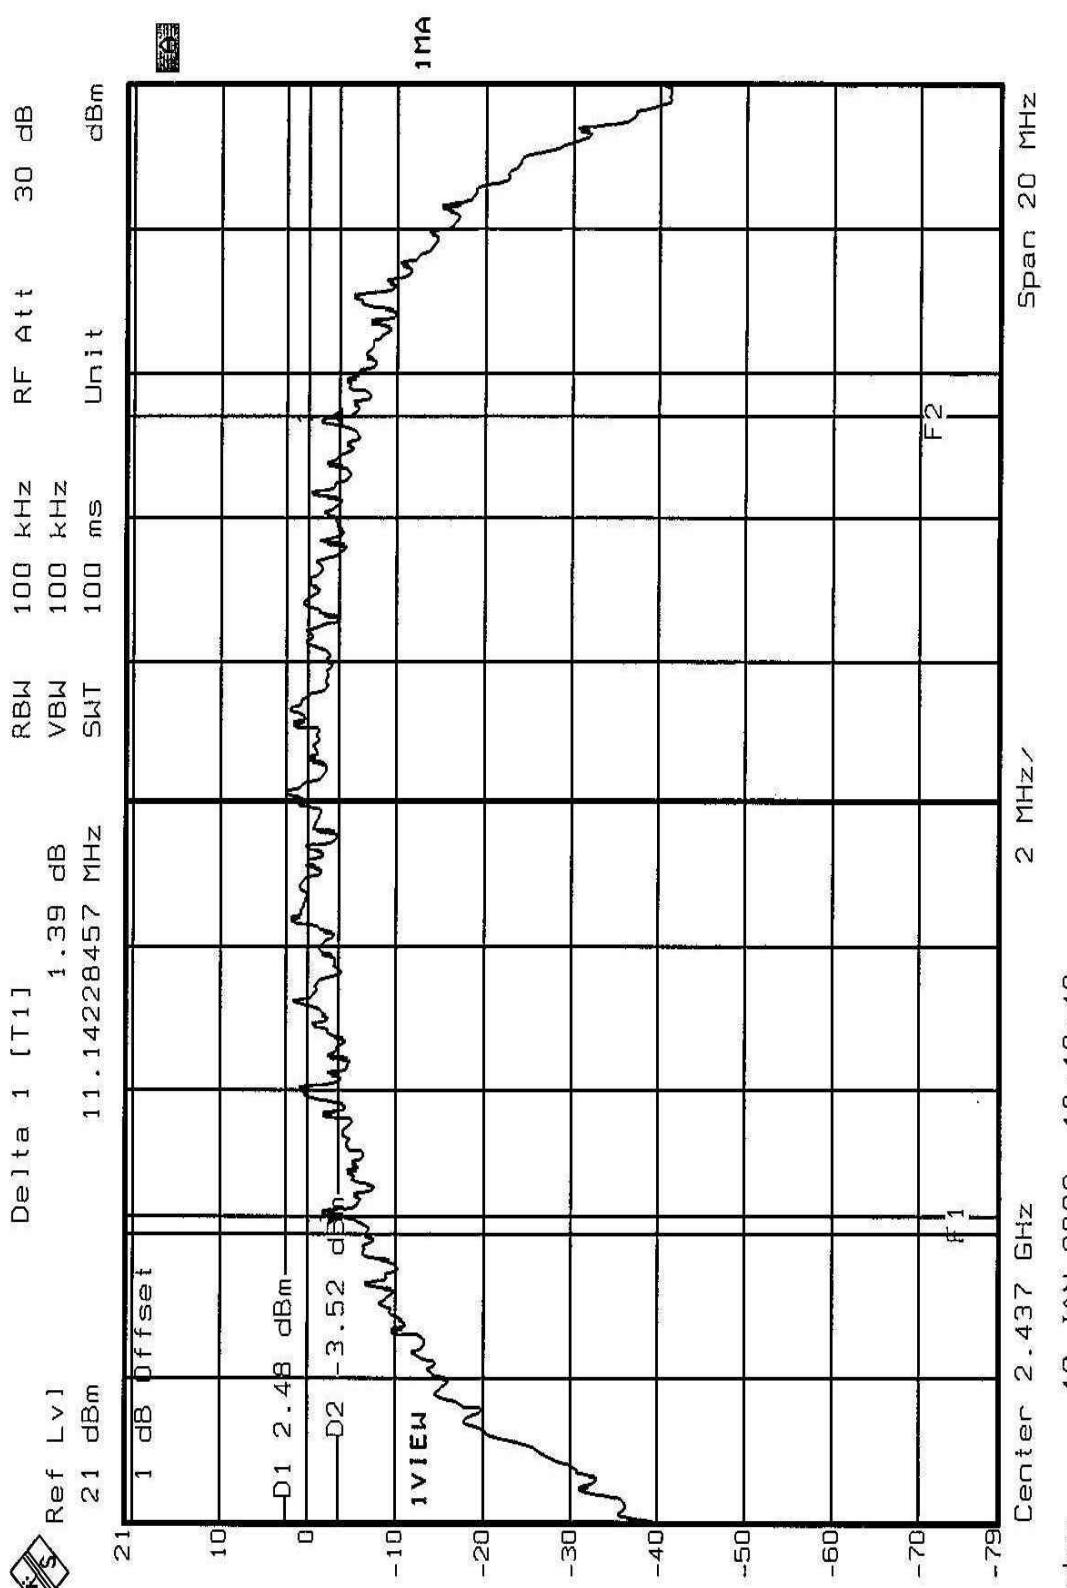

## 4.4 MAXIMUM PEAK OUTPUT POWER

### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SINGLE CHANNEL POWER METER	NRVS	100026	Feb. 21, 2002
PEAK POWER SENSOR	NRV-Z32	100013	May 23,2002


**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

#### 4.4.4 TEST SETUP

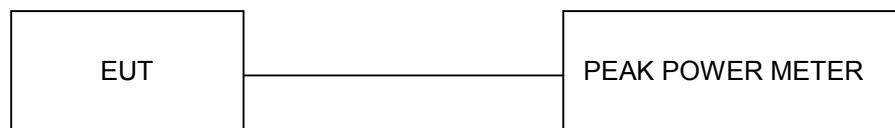

#### 4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

## 4.4.6 TEST RESULTS

<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	19 deg. C, 65%RH, 1005 hPa
<b>TESTED BY:</b> Bruce Shiau			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	13.02	30	PASS
6	2437	13.17	30	PASS
11	2462	13.78	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 TEST SETUP

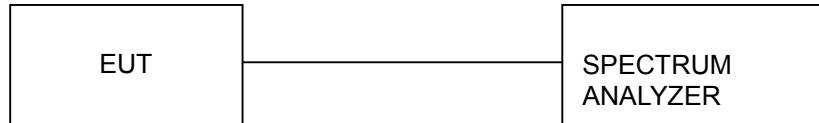

#### 4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

## 4.5.6 TEST RESULTS


<b>EUT</b>	2.4GHz PCMCIA Card	<b>MODEL</b>	CP-108
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	19 deg. C, 65%RH, 1005 hPa
<b>TESTED BY:</b> Bruce Shiau			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.76	8	PASS
6	2437	-10.56	8	PASS
11	2462	-11.04	8	PASS


CH1

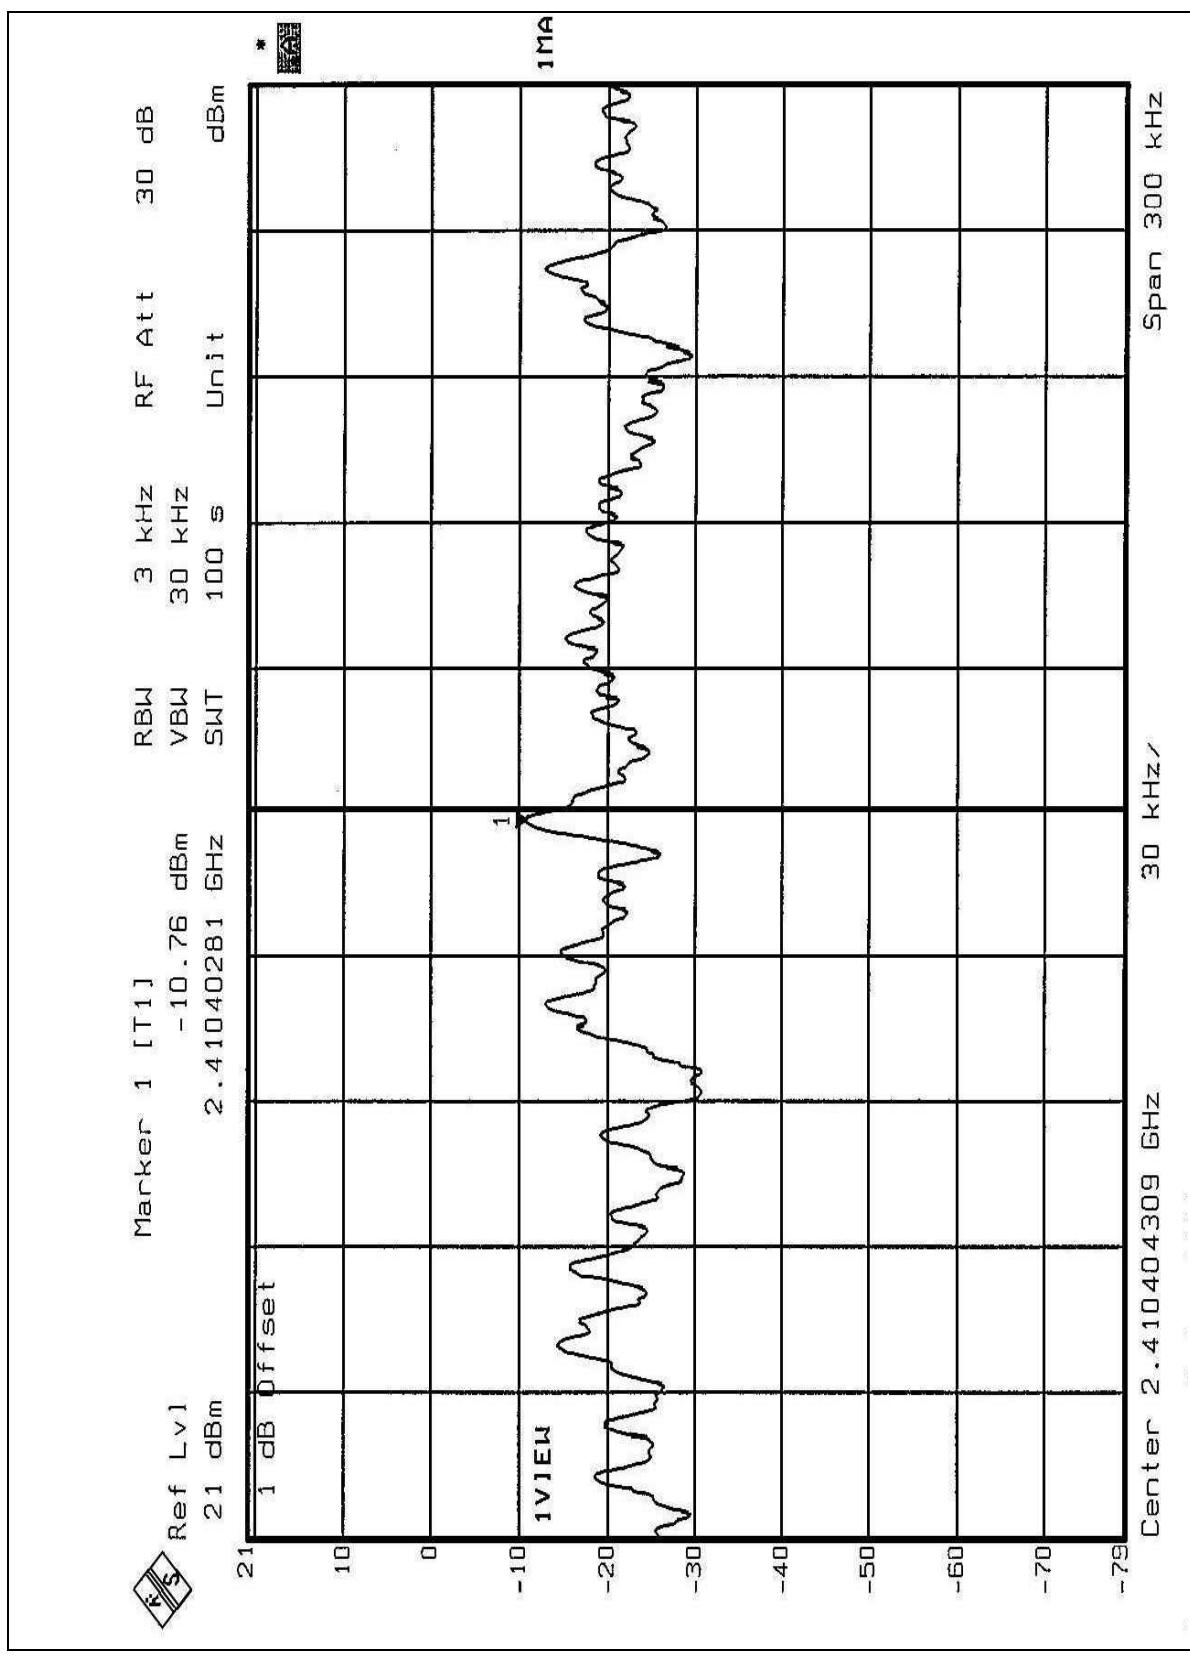

CH6

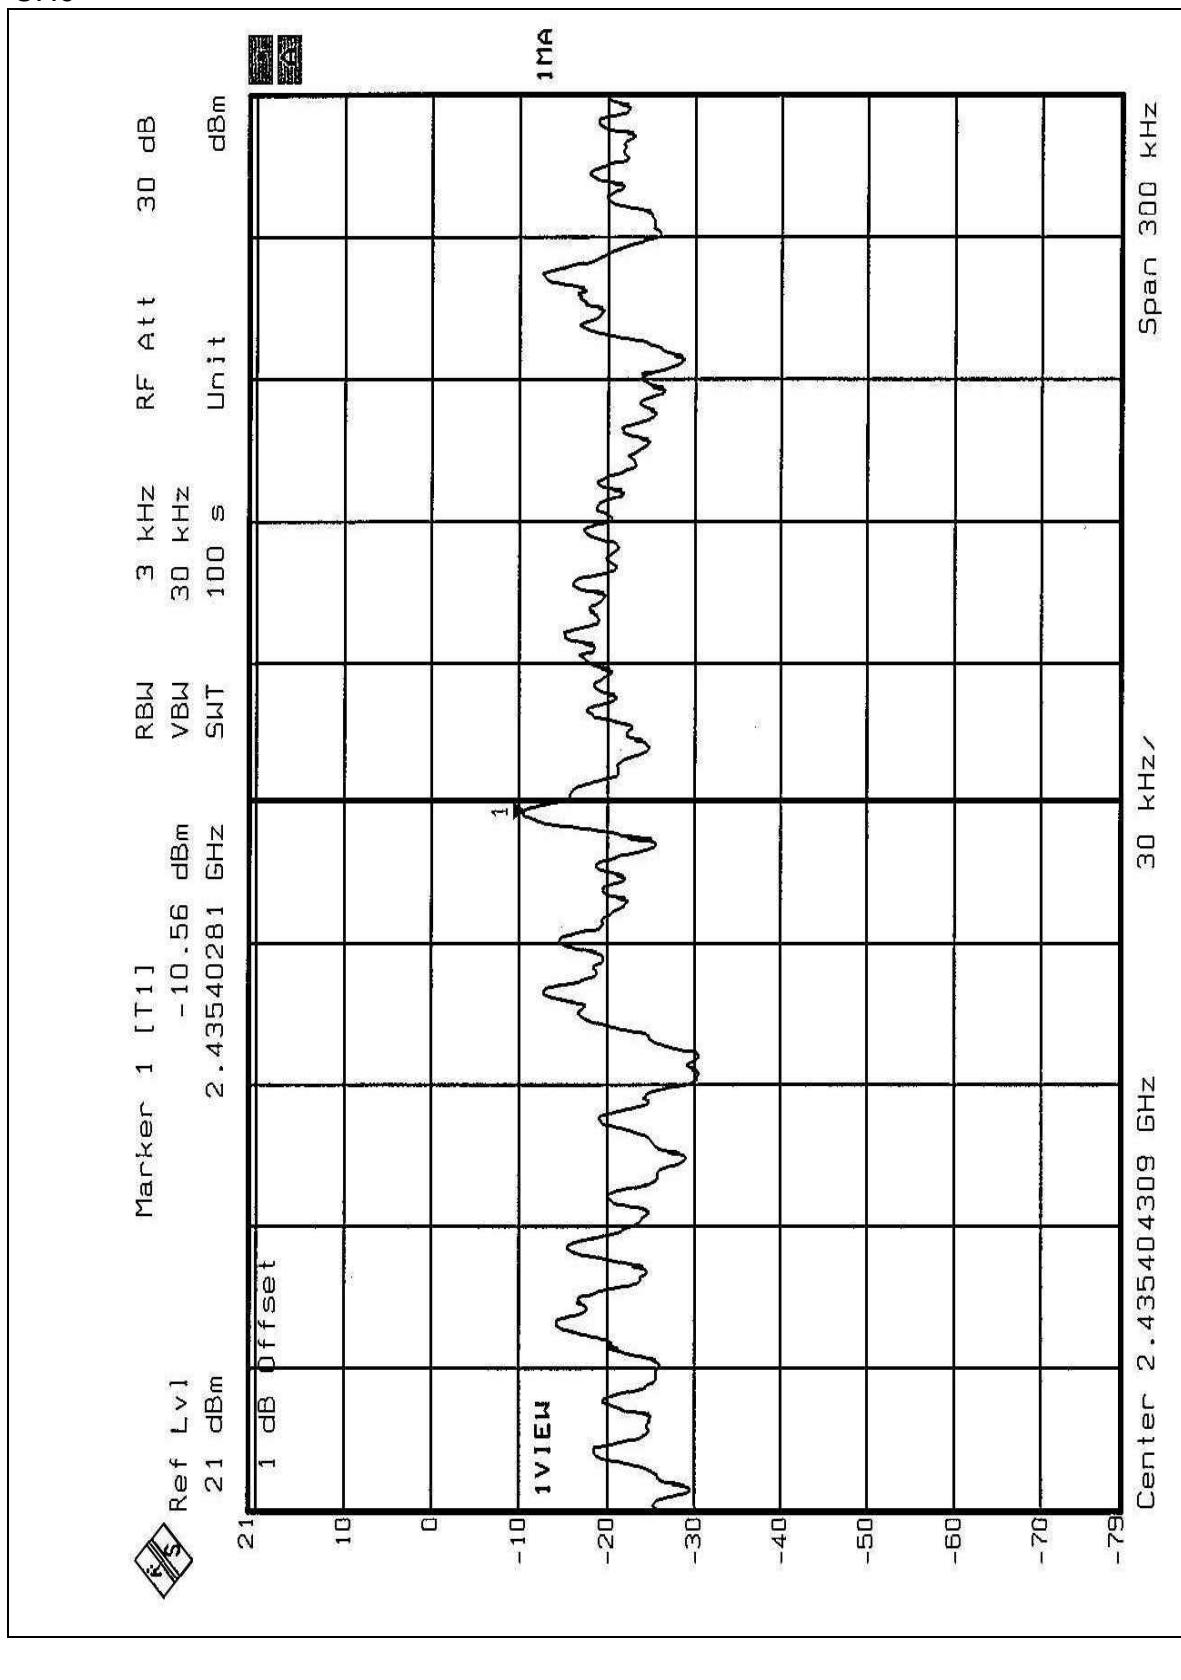

CH11

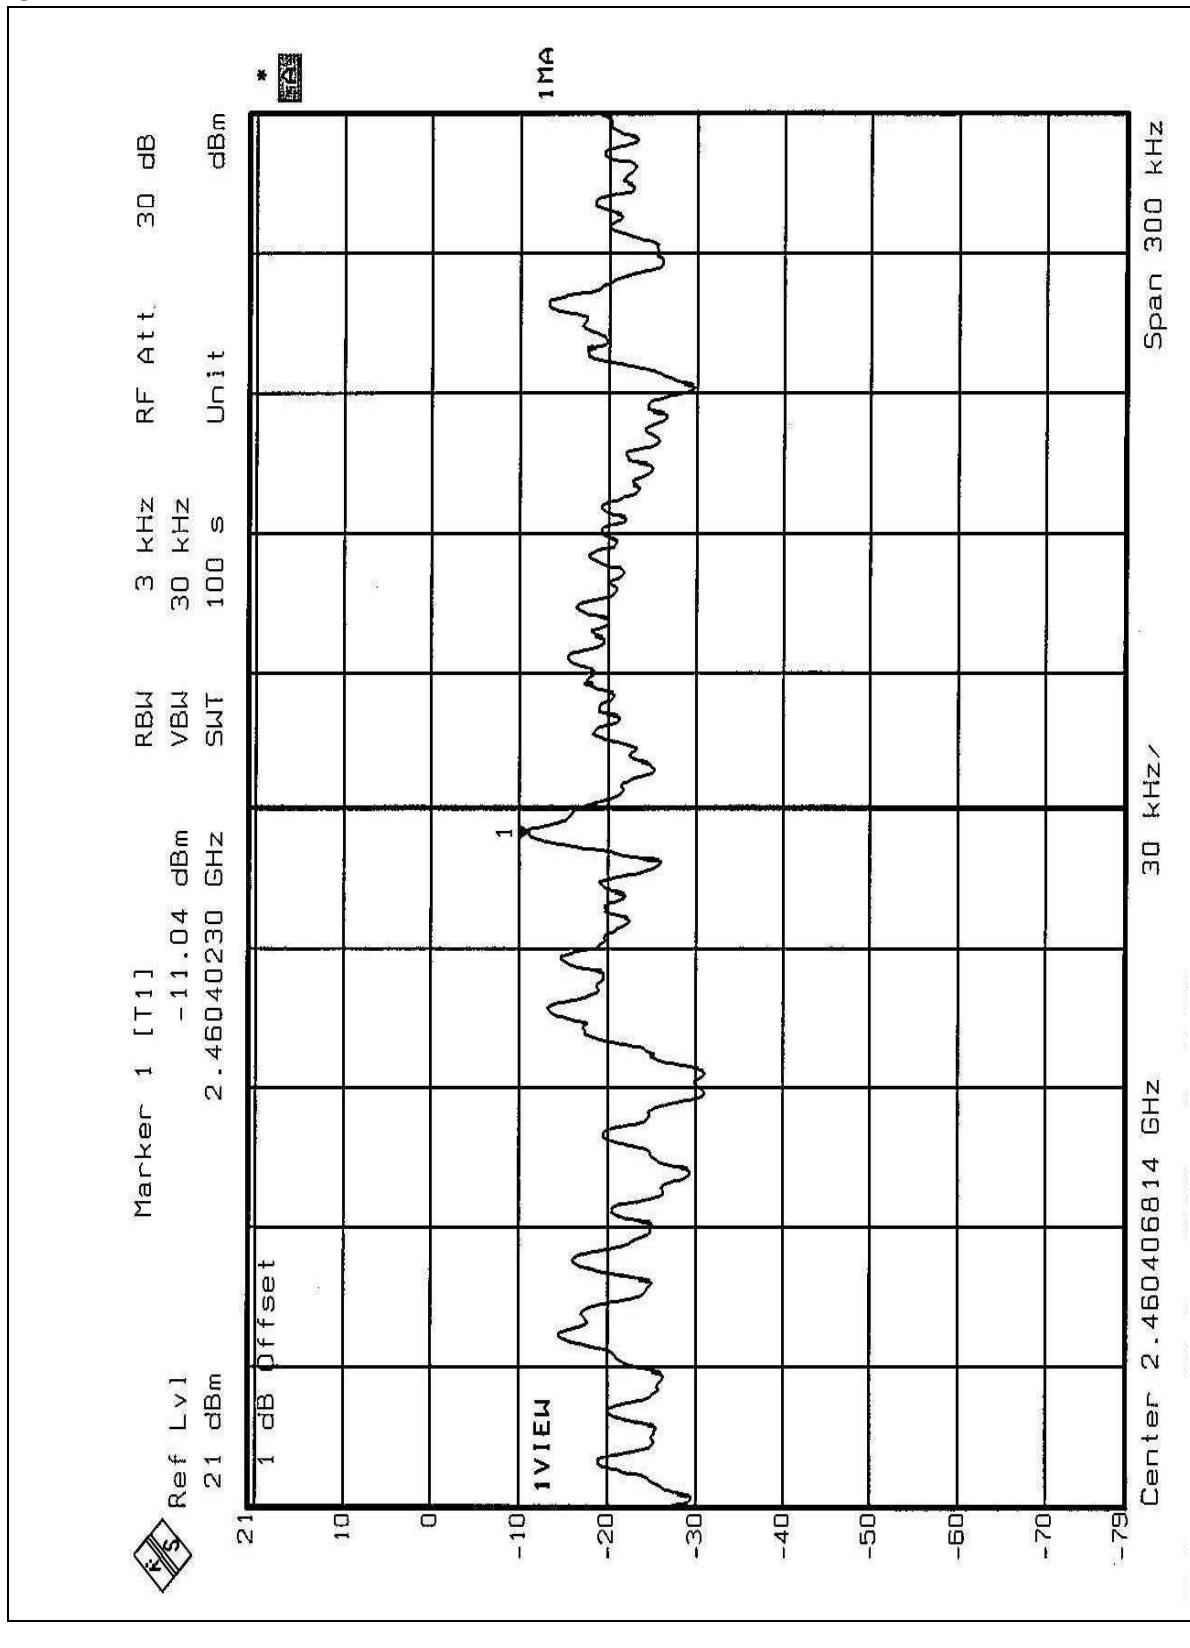

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.


#### 4.6.4 EUT OPERATING CONDITION


Same as Item 4.3.5

#### 4.6.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

**NOTE:** The band edge emission plot on the following 2 pages shows 55.28dB delta between carrier maximum power and local maximum emission in restrict band (2.4852GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.6 (Page 26) is 93.4dB<sub>u</sub>V/m, so the maximum field strength in restrict band is  $93.4 - 55.28 = 38.12$  dB<sub>u</sub>V/m which is under 54 dB<sub>u</sub>V/m limit.

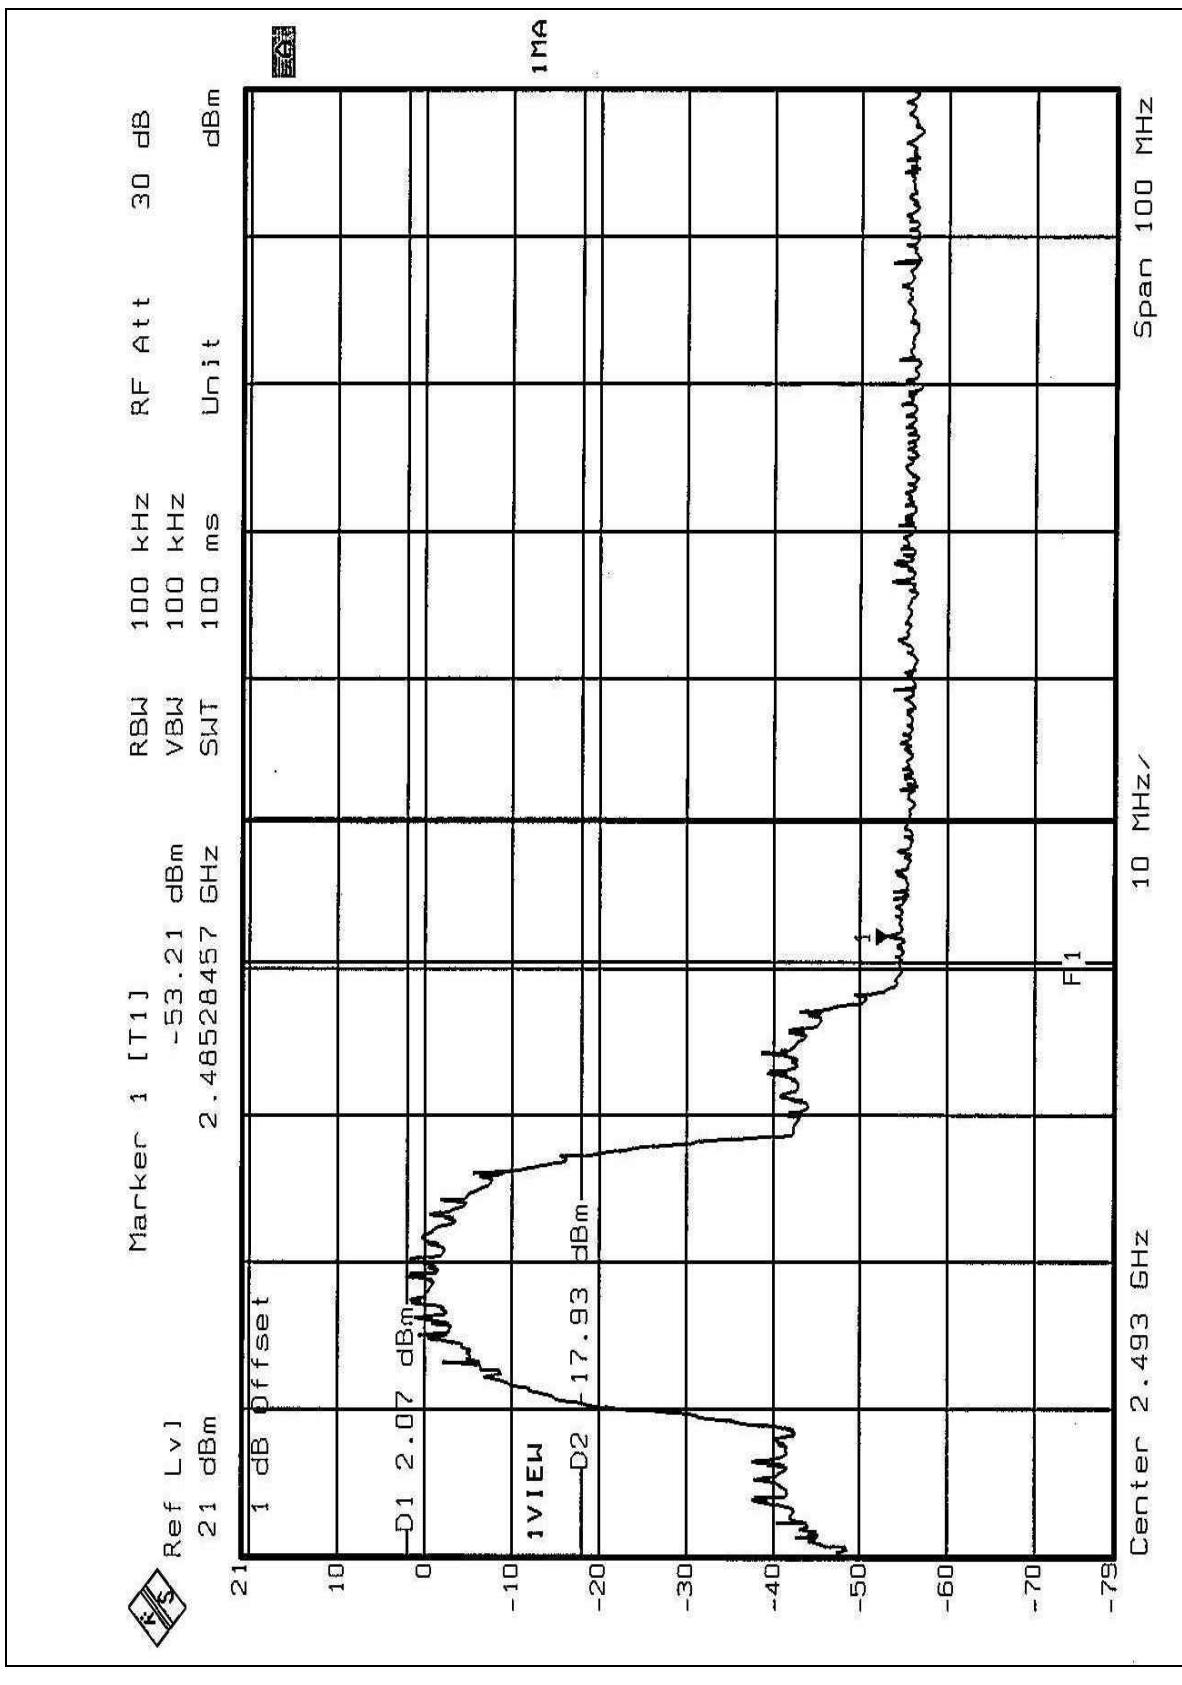

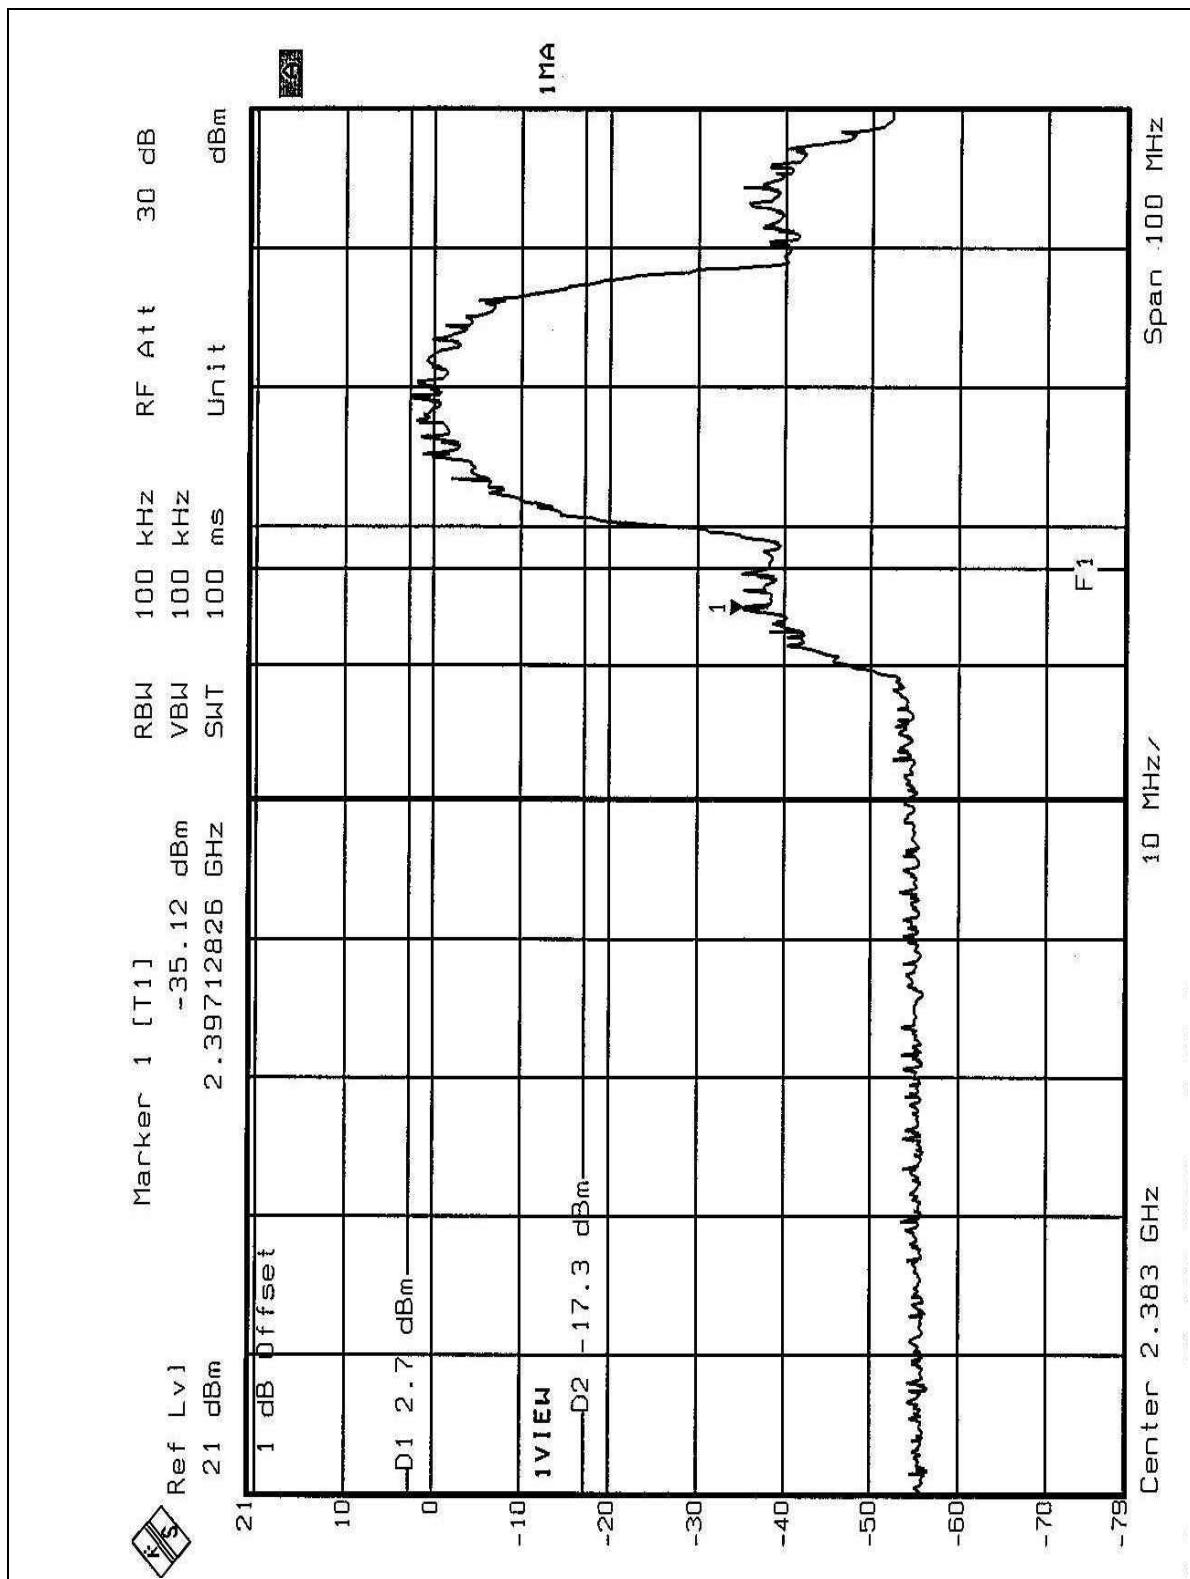

## 4.7 ANTENNA REQUIREMENT

### 4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.7.2 ANTENNA CONNECTED CONSTRUCTION



The antenna used in this product is patch Antenna. There is no antenna connector. And the maximum Gain of this antenna is only -1dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

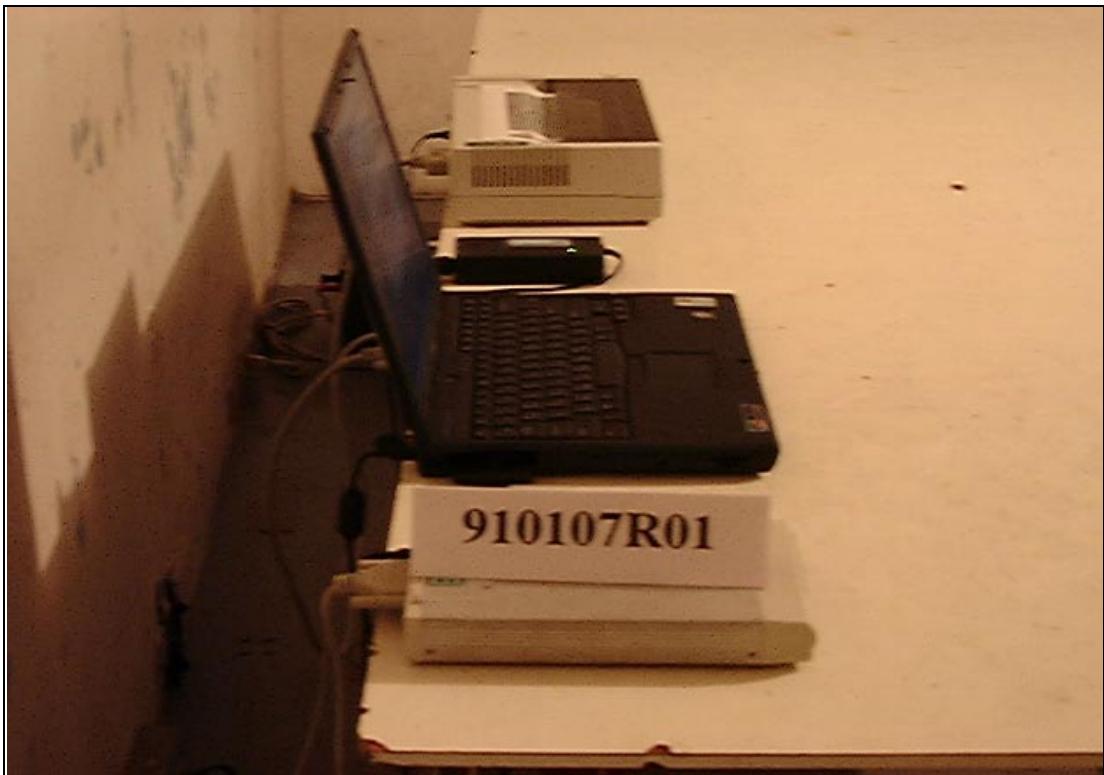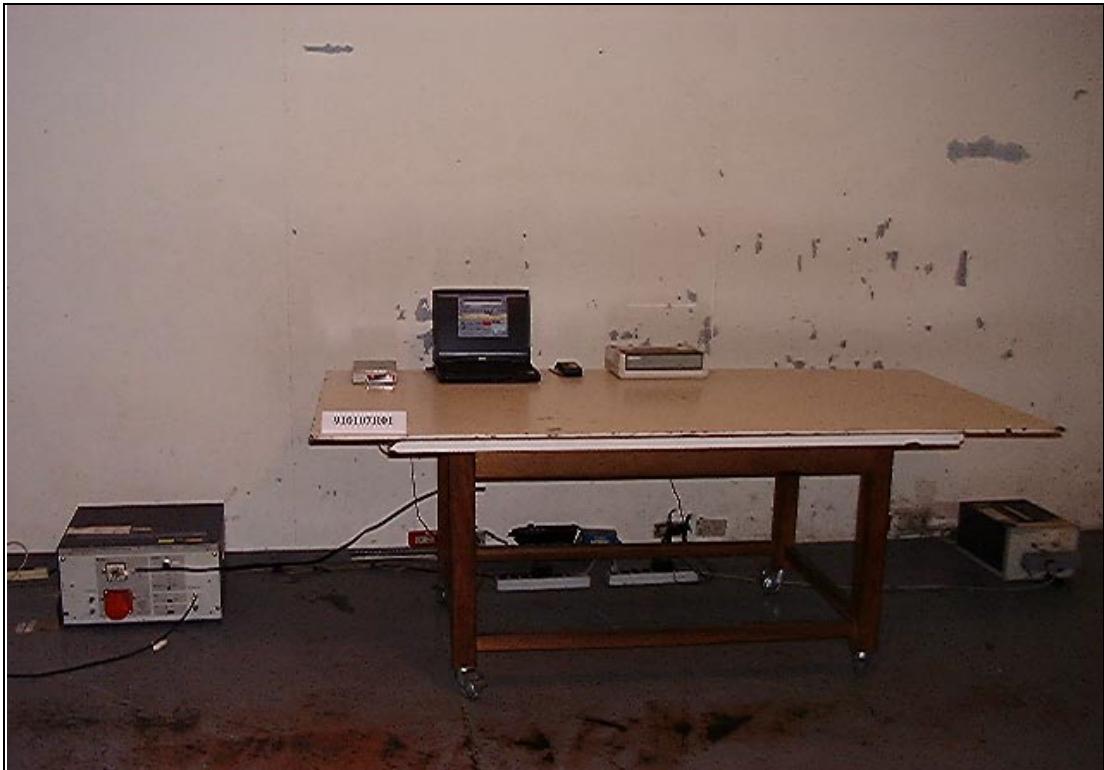

RADIATED EMISSION TEST

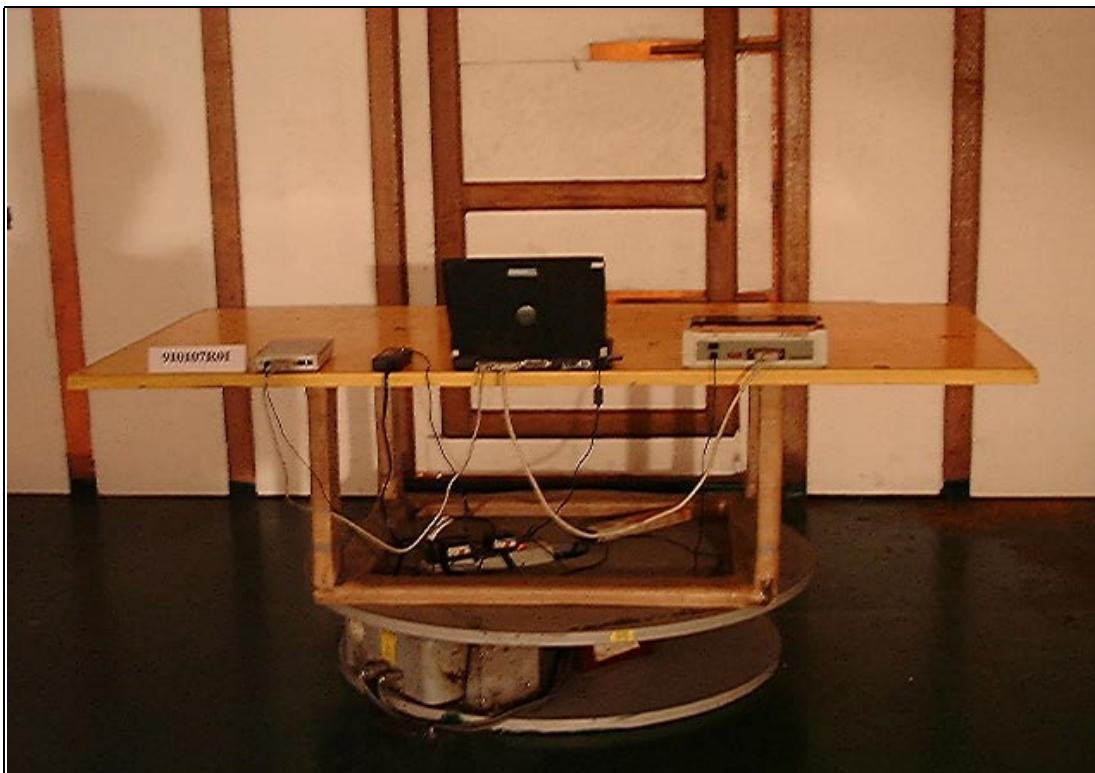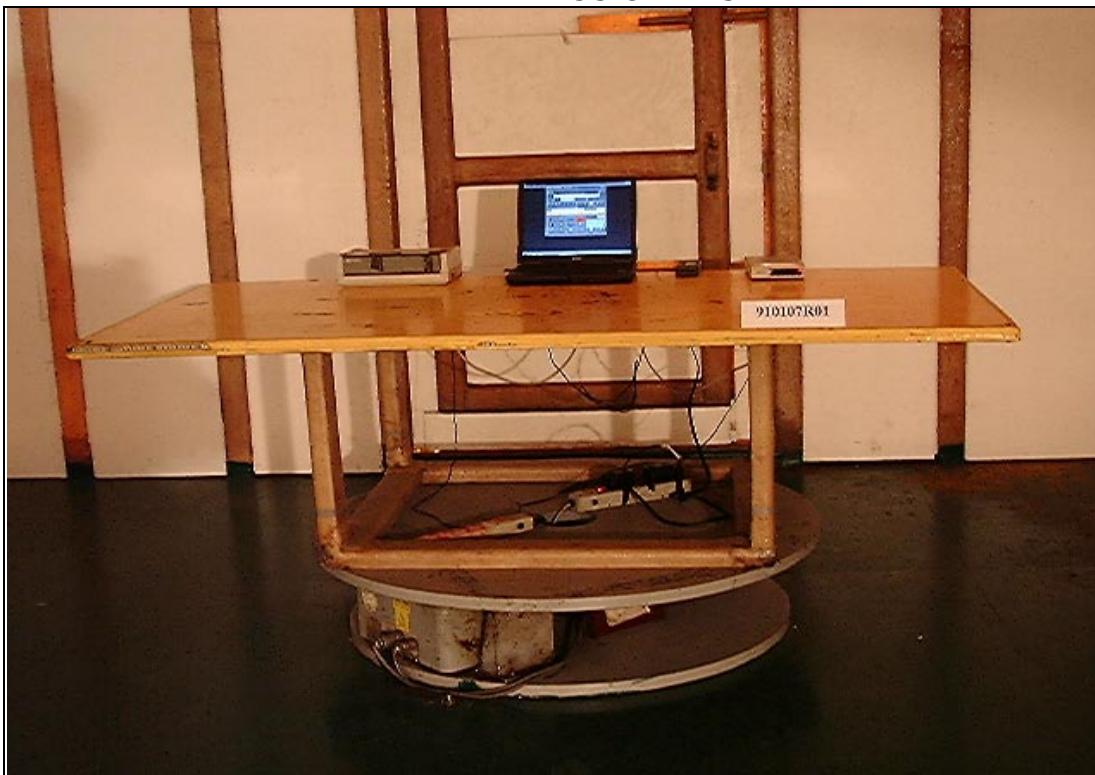



## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343  
Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195  
Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910  
Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.