

FCC PART 15.249

TEST REPORT

For

Shenzhen Rapoo Technology Co., Ltd.

22, Jinxiu Road East, Pingshan District, Shenzhen, China

FCC ID: PP203055

| | |
|---|---|
| Report Type: Original Report | Product Type: 5G Nano Receiver |
| Test Engineer: Ares liu | <i>Ares Liu</i> |
| Report Number: R2DG140106014-00 | |
| Report Date: 2014-01-21 | |
| Reviewed By: RF Leader | <i>Ivan Cao</i> |
| Test Laboratory: | Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

| | |
|---|-----------|
| GENERAL INFORMATION..... | 3 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 3 |
| OBJECTIVE..... | 3 |
| TEST METHODOLOGY..... | 3 |
| TEST FACILITY..... | 3 |
| SYSTEM TEST CONFIGURATION..... | 4 |
| JUSTIFICATION..... | 4 |
| EUT EXERCISE SOFTWARE..... | 4 |
| EQUIPMENT MODIFICATIONS..... | 4 |
| SUPPORT EQUIPMENT LIST AND DETAILS..... | 4 |
| EXTERNAL I/O CABLE..... | 4 |
| BLOCK DIAGRAM OF TEST SETUP..... | 5 |
| SUMMARY OF TEST RESULTS..... | 6 |
| FCC§15.203 - ANTENNA REQUIREMENT..... | 7 |
| APPLICABLE STANDARD..... | 7 |
| ANTENNA CONNECTOR CONSTRUCTION..... | 7 |
| FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS..... | 8 |
| APPLICABLE STANDARD..... | 8 |
| MEASUREMENT UNCERTAINTY..... | 8 |
| EUT SETUP..... | 8 |
| EMI TEST RECEIVER SETUP..... | 9 |
| TEST PROCEDURE..... | 9 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION..... | 9 |
| TEST EQUIPMENT LIST AND DETAILS..... | 10 |
| TEST RESULTS SUMMARY..... | 10 |
| TEST DATA..... | 10 |
| FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS..... | 13 |
| APPLICABLE STANDARD..... | 13 |
| MEASUREMENT UNCERTAINTY..... | 13 |
| EUT SETUP..... | 14 |
| TEST EQUIPMENT SETUP..... | 15 |
| TEST PROCEDURE..... | 15 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION..... | 15 |
| TEST EQUIPMENT LIST AND DETAILS..... | 16 |
| TEST RESULTS SUMMARY..... | 16 |
| TEST DATA..... | 16 |
| FCC §15.215(C)– 20 DB BANDWIDTH TESTING..... | 18 |
| APPLICABLE STANDARD..... | 18 |
| TEST PROCEDURE..... | 18 |
| TEST EQUIPMENT LIST AND DETAILS..... | 18 |
| TEST DATA..... | 18 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Rapoo Technology Co., Ltd.* 's product, model number: *03055 (FCC ID: PP203055)* (the "EUT") in this report was a *5G Nano Receiver*, which was measured approximately: 1.7 cm (L) x 1.2 cm (W) x 0.5 cm (H), rated input voltage: DC 5.0V from computer.

** All measurement and test data in this report was gathered from production sample serial number: 140106014 (Assigned by BACL, Dongguan). The EUT was received on 2014-01-17.*

Objective

This type approval report was prepared on behalf of *Shenzhen Rapoo Technology Co., Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The engineering mode was configured as maximum power and switched the channels by software “SOC V1.2.0.exe”.

16 channels were provided by the manufacturer:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 1 | 5727 | 5 | 5750 | 9 | 5771 | 13 | 5786 |
| 2 | 5730 | 6 | 5753 | 10 | 5776 | 14 | 5790 |
| 3 | 5734 | 7 | 5756 | 11 | 5779 | 15 | 5792 |
| 4 | 5738 | 8 | 5759 | 12 | 5782 | 16 | 5794 |

EUT was tested with Channel 5727MHz, 5771MHz and 5794MHz.

EUT Exercise Software

The software “SOC V1.2.0.exe” was used in the test.

Equipment Modifications

No modifications were made to the unit tested.


Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|----------|--------------------------|
| DELL | Laptop | PP11L | QDS-BRCM1017 |
| HP | Printer | C3941A | JPTVOB2337 |
| SAST | Modem | AEM-2100 | 0293 |
| DELL | Keyboard | L100 | CNORH656658907BL05D C |

External I/O Cable

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To |
|-------------------|----------------|--------------|------------|-------------------------|----------|
| Printer Cable | Yes | No | 1.2 | Parallel Port of Laptop | Printer |
| Serial Cable | Yes | No | 1.2 | Serial Port of Laptop | Modem |
| Keyboard Cable | Yes | Yes | 1.5 | USB Port of Laptop | Keyboard |

Block Diagram of Test Setup

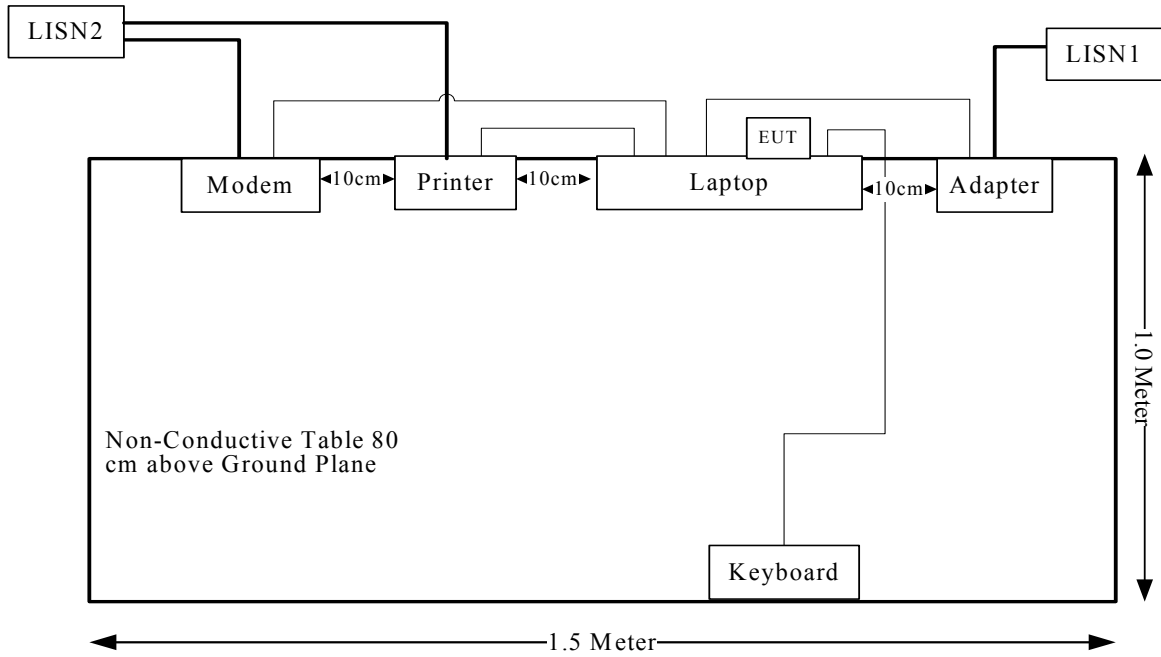

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|--------------------------|----------------------------|---------------|
| §15.203 | Antenna Requirement | Compliance |
| §15.207(a) | Conduction Emissions | Compliance |
| 15.205, §15.209, §15.249 | Radiated Emissions | Compliance |
| §15.215 (c) | 20 dB Bandwidth | Compliance |

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has an internal antenna permanently soldering on the printed circuit board, which complied with 15.203, the maximum gain was -1.18 dBi. Please refer to the internal photos.

Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

| Measurement | U_{cispr} |
|---|-------------|
| Conducted disturbance at mains port using AMN (150 kHz to 30 MHz) | 3.4 dB |

EUT Setup

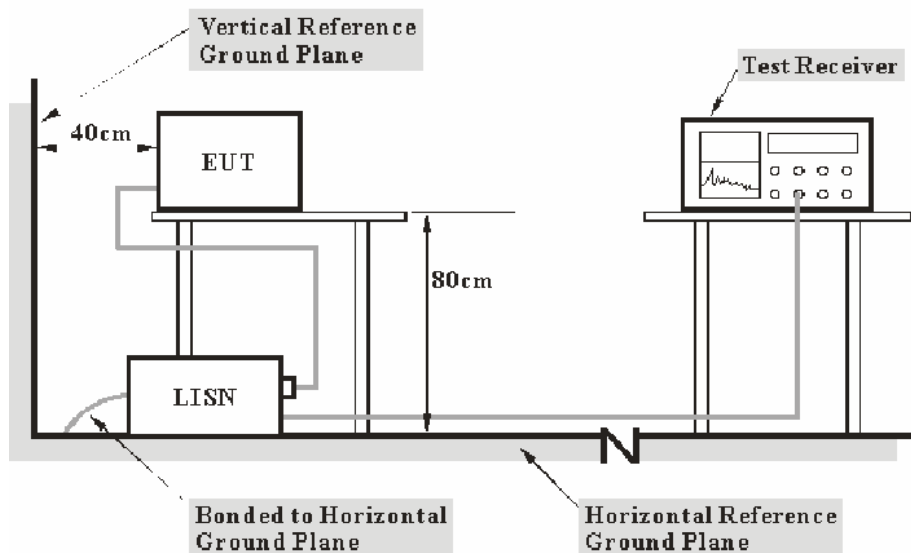

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|----------|---------------|------------------|----------------------|
| R&S | EMI TEST RECEIVER | ESCS 30 | 830245/006 | 2013-11-20 | 2014-11-19 |
| R&S | Two-line V-network | ENV216 | 3560.6550.12 | 2013-2-18 | 2014-2-17 |
| R&S | L.I.S.N | ESH3-Z5 | 100113 | N/A | N/A |
| BACL | Test Software | BACL-EMC | V1.0-2010 | N/A | N/A |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

7.84 dB at 0.660 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 20.4 °C |
| Relative Humidity: | 45 % |
| ATM Pressure: | 101.8 kPa |

The testing was performed by Ares Liu on 2014-01-18.


Test Mode: Transmitting

120 V, 60 Hz, Line:

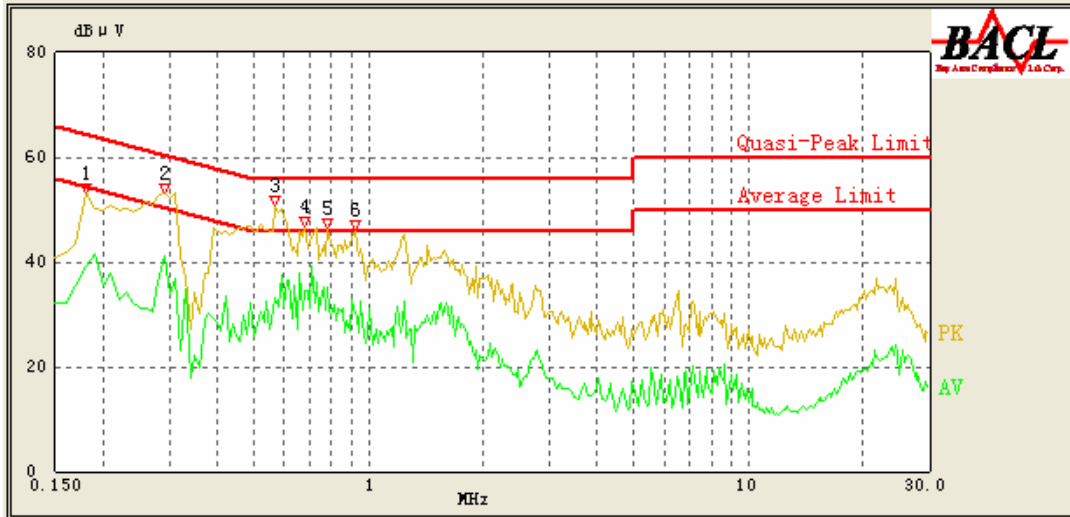

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.180 | 44.04 | 9.64 | 64.49 | 20.45 | QP |
| 0.180 | 39.27 | 9.64 | 54.49 | 15.22 | AV |
| 0.290 | 49.33 | 9.69 | 60.52 | 11.19 | QP |
| 0.290 | 41.06 | 9.69 | 50.52 | 9.46 | AV |
| 0.570 | 47.15 | 9.66 | 56.00 | 8.85 | QP |
| 0.570 | 33.29 | 9.66 | 46.00 | 12.71 | AV |
| 0.680 | 40.29 | 9.67 | 56.00 | 15.71 | QP |
| 0.680 | 34.58 | 9.67 | 46.00 | 11.42 | AV |
| 0.780 | 40.72 | 9.67 | 56.00 | 15.28 | QP |
| 0.780 | 35.29 | 9.67 | 46.00 | 10.71 | AV |
| 0.920 | 40.88 | 9.68 | 56.00 | 15.12 | QP |
| 0.910 | 31.22 | 9.68 | 46.00 | 14.78 | AV |

120 V, 60 Hz, Neutral:

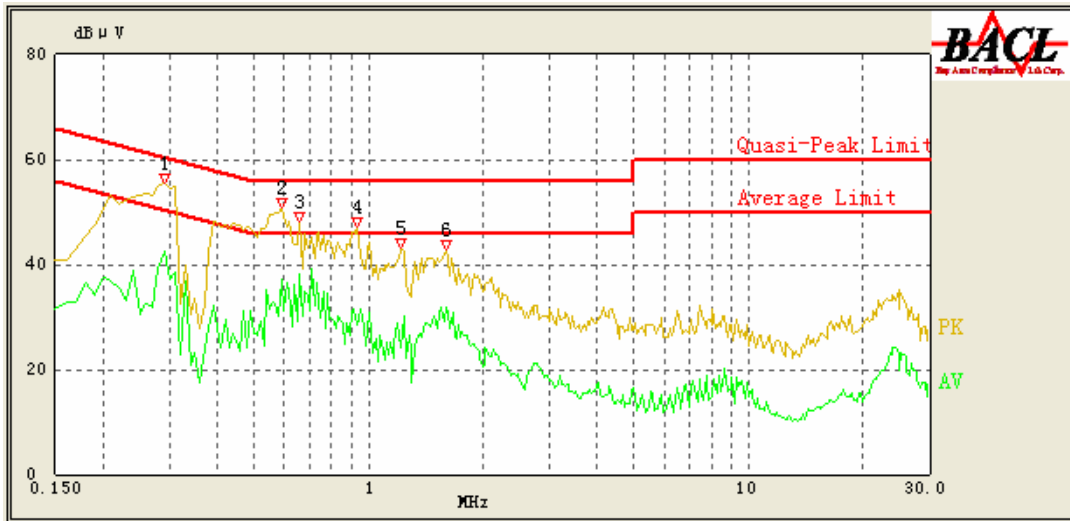

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.290 | 51.32 | 9.68 | 60.52 | 9.20 | QP |
| 0.290 | 42.37 | 9.68 | 50.52 | 8.15 | AV |
| 0.590 | 46.28 | 9.67 | 56.00 | 9.72 | QP |
| 0.590 | 37.31 | 9.67 | 46.00 | 8.69 | AV |
| 0.660 | 42.93 | 9.67 | 56.00 | 13.07 | QP |
| 0.660 | 38.16 | 9.67 | 46.00 | 7.84 | AV |
| 0.930 | 42.09 | 9.69 | 56.00 | 13.91 | QP |
| 0.930 | 28.63 | 9.69 | 46.00 | 17.37 | AV |
| 1.220 | 37.92 | 9.69 | 56.00 | 18.08 | QP |
| 1.220 | 24.26 | 9.69 | 46.00 | 21.74 | AV |
| 1.600 | 39.01 | 9.68 | 56.00 | 16.99 | QP |
| 1.600 | 31.82 | 9.68 | 46.00 | 14.18 | AV |

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|------------------------------|---|---|
| 902–928 MHz | 50 | 500 |
| 2400–2483.5 MHz | 50 | 500 |
| 5725–5875 MHz | 50 | 500 |
| 24.0–24.25 GHz | 250 | 2500 |

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}


| Measurement | U_{cispr} |
|--|-------------|
| Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz) | 6.3 dB |
| Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz) | 5.2 dB |
| Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz) | 5.5 dB |

EUT Setup

Below 1 GHz:

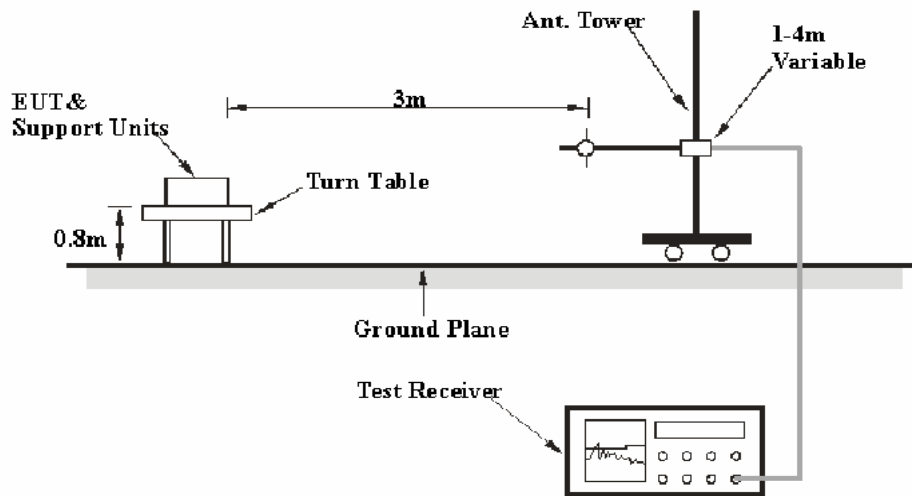

Above 1 GHz:

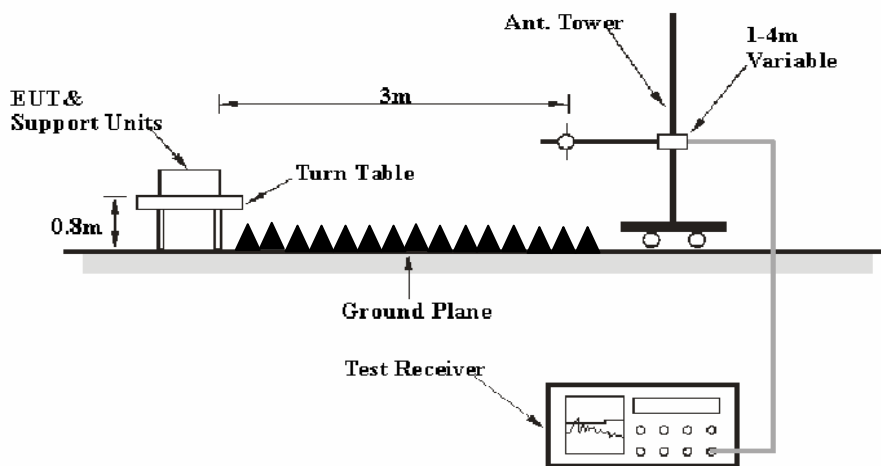

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|------------------|---------|-----------|--------|----------|
| 30MHz – 1000 MHz | 120 kHz | 300 kHz | 120kHz | QP |
| Above 1 GHz | 1MHz | 3 MHz | / | PK |
| | 1MHz | 10 Hz | / | Ave. |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|-----------------|-----------------|------------------|----------------------|
| R&S | EMI TEST RECEIVER | ESCI | 100224 | 2013-5-6 | 2014-5-5 |
| Sunol Sciences | Antenna | JB3 | A060611-1 | 2011-9-6 | 2014-9-5 |
| HP | AMPLIFIER | 8447E | 2434A02181 | N/A | N/A |
| R&S | Spectrum analyzer | FSEM | DE31388 | 2013-5-7 | 2014-5-6 |
| ETS-Lindgren | horn antenna | 3115 | 000 527 35 | 2012-9-6 | 2015-9-5 |
| Mini-Circuit | Amplifier | ZVA-213-S+ | 054201245 | N/A | N/A |
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2013-6-16 | 2014-6-15 |
| Ducommun Technologies | Horn antenna | ARH-4223-02 | 1007726-02-1304 | 2013-6-16 | 2014-6-15 |
| Ducommun Technologies | horn antenna | ARH-2823-02 | 1007726-01-1302 | 2013-6-16 | 2014-6-15 |
| Quinstar | Amplifier | QLW-18405536-JO | 15964001001 | N/A | N/A |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.205 & 15.249, with the worst margin reading of:

4.93 dB at 17181MHz in the Vertical polarization

Test Data**Environmental Conditions**

| | |
|---------------------------|-----------|
| Temperature: | 18.9 °C |
| Relative Humidity: | 49 % |
| ATM Pressure: | 101.8 kPa |

The testing was performed by Ares liu on 2014-01-18.

Test Mode: Transmitting

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|---------------------------|----------------|---------------------|-------------|------------------|-----------------|---------------------|------------------------------|----------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB(1/m)) | | | | | |
| frequency: 5727MHz | | | | | | | | | |
| 5727 | 63.25 | PK | H | 32.15 | 6.04 | 26.78 | 74.66 | 114.00 | 39.34 |
| 5727 | 46.39 | AV | H | 32.15 | 6.04 | 26.78 | 57.80 | 94.00 | 36.20 |
| 5727 | 65.65 | PK | V | 32.15 | 6.04 | 26.78 | 77.06 | 114.00 | 36.94 |
| 5727 | 48.84 | AV | V | 32.15 | 6.04 | 26.78 | 60.25 | 94.00 | 33.75 |
| 5725 | 54.03 | PK | V | 32.15 | 6.04 | 26.78 | 65.44 | 74.00 | 8.56 |
| 5725 | 35.21 | AV | V | 32.15 | 6.04 | 26.78 | 46.62 | 54.00 | 7.38 |
| 11454 | 34.76 | PK | V | 37.85 | 9.79 | 25.92 | 56.48 | 74.00 | 17.52 |
| 11454 | 18.97 | AV | V | 37.85 | 9.79 | 25.92 | 40.69 | 54.00 | 13.31 |
| 17181 | 34.26 | PK | V | 40.59 | 14.31 | 25.05 | 64.11 | 74.00 | 9.89 |
| 17181 | 19.45 | AV | V | 40.59 | 14.31 | 25.05 | 49.30 | 54.00 | 4.70 |
| 1425 | 35.95 | PK | H | 23.41 | 3.13 | 27.11 | 35.38 | 74.00 | 38.62 |
| 1425 | 21.27 | AV | H | 23.41 | 3.13 | 27.11 | 20.70 | 54.00 | 33.30 |
| 1597 | 37.33 | PK | H | 23.79 | 3.23 | 26.90 | 37.45 | 74.00 | 36.55 |
| 1597 | 23.41 | AV | H | 23.79 | 3.23 | 26.90 | 23.53 | 54.00 | 30.47 |
| 698 | 34.4 | QP | H | 20.62 | 3.23 | 22.31 | 35.94 | 46.00 | 10.06 |
| frequency: 5771MHz | | | | | | | | | |
| 5771 | 63.31 | PK | H | 32.15 | 6.12 | 26.72 | 74.86 | 114.00 | 39.14 |
| 5771 | 46.42 | AV | H | 32.15 | 6.12 | 26.72 | 57.97 | 94.00 | 36.03 |
| 5771 | 65.60 | PK | V | 32.15 | 6.12 | 26.72 | 77.15 | 114.00 | 36.85 |
| 5771 | 48.96 | AV | V | 32.15 | 6.12 | 26.72 | 60.51 | 94.00 | 33.49 |
| 11542 | 35.00 | PK | V | 37.90 | 9.81 | 25.92 | 56.79 | 74.00 | 17.21 |
| 11542 | 19.14 | AV | V | 37.90 | 9.81 | 25.92 | 40.93 | 54.00 | 13.07 |
| 17313 | 34.26 | PK | V | 41.38 | 13.60 | 24.77 | 64.47 | 74.00 | 9.53 |
| 17313 | 19.70 | AV | V | 41.38 | 13.60 | 24.77 | 49.91 | 54.00 | 4.09 |
| 1425 | 36.21 | PK | H | 23.41 | 3.13 | 27.11 | 35.64 | 74.00 | 38.36 |
| 1425 | 21.18 | AV | H | 23.41 | 3.13 | 27.11 | 20.61 | 54.00 | 33.39 |
| 1597 | 37.55 | PK | H | 23.79 | 3.23 | 26.90 | 37.67 | 74.00 | 36.33 |
| 1597 | 23.19 | AV | H | 23.79 | 3.23 | 26.90 | 23.31 | 54.00 | 30.69 |
| 3004 | 33.87 | PK | H | 27.21 | 7.41 | 27.48 | 41.01 | 74.00 | 32.99 |
| 3004 | 19.23 | AV | H | 27.21 | 7.41 | 27.48 | 26.37 | 54.00 | 27.63 |
| 698 | 33.80 | QP | H | 20.62 | 3.23 | 22.31 | 35.34 | 46.00 | 10.66 |
| frequency: 5794MHz | | | | | | | | | |
| 5794 | 63.12 | PK | H | 32.16 | 6.13 | 26.69 | 74.72 | 114.00 | 39.28 |
| 5794 | 46.30 | AV | H | 32.16 | 6.13 | 26.69 | 57.90 | 94.00 | 36.10 |
| 5794 | 65.45 | PK | V | 32.16 | 6.13 | 26.69 | 77.05 | 114.00 | 36.95 |
| 5794 | 48.68 | AV | V | 32.16 | 6.13 | 26.69 | 60.28 | 94.00 | 33.72 |
| 5875 | 53.97 | PK | V | 32.18 | 6.31 | 26.69 | 65.77 | 74.00 | 8.23 |
| 5875 | 34.98 | AV | V | 32.18 | 6.31 | 26.69 | 46.78 | 54.00 | 7.22 |
| 11588 | 34.58 | PK | V | 37.90 | 9.73 | 25.91 | 56.30 | 74.00 | 17.70 |
| 11588 | 18.9 | AV | V | 37.90 | 9.73 | 25.91 | 40.62 | 54.00 | 13.38 |
| 17382 | 34.39 | PK | V | 41.79 | 13.23 | 24.62 | 64.79 | 74.00 | 9.21 |
| 17382 | 19.63 | AV | V | 41.79 | 13.23 | 24.62 | 50.03 | 54.00 | 3.97 |
| 1425 | 35.85 | PK | H | 23.41 | 3.13 | 27.11 | 35.28 | 74.00 | 38.72 |
| 1425 | 21.08 | AV | H | 23.41 | 3.13 | 27.11 | 20.51 | 54.00 | 33.49 |
| 1597 | 37.57 | PK | H | 23.79 | 3.23 | 26.90 | 37.69 | 74.00 | 36.31 |
| 1597 | 23.51 | AV | H | 23.79 | 3.23 | 26.90 | 23.63 | 54.00 | 30.37 |
| 698 | 34.2 | QP | H | 20.62 | 3.23 | 22.31 | 35.74 | 46.00 | 10.26 |

*Within measurement uncertainty!

FCC §15.215(c)– 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S | Spectrum analyzer | FSP 38 | 100478 | 2013-6-16 | 2014-6-15 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 21.6 °C |
| Relative Humidity: | 39 % |
| ATM Pressure: | 101.8 kPa |

* *The testing was performed by Ares liu on 2014-01-18.*


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------|-----------------|-----------------------|
| Low | 5727 | 2.034 |
| Middle | 5771 | 2.040 |
| High | 5794 | 2.034 |

Please refer to the following plots.

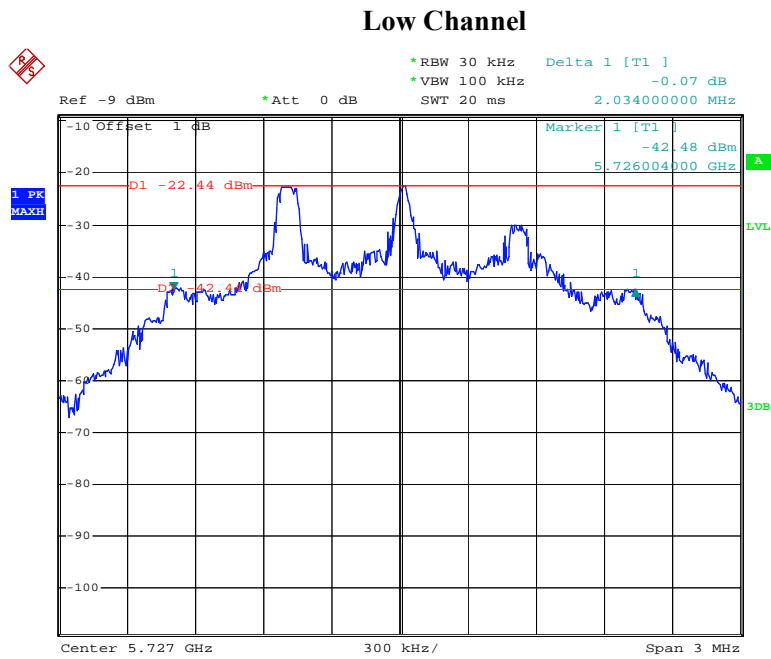


Date: 18.JAN.2014 16:01:43

Middle Channel

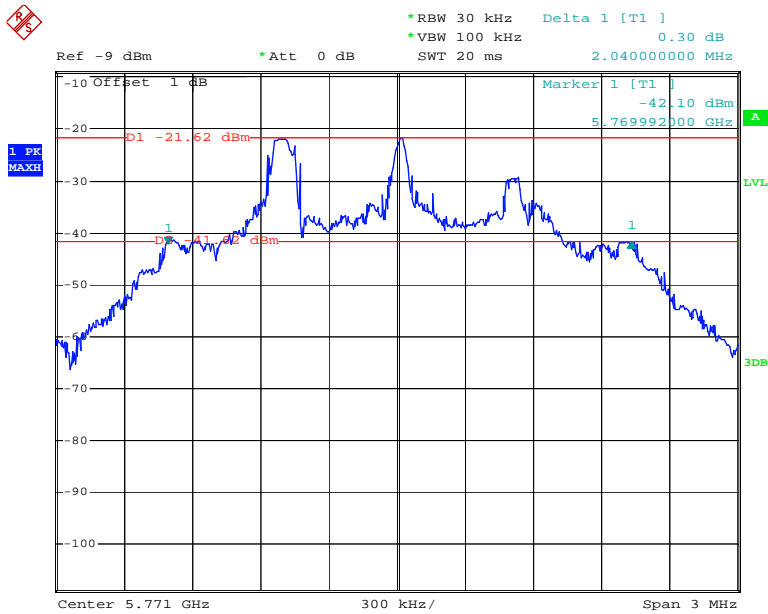

Date: 18.JAN.2014 16:04:07

High Channel

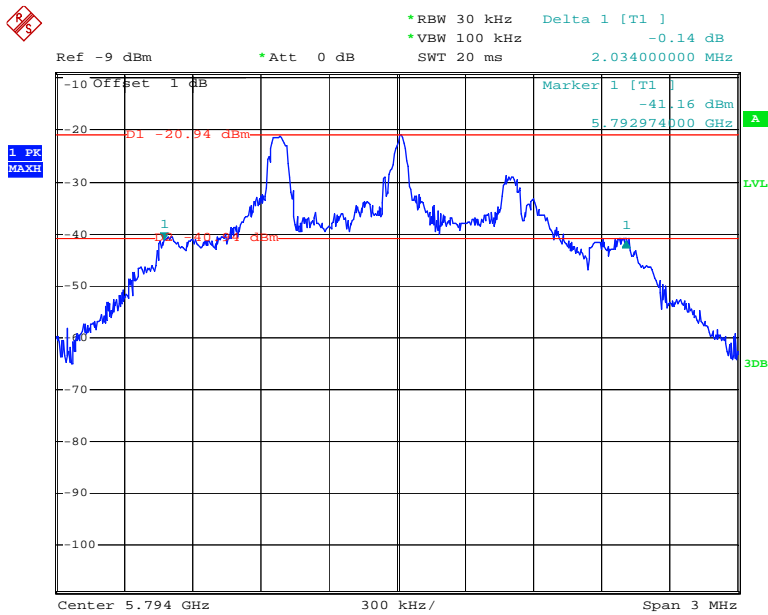

Date: 18.JAN.2014 16:05:56

***** END OF REPORT *****