


ATTACHMENT O – SAR TEST PLOTS (2 of 4)


TX-110C

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 mho/m $\epsilon_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.533 mW/g, SAR (10g): 0.357 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.11 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Touch / Antenna: in
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

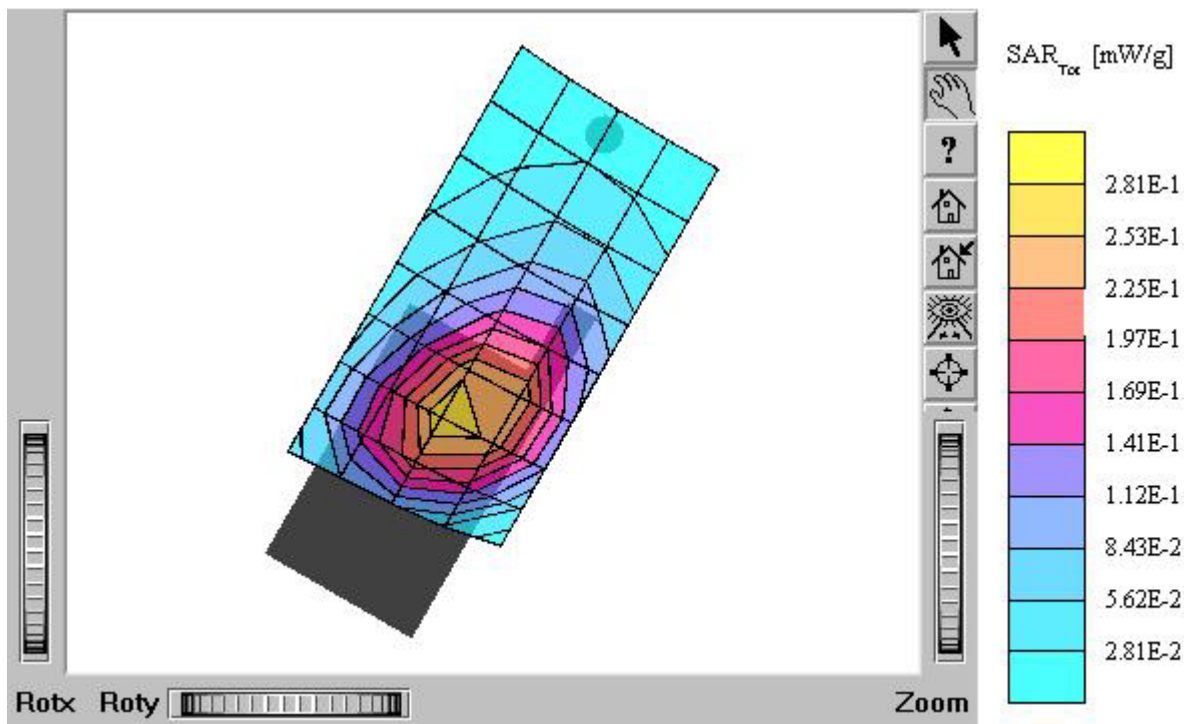


TX-110C

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{\text{ho/m}} e_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.401 mW/g, SAR (10g): 0.268 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.15 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Touch / Antenna: out
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

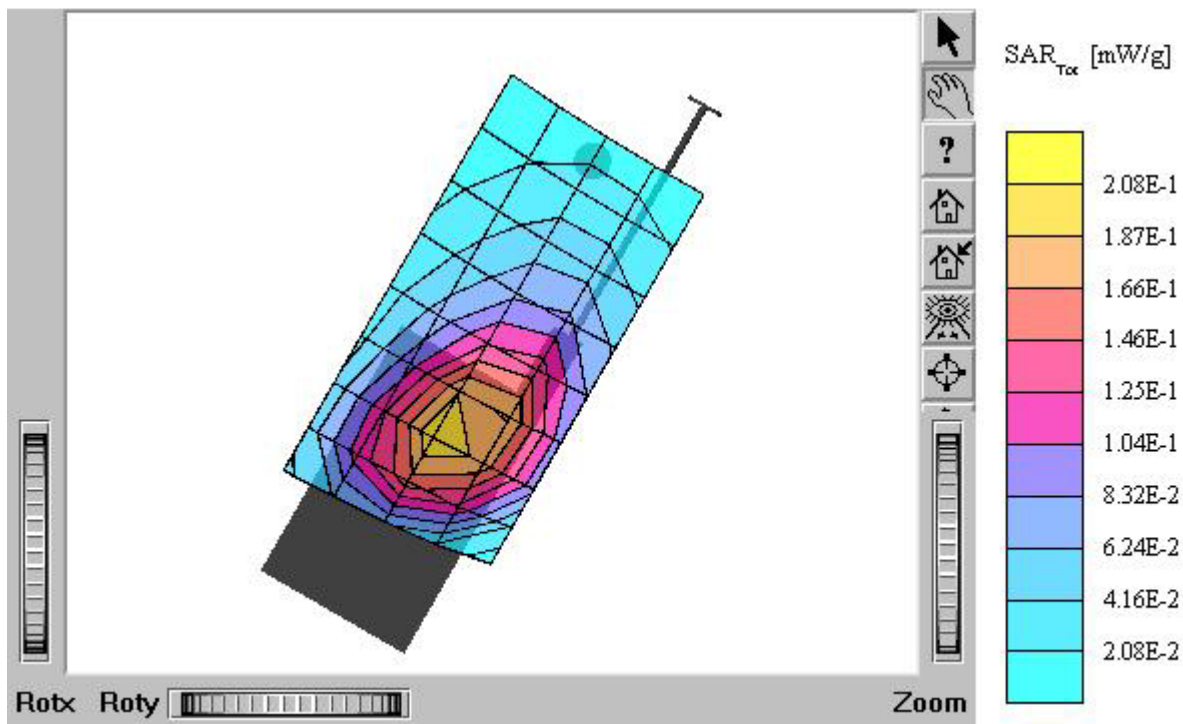


TX-110C

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{\text{ho/m}} e_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.428 mW/g, SAR (10g): 0.285 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.27 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Touch / Antenna: in
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

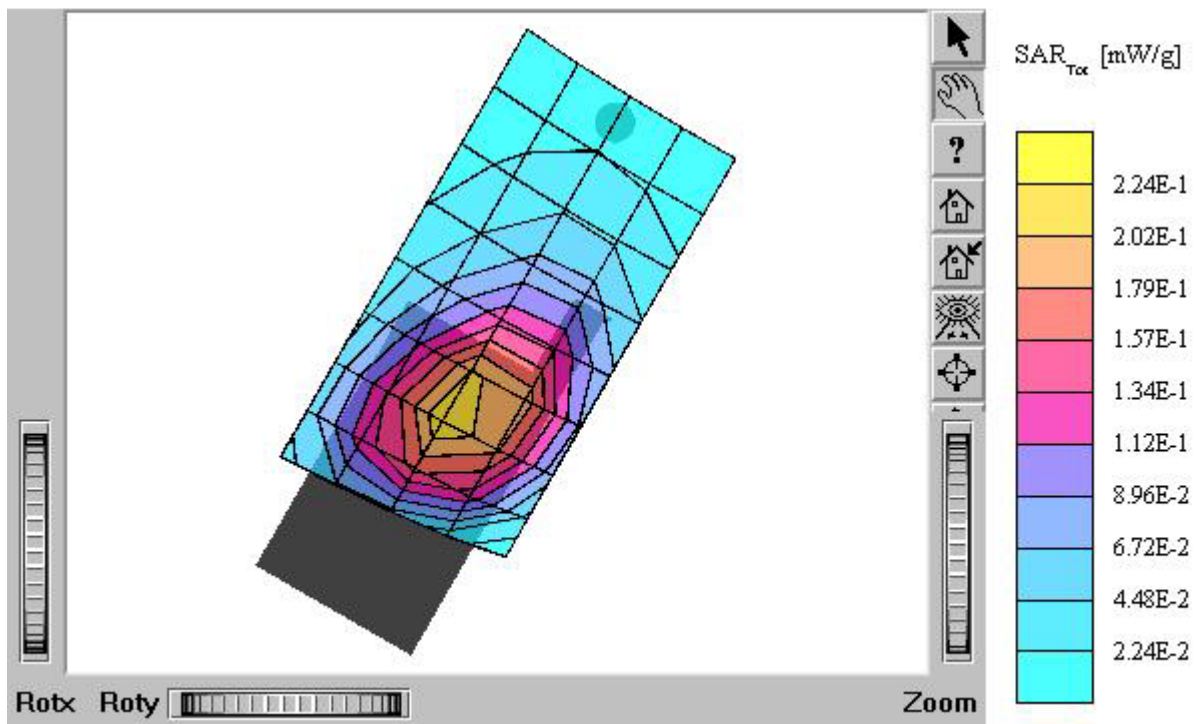


TX-110C

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{\text{ho/m e}_r} = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.375 mW/g, SAR (10g): 0.249 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.13 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Touch / Antenna: out
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

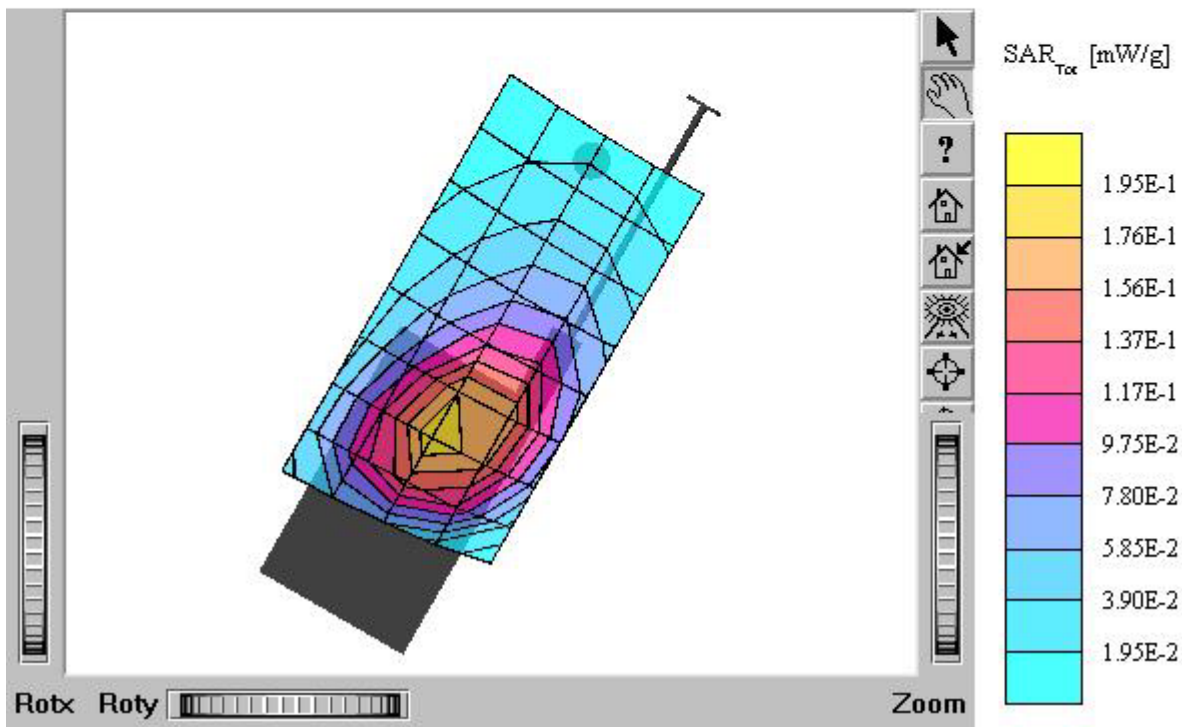


TX-110C

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 mho/m $\epsilon_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.596 mW/g, SAR (10g): 0.398 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.26 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Touch / Antenna: in
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

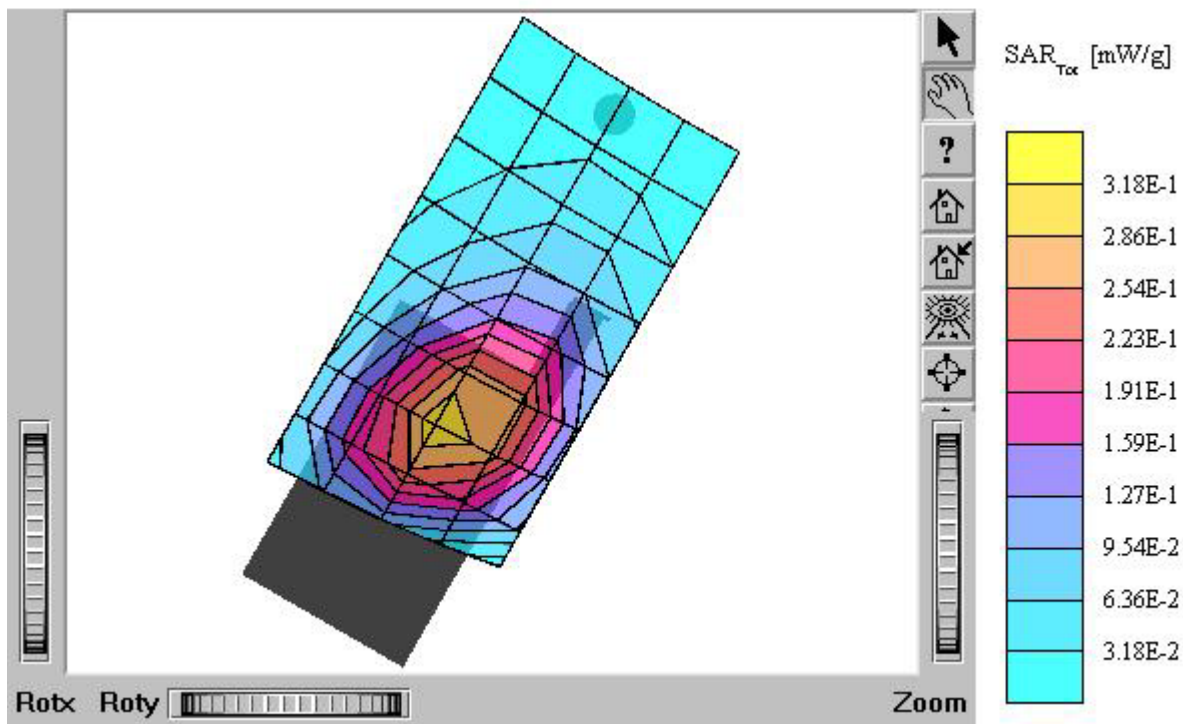


TX-110C

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 mho/m $e_r = 42.3$ $r = 1.00$ g/cm^3
Cube 5x5x7: SAR (1g): 0.509 mW/g, SAR (10g): 0.340 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$
Powerdrift: -0.07 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Touch / Antenna: out
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

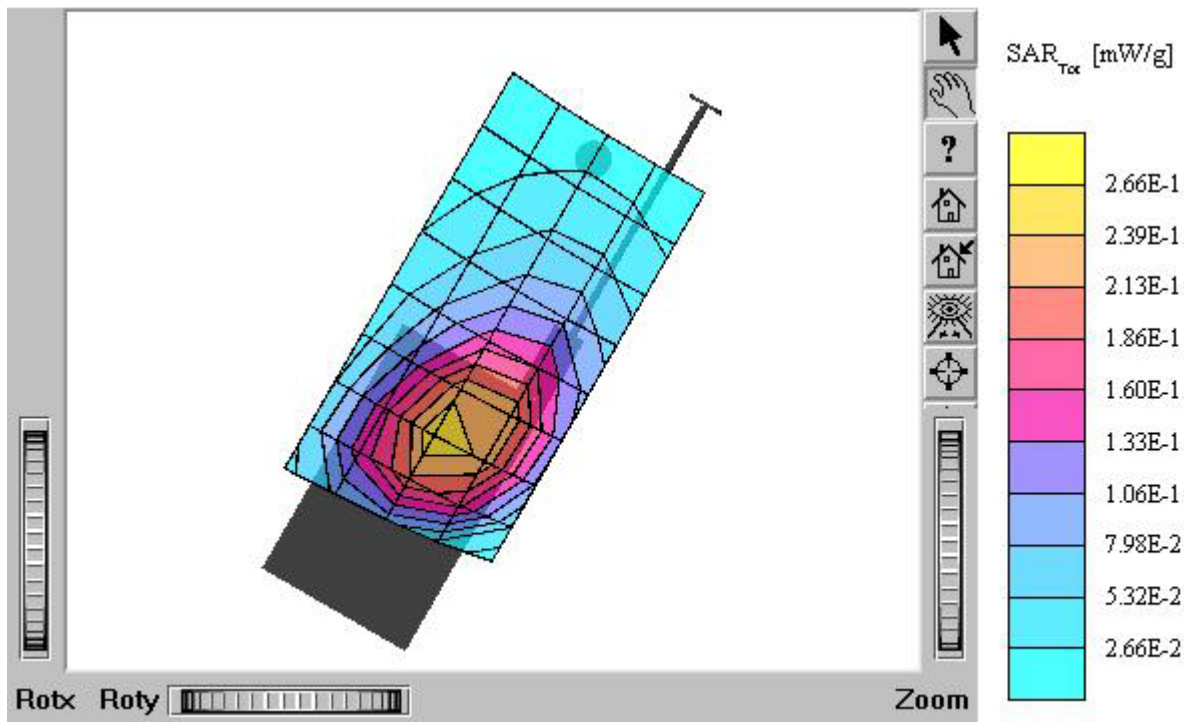


TX-110C

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 ρ/m $e_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.570 mW/g, SAR (10g): 0.375 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.06 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Touch / Antenna: in
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

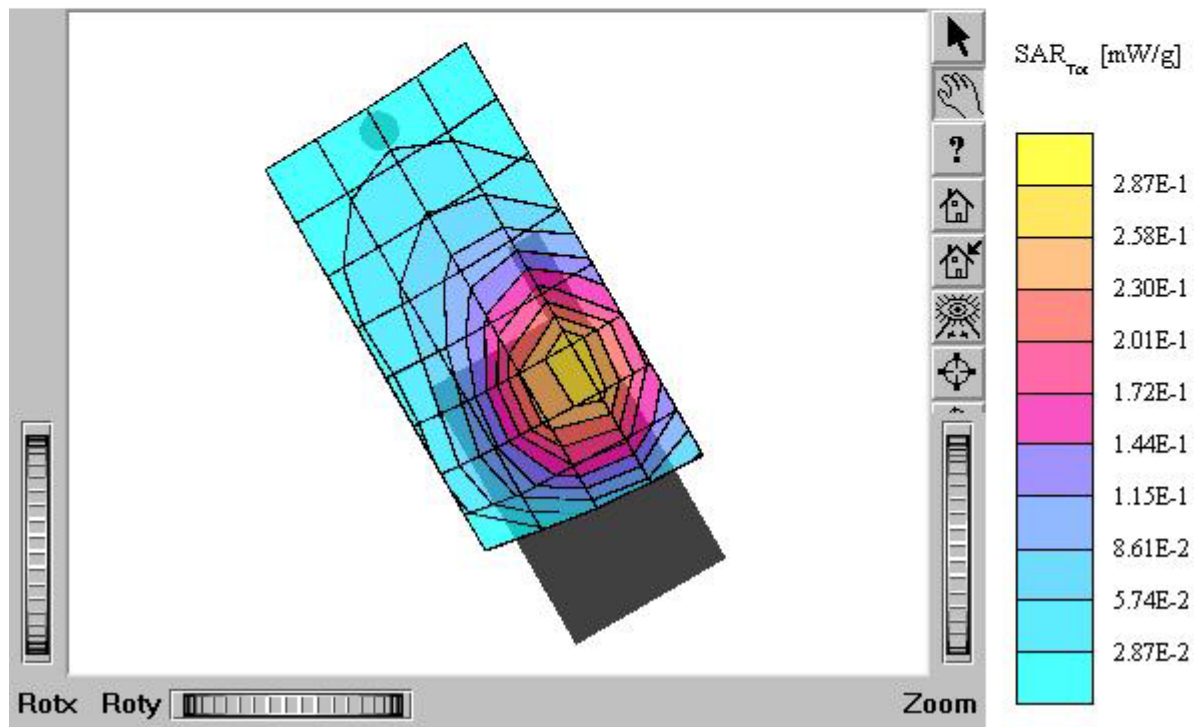


TX-110C

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 ρ/m $\epsilon_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.412 mW/g, SAR (10g): 0.271 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.09 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Touch / Antenna: out
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

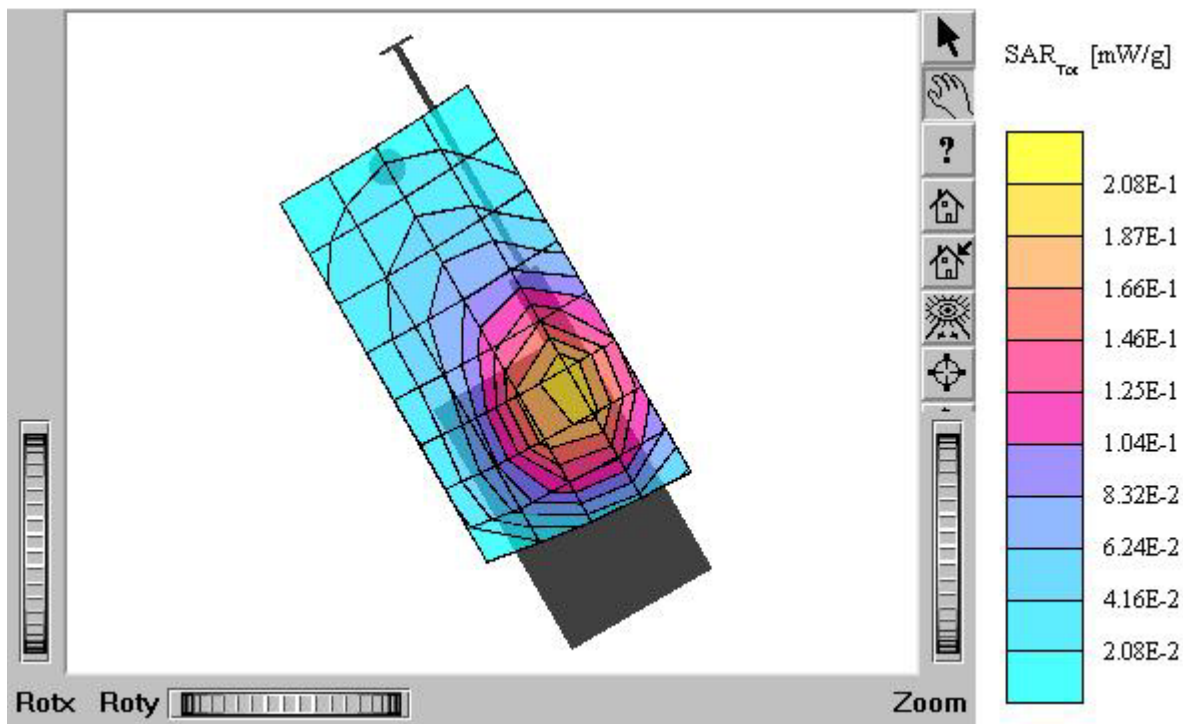


TX-110C

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 ρ/m $\epsilon_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.442 mW/g, SAR (10g): 0.290 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.06 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Touch / Antenna: in
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

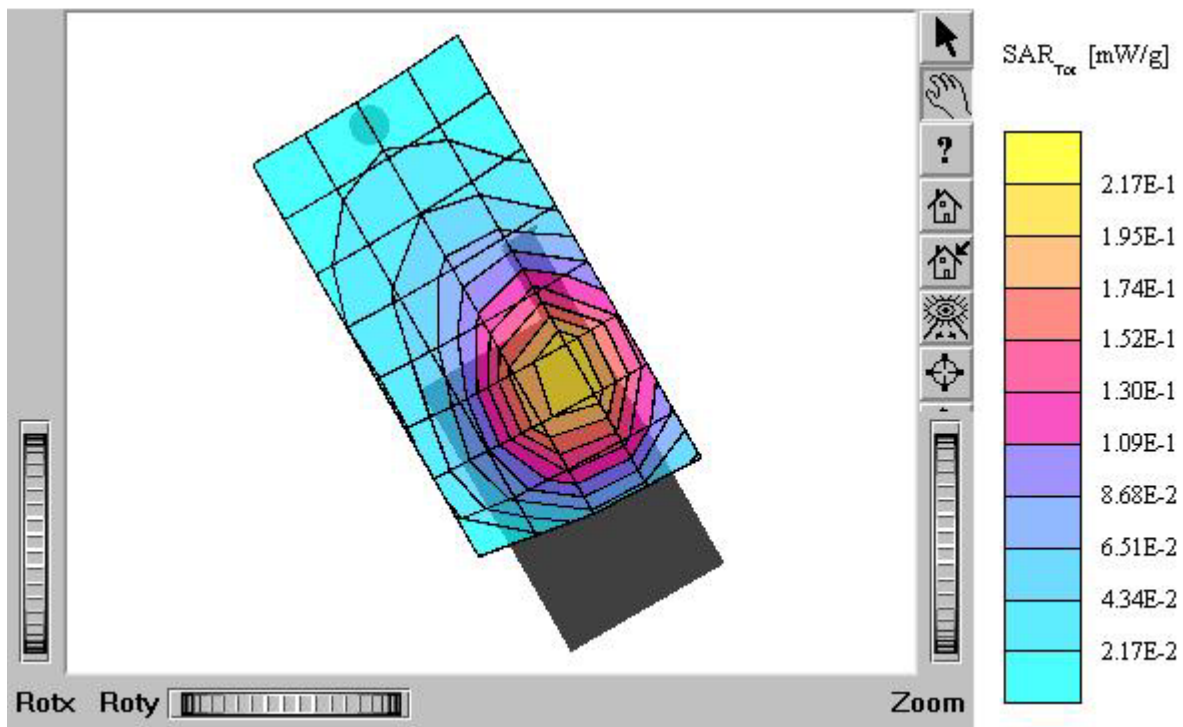


TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{\text{mho/m}}$ $\epsilon_r = 42.3$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.379 mW/g, SAR (10g): 0.248 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$
Powerdrift: -0.02 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Touch / Antenna: out
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

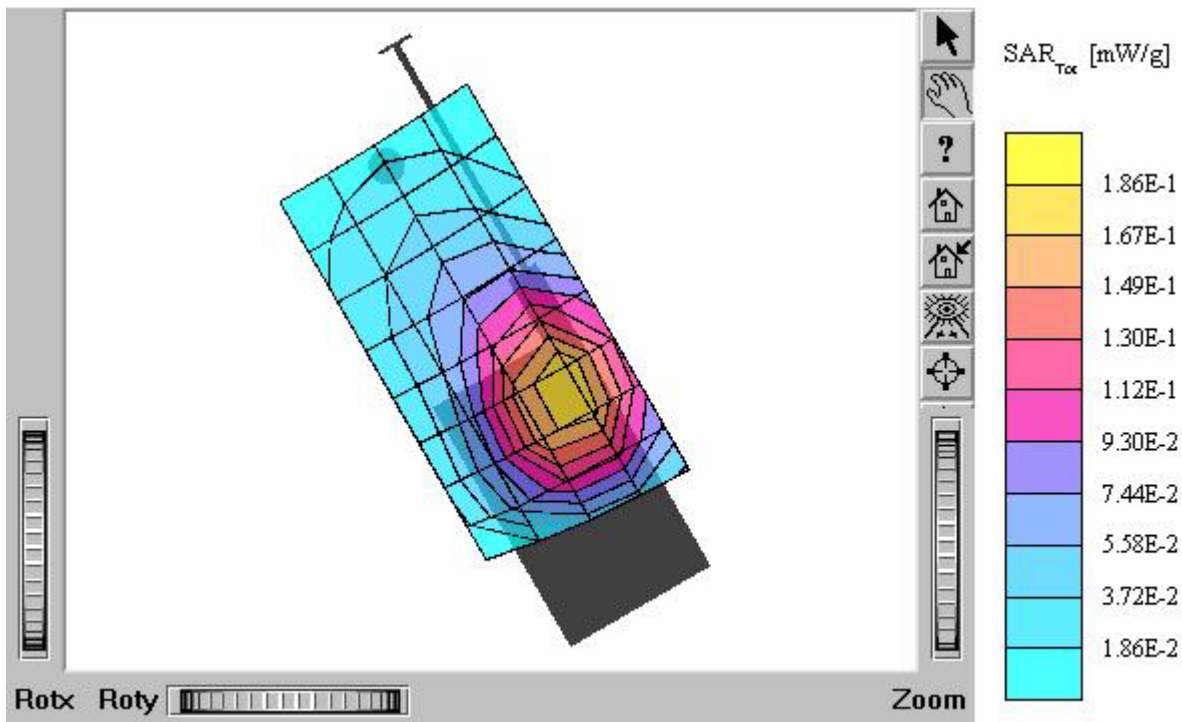


TX-110C

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 mho/m $\epsilon_r = 42.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.648 mW/g, SAR (10g): 0.426 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.06 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Touch / Antenna: in
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

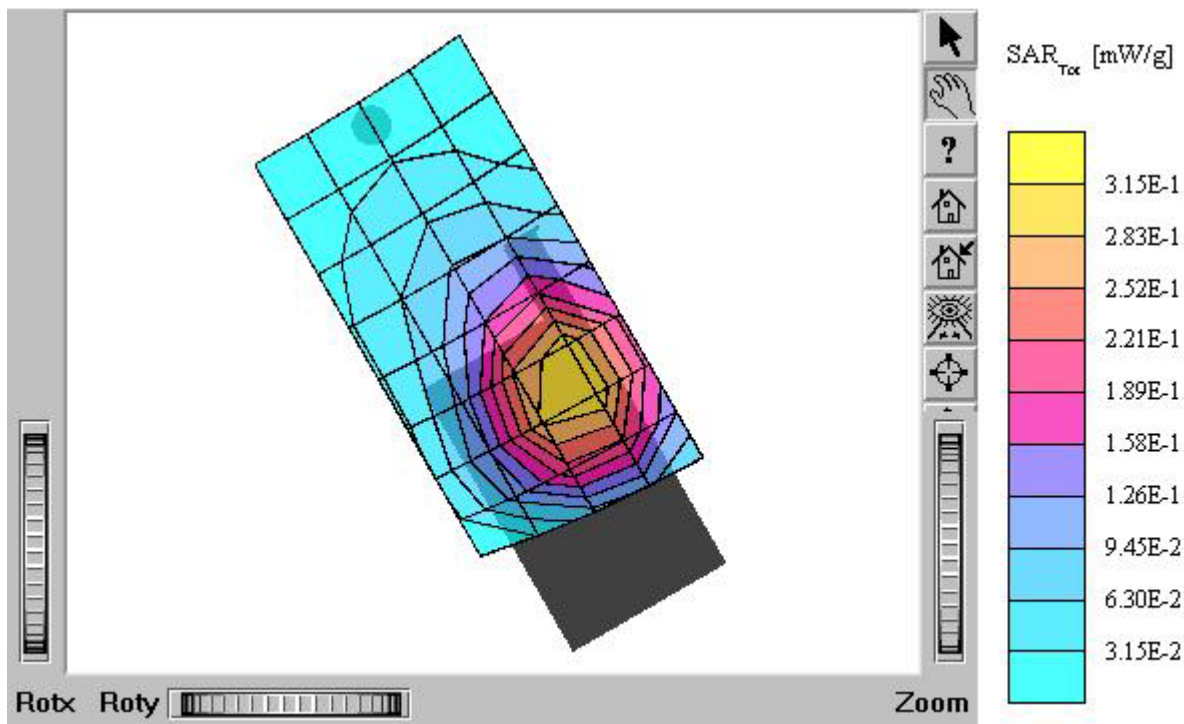


TX-110C

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{\text{ho/m e}} = 42.3$ r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.641 mW/g, SAR (10g): 0.423 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.02 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C (E-battery)
Company: Hyundai Curitel Inc.
Test Position: Right Touch / Antenna: in
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

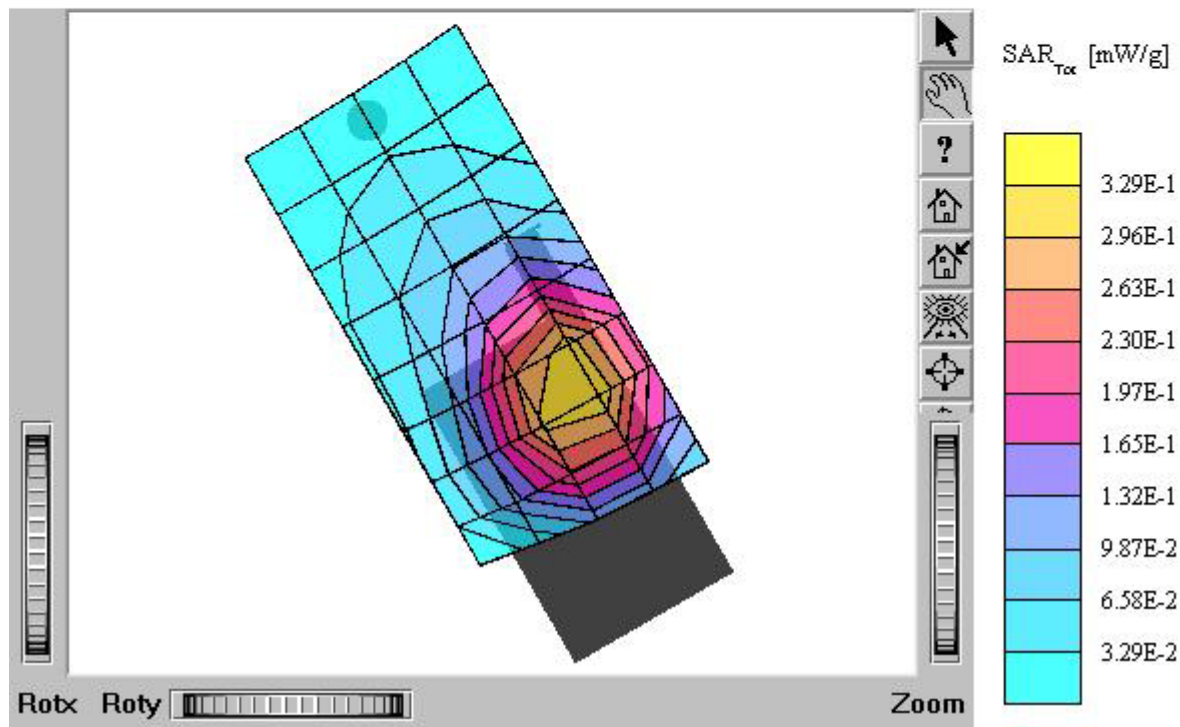


TX-110C

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{\text{ho/m e}} = 42.3$ r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.545 mW/g, SAR (10g): 0.358 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.06 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Touch / Antenna: out
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

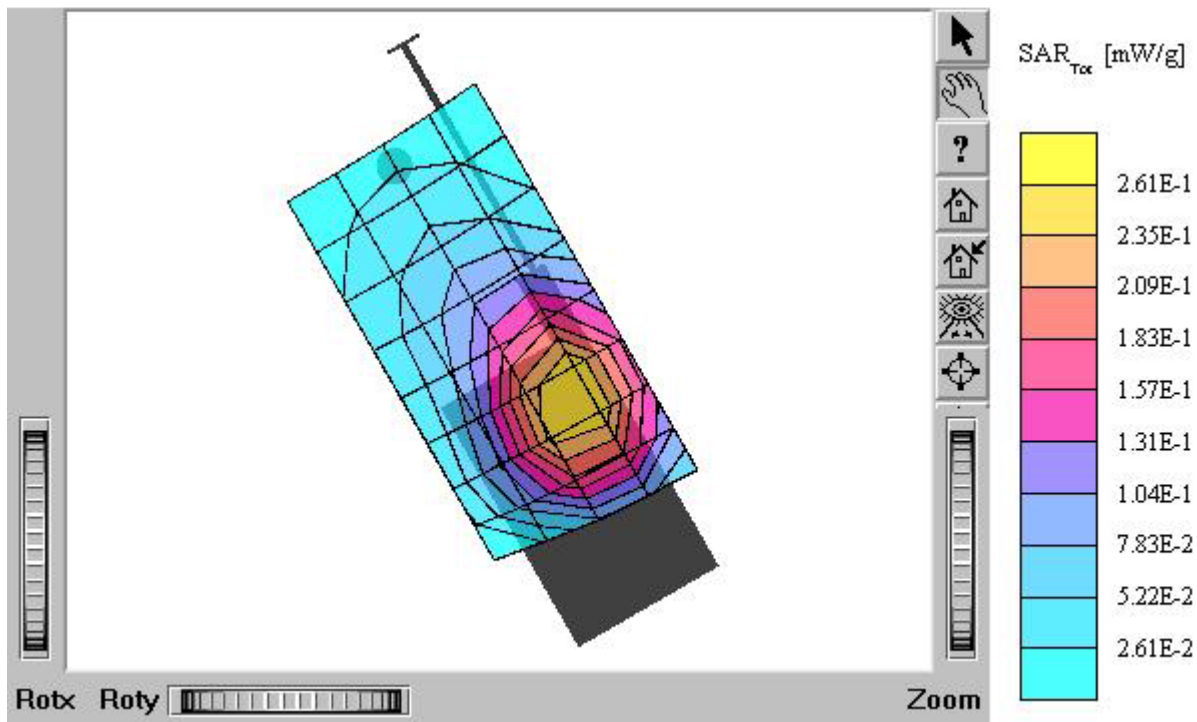


TX-110C

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{ho}/m e_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.117 mW/g, SAR (10g): 0.0831 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.00 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Tilt 15° / Antenna: in
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

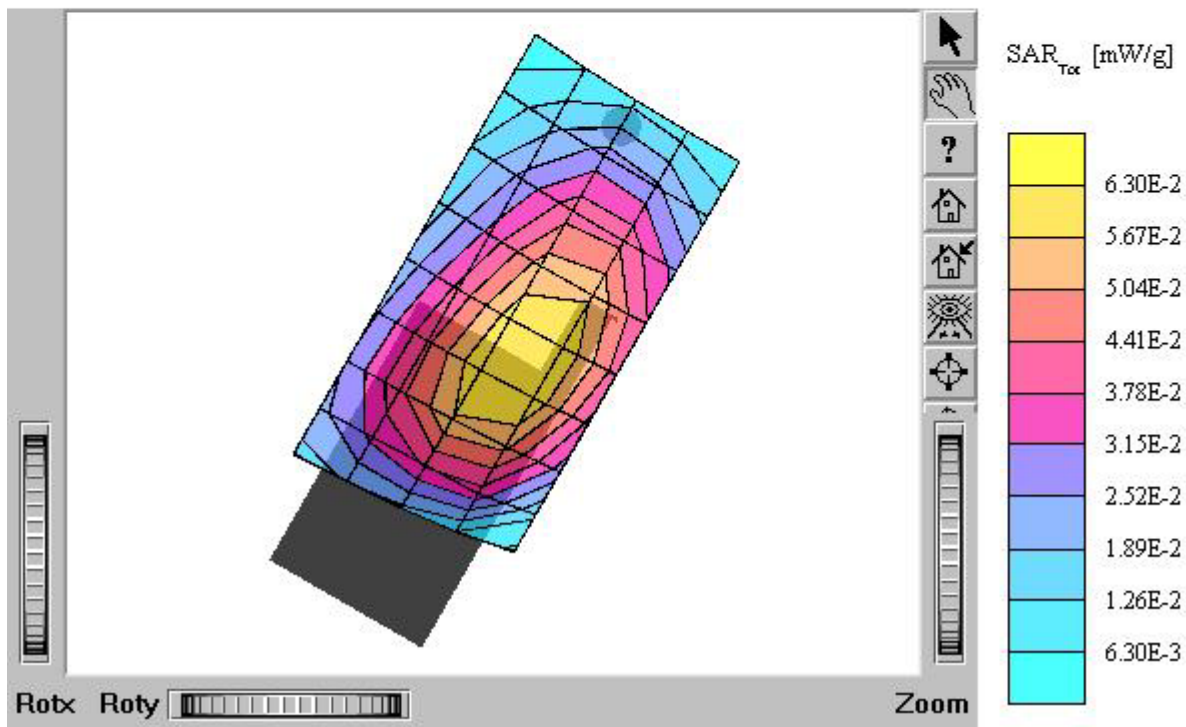


TX-110C

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho/m e_r = 42.3 r = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.105 mW/g, SAR (10g): 0.0743 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.01 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Left Tilt 15° / Antenna: out
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

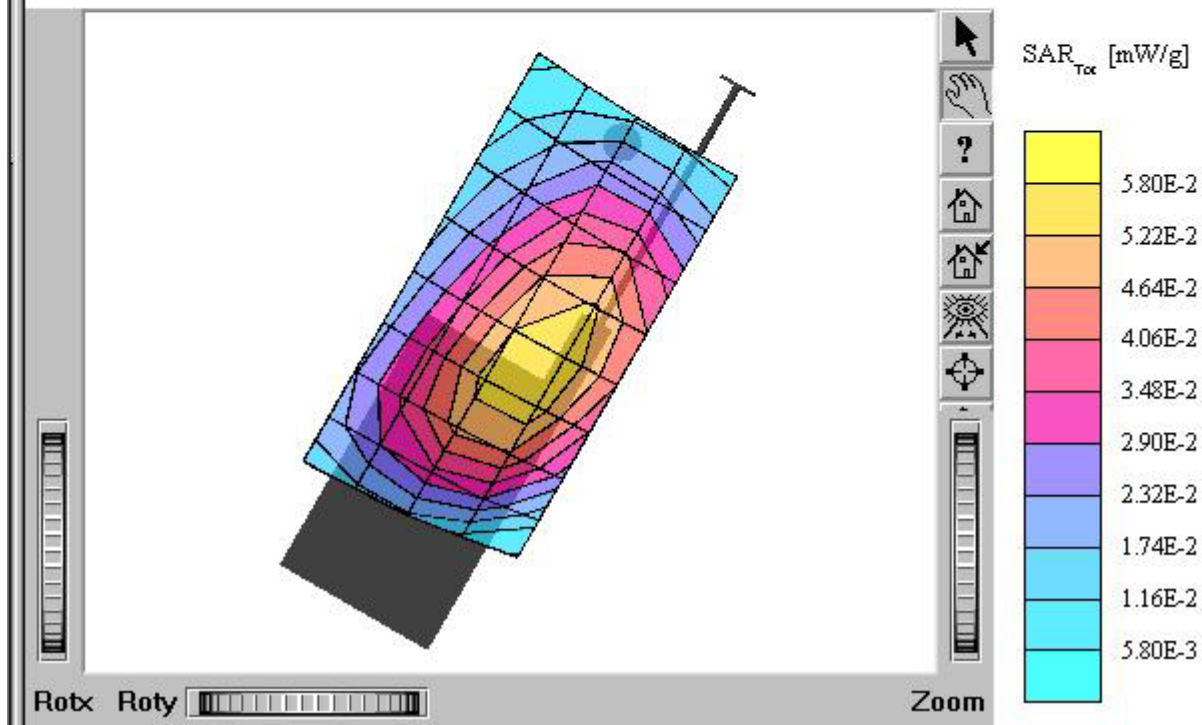

TX-110C

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 $\rho_{\text{ho/m}} e_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.113 mW/g, SAR (10g): 0.0815 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.04 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Tilt 15° / Antenna: in
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

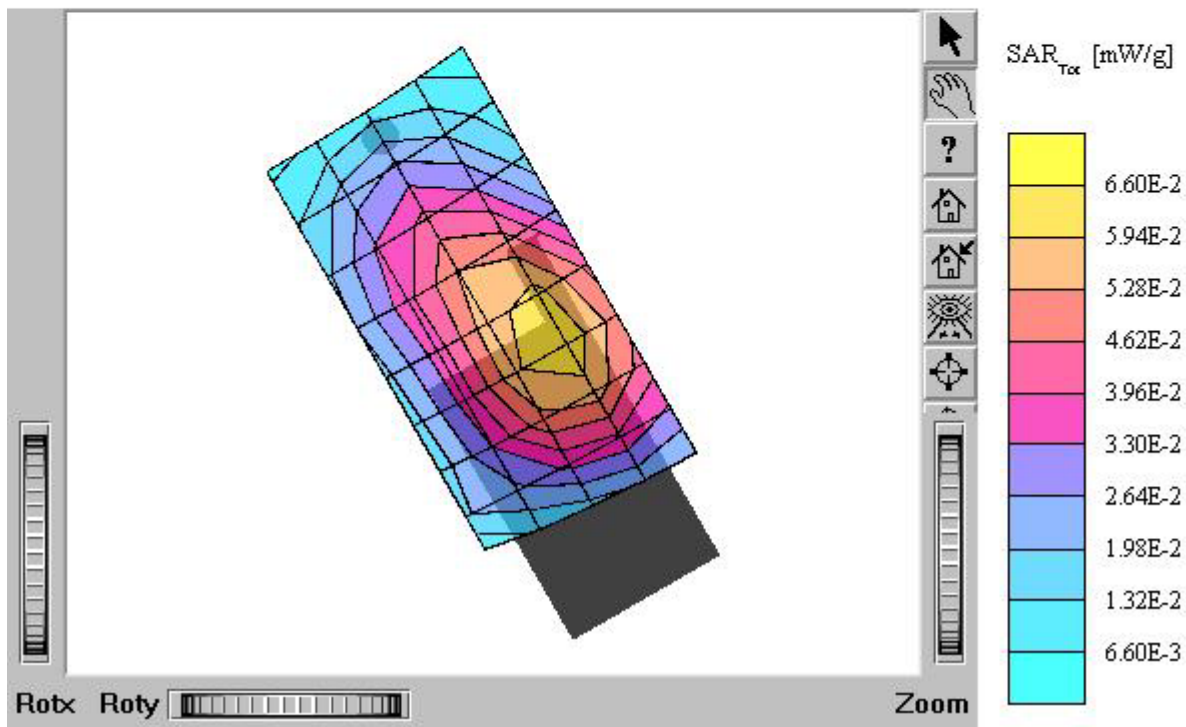

TX-110C

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1607; ConvF(6.22,6.22,6.22); Crest factor: 1.0; Head 835 MHz: $s = 0.88$
 mho/m $e_r = 42.3$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.101 mW/g, SAR (10g): 0.0728 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.00 dB
Comment:
FCC ID: PP4TX-110C / MODEL: TX-110C
Company: Hyundai Curitel Inc.
Test Position: Right Tilt 15° / Antenna: out
Mode: CDMA / Channel: 363 (853.89MHz)
Conducted Power : 25.5 dBm
Liquid Temperature : 21.4°C
Date Tested : November 18, 2004

