

TEST REPORT

of

FCC Part 15 Subpart C §15.247 / RSS-210 Issue8, RSS-Gen Issue 3

FCC ID / IC Certification: PPD-QCMD335 / 4104A-QCMD335

Equipment Under Test : SAMSUNG NOTE PC
Model Name : QCMD335
(Tested inside of Samsung Notebook PC NP455R4J)
Applicant : Qualcomm Atheros, Inc.
Manufacturer : SAMSUNG ELECTRONICS CO., LTD.
Date of Test(s) : 2014. 03. 04 ~ 2014. 03. 21
Date of Issue : 2014. 05. 27

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date:

2014.05.27

Wonjun Sim

Approved By:



Date:

2014.05.27

Hyunchae You

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

Table of contents

1. General Information -----	3
2. Transmitter Radiated Spurious Emissions -----	6
3. Maximum Peak Conducted Output Power -----	19
4. Antenna Requirement -----	24

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040 <http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 3FL, 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 428 5700
FAX : +82 31 427 2370

1.2. Details of Applicant

Applicant : Qualcomm Atheros, Inc.
Address : 1700 Technology Drive, San Jose, CA 95110
Contact Person : Stanley Lin
Phone No. : +1 408 773 5200
Fax No. : +1 408 773 9940

1.3. Description of EUT

Kind of Product	SAMGSUNG NOTE PC
Model Name	QCMD335 (Tested inside of Samsung Notebook PC NP455R4J)
Power Supply	DC 11.4V
Frequency Range	2 402 MHz ~ 2 480 MHz (BT, BT LE), 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20), 2 422 MHz ~ 2 452 MHz (11n_HT40)
Modulation Technique	DSSS, OFDM, GFSK, π/4DQPSK, 8DPSK
Number of Channels	11 channel (11b/g/n_HT20), 7 channel (11n_HT40), 79 channel (BT), 40 channel (BT LE)
Antenna Type	Internal type(SISO)
Antenna Gain	0.43 dB i

1.5. Declaration by the manufacturer

- Duty Cycle ≥ 98 percent.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040 <http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

1.6. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
Signal Generator	R&S	SMR40	100272	Aug. 23, 2013	Annual	Aug. 23, 2014
Signal Generator	R&S	SMBV100A	3847M00534	Jul. 15, 2013	Annual	Jul. 15, 2014
Spectrum Analyzer	Agilent	N9030A	US51350132	Oct. 08, 2013	Annual	Oct. 08, 2014
Attenuator	AEROFLEX / INMET	18N-20dB	3	Apr. 01, 2013	Annual	Apr. 01, 2014
High Pass Filter	Wainwright	WHK3.0/18G-6SS	344	Jun. 08, 2013	Annual	Jun. 08, 2014
High Pass Filter	Wainwright	WHK7.5/26.5G-6SS	11	Jun. 08, 2013	Annual	Jun. 08, 2014
Low Pass Filter	Mini circuits	NLP-1200+	V8979400903-1	Jun. 12, 2013	Annual	Jun. 12, 2014
Power Sensor	R&S	NRP-Z81	100669	Apr. 05. 2013	Annual	Apr. 05. 2014
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 28, 2013	Annual	Mar. 28, 2014
Preamplifier	H.P.	8447F	2944A03909	Jun. 28, 2013	Annual	Jun. 28, 2014
Preamplifier	R&S	SCU 18	1391123	Sep. 30, 2013	Annual	Sep. 30, 2014
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	Jun. 13, 2013	Annual	Jun. 13, 2014
Test Receiver	R&S	ESU26	100109	Mar. 04, 2014	Annual	Mar. 04, 2015
Loop Antenna	R&S	HFH2-Z2	100118	Jul. 12, 2013	Biennial	Jul. 12, 2015
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	390	Apr. 19, 2012	Biennial	Apr. 19, 2014
Horn Antenna	R&S	HF906	100326	Nov. 01, 2013	Biennial	Nov. 01, 2015
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	BBHA9170431	Aug. 24, 2012	Biennial	Aug. 24, 2014
Antenna Master	INNCO	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	INNCO	DS 1200S	N/A	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (6.5 m x 3.5 m x 3.5 m)	N/A	N.C.R.	N/A	N.C.R.

► Support equipment

Description	Manufacturer	Model	Serial Number
N/A	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part15 Subpart C § 15.247, RSS-210 Issue8, RSS-Gen Issue3			
Standard section		Test Item(s)	Result
15.205 15.209 15.247(d)	RSS-210 A8.5	Transmitter Radiated Spurious Emissions	Complied
15.247(b)(3)	RSS-210 A8.4(4)	Maximum Conducted Output Power	Complied

1.8. Test Procedure(s)

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) and the guidance provided in KDB 558074 were used in the measurement of the DUT.

1.9. Sample calculation

Where relevant, the following sample calculation is provided:

1.9.1. Conducted test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

1.9.2. Radiation test

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) – amplifier gain(dB)

1.10. Test report revision

Revision	Report number	Date of Issue	Description
0	F690501/RF-RTL007502	2014.03.21	Initial
1	F690501/RF-RTL007502-1	2014.05.27	Modified Applicant information

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

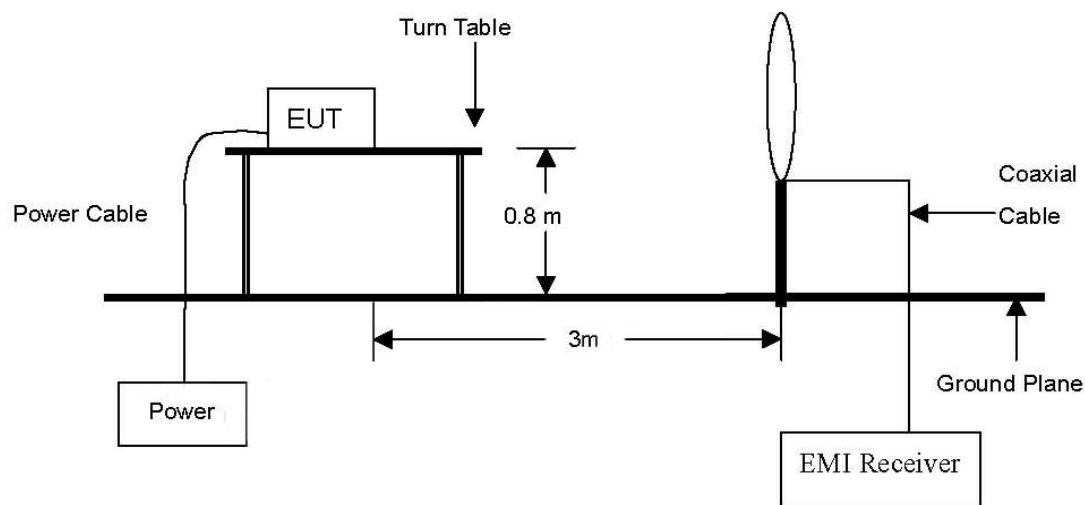


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

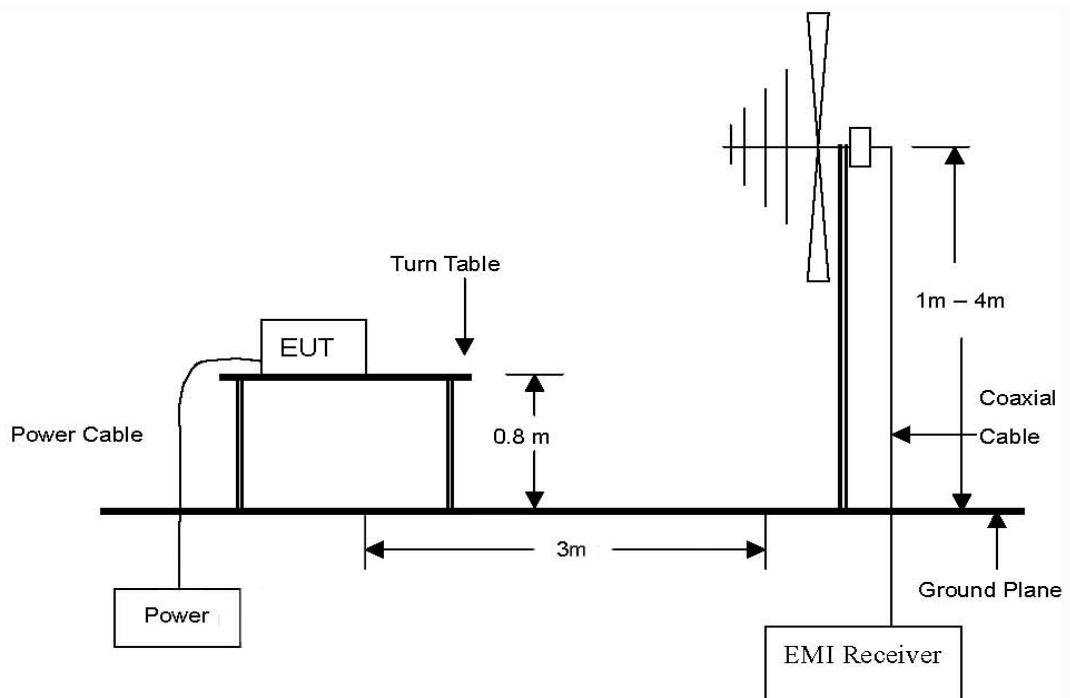

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

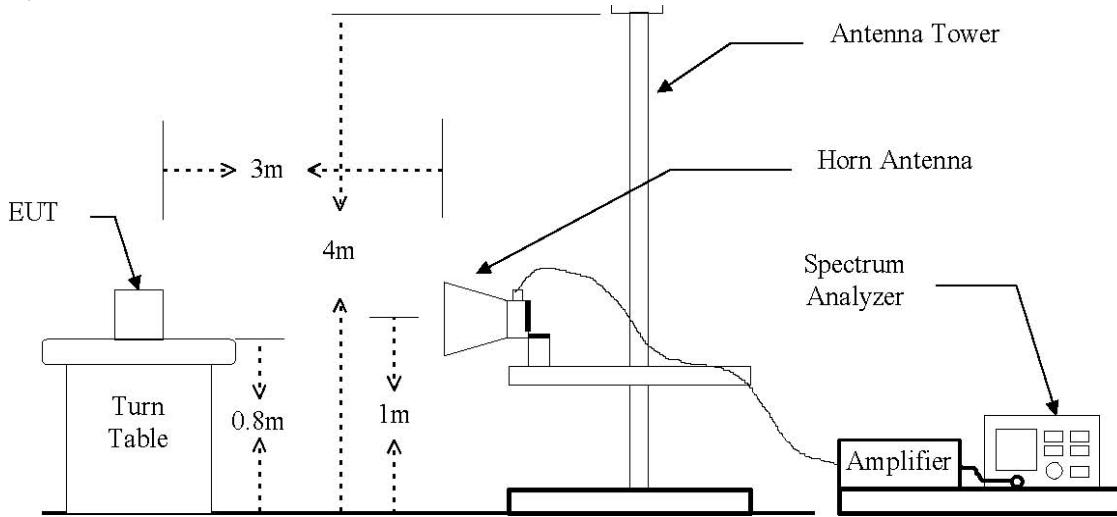

2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as defined in section §15.205(a), must also comply with the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ N/m)	Field Strength (μ N/m)
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.0 & 12.0 of KDB 558074_v03r01

2.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

1. Unwanted Emissions into Non-Restricted Frequency Bands

- The Reference Level Measurement refer to section 11.2

Set analyzer center frequency to DTS channel center frequency, SPAN \geq 1.5 times the DTS channel bandwidth, the RBW = 100 kHz and VBW \geq 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold

- Unwanted Emissions Level Measurement refer to section 11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW \geq 3 x RBW, Detector = Peak, Ensure that the number of measurement points \geq span/RBW, Sweep time = Auto couple, Trace = Max hold

2. Unwanted Emissions into Restricted Frequency Bands

- Peak Power measurement procedure refer to section 12.2.4

Set RBW = 1 MHz, VBW \geq 3 x RBW, SPAN \geq RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold

-Average Power measurements procedure refer to section 12.2.5.1

The EUT shall be configured to operate at the maximum achievable duty cycle.

Set RBW = 1 MHz, VBW \geq 3 x RBW, Detector = RMS, if span/(# of points in sweep) \leq (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied then the detector mode shall be set to peak,

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Averaging type = power(i.e., RMS).

- 1) As an alternative the detector and averaging type may be set for linear voltage averaging.
- 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used. Sweep time = auto, Perform a trace average of at least 100 traces.
3. Sweep time = auto, perform a trace average of at least 100 traces.

3. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test Results

Ambient temperature : (23 ± 2) °C

Relative humidity : 47 % R.H.

2.4.1. Radiated Spurious Emission (Worst case configuration_11b mode, 1 Mbps, middle channel)

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. All reading values are peak values.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
162.32	40.10	Peak	H	8.44	-25.64	22.90	43.50	20.60
202.78	37.20	Peak	H	11.81	-25.31	23.70	43.50	19.80
243.36	46.47	Peak	H	13.58	-25.05	35.00	46.00	11.00
284.06	37.46	Peak	H	14.76	-24.82	27.40	46.00	18.60
400.02	44.06	Peak	H	16.78	-25.14	35.70	46.00	10.30
Above 500.00	Not detected	-	-	-	-	-	-	-

Remark:

1. All spurious emission at channels are almost the same below 1 GHz, so that the middle channel was chosen at representative in final test.
2. Actual = Reading + AF + AMP + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040 <http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

2.4.2. Spurious Radiated Emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB.

DSSS : 802.11b(1 Mbps)

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 390.00	24.74	Peak	H	28.05	6.25	59.04	74.00	14.96
*2 390.00	15.73	Average	H	28.05	6.25	50.03	54.00	3.97

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 824.16	45.66	Peak	H	32.31	-34.27	43.70	74.00	30.30
*4 824.16	42.00	Average	H	32.31	-34.27	40.04	54.00	13.96
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 874.20	41.94	Peak	H	32.79	-33.73	41.00	74.00	33.00
*4 874.20	35.76	Average	H	32.79	-33.73	34.82	54.00	19.18
Above 4 900.00	Not detected	-	-	-	-	-	-	-

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	24.59	Peak	H	28.31	6.27	59.17	74.00	14.84
*2 483.50	15.58	Average	H	28.31	6.27	50.16	54.00	3.85

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 924.00	39.82	Peak	H	33.10	-33.61	39.31	74.00	34.69
*4 924.00	33.23	Average	H	33.10	-33.61	32.72	54.00	21.28
Above 5 000.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

OFDM : 802.11g(6 Mbps)

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 390.00	30.14	Peak	H	28.05	6.25	64.44	74.00	9.56
*2 390.00	17.45	Average	H	28.05	6.25	51.75	54.00	2.25

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*4 824.00	48.04	Peak	H	32.31	-34.27	46.08	74.00	27.92
*4 824.00	36.79	Average	H	32.31	-34.27	34.83	54.00	19.17
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*4 874.00	44.33	Peak	H	32.79	-33.74	43.38	74.00	30.63
*4 874.00	31.76	Average	H	32.79	-33.74	30.81	54.00	23.19
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*2 483.50	34.06	Peak	H	28.31	6.27	68.64	74.00	5.36
*2 483.50	18.05	Average	H	28.31	6.27	52.63	54.00	1.37

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*4 923.11	37.43	Peak	H	33.10	-33.62	36.91	74.00	37.09
*4 923.11	27.16	Average	H	33.10	-33.62	26.64	54.00	27.36
Above 5 000.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

OFDM : 802.11n HT20(MCS0)

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ N/m)	Margin (dB)
*2 390.00	32.21	Peak	H	28.05	6.25	66.51	74.00	7.49
*2 390.00	18.71	Average	H	28.05	6.25	53.01	54.00	0.99

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*4 824.00	32.66	Peak	H	32.31	-34.27	30.70	74.00	43.30
*4 824.00	28.13	Average	H	32.31	-34.27	26.17	54.00	27.84
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*4 874.00	42.09	Peak	H	32.79	-33.74	41.14	74.00	32.86
*4 874.00	30.84	Average	H	32.79	-33.74	29.89	54.00	24.11
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	31.92	Peak	H	28.31	6.27	66.50	74.00	7.50
*2 483.50	18.17	Average	H	28.31	6.27	52.75	54.00	1.25

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 924.00	33.43	Peak	H	33.10	-33.61	32.92	74.00	41.09
*4 924.00	27.01	Average	H	33.10	-33.61	26.50	54.00	27.50
Above 5 000.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

OFDM : 802.11n HT40(MCS0)

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ N/m)	Margin (dB)
*2 390.00	30.38	Peak	H	28.05	6.25	64.68	74.00	9.32
*2 390.00	18.28	Average	H	28.05	6.25	52.58	54.00	1.42

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*4 844.14	29.86	Peak	H	32.56	-34.44	27.98	74.00	46.02
*4 844.14	23.15	Average	H	32.56	-34.44	21.27	54.00	32.74
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
*4 874.32	37.91	Peak	H	32.79	-33.74	36.96	74.00	37.04
*4 874.32	30.00	Average	H	32.79	-33.74	29.05	54.00	24.95
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	30.16	Peak	H	28.31	6.27	64.74	74.00	9.26
*2 483.50	18.29	Average	H	28.31	6.27	52.87	54.00	1.13

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 904.16	28.75	Peak	H	32.28	-34.58	26.45	74.00	47.56
*4 904.16	22.23	Average	H	32.28	-34.58	19.93	54.00	34.08
Above 5 000.00	Not detected	-	-	-	-	-	-	-


Remarks :

- “**” means the restricted band.
- Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
- Average test would be performed if the peak result were greater than the average limit.
- Actual = Reading + AF + AMP + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. Maximum Conducted Output Power Measurement

3.1. Test Setup

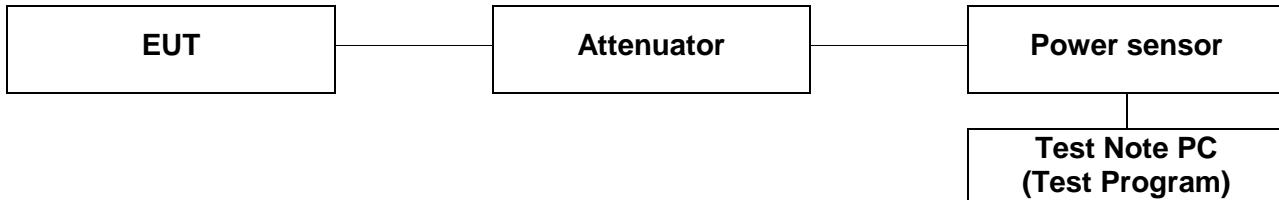

3.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz band: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna elements. The average must not include any intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows section 9.1.3 & 9.2.3 of FCC KDB Publication 558074_v03r01

- Peak power meter method

-The maximum peak conducted output power can be measured using a broad band peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast, average-responding diode type detector.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- Average power meter method

- Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0 of KDB 558074_v03r01.

Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the broadband power meter and power sensor. The power sensor employs a $VBW = 65 \text{ MHz}$ which is greater than the DTS bandwidth
3. Measure peak & average power each channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040 <http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

3.4. Test Results

Ambient temperature : (23 ± 2) °C

Relative humidity : 47 % R.H.

Mode	Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
DSSS (802.11b)	Low	2 412	1	21.14	17.79	20.93
			2		17.76	20.85
			5.5		17.72	20.84
			11		17.68	20.76
	Middle	2 437	1	21.16	17.89	20.86
			2		17.86	20.77
			5.5		17.83	20.74
			11		17.77	20.73
	High	2 462	1	21.23	17.14	20.04
			2		17.07	20.02
			5.5		17.04	19.94
			11		16.98	19.88
OFDM (802.11g)	Low	2 412	6	21.13	11.77	16.47
			9		11.74	16.45
			12		11.72	16.44
			18		11.69	16.41
			24		11.68	16.39
			36		11.66	16.36
			48		11.65	16.34
			54		11.63	16.33
	Middle	2 437	6	21.18	17.92	22.86
			9		17.90	22.83
			12		17.87	22.80
			18		17.85	22.78
			24		17.83	22.75
			36		17.82	22.73
			48		17.80	22.72
			54		17.78	22.70
	High	2 462	6	21.26	12.69	16.61
			9		12.67	16.59
			12		12.64	16.56
			18		12.62	16.55
			24		12.60	16.54
			36		12.57	16.53
			48		12.56	16.52
			54		12.54	16.51

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040 <http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

Mode	Channel	Channel Frequency (MHz)	Data rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
OFDM (802.11n_HT20)	Low	2 412	MCS0	21.10	11.26	15.98
			MCS1		11.25	15.97
			MCS2		11.24	15.94
			MCS3		11.21	15.92
			MCS4		11.18	15.89
			MCS5		11.16	15.87
			MCS6		11.13	15.85
			MCS7		11.11	15.84
	Middle	2 437	MCS0	21.21	16.98	21.82
			MCS1		16.96	21.81
			MCS2		16.93	21.78
			MCS3		16.90	21.76
			MCS4		16.88	21.73
			MCS5		16.87	21.70
			MCS6		16.85	21.67
			MCS7		16.84	21.66
	High	2 462	MCS0	21.25	11.85	16.85
			MCS1		11.83	16.84
			MCS2		11.80	16.83
			MCS3		11.77	16.81
			MCS4		11.74	16.78
			MCS5		11.72	16.77
			MCS6		11.70	16.75
			MCS7		11.69	16.72

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Mode	Channel	Channel Frequency (MHz)	Data rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
OFDM (802.11n_HT40)	Low	2 422	MCS0	21.13	8.47	13.98
			MCS1		8.44	13.95
			MCS2		8.43	13.94
			MCS3		8.42	13.91
			MCS4		8.41	13.88
			MCS5		8.40	13.86
			MCS6		8.38	13.84
			MCS7		8.37	13.81
	Middle	2 437	MCS0	21.22	16.01	20.88
			MCS1		15.98	20.87
			MCS2		15.96	20.84
			MCS3		15.94	20.81
			MCS4		15.93	20.78
			MCS5		15.90	20.77
			MCS6		15.88	20.74
			MCS7		15.85	20.71
	High	2 452	MCS0	21.24	9.18	14.57
			MCS1		9.15	14.55
			MCS2		9.12	14.54
			MCS3		9.10	14.53
			MCS4		9.07	14.51
			MCS5		9.05	14.49
			MCS6		9.04	14.46
			MCS7		9.02	14.45

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040 <http://www.sgsgroup.kr>

4. Antenna Requirement

4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

4.2. Antenna Connected Construction

Antenna used in this product is Integral type with gain of 0.43 dB i.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

<http://www.sgsgroup.kr>

RTT5041-20(2014.01.20)(2)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)