

FCC/IC Test Report (BT-EDR)

Report No.: RF150401E01-2

FCC ID: PPD-QCNFA425

IC: 4104A-QCNFA425

Test Model: QCNFA425

Received Date: Apr. 01, 2015

Test Date: Apr. 29 to July 24, 2015

Issued Date: Aug. 07, 2015

Applicant: Qualcomm Atheros, Inc.

Address: 1700 Technology Drive, San Jose, CA 95110

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (3): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City, Taiwan
R.O.C.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Modification Record	7
3 General Information	8
3.1 General Description of EUT (BT-EDR)	8
3.2 Description of Antenna	10
3.3 Description of Test Modes	11
3.3.1 Test Mode Applicability and Tested Channel Detail	12
3.4 Duty Cycle of Test Signal	14
3.5 Description of Support Units	15
3.5.1 Configuration of System under Test	15
3.6 General Description of Applied Standards	16
4 Test Types and Results	17
4.1 Maximum Output Power Measurement	17
4.1.1 Limits of Maximum Output Power Measurement	17
4.1.2 Test Setup	17
4.1.3 Test Instruments	17
4.1.4 Test Procedure	17
4.1.5 Deviation from Test Standard	18
4.1.6 EUT Operating Condition	18
4.1.7 Test Results	19
4.2 Channel Bandwidth Measurement	21
4.2.1 Limits of Channel Bandwidth Measurement	21
4.2.2 Test Setup	21
4.2.3 Test Instruments	21
4.2.4 Test Procedure	21
4.2.5 Deviation from Test Standard	21
4.2.6 EUT Operating Condition	21
4.2.7 Test Results	22
4.3 Occupied Bandwidth Measurement	24
4.3.1 Test Setup	24
4.3.2 Test Instruments	24
4.3.3 Test Procedure	24
4.3.4 Deviation from Test Standard	24
4.3.5 EUT Operating Conditions	24
4.3.6 Test Results	25
4.4 Hopping Channel Separation Measurement	27
4.4.1 Limits of Hopping Channel Separation Measurement	27
4.4.2 Test Setup	27
4.4.3 Test Instruments	27
4.4.4 Test Procedure	27
4.4.5 Deviation from Test Standard	27
4.4.6 Test Results	28
4.5 Number of Hopping Frequency Used Measurement	30
4.5.1 Limits of Hopping Frequency Used Measurement	30
4.5.2 Test Setup	30
4.5.3 Test Instruments	30
4.5.4 Test Procedure	30
4.5.5 Deviation from Test Standard	30
4.5.6 Test Results	31
4.6 Dwell Time on Each Channel	32

4.6.1	Limits of Dwell Time on Each Channel Measurement.....	32
4.6.2	Test Setup.....	32
4.6.3	Test Instruments	32
4.6.4	Test Procedures.....	32
4.6.5	Deviation from Test Standard	32
4.6.6	Test Results	33
4.7	Conducted Out of Band Emission Measurement.....	41
4.7.1	Limits Of Conducted Out Of Band Emission Measurement	41
4.7.2	Test Instruments	41
4.7.3	Test Procedure	41
4.7.4	Deviation from Test Standard	41
4.7.5	EUT Operating Condition	41
4.7.6	Test Results	41
4.8	Radiated Emission and Bandedge Measurement.....	44
4.8.1	Limits of Radiated Emission and Bandedge Measurement	44
4.8.2	Test Instruments	45
4.8.3	Test Procedures.....	46
4.8.4	Deviation from Test Standard	46
4.8.5	Test Set Up	47
4.8.6	EUT Operating Conditions.....	47
4.8.7	Test Results	48
4.9	Conducted Emission Measurement	62
4.9.1	Limits of Conducted Emission Measurement	62
4.9.2	Test Instruments	62
4.9.3	Test Procedures.....	63
4.9.4	Deviation From Test Standard	63
4.9.5	Test Setup.....	63
4.9.6	EUT Operating Condition	63
4.9.7	Test Results	64
5	Pictures of Test Arrangements.....	66
	Appendix – Information on the Testing Laboratories	67



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150401E01-2	Original release.	Aug. 07, 2015



A D T

1 Certificate of Conformity

Product: Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 1216 Type Card

Brand: Qualcomm Atheros

Test Model: QCNFA425

Sample Status: ENGINEERING SAMPLE

Applicant: Qualcomm Atheros, Inc.

Test Date: Apr. 29 to July 24, 2015

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013
Canada RSS-247 Issue 1 (2015-05)
Canada RSS-Gen Issue 4 (2014-11)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : C. K., **Date:** Aug. 07, 2015
Claire Kuan / Specialist

Approved by : May Chen, **Date:** Aug. 07, 2015
May Chen / Manager

2 Summary of Test Results

APPLIED STANDARD: 47 CFR FCC Part 15, Subpart C (SECTION 15.247) ; RSS-247; RSS-Gen				
STANDARD SECTION		Test Item	Result	Remarks
FCC Clause	RSS-Gen RSS-247			
15.207	RSS-Gen 8.8	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.40dB at 0.19687MHz.
15.247(a)(1)(iii)	RSS-247 5.1 (4)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	RSS-247 5.1 (4)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	RSS-247 5.1 (1)(2)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	RSS-247 5.4 (2)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.205 15.209 15.247(d)	RSS-247 5.5	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.5dB at 156.84MHz.
-	RSS-Gen 6.6	Occupied Bandwidth Measurement	PASS	Meet the requirement of limit
15.247(d)	-	Antenna Port Emission	PASS	Meet the requirement of limit.
15.203	-	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.72 dB
	6GHz ~ 18GHz	4.00 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (BT-EDR)

Product	Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 1216 Type Card
Brand	Qualcomm Atheros
Test Model	QCNFA425
Status of EUT	ENGINEERING SAMPLE
Test Software Version	QRCT_CONN.exe
Power Supply Rating	3.3Vdc form host equipment
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	79
Output Power	18.072mW
Antenna Type	See item 3.2
Antenna Connector	See item 3.2
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. There are Bluetooth technology and WLAN technology used for the EUT.
2. The EUT support multiple function, therefore the WLAN OFDM will be cover BT OFDM (low power) scenario.
3. The modular has two variant designs as following table:

Variant No.	Difference	Description
SKU #1	Dual antenna connector version	Support TX diversity for WLAN/BT transmit at J1 or J2 antenna connector.
SKU #2	Single antenna connector version	WLAN/BT transmit at J2 antenna connector.
Note: From the above Variants, SKU #1 was selected as representative model for the test and its data was recorded in this report.		

4. The power setting are list as below:

Modulation Mode	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting
GFSK	2402	9	2440	9	2480	9
8DPSK	2402	9	2440	9	2480	9

5. WLAN/BT coexistence mode:

◆ 1x1 WLAN + BT:

- 5GHz 802.11a/an (or 11ac) transmit concurrent with BT.
- 2.4GHz: timely shared coexistence.

6. The emission (conducted & radiated emission) of the simultaneous operation (WiFi <5GHz> & Bluetooth) have been evaluated and no non-compliance found. The detail combinations of transmitters / frequencies / modes as below table

Mode	Available Channel	Tested Channel	Modulation Technology
5 GHz (802.11a) + Bluetooth (GFSK)	36 to 165	52	OFDM
	0 to 78	39	FHSS

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Antenna

The antenna gain was declared by client; please refer to the following table:

Ant. No.	Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dB)	5GHz Cable Loss (dB)	Connector Type	Cable Length (mm)
1	Chain (0)	WNC	81.EBJ15.005	PIFA	3.00	5.15~5.35GHz: 2.56	1.15	5.15~5.35GHz: 1.70	IPEX	300
						5.47~5.725GHz: 4.76		5.47~5.725GHz: 1.74		
						5.725~5.85GHz: 4.76		5.725~5.85GHz: 1.79		
	Chain (1)	WNC	81.EBJ15.005	PIFA	3.62	5.15~5.35GHz: 3.08	1.15	5.15~5.35GHz: 1.70	IPEX	300
						5.47~5.725GHz: 3.31		5.47~5.725GHz: 1.74		
						5.725~5.85GHz: 2.42		5.725~5.85GHz: 1.79		
2	Chain (0)	WNC	81.ED415.001	PIFA	0.22	5.15~5.35GHz: 5.56	0.96	5.15~5.35GHz: 1.29	IPEX	300
						5.47~5.725GHz: 5.03		5.47~5.725GHz: 1.36		
						5.725~5.85GHz: 3.14		5.725~5.85GHz: 1.38		
	Chain (1)	WNC	81.ED415.001	PIFA	1.48	5.15~5.35GHz: 5.17	0.96	5.15~5.35GHz: 1.29	IPEX	300
						5.47~5.725GHz: 5.34		5.47~5.725GHz: 1.36		
						5.725~5.85GHz: 2.94		5.725~5.85GHz: 1.38		

Note: 1. Above antenna gains of antenna are Total (H+V).

Following antenna combination(s) was (were) selected as representative mode for test or evaluate in this report as listed.

[2400~2483.5MHz:](#)

Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dB)	Connector Type	Cable Length (mm)
Chain (0)+(1)	WNC	81.EBJ15.005	PIFA	3.62	1.15	IPEX	300

3.3 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.3.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT's antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	GFSK	DH5
0 to 78	0, 39, 78	8DPSK	3DH5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
0 to 78	39	GFSK	DH5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
0 to 78	39	GFSK	DH5

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	GFSK	DH5
0 to 78	0, 39, 78	8DPSK	3DH5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE $\geq$ 1G	23deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
RE<1G	24deg. C, 66%RH	120Vac, 60Hz	Robert Cheng
PLC	26deg. C, 70%RH	120Vac, 60Hz	Barry Lee
APCM	25deg. C, 65%RH	120Vac, 60Hz	Anderson Chen

3.4 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

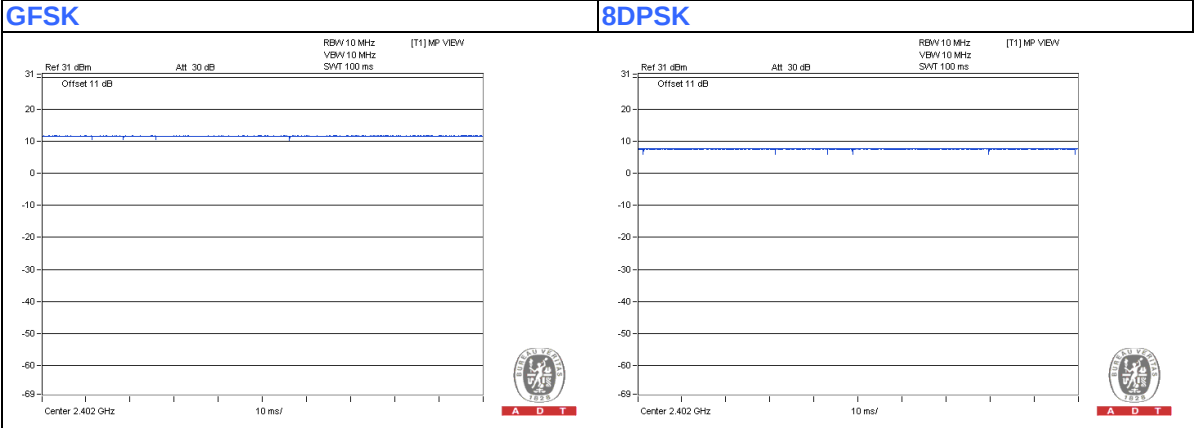


3.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	NOTEBOOK COMPUTER	Lenovo	0769	NA	NA	Supplied by Client
B	PCI-E Test tool	Qualcomm Atheros	NA	NA	NA	Supplied by Client

NOTE: All power cords of the above support units are non-shielded (1.8 m).

3.5.1 Configuration of System under Test



3.6 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
FCC Public Notice DA 00-705
Canada RSS-247 Issue 1 (2015-05)
Canada RSS-Gen Issue 4 (2014-11)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.


4 Test Types and Results

4.1 Maximum Output Power Measurement

4.1.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

4.1.2 Test Setup



4.1.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

NOTE:

1. The test was performed in Oven room B.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested Date: July 24, 2015

4.1.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.1.5 Deviation from Test Standard

No deviation.


4.1.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.1.7 Test Results


Channel	Frequency (MHZ)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	17.824	12.560	12.51	10.99	125	Pass
39	2441	18.072	12.735	12.57	11.05	125	Pass
78	2480	17.824	12.388	12.51	10.93	125	Pass

GFSK

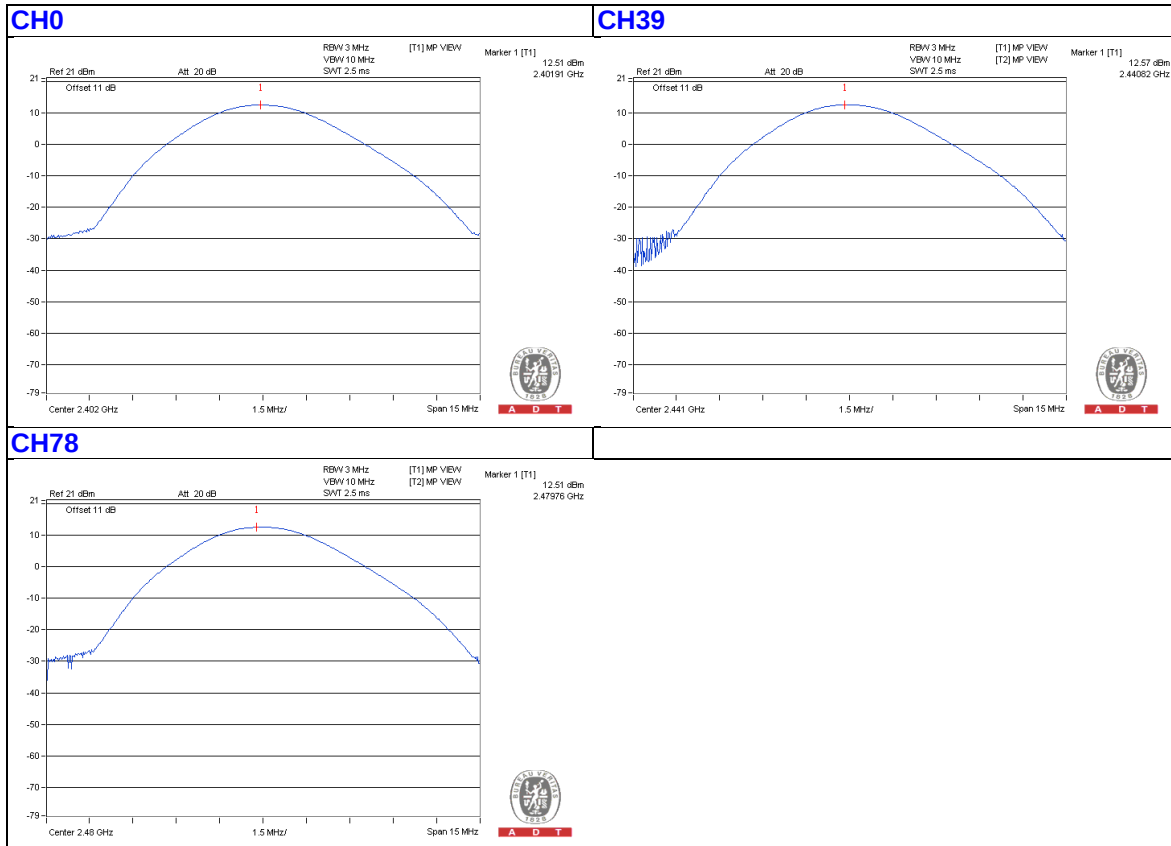


8DPSK


CH0

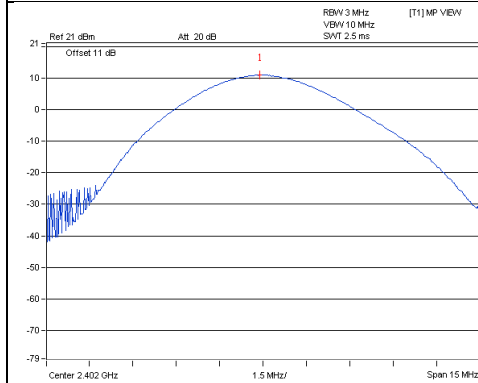

CH39

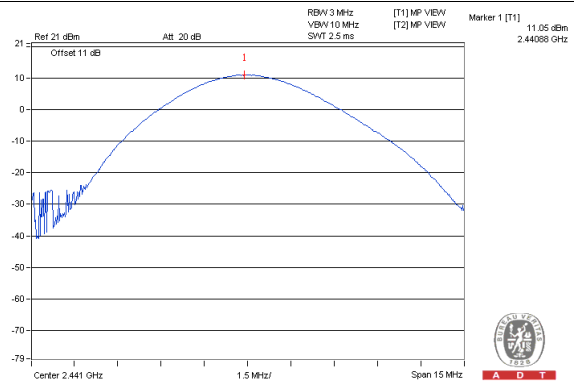

CH78

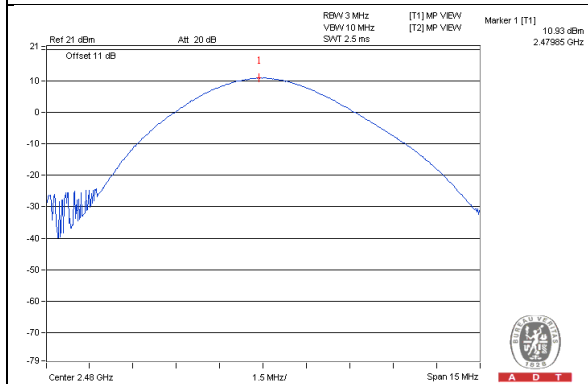


4.2 Channel Bandwidth Measurement

4.2.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.2.2 Test Setup



4.2.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

- NOTE:**
1. The test was performed in Oven room B.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 24, 2015

4.2.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.2.7 Test Results


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.95	1.30
39	2441	0.95	1.30
78	2480	0.95	1.30

GFSK


CH0

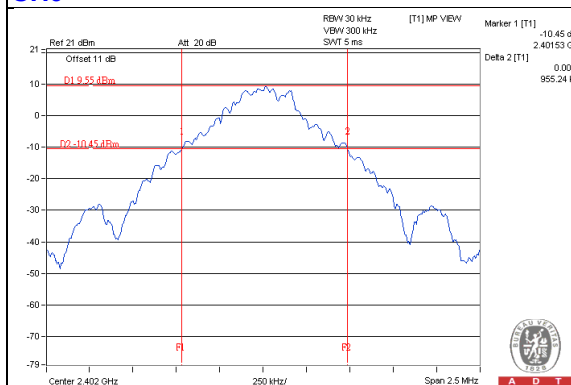

CH39

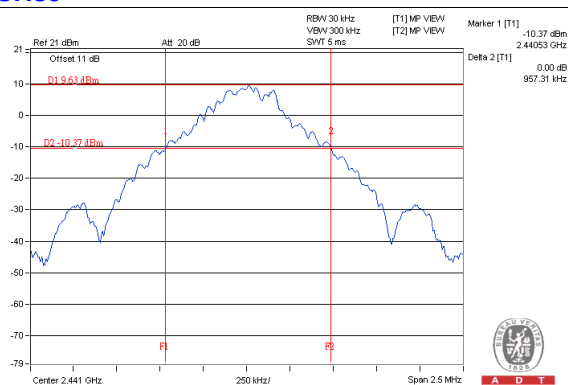


CH78

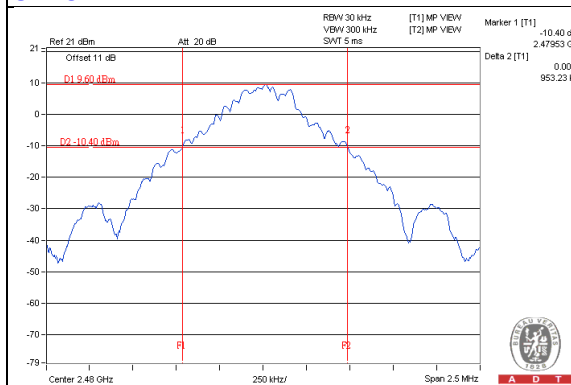


8DPSK


CH0

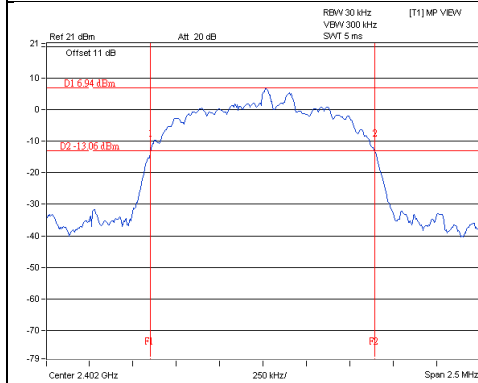

CH39

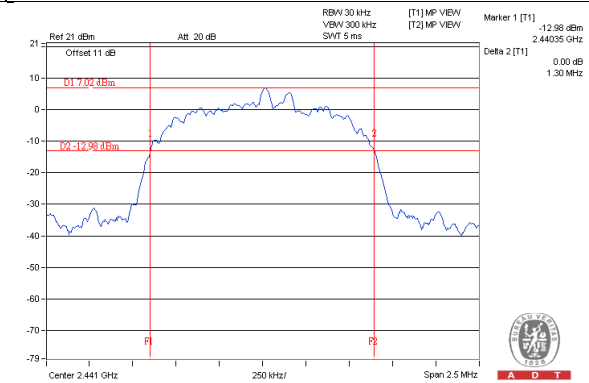


CH78

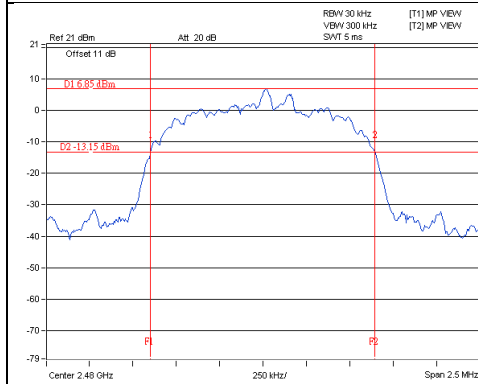

4.3 Occupied Bandwidth Measurement

4.3.1 Test Setup



4.3.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

- NOTE:**
1. The test was performed in Oven room B.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 24, 2015

4.3.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.3.4 Deviation from Test Standard

No deviation.


4.3.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 Test Results


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.99	1.22
39	2441	0.99	1.22
78	2480	0.99	1.21

GFSK

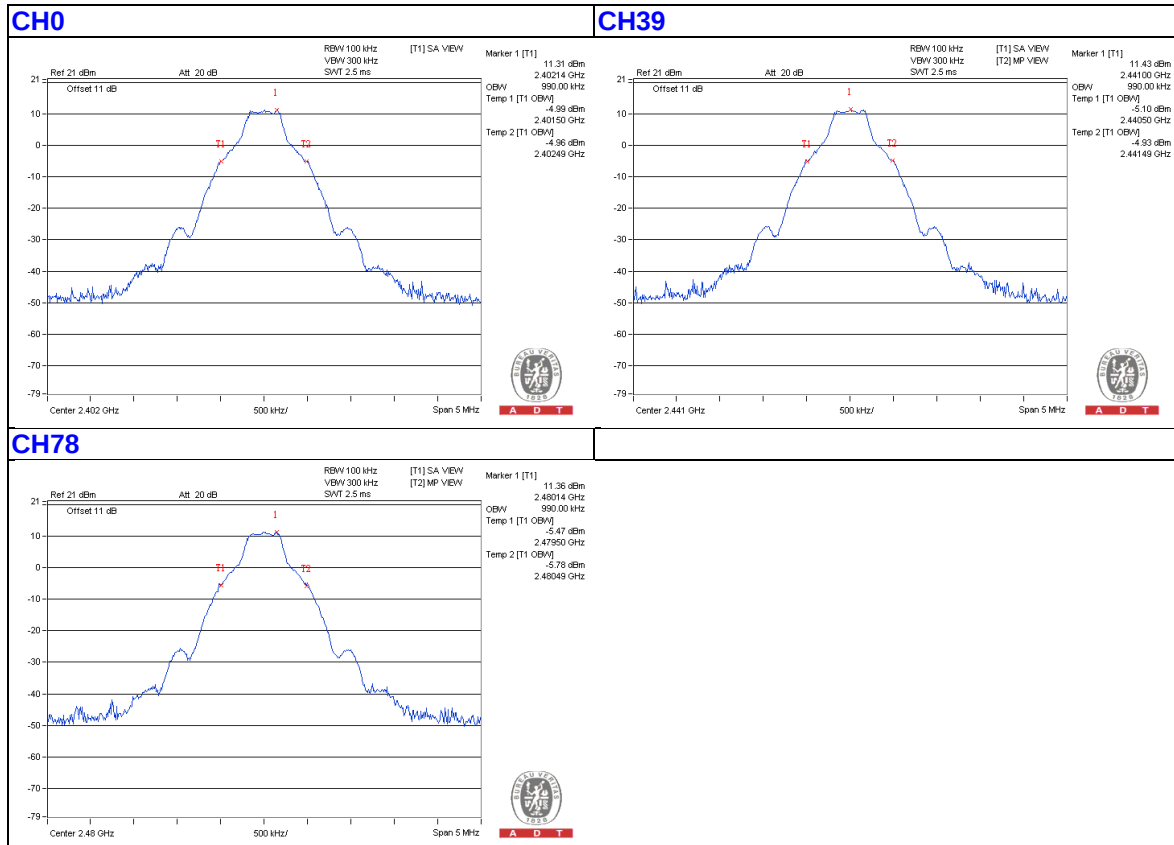


8DPSK


CHO

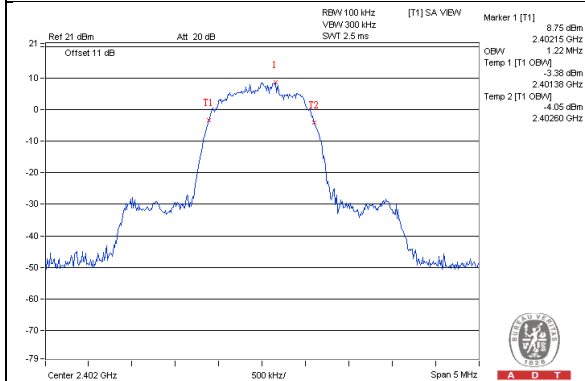

CH39

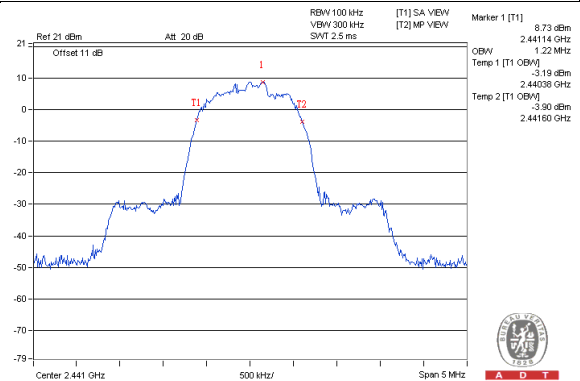

CH78

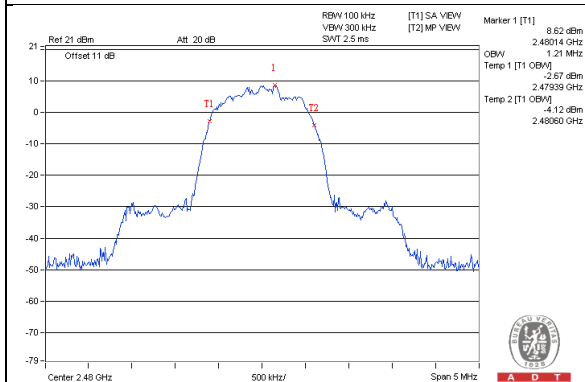


4.4 Hopping Channel Separation Measurement

4.4.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.4.2 Test Setup



4.4.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

- NOTE:**
1. The test was performed in Oven room B.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 24, 2015

4.4.4 Test Procedure

Measurement Procedure REF

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.01	0.95	1.30	0.64	0.87	Pass
39	2441	1.00	1.00	0.95	1.30	0.64	0.87	Pass
78	2480	1.00	1.00	0.95	1.30	0.64	0.87	Pass


NOTE: The minimum limit is two-third 20dB bandwidth.

GFSK

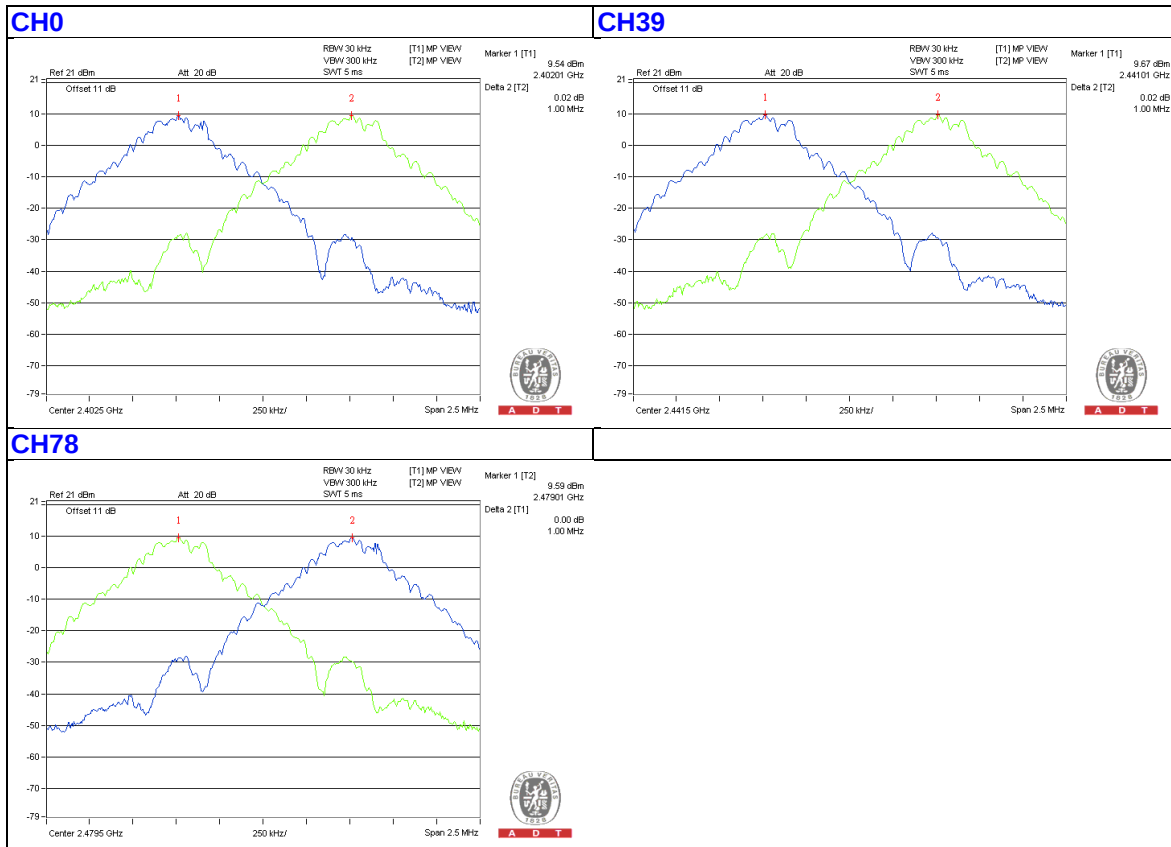


8DPSK


CH0

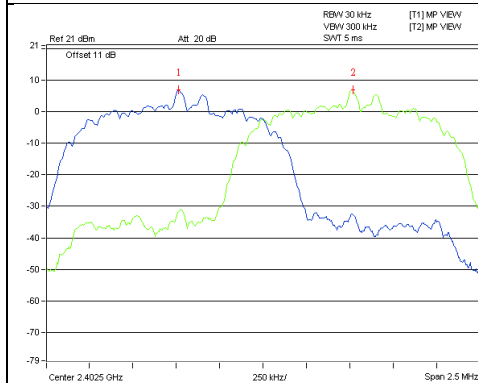

CH39

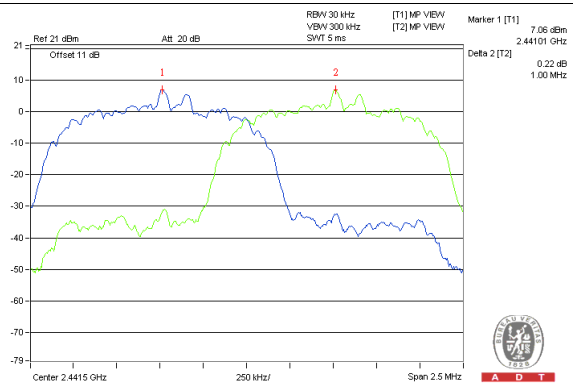

CH78

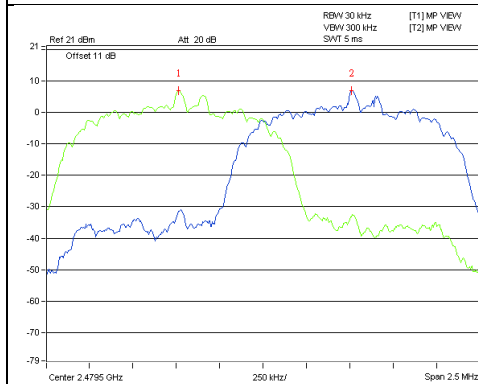


4.5 Number of Hopping Frequency Used Measurement

4.5.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

4.5.2 Test Setup



4.5.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

- NOTE:**
1. The test was performed in Oven room B.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 24, 2015

4.5.4 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


4.5.5 Deviation from Test Standard

No deviation.

4.5.6 Test Results


Normal mode:

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

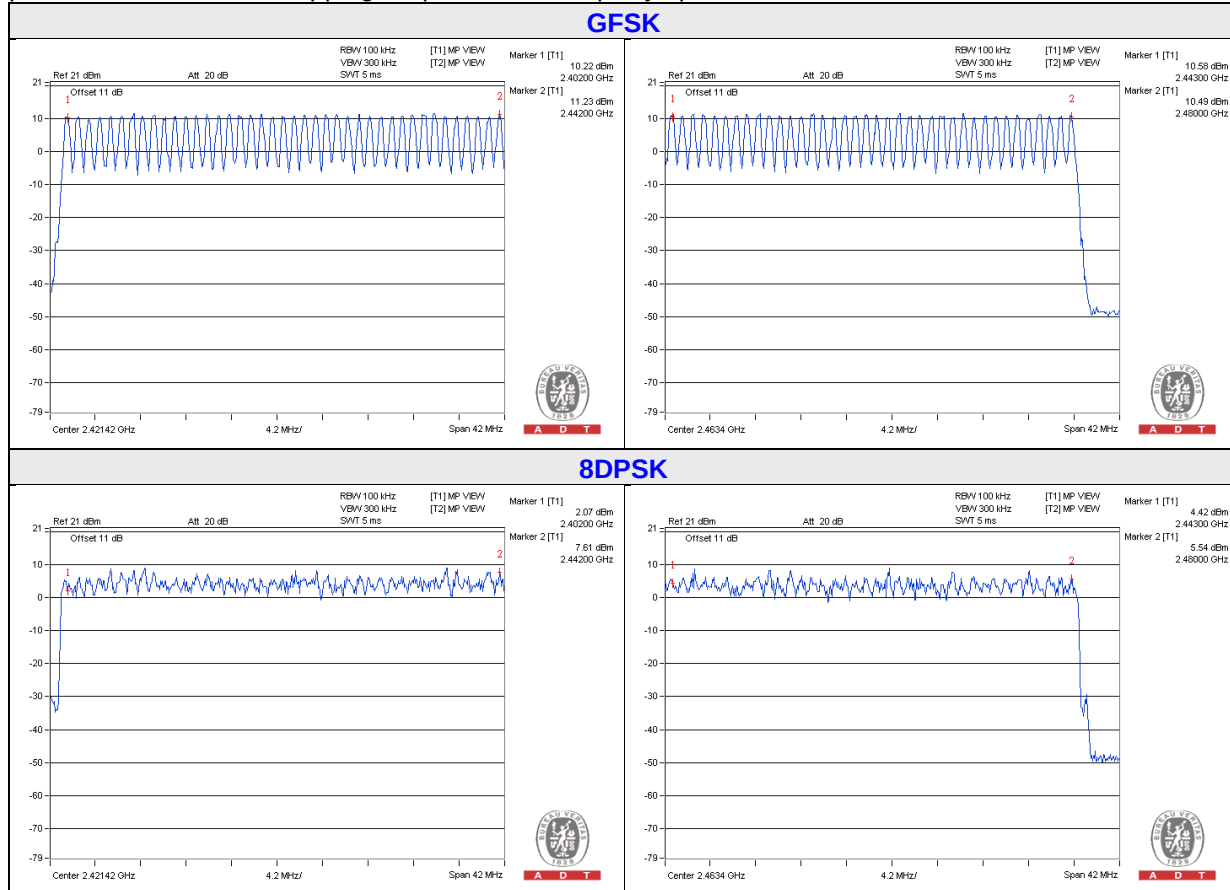

AFH mode:

There are 20 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

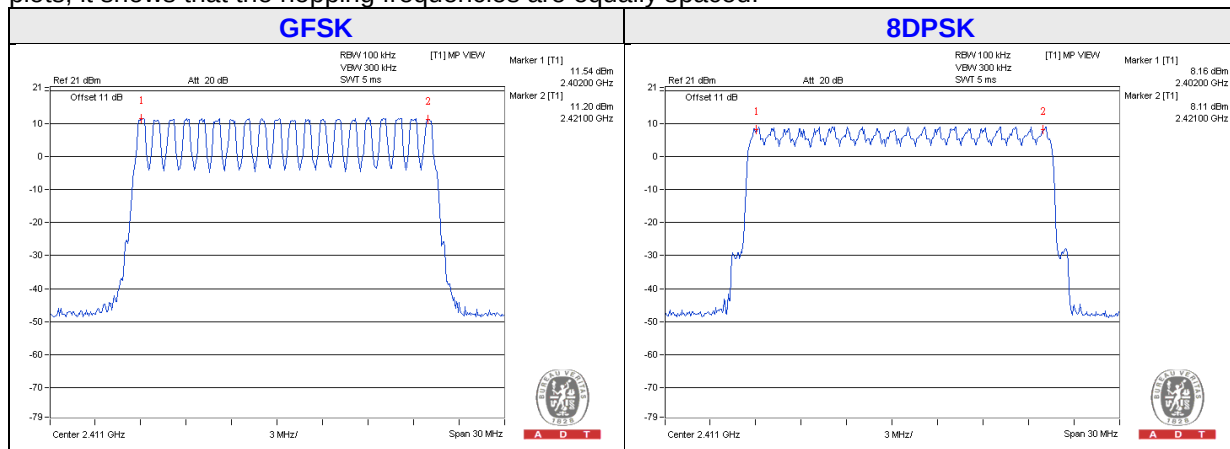


4.6 Dwell Time on Each Channel

4.6.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.6.2 Test Setup



4.6.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

- NOTE:**
1. The test was performed in Oven room B.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 24, 2015

4.6.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 Test Results


Normal mode:

GFSK


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.468	150.85	400
DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.71	291.79	400
DH5	16 (times / 5 sec) * 6.32 = 101.12 times	3.008	304.17	400

NOTE: Test plots of the transmitting time slot are shown on next page.


DH1

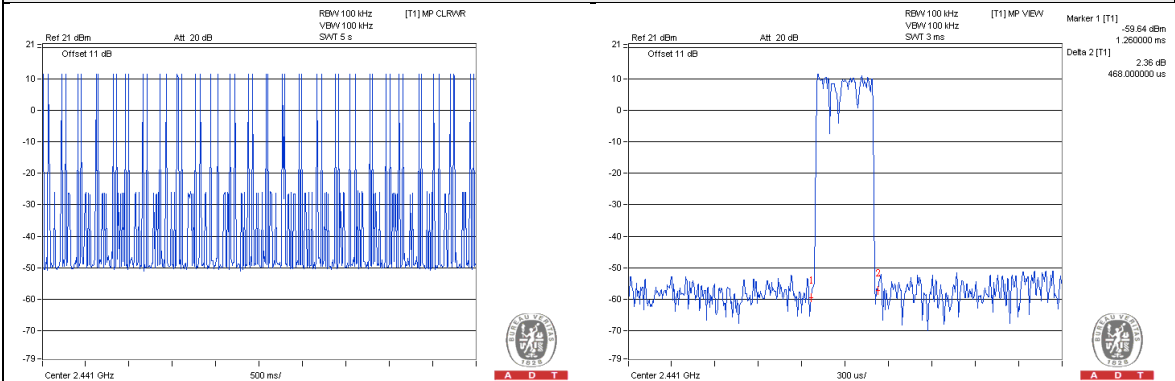

DH3

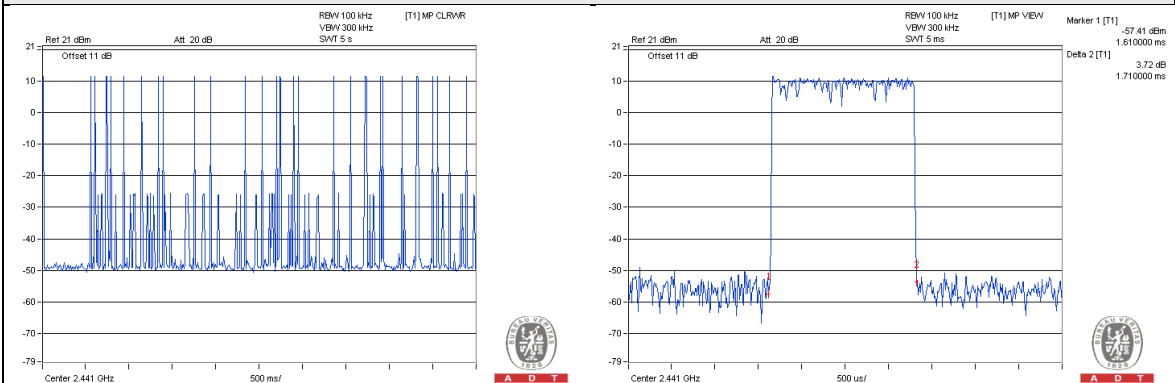

DH5

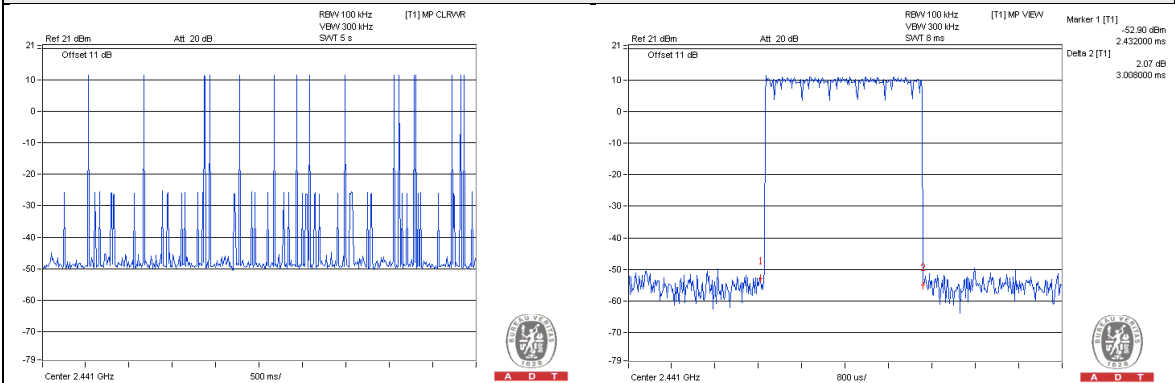


8DPSK


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.474	149.78	400
3DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.72	282.63	400
3DH5	18 (times / 5 sec) * 6.32 = 113.76 times	3.008	342.19	400

NOTE: Test plots of the transmitting time slot are shown on next page.

3DH1

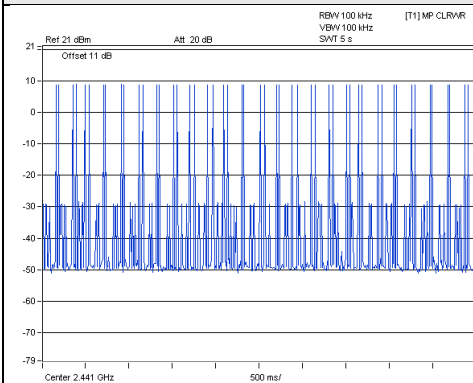


A D T

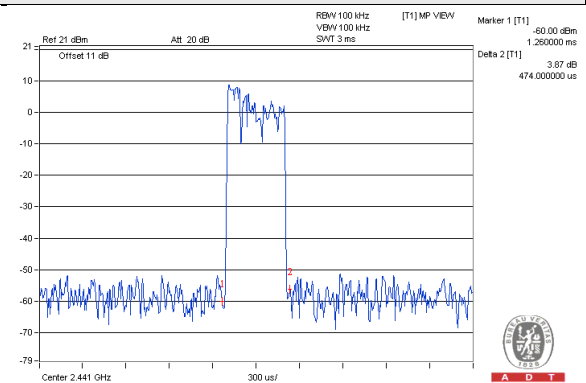


A D T

3DH3

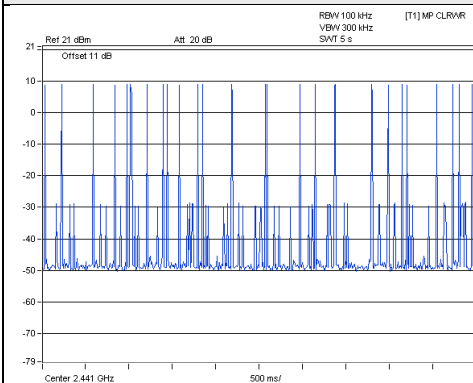


A D T

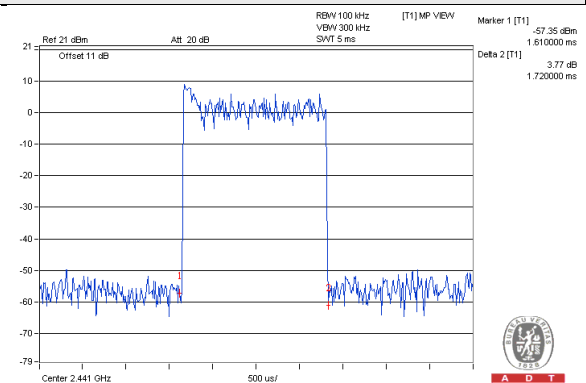


A D T

3DH5

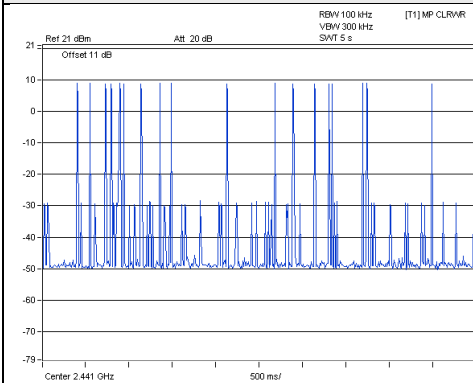

A D T

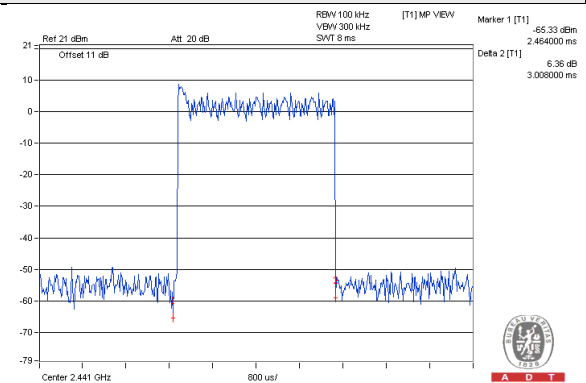


A D T

AFH mode:
GFSK


Mode	Number of transmission in a 8 (20Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316 times	0.438	138.41	400
DH3	25 (times / 5 sec) * 6.32 = 158 times	1.69	267.02	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.992	321.46	400

NOTE: Test plots of the transmitting time slot are shown on next page.


DH1

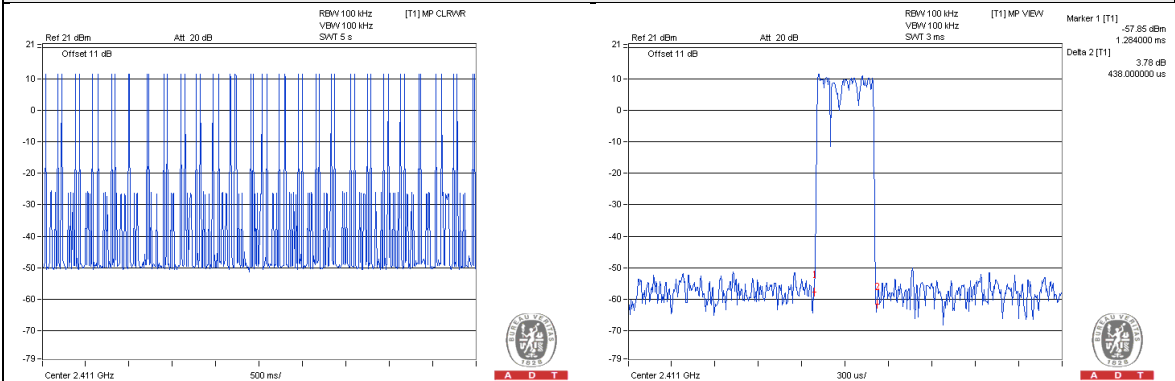

DH3

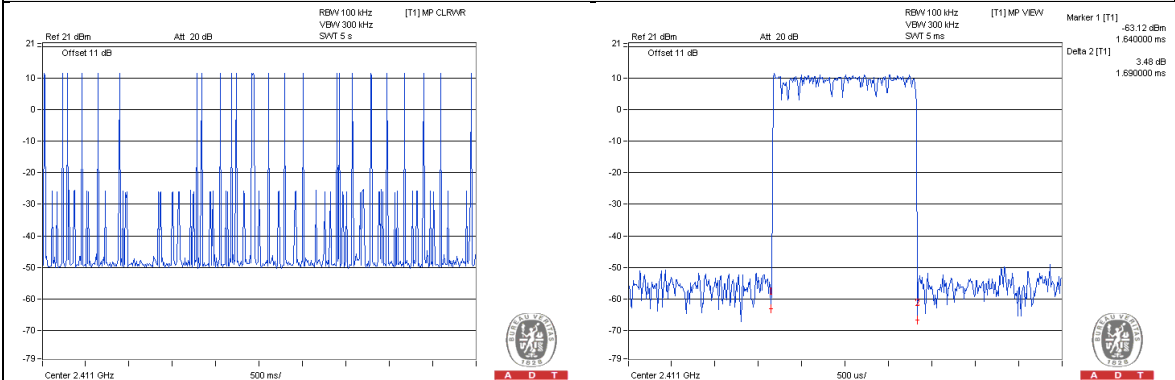

DH5

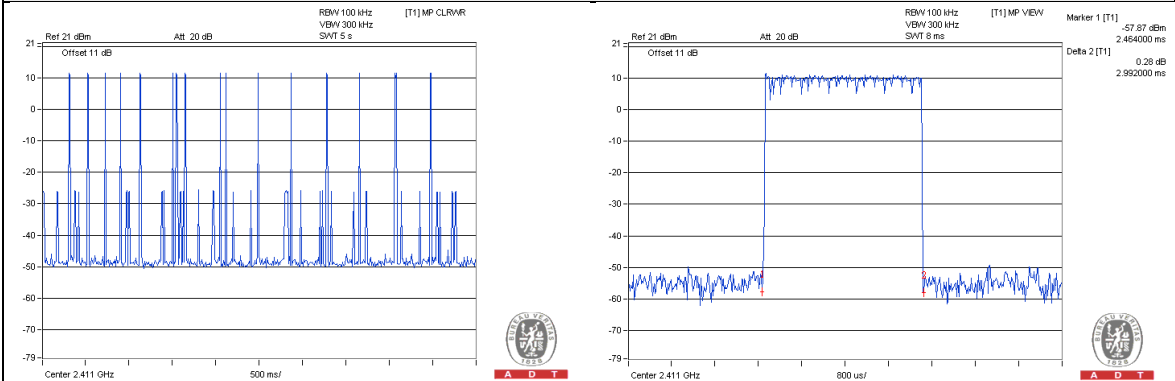


8DPSK


Mode	Number of transmission in a 8 (20Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.45	142.2	400
3DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.73	295.21	400
3DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.96	318.02	400

NOTE: Test plots of the transmitting time slot are shown on next page.


3DH1

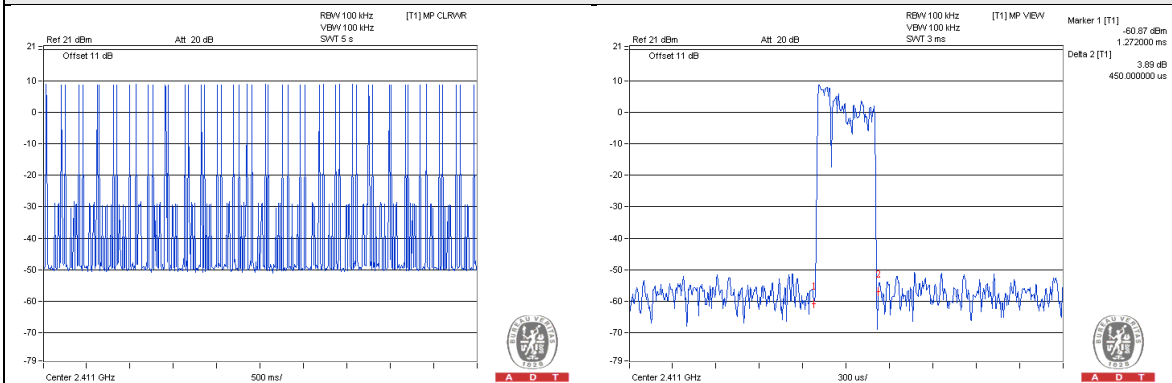

3DH3

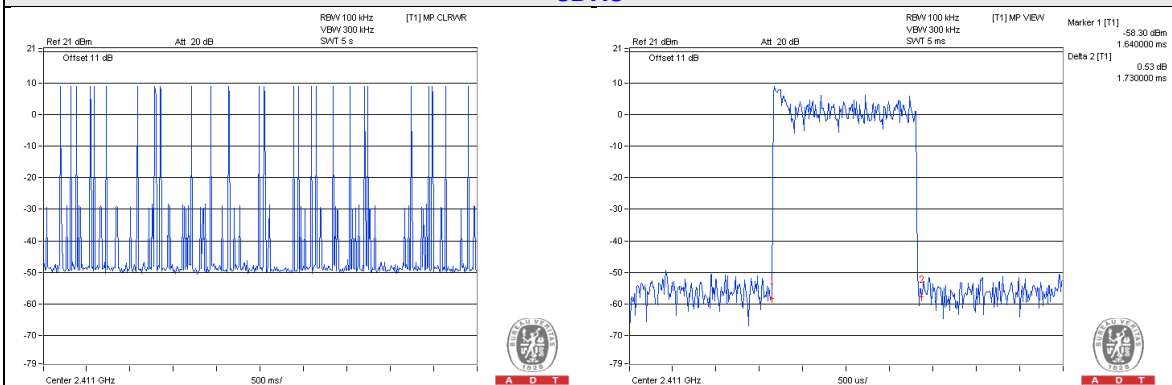

3DH5

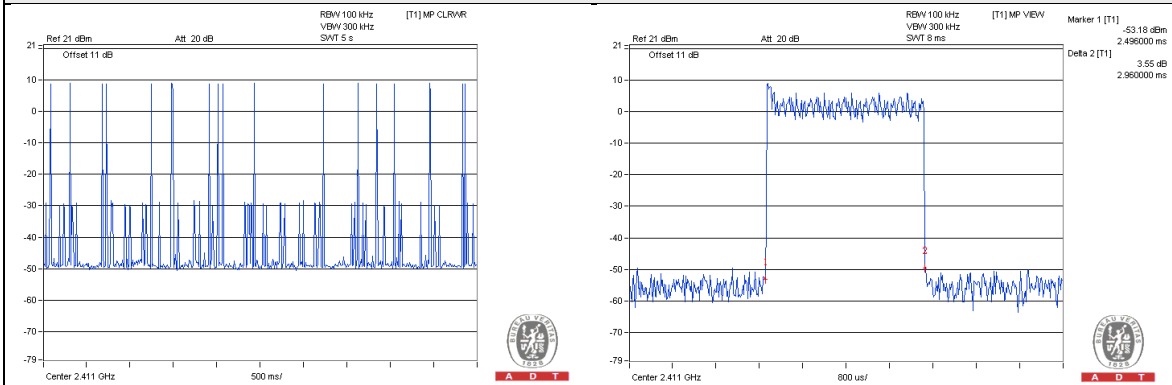

4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits Of Conducted Out Of Band Emission Measurement

Below –20dB of the highest emission level of operating band (in 100kHz RBW).

4.7.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016

NOTE:

1. The test was performed in Oven room B.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested Date: July 24, 2015

4.7.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.4 Deviation from Test Standard

No deviation.

4.7.5 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.6 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


Hopping disabled Low Channel

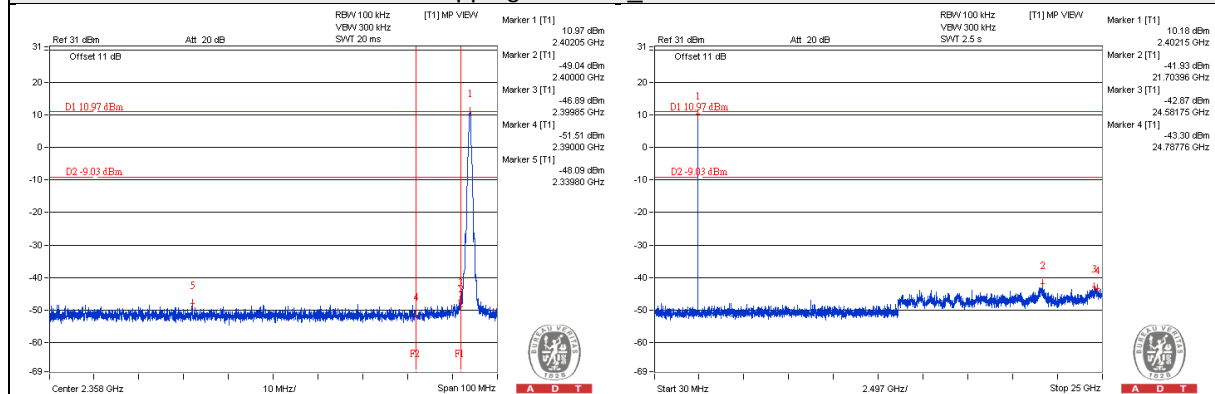


Hopping disabled High Channel

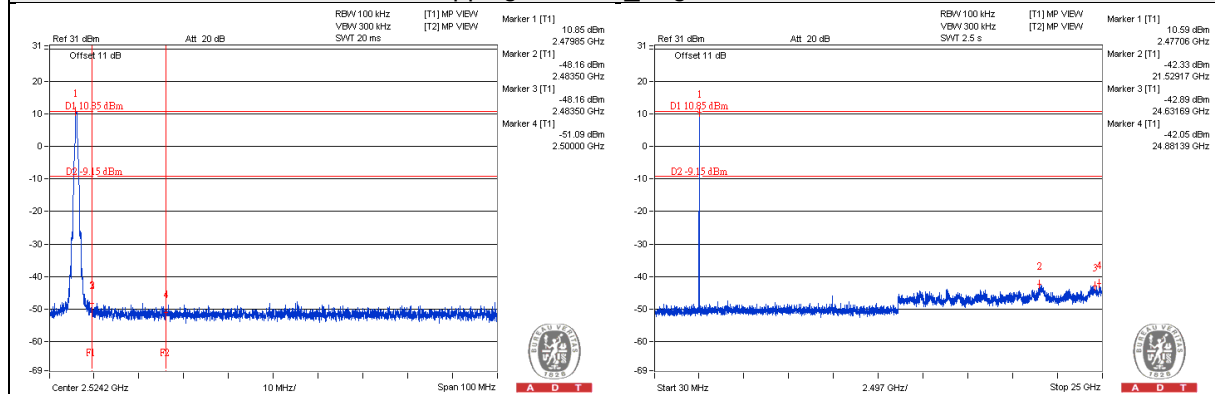

Hopping enabled Low Channel

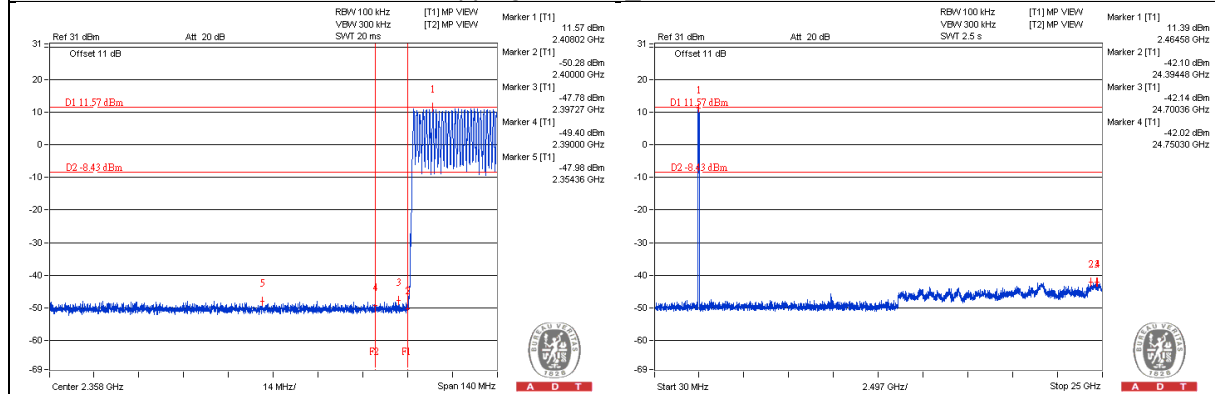


Hopping enabled High Channel

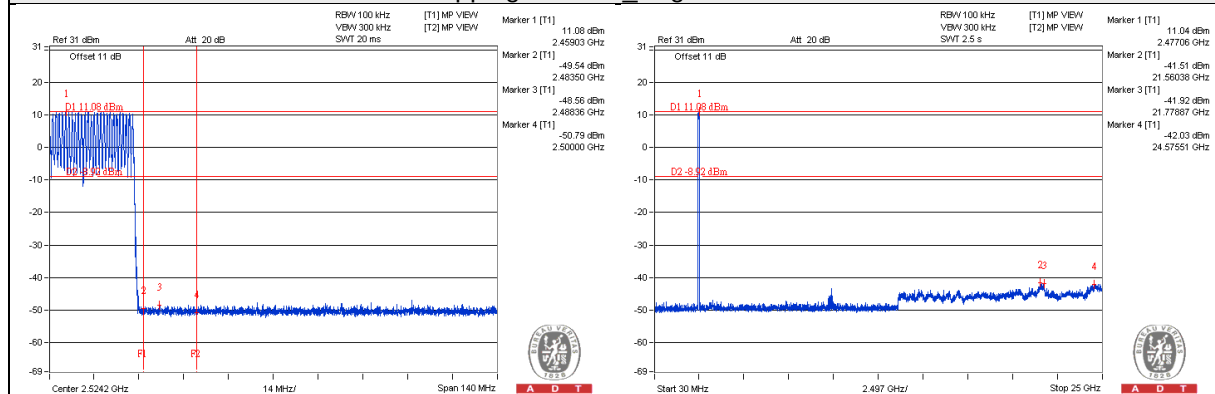


8DPSK


Hopping disabled Low Channel

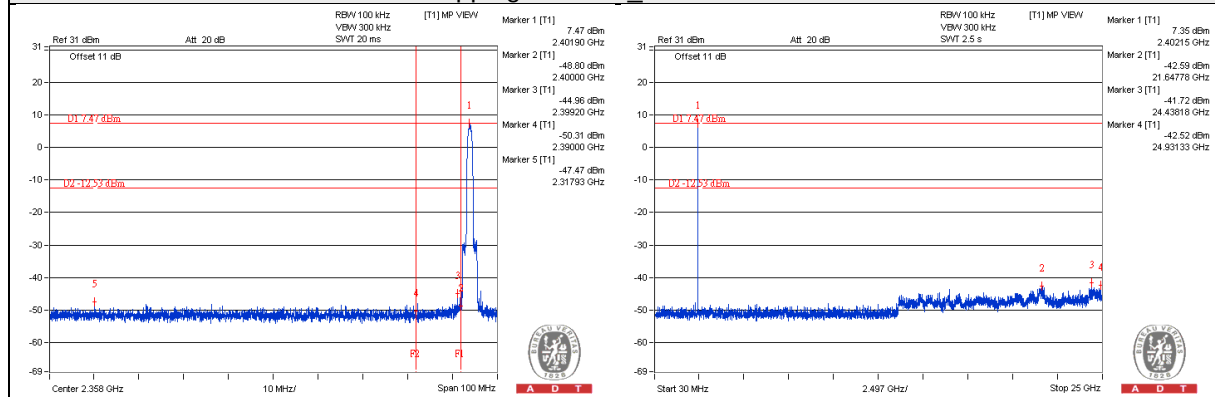


Hopping disabled High Channel

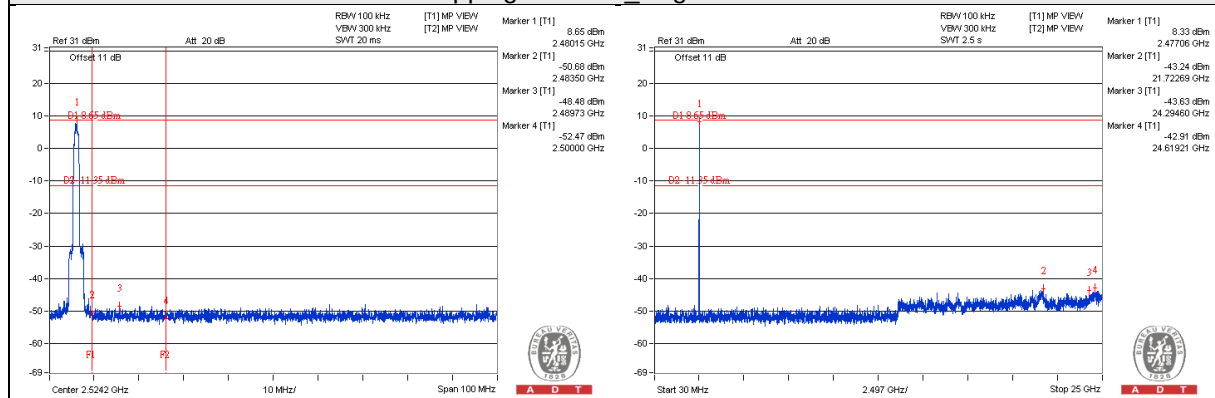

Hopping enabled Low Channel

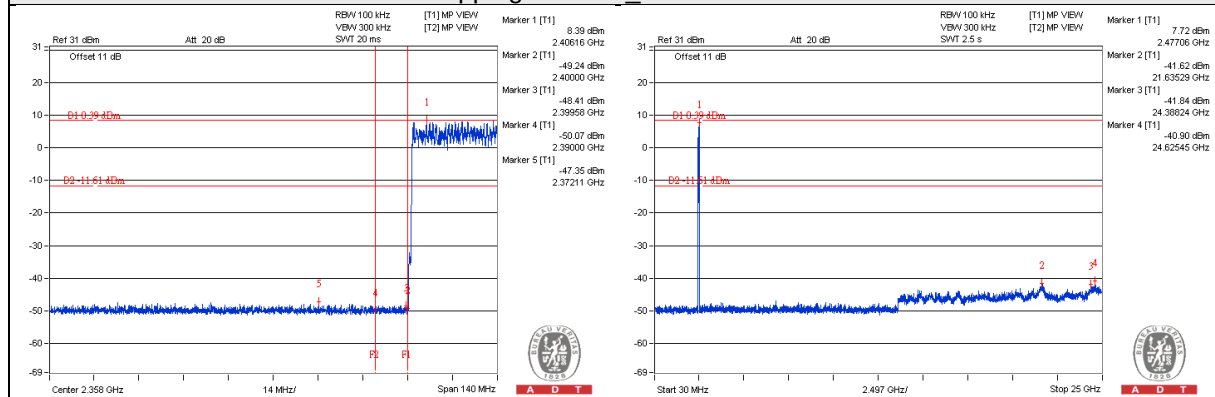

Hopping enabled High Channel

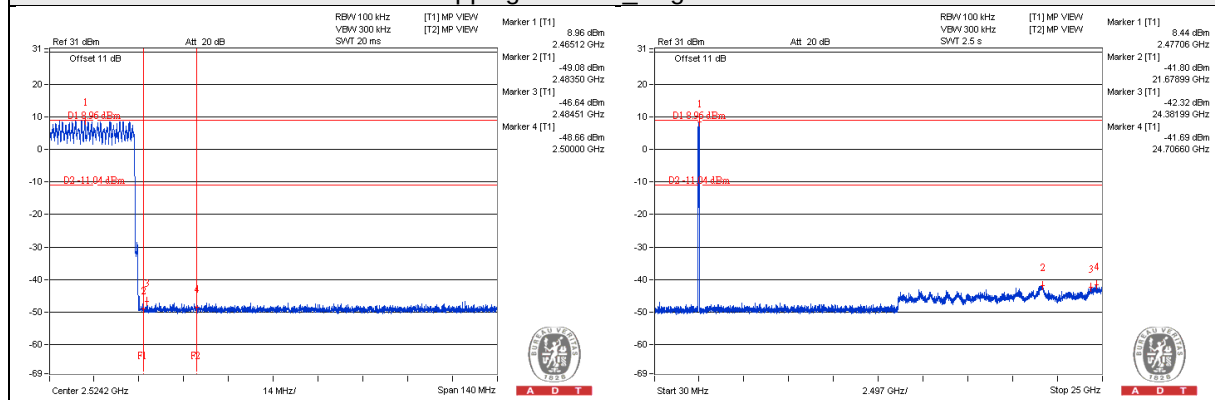

4.8 Radiated Emission and Bandedge Measurement

4.8.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.8.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	Aug. 11, 2014	Aug. 10, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 09, 2015	Feb. 08, 2016
RF Cable	8D-FB	CHHCAB-001-1 CHHCAB-001-2	Oct. 05, 2014	Oct. 04, 2015
	RF-141	CHHCAB-004	Oct. 05, 2014	Oct. 04, 2015
Horn_Antenna AISi	AIH.8018	0000220091110	Feb. 06, 2015	Feb. 05, 2016
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 28, 2014	Oct. 27, 2015
RF Cable	NA	131206 131213 131215 SNMY23685/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Feb. 05, 2015	Feb. 04, 2016
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. H.
3. The FCC Site Registration No. is 797305.
4. The CANADA Site Registration No. is IC 7450H-3.
5. Tested Date: June 16 to 17, 2015

4.8.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.8.4 Deviation from Test Standard


No deviation.

4.8.5 Test Set Up

<Frequency Range below 1GHz>

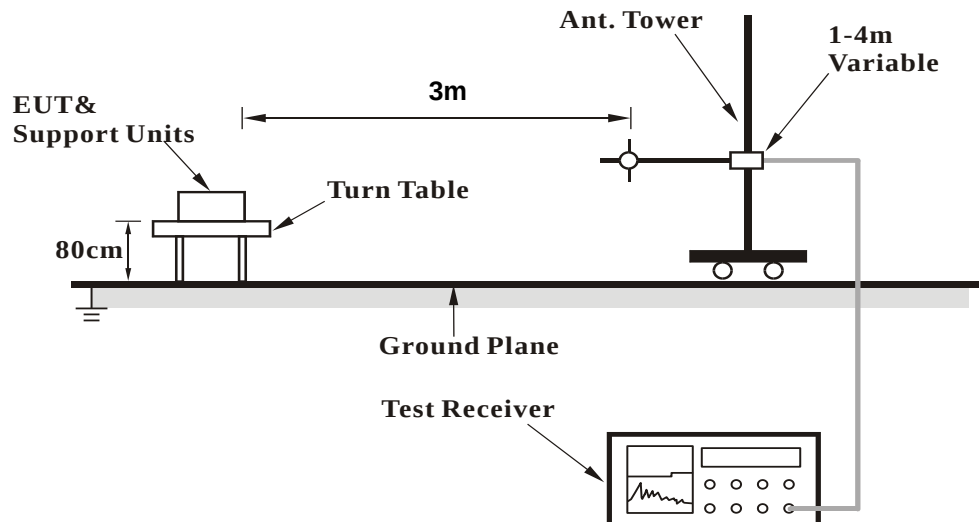

<Frequency Range above 1GHz>

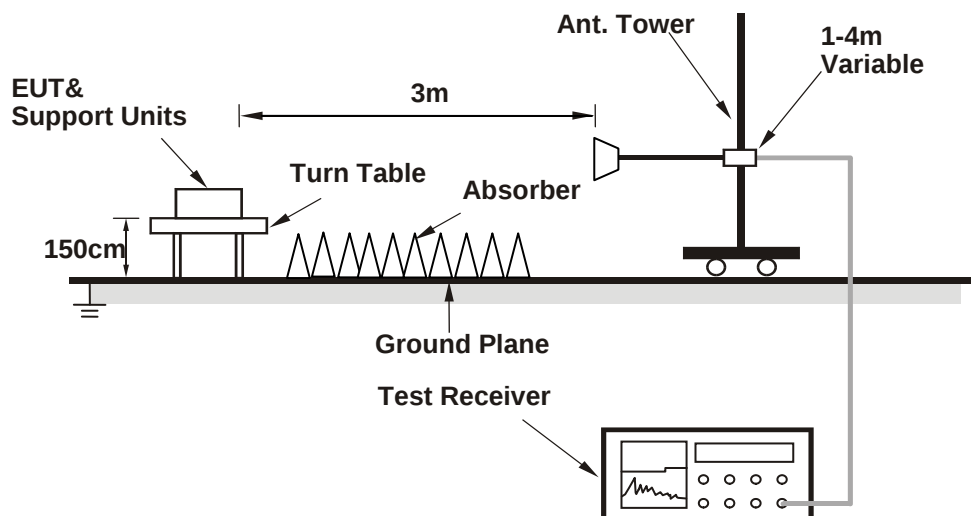

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.6 EUT Operating Conditions

1. Connect the EUT with the support unit A (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program "QRCT CONN.exe(Ver 3.0.33.0)" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.8.7 Test Results

Above 1GHz Data:



BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.1 PK	74.0	-23.9	1.04 H	328	53.29	-3.19
2	2390.00	36.0 AV	54.0	-18.0	1.04 H	328	39.19	-3.19
3	*2402.00	108.0 PK			1.05 H	312	111.16	-3.16
4	*2402.00	99.0 AV			1.05 H	312	102.16	-3.16
5	4804.00	51.1 PK	74.0	-22.9	1.00 H	93	45.16	5.94
6	4804.00	37.8 AV	54.0	-16.2	1.00 H	93	31.86	5.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

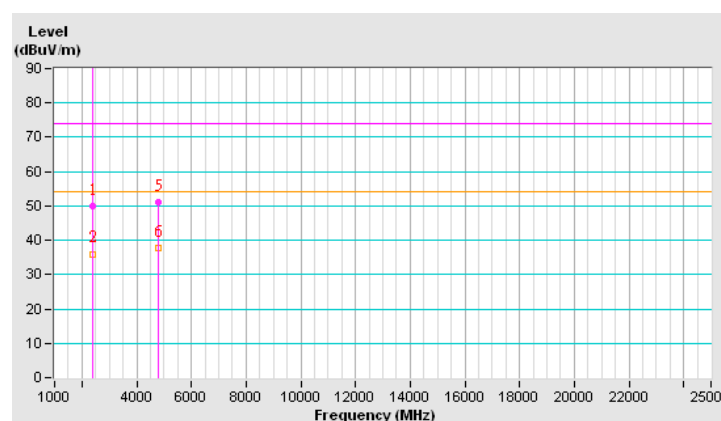
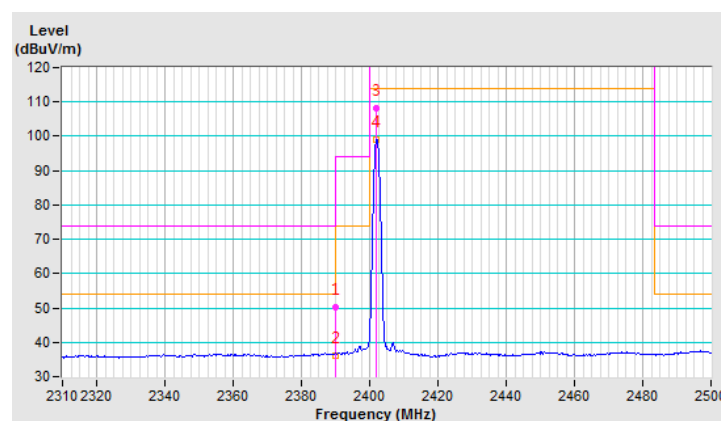


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.9 PK	74.0	-23.1	1.44 V	171	54.09	-3.19
2	2390.00	35.8 AV	54.0	-18.2	1.44 V	171	38.99	-3.19
3	*2402.00	108.2 PK			1.46 V	162	111.36	-3.16
4	*2402.00	99.2 AV			1.46 V	162	102.36	-3.16
5	4804.00	49.7 PK	74.0	-24.3	1.09 V	194	43.76	5.94
6	4804.00	38.3 AV	54.0	-15.7	1.09 V	194	32.36	5.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

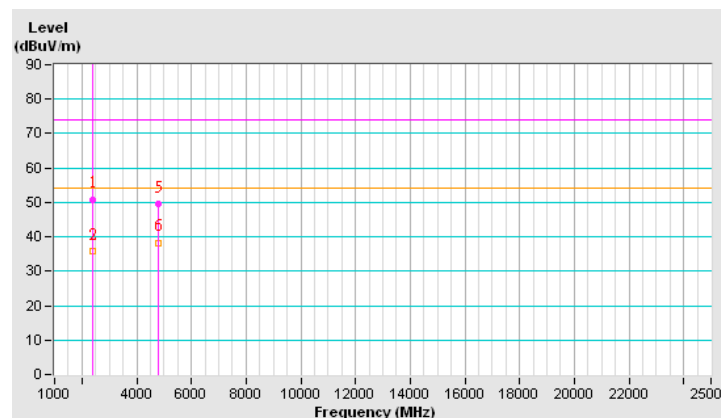
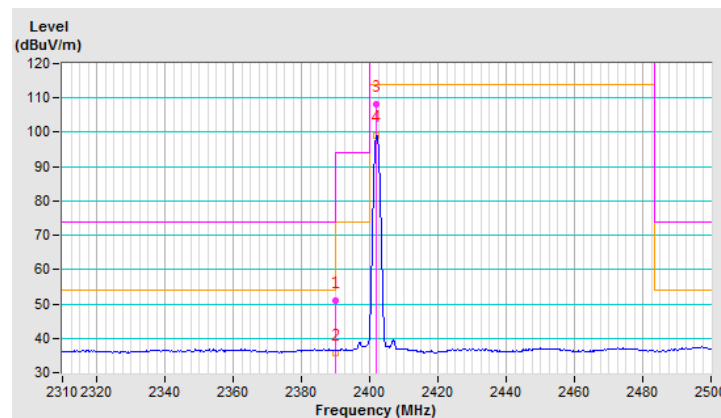


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	108.2 PK			1.09 H	325	111.22	-3.02
2	*2441.00	99.1 AV			1.09 H	325	102.12	-3.02
3	4882.00	51.8 PK	74.0	-22.2	1.08 H	85	45.75	6.05
4	4882.00	38.1 AV	54.0	-15.9	1.08 H	85	32.05	6.05
5	7323.00	59.1 PK	74.0	-14.9	1.00 H	201	48.08	11.02
6	7323.00	46.6 AV	54.0	-7.4	1.00 H	201	35.58	11.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

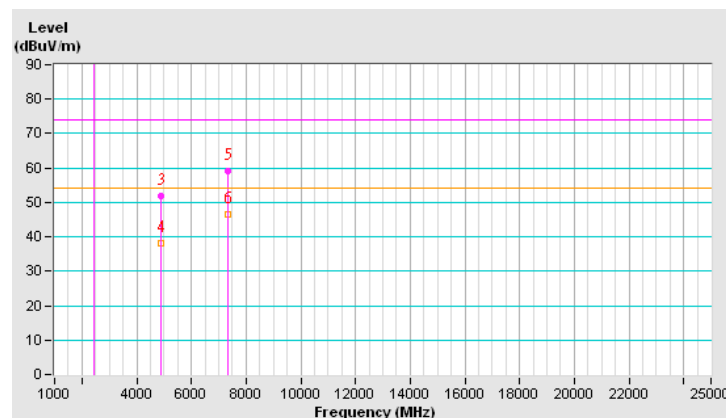
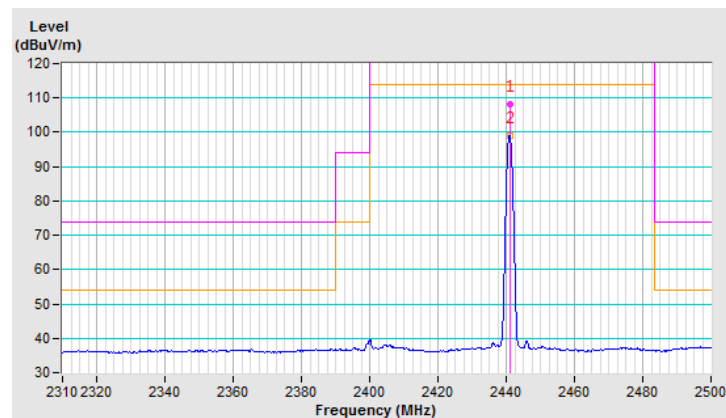


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	108.7 PK			1.52 V	174	111.72	-3.02
2	*2441.00	99.8 AV			1.52 V	174	102.82	-3.02
3	4882.00	51.1 PK	74.0	-22.9	1.06 V	186	45.05	6.05
4	4882.00	39.6 AV	54.0	-14.4	1.06 V	186	33.55	6.05
5	7323.00	58.3 PK	74.0	-15.7	1.17 V	260	47.28	11.02
6	7323.00	47.2 AV	54.0	-6.8	1.17 V	260	36.18	11.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

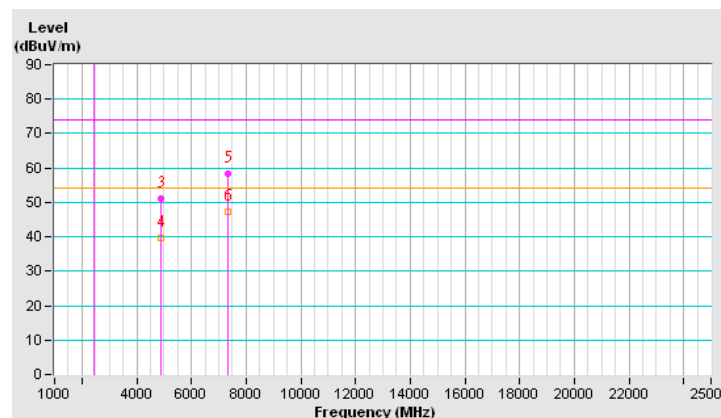
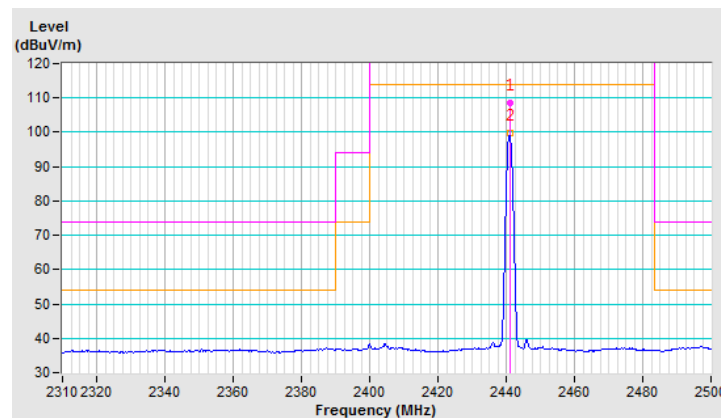


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	107.7 PK			1.00 H	74	110.58	-2.88
2	*2480.00	98.7 AV			1.00 H	74	101.58	-2.88
3	2483.50	56.4 PK	74.0	-17.6	1.00 H	92	59.27	-2.87
4	2483.50	37.1 AV	54.0	-16.9	1.00 H	92	39.97	-2.87
5	4960.00	51.5 PK	74.0	-22.5	1.00 H	97	45.46	6.04
6	4960.00	37.6 AV	54.0	-16.4	1.00 H	97	31.56	6.04
7	7440.00	58.1 PK	74.0	-15.9	1.00 H	203	46.37	11.73
8	7440.00	45.6 AV	54.0	-8.4	1.00 H	203	33.87	11.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

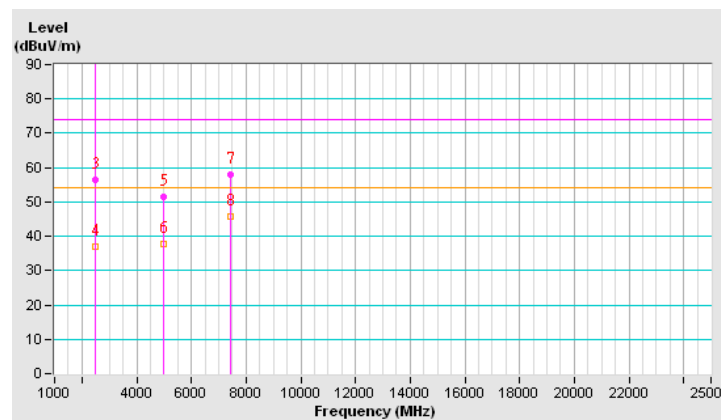
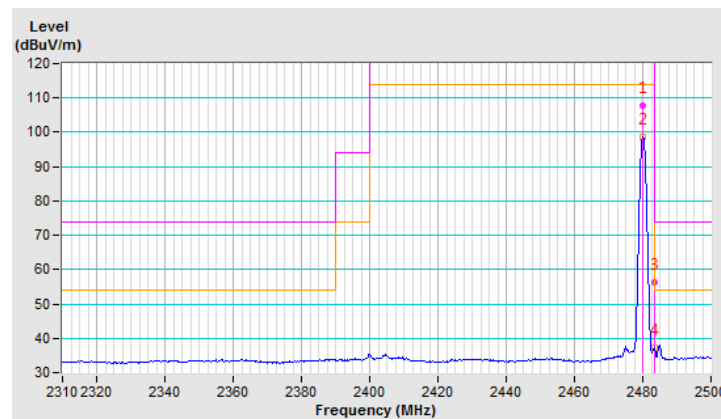


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	109.1 PK			1.45 V	183	111.98	-2.88
2	*2480.00	100.2 AV			1.45 V	183	103.08	-2.88
3	2483.50	58.2 PK	74.0	-15.8	1.39 V	173	61.07	-2.87
4	2483.50	40.5 AV	54.0	-13.5	1.39 V	173	43.37	-2.87
5	4960.00	51.0 PK	74.0	-23.0	1.00 V	174	44.96	6.04
6	4960.00	39.0 AV	54.0	-15.0	1.00 V	174	32.96	6.04
7	7440.00	58.7 PK	74.0	-15.3	1.17 V	290	46.97	11.73
8	7440.00	47.6 AV	54.0	-6.4	1.17 V	290	35.87	11.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

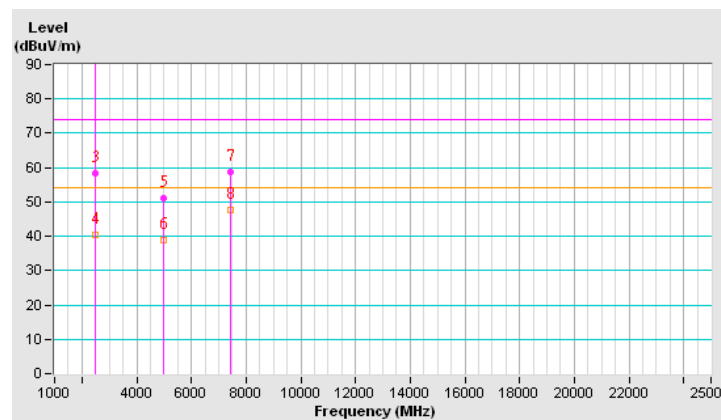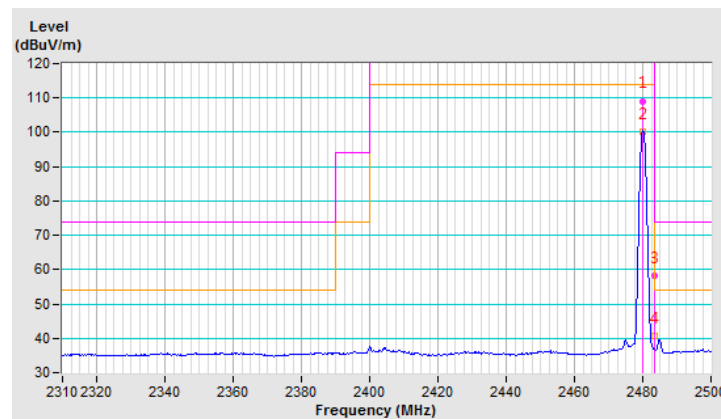



BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.5 PK	74.0	-23.5	1.00 H	242	53.69	-3.19
2	2390.00	36.2 AV	54.0	-17.8	1.00 H	242	39.39	-3.19
3	*2402.00	104.1 PK			1.03 H	227	107.26	-3.16
4	*2402.00	99.0 AV			1.03 H	227	102.16	-3.16
5	4804.00	52.0 PK	74.0	-22.0	1.06 H	101	46.06	5.94
6	4804.00	38.2 AV	54.0	-15.8	1.06 H	101	32.26	5.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

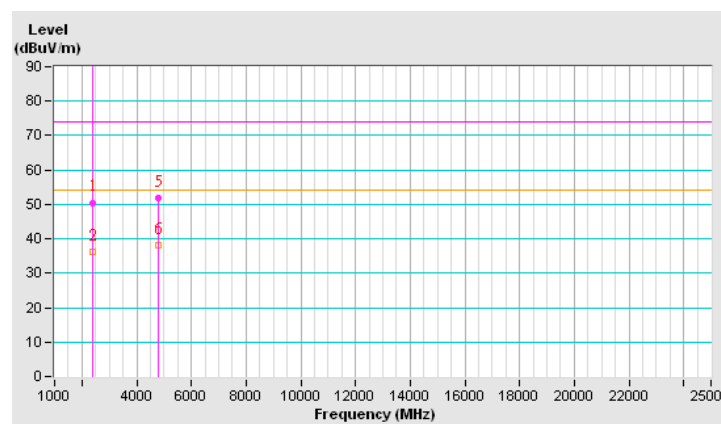
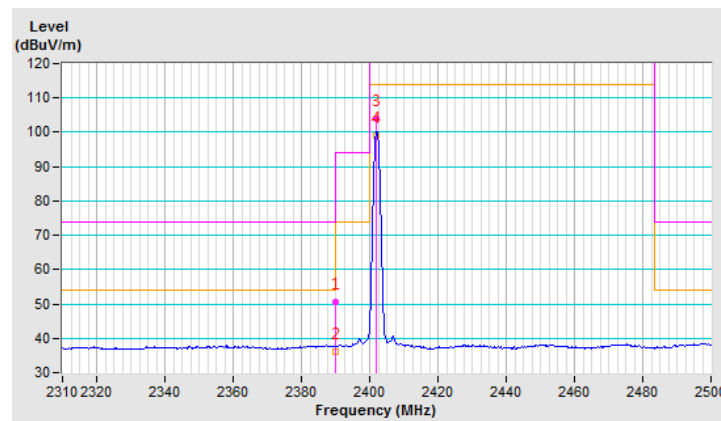


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	1.04 V	178	59.39	-3.19
2	2390.00	37.7 AV	54.0	-16.3	1.04 V	178	40.89	-3.19
3	*2402.00	106.2 PK			1.00 V	159	109.36	-3.16
4	*2402.00	100.8 AV			1.00 V	159	103.96	-3.16
5	4804.00	50.7 PK	74.0	-23.3	1.07 V	171	44.76	5.94
6	4804.00	38.7 AV	54.0	-15.3	1.07 V	171	32.76	5.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

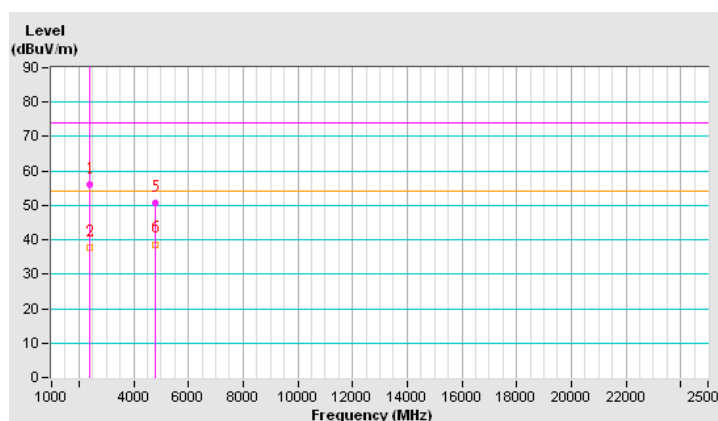
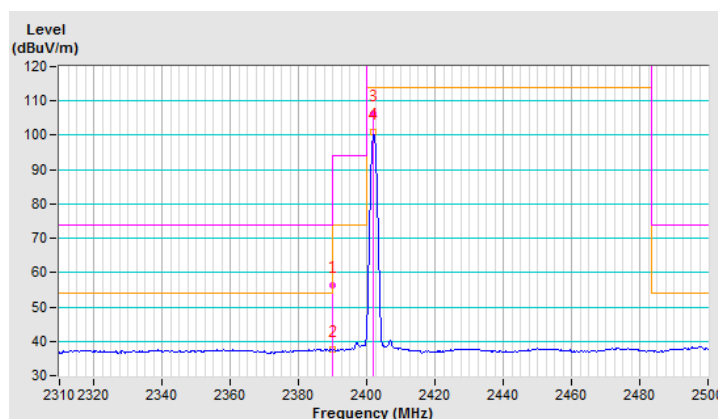


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	105.6 PK			1.01 H	190	108.62	-3.02
2	*2441.00	99.7 AV			1.01 H	190	102.72	-3.02
3	4882.00	51.6 PK	74.0	-22.4	1.05 H	91	45.55	6.05
4	4882.00	38.0 AV	54.0	-16.0	1.05 H	91	31.95	6.05
5	7323.00	58.9 PK	74.0	-15.1	1.03 H	196	47.88	11.02
6	7323.00	46.1 AV	54.0	-7.9	1.03 H	196	35.08	11.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

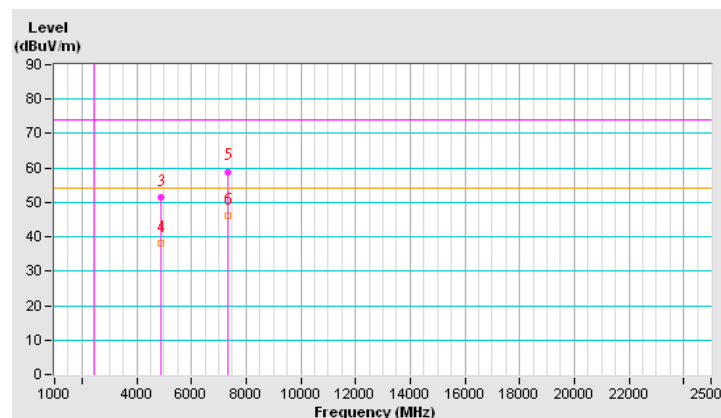
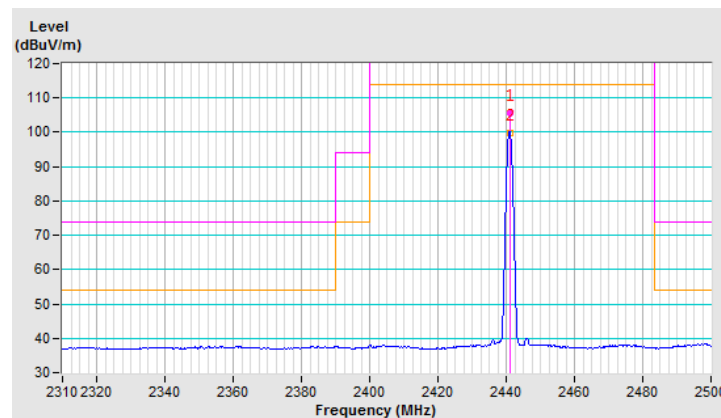


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	106.9 PK			1.08 V	189	109.92	-3.02
2	*2441.00	101.1 AV			1.08 V	189	104.12	-3.02
3	4882.00	50.5 PK	74.0	-23.5	1.04 V	212	44.45	6.05
4	4882.00	39.1 AV	54.0	-14.9	1.04 V	212	33.05	6.05
5	7323.00	57.7 PK	74.0	-16.3	1.20 V	285	46.68	11.02
6	7323.00	47.0 AV	54.0	-7.0	1.20 V	285	35.98	11.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

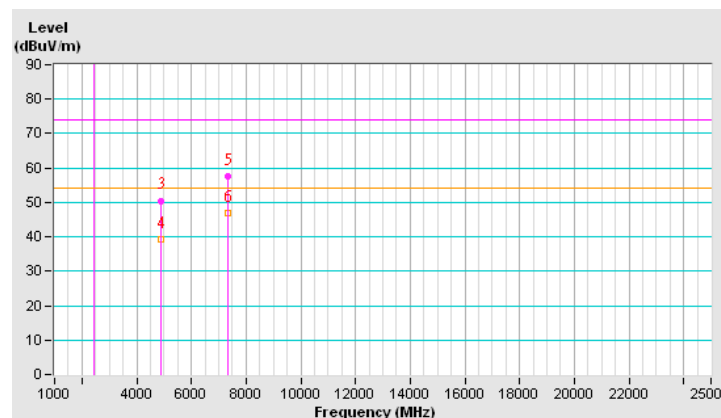
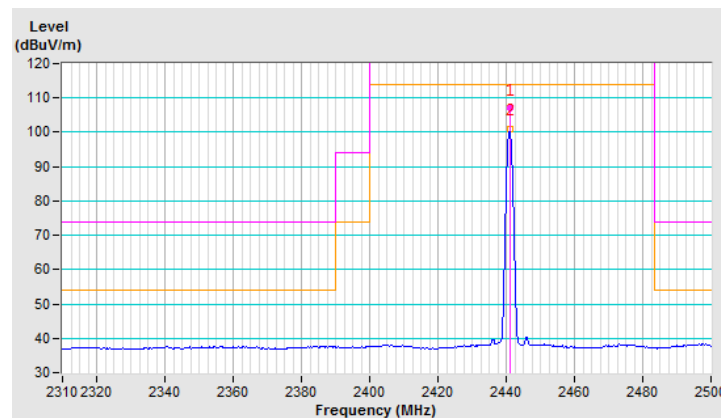


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	105.0 PK			1.05 H	230	107.88	-2.88
2	*2480.00	99.7 AV			1.05 H	230	102.58	-2.88
3	2483.50	57.7 PK	74.0	-16.3	1.00 H	214	60.57	-2.87
4	2483.50	36.7 AV	54.0	-17.3	1.00 H	214	39.57	-2.87
5	4960.00	52.0 PK	74.0	-22.0	1.09 H	104	45.96	6.04
6	4960.00	38.4 AV	54.0	-15.6	1.09 H	104	32.36	6.04
7	7440.00	57.9 PK	74.0	-16.1	1.08 H	210	46.17	11.73
8	7440.00	45.1 AV	54.0	-8.9	1.08 H	210	33.37	11.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

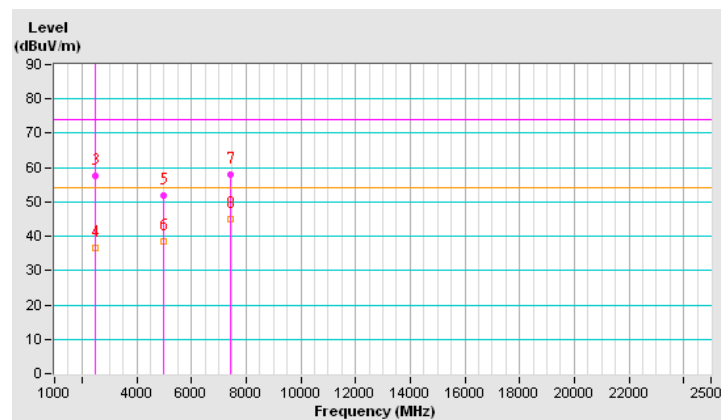
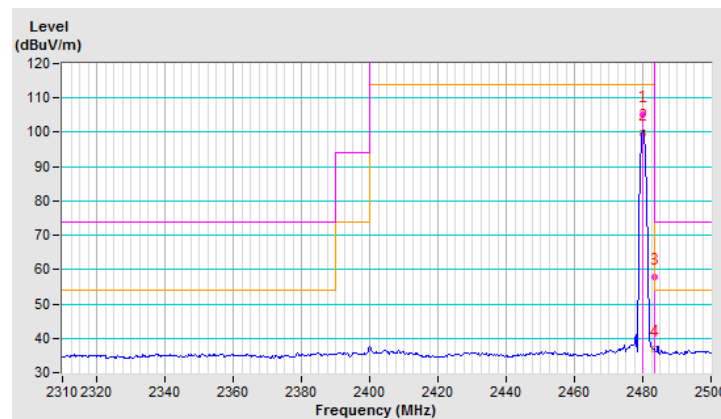


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	106.9 PK			1.40 V	171	109.78	-2.88
2	*2480.00	101.5 AV			1.40 V	171	104.38	-2.88
3	2483.50	48.9 PK	74.0	-25.1	1.40 V	187	51.77	-2.87
4	2483.50	39.0 AV	54.0	-15.0	1.40 V	187	41.87	-2.87
5	4960.00	50.4 PK	74.0	-23.6	1.08 V	169	44.36	6.04
6	4960.00	38.6 AV	54.0	-15.4	1.08 V	169	32.56	6.04
7	7440.00	59.0 PK	74.0	-15.0	1.15 V	282	47.27	11.73
8	7440.00	47.6 AV	54.0	-6.4	1.15 V	282	35.87	11.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

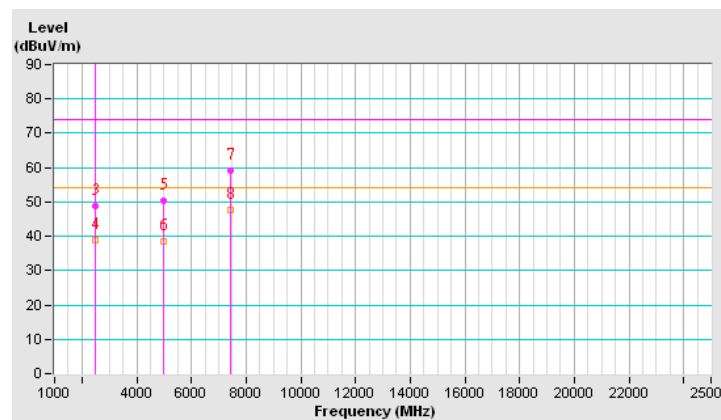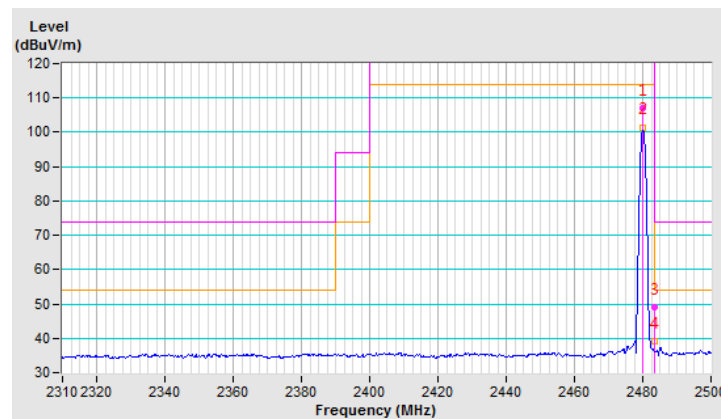

Below 1GHz Data


BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.51	39.8 QP	43.5	-3.7	1.67 H	301	57.20	-17.41
2	156.84	40.0 QP	43.5	-3.5	1.65 H	241	52.93	-12.95
3	171.52	40.0 QP	43.5	-3.6	1.64 H	241	53.54	-13.59
4	323.69	34.8 QP	46.0	-11.3	1.54 H	301	45.71	-10.96
5	697.54	41.0 QP	46.0	-5.0	2.04 H	167	44.36	-3.38
6	796.94	41.8 QP	46.0	-4.2	1.68 H	301	43.34	-1.52

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

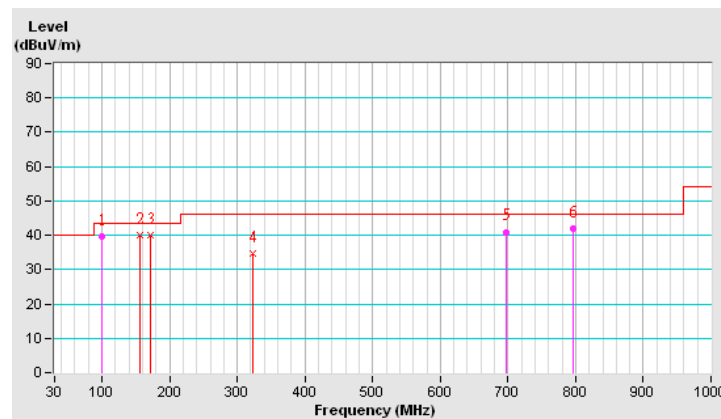


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.88	35.4 QP	40.0	-4.6	1.65 V	56	49.78	-14.34
2	149.87	36.7 QP	43.5	-6.8	1.44 V	304	49.54	-12.83
3	162.61	36.7 QP	43.5	-6.8	1.85 V	58	49.73	-12.99
4	171.85	35.9 QP	43.5	-7.6	1.27 V	72	49.52	-13.61
5	199.82	38.6 QP	43.5	-4.9	2.14 V	244	54.55	-15.98
6	599.82	38.9 QP	46.0	-7.1	1.67 V	304	43.61	-4.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

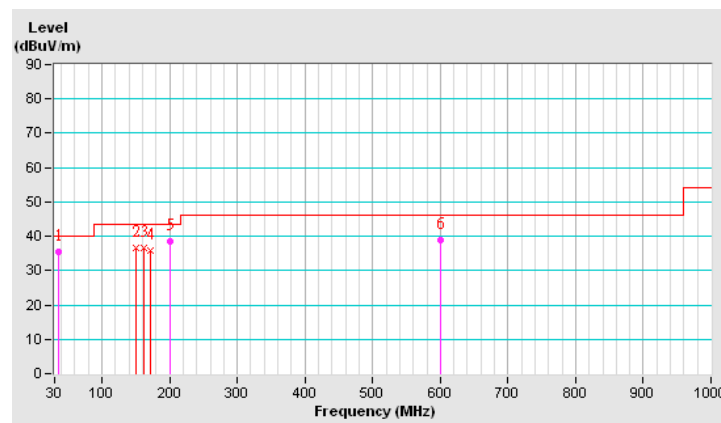

4.9 Conducted Emission Measurement

4.9.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.9.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	847124/029	Oct. 22, 2014	Oct. 21, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 10, 2014	Nov. 09, 2015
RF Cable (JYEBAO)	5D-FB	COCCAB-001	Mar. 09, 2015	Mar. 08, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software ADT	BV ADT_Cond_V7.3 .7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Apr. 29, 2015

4.9.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.9.4 Deviation From Test Standard

No deviation.

4.9.5 Test Setup

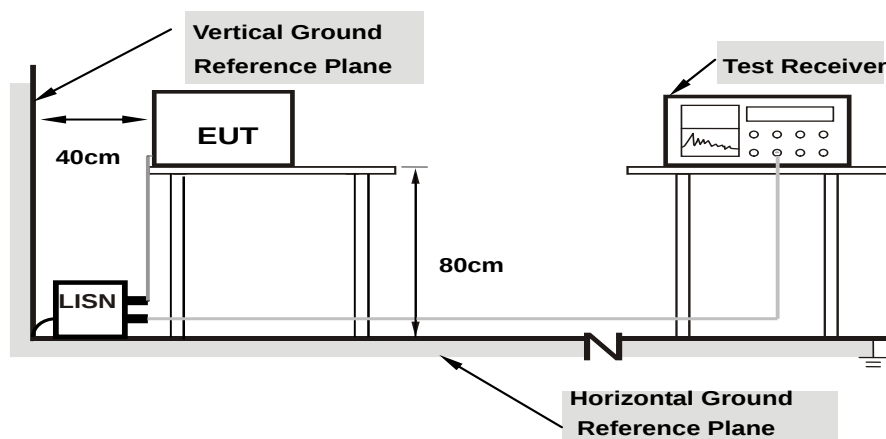

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.9.6 EUT Operating Condition

Same as 4.8.6.


4.9.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20469	0.09	44.30	31.01	44.39	31.10	63.42	53.42	-19.03	-22.32
2	0.26328	0.09	43.89	36.89	43.98	36.98	61.33	51.33	-17.34	-14.34
3	0.32969	0.10	40.88	36.29	40.98	36.39	59.46	49.46	-18.48	-13.07
4	1.58203	0.15	30.65	27.21	30.80	27.36	56.00	46.00	-25.20	-18.64
5	3.82422	0.22	32.82	24.83	33.04	25.05	56.00	46.00	-22.96	-20.95
6	12.34375	0.51	36.79	28.57	37.30	29.08	60.00	50.00	-22.70	-20.92

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

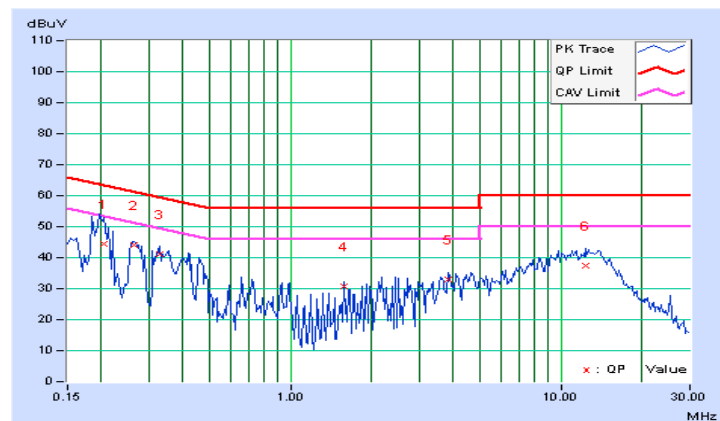


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.08	53.34	44.26	53.42	44.34	63.74	53.74	-10.32	-9.40
2	0.27109	0.09	40.22	24.10	40.31	24.19	61.08	51.08	-20.78	-26.90
3	0.35313	0.10	37.49	20.89	37.59	20.99	58.89	48.89	-21.30	-27.90
4	0.45859	0.10	38.73	37.02	38.83	37.12	56.72	46.72	-17.89	-9.60
5	4.41406	0.25	33.57	26.44	33.82	26.69	56.00	46.00	-22.18	-19.31
6	12.89844	0.54	38.04	30.83	38.58	31.37	60.00	50.00	-21.42	-18.63

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

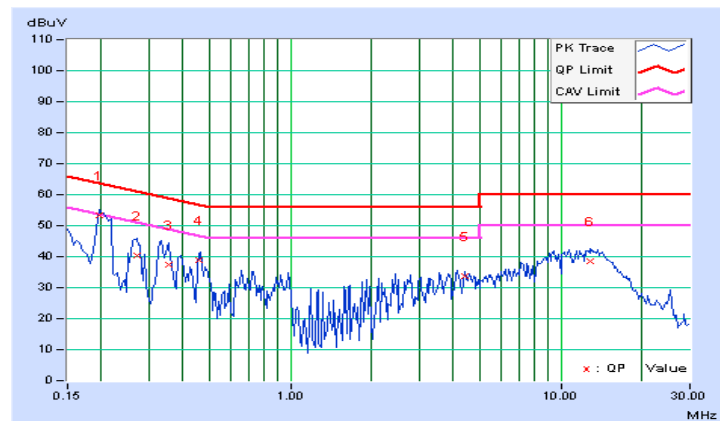

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---