



FCC/ IC TEST REPORT

According to

CFR47 §15.247/ RSS-247 Issue 1

Applicant	:	Qualcomm Atheros, Inc.
Address	:	1700 Technology Drive, San Jose, CA 95110
Manufacturer	:	Qualcomm Atheros, Inc.
Address	:	1700 Technology Drive, San Jose, CA 95110
Equipment	:	Single Stream 802.11a/b/g/n/ac + BT 4.1 M.2 Type Card
Brand	:	Qualcomm Atheros
Model No.	:	QCNFA435
FCC ID	:	PPD-QCNFA435
IC ID	:	4104A-QCNFA435

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.10 – 2013** and the energy emitted by this equipment was **passed**.

CISPR PUB. 22 and FCC Part 15 in both radiated and conducted emission class B limits. Testing was carried out on Mar 01,2016~Apr 12th, 2016 at **Cerpass Technology Corp.**

Prepared By: Kerry Zhou
Kerry Zhou

Laboratory accreditation

Approved By: Miro Chueh
Miro Chueh





Release History

Attachment No.	Version	Date	Description
SEDL1512164	Rev 01	2016-04-12	Initial release
SEDL1512164	Rev 01	2016-04-29	1. Add test setting of radiated emission and band edges measurement . 2. Update the configuration of Tested System 3. Add the worst-case plots of bandedge and the worst-case plots of radiated emission.
SEDL1512164	Rev 01	2016-05-04	1. Add peak power test. 2. Update the level of VBW set for average test.



Table of Contents

1. Report of Measurements and Examinations.....	4
1.1 List of Measurements and Examinations	4
2. Test Configuration of Equipment under Test.....	5
2.1 Feature of Equipment under Test	5
2.2 Carrier Frequency of Channels	6
2.3 Power Setting Levels.....	6
2.4 Duty cycle	7
2.5 Test Manner.....	8
2.6 Description of Test System.....	9
2.7 Configuration of Tested System	10
2.8 General Information of Test	11
2.9 Measurement Uncertainty	11
3. Antenna Requirements	12
3.1 Standard Applicable.....	12
3.2 Antenna Construction and Directional Gain	12
4. Test of Radiated Emission.....	13
4.1 Test Limit	13
4.2 Test Procedures.....	13
4.3 Test Setting	14
4.4 Typical Test Setup	15
4.5 Measurement Equipment	17
4.6 Test Result and Data	18
5. Maximum Output Power	27
5.1 Test Limit	27
5.2 Test Procedure	27
5.3 Test Setup Layout.....	27
5.4 Measurement Equipment	27
5.5 Test Result and Data	28
6. Band Edges Measurement.....	31
6.1 Test Limit	31
6.2 Test Procedure	31
6.3 Test Setting	31
6.4 Test Setup Layout.....	32
6.5 Measurement Equipment	33
6.6 Test Result and Data	34
7. Restricted Bands of Operation.....	40
7.1 Labeling Requirement	40



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

Performed Test Item	Normative References	Test Performed	Deviation	Result
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.209 RSS-Gen Issue 4 November 2014 Section 6.13	Yes	No	Pass
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2014 15.247(d) RSS-247 Issue 1 May 2015 Section 5.5	Yes	No	Pass
Output Power	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(b)(3) RSS-247 Issue 1 May 2015 Section 5.4(4)	Yes	No	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Spreading	802.11b: DSSS 802.11g / n: OFDM
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 300Mbps
Antenna Type	See antenna requirement

Host Details,

Host Manufacture	Host Type	Host Model
Lenovo	Notebook Computer	Lenovo YOGA 710-11ISK



2.2 Carrier Frequency of Channels

For 2.4G 802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

For 2.4G 802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	---	08	2447
02	---	09	2452
03	2422	---	---
04	2427	---	---
05	2432	---	---
06	2437	---	---
07	2442	---	---

2.3 Power Setting Levels

Mode	Frequency (MHz)	MTool Setting
802.11b	2412	19
	2437	19
	2462	19
802.11g	2412	16
	2437	18
	2462	16.5
802.11n20	2412	16.5
	2437	18.5
	2462	16
802.11n40	2422	15.5
	2437	17.5
	2452	14

Note:MTool software is used for power transmission control offered by the manufactory.




2.4 Duty cycle


Test Item	Duty cycle
-----------	------------

Mode	Frequency (MHz)	Measurement (%)
802.11b	2412	98.60%
802.11g	2412	94.80%
802.11n(20MHz)	2412	93.20%
802.11n(40MHz)	2422	83.50%


Transmit at 2412MHz by 802.11b

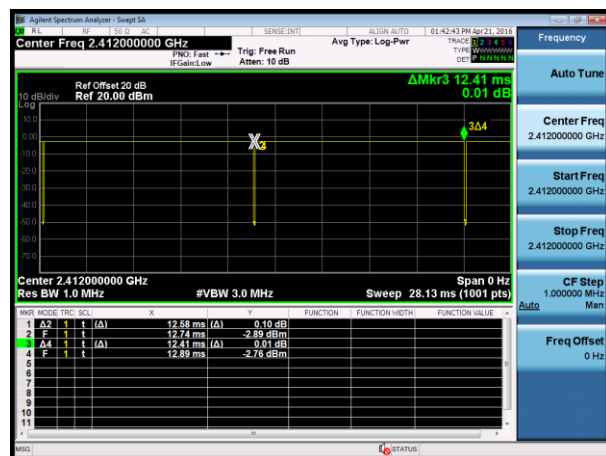


Transmit at 2412MHz by 802.11g

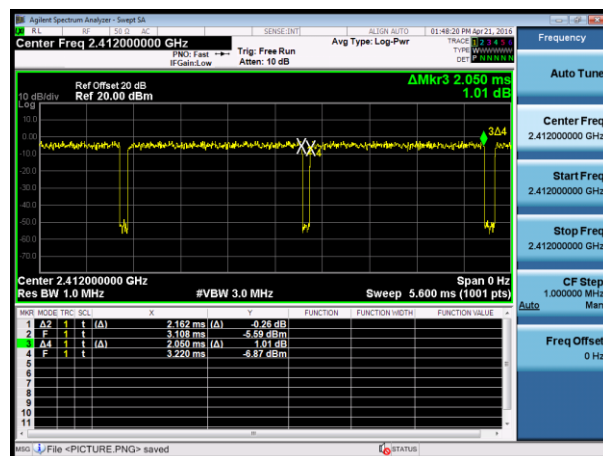

Transmit at 2412MHz by 802.11n(20MHz)

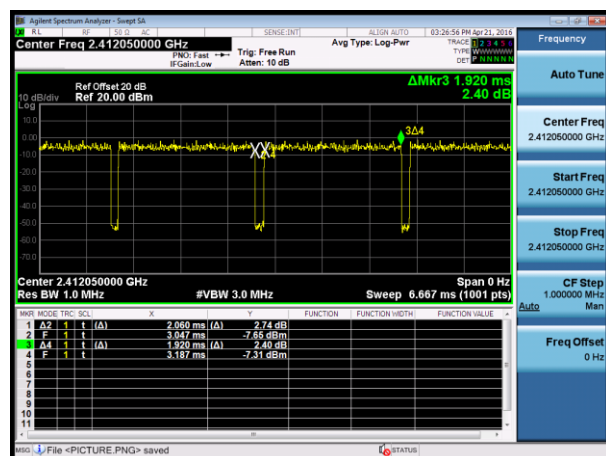

Transmit at 2422MHz by 802.11 n(40MHz)

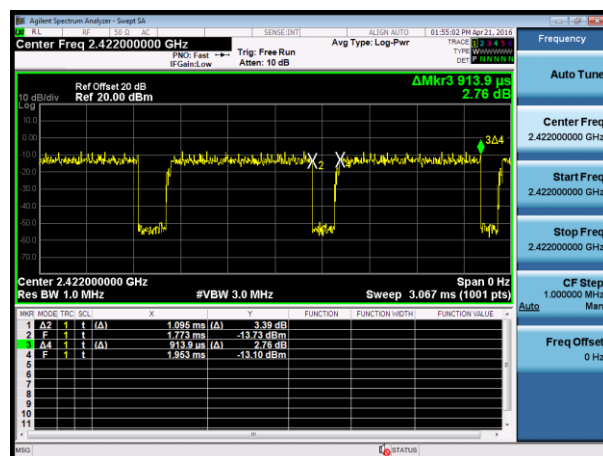



2.5 Test Manner

Test Manner	
1	During testing, the interface cables and equipment positions were varied according to RSS-247 Issue 1
2	Adjust the EUT at the test mode and the test channel. Then test.
Test mode	
1	Transmit by 802.11b
2	Transmit by 802.11g
3	Transmit by 802.11n (20MHz)
4	Transmit by 802.11n (40MHz)




2.6 Description of Test System

Product		Manufacturer	Model No.	Power Cord
1	LCD Monitor	DELL	U2713HMT	Non-Shielded, 1.8m
2	USB Mouse	LENOVO	M-U0025-O	Power by Notebook



2.7 Configuration of Tested System

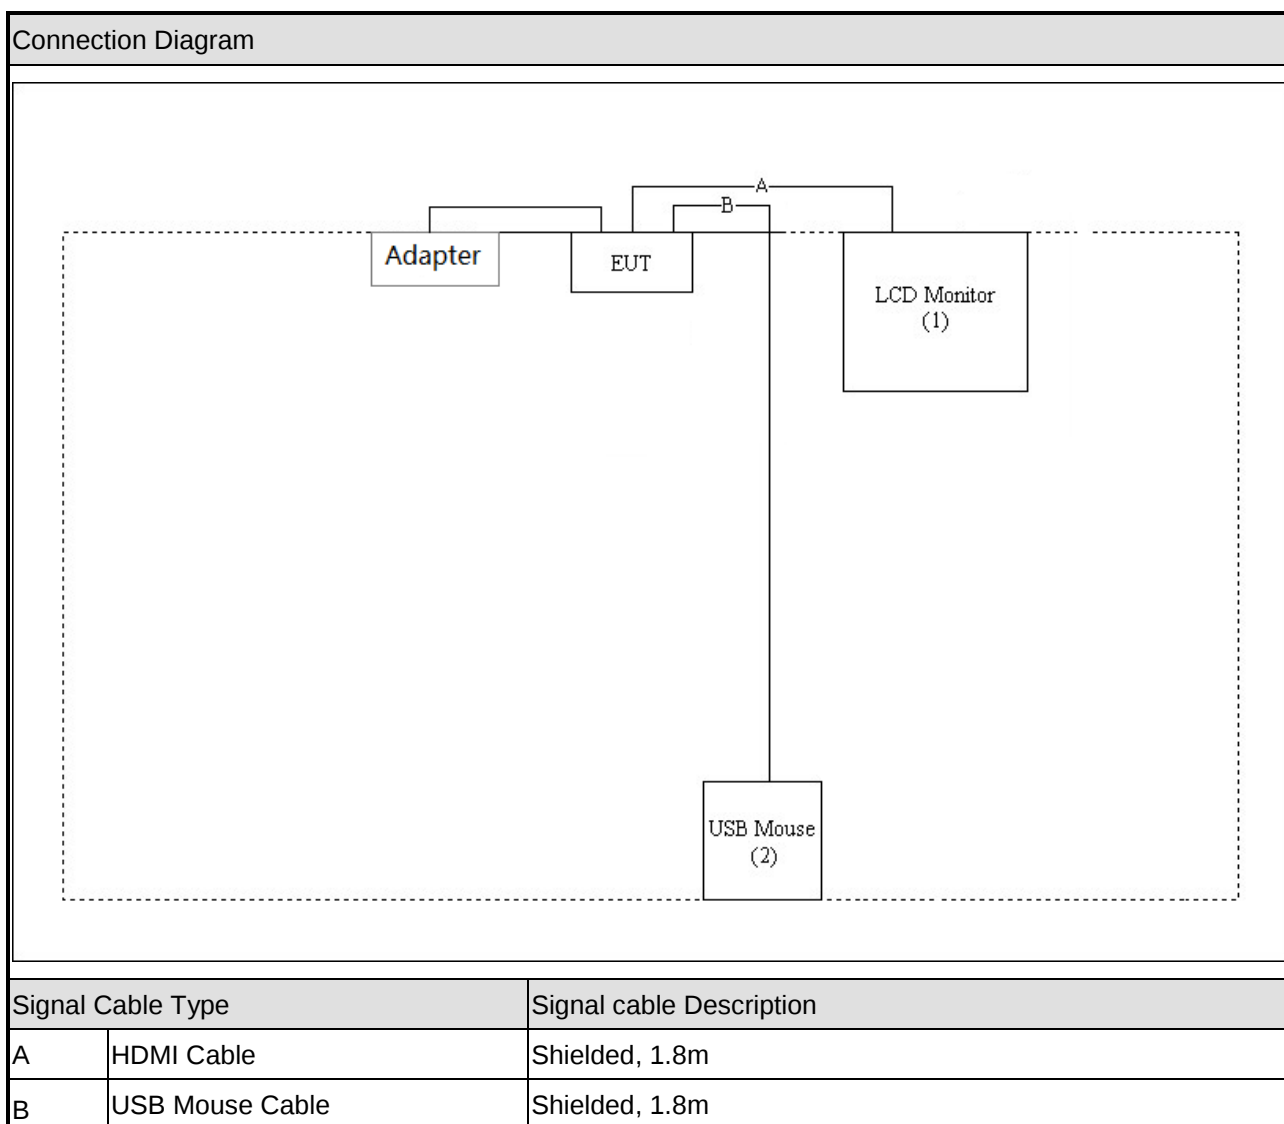



2.8 General Information of Test

Test Site:	CerpPASS Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2

2.9 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Radiated Emission	30 MHz ~ 40GHz	Vertical	± 4.11 dB
		Horizontal	± 4.10 dB
Maximum Peak Output Power	---	---	± 1.4 dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna	Manufacturer	Part Number	Peak Gain
PIFA Antenna(Main)	Speed	DC33001D900	2400- 2500MHz: 1.46dBi, 5150- 5850MHz: 1.95dBi
PIFA Antenna(Aux)	Speed	DC33001D910	2400- 2500MHz: 0.26dBi, 5150- 5850MHz: 2.82dBi
PIFA Antenna(Main)	HongLin	DC33001DB00	2400- 2500MHz: 0.87dBi, 5150- 5850MHz: 0.58dBi
PIFA Antenna(Aux)	HongLin	DC33001DB10	2400- 2500MHz: 0.64dBi, 5150- 5850MHz: 0.29dBi

Note: This EUT will collocation two kinds of antenna, we choose one of the high peak gain antenna for all RF testing.



4. Test of Radiated Emission

4.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.2 Test Procedures

KDB 558074 D01v03r05 - Section 12.0 & Section 12.1



4.3 Test Setting

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120 kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz


7.8.3. Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. $VBW \geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces




4.4 Typical Test Setup


9kHz~30MHz Test Setup

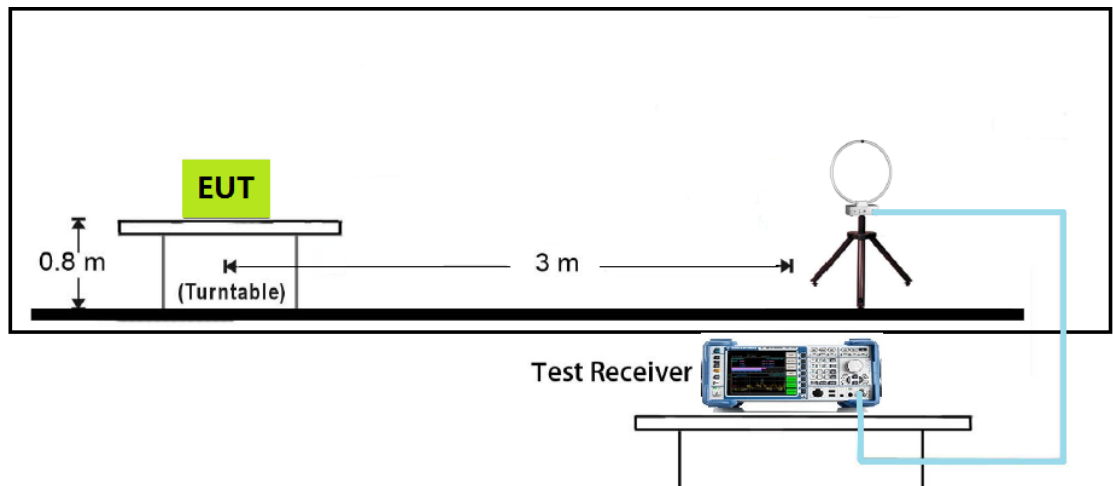


Below 1GHz Test Setup

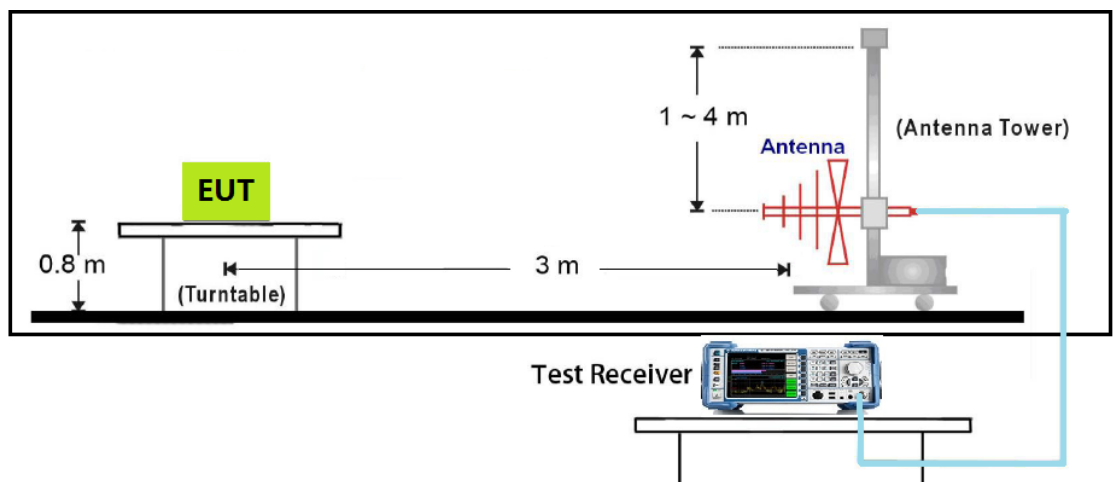

1GHz~18GHz Test Setup

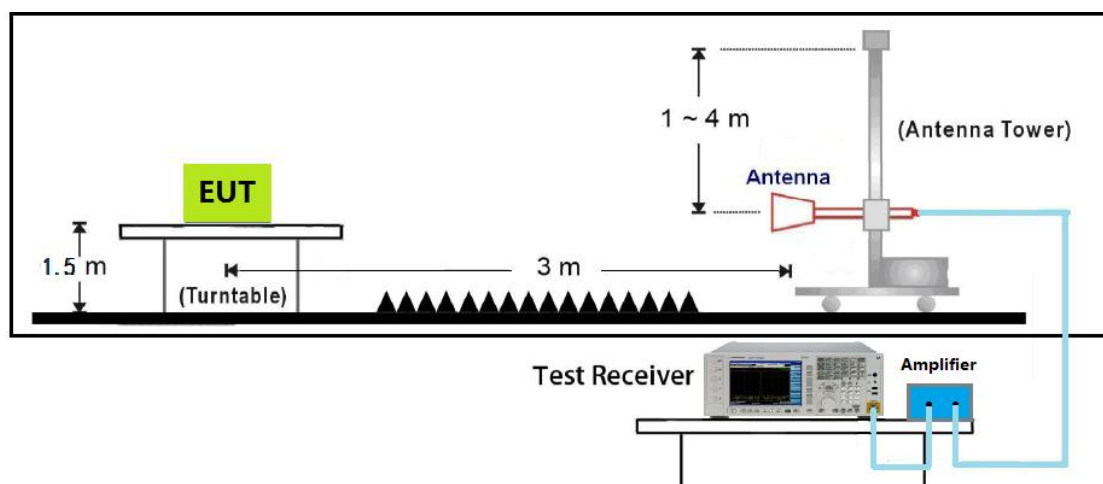

18GHz~40GHz Test Setup

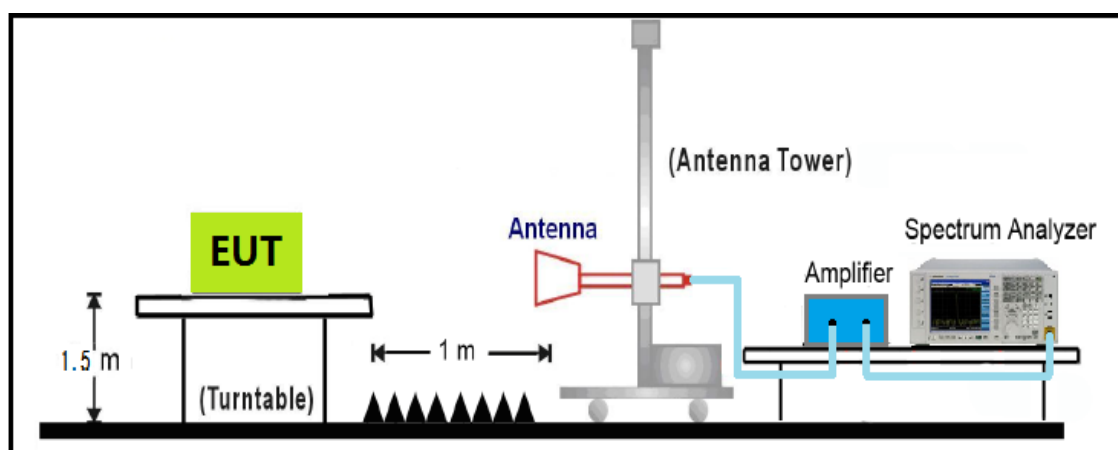



4.5 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	101183	2016.03.28	2017.03.29
Spectrum Analyzer	N9010A	Agilent	MY53400169	2015.11.11	2016.11.10
Spectrum Analyzer	R&S	FSP40	100324	2016.03.23	2017.03.24
H64 Preamplifier	HP	8447F	3113A05582	2016.03.24	2017.03.23
Preamplifier	songyi	EM330	60618	2016.03.29	2017.03.28
Preamplifier	Agilent	8449B	3008A02342	2016.03.29	2017.03.28
Preamplifier	COM-POWER	PA-840	711885	2016.03.29	2017.03.28
Bilog Antenna	Sunol Science	JB1	A072414-1	2015.04.22	2016.04.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2015.04.20	2016.04.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-347	2015.04.20	2016.04.19
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2016.03.31	2017.03.30
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A



4.6 Test Result and Data

The worst case of Radiated Emission below 1GHz:

Engineer :Ternence	Site : EMC Lab AC 102
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Normal Link

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	55.2200	-11.86	35.16	23.30	40.00	-16.70	peak	H
2	250.1899	-11.02	40.21	29.19	46.00	-16.81	peak	H
3	375.3199	-6.97	36.94	29.97	46.00	-16.03	peak	H
4	500.4499	-4.85	30.57	25.72	46.00	-20.28	peak	H
5	625.5800	-1.50	30.25	28.75	46.00	-17.25	peak	H
6	875.8400	2.05	27.99	30.04	46.00	-15.96	peak	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	53.2800	-11.53	35.12	23.59	40.00	-16.41	peak	V
2	156.0999	-7.55	36.87	29.32	43.50	-14.18	peak	V
3	250.1899	-11.02	40.95	29.93	46.00	-16.07	peak	V
4	500.4499	-4.85	38.19	33.34	46.00	-12.66	peak	V
5	625.5800	-1.50	36.84	35.34	46.00	-10.66	peak	V
6	875.8400	2.05	34.97	37.02	46.00	-8.98	peak	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or AVG measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Above 1G:

Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11b 2412

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824	6.41	35.41	41.82	74	-32.18	peak	H
2	7236	12.54	38.12	50.66	74	-23.34	peak	H
3	4824	6.41	37.95	44.36	74	-29.64	peak	V
4	7236	12.54	39.69	52.23	74	-21.77	peak	V

Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11b 2437

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874	6.54	44.92	51.46	74	-22.54	peak	H
2	7311	12.72	39.27	51.99	74	-22.01	peak	H
3	4874	6.54	45.59	52.13	74	-21.87	peak	V
4	7311	12.72	40.53	53.25	74	-20.75	peak	V



Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11b 2462

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924	6.66	42.21	48.87	74	-25.13	peak	H
2	7386	12.9	37.07	49.97	74	-24.03	peak	H
3	4924	6.66	42.80	49.46	74	-24.54	peak	V
4	7386	12.9	38.15	51.05	74	-22.95	peak	V

Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11g 2412

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824	6.41	42.14	48.55	74	-25.45	peak	H
2	7236	12.54	37.15	49.69	74	-24.31	peak	H
3	4824	6.41	36.06	42.47	74	-31.53	peak	V
4	7236	12.54	38.73	51.27	74	-22.73	peak	V



Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11g 2437

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874	6.54	43.71	50.25	74	-23.75	peak	H
2	7311	12.72	39.99	52.71	74	-21.29	peak	H
3	4874	6.54	35.79	42.33	74	-31.67	peak	V
4	7311	12.72	35.04	47.76	74	-26.24	peak	V

Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11g 2462

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924	6.66	41.48	48.14	74	-25.86	peak	H
2	7386	12.9	40.04	52.94	74	-21.06	peak	H
3	4924	6.66	39.95	46.61	74	-27.39	peak	V
4	7386	12.9	37.60	50.50	74	-23.50	peak	V



Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11n20 2412

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824	6.41	43.16	49.57	74	-24.43	peak	H
2	7236	12.54	37.21	49.75	74	-24.25	peak	H
3	4824	6.41	41.94	48.35	74	-25.65	peak	V
4	7236	12.54	37.39	49.93	74	-24.07	peak	V

Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11n20 2437

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874	6.54	42.90	49.44	74	-24.56	peak	H
2	7311	12.72	39.95	52.67	74	-21.33	peak	H
3	4874	6.54	38.62	45.16	74	-28.84	peak	V
4	7311	12.72	38.03	50.75	74	-23.25	peak	V



Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11n20 2462

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924	6.66	43.82	50.48	74	-23.52	peak	H
2	7386	12.9	38.31	51.21	74	-22.79	peak	H
3	4924	6.66	45.48	52.14	74	-21.86	peak	V
4	7386	12.9	39.59	52.49	74	-21.51	peak	V

Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11n40 2422

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4844	6.46	46.30	52.76	74	-21.24	peak	H
2	7236	12.54	40.00	52.54	74	-21.46	peak	H
3	4844	6.46	39.24	45.70	74	-28.30	peak	V
4	7236	12.54	37.93	50.47	74	-23.53	peak	V



Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11n40 2437


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874	6.54	39.22	45.76	74	-28.24	peak	H
2	7311	12.72	36.21	48.93	74	-25.07	peak	H
3	4874	6.54	42.82	49.36	74	-24.64	peak	V
4	7311	12.72	37.55	50.27	74	-23.73	peak	V

Engineer : Ternence	Site : EMC Lab AC 102
Limit : FCC_15_03M_PK	Margin : 6
EUT : Notebook computer	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 802.11n40 2452

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4904	6.61	44.18	50.79	74	-23.21	peak	H
2	7356	12.83	40.00	52.83	74	-21.17	peak	H
3	4904	6.61	44.27	50.88	74	-23.12	peak	V
4	7356	12.83	39.75	52.58	74	-21.42	peak	V

**The worst case of Radiated Emission 1~18GHz:**


Engineer: Ternence	
Site: AC102	Time: 2016/04/10 - 15:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Horizontal
EUT: QCNFA435	Power: 120V/60HZ
Note : Transmit by 802.11b 2437	

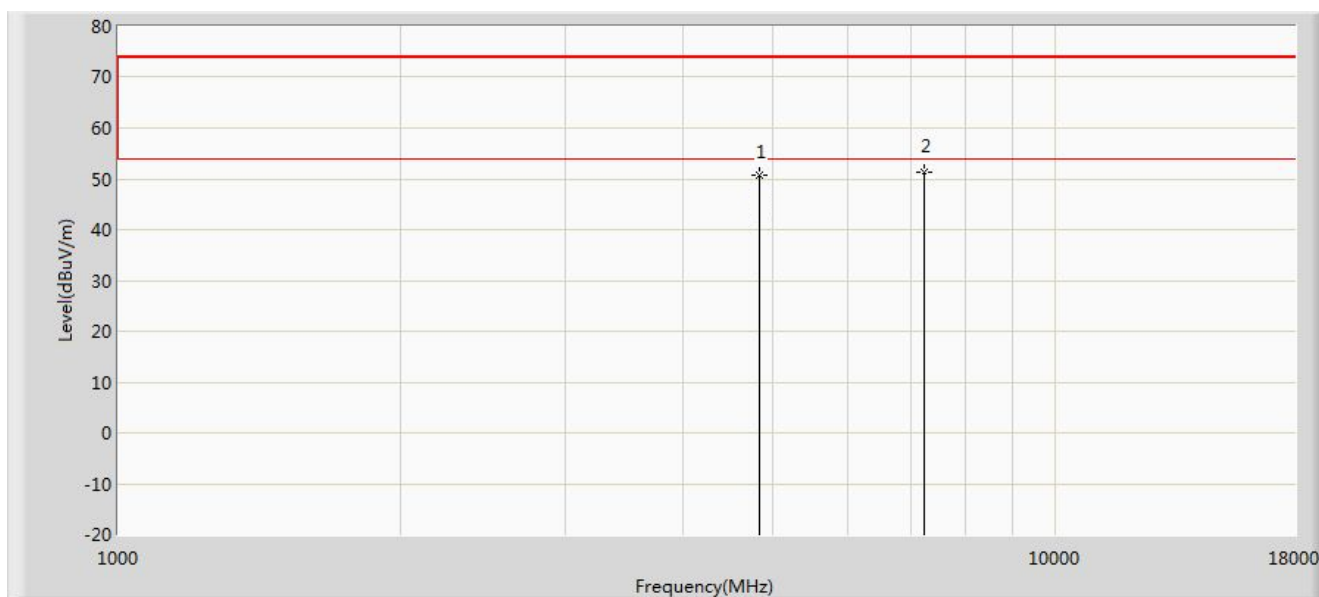

No	Mark	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
1		4874	6.54	44.92	51.46	74	-22.54	PK
2	*	7311	12.72	39.27	51.99	74	-22.01	PK



Engineer: Ternence	
Site: AC102	Time: 2016/04/10 - 15:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: QCNFA435	Power: 120V/60HZ
Note : Transmit by 802.11b 2437	

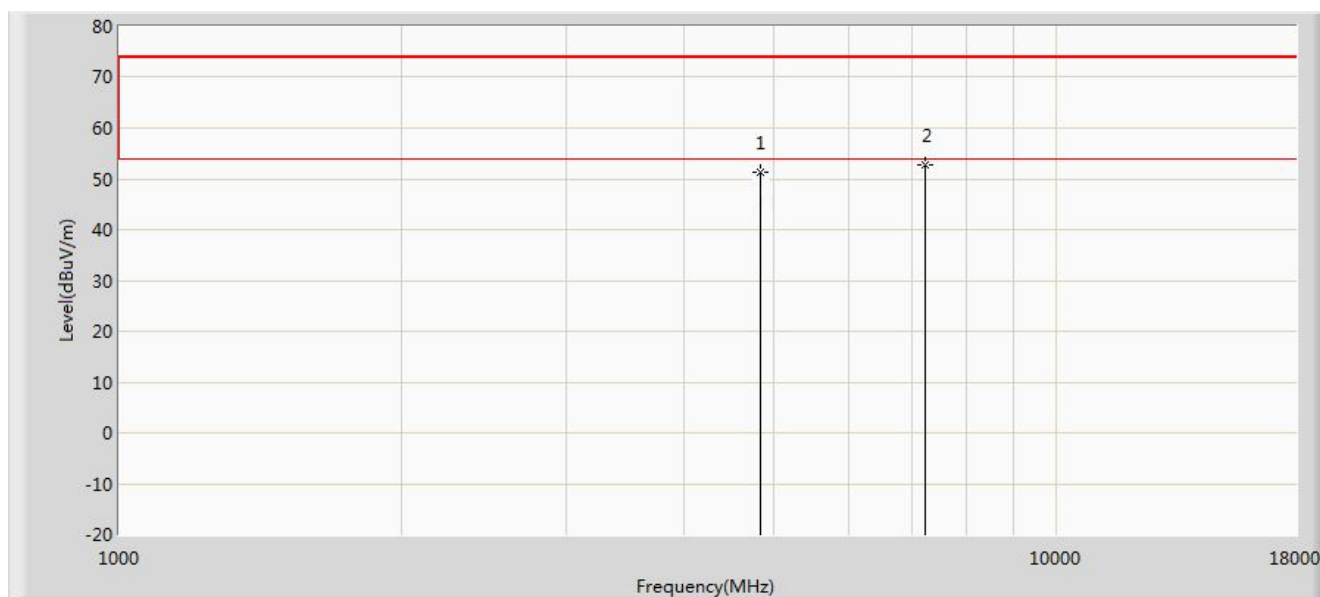

No	Mark	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
1		4874	6.54	45.59	52.13	74	-21.87	PK
2	*	7311	12.72	40.53	53.25	74	-20.75	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or AVG measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor
3. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~40GHz), therefore no data appear in the report.



5. Maximum Output Power

5.1 Test Limit

The maximum power shall be less 1Watt (30dBm).

The conducted output power limits specified in §15.247(b) are based on the use of transmit antennae with directional gains that do not exceed 6 dBi. If transmit antennae with an effective directional gain greater than 6 dBi are used, then the conducted output power from the EUT shall be reduced as specified in §15.247(b) and (c).


Per RSS247 Issue 1 Section 5.4(4), for DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum conducted output power shall not exceed 1W.

5.2 Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum conducted AVG output power using KDB 558074 D01v03r05 - Section 9.2.3.2 AVGPm-G Average Power Method.

The Maximum peak conducted output power using KDB 558074 D01v03r05 - Section 9.1.1 RBW ≥ DTS bandwidth Method.

5.3 Test Setup Layout

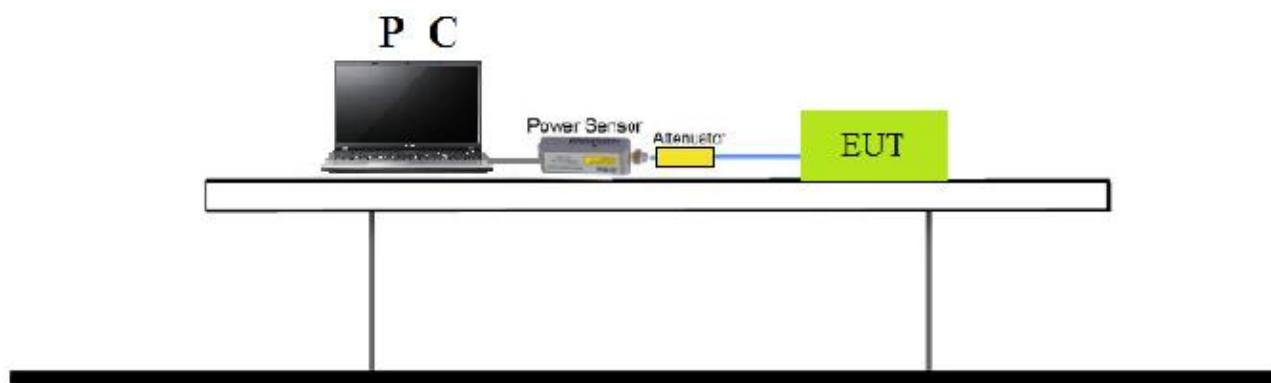

5.4 Measurement Equipment

Instrument	Manufacturer	Type No.	Serial No.	Calibration Date	Valid Date.
PC	Lenovo	E40-70	MP078UQV	N/A	N/A
POWER SENSOR	Agilent	U2021XA	MY53260020	2016/03/27	2017/03/26
Series Power Meter	ANRITSU	ML2495A	1224005	2016/03/27	2017/03/26
Temperature/Humidity Meter	Zhicheng	ZC1-11	CEP-TH-003	2016/03/31	2017/03/30



5.5 Test Result and Data

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (blue marker) for final test of each channel.

MCS Index for 802.11n	Spatial Streams	Data Rate(Mbps)					
		802.11b	802.11g	20MHz Bandwidth		40MHz Bandwidth	
				800ns GI	400ns GI	800ns GI	400ns GI
0	1	1	6	6.5	7.2	13.5	15.0
1	1	2	9	13.0	14.4	27.0	30.0
2	1	5.5	12	19.5	21.7	40.5	45.0
3	1	11	18	26.0	28.9	54.0	60.0
4	1	--	24	39.0	43.3	81.0	90.0
5	1	--	36	52.0	57.8	108.0	120.0
6	1	--	48	58.5	65.0	121.5	135.0
7	1	--	54	65.0	72.2	135.0	150.0
8	2	--	--	13.0	14.4	27.0	30.0
9	2	--	--	26.0	28.9	54.0	60.0
10	2	--	--	39.0	43.3	81.0	90.0
11	2	--	--	52.0	57.8	108.0	120.0
12	2	--	--	78.0	86.7	162.0	180.0
13	2	--	--	104.0	115.6	216.0	240.0
14	2	--	--	117.0	130.0	243.0	270.0
15	2	--	--	130.0	144.0	270.0	300.0



Test Item	Maximum Output Power
Test Mode	Transmit by 802.11b
Test Date	2016-04-05

Channel No.	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)	Required Limit (dBm)	Result
01	2412	21.16	19.20	30	Pass
06	2437	21.91	19.08	30	Pass
11	2462	21.04	19.03	30	Pass

Test Item	Maximum Output Power
Test Mode	Transmit by 802.11g
Test Date	2016-04-05

Channel No.	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)	Required Limit (dBm)	Result
01	2412	20.33	16.17	30	Pass
06	2437	22.40	18.06	30	Pass
11	2462	21.94	16.57	30	Pass

Test Item	Maximum Output Power
Test Mode	Transmit by 802.11n (20MHz)
Test Date	2016-04-05

Channel No.	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)	Required Limit (dBm)	Result
01	2412	22.61	16.06	30	Pass
06	2437	23.03	18.30	30	Pass
11	2462	21.23	15.75	30	Pass



Test Item	Maximum Output Power
Test Mode	Transmit by 802.11n (40MHz)
Test Date	2016-04-05

Channel No.	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)	Required Limit (dBm)	Result
03	2422	20.12	15.00	30	Pass
06	2437	21.16	17.04	30	Pass
09	2452	19.22	13.51	30	Pass



6. Band Edges Measurement

6.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

6.2 Test Procedure

KDB 558074 D01v03r05 – Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r05 – Section 12.2.5 (average power measurements)

6.3 Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz

7.8.3. Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. $VBW \geq 1/T$

Note: For b mode VBW=82Hz; For g mode VBW=510Hz; For n(20MHz) mode VBW=560Hz; For n(40MHz) mode VBW=1.1KHz.


4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode

5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces




6.4 Test Setup Layout

Radiated

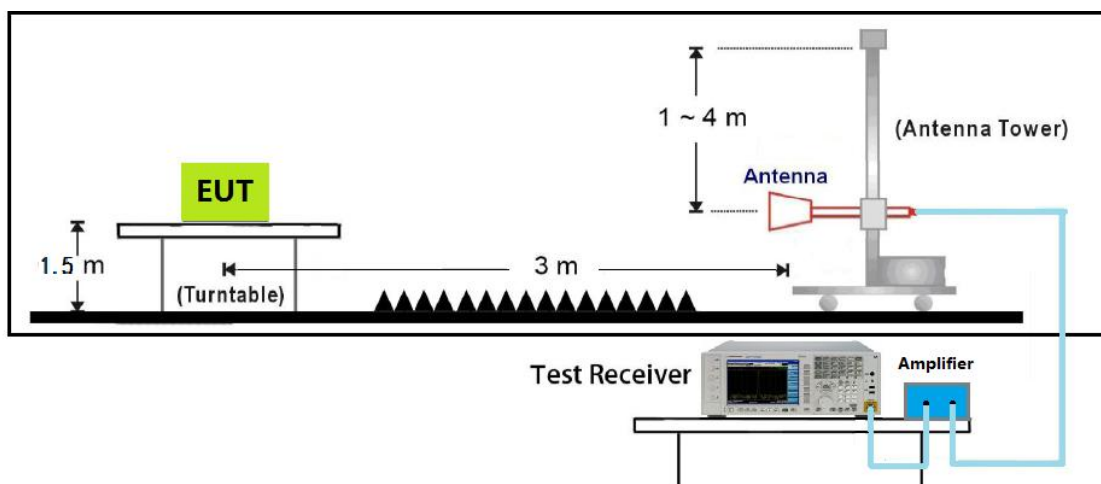

Conducted

Spectrum Analyzer

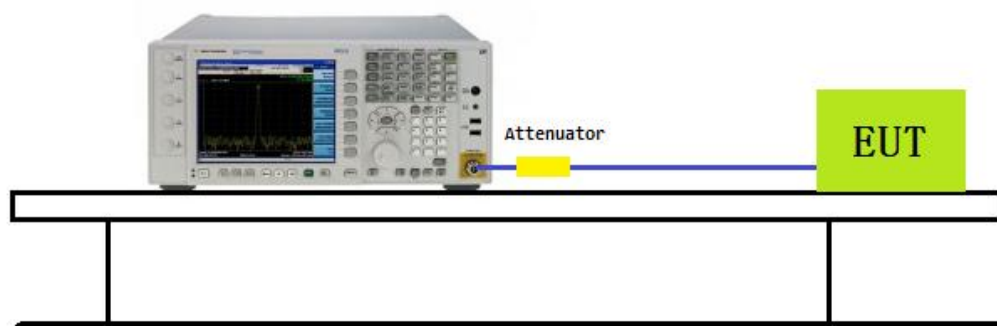



6.5 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	101183	2016.03.28	2017.03.29
Spectrum Analyzer	N9010A	Agilent	MY53400169	2015.11.11	2016.11.10
Spectrum Analyzer	R&S	FSP40	100324	2016.03.23	2017.03.24
H64 Preamplifier	HP	8447F	3113A05582	2016.03.24	2017.03.23
Preamplifier	songyi	EM330	60618	2016.03.29	2017.03.28
Preamplifier	Agilent	8449B	3008A02342	2016.03.29	2017.03.28
Preamplifier	COM-POWER	PA-840	711885	2016.03.29	2017.03.28
Bilog Antenna	Sunol Science	JB1	A072414-1	2015.04.22	2016.04.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2015.04.20	2016.04.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-347	2015.04.20	2016.04.19
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2016.03.31	2017.03.30



6.6 Test Result and Data

802.11b

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type	Antenna Pole (V/H)
1	2390.000	62.516	29.405	-11.484	74.000	33.111	PK	H
2	2390.000	50.328	17.217	-3.672	54.000	33.111	AV	H
3	2390.000	62.502	29.391	-11.498	74.000	33.111	PK	V
4	2390.000	50.205	17.094	-3.795	54.000	33.111	AV	V
5	2483.500	63.244	29.752	-10.756	74.000	33.493	PK	H
6	2483.500	50.063	16.571	-3.937	54.000	33.493	AV	H
7	2483.500	62.827	29.335	-11.173	74.000	33.493	PK	V
8	2483.500	49.481	15.989	-4.519	54.000	33.493	AV	V

802.11g

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type	Antenna Pole (V/H)
1	2390.000	64.379	31.268	-9.621	74.000	33.111	PK	H
2	2390.000	50.922	17.811	-3.078	54.000	33.111	AV	H
3	2390.000	64.634	31.523	-9.366	74.000	33.111	PK	V
4	2390.000	50.398	17.287	-3.602	54.000	33.111	AV	V
5	2483.500	64.902	31.410	-9.098	74.000	33.493	PK	H
6	2483.500	51.268	17.776	-2.732	54.000	33.493	AV	H
7	2483.500	64.628	31.136	-9.372	74.000	33.493	PK	V
8	2483.500	50.701	17.209	-3.299	54.000	33.493	AV	V



802.11n20


No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type	Antenna Pole (V/H)
1	2390.000	64.520	31.409	-9.480	74.000	33.111	PK	H
2	2390.000	49.966	16.855	-4.034	54.000	33.111	AV	H
3	2390.000	64.757	31.646	-9.243	74.000	33.111	PK	V
4	2390.000	51.112	18.001	-2.888	54.000	33.111	AV	V
5	2483.500	69.688	36.196	-4.312	74.000	33.493	PK	H
6	2483.500	51.735	18.243	-2.265	54.000	33.493	AV	H
7	2483.500	70.662	37.170	-3.338	74.000	33.493	PK	V
8	2483.500	51.742	18.250	-2.258	54.000	33.493	AV	V

802.11n40

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type	Antenna Pole (V/H)
1	2390.000	69.233	36.122	-4.767	74.000	33.111	PK	H
2	2390.000	50.167	17.056	-3.833	54.000	33.111	AV	H
3	2390.000	71.776	38.665	-2.224	74.000	33.111	PK	V
4	2390.000	51.674	18.563	-2.326	54.000	33.111	AV	V
5	2483.500	69.431	35.939	-4.569	74.000	33.493	PK	H
6	2483.500	51.491	17.999	-2.509	54.000	33.493	AV	H
7	2483.500	67.023	33.531	-6.977	74.000	33.493	PK	V
8	2483.500	51.619	18.127	-2.381	54.000	33.493	AV	V

**The worst-case plots of bandedge for each mode in each operating band:**


Site: AC102	Time: 2016/04/01 - 16:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Horizontal
EUT: QCNFA435	Power: AC 120V/60Hz
Note: Mode1: Transmit at 2412MHz by 802.11b	

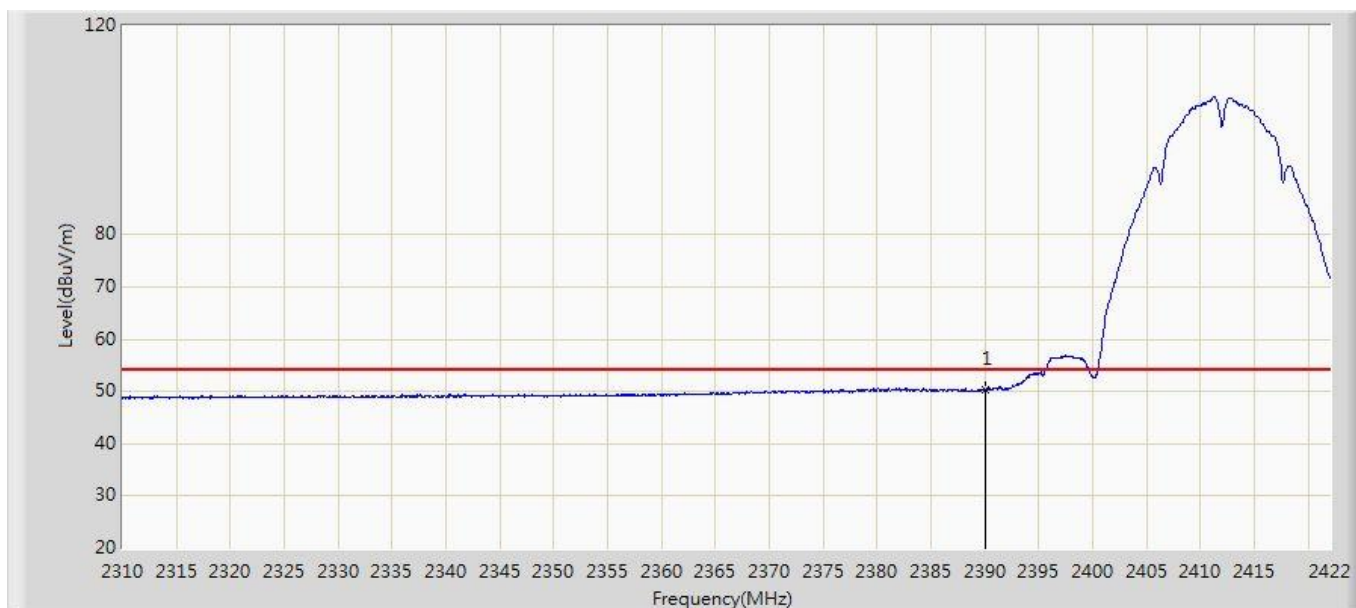

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.328	17.217	-3.672	54.000	33.111	AV




Site: AC102	Time: 2016/04/01- 16:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: QCNFA435	Power: AC 120V/60Hz
Note: Model1: Transmit at 2462MHz by 802.11g	

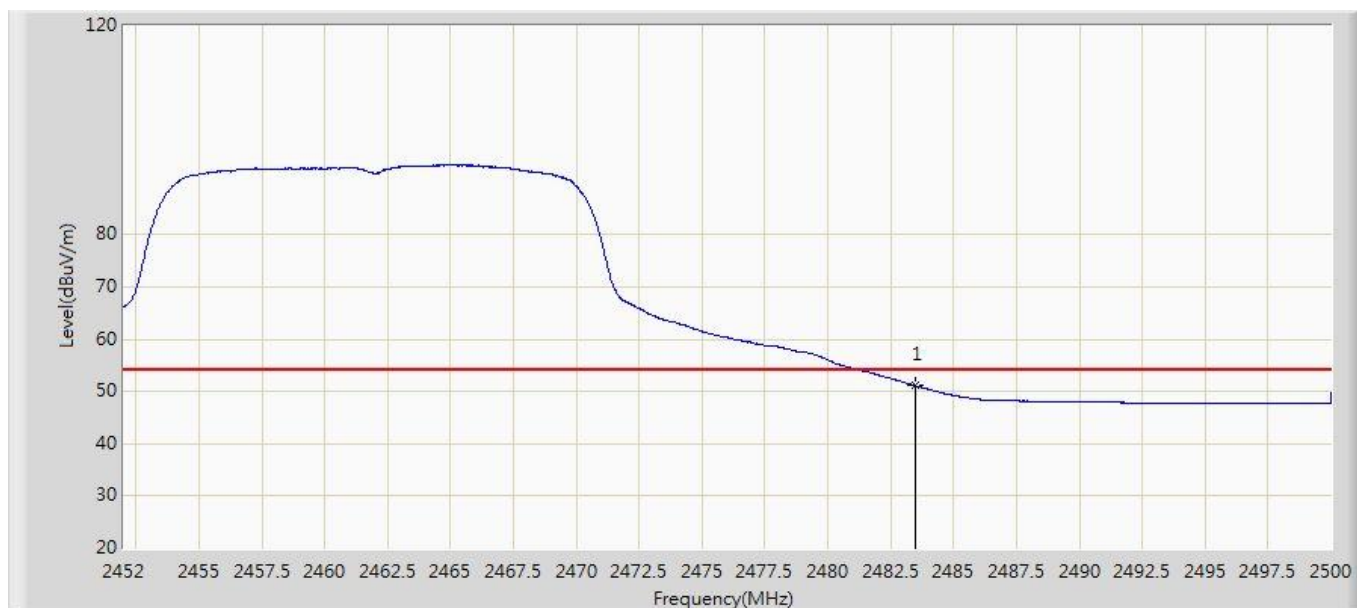

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.268	17.776	-2.732	54	33.493	AV




Site: AC102	Time: 2016/04/01 - 16:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: QCNFA435	Power: AC 120V/60Hz
Note: Model1: Transmit at 2462MHz by 802.11n20	

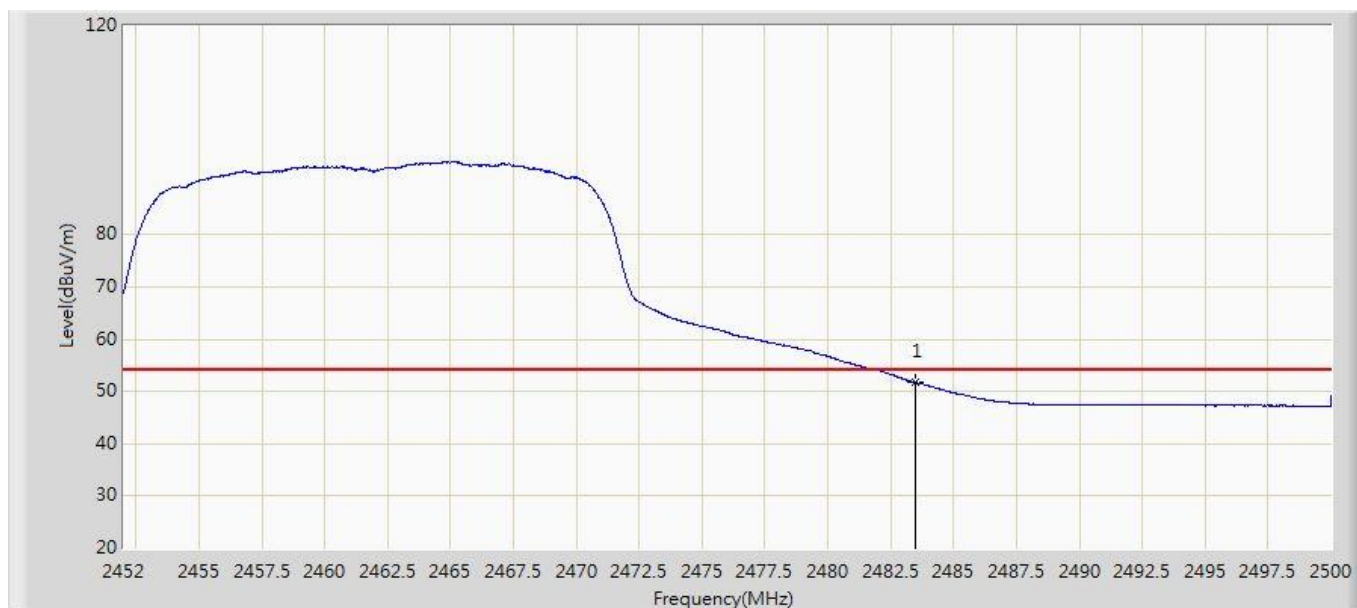

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.742	18.249	-2.258	54.000	33.493	AV



Site: AC102	Time: 2016/04/01- 16:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: QCNFA435	Power: AC 120V/60Hz
Note: Mode1: Transmit at 2422MHz by 802.11n40	

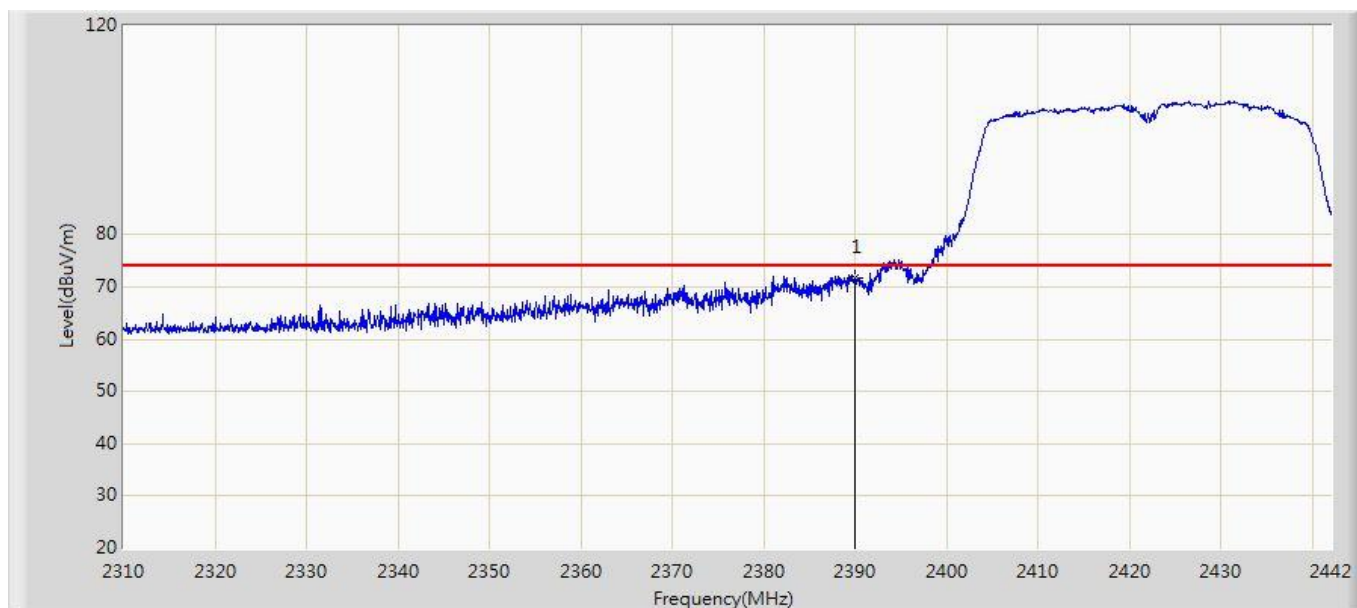

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	71.776	38.665	-2.224	74.000	33.111	PK



7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

7.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.