

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-540_09.doc	Date of Report:	27-Aug-2009
Number of pages:	39	Customer's Contact person:	Bruno Ramelli
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-540 (HW 03.10), Battery; BL-4CT, Headset; WH-205, AC Charger; AC-8E		
FCC ID:	PPIRM-540	IC:	661U-RM540
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Christian Andersen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	06-Aug-2009
Testing completed	27-Aug-2009
The customer's contact person	Bruno Ramelli
Test Plan referred to	T:\Projects\RM-540\TestPlan_RS\RS_testplan_RM-540.xls
Notes	None
Document name	FCC15C_RM-540_09.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-540	004401107992022	03.10	-	3.08	24907
Phone	RM-540	004401107990950	03.10	-	3.08	24910
Phone	RM-540	004401107992204	03.10	-	3.08	24906
Battery	BL-4CT	3820669152115450819;0670565	-	-	-	24898
Battery	BL-4CT	3820669152115450819;0670565	-	-	-	24901
Headset	WH-205	06944219215D1R00421	-	-	-	24893
Headset	WH-205	06944219215D1R00540	-	-	-	24894
AC Charger	AC-8E	4090499116040501626;0675387	-	-	-	24896
AC Charger	AC-8E	4090499116040501611;0675387	-	-	-	24897

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	Passed
15.247(d)	A8.5	Band edge compliance of RF emissions	Passed
15.247(d)	A8.5	Spurious RF conducted emissions	Passed
15.247(d), 15.209	A8.5	Spurious radiated emissions	Passed
15.207	7.2.2	AC powerline conducted emissions	Passed
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	Passed
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	Passed
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	Passed

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	10
4.1. Test method and limit	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	15
5.1. Test method and limit	15
5.2. Bluetooth Test results	16
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	19
6.1. Test method and limit	19
6.2. Bluetooth Test results	20
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	23
7.1. Test method and limit	23
7.2. Bluetooth Test results	24
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	25
8.1. Test method and limit	25
8.2. Bluetooth Test results	26
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b)).....	29
9.1. Test method and limit	29
9.2. Bluetooth Test results	30
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d)).....	32
10.1. Test method and limit	32
10.2. Bluetooth Test results	33
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	35
11.1. Test method and limit	35
11.2. Bluetooth test results	36


12.	Test Equipment	38
12.1.	Conducted measurements	38
12.2.	Radiated measurements	38

2. Test setups


2.1. Conducted RF test setup

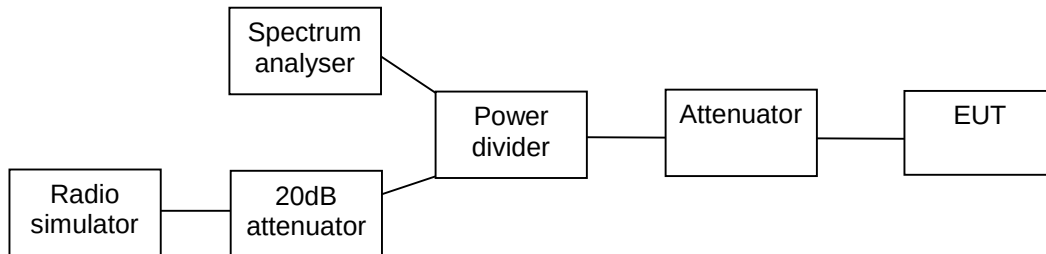

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

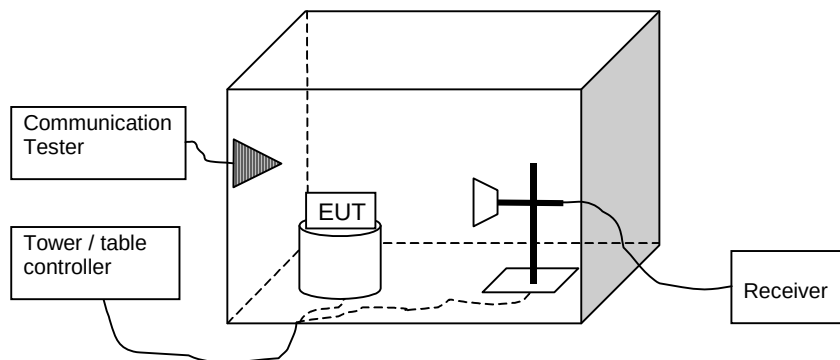

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-540 DUT 24910
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 54 / 101.3
Date of measurements	14-Aug-2009
Measured by	Christian Andersen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	3.00	1.995	Passed
40 / 2442	4.50	2.818	Passed
78 / 2480	5.40	3.467	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

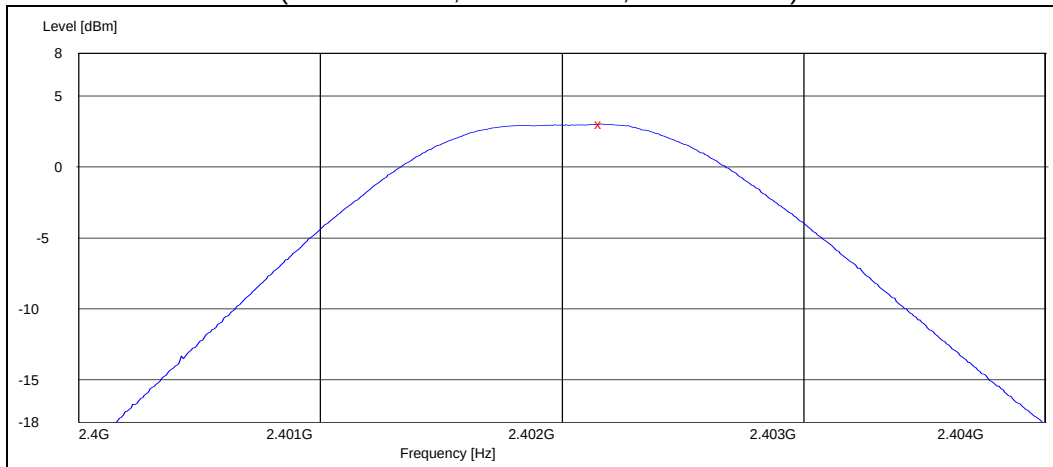

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

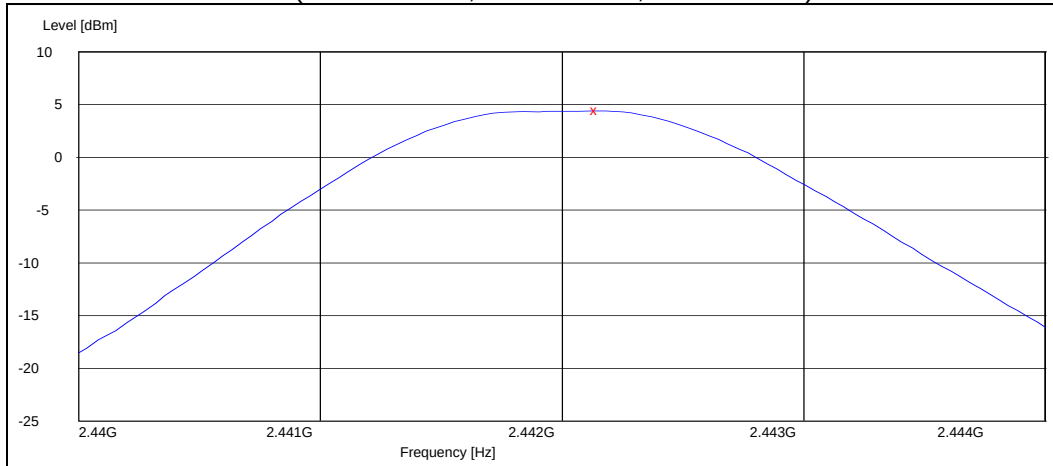


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

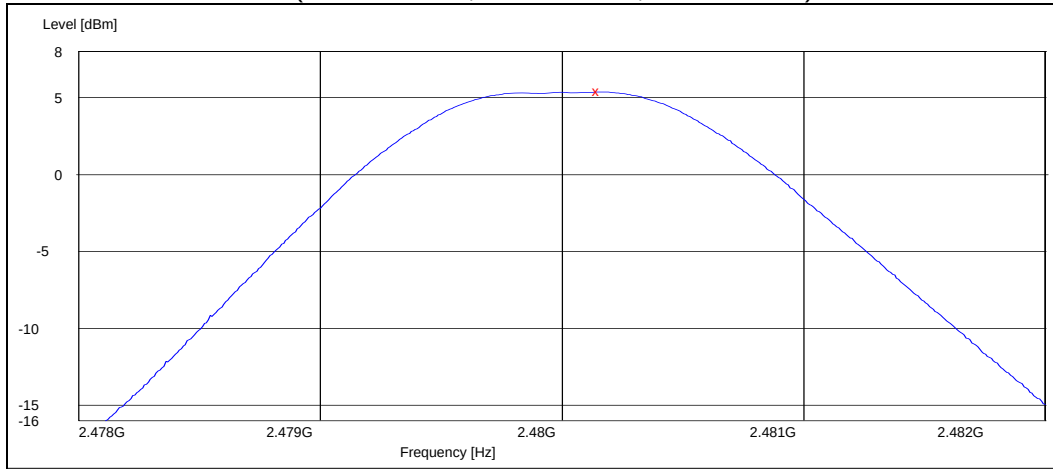


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	2.20	1.660	Passed
40 / 2442	3.80	2.399	Passed
78 / 2480	4.80	3.020	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

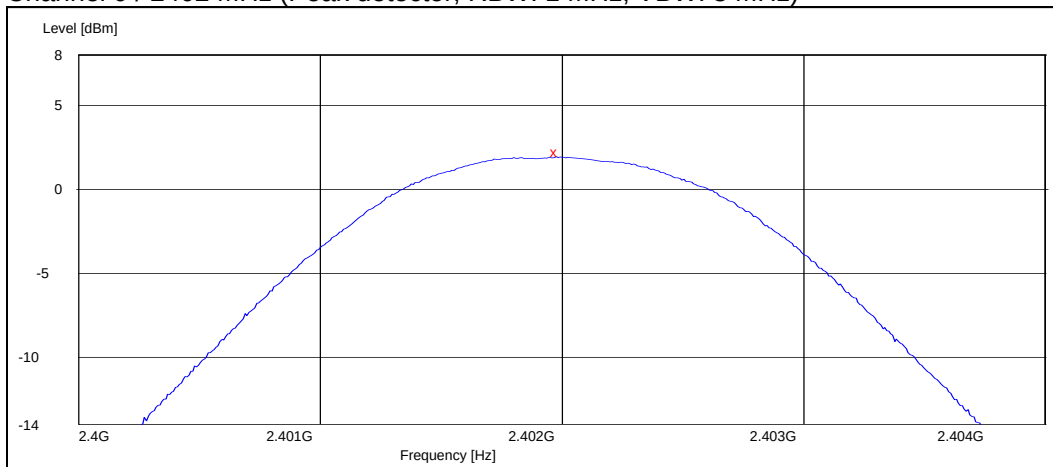

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

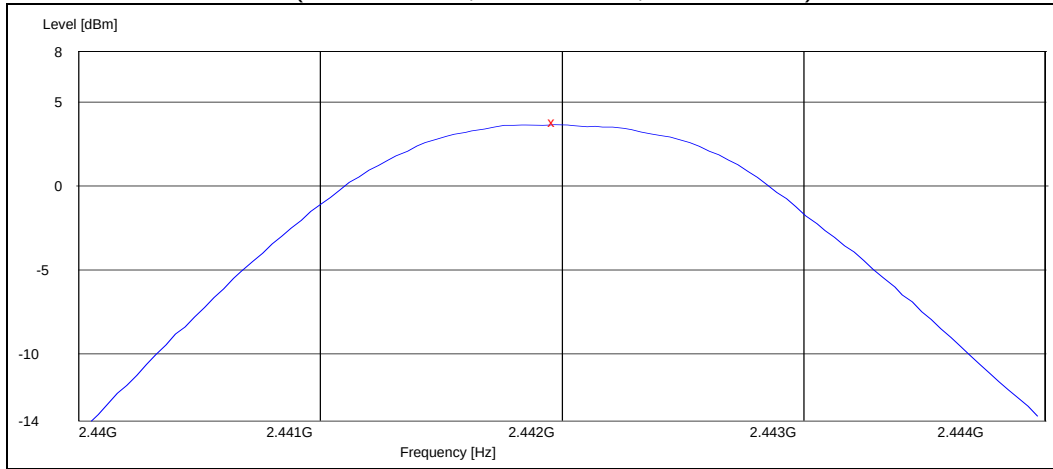

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

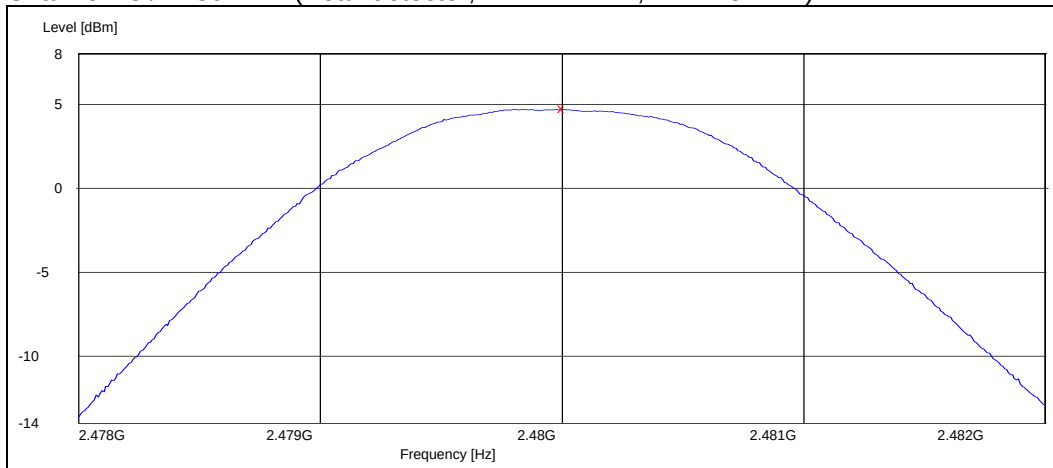

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-540 DUT 24907
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in slide open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 56 / 101
Date of measurements	19-Aug-2009
Measured by	Christian Andersen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

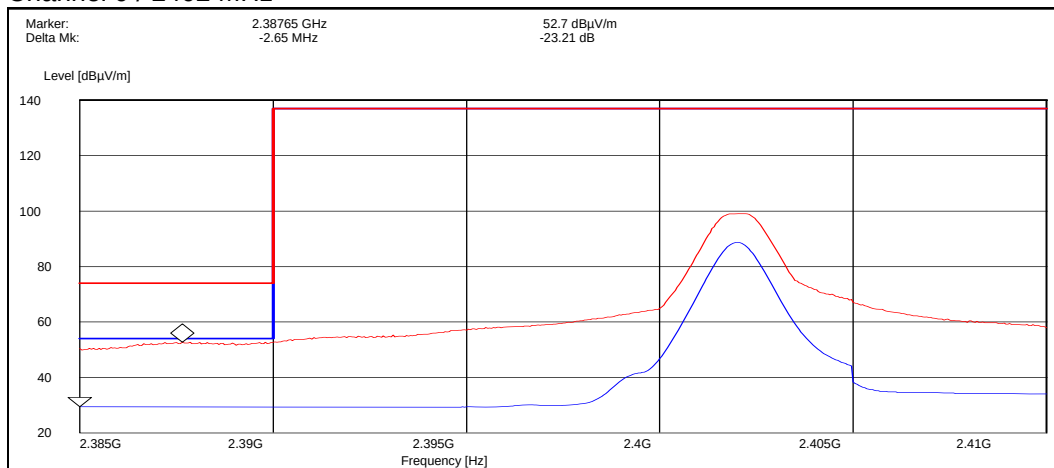


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	52.70	Passed
Average	29.50	Passed

Channel 78 / 2480 MHz

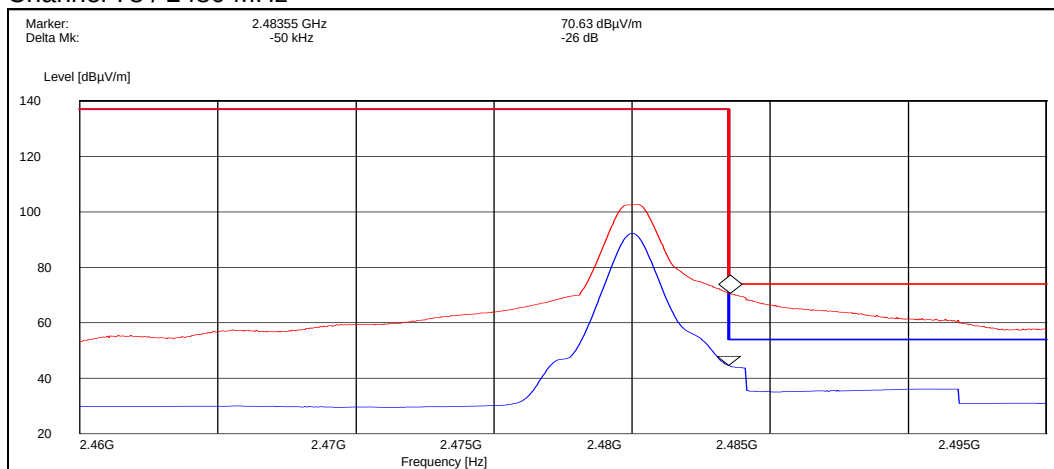


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	70.60	Passed
Average	44.60	Passed

Hopping on, low end

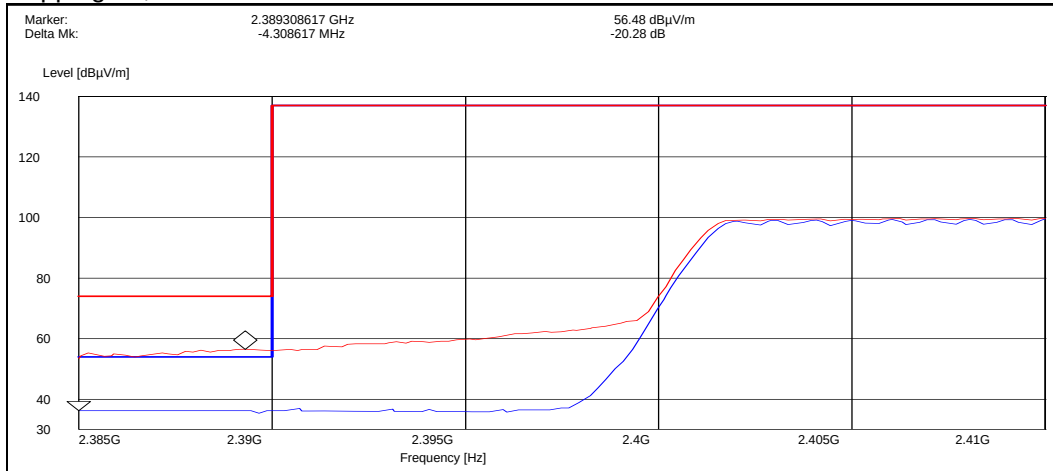

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	56.50	Passed
Average	36.20	Passed


Hopping on, high end

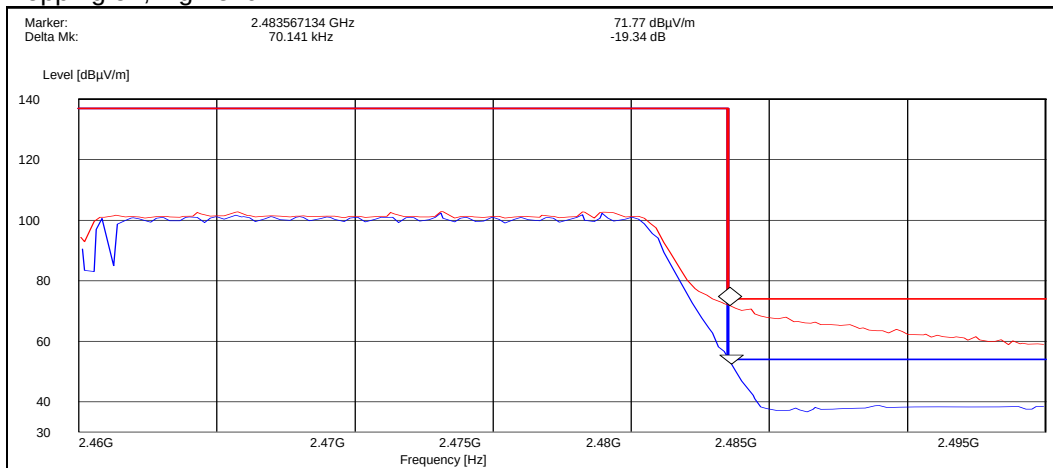

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	71.80	Passed
Average	52.40	Passed


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

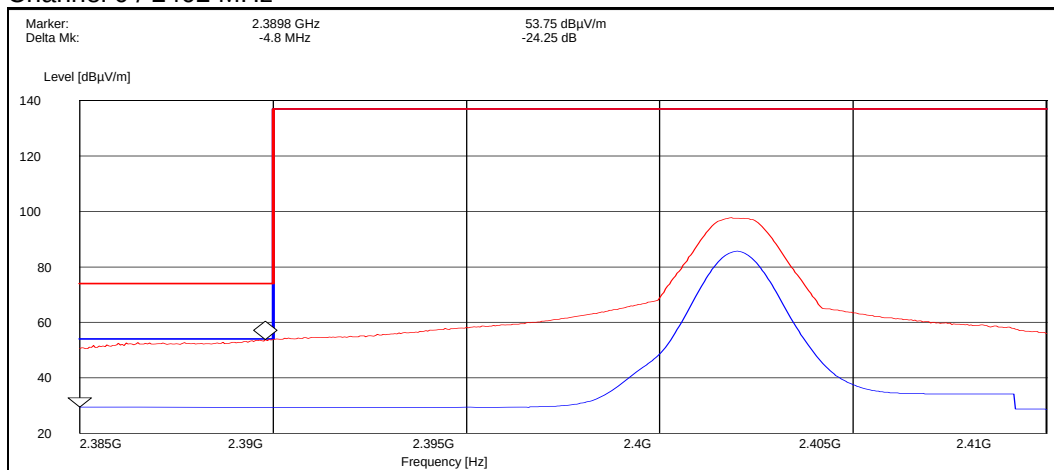


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	53.80	Passed
Average	29.50	Passed

Channel 78 / 2480 MHz

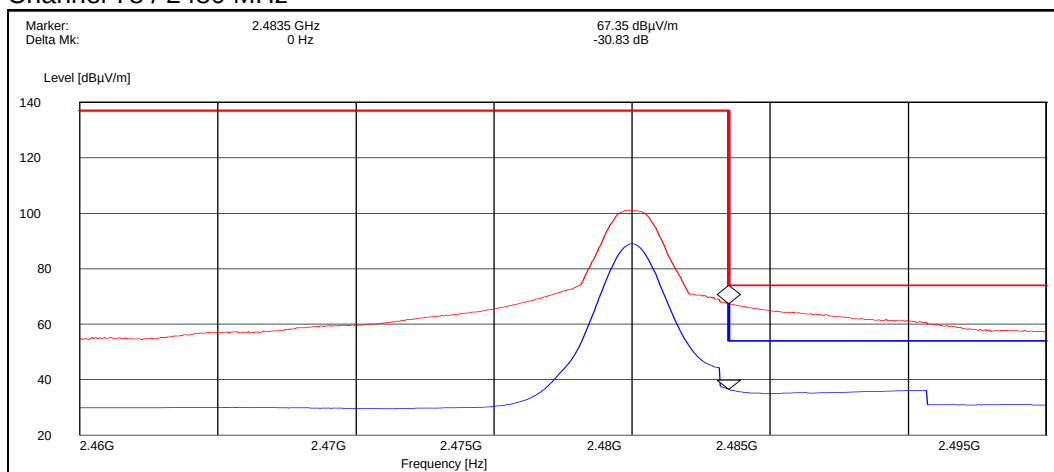


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	67.30	Passed
Average	36.50	Passed

Hopping on, low end

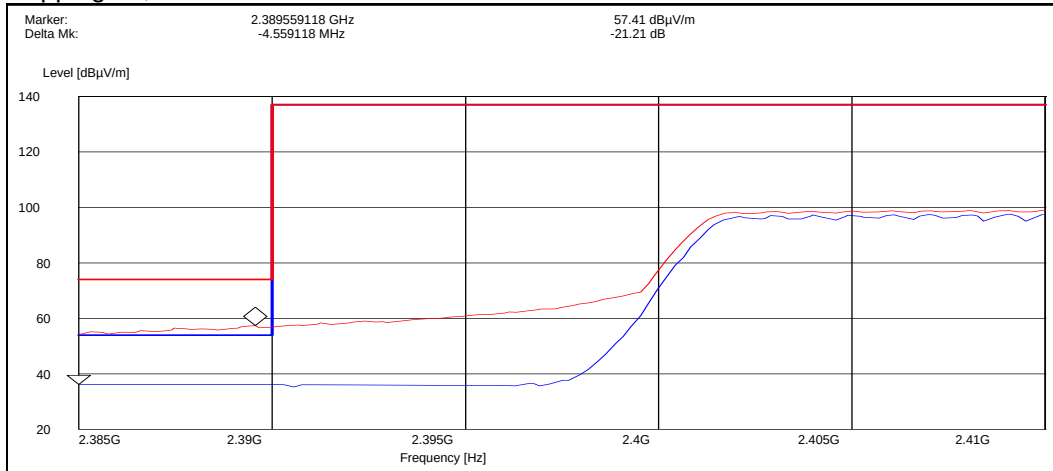

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	57.40	Passed
Average	36.20	Passed

Hopping on, high end

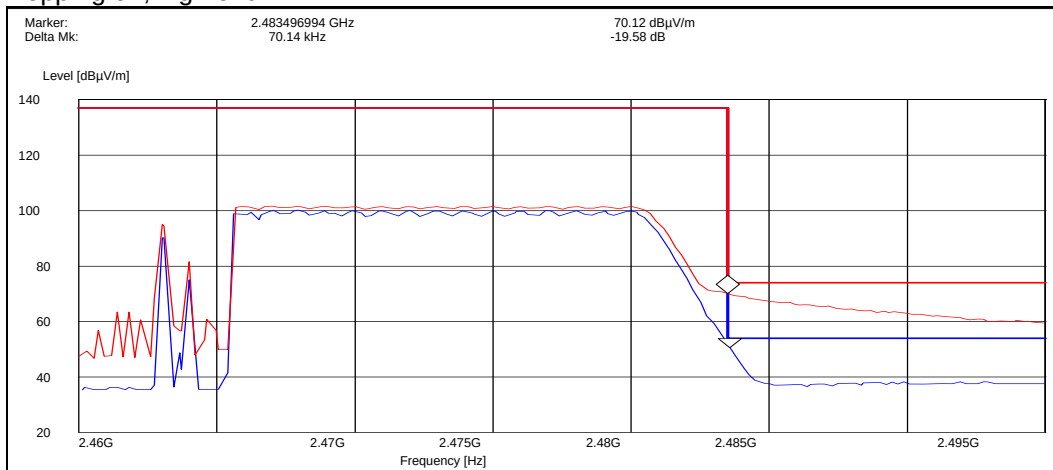

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	70.10	Passed
Average	50.50	Passed

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-540 DUT 24910
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 54 / 101.3
Date of measurements	14-Aug-2009
Measured by	Christian Andersen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

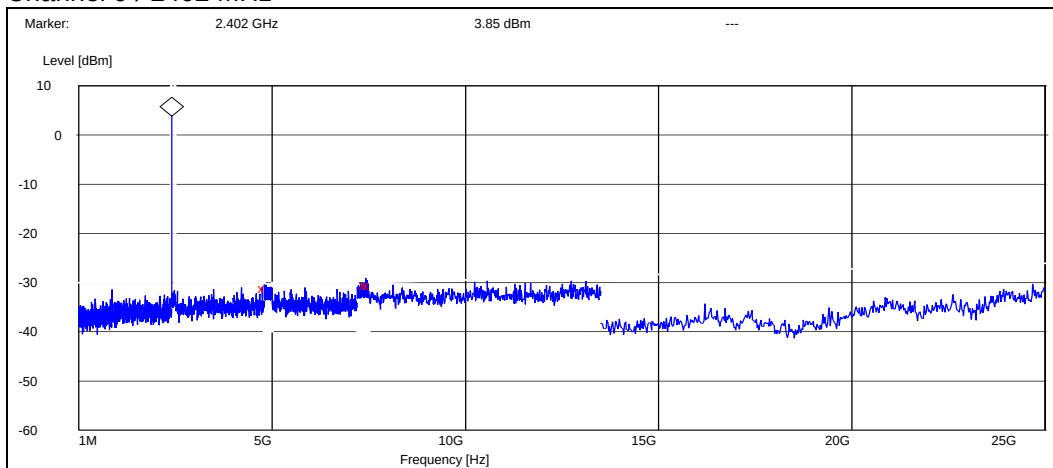

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4804.400000	-35.049464	Passed
7428.600000	-34.349464	Passed
7500.000000	-34.349464	Passed


Channel 40 / 2442 MHz

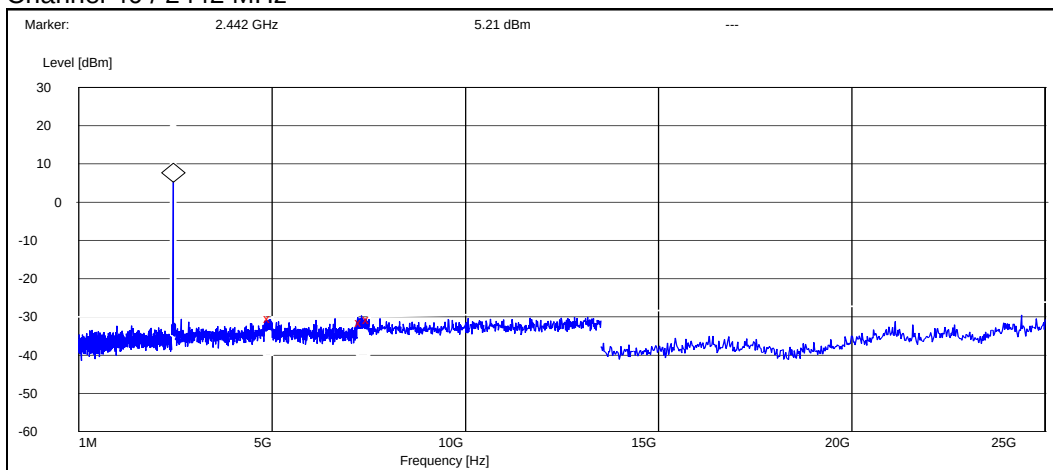

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4953.600000	-35.712357	Passed
7319.400000	-36.612357	Passed
7500.000000	-35.812357	Passed

Channel 78 / 2480 MHz

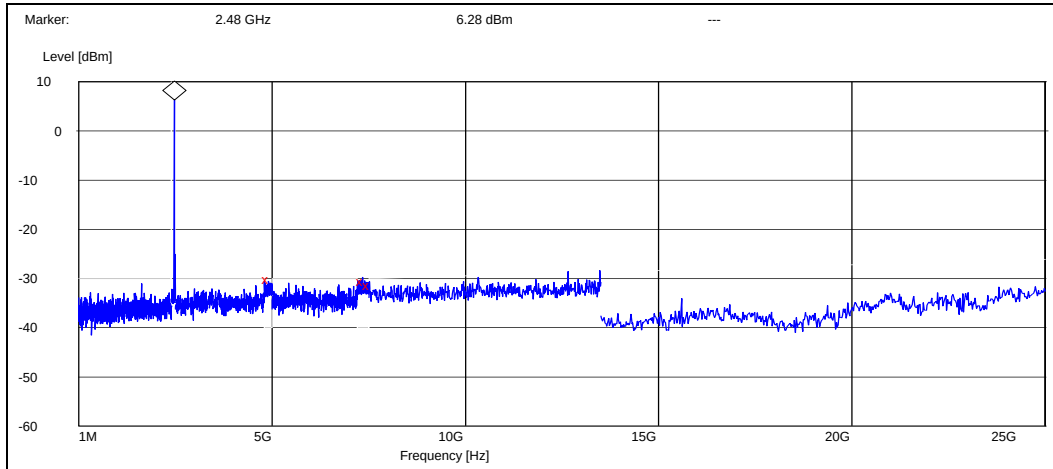


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4904.000000	-36.477824	Passed
7347.000000	-36.877824	Passed
7500.000000	-37.677824	Passed

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

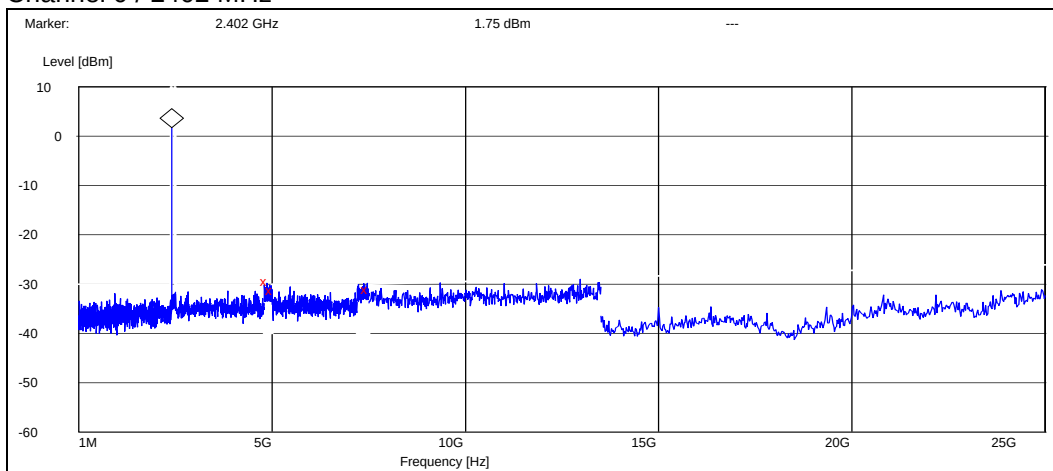

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4865.600000	-31.250488	Passed
5000.000000	-32.950488	Passed
7457.400000	-32.850488	Passed


Channel 40 / 2442 MHz

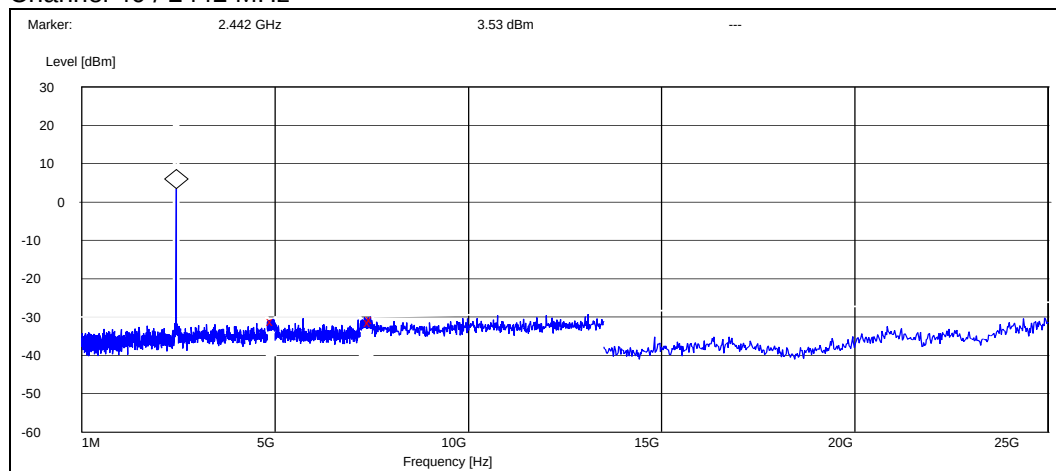

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4954.800000	-34.528008	Passed
7468.200000	-35.028008	Passed
7500.000000	-34.228008	Passed

Channel 78 / 2480 MHz

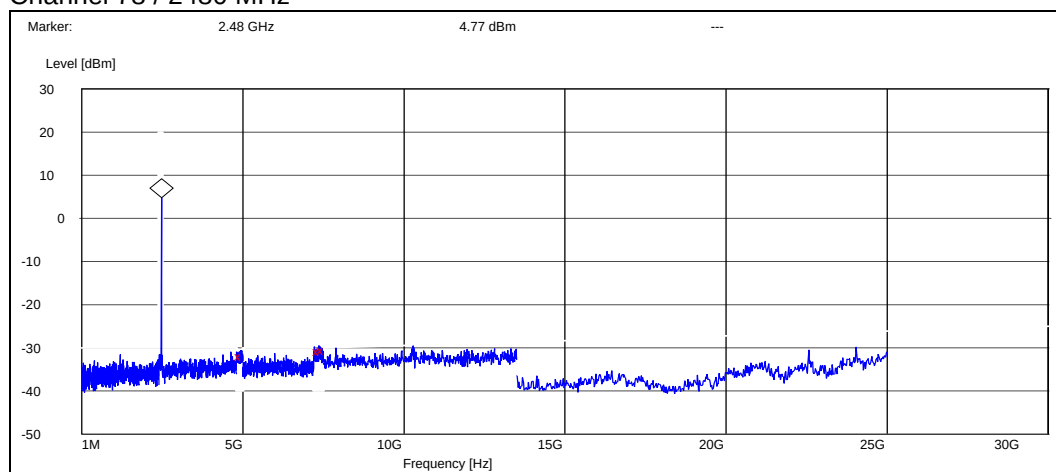

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4938.400000	-36.770737	Passed
7362.600000	-35.670737	Passed
7500.000000	-35.370737	Passed

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-540 DUT 24907
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in slide open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 56 / 101
Date of measurements	19-Aug-2009
Measured by	Christian Andersen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.70	96.61	40.20	-0.5	VERTICAL	Passed
7206.000000	42.00	125.89	33.20	8.8	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	27.10	22.65	27.60	-0.5	HORIZONTAL	Passed
7206.000000	29.00	28.18	20.20	8.8	VERTICAL	Passed

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.535872	24.20	16.22	40.30	-16.1	VERTICAL	Passed
74.869940	20.40	10.47	45.90	-25.5	HORIZONTAL	Passed
74.948497	8.70	2.72	34.20	-25.5	HORIZONTAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
1959.921844	64.70	1717.91	69.10	-4.4	VERTICAL	Passed
4883.767535	40.50	105.93	40.70	-0.2	HORIZONTAL	Passed
4884.269539	40.00	100.00	40.20	-0.2	HORIZONTAL	Passed
7339.681363	42.60	134.90	33.10	9.5	VERTICAL	Passed
7415.323647	43.30	146.22	33.90	9.4	VERTICAL	Passed
7427.855711	43.50	149.62	34.10	9.4	VERTICAL	Passed
17460.421844	53.40	467.74	29.80	23.6	VERTICAL	Passed
17925.351703	59.60	954.99	30.40	29.2	VERTICAL	Passed

*1960.0 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.921844	63.90	1566.75	68.30	-4.4	VERTICAL	Passed
4883.767535	26.40	20.89	26.60	-0.2	HORIZONTAL	Passed
4883.769539	26.70	21.63	26.90	-0.2	HORIZONTAL	Passed
7339.681363	30.10	31.99	20.60	9.5	VERTICAL	Passed
7409.323647	30.40	33.11	20.70	9.7	VERTICAL	Passed
7424.355711	30.60	33.88	21.30	9.3	VERTICAL	Passed
17461.921844	40.00	100.00	16.40	23.6	VERTICAL	Passed
17926.851703	45.90	197.24	16.70	29.2	VERTICAL	Passed

*1960.0 MHz frequency is coming from communication tester and thus ignored.

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.30	103.51	40.40	-0.1	VERTICAL	Passed
7440.000000	43.20	144.54	33.60	9.6	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	27.10	22.65	27.20	-0.1	HORIZONTAL	Passed
7440.000000	30.40	33.11	20.80	9.6	VERTICAL	Passed

6.2.2 8DPSK modulation, PRBS packet type

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.80	97.72	40.30	-0.5	HORIZONTAL	Passed
7206.000000	41.90	124.45	33.10	8.8	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	28.20	25.70	28.70	-0.5	HORIZONTAL	Passed
7206.000000	28.80	27.54	20.00	8.8	VERTICAL	Passed

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.995391	10.80	3.47	27.20	-16.4	VERTICAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
1959.921844	64.50	1678.80	68.90	-4.4	VERTICAL	Passed
4883.269539	38.10	80.35	38.30	-0.2	HORIZONTAL	Passed
4884.267535	39.70	96.61	39.90	-0.2	HORIZONTAL	Passed
7289.575150	41.80	123.03	33.10	8.7	VERTICAL	Passed
7345.689379	42.80	138.04	33.00	9.8	VERTICAL	Passed
7432.859719	43.50	149.62	34.00	9.5	VERTICAL	Passed
17455.407816	53.70	484.17	30.20	23.5	VERTICAL	Passed
17920.835671	58.90	881.05	29.80	29.1	VERTICAL	Passed

*1960.0 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
1959.921844	63.90	1566.75	68.30	-4.4	VERTICAL	Passed
4883.769539	27.60	23.99	27.80	-0.2	HORIZONTAL	Passed
4884.267535	27.50	23.71	27.70	-0.2	HORIZONTAL	Passed
7286.075150	29.00	28.18	20.40	8.6	VERTICAL	Passed
7341.689379	30.20	32.36	20.60	9.6	VERTICAL	Passed
7431.359719	30.60	33.88	21.20	9.4	VERTICAL	Passed
17456.407816	40.10	101.16	16.60	23.5	VERTICAL	Passed
17919.835671	45.90	197.24	16.80	29.1	VERTICAL	Passed

*1960.0 MHz frequency is coming from communication tester and thus ignored.

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	39.70	96.61	39.80	-0.1	HORIZONTAL	Passed
7440.000000	43.10	142.89	33.50	9.6	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	27.50	23.71	27.60	-0.1	HORIZONTAL	Passed
7440.000000	30.30	32.73	20.70	9.6	VERTICAL	Passed

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-540 DUT 24906
Accessories with DUT numbers	BL-4CT DUT 24901, WH-205 DUT 24894, AC-8E DUT 24897
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 65 / 1022
Date of measurements	27-Aug-2009
Measured by	Ruben Hansen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

TX mode, channel 40 / 2442 MHz

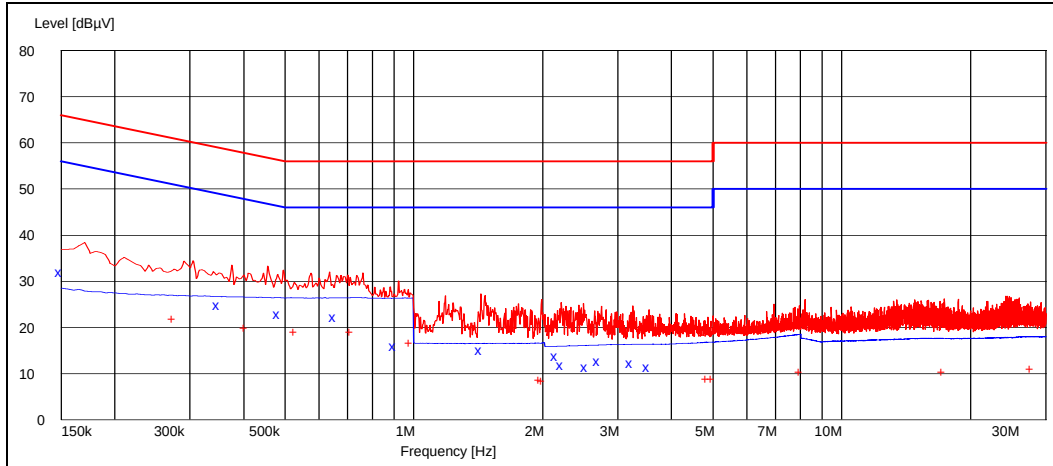

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.150000	32.00	L1	Passed
0.350000	24.90	N	Passed
0.485000	22.80	L1	Passed
0.655000	22.20	L1	Passed
0.905000	16.10	L1	Passed
1.440000	15.00	N	Passed
2.160000	13.90	N	Passed
2.230000	11.90	N	Passed
2.540000	11.40	N	Passed
2.710000	12.80	N	Passed
3.235000	12.20	N	Passed
3.550000	11.30	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.275000	21.80	L1	Passed
0.405000	19.80	N	Passed
0.530000	18.90	L1	Passed
0.715000	19.10	N	Passed
0.985000	16.70	N	Passed
1.980000	8.50	N	Passed
2.005000	8.40	L1	Passed
4.870000	8.80	N	Passed
5.000000	8.70	N	Passed
8.040000	10.30	N	Passed
17.320000	10.30	N	Passed
27.895000	10.90	N	Passed

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-540 DUT 24910
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 54 / 101.3
Date of measurements	14-Aug-2009
Measured by	Christian Andersen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	800.000	Passed
40 / 2442	796.000	Passed
78 / 2480	796.000	Passed


Channel 0 / 2402 MHz

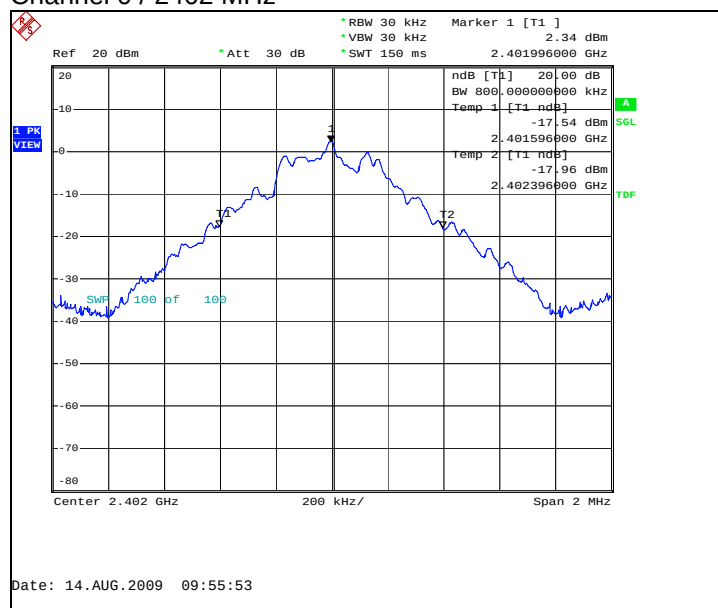

Channel 40 / 2442 MHz

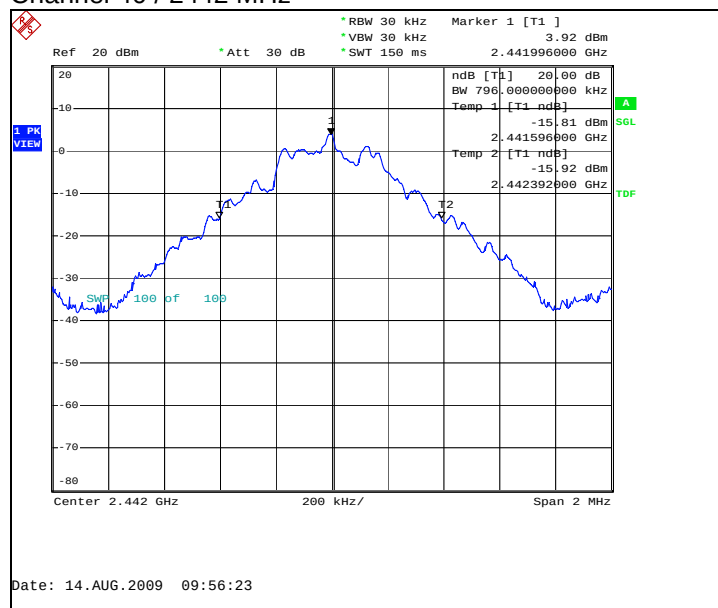


Channel 78 / 2480 MHz

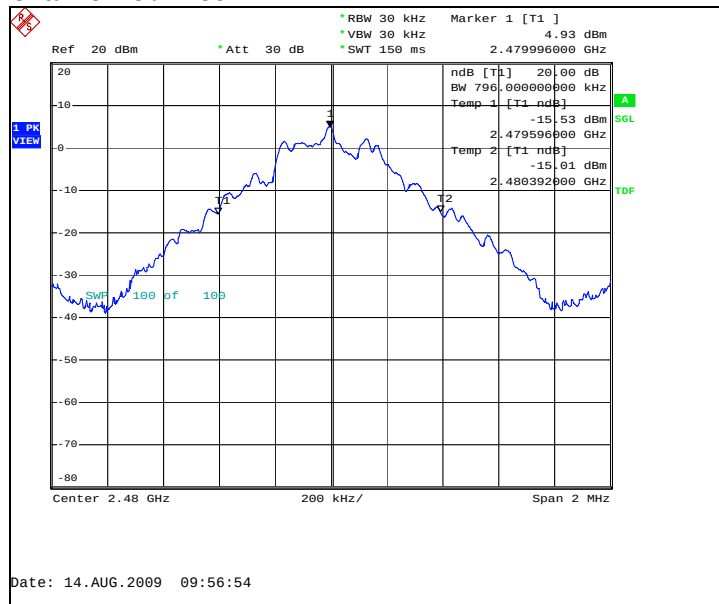


8.2.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1268.000	Passed
40 / 2442	1272.000	Passed
78 / 2480	1272.000	Passed


Channel 0 / 2402 MHz

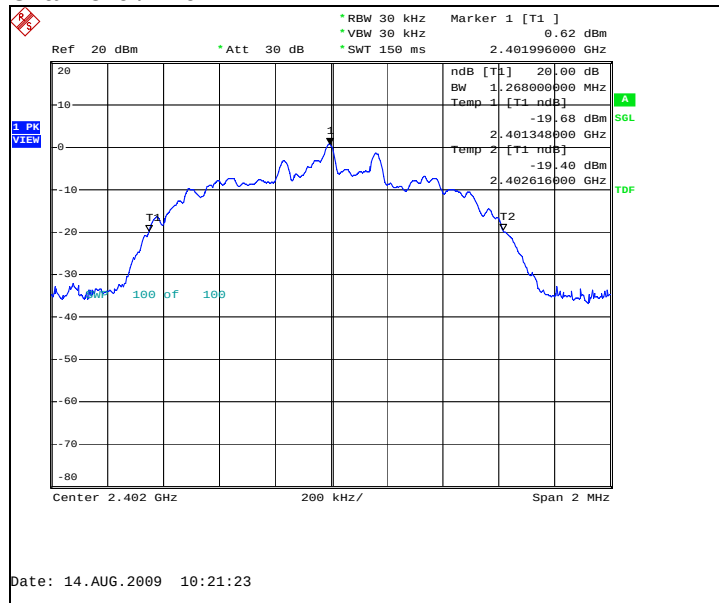

Channel 40 / 2442 MHz

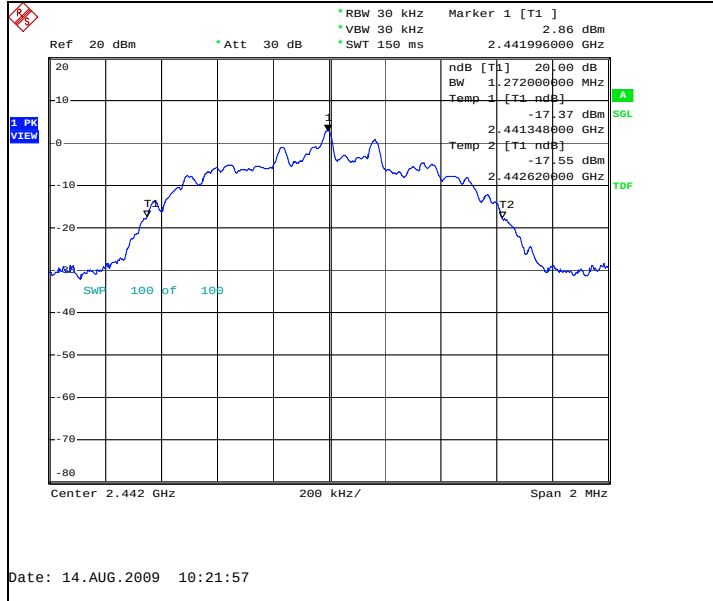

Channel 78 / 2480 MHz

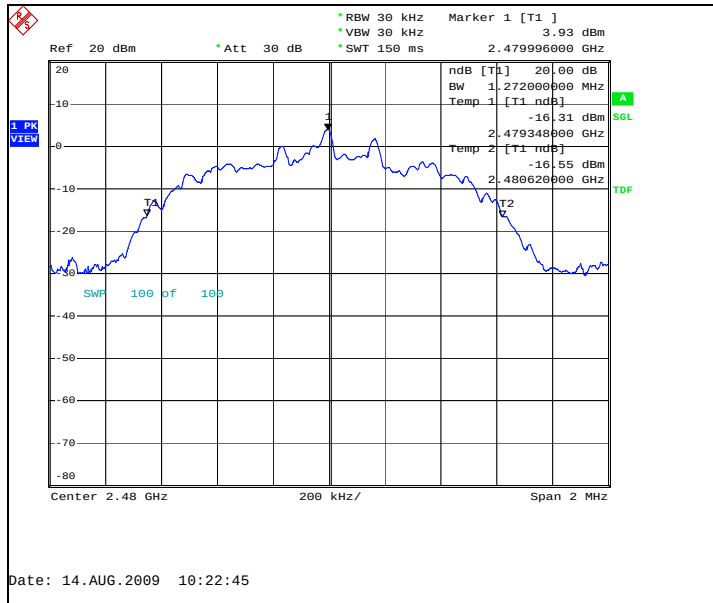

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-540 DUT 24910
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 54 / 101.3
Date of measurements	14-Aug-2009
Measured by	Christian Andersen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
990	Passed


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

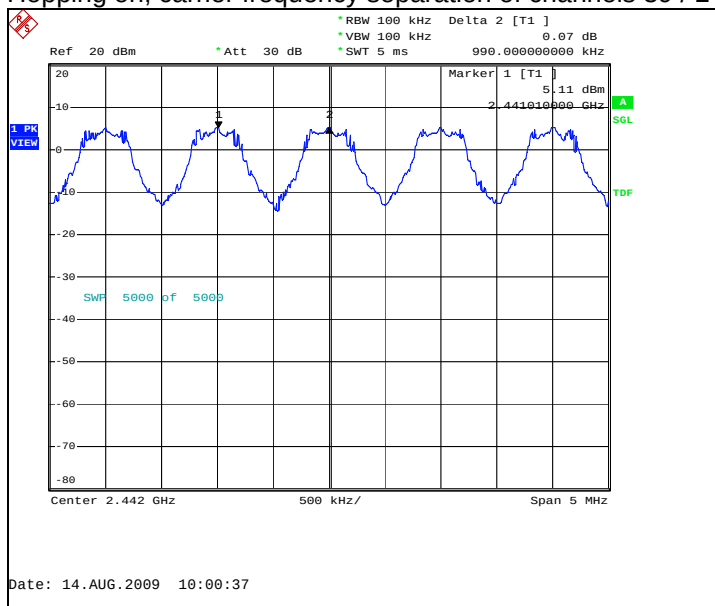

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1050	Passed

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

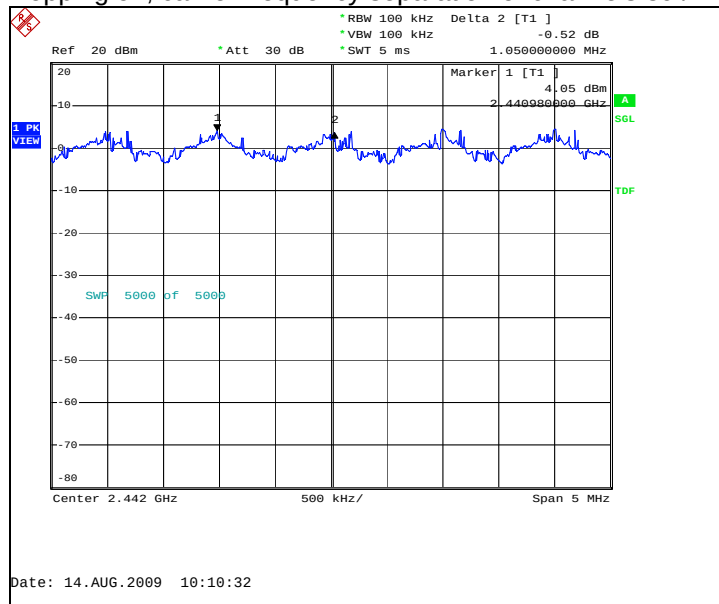

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-540 DUT 24910
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 54 / 101.3
Date of measurements	14-Aug-2009
Measured by	Christian Andersen

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	Passed


Hopping on, number of hopping frequencies

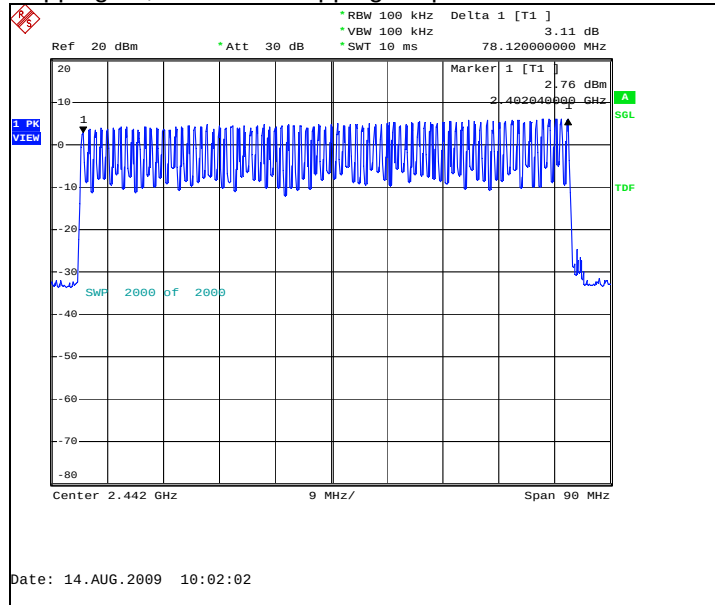

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
76	Passed

Hopping on, number of hopping frequencies

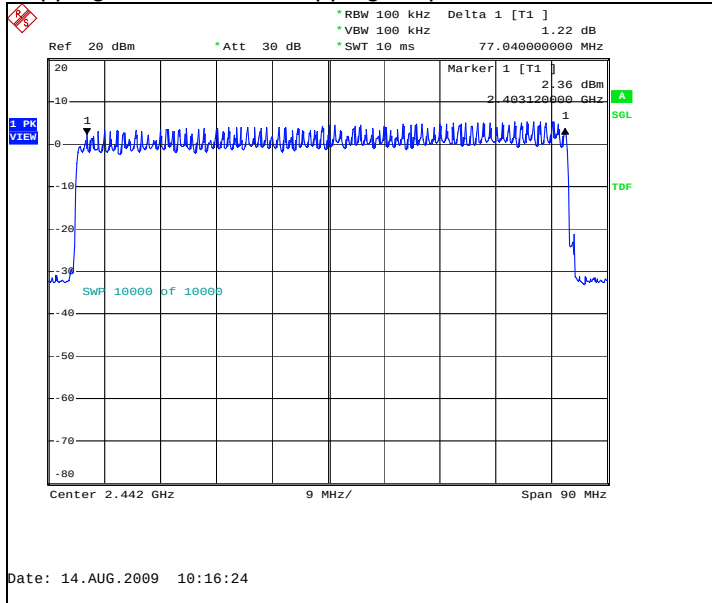

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-540 DUT 24910
Accessories with DUT numbers	BL-4CT DUT 24898, WH-205 DUT 24893, AC-8E DUT 24896
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 54 / 101.3
Date of measurements	14-Aug-2009
Measured by	Christian Andersen

11.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
84	2944	0.247296	Passed

Hopping on, number of transmissions, channel 40 / 2442 MHz

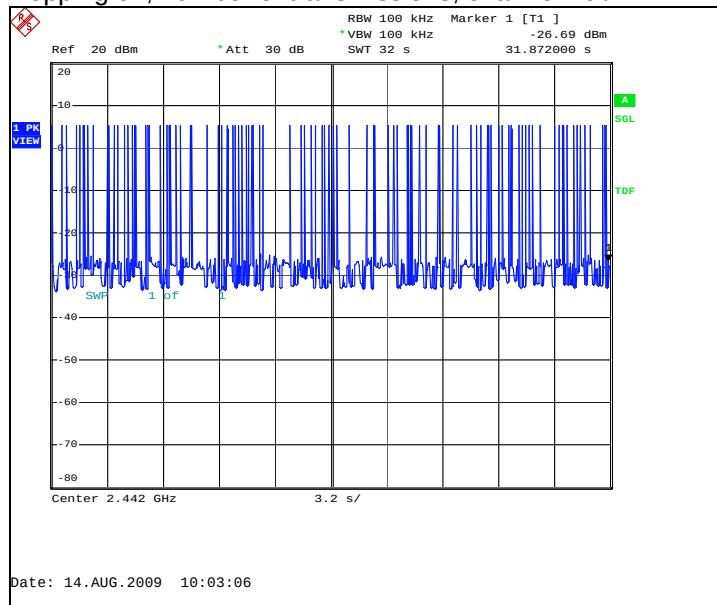


Hopping on, duration of one transmission, channel 40 / 2442 MHz

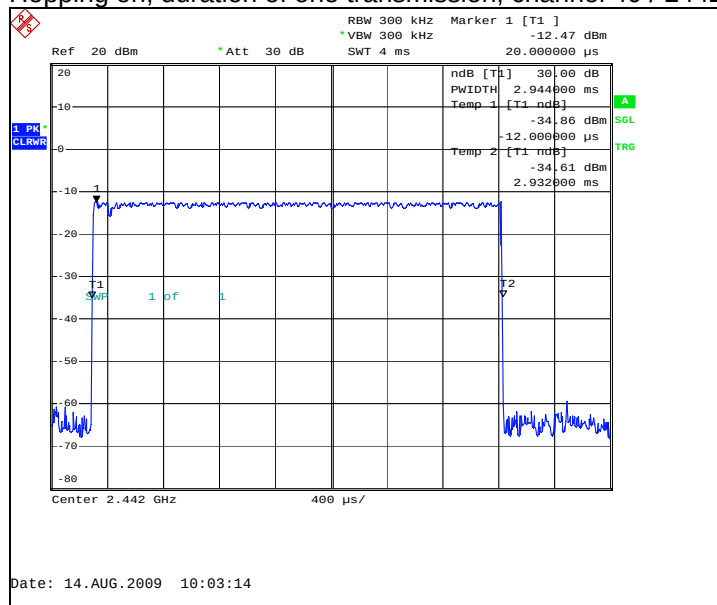


11.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
93	2952	0.274536	Passed

Hopping on, number of transmissions, channel 40 / 2442 MHz

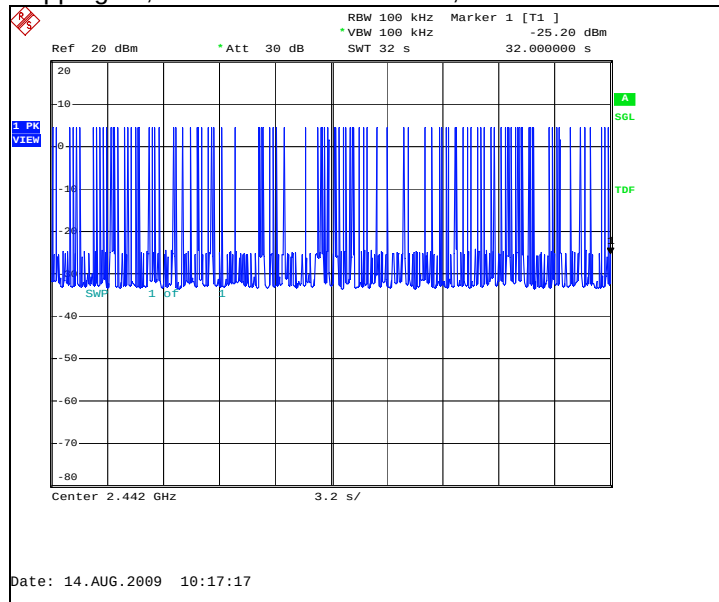

Hopping on, duration of one transmission, channel 40 / 2442 MHz

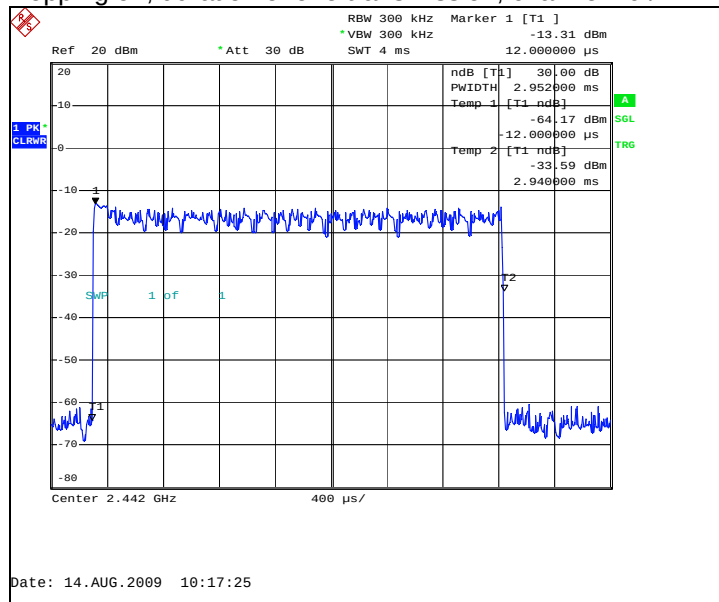

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24/27, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24/27, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24/27, 15C, 15B
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24/27, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24/27, 15C, 15B
20335	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter 3GHz	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
	WHK3.0/18G-10ss			
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	WDCMA Band 2 filter		Wainwright	24, 15C, 15B
20114	WDCMA Band 4 filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	27, 15C, 15B
20116	WDCMA Band 5&6 filter	WRCG832/83/-825/845-40/5SS	Wainwright	22, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Magnetic Loop Antenna 9 kHz - 30 MHz	HFH2-Z2	Rohde&Schwarz	15C, 15B
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B