

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0536_03.doc	Date of Report:	15-09-2005
Number of pages:	34	Customer's Contact person:	Thomas Reitmayer
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-70 (HW: 4031), Battery; BL-4B, AC-Charger; AC-3E, Headset; HS-31		
FCC ID:	PPIRM-70	IC:	661U-RM70
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003) and IC standard RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	09-06-2005
Testing completed	13-09-2005
The customer's contact person	Thomas Reitmayer
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	None
Document name	T:\Projects\RM-70\results\emc\FCC\Cph_FCC_0536_03.doc

1.1. EUT and Accessory Information

The EUT is a triple band (GSM900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-70	004400/56/170841/1	4031	-	3.01.1	28396
Phone	RM-70	004400/56/170758/7	4031	-	3.01.1	28400
Phone	RM-70	004400/56/170861/9	4031	-	3.01.1	28386
Battery	BL-4B	0670491363563M203110200078	-	-	-	28392
Battery	BL-4B	0670491363563M203110200104	-	-	-	28395
Battery	BL-4B	0670491363563M203110200118	-	-	-	28394
AC-Charger	AC-3E	4090495276921002523;0675370	-	-	-	28389
AC Charger	AC-3E	4090495276921002518;0675370	-	-	-	28388
AC-Charger	AC-3E	4090495276921002519;0675370	-	-	-	28387
Headset	HS-31	-	-	-	-	28384
Headset	HS-31	-	-	-	-	28385
Headset	HS-31	-	-	-	-	28428

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-210	Name of the test	Result
15.247(b)(1)	6.2.2(o)(a3)	Peak output power	Passed
15.247(c)	6.2.2 (o)(e1)	Band edge compliance of RF emissions	Passed
15.247(c)	6.2.2 (o)(e1)	Spurious RF conducted emissions	Passed
15.247(c), 15.209	6.2.2 (o)(e1)	Spurious radiated emissions	Passed
15.207	6.6	AC power line conducted emissions	Passed
15.247(a)(1)	6.2.2(o)(a3)	20 dB bandwidth	Passed
15.247(a)(1)	6.2.2(o)(a1)	Carrier frequency separation	Passed
15.247(a)(1)(iii)	Amend I(ii)	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	Amend I(ii)	Time of occupancy	Passed

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1.	Summary for FCC Part 15C Compliance Test Report.....	2
1.1.	EUT and Accessory Information.....	2
1.2.	Summary of Test Results.....	2
2.	Test setups.....	5
2.1.	Conducted RF test setup.....	5
2.2.	AC powerline conducted emissions test setup.....	5
2.3.	Spurious radiated emissions test setup	5
3.	Peak output power (FCC §15.247(b)(1), RSS-210 6.2.2(o)(a3))	6
3.1.	Test method and limit.....	6
3.2.	Bluetooth Test results	7
3.2.1	GSFK modulation, PRBS packet type	7
4.	Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))	9
4.1.	Test method and limit.....	9
4.2.	Bluetooth Test results	10
4.2.1	GFSK modulation, PRBS packet type	10
4.2.1.1	Phone Slide open.....	10
4.2.1.2	Phone Slide closed	12
5.	Spurious RF conducted emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))	14
5.1.	Test method and limit.....	14
5.2.	Bluetooth Test results	15
5.2.1	GFSK modulation, PRBS packet type	15
6.	Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 6.2.2(o)(e1)).....	18
6.1.	Test method and limit.....	18
6.2.	Bluetooth Test results	19
6.2.1	GFSK modulation, PRBS packet type	19
6.2.1.1	Phone Slide open.....	19
6.2.1.2	Phone Slide closed	20
7.	AC powerline conducted emissions (FCC §15.207, RSS-210 6.6).....	22
7.1.	Test method and limit.....	22
7.2.	Bluetooth Test results	23
7.2.1	GFSK modulation, PRBS packet type	23
8.	20 dB bandwidth (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a3)).....	24
8.1.	Test method and limit.....	24
8.2.	Bluetooth Test results	25
8.2.1	GFSK modulation, PRBS packet type	25
9.	Carrier frequency separation (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a1)).....	27


9.1.	Test method and limit	27
9.2.	Bluetooth Test results	28
9.2.1	GFSK modulation, PRBS packet type	28
10.	Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))	29
10.1.	Test method and limit	29
10.2.	Bluetooth Test results	30
10.2.1	GFSK modulation, PRBS packet type	30
11.	Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))	31
11.1.	Test method and limit	31
11.2.	Bluetooth test results	32
11.2.1	GFSK modulation, PRBS packet type	32
12.	Test Equipment	33
12.1.	Conducted measurements	33
12.2.	Radiated measurements	33

2. Test setups


2.1. Conducted RF test setup

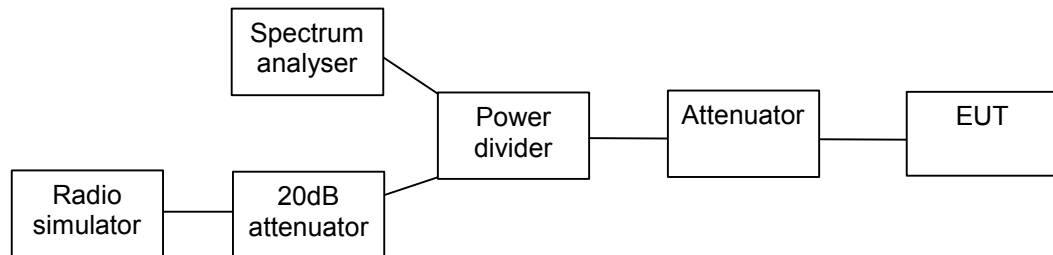

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

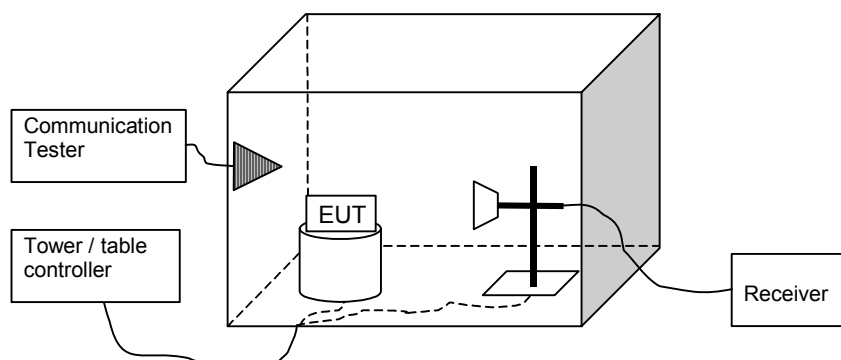

3. Peak output power (FCC §15.247(b)(1), RSS-210 6.2.2(o)(a3))

EUT with DUT number	RM-70 dut # 28396
Accessories with DUT numbers	AC-3E dut # 28388; HS-31 dut # 28428
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 53 1013.1
Date of measurements	09-07-2005
Measured by	Jan Engelbrechtsen

3.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GSKF modulation, PRBS packet type

Channel	P [dBm]	P [mW]	Result
0	-2.00	0.631	Passed
40	-2.00	0.631	Passed
78	-2.00	0.631	Passed


Channel 0 (Peak detector, RBW: 1 MHz)

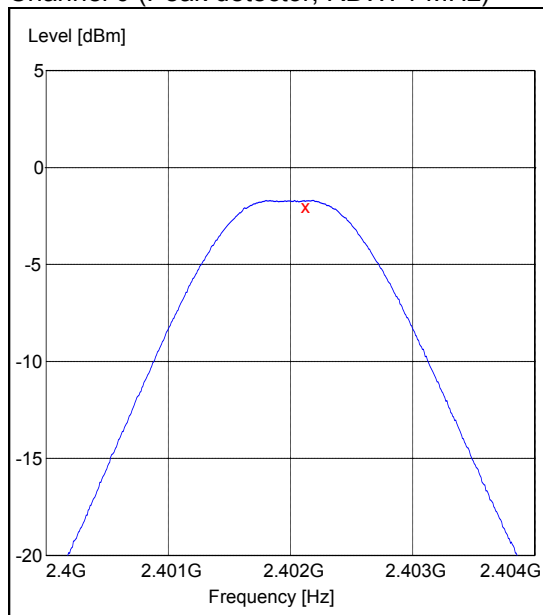

Channel 40 (Peak detector, RBW: 1 MHz)

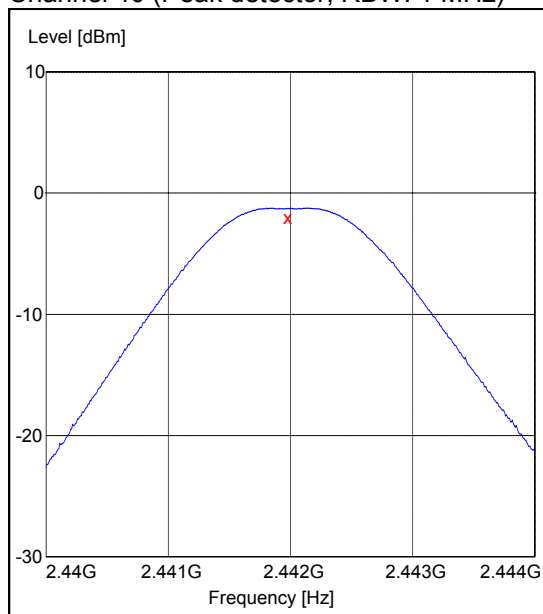

Channel 78 (Peak detector, RBW: 1 MHz)

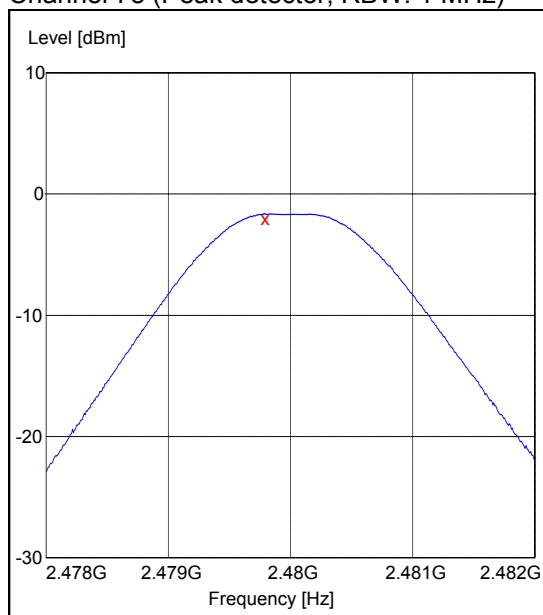

4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))

EUT with DUT number	RM-70 Dut#28386
Accessories with DUT numbers	BL-4B Dut#28392, AC-3E Dut#28387, HS-31 Dut#28384
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 55 / 1024
Date of measurements	13-09-2005
Measured by	Christian Andersen

4.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type

4.2.1.1 Phone Slide open


Average (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	35.29	Passed
78	40.08	Passed
Hopping on, low end	34.89	Passed
Hopping on, high end	36.05	Passed


Peak (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	48.42	Passed
78	54.98	Passed
Hopping on, low end	48.42	Passed
Hopping on, high end	53.36	Passed


Channel 0

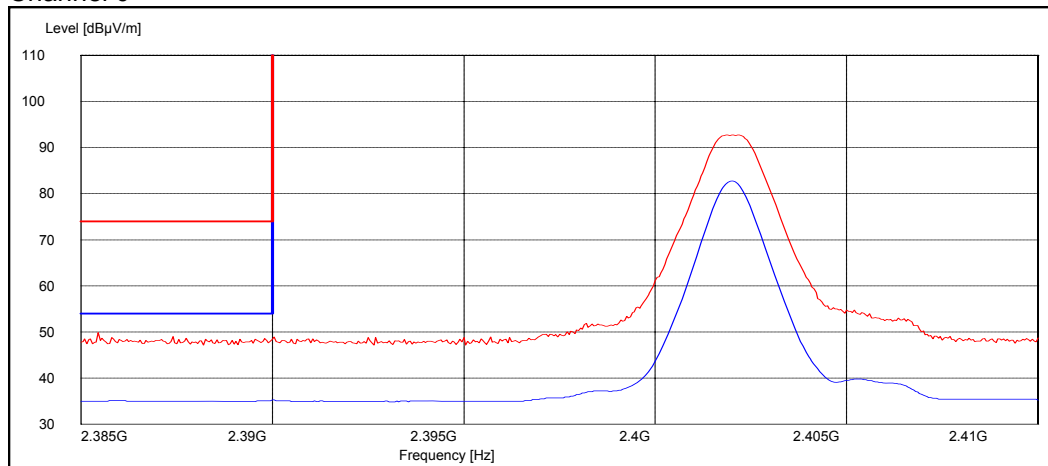


Channel 78

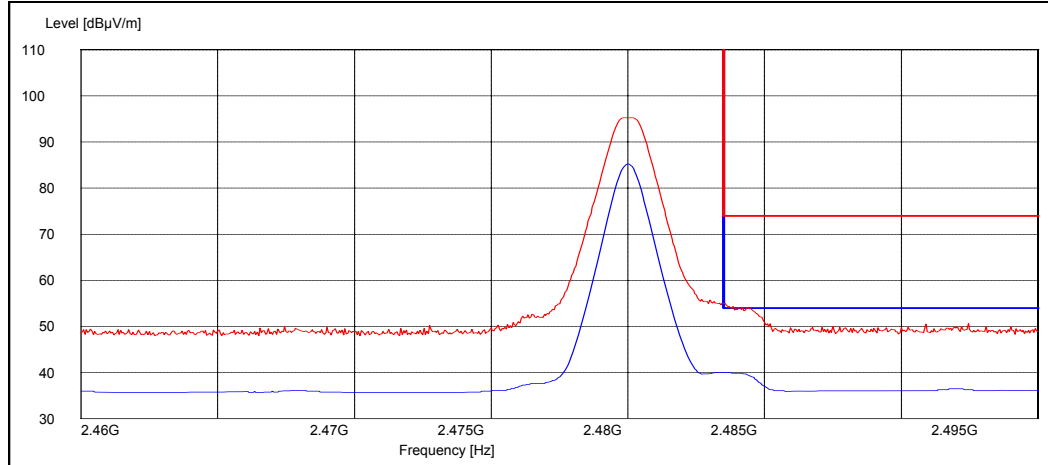

Hopping on, low end

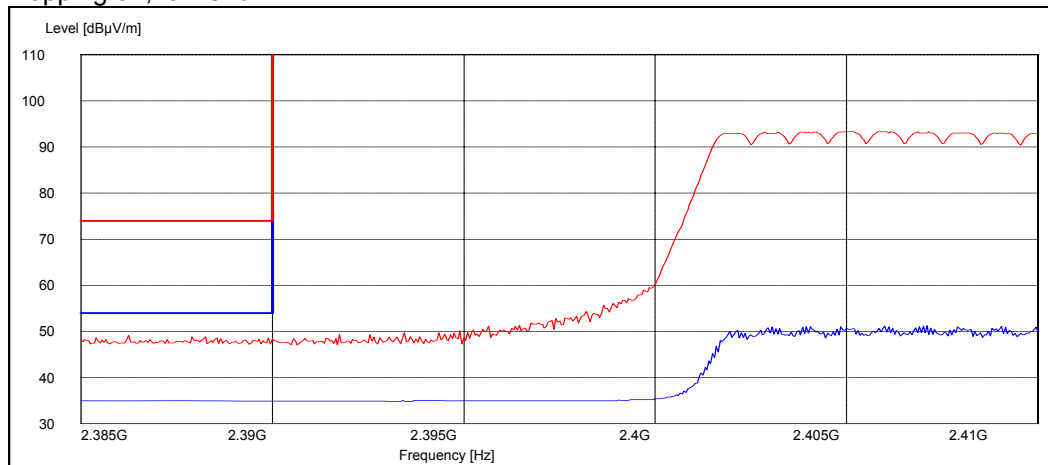

Hopping on, high end

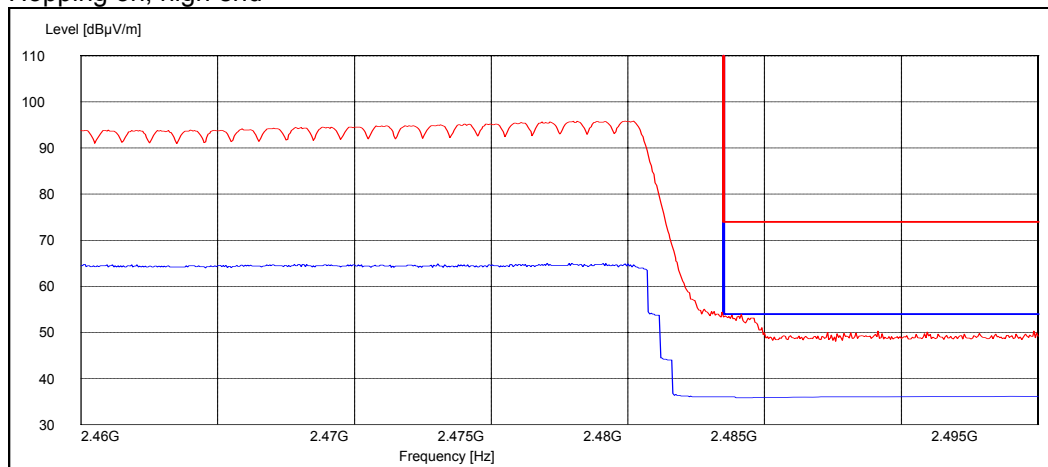

4.2.1.2 Phone Slide closed


Average (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	35.10	Passed
78	38.60	Passed
Hopping on, low end	34.90	Passed
Hopping on, high end	36.05	Passed


Peak (RBW: 1 MHz)

Channel	E [dB μ V/m]	Result
0	47.97	Passed
78	53.23	Passed
Hopping on, low end	48.43	Passed
Hopping on, high end	52.95	Passed


Channel 0

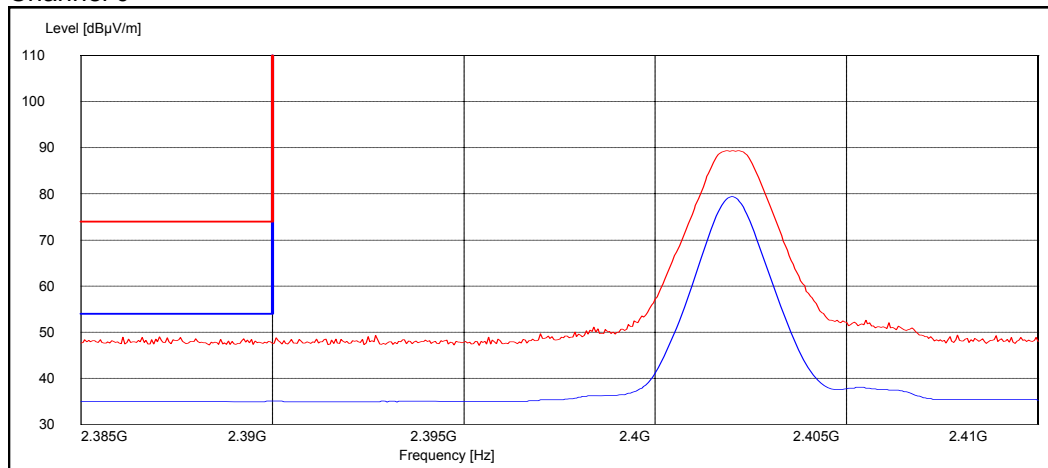


Channel 78

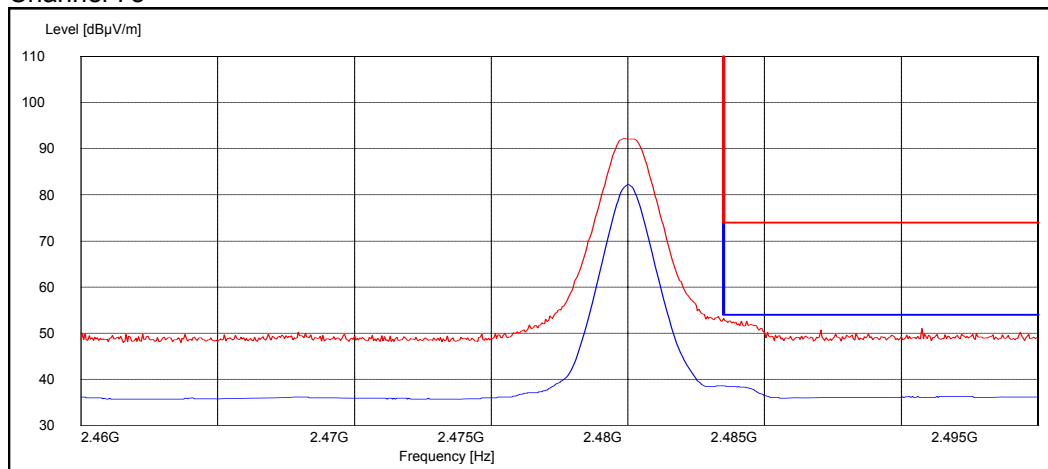

Hopping on, low end

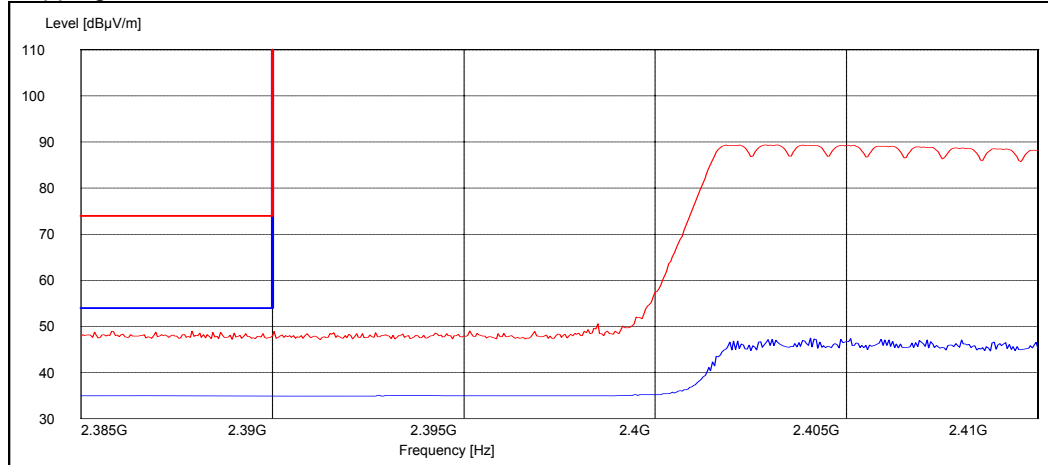

Hopping on, high end

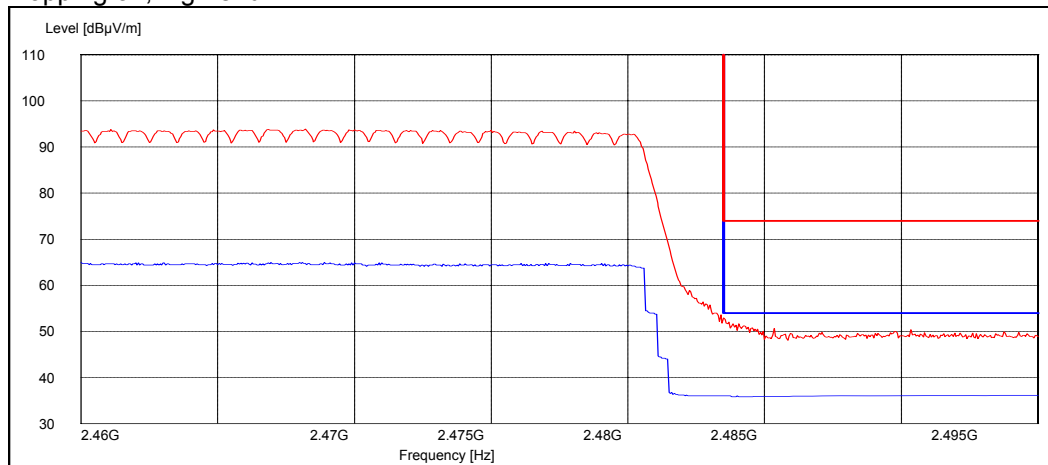

5. Spurious RF conducted emissions (FCC §15.247(c), RSS-210 6.2.2(o)(e1))

EUT with DUT number	RM-70 dut # 28396
Accessories with DUT numbers	AC-3E dut # 28388; HS-31 dut # 28428
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 53.0 1013.1
Date of measurements	09-07-2005
Measured by	Jan Engelbrechtsen

5.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results


5.2.1 GFSK modulation, PRBS packet type

Channel 0

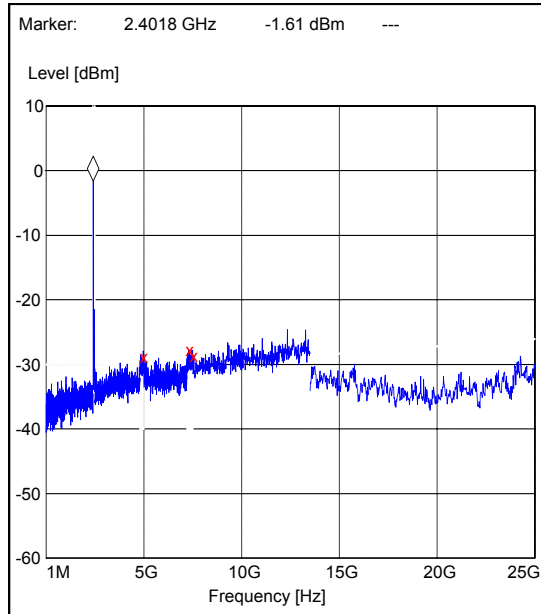


Frequency [MHz]	P [dBc]	Result
4958.000000	-27.191872	Passed
7300.800000	-26.091872	Passed
7500.000000	-27.091872	Passed

Channel 40

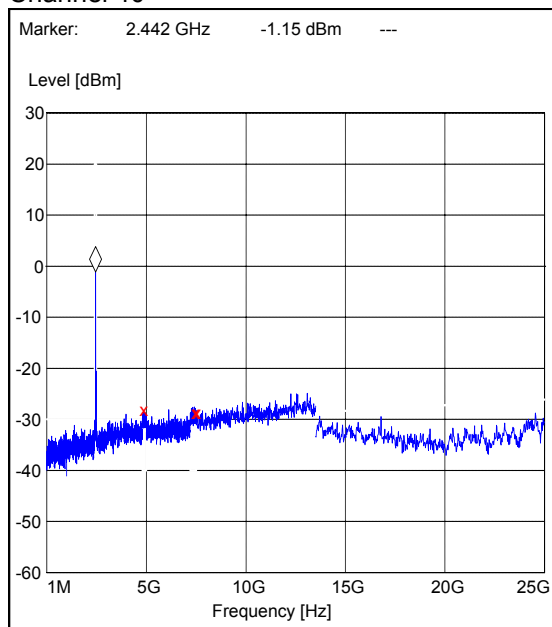

Frequency [MHz]	P [dBc]	Result
4844.800000	-27.054093	Passed
7419.000000	-27.654093	Passed
7500.000000	-27.654093	Passed

Channel 78

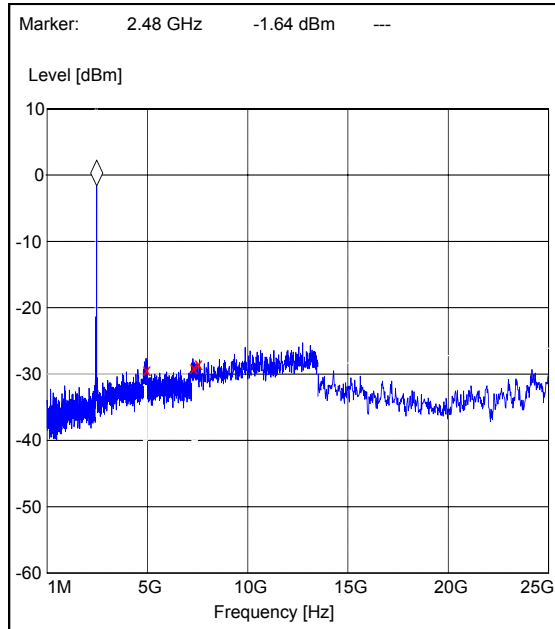

Frequency [MHz]	P [dBc]	Result
4934.400000	-27.658043	Passed
7266.000000	-27.358043	Passed
7500.000000	-26.858043	Passed

6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 6.2.2(o)(e1))

EUT with DUT number	RM-70 Dut#28386
Accessories with DUT numbers	BL-4B Dut#28392, AC-3E Dut#28387, HS-31 Dut#28384
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 55 / 1024
Date of measurements	13-09-2005
Measured by	Christian Andersen

6.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

6.2.1.1 Phone Slide open

Channel 0

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	35.34	58.48	27.44	7.90	VERTICAL	Passed
7206.000000	38.84	87.50	26.34	12.50	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	22.44	13.24	14.54	7.90	VERTICAL	Passed
7206.000000	26.04	20.04	13.54	12.50	VERTICAL	Passed

Channel 40

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.695391	17.00	7.08	32.60	-15.60	VERTICAL	Passed
45.631263	32.10	40.27	52.80	-20.70	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	83.80	15488.17	79.40	4.40	VERTICAL	Passed
2441.883768	94.40	52480.75	86.40	8.00	HORIZONTAL	Passed
2810.125251	51.90	393.55	40.60	11.30	HORIZONTAL	Passed
2905.309619	52.30	412.10	40.10	12.20	HORIZONTAL	Passed
4947.893788	36.74	68.71	28.44	8.30	VERTICAL	Passed
11233.962926	43.64	152.05	25.14	18.50	VERTICAL	Passed
12441.375752	43.94	157.40	24.94	19.00	VERTICAL	Passed
17810.629259	53.64	480.84	25.44	28.20	VERTICAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	83.30	14621.77	78.90	4.40	VERTICAL	Passed
2441.883768	83.60	15135.61	75.60	8.00	HORIZONTAL	Passed
2810.625251	38.00	79.43	26.70	11.30	HORIZONTAL	Passed
2905.809619	39.00	89.13	26.90	12.10	HORIZONTAL	Passed
4950.393788	23.74	15.38	15.44	8.30	VERTICAL	Passed
12438.875752	31.24	36.48	12.24	19.00	VERTICAL	Passed
17818.629259	40.94	111.43	12.64	28.30	VERTICAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Channel 78

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	36.54	67.14	28.24	8.30	VERTICAL	Passed
7440.000000	39.74	97.05	26.84	12.90	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	23.74	15.38	15.44	8.30	VERTICAL	Passed
7440.000000	26.64	21.48	13.74	12.90	VERTICAL	Passed

6.2.1.2 Phone Slide closed

Channel 0

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	35.44	59.16	27.54	7.90	HORIZONTAL	Passed
7206.000000	39.34	92.68	26.84	12.50	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	22.44	13.24	14.54	7.90	VERTICAL	Passed
7206.000000	26.14	20.28	13.64	12.50	VERTICAL	Passed

Channel 40

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.695391	24.90	17.58	40.50	-15.60	VERTICAL	Passed
45.631263	32.10	40.27	52.80	-20.70	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	83.70	15310.87	79.30	4.40	VERTICAL	Passed
2442.084168	92.00	39810.72	84.00	8.00	HORIZONTAL	Passed
2794.583166	51.20	363.08	39.80	11.40	HORIZONTAL	Passed
2900.809619	51.40	371.54	39.40	12.00	HORIZONTAL	Passed
4948.893788	36.64	67.92	28.34	8.30	VERTICAL	Passed
12415.325651	44.14	161.06	25.04	19.10	VERTICAL	Passed
17907.807615	53.94	497.74	25.44	28.50	HORIZONTAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	83.50	14962.36	79.10	4.40	VERTICAL	Passed
2442.084168	81.80	12302.69	73.80	8.00	HORIZONTAL	Passed
2795.583166	38.20	81.28	26.70	11.50	HORIZONTAL	Passed
2904.809619	39.10	90.16	26.90	12.20	HORIZONTAL	Passed
4948.893788	23.74	15.38	15.44	8.30	VERTICAL	Passed
10619.240481	30.74	34.43	12.94	17.80	VERTICAL	Passed
12416.825651	31.34	36.90	12.34	19.00	VERTICAL	Passed
17903.807615	41.04	112.72	12.44	28.60	HORIZONTAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

*2441.0 MHz frequency is BT carrier signal and thus ignored.

Channel 78

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	36.54	67.14	28.24	8.30	HORIZONTAL	Passed
7440.000000	40.54	106.41	27.64	12.90	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	23.84	15.56	15.54	8.30	VERTICAL	Passed
7440.000000	26.64	21.48	13.74	12.90	HORIZONTAL	Passed

7. AC powerline conducted emissions (FCC §15.207, RSS-210 6.6)

EUT with DUT number	RM-70 Dut # 28400
Accessories with DUT numbers	BL-4B Dut # 28395 + AC-3E Dut # 28389 + HS-31 Dut # 28385
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	22.9 / 53.5 1015.6
Date of measurements	08-09-2005
Measured by	Allan F. Henriksen

7.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40

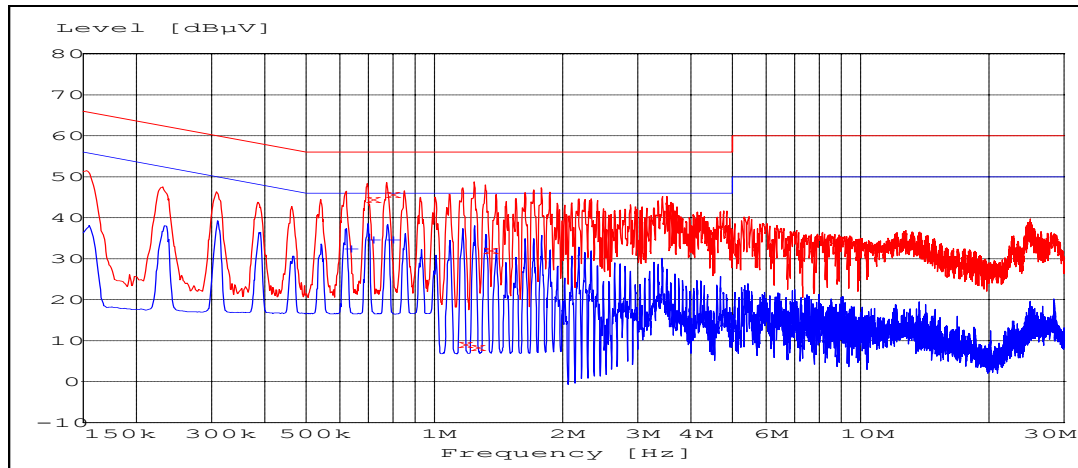

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.712500	44.60	N	Passed
0.792500	45.90	N	Passed
1.172500	9.40	L1	Passed
1.255000	8.70	L1	Passed
1.342500	32.20	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.632500	32.40	N	Passed
0.712500	34.70	N	Passed
0.792500	34.70	N	Passed

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a3))

EUT with DUT number	RM-70 dut # 28396
Accessories with DUT numbers	AC-3E dut # 28388; HS-31 dut # 28428
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 53.0 1013.1
Date of measurements	09-07-2005
Measured by	Jan Engelbrechtsen

8.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
≤ 1

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel	20 dB bandwidth [kHz]	Result
0	708.000	Passed
40	748.000	Passed
78	744.000	Passed


Channel 0

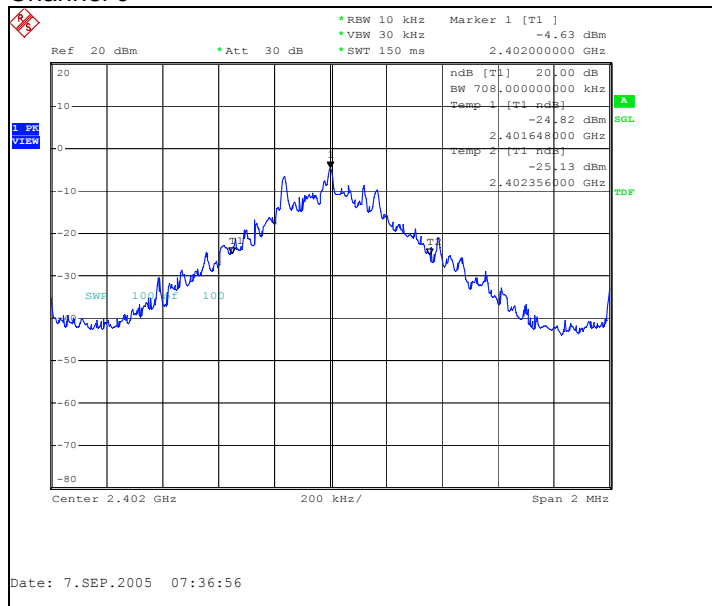

Channel 40

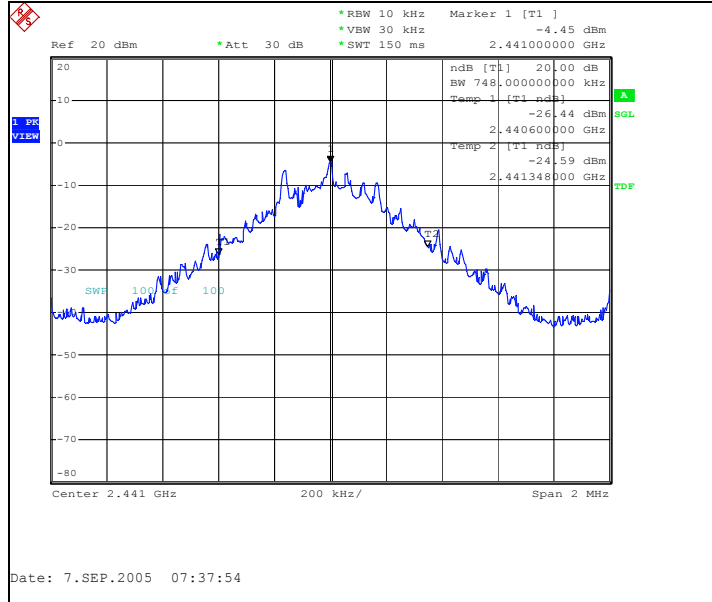

Channel 78

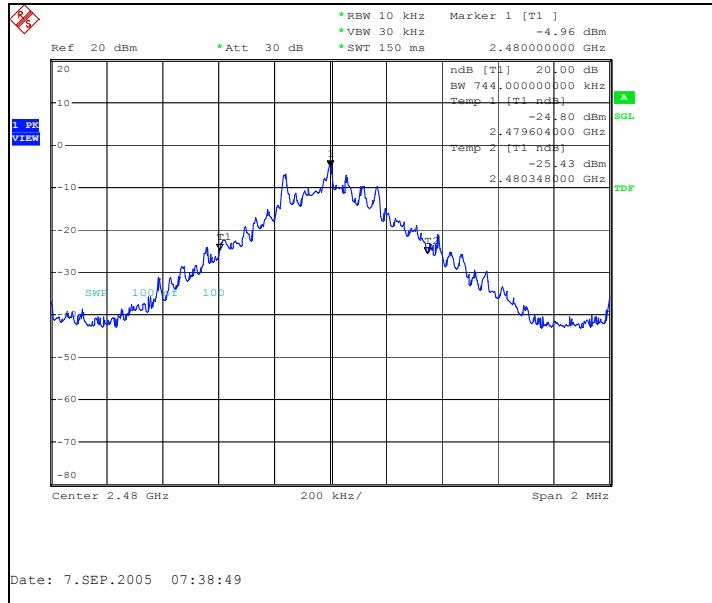

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 6.2.2(o)(a1))

EUT with DUT number	RM-70 dut # 28396
Accessories with DUT numbers	AC-3E dut # 28388; HS-31 dut # 28428
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 53.0 1013.1
Date of measurements	09-07-2005
Measured by	Jan Engelbrechtsen

9.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1000	Passed

Hopping on, carrier frequency separation of channels 39 and 40

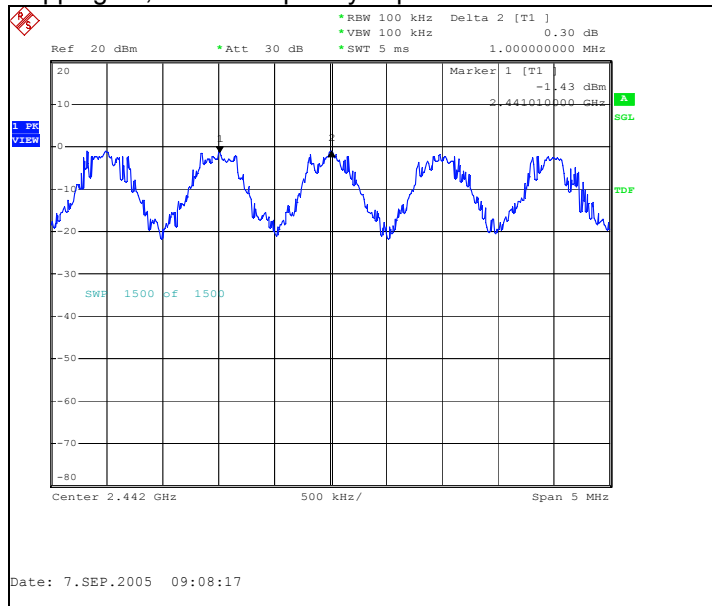

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))

EUT with DUT number	RM-70 dut # 28396
Accessories with DUT numbers	AC-3E dut # 28388; HS-31 dut # 28428
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 53.0 1013.1
Date of measurements	09-07-2005
Measured by	Jan Engelbrechtsen

10.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 75

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	Passed

Hopping on, number of hopping frequencies

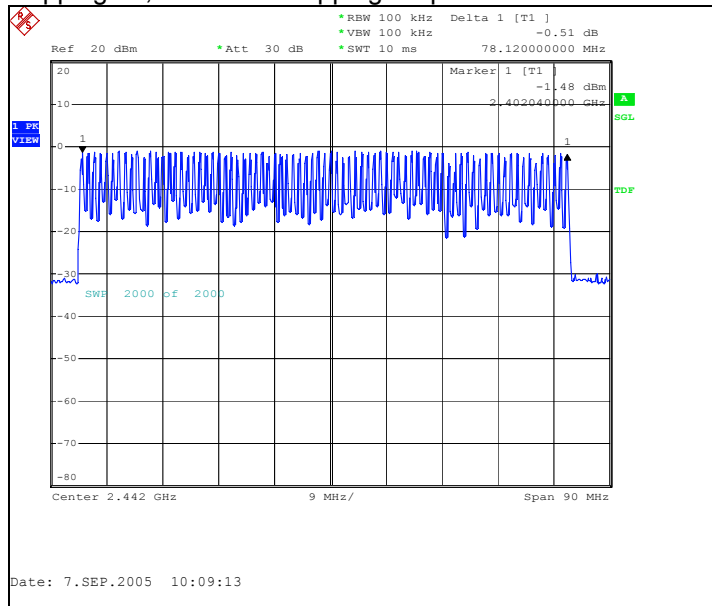

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 Amend I(ii))

EUT with DUT number	RM-70 dut # 28396
Accessories with DUT numbers	AC-3E dut # 28388; HS-31 dut # 28428
Operation Voltage [V] / [Hz]	220 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21.7 / 53.0 1013.1
Date of measurements	09-07-2005
Measured by	Jan Engelbrechtsen

11.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
163	456.000	0.074328	Passed

Hopping on, number of transmissions, channel 40

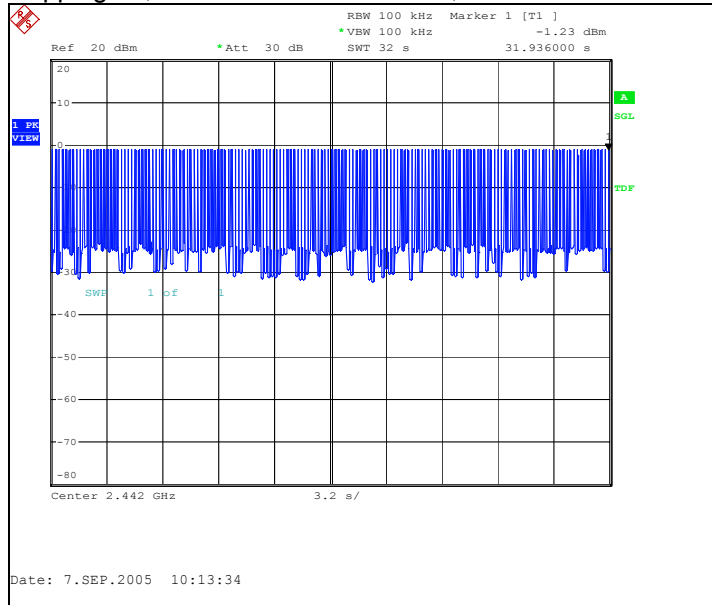

Hopping on, duration of one transmission, channel 40

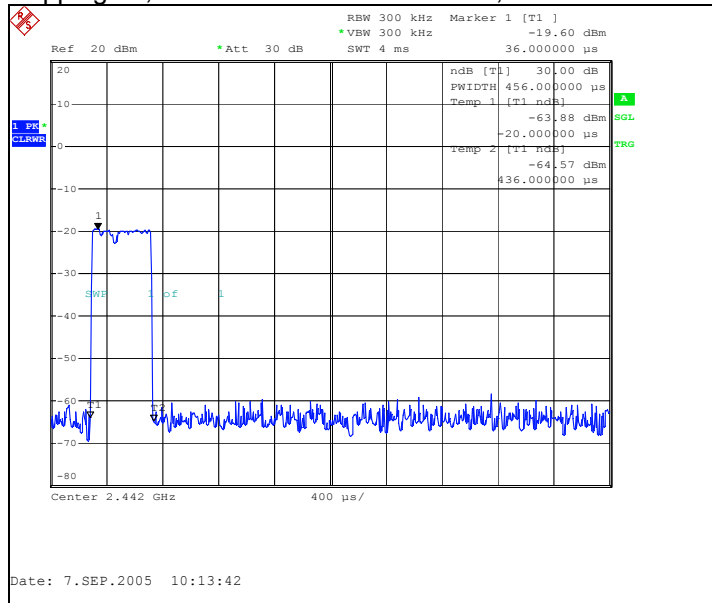

Test Equipment

11.3. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

11.4. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Contoller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C