

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-763_08.docx	Date of Report:	24-Aug-2011
Number of pages:	26	Customer's Contact person:	Ramelli Bruno
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-763 / Battery BP-3L / AC Charger AC-8 / Headset WH-102		
FCC ID:	PPIRM-763	IC:	661U-RM763
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Christian Andersen EMC, System Specialist

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	08-Jul-2011
Testing completed	22-Aug-2011
The customer's contact person	Ramelli Bruno
Test Plan referred to	T:\Projects\RM-763\TestPlan\RS_testplan_RM-763.xls
Notes	-
Document name	T:\Projects\RM-763\EMC\FCC15CBT_RM-763_08.docx

1.1. EUT and Accessory Information

The EUT is a 11-band mobile phone:

GSM850/900/1800/1900/GPRS/EGPRS/Monopole without GND reflector (GSM/WCDMA)

WCDMA I/II(1900)/IV(1700)/V(850)/VIII/HSRPA/HSUPA/Monopole without GND reflector (GSM/WCDMA)
WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-763	004402136210782	0200	-	Vp ch104_11w28_1	25946
AC-Charger	AC-8E	4090498425930401604;0675387	-	-	-	23727
Battery	BP-3L	3932131154140100772;0670635	-	-	-	23546
Headset	WH-102	06943231106m1R61563	-	-	-	23579

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	Passed
15.247(d)	A8(0.5)	Band edge compliance of RF emissions	NP
15.247(d)	A8(0.5)	Spurious RF conducted emissions	Passed
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	Passed
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	Passed

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))	4
2.1. Test Setup	4
2.2. Test method and limit	4
2.3. Bluetooth Test results	5
3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	8
3.1. Test Setup	8
3.2. Test method and limit	8
3.3. Bluetooth Test results	9
4. 20 dB bandwidth 15.247(a)(1), A8.1 (a)	12
4.1. Test Setup	12
4.2. Test method and limit	12
4.3. Bluetooth Test results	13
5. Carrier frequency separation 15.247(a)(1), A8.1 (b)	16
5.1. Test Setup	16
5.2. Test method and limit	16
5.3. Bluetooth Test results	17
6. Number of hopping frequencies 15.247(a)(1)(iii), A8.1 (d)	19
6.1. Test Setup	19
6.2. Test method and limit	19
6.3. Bluetooth Test results	20
7. Time of occupancy 15.247(a)(1)(iii), A8.1 (d)	22
7.1. Test Setup	22
7.2. Test method and limit	22
7.3. Bluetooth Test results	23
8. Test Equipment	25
8.1. Conducted measurements	25
8.2. Radiated measurements	25

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-763, DUT 25946
Accessories with DUT numbers	AC-8E, DUT 23727 ; WH-102, DUT 23579 ; BP-3L, DUT 23546
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 99.8
Date of measurements	09-Aug-2011
Measured by	Christian Andersen

2.1. Test Setup

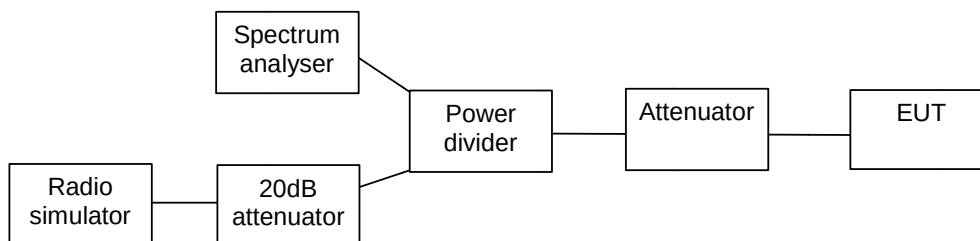

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	<= 1	<= 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	6.84	4.831	PASSED
40 / 2442	7.51	5.636	PASSED
78 / 2480	8.07	6.412	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

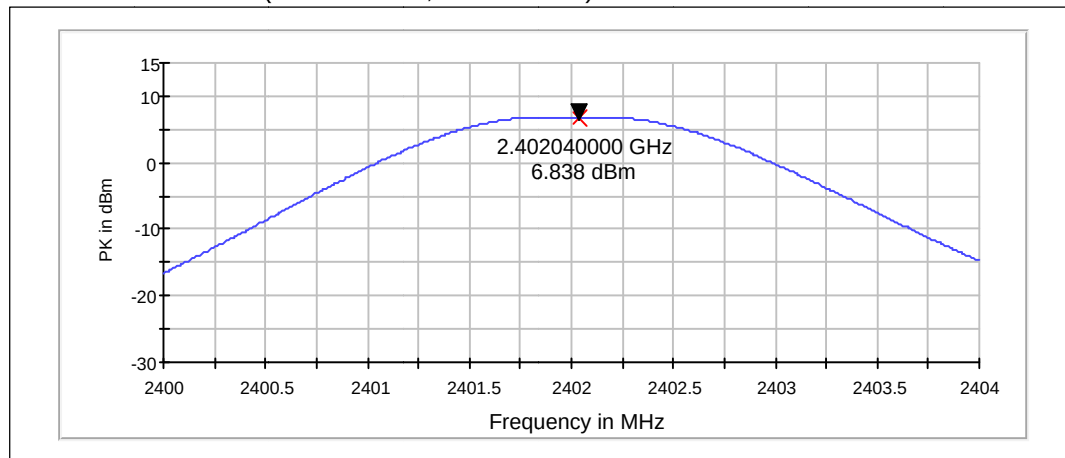

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

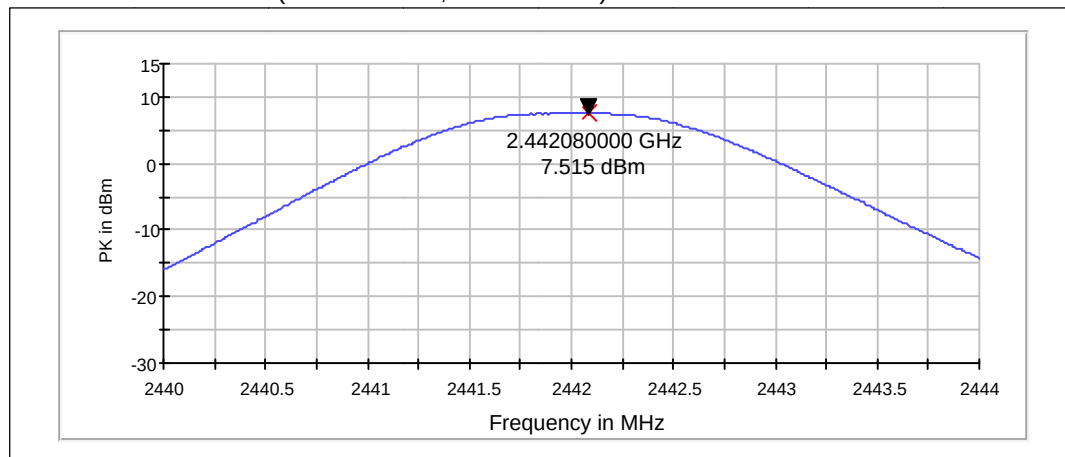


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

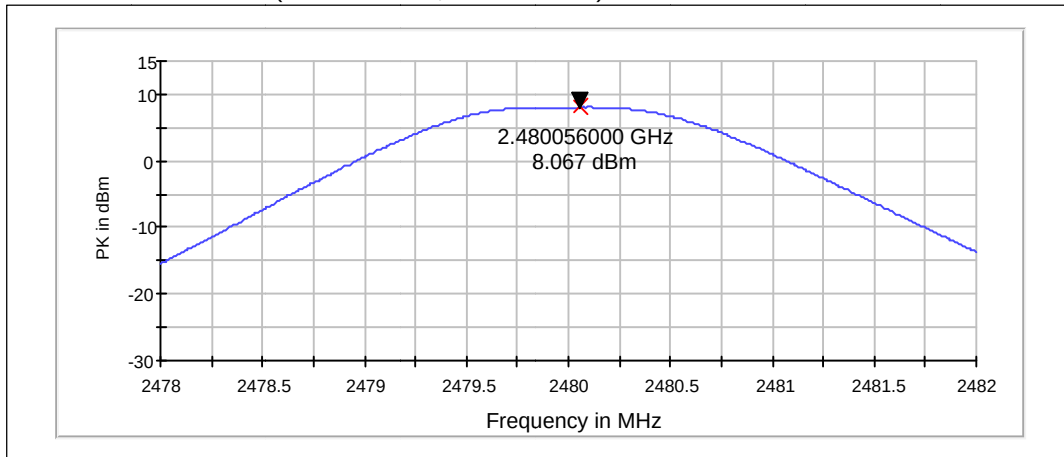


2.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	6.64	4.613	PASSED
40 / 2442	7.13	5.164	PASSED
78 / 2480	7.58	5.728	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

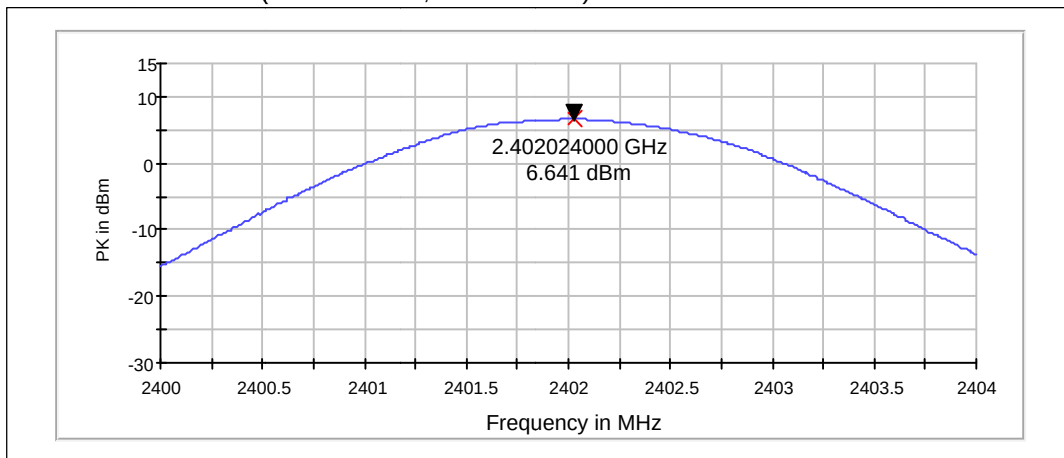

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

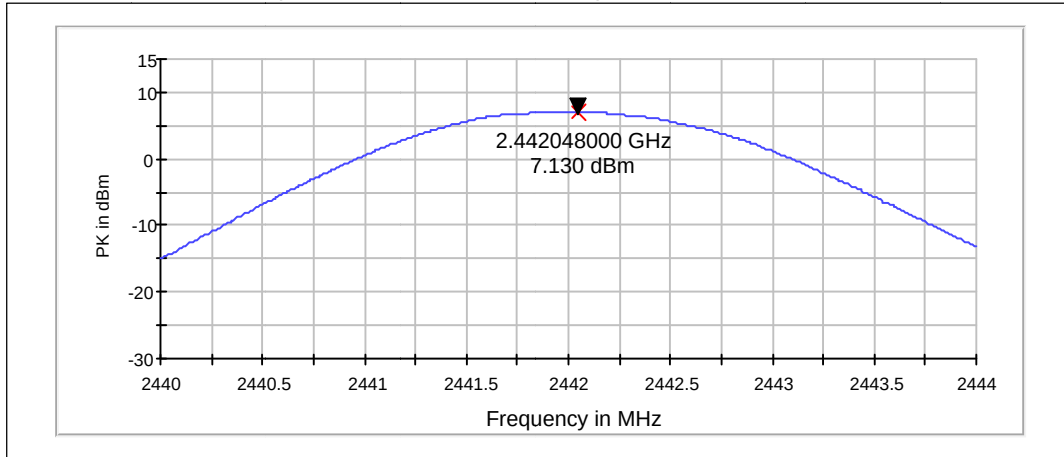


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

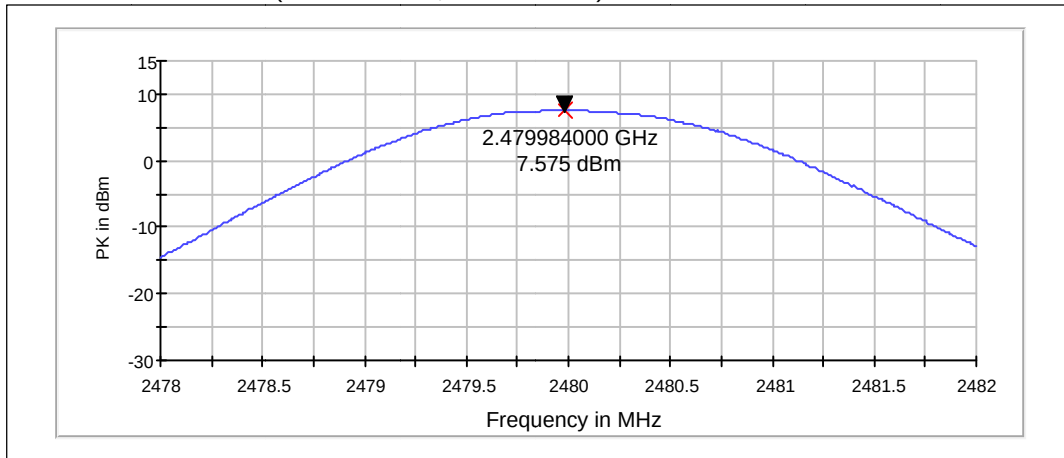

3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-763, DUT 25946
Accessories with DUT numbers	AC-8E, DUT 23727 ; WH-102, DUT 23579 ; BP-3L, DUT 23546
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 99.8
Date of measurements	09-Aug-2011
Measured by	Christian Andersen

3.1. Test Setup

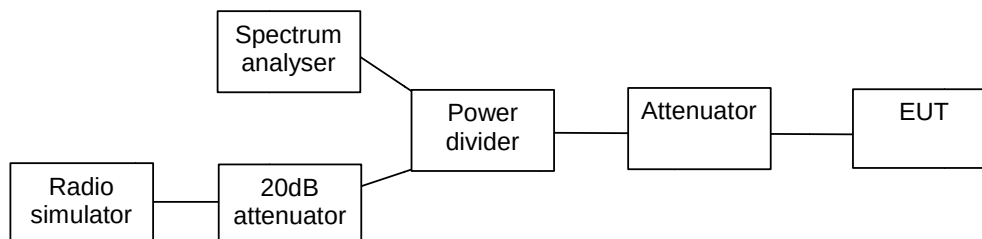

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

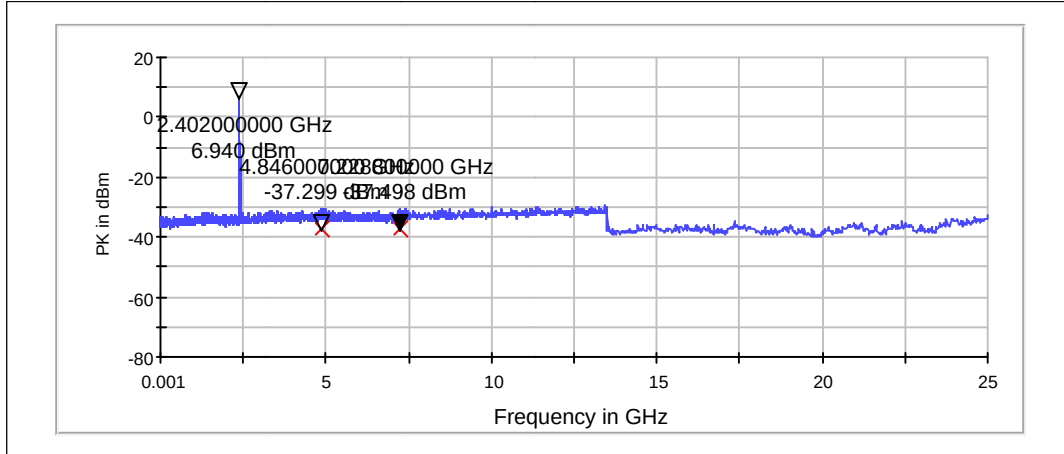

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4846	-37.3	PASSED
7228.8	-37.5	PASSED


Channel 40 / 2442 MHz

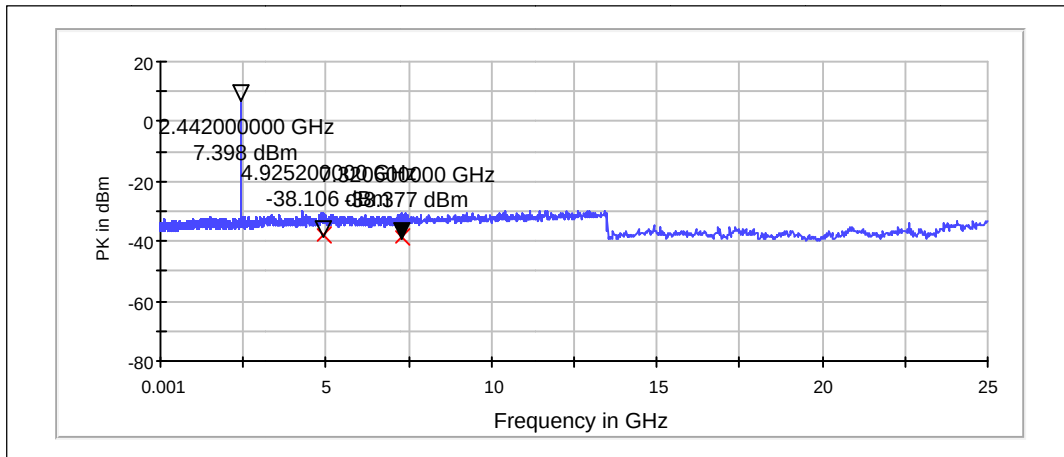

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4925.2	-38.11	PASSED
7320.6	-38.38	PASSED

Channel 78 / 2480 MHz

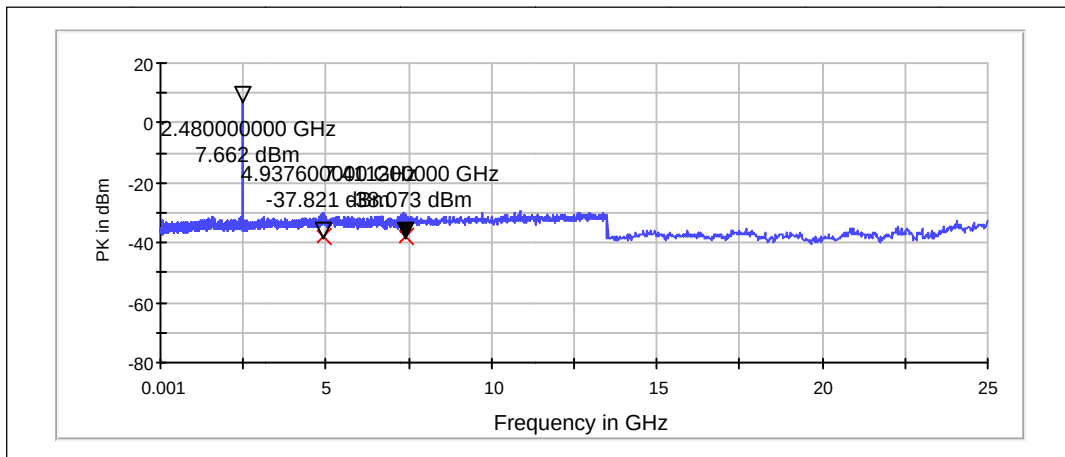


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4937.6	-37.82	PASSED
7411.2	-38.07	PASSED

3.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

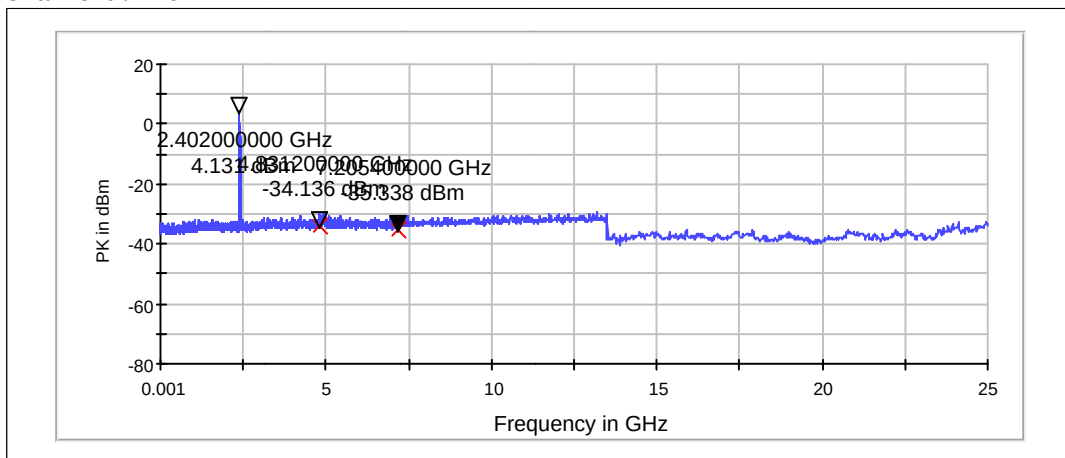

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4831.2	-34.14	PASSED
7205.4	-35.34	PASSED


Channel 40 / 2442 MHz

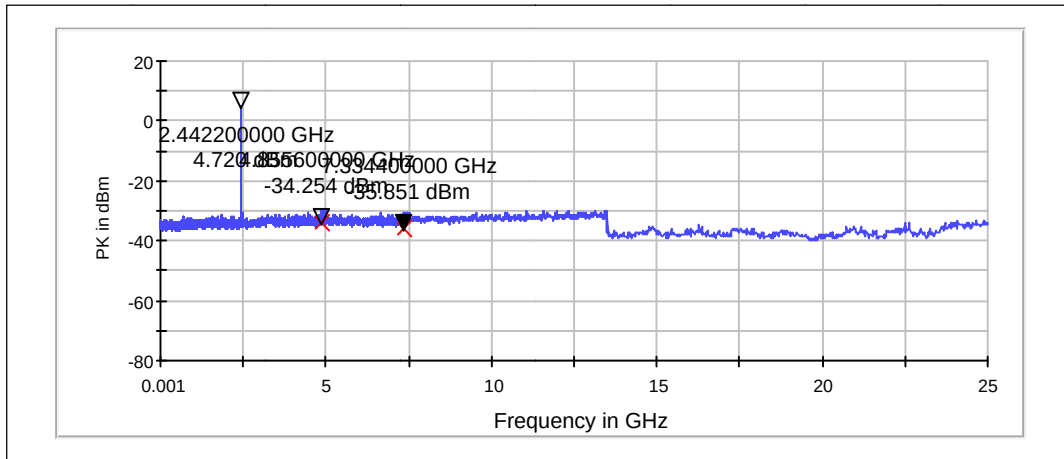

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4855.6	-34.25	PASSED
7334.4	-35.85	PASSED

Channel 78 / 2480 MHz

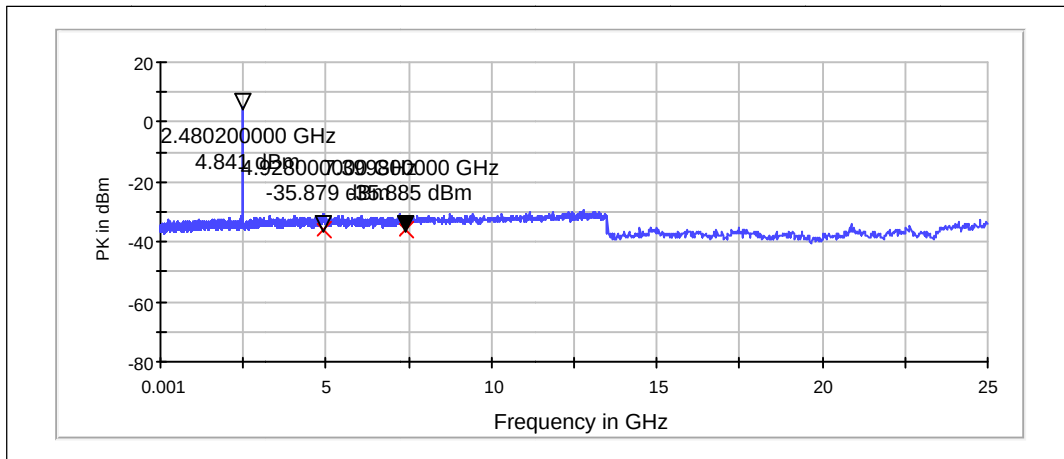


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4928	-35.88	PASSED
7399.8	-35.89	PASSED

4. 20 dB bandwidth 15.247(a)(1), A8.1 (a)

EUT with DUT number	RM-763, DUT 25946
Accessories with DUT numbers	AC-8E, DUT 23727 ; WH-102, DUT 23579 ; BP-3L, DUT 23546
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 99.8
Date of measurements	09-Aug-2011
Measured by	Christian Andersen

4.1. Test Setup

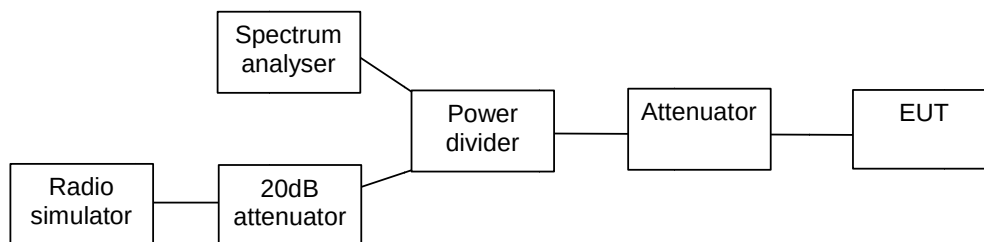

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

4.3. Bluetooth Test results

4.3.1 GFSK modulation, PRBS packet type


	20 dB bandwidth [kHz]
0 / 2402	960
40 / 2442	960
78 / 2480	944

Channel 0 / 2402 MHz

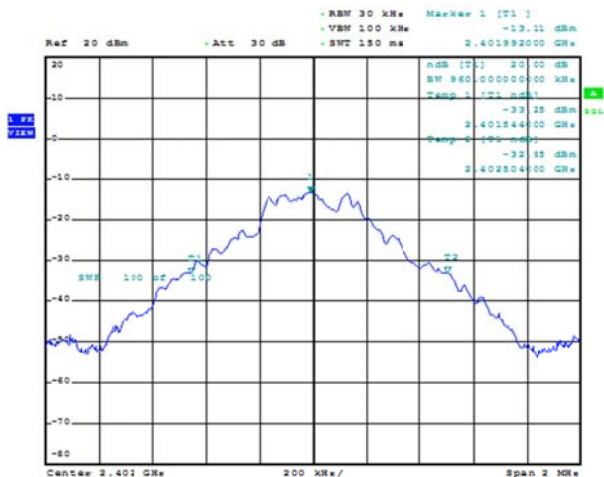


Date: 9.AUG.2011 12:42:50

Channel 40 / 2442 MHz

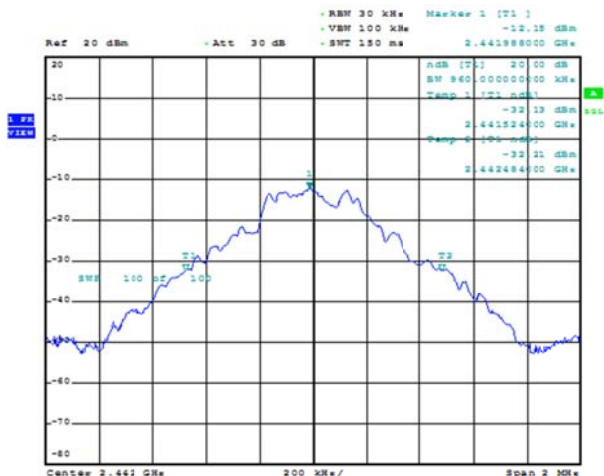

Date: 9.AUG.2011 12:43:57

Channel 78 / 2480 MHz

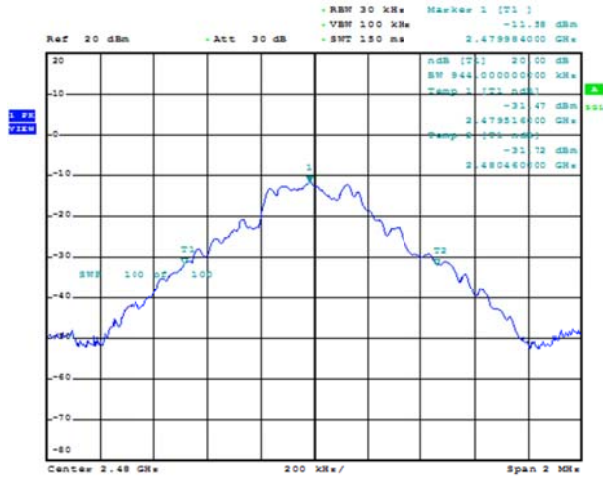


Date: 9.AUG.2011 12:45:03

4.3.2 8DPSK modulation, PRBS packet type


	20 dB bandwidth [kHz]
0 / 2402	1316
40 / 2442	1312
78 / 2480	1312

Channel 0 / 2402 MHz

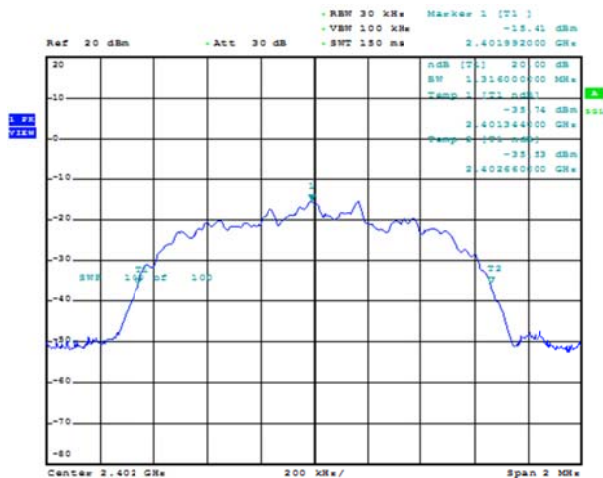


Date: 9.AUG.2011 12:46:09

Channel 40 / 2442 MHz

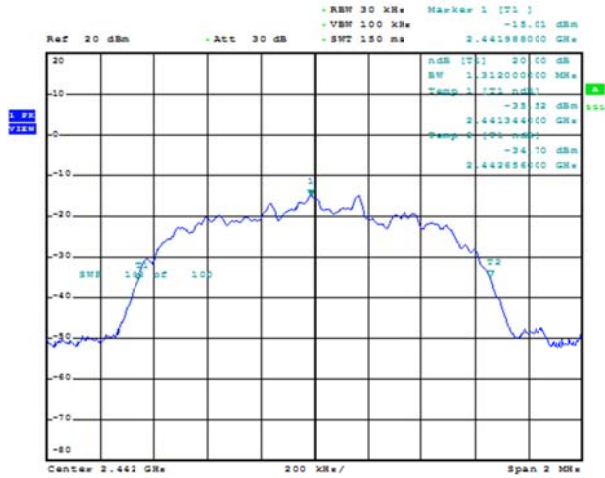

Date: 9.AUG.2011 12:47:15

Channel 78 / 2480 MHz

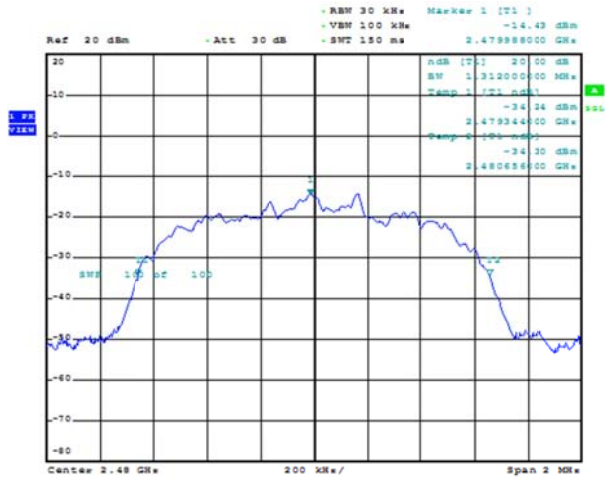


Date: 9.AUG.2011 12:48:20

5. Carrier frequency separation

15.247(a)(1), A8.1 (b)

EUT with DUT number	RM-763, DUT 25946
Accessories with DUT numbers	AC-8E, DUT 23727 ; WH-102, DUT 23579 ; BP-3L, DUT 23546
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 99.8
Date of measurements	09-Aug-2011
Measured by	Christian Andersen

5.1. Test Setup

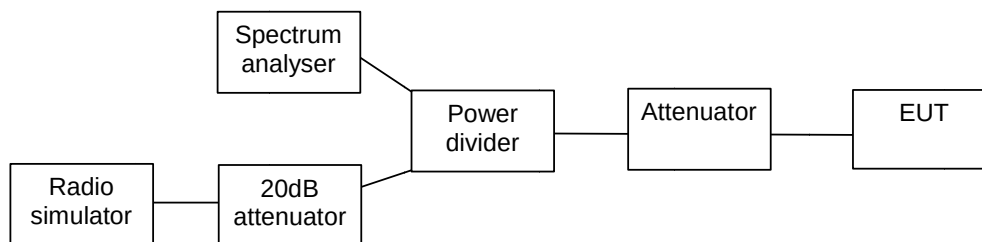

5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

5.3. Bluetooth Test results

5.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1000	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

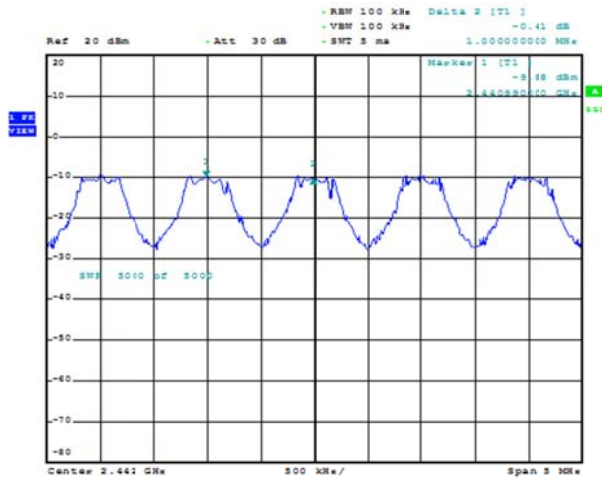


Date: 9.AUG.2011 13:01:54

5.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
990	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

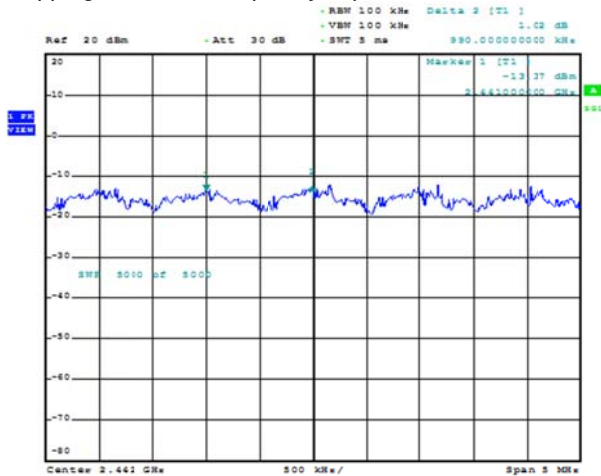


Date: 9.AUG.2011 13:04:23

6. Number of hopping frequencies 15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-763, DUT 25946
Accessories with DUT numbers	AC-8E, DUT 23727 ; WH-102, DUT 23579 ; BP-3L, DUT 23546
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 99.8
Date of measurements	09-Aug-2011
Measured by	Christian Andersen

6.1. Test Setup

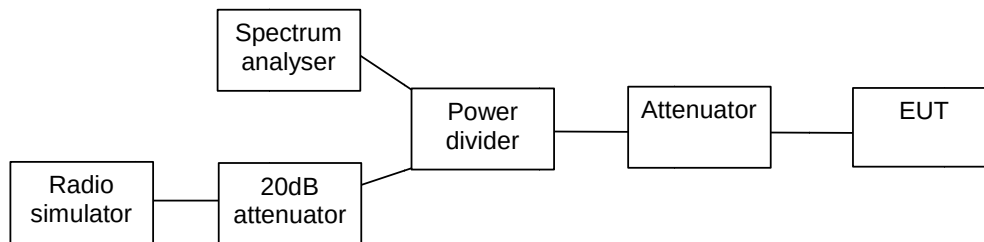

6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
>= 15

6.3. Bluetooth Test results

6.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED

Hopping on, number of hopping frequencies

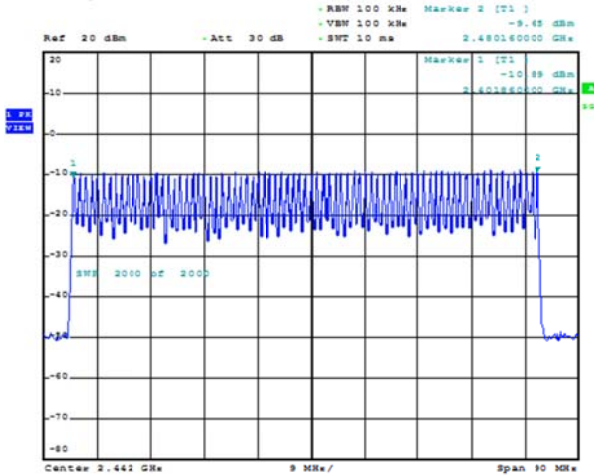


Date: 9.AUG.2011 13:06:38

6.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
58	PASSED

Hopping on, number of hopping frequencies

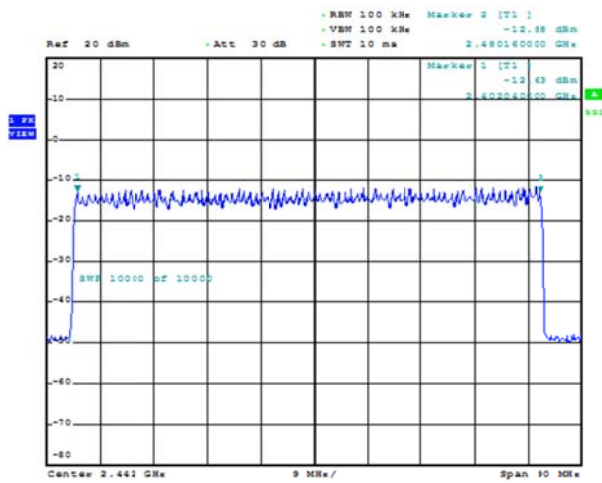


Date: 9.AUG.2011 13:13:47

7. Time of occupancy 15.247(a)(1)(iii), A8.1 (d)

EUT with DUT number	RM-763, DUT 25946
Accessories with DUT numbers	AC-8E, DUT 23727 ; WH-102, DUT 23579 ; BP-3L, DUT 23546
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 99.8
Date of measurements	09-Aug-2011
Measured by	Christian Andersen

7.1. Test Setup

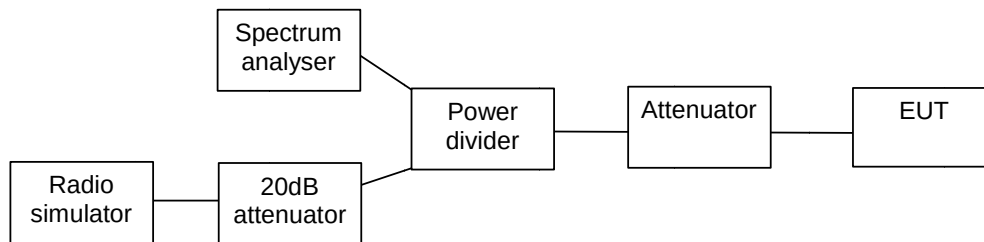

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
<= 0.4

7.3. Bluetooth Test results


7.3.1 GFSK modulation, PRBS packet type

Hopping on, number of transmissions, channel 40 / 2442 MHz	Duration of one transmission	Time of occupancy	Result
90	2.912	0.262	PASSED

Hopping on, duration of one transmission, channel 40 / 2442 MHz

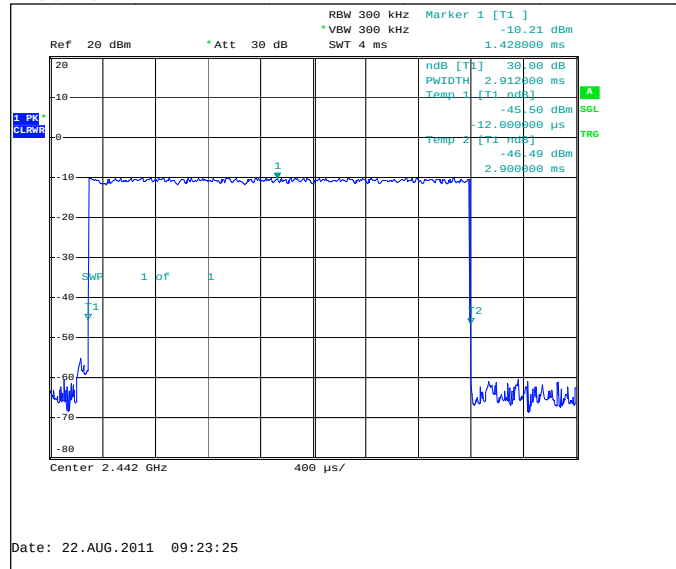


Hopping on, number of transmissions, channel 40/ 2442 MHz

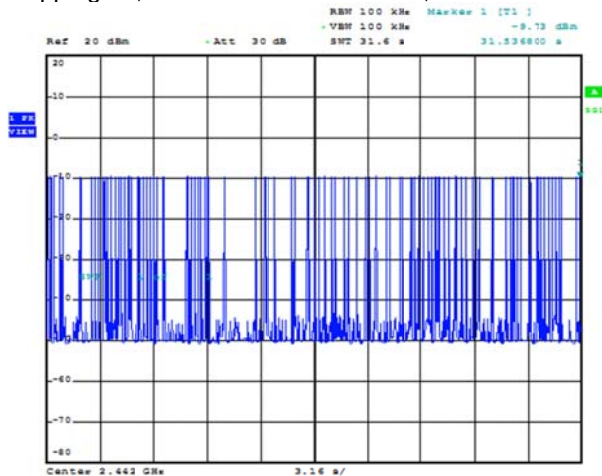

7.3.2 8DPSK modulation, PRBS packet type


Hopping on, number of transmissions, channel 40 / 2442 MHz	Duration of one transmission	Time of occupancy	Result
92	2.912	0.269	PASSED

Hopping on, duration of one transmissions, channel 40/ 2442 MHz

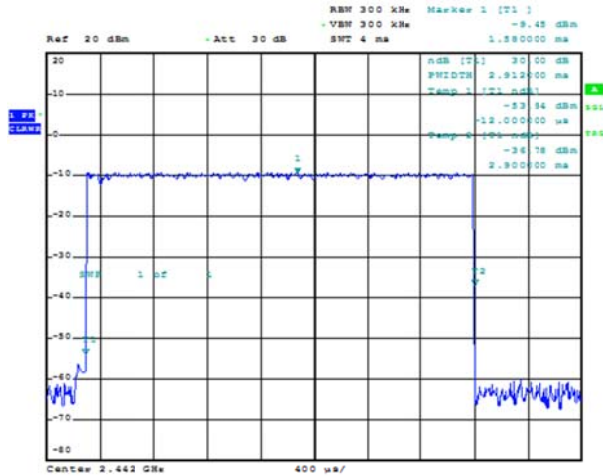

Date: 9.AUG.2011 13:15:39

Hopping on, number of transmissions, channel 40/ 2442 MHz

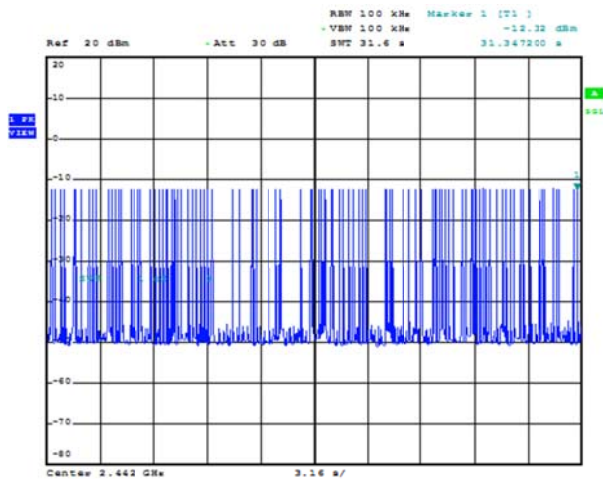

Date: 9.AUG.2011 13:17:24

8. Test Equipment

8.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
20682	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20739	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B

8.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B