



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E016R-048

Applicant : OPTICIS CO., LTD.
Address : Suite A906-2, Techno-Park, 150 Yatap-Dong, Sungnam-City, Kyungki-Do, 463-070, Korea

Manufacturer : OPTICIS CO., LTD.
Address : Suite A906-2, Techno-Park, 150 Yatap-Dong, Sungnam-City, Kyungki-Do, 463-070, Korea

Type of Equipment : Optical USB Extension Module

FCC ID : PPNM2-100

Model / Type No. : M2-100

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : February 08, 2001

Date of issuing : June 27, 2001


SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B**.


This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.

Reviewed by:


Y. K. Kwon / Chief Engineer
EMC Dept.
ONETECH Corp.

Approved by:


S. S. Hong / Managing Director
ONETECH Corp.

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S).....	4
2.3 TEST SYSTEM DETAILS.....	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION.....	6
3.2 EUT EXERCISE SOFTWARE	6
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM.....	7
4. PRELIMINARY TEST.....	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT.....	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION.....	12
7. LIST OF TEST EQUIPMENT	13



1. VERIFICATION OF COMPLIANCE

APPLICANT : OPTICIS CO., LTD.
ADDRESS : Suite A 906-2, Techno-Park, 150 Yatap-Dong, Sungnam-City, Kyungki-Do, 463-070, Korea
CONTACT PERSON : Mr. Seung-il, Lee / Manager
TELEPHONE NO : +82-31-707-4630
FCC ID : PPNM2-100
MODEL NO/NAME : M2-100
SERIAL NUMBER : N/A
DATE : June 27, 2001

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	Optical USB Extension Module
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR 47 PART 15 §15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The OPTICIS CO., LTD., Model M2-100 (referred to as the EUT in this report) is an Optical USB Extension Module that consists of up stream connector (Male) and down stream connector (Female) to link the USB device far from the host.

Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	6.0MHz on the RX Board
CABLE LENGTH	50 meter
NUMBER OF LAYERS	RX Board and TX Board: 4Layers
ELECTRICAL RATING	DC 5V from AC/DC Adaptor
EXTERNAL TERMINALS	Up Stream Connector(USB Male), Down Stream Connector(USB Female)

Model Differences

-. The following list consists of added model name and their differences: The basic and added models are identical except for connector type difference only.

	Model Name	Model Difference
Basic Model	M2-100	Connector Type: Up Stream Connector (Male), Down Stream Connector (Female)
Added Model	M2-101	Only a connector type of the basic model. Up Stream Connector (Male), Down Stream Connector (Male)

2.2 Related Submittal(s) / Grant(s)

Original submittal only

2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
M2-100	OPTICIS CO., LTD.	PPNM2-100	Optical USB Extension Module (EUT)	PC
AP3502-US(M2)	ANAM	-	AC/DC ADAPTER	EUT
DCM	DELL COMPUTER	DoC	PC	-
6550-23N	SONY	DoC	MONITOR	PC
5530	BTC	DoC	KEYBOARD	PC
PCA-3100	PROCHIPS	MY8PCA-3100	USB CAMERA	EUT
OK-720	A4 TECH	DoC	MOUSE	PC
2225C	HP	DSI6XU2225	PRINTER	PC
020-0470	CARDINAL	GDE0196	MODEM	PC

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 12, 1999. (Registration Number: 92819)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
TX Board	Opticis Co., Ltd.	TX-A	-
RX Board	Opticis Co., Ltd.	RX-Ab	-
Adaptor Board	ANAM	-	-

3.2 EUT exercise Software

The up stream connector of the EUT was connected to the USB port of a personal computer and the USB camera was connected to the down stream connector of the EUT, and then the image of the USB camera was continuously displayed on the screen of the PC monitor.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Optical USB Extension Module (EUT)	N/A	N	50(D)
AC/DC ADAPTER	N	-	1.3(P)
PC	N	-	1.5(P)
MONITOR	N	Y	1.5(P),1.5(D)
KEYBOARD	N/A	N	0.8(D)
USB CAMERA	N/A	Y	1.0(D)
MOUSE	N/A	N	1.5(D)
PRINTER	N	Y	1.5(P), 1.5(D)
MODEM	N	Y	1.5(P), 1.5(D)

* The marked “(P)” means the Power Cable and “(D)” means Signal Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Optical USB Extension Module (EUT)	N/A	N/A	Y	BOTH END
AC/DC ADAPTER	N	N/A	Y	EUT END
PC	-	-	-	-
MONITOR	Y	BOTH END	Y	BOTH END
KEYBOARD	N	N/A	Y	PC END
USB CAMERA	Y	EUT END	Y	EUT END
MOUSE	N	N/A	Y	PC END
PRINTER	N	N/A	Y	BOTH END
MODEM	N	N/A	Y	BOTH END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test: The EUT was connected to PC, and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The image of the USB camera was continuously displayed on the screen of the PC monitor.	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The image of the USB camera was continuously displayed on the screen of the PC monitor.	X

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 47%

Temperature : 24•

Limits apply to : FCC CFR 47, PART 15, SUBPART B

Type of Test : CLASS B

Result : PASSED BY -6.84 dB at 11.43 MHz

EUT : Optical USB Extension Module

Date: May 03, 2001

Operating Condition : The image of the USB camera was continuously displayed on the screen of the PC monitor.


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
10.41	34.44	NEUTRAL	48.00	-13.56
11.39	39.29	NEUTRAL	48.00	-8.71
11.43	41.16	HOT	48.00	-6.84
12.45	37.20	HOT	48.00	-10.80
14.56	38.27	NEUTRAL	48.00	-9.73
14.94	37.63	HOT	48.00	-10.37


Line Conducted Emission Tabulated Data



Tested by: Young Min, Choi / Project Engineer

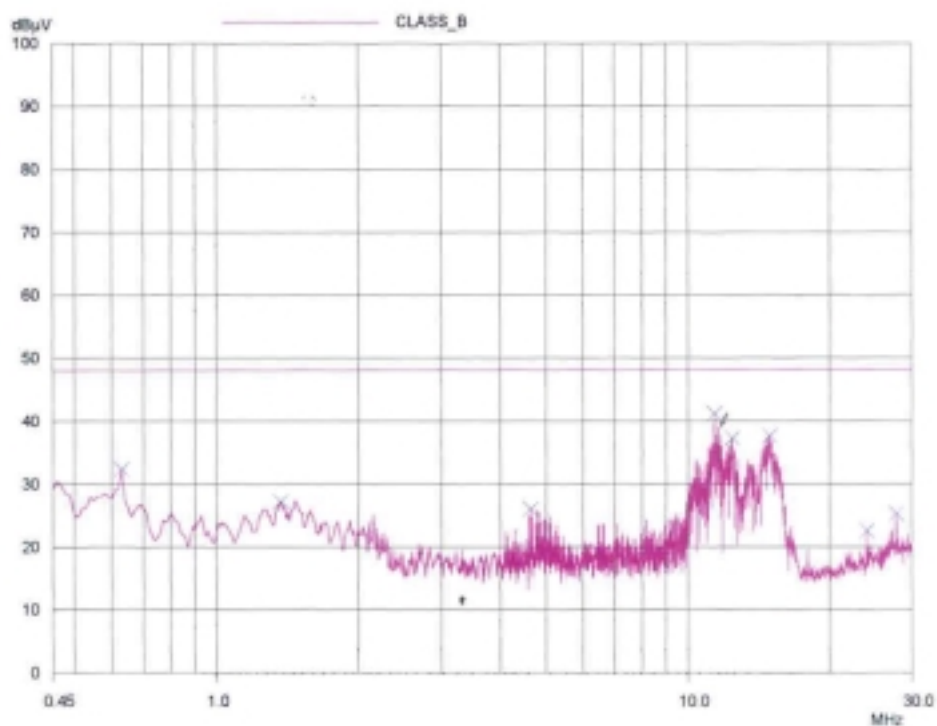

HOT LINE

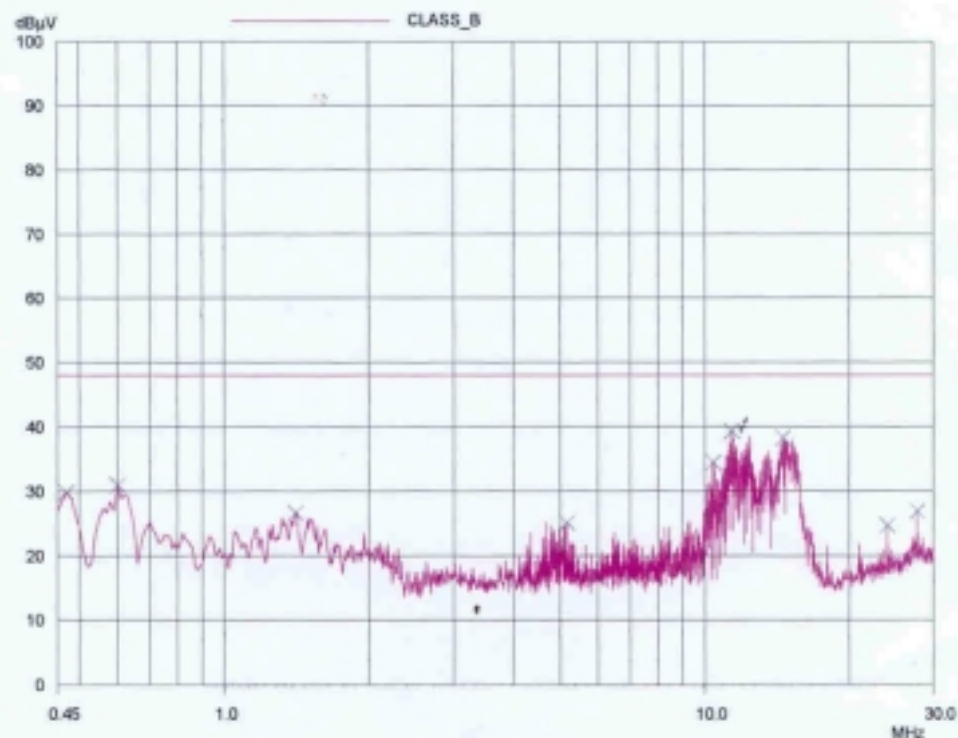

NEUTRAL LINE

5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 47 %
 Limits apply to : FCC CFR 47, PART 15, SUBPART B
 Type of Test : CLASS B
 Result : PASSED BY -6.08 dB at 36.00 MHz

Temperature : 24.0

EUT : Optical USB Extension Module
 Date: May 02, 2001
 Operating Condition : The image of the USB camera was continuously displayed on the screen of the PC monitor.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
36.00	21.10	V	12.02	0.80	33.92	40.00	-6.08
60.00	17.30	V	9.63	0.98	27.91	40.00	-12.09
72.00	18.30	V	6.90	1.00	26.20	40.00	-13.80
120.00	14.60	V	13.34	1.23	29.17	43.50	-14.33
144.00	14.10	H	12.96	1.33	28.39	43.50	-15.11
202.60	20.20	H	11.57	1.58	33.35	43.50	-10.15
222.40	21.40	V	11.91	1.69	35.00	46.00	-11.00
240.00	16.40	H	12.20	1.78	30.38	46.00	-15.62
288.20	14.20	H	14.71	1.95	30.86	46.00	-15.14
336.60	13.80	H	15.20	2.21	31.21	46.00	-14.79
360.40	15.10	H	15.32	2.33	32.75	46.00	-13.25
470.40	15.90	H	17.48	2.59	35.97	46.00	-10.03

Radiated Emission Tabulated Data



Tested by: Young Min, Choi / Project Engineer

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	SEP/00	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APRIL/01	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3026A0226	SEP/00	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	SEP/00	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	SEP/00	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/01	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/01	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	MAR/01	12MONTH	■
9.	Horn Antenna	EMCO	3115	9509-4563	MAR/01	12MONTH	■
10.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUN/01	12MONTH	■
11.	RF Amplifier	HP	8447F	3113A04554	JUN/01	N/A	
12.	Spectrum Analyzer	HP	8591A	3131A02312	APR/01	12MONTH	
13.	Spectrum Analyzer	HP	8561E	3350A00546	SEP/00	12MONTH	■
14.	Computer System	HP	98581C	98543A	N/A	N/A	■
	Hard disk drive		9153C	CMC762Z9153	N/A	N/A	■
15.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
16.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
17.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
18.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■

Remark: "■" means used equipment.