

RF Test Report

Applicant : Lite-On Technology Corp.
Product Type : BLE Bluetooth Module
Trade Name : LITE-ON
Model Number : WB101N
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Jan. 23, 2019
Test Period : Jan. 30 ~ Mar. 07, 2019
Issue Date : Mar. 12, 2019

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Feb. 26, 2019	Initial Issue	Shelly Chen
01	Mar. 12, 2019	Page 9 Revised Configuration of Test System Details. Page 10 Revised Test Instruments. Page 21~22 Added Conducted Emission test result. Page 23~29 Revised 6 dB RF Bandwidth, Maximum Power Density, Out of Band Conducted Emissions test result.	Shelly Chen

Verification of Compliance

Issued Date: Mar. 12, 2019

Applicant : Lite-On Technology Corp.

Product Type : BLE Bluetooth Module

Trade Name : LITE-ON

Model Number : WB101N

FCC ID : PPQ-WB101N

EUT Rated Voltage : DC 1.8 V ~ 3.6 V (3.3 V typical)

Test Voltage : 120 Vac / 60 Hz, 5 Vdc

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By
(Manager): Fly Lu
(Fly Lu)Reviewed By
(Testing Engineer): Eric Ou Yang
(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Measurement Uncertainty	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Test Step	8
3.3.	Configuration of Test System Details	9
3.4.	Test Instruments	10
3.5.	Test Site Environment	10
4	Measurement Procedure	11
4.1.	AC Power Line Conducted Emission Measurement	11
4.2.	Radiated Emission Measurement	13
4.3.	Maximum Conducted Output Power Measurement	17
4.4.	6 dB RF Bandwidth Measurement	18
4.5.	Maximum Power Density Measurement	19
4.6.	Out of Band Conducted Emissions Measurement	20
4.7.	Antenna Measurement	20
5	Test Results	21
	Annex A. Conducted Emission	21
	Annex B. Conducted Test Results	23
	Annex C. Radiated Emission Measurement	30

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9 kHz ~ 150 kHz	2.7
	150 kHz ~ 30 MHz	2.7
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.5
	18000 MHz ~ 26500 MHz	4.8
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96 %	
Power Spectral Density	+0.71 dB / -0.77 dB	

2 EUT Description

Applicant	Lite-On Technology Corp. Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.	
Manufacturer	LITE-ON TECHNOLOGY (Changzhou) CO., LTD A9 Building, No.88 Yanghu Road, Wujin Hi-Tech Industrial Development Zone, Changzhou City, Jiangsu Province 213100 China	
Product Type	BLE Bluetooth Module	
Trade Name	LITE-ON	
Model No.	WB101N	
FCC ID	PPQ-WB101N	
Frequency Range	2402 ~ 2480 MHz	
Modulation Type	GFSK	
Operate Temp. Range	-40 ~ +85 °C	
Antenna Information	Type	Max. Gain (dBi)
	Printed Antenna	3.0
RF Output Power	0.00207 W	

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: LE, GFSK Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %.


3.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	Turn on TX function
4	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Conducted Emission

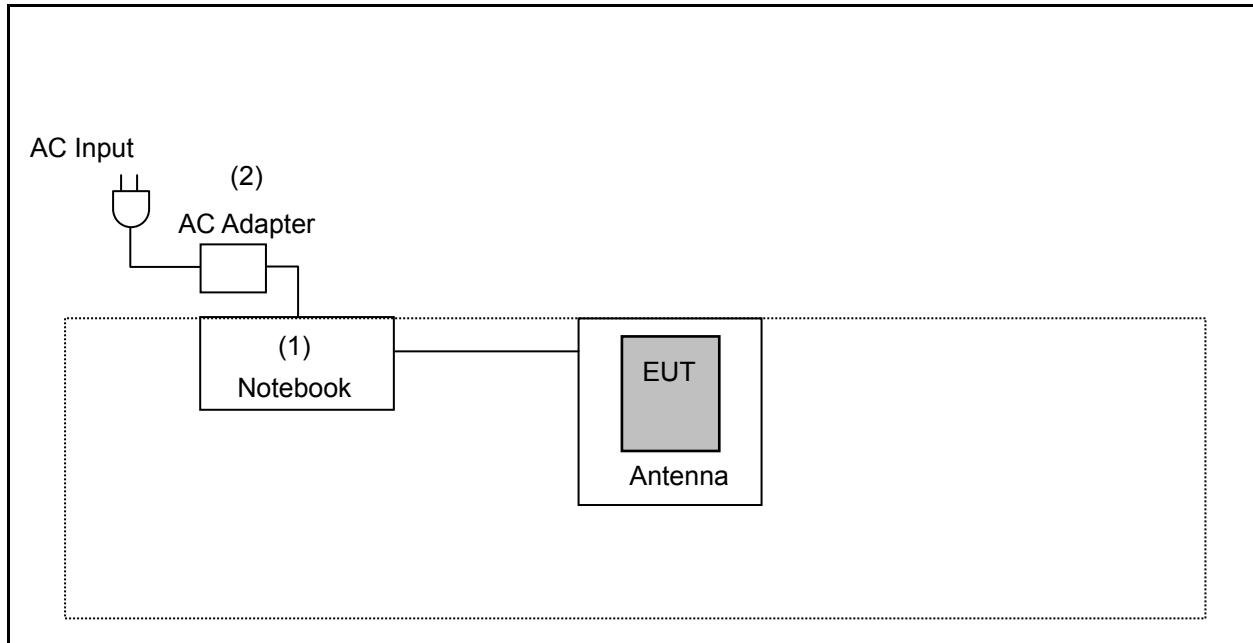

Radiated Emissions

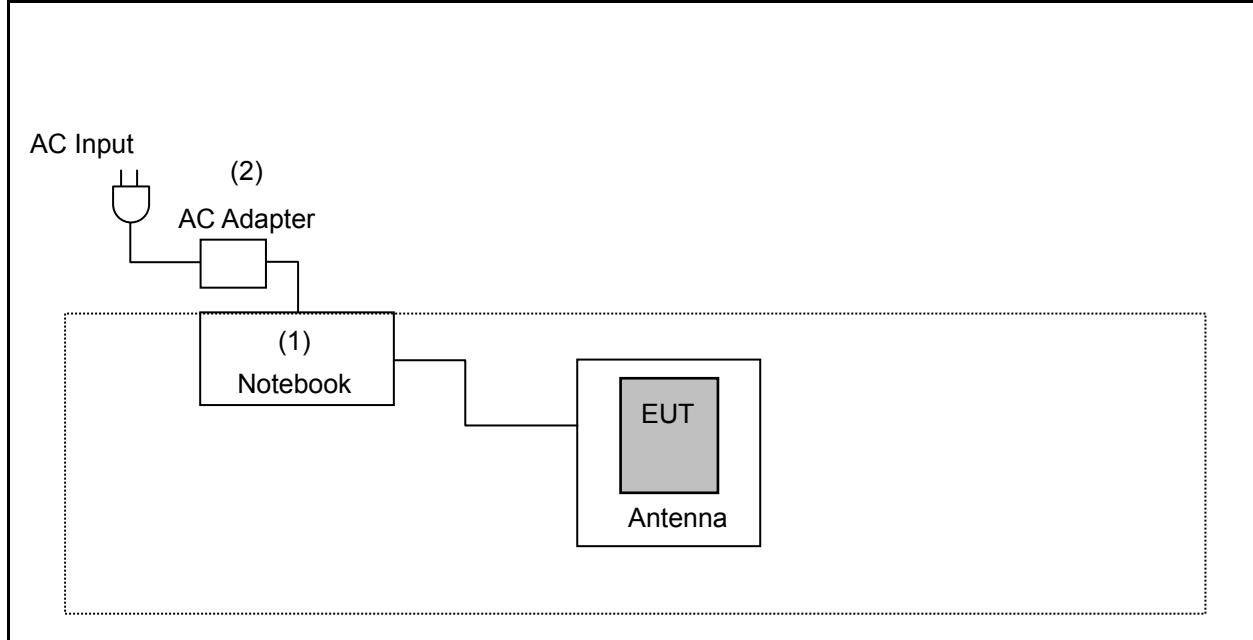

Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	HP	PROBOOK 4421s	CNF1182X1G	---
(2)	AC Adapter	HP	Series PPP012H-S	---	Non-Shielded, 1.7 m

3.4. Test Instruments

For Conducted Emission

Test Period: Jan. 30, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/21/2018	1 year
LISN	R&S	ENV216	101040	04/11/2018	1 year
LISN	R&S	ENV216	101041	03/23/2018	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/17/2018	1 year

For Radiated Emissions

Test Period: Jan. 30, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
EXA Signal Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/14/2019	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/16/2018	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/14/2019	1 year
Trilog Broadband Antenna	Schwarzbeck Mess-Elektronik	VULB9168	416	10/23/2018	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Broadband Horn Antenna (18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	9170	9170-320	08/07/2018	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/13/2018	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2018	1 year
Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	10/30/2018	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/20/2018	1 year

For Conducted

Test Period: Feb. 18 ~ Mar. 07, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/13/2018	1 year
Power Sensor	Anritsu	MA2411B	1126022	08/29/2018	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2018	1 year

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	990


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

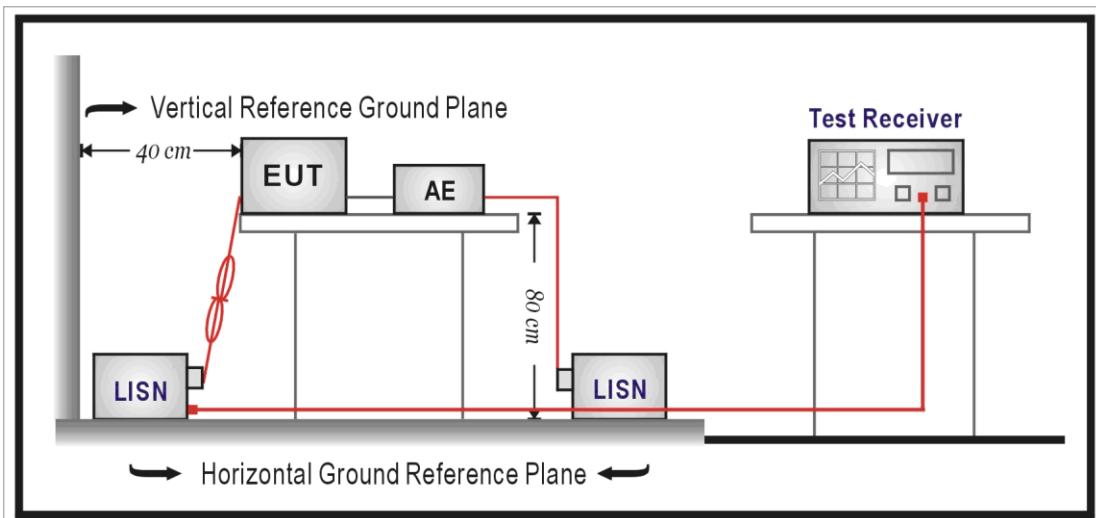

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50Ω // $50 \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω // $50 \mu\text{H}$ coupling impedance with 50Ω termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50Ω ports of the LISN shall be resistively terminated into 50Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

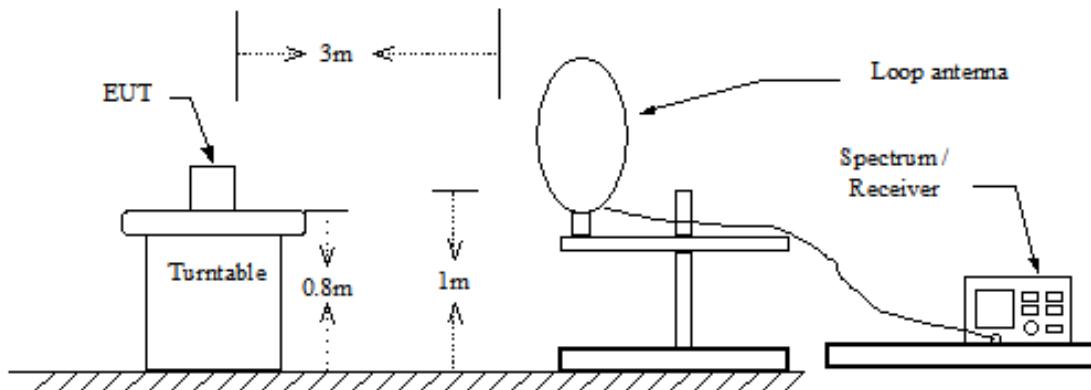

Below 1 GHz

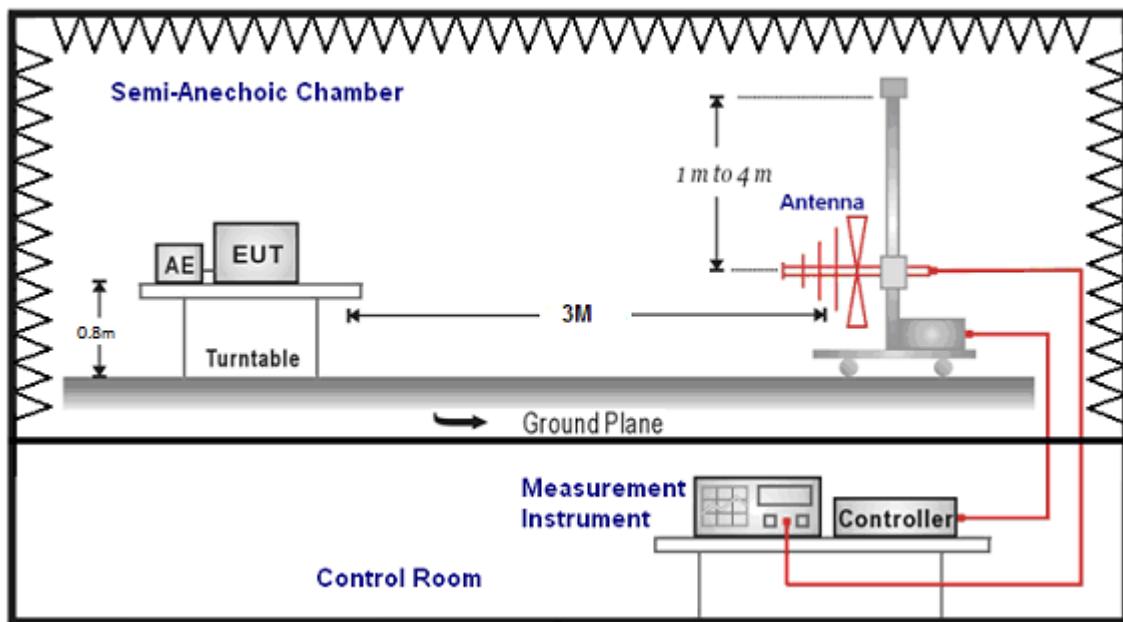

Above 1 GHz

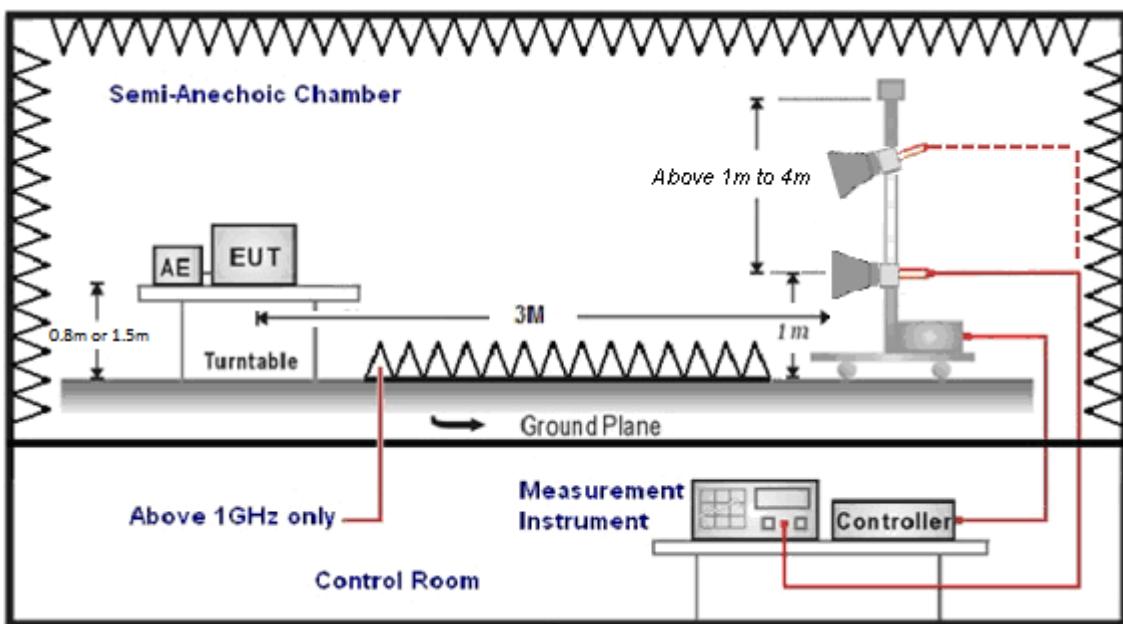

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / 1/T for average measurements when Duty cycle <0.98. A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dB_{uV}) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dB_{uV/m}).

The actual field intensity in dBuV/m is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.3. Maximum Conducted Output Power Measurement

- **Limit**

For systems using digital modulation in the 2400-2483.5 MHz, the limit for peak output power is 30 dBm.

- **Test Setup**

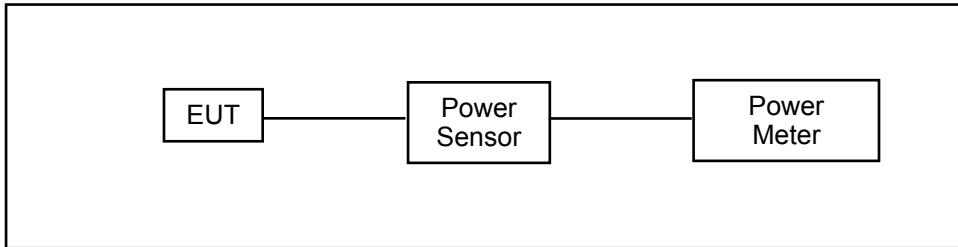

- **Test Procedure**

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..


4.4. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ Test Setup

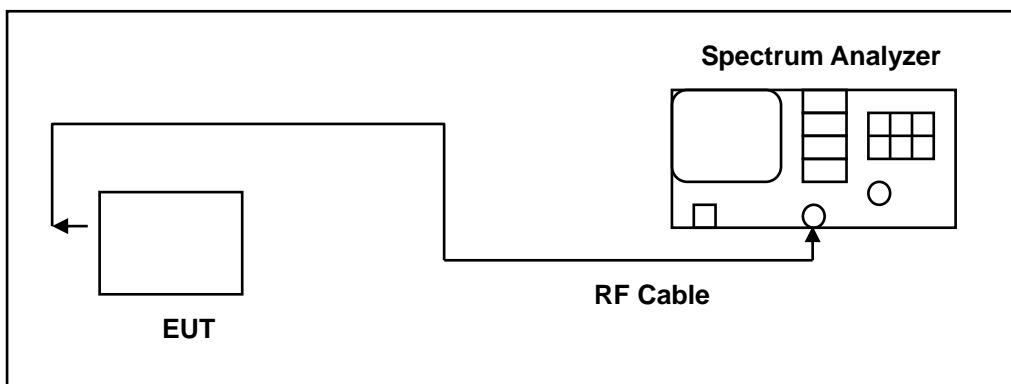

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10-2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

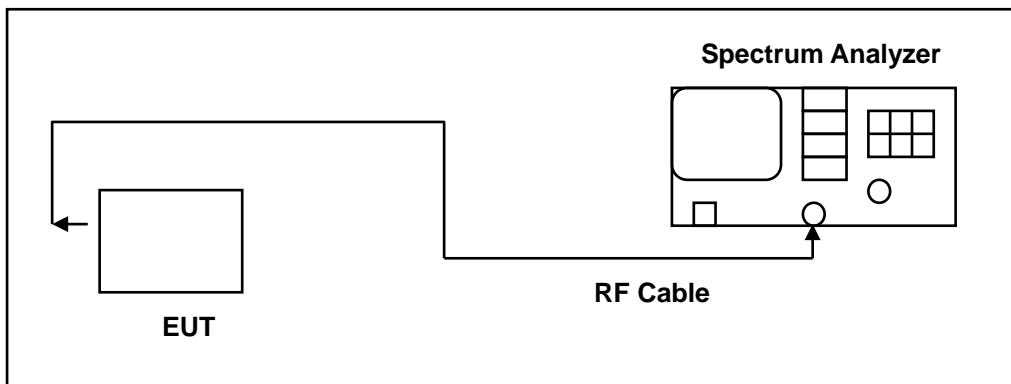

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

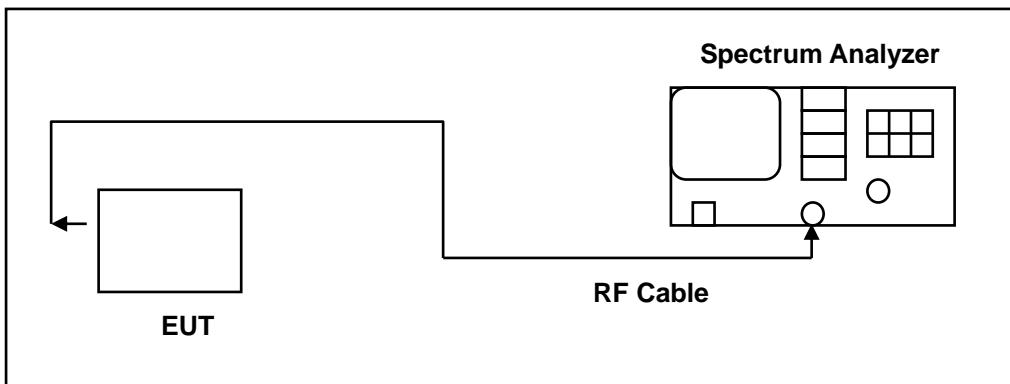

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


■ Antenna Connector Construction

See section 2 – antenna information.

5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test Mode:	Mode 1	Power:	AC 120 V/60 Hz
		Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

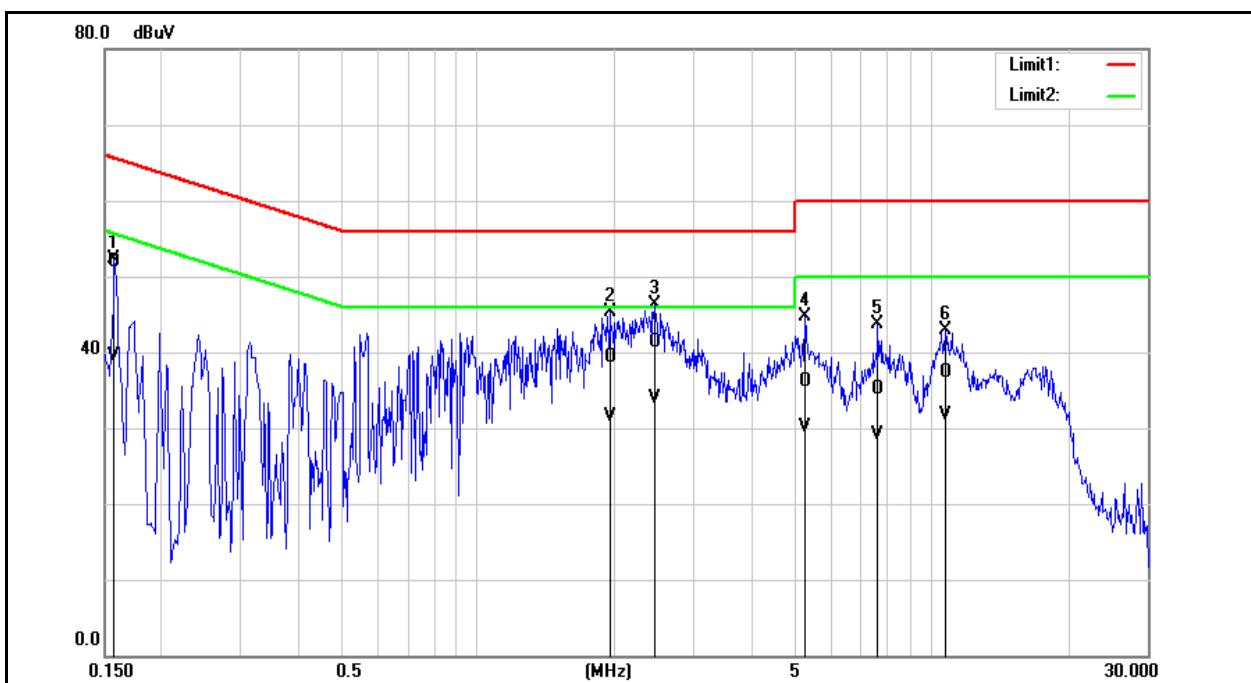


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	42.34	30.00	9.60	51.94	39.60	65.57	55.57	-13.63	-15.97	Pass
2	1.9540	29.66	21.77	9.67	39.33	31.44	56.00	46.00	-16.67	-14.56	Pass
3	2.4500	31.54	24.14	9.68	41.22	33.82	56.00	46.00	-14.78	-12.18	Pass
4	5.2700	26.26	20.32	9.76	36.02	30.08	60.00	50.00	-23.98	-19.92	Pass
5	7.6460	25.25	19.29	9.81	35.06	29.10	60.00	50.00	-24.94	-20.90	Pass
6	10.7660	27.44	21.83	9.87	37.31	31.70	60.00	50.00	-22.69	-18.30	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test Mode:	Mode 1	Power:	AC 120 V/60 Hz
		Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

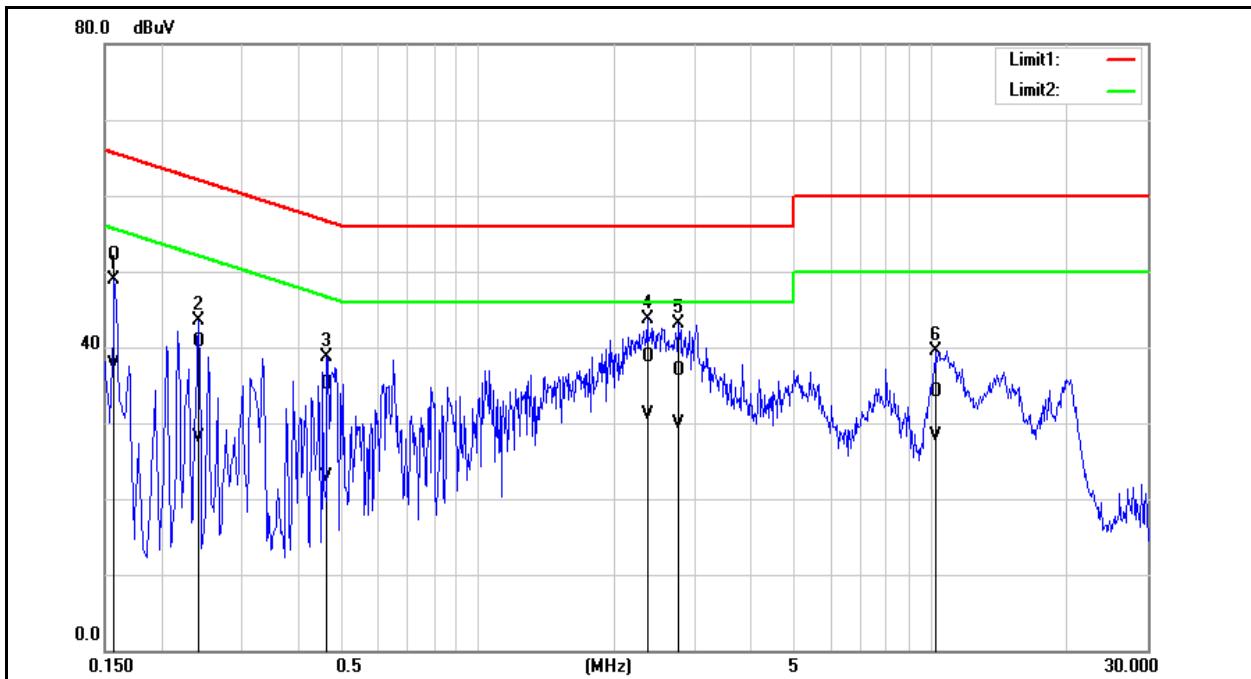

No.	Frequency (MHz)	QP reading (dBuV)	Avg reading (dBuV)	Correction factor (dB)	QP result (dBuV)	Avg result (dBuV)	QP limit (dBuV)	Avg limit (dBuV)	QP margin (dB)	Avg margin (dB)	Remark
1	0.1580	42.42	27.91	9.71	52.13	37.62	65.57	55.57	-13.44	-17.95	Pass
2	0.2420	31.10	18.33	9.70	40.80	28.03	62.03	52.03	-21.23	-24.00	Pass
3	0.4660	25.49	13.21	9.71	35.20	22.92	56.58	46.58	-21.38	-23.66	Pass
4	2.3660	28.98	21.26	9.78	38.76	31.04	56.00	46.00	-17.24	-14.96	Pass
5	2.7660	27.18	20.09	9.80	36.98	29.89	56.00	46.00	-19.02	-16.11	Pass
6	10.2620	24.09	18.23	9.99	34.08	28.22	60.00	50.00	-25.92	-21.78	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Mode 2				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	2.89	0.00195	3.15	0.00207	≤ 30
2440	2.55	0.00180	2.82	0.00191	≤ 30
2480	2.36	0.00172	2.63	0.00183	≤ 30




Note: The relevant measured result has the offset with cable loss already.

6 dB RF Bandwidth Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	513.981	≥ 500
2440	509.299	≥ 500
2480	517.694	≥ 500

■ Test Graphs

Mode 2

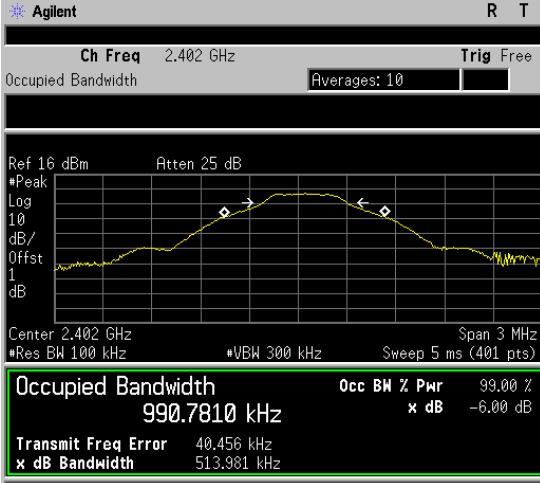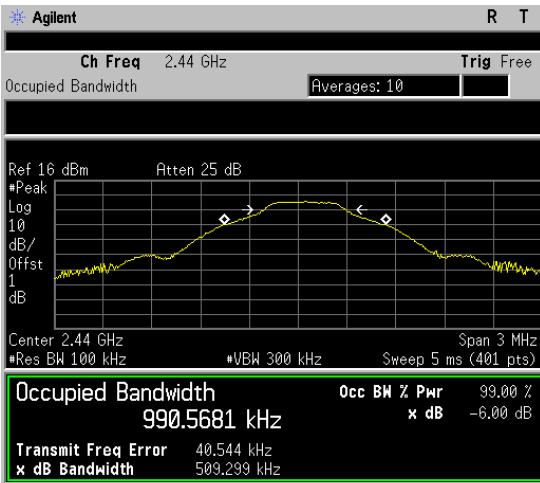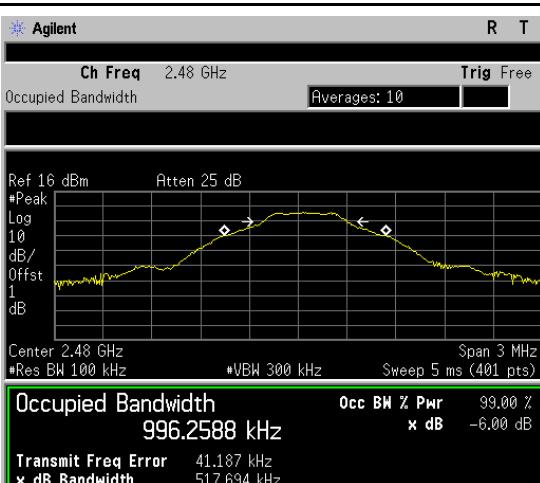
2402 MHz	 <p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth Averages: 10</p> <p>Ref 16 dBm Atten 25 dB</p> <p>*Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.402 GHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 990.7810 kHz x dB -6.00 dB</p> <p>Transmit Freq Error 40.456 kHz x dB Bandwidth 513.981 kHz</p>	<p>Freq/Channel</p> <p>Center Freq 2.4020000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.40350000 GHz</p> <p>CF Step 300.000000 kHz Auto</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2440 MHz	 <p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth Averages: 10</p> <p>Ref 16 dBm Atten 25 dB</p> <p>*Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.44 GHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 990.5681 kHz x dB -6.00 dB</p> <p>Transmit Freq Error 40.544 kHz x dB Bandwidth 509.299 kHz</p>	<p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43850000 GHz</p> <p>Stop Freq 2.44150000 GHz</p> <p>CF Step 300.000000 kHz Auto</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2480 MHz	 <p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth Averages: 10</p> <p>Ref 16 dBm Atten 25 dB</p> <p>*Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.48 GHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 996.2588 kHz x dB -6.00 dB</p> <p>Transmit Freq Error 41.187 kHz x dB Bandwidth 517.694 kHz</p>	<p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Maximum Power Density Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-6.943	≤ 8
2440	-7.376	≤ 8
2480	-7.303	≤ 8

■ Test Graphs

Mode 2

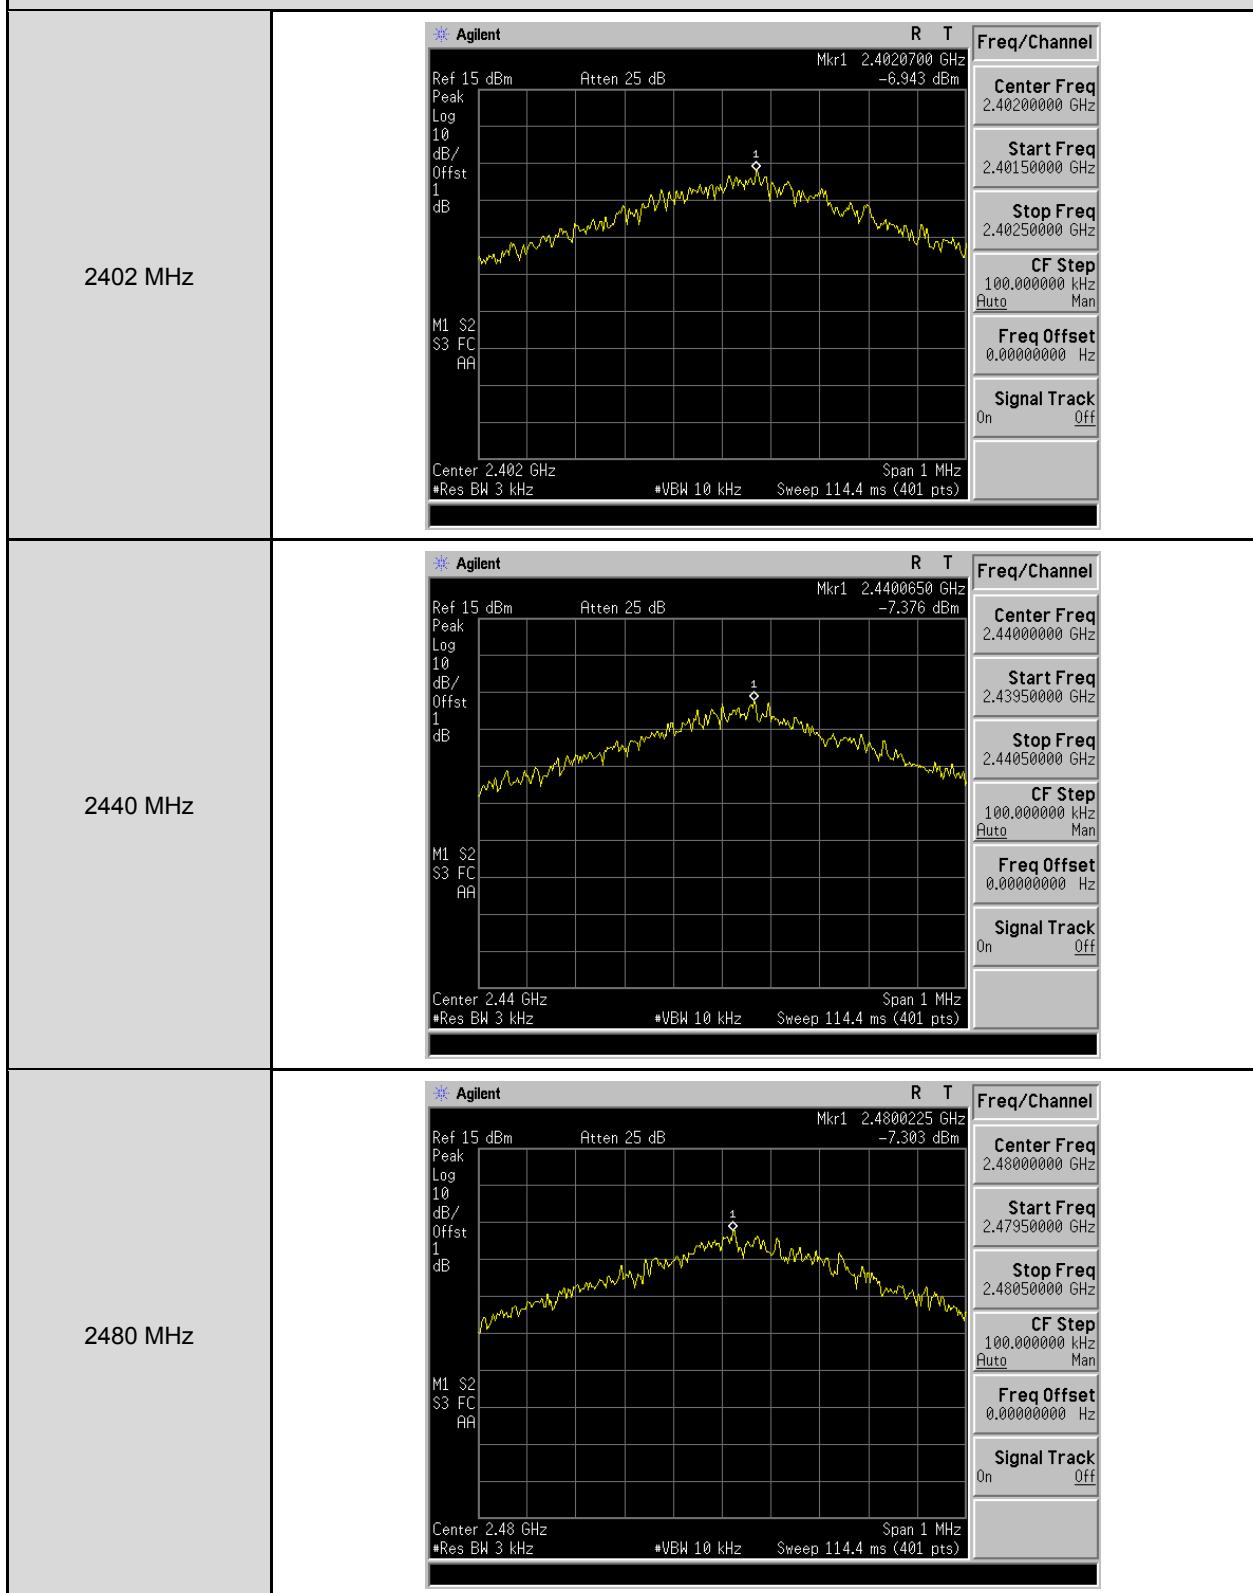


Out of Band Conducted Emissions Measurement

■ Test Graphs




Reference level

Mode 2

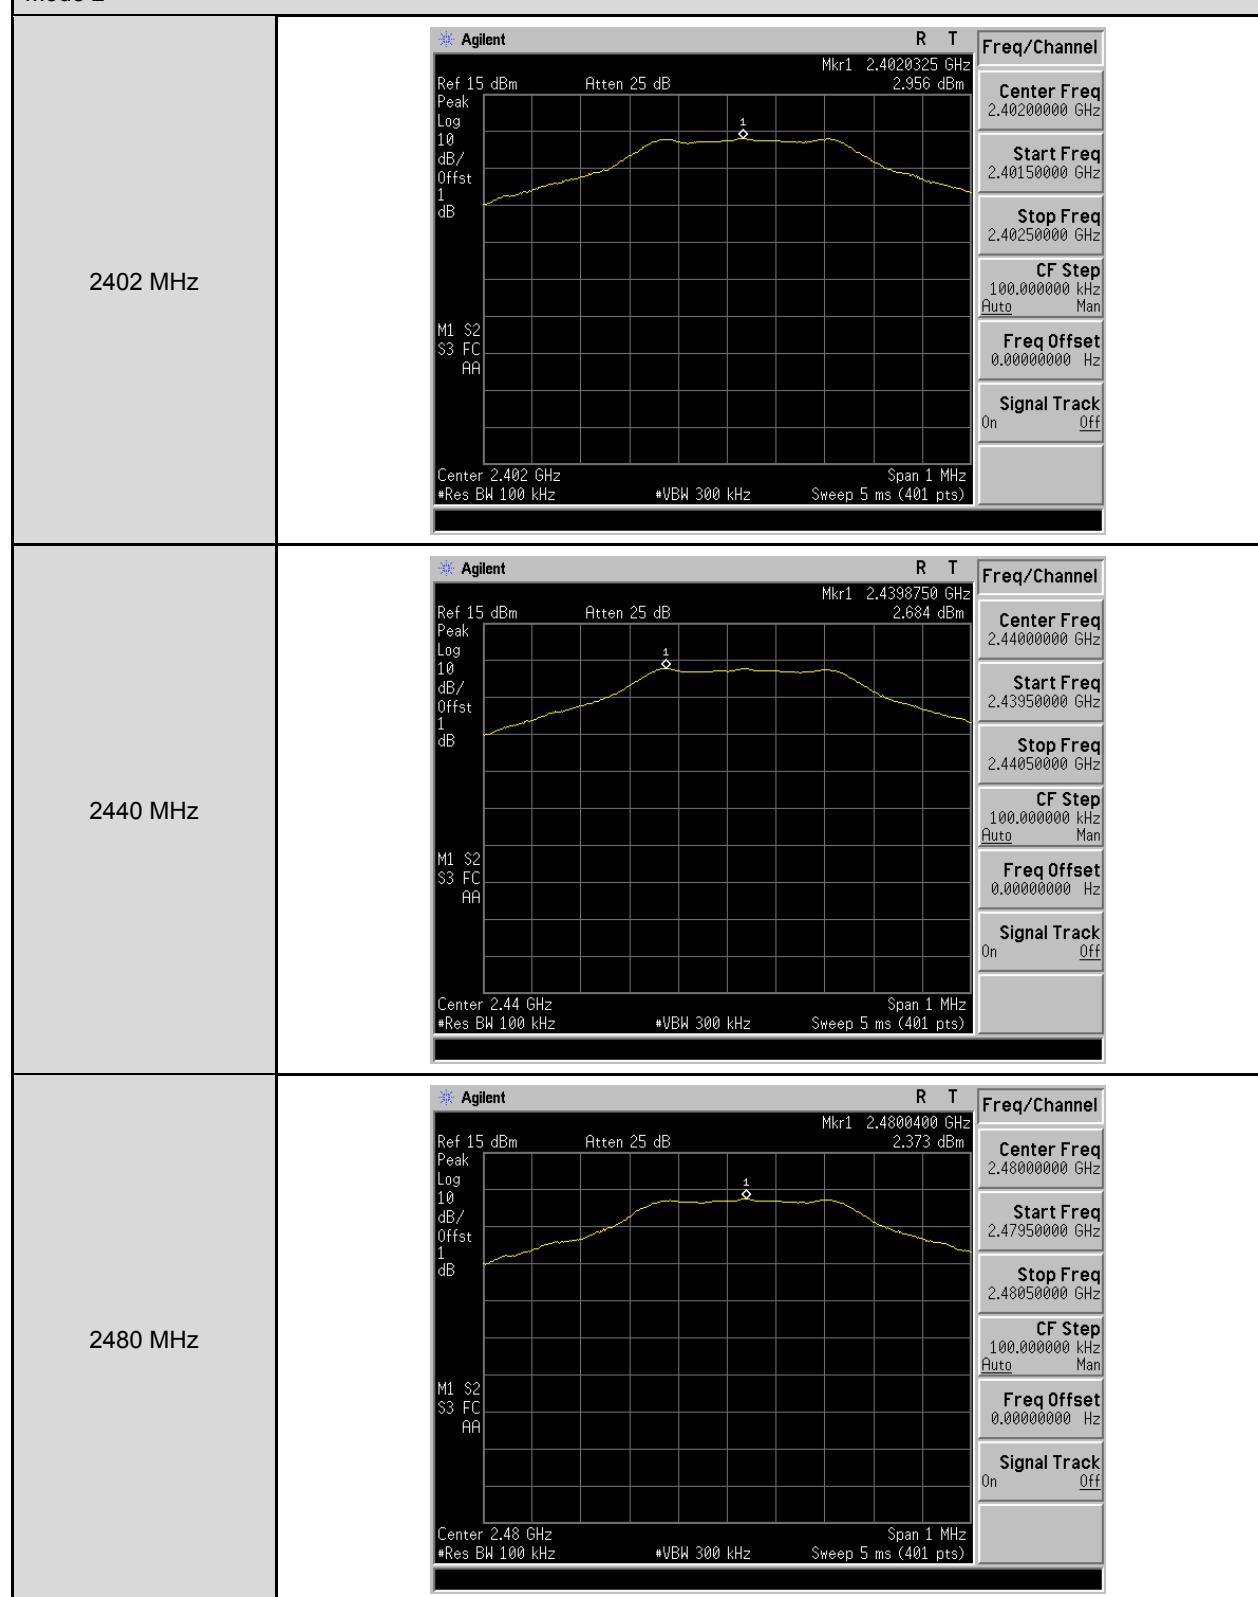


Out of Band Conducted Emissions

Mode 2

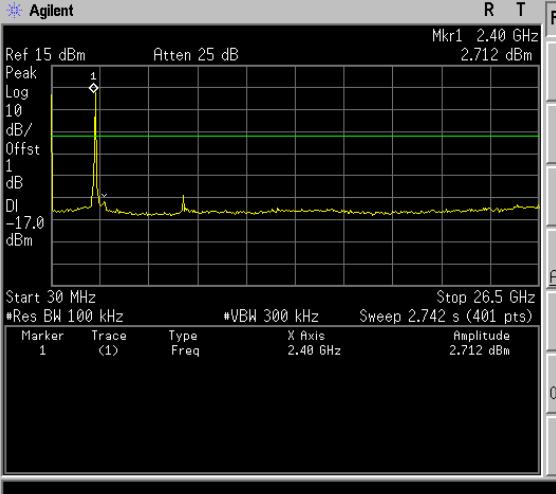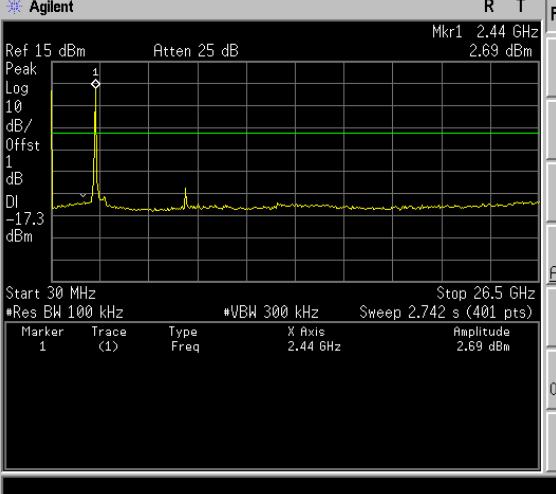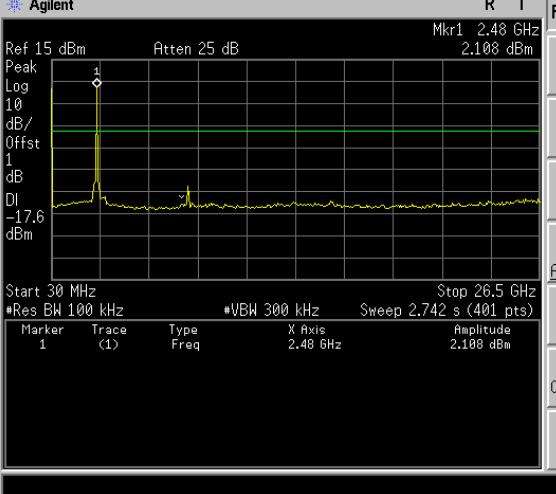2402 MHz	 <p>Agilent Spectrum Analyzer Data for 2402 MHz:</p> <p>Peak: 2.40 GHz, 2.712 dBm</p> <p>Start: 30 MHz, Stop: 26.5 GHz</p> <p>Marker 1: 2.40 GHz, Type: Freq, Amplitude: 2.712 dBm</p>	<table border="1"> <tr> <td colspan="2">R T</td> <td>Freq/Channel</td> </tr> <tr> <td>Ref 15 dBm</td> <td>Atten 25 dB</td> <td>Marker 1 2.40 GHz</td> </tr> <tr> <td>Peak</td> <td></td> <td>2.712 dBm</td> </tr> <tr> <td>Log</td> <td></td> <td></td> </tr> <tr> <td>dB/</td> <td></td> <td></td> </tr> <tr> <td>Offst</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td></td> <td></td> </tr> <tr> <td>dB</td> <td></td> <td></td> </tr> <tr> <td>DI</td> <td></td> <td></td> </tr> <tr> <td>-17.0</td> <td></td> <td></td> </tr> <tr> <td>dBm</td> <td></td> <td></td> </tr> <tr> <td colspan="2">Start 30 MHz</td> <td>Stop 26.5 GHz</td> </tr> <tr> <td colspan="2">#Res BW 100 kHz</td> <td>#VBW 300 kHz</td> </tr> <tr> <td colspan="2">Marker 1 Trace (1) Type Freq</td> <td>X Axis 2.40 GHz</td> </tr> <tr> <td colspan="2"></td> <td>Amplitude 2.712 dBm</td> </tr> <tr> <td colspan="2"></td> <td>Sweep 2.742 s (401 pts)</td> </tr> </table>	R T		Freq/Channel	Ref 15 dBm	Atten 25 dB	Marker 1 2.40 GHz	Peak		2.712 dBm	Log			dB/			Offst			1			dB			DI			-17.0			dBm			Start 30 MHz		Stop 26.5 GHz	#Res BW 100 kHz		#VBW 300 kHz	Marker 1 Trace (1) Type Freq		X Axis 2.40 GHz			Amplitude 2.712 dBm			Sweep 2.742 s (401 pts)
R T		Freq/Channel																																																
Ref 15 dBm	Atten 25 dB	Marker 1 2.40 GHz																																																
Peak		2.712 dBm																																																
Log																																																		
dB/																																																		
Offst																																																		
1																																																		
dB																																																		
DI																																																		
-17.0																																																		
dBm																																																		
Start 30 MHz		Stop 26.5 GHz																																																
#Res BW 100 kHz		#VBW 300 kHz																																																
Marker 1 Trace (1) Type Freq		X Axis 2.40 GHz																																																
		Amplitude 2.712 dBm																																																
		Sweep 2.742 s (401 pts)																																																
2440 MHz	 <p>Agilent Spectrum Analyzer Data for 2440 MHz:</p> <p>Peak: 2.44 GHz, 2.69 dBm</p> <p>Start: 30 MHz, Stop: 26.5 GHz</p> <p>Marker 1: 2.44 GHz, Type: Freq, Amplitude: 2.69 dBm</p>	<table border="1"> <tr> <td colspan="2">R T</td> <td>Freq/Channel</td> </tr> <tr> <td>Ref 15 dBm</td> <td>Atten 25 dB</td> <td>Marker 1 2.44 GHz</td> </tr> <tr> <td>Peak</td> <td></td> <td>2.69 dBm</td> </tr> <tr> <td>Log</td> <td></td> <td></td> </tr> <tr> <td>dB/</td> <td></td> <td></td> </tr> <tr> <td>Offst</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td></td> <td></td> </tr> <tr> <td>dB</td> <td></td> <td></td> </tr> <tr> <td>DI</td> <td></td> <td></td> </tr> <tr> <td>-17.3</td> <td></td> <td></td> </tr> <tr> <td>dBm</td> <td></td> <td></td> </tr> <tr> <td colspan="2">Start 30 MHz</td> <td>Stop 26.5 GHz</td> </tr> <tr> <td colspan="2">#Res BW 100 kHz</td> <td>#VBW 300 kHz</td> </tr> <tr> <td colspan="2">Marker 1 Trace (1) Type Freq</td> <td>X Axis 2.44 GHz</td> </tr> <tr> <td colspan="2"></td> <td>Amplitude 2.69 dBm</td> </tr> <tr> <td colspan="2"></td> <td>Sweep 2.742 s (401 pts)</td> </tr> </table>	R T		Freq/Channel	Ref 15 dBm	Atten 25 dB	Marker 1 2.44 GHz	Peak		2.69 dBm	Log			dB/			Offst			1			dB			DI			-17.3			dBm			Start 30 MHz		Stop 26.5 GHz	#Res BW 100 kHz		#VBW 300 kHz	Marker 1 Trace (1) Type Freq		X Axis 2.44 GHz			Amplitude 2.69 dBm			Sweep 2.742 s (401 pts)
R T		Freq/Channel																																																
Ref 15 dBm	Atten 25 dB	Marker 1 2.44 GHz																																																
Peak		2.69 dBm																																																
Log																																																		
dB/																																																		
Offst																																																		
1																																																		
dB																																																		
DI																																																		
-17.3																																																		
dBm																																																		
Start 30 MHz		Stop 26.5 GHz																																																
#Res BW 100 kHz		#VBW 300 kHz																																																
Marker 1 Trace (1) Type Freq		X Axis 2.44 GHz																																																
		Amplitude 2.69 dBm																																																
		Sweep 2.742 s (401 pts)																																																
2480 MHz	 <p>Agilent Spectrum Analyzer Data for 2480 MHz:</p> <p>Peak: 2.48 GHz, 2.108 dBm</p> <p>Start: 30 MHz, Stop: 26.5 GHz</p> <p>Marker 1: 2.48 GHz, Type: Freq, Amplitude: 2.108 dBm</p>	<table border="1"> <tr> <td colspan="2">R T</td> <td>Freq/Channel</td> </tr> <tr> <td>Ref 15 dBm</td> <td>Atten 25 dB</td> <td>Marker 1 2.48 GHz</td> </tr> <tr> <td>Peak</td> <td></td> <td>2.108 dBm</td> </tr> <tr> <td>Log</td> <td></td> <td></td> </tr> <tr> <td>dB/</td> <td></td> <td></td> </tr> <tr> <td>Offst</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td></td> <td></td> </tr> <tr> <td>dB</td> <td></td> <td></td> </tr> <tr> <td>DI</td> <td></td> <td></td> </tr> <tr> <td>-17.6</td> <td></td> <td></td> </tr> <tr> <td>dBm</td> <td></td> <td></td> </tr> <tr> <td colspan="2">Start 30 MHz</td> <td>Stop 26.5 GHz</td> </tr> <tr> <td colspan="2">#Res BW 100 kHz</td> <td>#VBW 300 kHz</td> </tr> <tr> <td colspan="2">Marker 1 Trace (1) Type Freq</td> <td>X Axis 2.48 GHz</td> </tr> <tr> <td colspan="2"></td> <td>Amplitude 2.108 dBm</td> </tr> <tr> <td colspan="2"></td> <td>Sweep 2.742 s (401 pts)</td> </tr> </table>	R T		Freq/Channel	Ref 15 dBm	Atten 25 dB	Marker 1 2.48 GHz	Peak		2.108 dBm	Log			dB/			Offst			1			dB			DI			-17.6			dBm			Start 30 MHz		Stop 26.5 GHz	#Res BW 100 kHz		#VBW 300 kHz	Marker 1 Trace (1) Type Freq		X Axis 2.48 GHz			Amplitude 2.108 dBm			Sweep 2.742 s (401 pts)
R T		Freq/Channel																																																
Ref 15 dBm	Atten 25 dB	Marker 1 2.48 GHz																																																
Peak		2.108 dBm																																																
Log																																																		
dB/																																																		
Offst																																																		
1																																																		
dB																																																		
DI																																																		
-17.6																																																		
dBm																																																		
Start 30 MHz		Stop 26.5 GHz																																																
#Res BW 100 kHz		#VBW 300 kHz																																																
Marker 1 Trace (1) Type Freq		X Axis 2.48 GHz																																																
		Amplitude 2.108 dBm																																																
		Sweep 2.742 s (401 pts)																																																

Conducted Band Edge

Mode 2

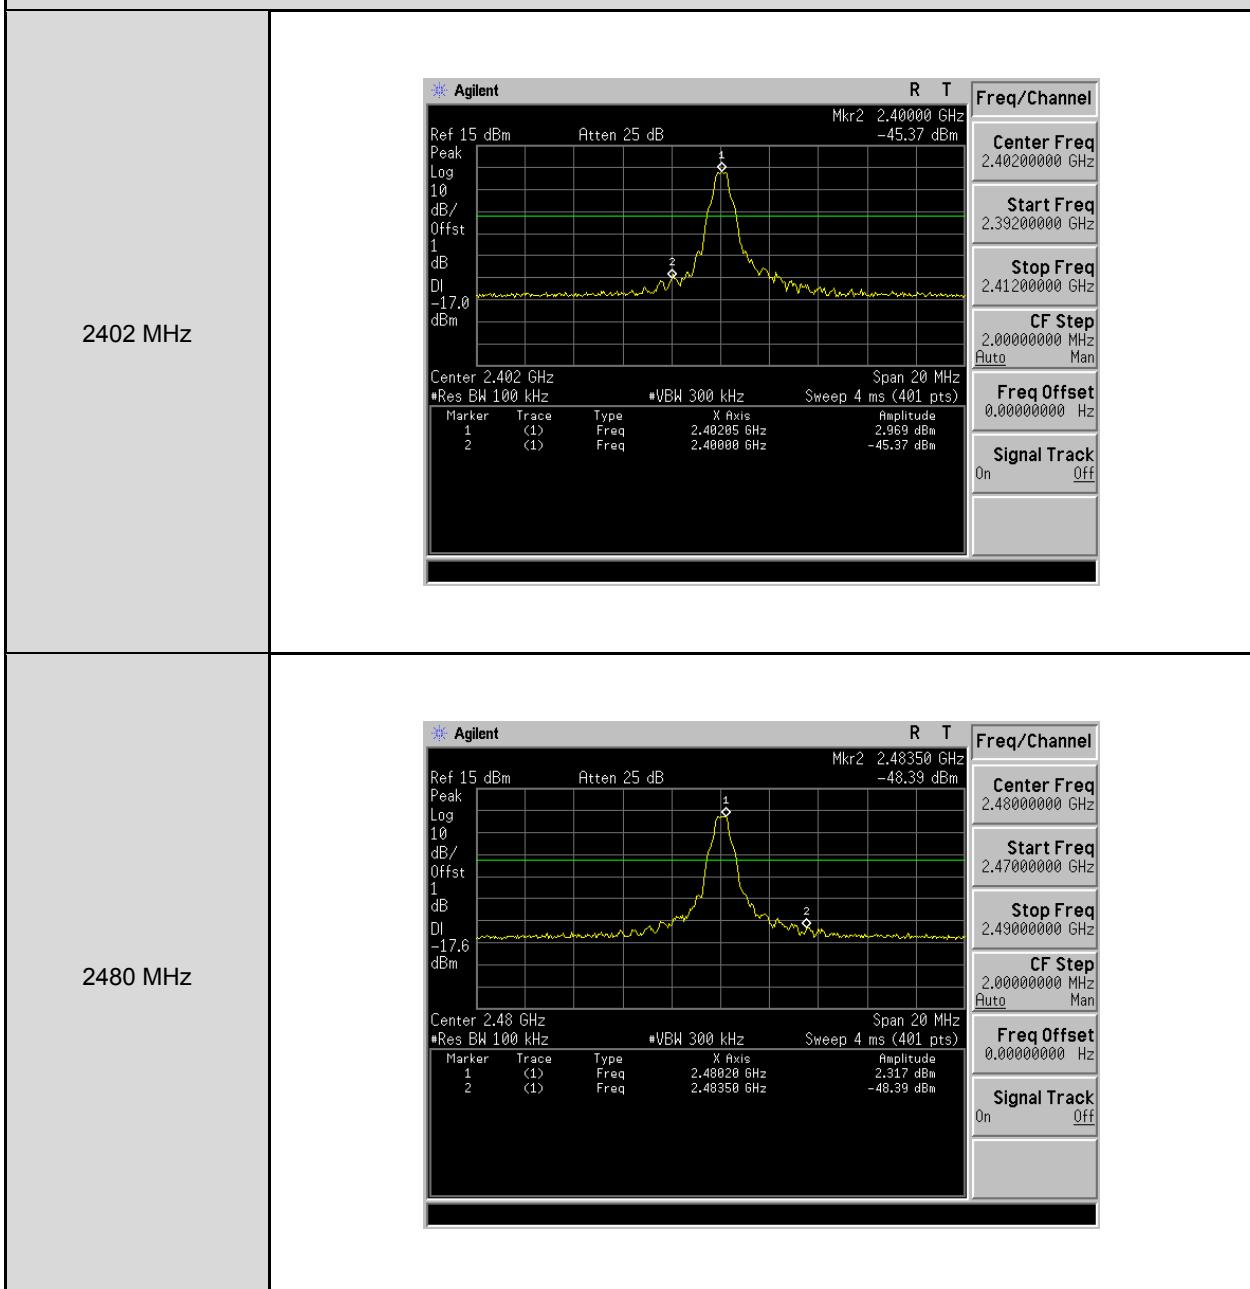

Annex C. Radiated Emission Measurement

Harmonic

Below 1 GHz

Standard:	FCC Part 15.247			Test Distance:	3 m		
Test Mode:	Mode 1			Power:	DC 5 V		
				Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
207.5100	46.16	-7.66	38.50	43.50	-5.00	QP	H
264.7400	41.93	-5.13	36.80	46.00	-9.20	QP	H
336.5200	40.48	-3.21	37.27	46.00	-8.73	QP	H
522.7600	40.22	0.59	40.81	46.00	-5.19	QP	H
828.3100	32.33	6.72	39.05	46.00	-6.95	QP	H
932.1000	29.29	8.37	37.66	46.00	-8.34	QP	H
131.8500	40.79	-7.09	33.70	43.50	-9.80	QP	V
336.5200	37.47	-3.21	34.26	46.00	-11.74	QP	V
415.0900	34.87	-1.32	33.55	46.00	-12.45	QP	V
493.6600	37.47	0.11	37.58	46.00	-8.42	QP	V
532.4600	40.74	0.77	41.51	46.00	-4.49	QP	V
836.0700	34.10	6.82	40.92	46.00	-5.08	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: $38.50 = -7.66 + 46.16$.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

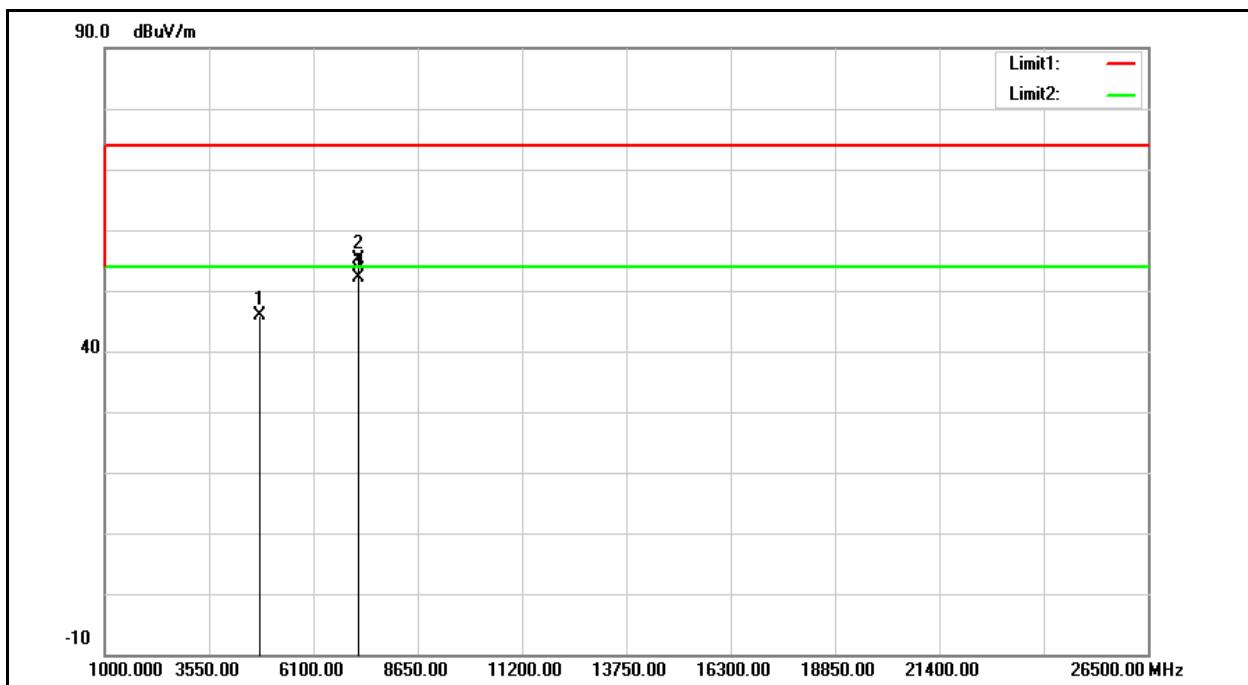

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	40.79	5.16	45.95	74.00	-28.05	peak
2	7206.000	43.55	11.65	55.20	74.00	-18.80	peak
3	7206.000	40.51	11.65	52.16	54.00	-1.84	peak


Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

Example: $45.95 = 5.16 + 40.79$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

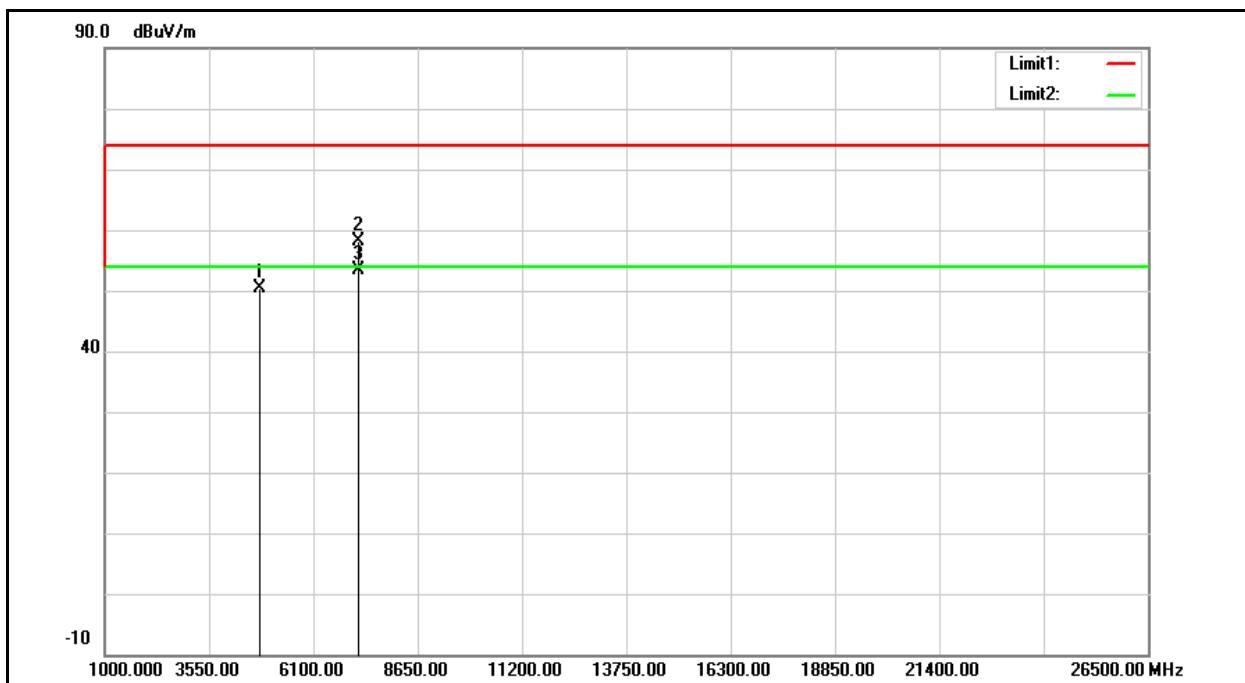


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	45.23	5.16	50.39	74.00	-23.61	peak
2	7206.000	46.39	11.65	58.04	74.00	-15.96	peak
3	7206.000	41.70	11.65	53.35	54.00	-0.65	peak

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

Example: $50.39 = 5.16 + 45.23$.

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2440MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

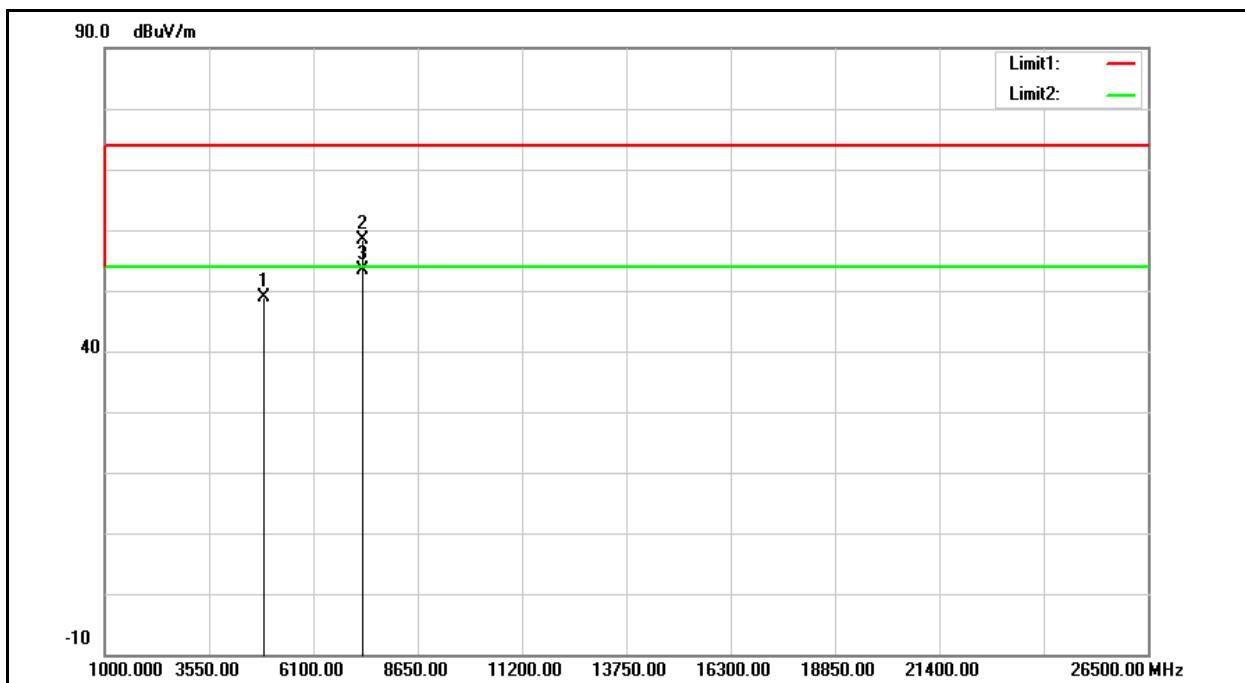


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	43.43	5.48	48.91	74.00	-25.09	peak
2	7320.000	46.30	12.16	58.46	74.00	-15.54	peak
3	7320.000	41.10	12.16	53.26	54.00	-0.74	peak

Note:

1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2440MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

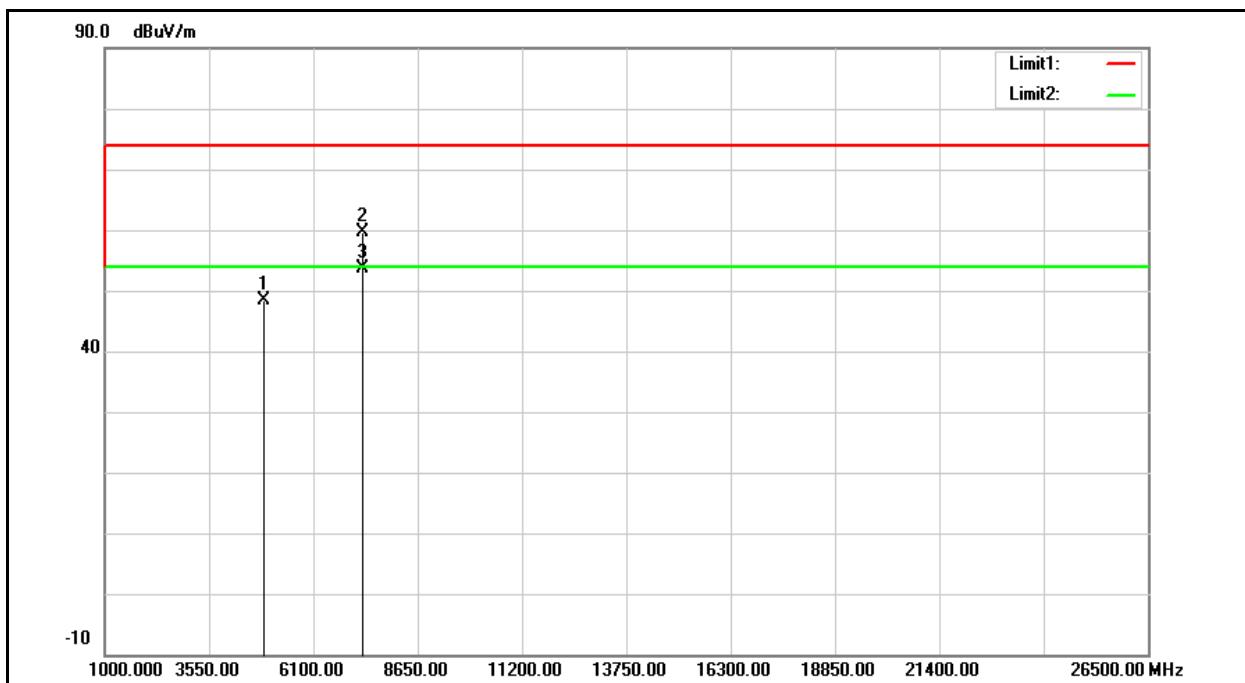


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	42.85	5.48	48.33	74.00	-25.67	peak
2	7320.000	47.48	12.16	59.64	74.00	-14.36	peak
3	7320.000	41.36	12.16	53.52	54.00	-0.48	peak

Note:

1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2480MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

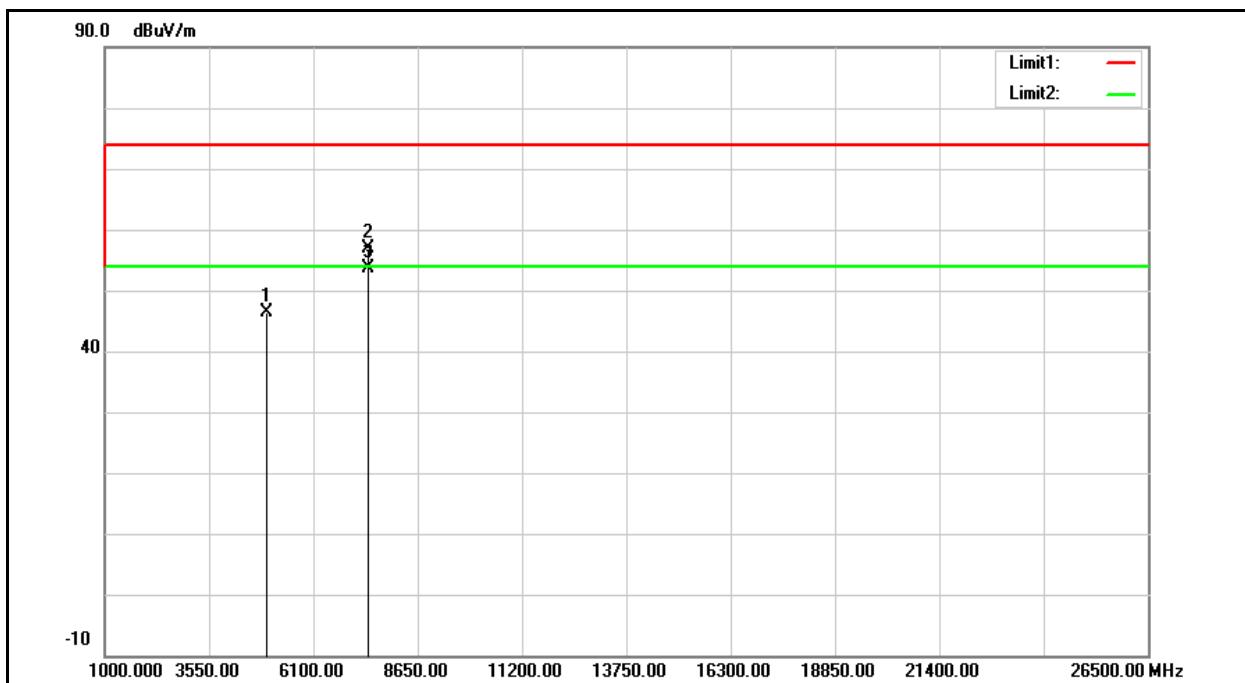


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	40.63	5.64	46.27	74.00	-27.73	peak
2	7440.000	44.42	12.53	56.95	74.00	-17.05	peak
3	7440.000	41.16	12.53	53.69	54.00	-0.31	peak

Note:

1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2480MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

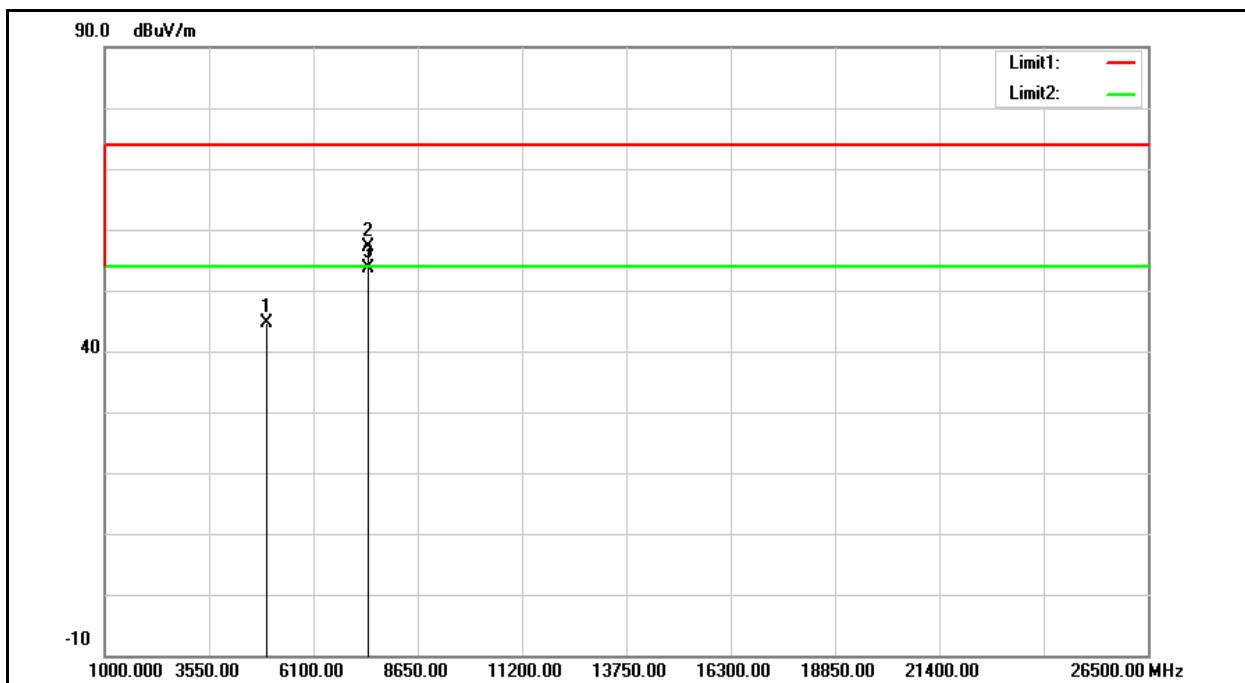


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	39.11	5.64	44.75	74.00	-29.25	peak
2	7440.000	44.52	12.53	57.05	74.00	-16.95	peak
3	7440.000	41.08	12.53	53.61	54.00	-0.39	peak

Note:

1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

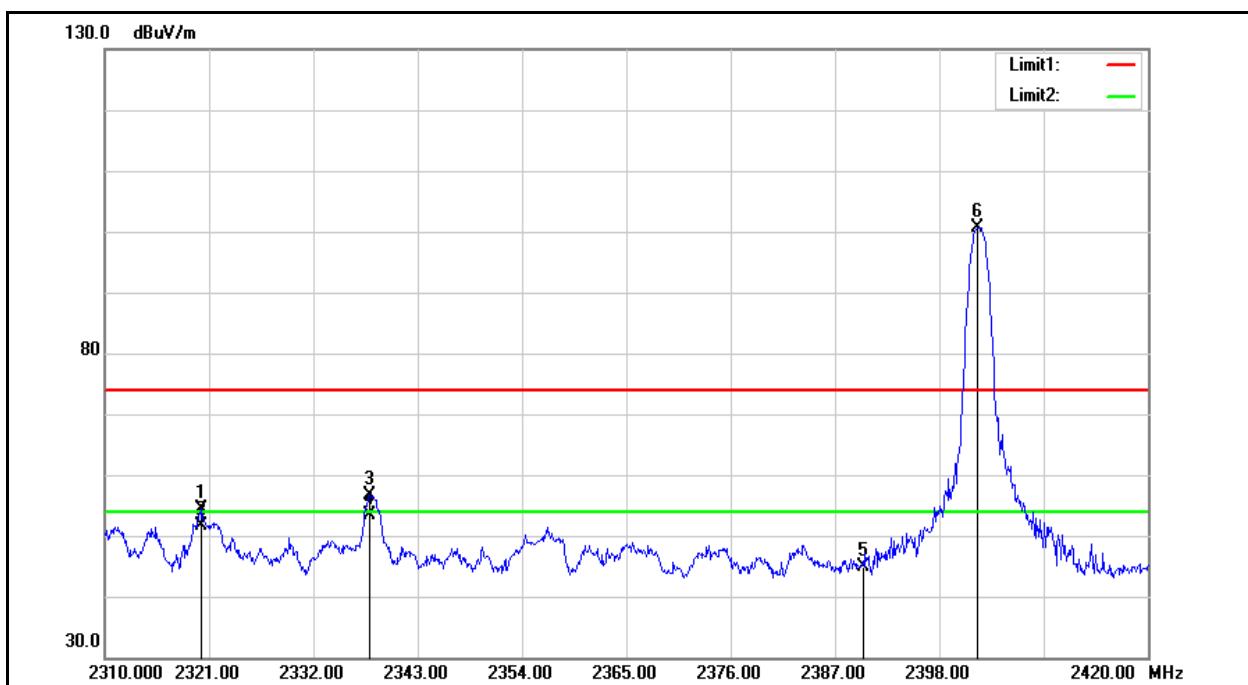


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2320.120	56.25	-1.91	54.34	74.00	-19.66	peak
2	2320.120	53.57	-1.91	51.66	54.00	-2.34	AVG
3	2337.940	58.58	-1.84	56.74	74.00	-17.26	peak
4	2337.940	55.28	-1.84	53.44	54.00	-0.56	AVG
5	2390.000	46.58	-1.66	44.92	74.00	-29.08	peak
6	2402.000	102.15	-1.61	100.54	--	--	peak

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

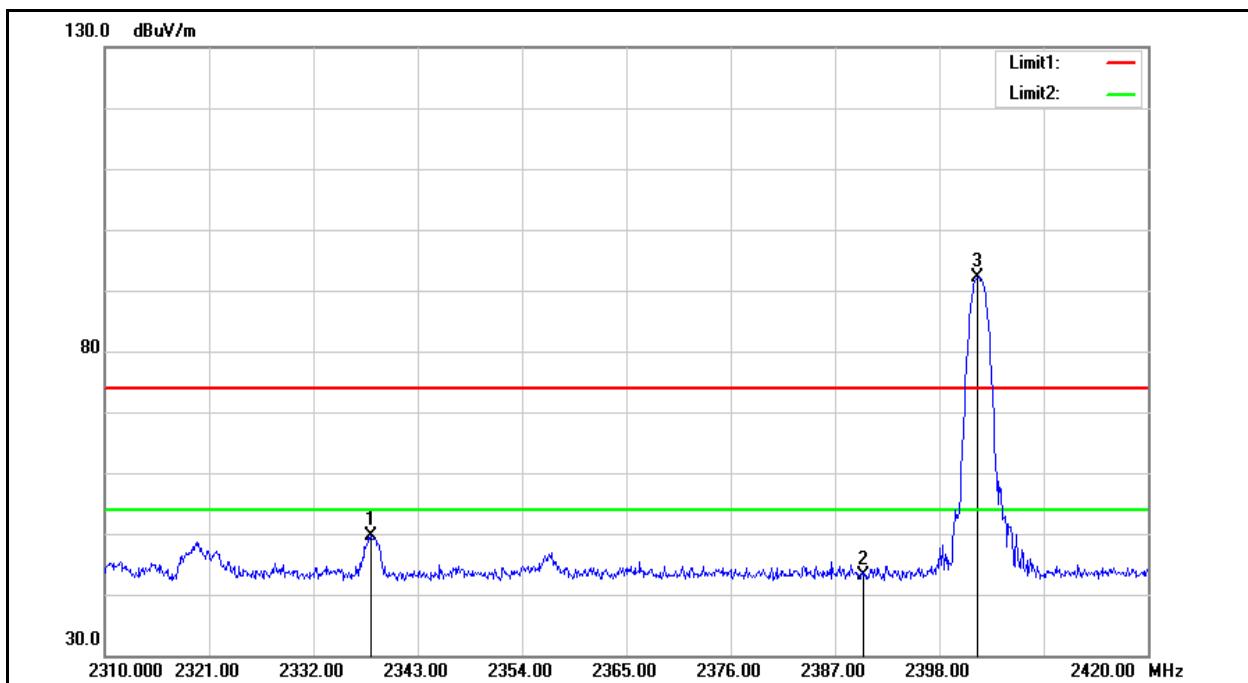


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2338.050	51.40	-1.84	49.56	74.00	-24.44	peak
2	2390.000	44.76	-1.66	43.10	74.00	-30.90	peak
3	2402.000	93.70	-1.61	92.09	--	--	peak

Note:

1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

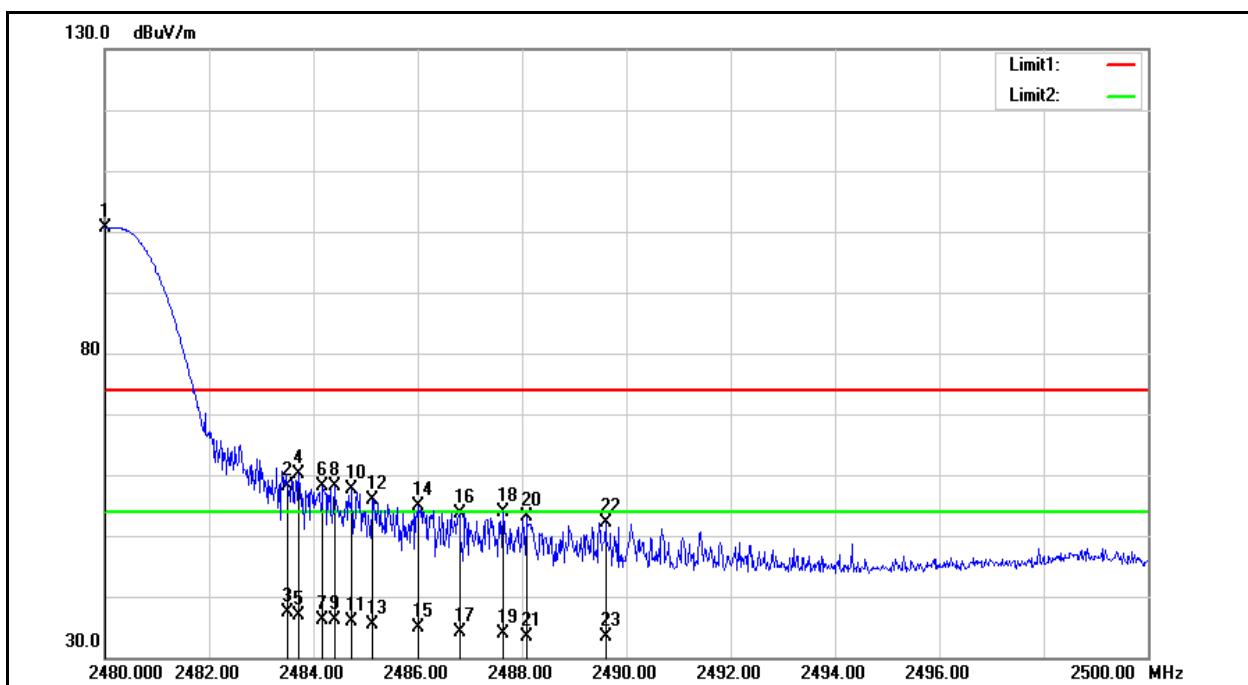

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	101.54	-0.83	100.71	--	--	peak
2	2483.500	58.93	-0.82	58.11	74.00	-15.89	peak
3	2483.500	38.13	-0.82	37.31	54.00	-16.69	AVG
4	2483.720	60.91	-0.82	60.09	74.00	-13.91	peak
5	2483.720	37.74	-0.82	36.92	54.00	-17.08	AVG
6	2484.180	58.84	-0.82	58.02	74.00	-15.98	peak
7	2484.180	37.04	-0.82	36.22	54.00	-17.78	AVG
8	2484.400	58.83	-0.82	58.01	74.00	-15.99	peak
9	2484.400	36.89	-0.82	36.07	54.00	-17.93	AVG
10	2484.740	58.35	-0.82	57.53	74.00	-16.47	peak
11	2484.740	36.60	-0.82	35.78	54.00	-18.22	AVG
12	2485.120	56.60	-0.82	55.78	74.00	-18.22	peak
13	2485.120	36.12	-0.82	35.30	54.00	-18.70	AVG
14	2486.000	55.77	-0.82	54.95	74.00	-19.05	peak
15	2486.000	35.64	-0.82	34.82	54.00	-19.18	AVG
16	2486.800	54.50	-0.81	53.69	74.00	-20.31	peak
17	2486.800	34.84	-0.81	34.03	54.00	-19.97	AVG
18	2487.640	54.59	-0.80	53.79	74.00	-20.21	peak
19	2487.640	34.58	-0.80	33.78	54.00	-20.22	AVG
20	2488.080	53.84	-0.80	53.04	74.00	-20.96	peak
21	2488.080	34.25	-0.80	33.45	54.00	-20.55	AVG
22	2489.600	52.92	-0.80	52.12	74.00	-21.88	peak
23	2489.600	34.16	-0.80	33.36	54.00	-20.64	AVG

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 5 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

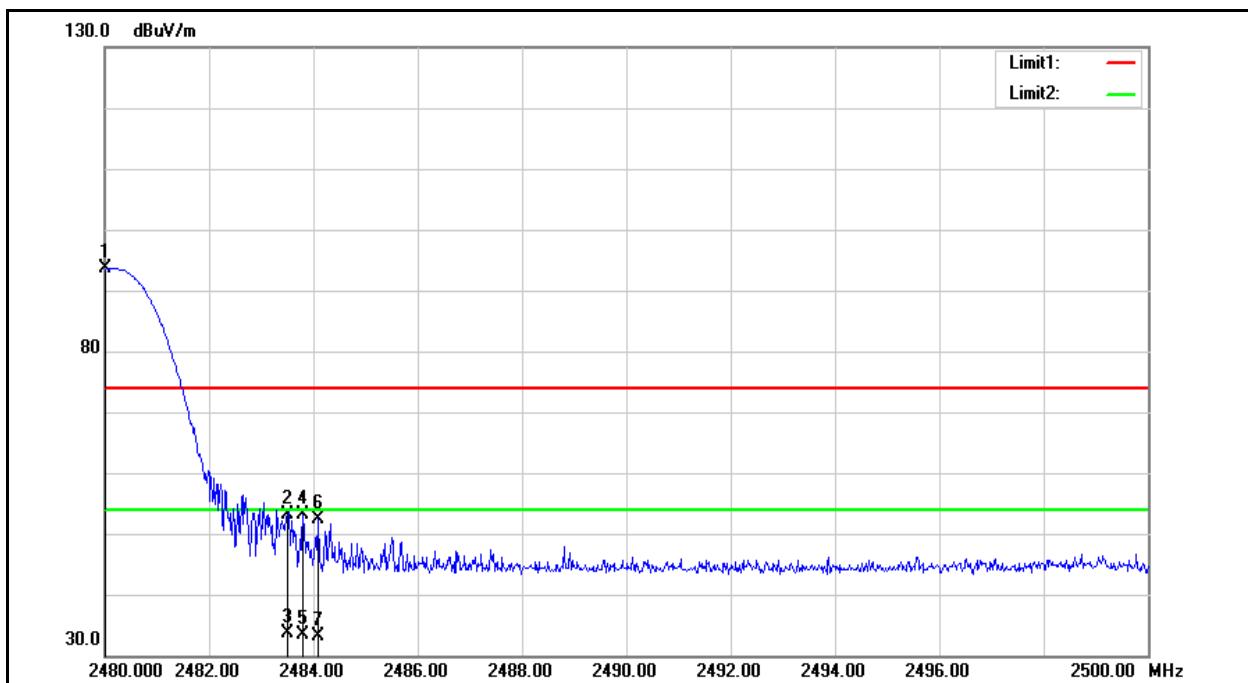

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	94.38	-0.83	93.55	--	--	peak
2	2483.500	53.93	-0.82	53.11	74.00	-20.89	peak
3	2483.500	34.49	-0.82	33.67	54.00	-20.33	AVG
4	2483.800	53.94	-0.82	53.12	74.00	-20.88	peak
5	2483.800	34.21	-0.82	33.39	54.00	-20.61	AVG
6	2484.100	53.21	-0.82	52.39	74.00	-21.61	peak
7	2484.100	34.03	-0.82	33.21	54.00	-20.79	AVG

Note:

1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When peak results are less than average limit, so not need to evaluate the average.