

**FCC PART 15.247
TEST REPORT**

For

HONG KONG IPRO TECHNOLOGY CO., LIMITED

ROOM C1D, 6/F, WING HING INDUSTRIAL BUILDING, 14 HING YIP STREET, KWUN
TONG, KOWLOON, HONG KONG, China

FCC ID: PQ4IPROMAGIC

Report Type: Original Report	Product Type: GSM Mobile Phone
Test Engineer: Jimmy Xiao <i>Jimmy Xiao</i>	
Report Number: RSZ121112003-00B	
Report Date: 2012-11-26	
Reviewed By: EMC Engineer <i>Sun Sun</i>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	8
APPLICABLE STANDARD	8
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST RESULTS SUMMARY	16
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28

TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	53
FCC §15.247(d) - BAND EDGES TESTING	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *HONG KONG IPRO TECHNOLOGY CO., LIMITED*'s product, model number: *Magic (FCC ID: PQ4IPROMAGIC)* or the "EUT" in this report was a *GSM Mobile Phone*, which was measured approximately: 11.3 cm (L) x 5.1 cm (W) x 1.5 cm (H), rated input voltage: DC 3.7 V Li-ion battery or DC 5V charging from adapter.

Adapter Information:

Model: M49-050050

Input: AC 100-240V, 50/60Hz, 0.1A

Output: DC 5V, 0.5A

** All measurement and test data in this report was gathered from production sample serial number: IPROMAGIC000001 (Assigned by the applicant). The EUT supplied by the applicant was received on 2012-11-12.*

Objective

This test report is prepared on behalf of *HONG KONG IPRO TECHNOLOGY CO., LIMITED* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H&24E PCE and Part 15B JBP submissions with FCC ID: PQ4IPROMAGIC.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode which was controlled by bluetooth tester.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
TESCOM	Bluetooth Tester	TC-3000B	3000B650083

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

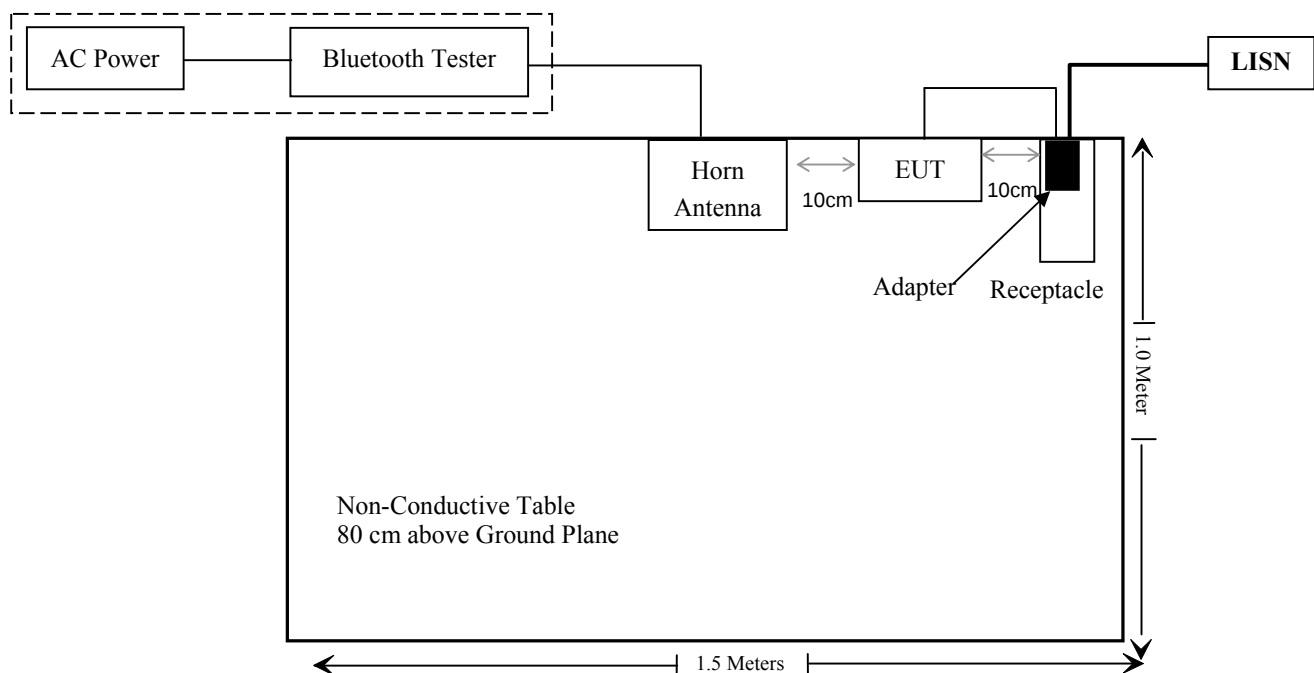

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: <u>Unlicensed only</u> - when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas Licensed & Unlicensed - when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas - when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: <u>Licensed & Unlicensed</u> antenna pairs with SAR to peak location separation ratio ≥ 0.3 ; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	When there is no simultaneous transmission – - output ≤ 60 f: SAR not required - output > 60 f: stand-alone SAR required When there is simultaneous transmission – <u>Stand-alone SAR not required when</u> - output $\leq 2 \cdot P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas - output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas - output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> When stand-alone SAR is required - test SAR on highest output channel for each wireless mode and exposure condition - if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures	
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> - when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues - position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

- 1) GSM can transmit simultaneously with Bluetooth.
- 2) The distance between BT and GSM antenna is $4.6\text{cm} > 2.5\text{cm}$. The max output power at the Bluetooth antenna port is $(4.31\text{dBm})\ 2.698\text{mW} < P_{\text{Ref}}(12\text{mW})$. According to KDB648474, stand-alone SAR is not required for BT antenna and simultaneous SAR evaluation is not required for Bluetooth and GSM antennas.
- 3) P_{Ref} is defined as the maximum conducted power available at the antenna according to source-based time-averaging requirements of Section 2.1093(d)(5).

Result: The SAR measurement is exempt.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PIFA antenna arrangement for bluetooth, which was permanently attached and the gain was -2.0 dBi, fulfill the requirement of this section. Please refer to the internal photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207

EUT Setup

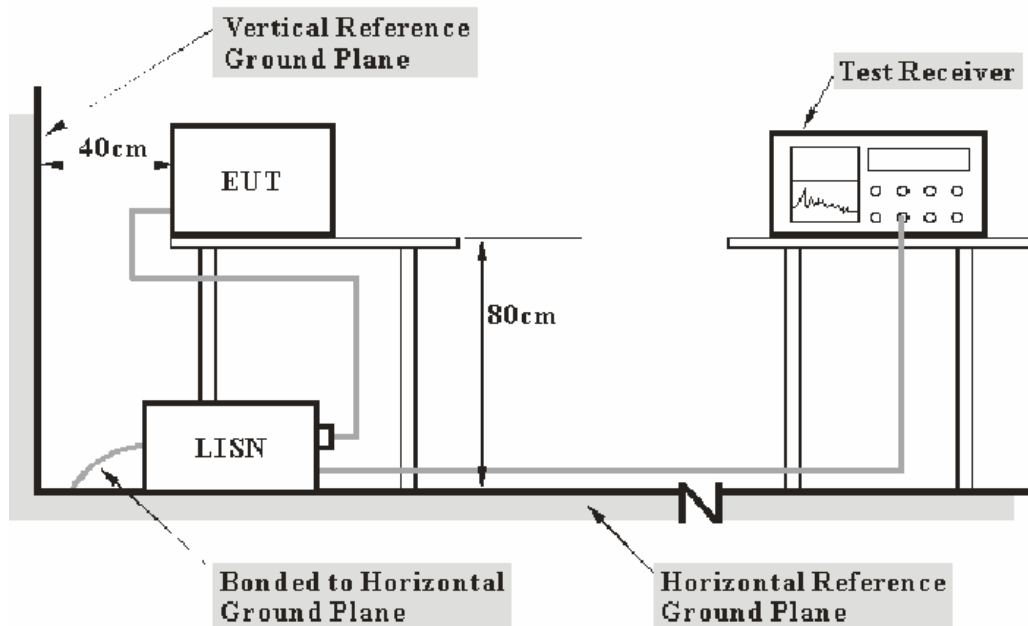

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The spacing between the relevant peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2012-11-24	2013-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Pulse Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

17.64 dB at 1.710 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Jimmy Xiao on 2012-11-23.

EUT operation mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

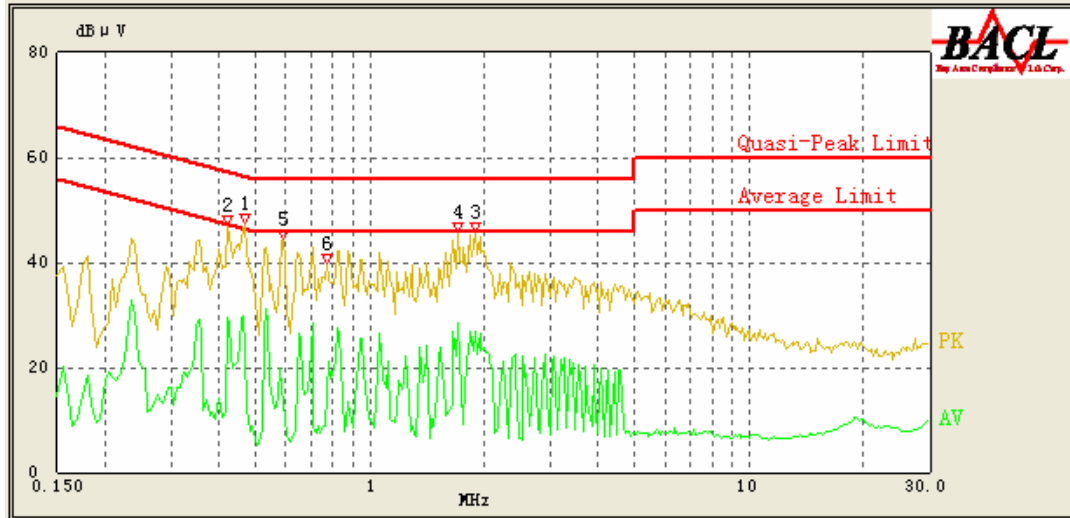

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
1.710	28.36	10.19	46.00	17.64	Ave.
1.890	37.78	10.20	56.00	18.22	QP
0.420	29.34	10.26	48.29	18.95	Ave.
1.890	26.96	10.20	46.00	19.04	Ave.
1.710	36.95	10.19	56.00	19.05	QP
0.470	35.21	10.26	56.86	21.65	QP
0.470	23.48	10.26	46.86	23.38	Ave.
0.590	32.13	10.24	56.00	23.87	QP
0.420	32.73	10.26	58.29	25.56	QP
0.775	28.17	10.21	56.00	27.83	QP
0.775	15.05	10.21	46.00	30.95	Ave.
0.590	13.17	10.24	46.00	32.83	Ave.

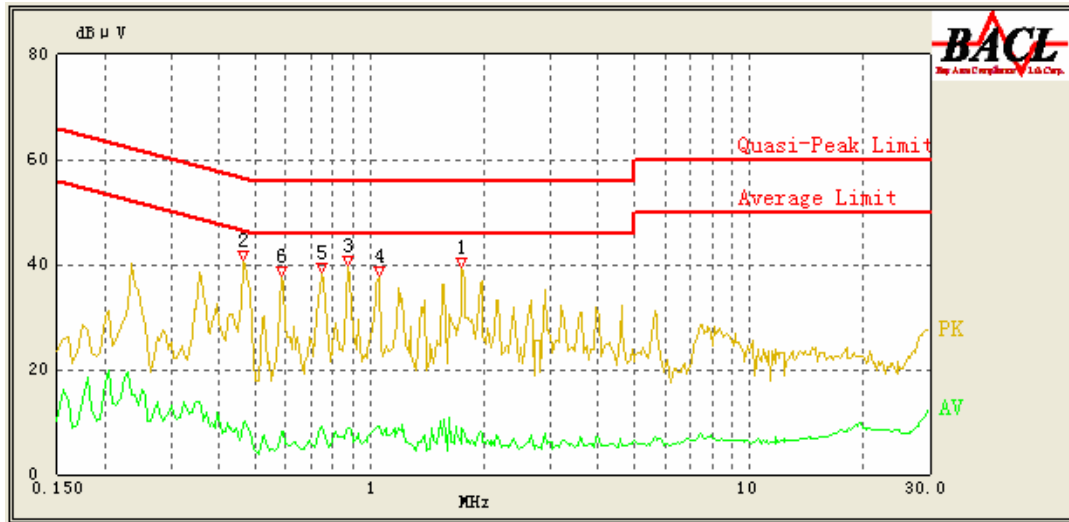AC 120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.465	31.31	10.25	57.00	25.69	QP
0.585	28.92	10.23	56.00	27.08	QP
0.875	27.34	10.19	56.00	28.66	QP
1.055	27.34	10.17	56.00	28.66	QP
0.745	27.34	10.21	56.00	28.66	QP
1.750	26.52	10.19	56.00	29.48	QP
0.750	9.10	10.21	46.00	36.90	Ave.
1.055	9.05	10.17	46.00	36.95	Ave.
0.875	8.87	10.19	46.00	37.13	Ave.
1.750	8.82	10.19	46.00	37.18	Ave.
0.465	9.73	10.25	47.00	37.27	Ave.
0.585	8.32	10.23	46.00	37.68	Ave.

Note:


- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF + Cable Loss + Pulse Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)

EUT Setup

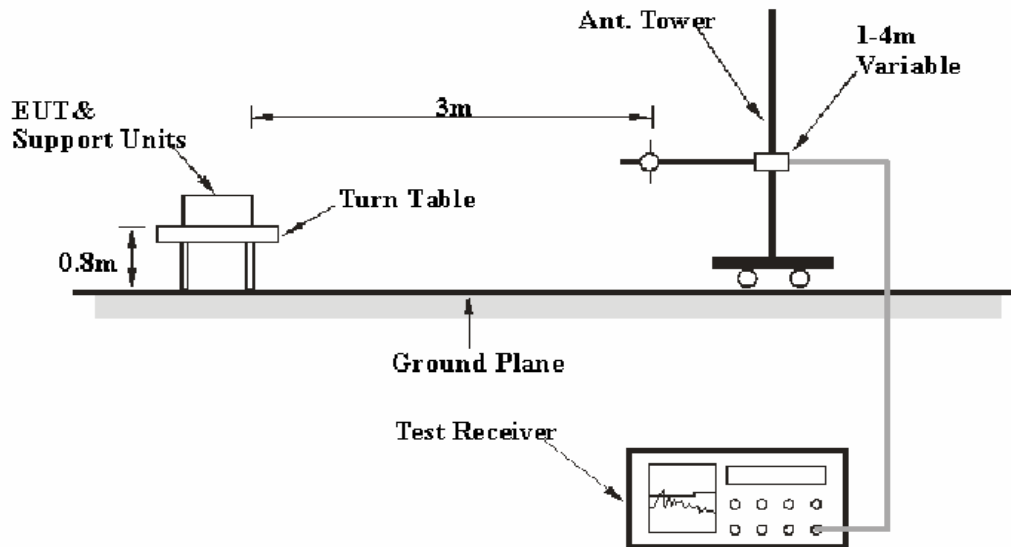

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the relevant peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For radiated emissions, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequencies range from 30 MHz to 1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01057	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-05-17	2013-05-16
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2012-10-14	2013-10-13
R&S	Auto test Software	EMC32	V6.30	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

8.51 dB at 4960.0 MHz in the Horizontal polarization

Test Data**Environmental Conditions**

Temperature:	24°C
Relative Humidity:	55 %
ATM Pressure:	100 kPa

The testing was performed by Jimmy Xiao on 2012-11-21.

EUT operation mode: Transmitting

30 MHz ~25 GHz:


(Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.0	85.82	PK	68	1.1	H	6.13	91.95	/	/
2402.0	46.7	Ave.	68	1.1	H	6.13	52.83	/	/
2402.0	85.56	PK	77	1.2	V	6.13	91.69	/	/
2402.0	45.65	Ave.	77	1.2	V	6.13	51.78	/	/
7206.0	24.32	Ave.	58	1.0	H	17.06	41.38	54	12.62
7206.0	43.02	PK	58	1.0	H	17.06	60.08	74	13.92
4804.0	26.63	Ave.	13	1.3	V	12.40	39.03	54	14.97
4804.0	45.56	PK	13	1.3	V	12.40	57.96	74	16.04
9608.0	18.02	Ave.	96	1.1	V	19.28	37.30	54	16.70
2390.0	47.58	PK	44	1.1	H	6.13	53.71	74	20.29
9608.0	30.16	PK	96	1.1	V	19.28	49.44	74	24.56
2387.6	42.53	PK	135	1.0	V	6.13	48.66	74	25.34
2390.0	22.33	Ave.	44	1.1	H	6.13	28.46	54	25.54
2387.6	21.33	Ave.	135	1.0	V	6.13	27.46	54	26.54
2483.5	20.19	Ave.	124	1.2	V	7.21	27.40	54	26.60
2483.5	35.47	PK	124	1.2	V	7.21	42.68	74	31.32

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
Middle Channel (2441 MHz)									
2441.0	86.33	PK	75	1.1	H	7.21	93.54	/	/
2441.0	45.05	Ave.	75	1.1	H	7.21	52.26	/	/
2441.0	84.67	PK	113	1.2	V	7.21	91.88	/	/
2441.0	44.94	Ave.	113	1.2	V	7.21	52.15	/	/
4882.0	49.93	PK	11	1.3	H	12.46	62.39	74	11.61
7323.0	24.82	Ave.	35	1.0	H	16.49	41.31	54	12.69
4882.0	28.77	Ave.	11	1.3	H	12.46	41.23	54	12.77
7323.0	43.43	PK	35	1.0	H	16.49	59.92	74	14.08
9764.0	16.96	Ave.	96	1.1	V	19.40	36.36	54	17.64
9764.0	31.85	PK	96	1.1	V	19.40	51.25	74	22.75
2488.1	21.49	Ave.	31	1.1	V	7.21	28.70	54	25.30
2383.4	22.17	Ave.	27	1.2	H	6.13	28.30	54	25.70
2493.6	20.83	Ave.	58	1.2	V	7.21	28.04	54	25.96
2383.4	36.45	PK	27	1.2	H	6.13	42.58	74	31.42
2488.1	34.88	PK	31	1.1	V	7.21	42.09	74	31.91
2493.6	33.71	PK	58	1.2	V	7.21	40.92	74	33.08
High Channel (2480 MHz)									
2480.0	85.76	PK	35	1.3	H	7.21	92.97	/	/
2480.0	45.33	Ave.	35	1.3	H	7.21	52.54	/	/
2480.0	83.94	PK	112	1.4	V	7.21	91.15	/	/
2480.0	44.86	Ave.	112	1.4	V	7.21	52.07	/	/
4960.0	52.99	PK	224	1.2	H	12.50	65.49	74	8.51
4960.0	30.05	Ave.	224	1.2	H	12.50	42.55	54	11.45
7440.0	23.72	Ave.	168	1.1	H	15.90	39.62	54	14.38
7440.0	41.48	PK	168	1.1	H	15.90	57.38	74	16.62
9920.0	17.67	Ave.	96	1.2	V	19.38	37.05	54	16.95
2483.6	45.04	PK	36	1.3	V	7.21	52.25	74	21.75
9920.0	31.05	PK	96	1.2	V	19.38	50.43	74	23.57
2483.6	22.38	Ave.	36	1.3	V	7.21	29.59	54	24.41
2492.5	22.37	Ave.	58	1.2	V	7.21	29.58	54	24.42
2342.8	20.98	Ave.	77	1.2	V	5.48	26.46	54	27.54
2492.5	35.18	PK	58	1.2	V	7.21	42.39	74	31.61
2342.8	34.58	PK	77	1.2	V	5.48	40.06	74	33.94

Note: Below 1GHz, the data which below 20 dB to the limit was not recorded.

High Channel

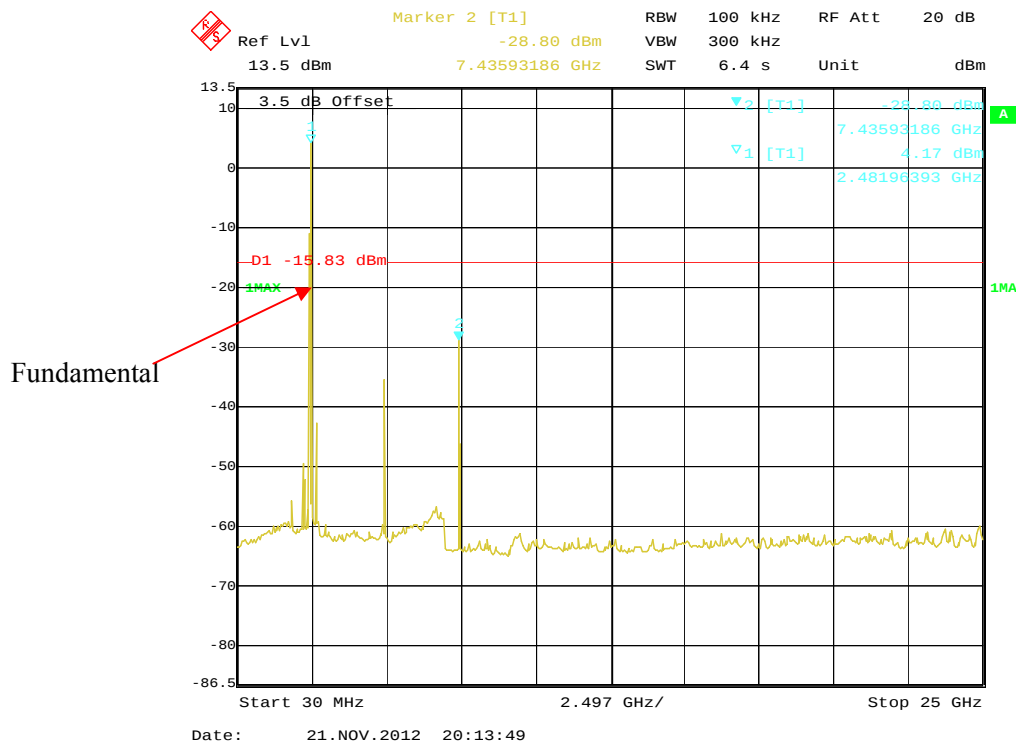

Note: Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK).

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, RBW of spectrum was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Test Data**Environmental Conditions**

Temperature:	24°C
Relative Humidity:	55 %
ATM Pressure:	100 kPa

The testing was performed by Jimmy Xiao on 2012-11-21.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.002	0.620	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.620	Pass
	Adjacent	2442			
	High	2480	1.002	0.620	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.002	0.855	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.845	Pass
	Adjacent	2442			
	High	2480	1.002	0.837	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.002	0.828	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.823	Pass
	Adjacent	2442			
	High	2480	1.002	0.817	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

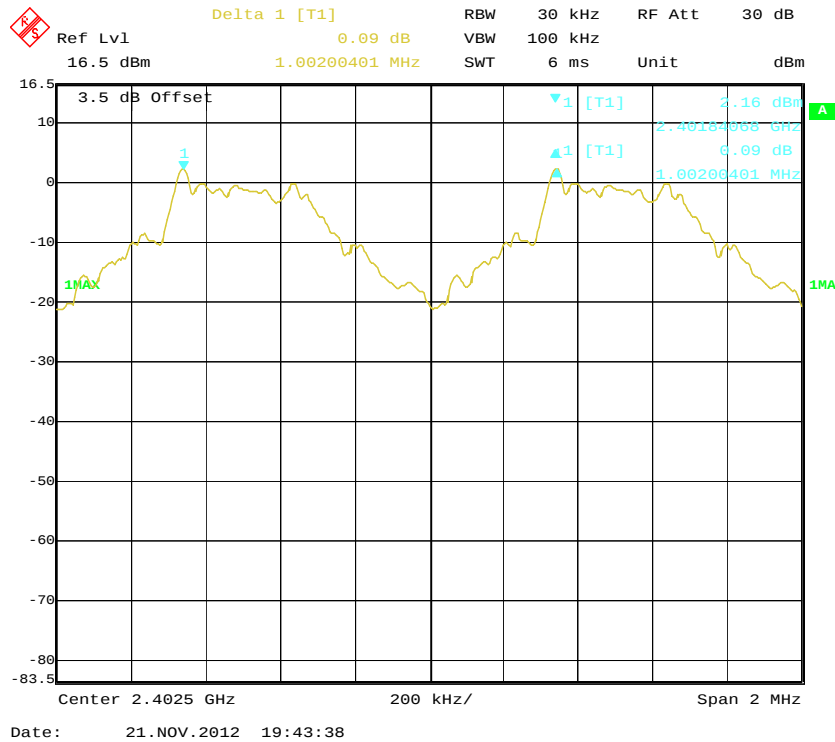


BDR (GFSK): Middle Channel

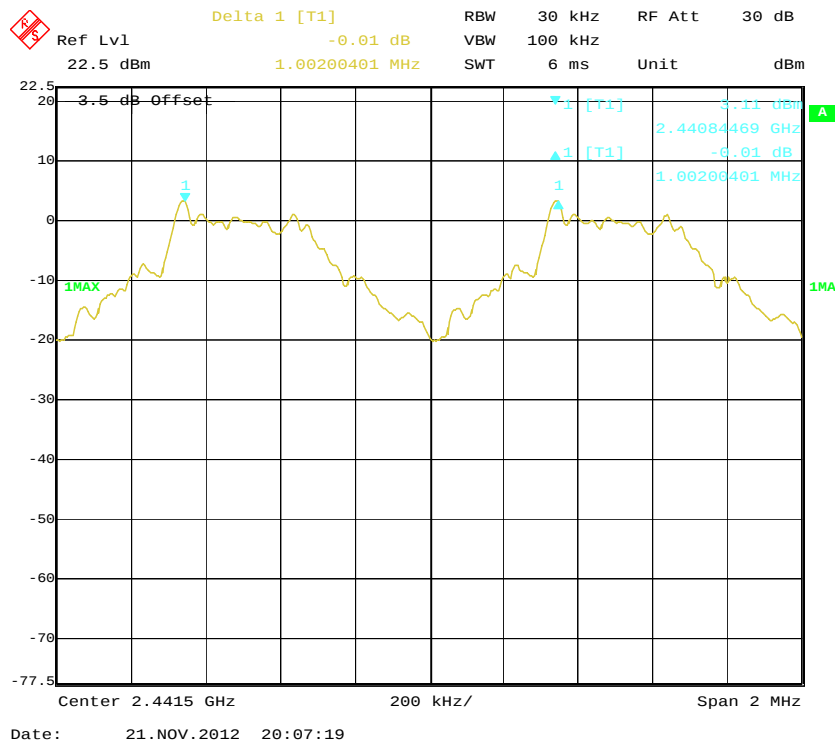


BDR (GFSK): High Channel

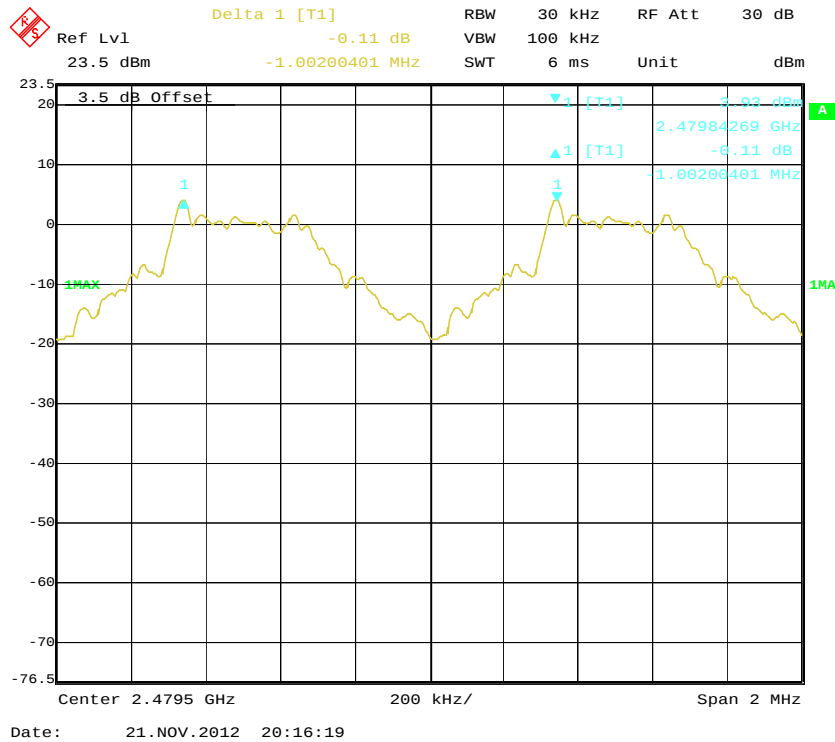


EDR ($\pi/4$ -DQPSK): Low Channel

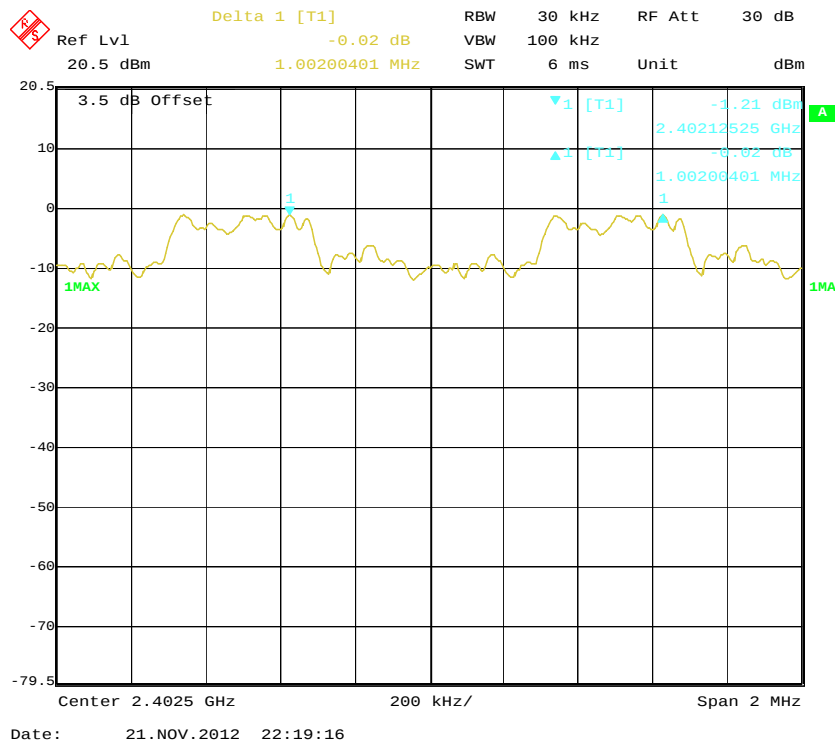


EDR ($\pi/4$ -DQPSK): Middle Channel

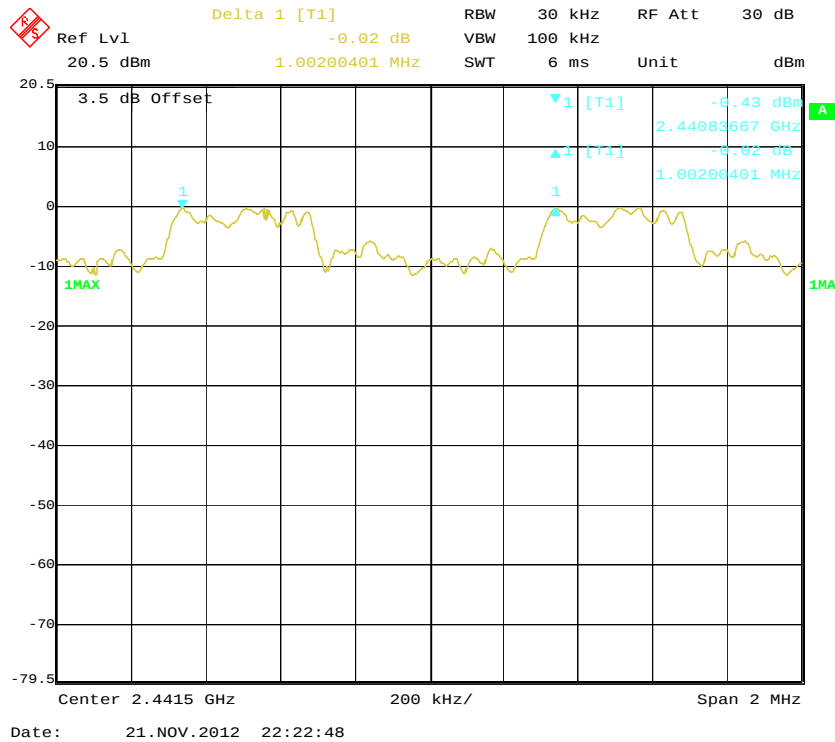


EDR ($\pi/4$ -DQPSK): High Channel

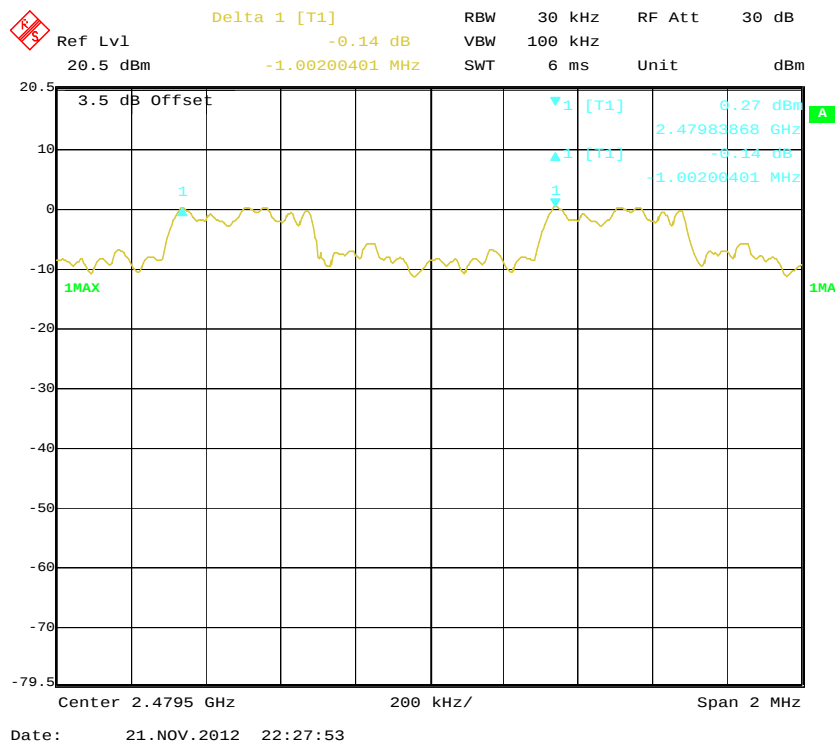


EDR (8DPSK): Low Channel

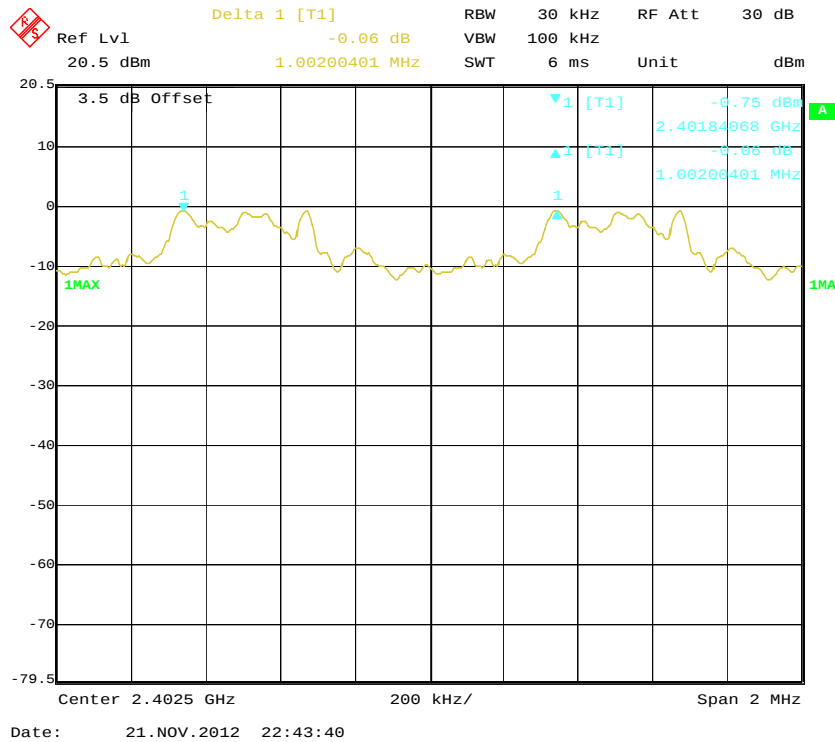

EDR (8DPSK): Middle Channel

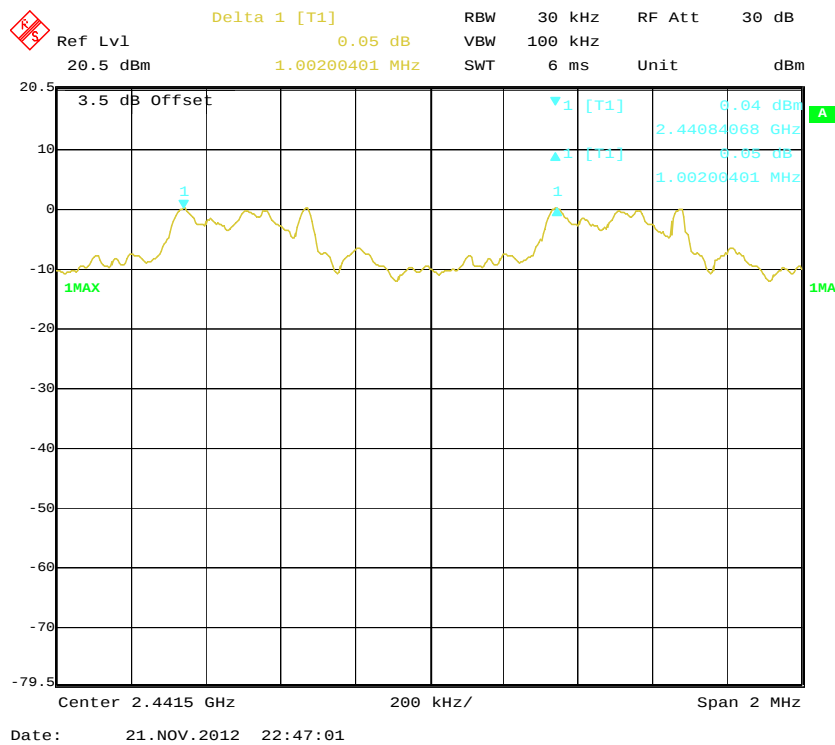

EDR (8DPSK): High Channel

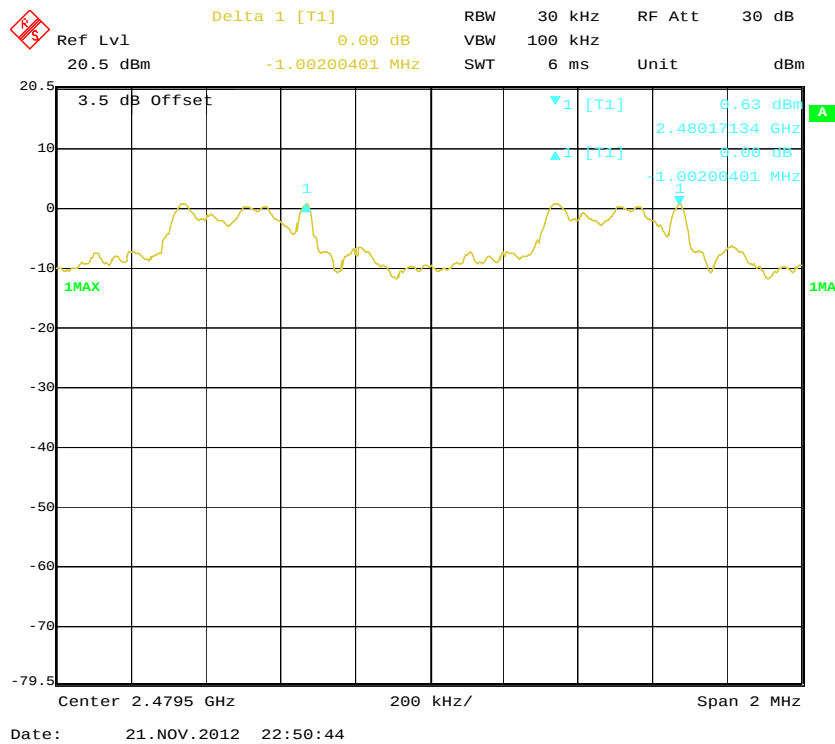

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Test Data**Environmental Conditions**


Temperature:	24°C
Relative Humidity:	55 %
ATM Pressure:	100 kPa

The testing was performed by Jimmy Xiao on 2012-11-21.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.930
	Middle	2441	0.930
	High	2480	0.930
EDR ($\pi/4$-DQPSK)	Low	2402	1.283
	Middle	2441	1.267
	High	2480	1.255
EDR (8DPSK)	Low	2402	1.242
	Middle	2441	1.234
	High	2480	1.226

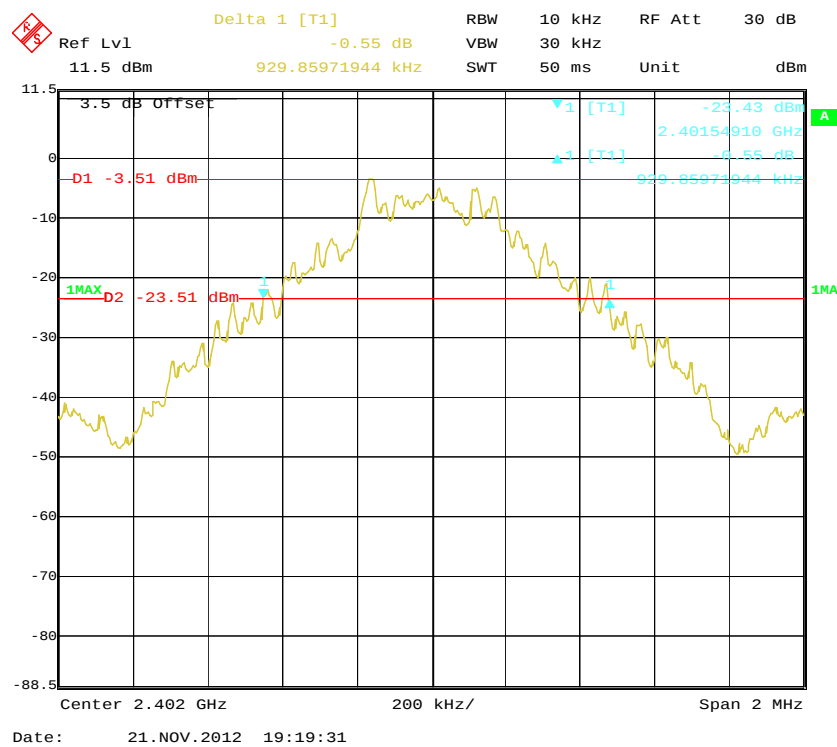BDR (GFSK): Low Channel


BDR (GFSK): Middle Channel

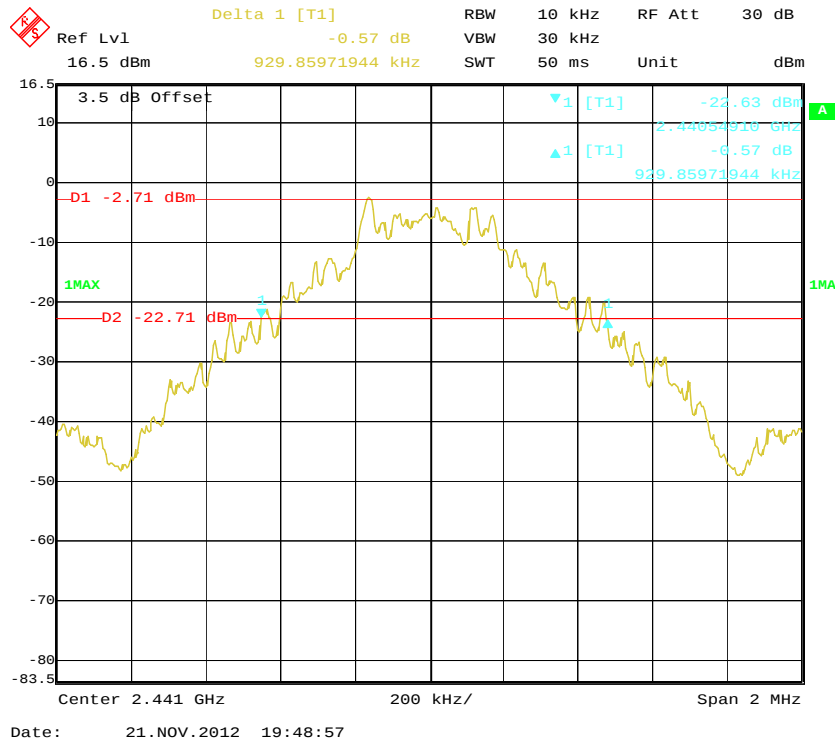


BDR (GFSK): High Channel

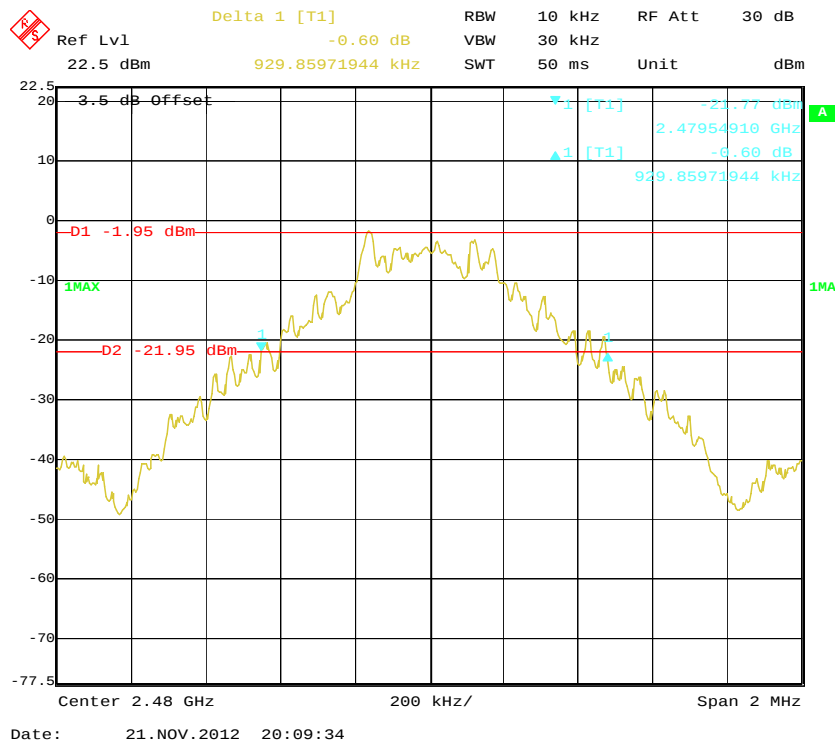

EDR ($\pi/4$ -DQPSK): Low Channel

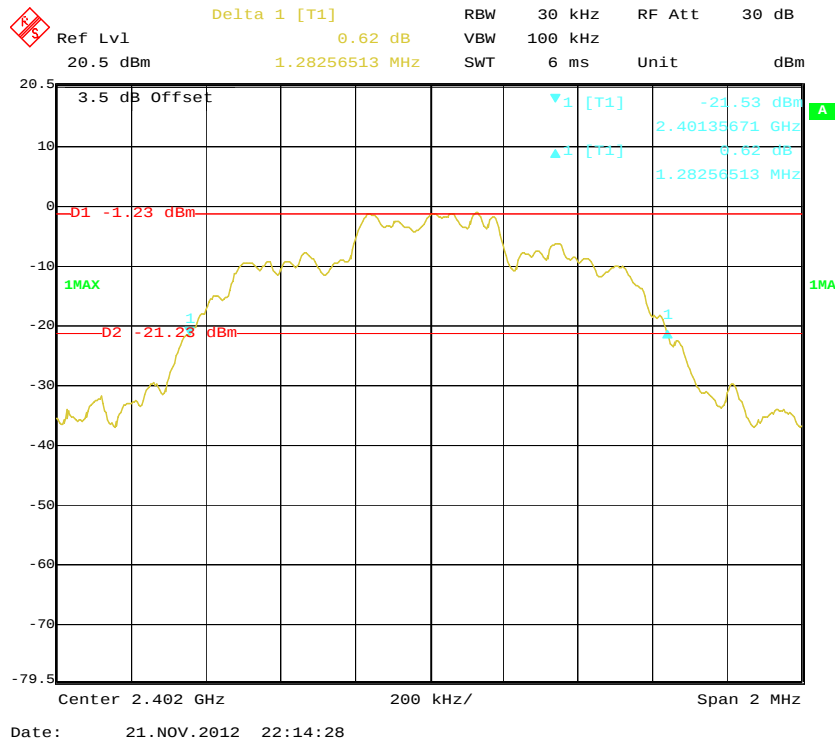

EDR ($\pi/4$ -DQPSK): Middle Channel

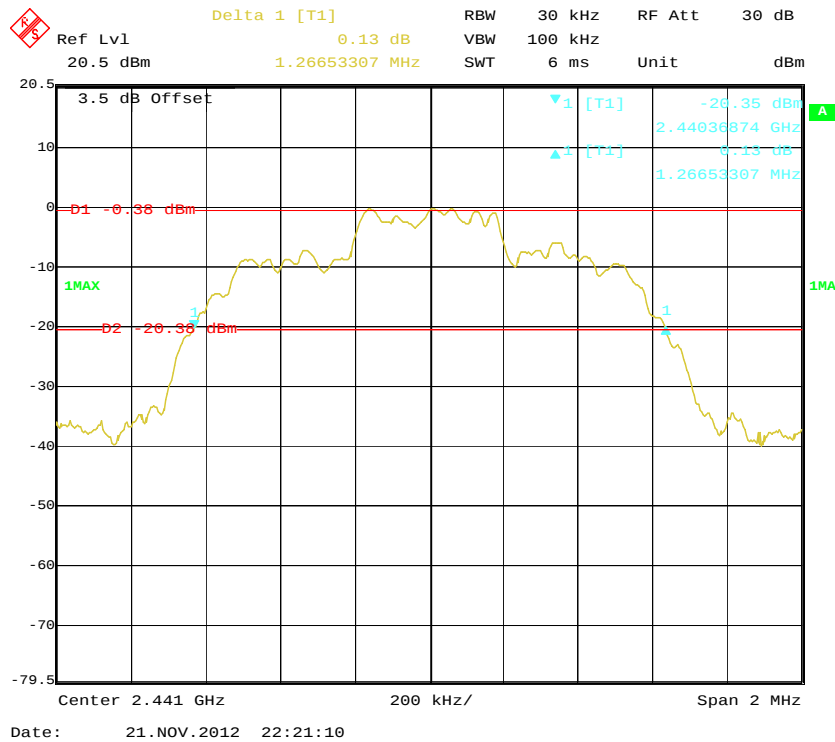

[illegible]

Ref Lvl 20.5 dBm Delta 1 [T1] 0.32 dB RBW 30 kHz RF Att 30 dB

20.5 dBm 1.24248497 MHz SWT 6 ms Unit dBm

3.5 dB Offset

D1 -0.79 dBm

1MAX

D2 -20.79 dBm

1 [T1] -20.82 dBm

2.40138878 GHz


0.32 dB

1.24248497 MHz


Center 2.402 GHz 200 kHz/ Span 2 MHz

Date: 21.NOV.2012 22:40:32

EDR (8DPSK): Middle Channel

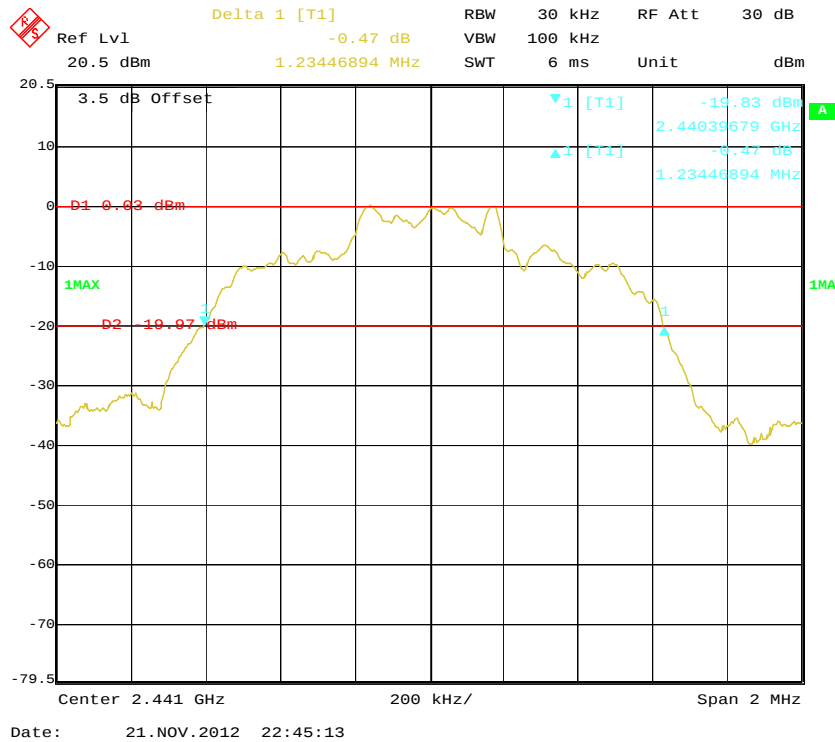

EDR (8DPSK): High Channel

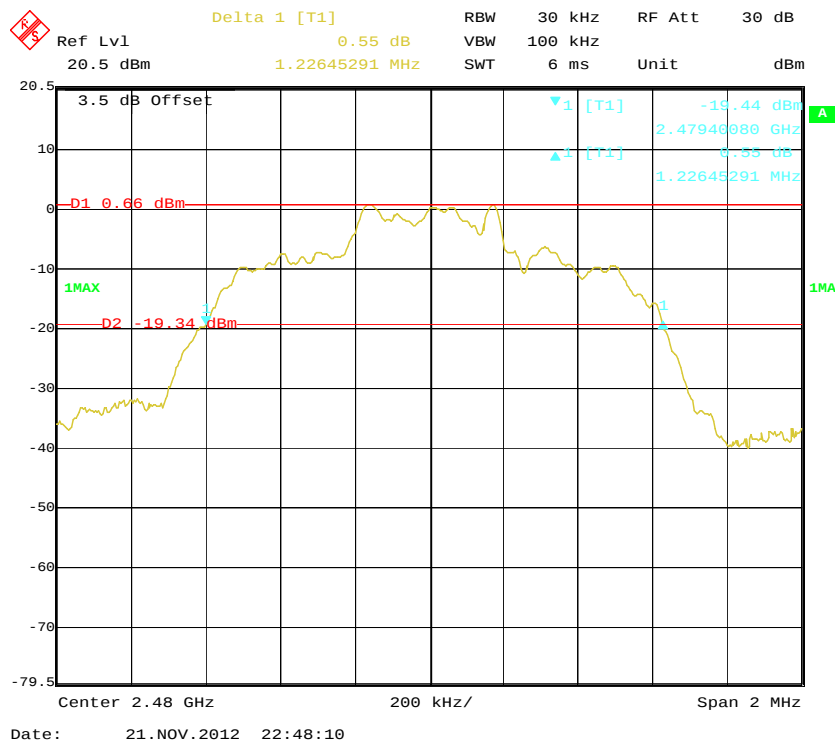

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Test Data**Environmental Conditions**

Temperature:	24°C
Relative Humidity:	55 %
ATM Pressure:	100 kPa


The testing was performed by Jimmy Xiao on 2012-11-21.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2402-2480	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2402-2480	79	≥ 15
EDR (8DPSK)	2402-2480	79	≥ 15


BDR (GFSK): Number of Hopping Channels

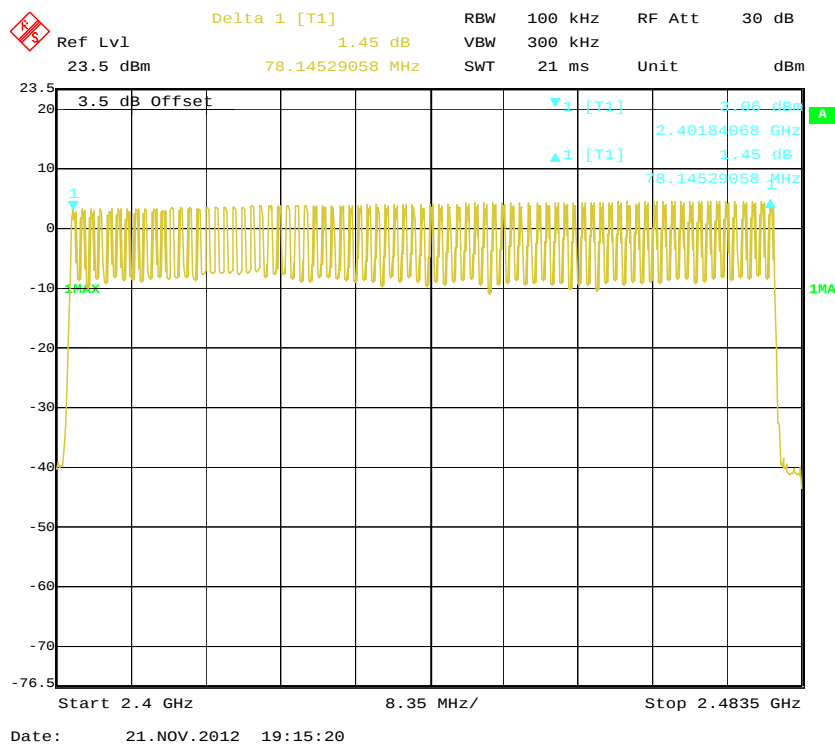

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

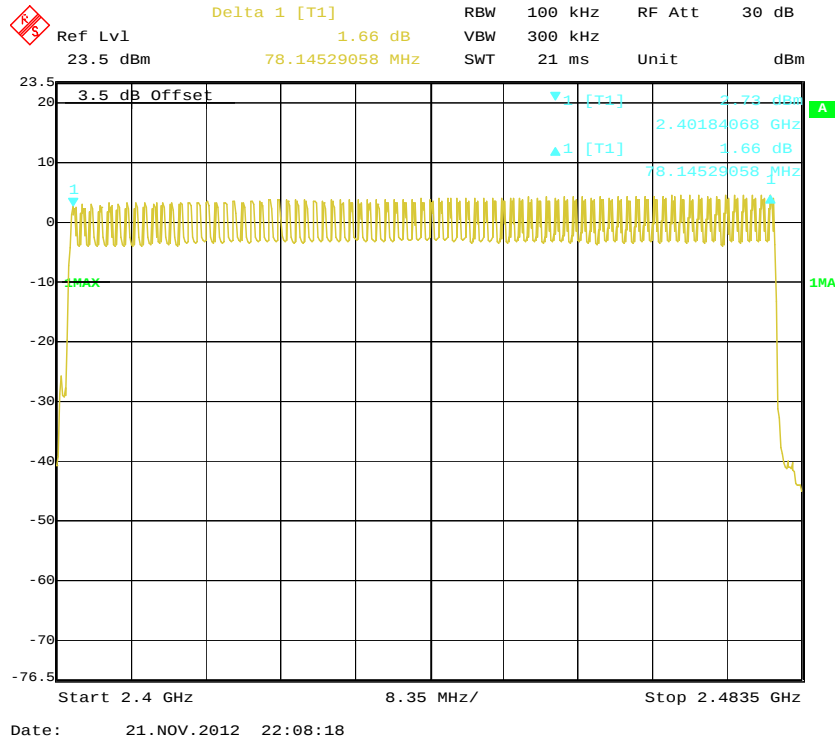

EDR (8DPSK): Number of Hopping Channels

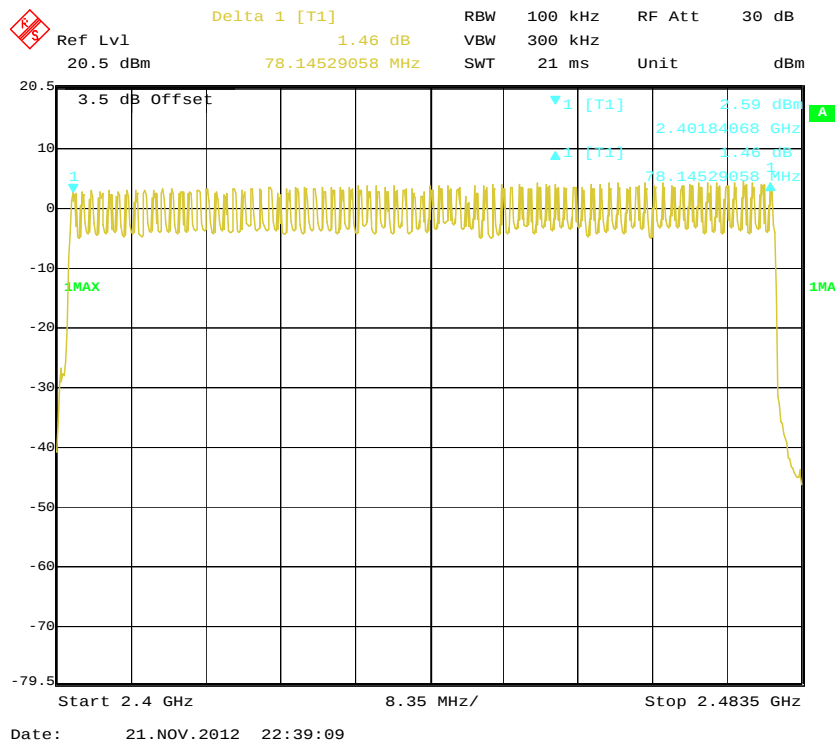

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S

Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	55 %
ATM Pressure:	100 kPa

The testing was performed by Jimmy Xiao on 2012-11-21.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.423	0.135	0.4	Pass
		Middle	0.419	0.134	0.4	Pass
		High	0.427	0.137	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.699	0.272	0.4	Pass
		Middle	1.691	0.271	0.4	Pass
		High	1.699	0.272	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.970	0.317	0.4	Pass
		Middle	2.994	0.319	0.4	Pass
		High	2.970	0.317	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	DH 1	Low	0.425	0.136	0.4	Pass
		Middle	0.425	0.136	0.4	Pass
		High	0.419	0.134	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.723	0.276	0.4	Pass
		Middle	1.707	0.273	0.4	Pass
		High	1.683	0.269	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.994	0.319	0.4	Pass
		Middle	2.958	0.316	0.4	Pass
		High	2.982	0.318	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	DH 1	Low	0.421	0.135	0.4	Pass
		Middle	0.425	0.136	0.4	Pass
		High	0.423	0.135	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.699	0.272	0.4	Pass
		Middle	1.683	0.269	0.4	Pass
		High	1.731	0.277	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.970	0.317	0.4	Pass
		Middle	2.970	0.317	0.4	Pass
		High	2.970	0.317	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK):


Pulse time, Low Channel, DH1

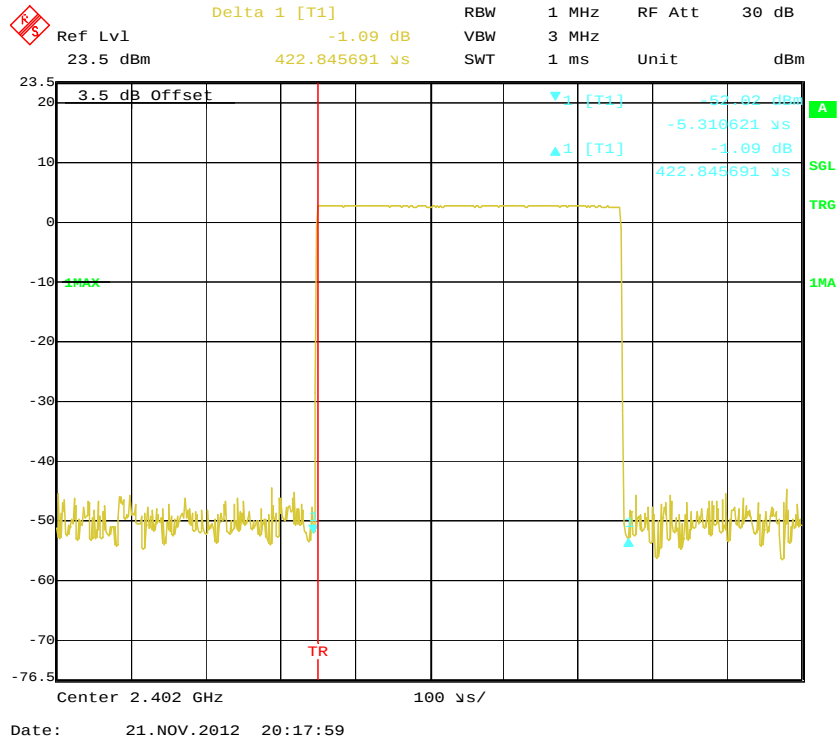


Pulse time, Middle Channel, DH1

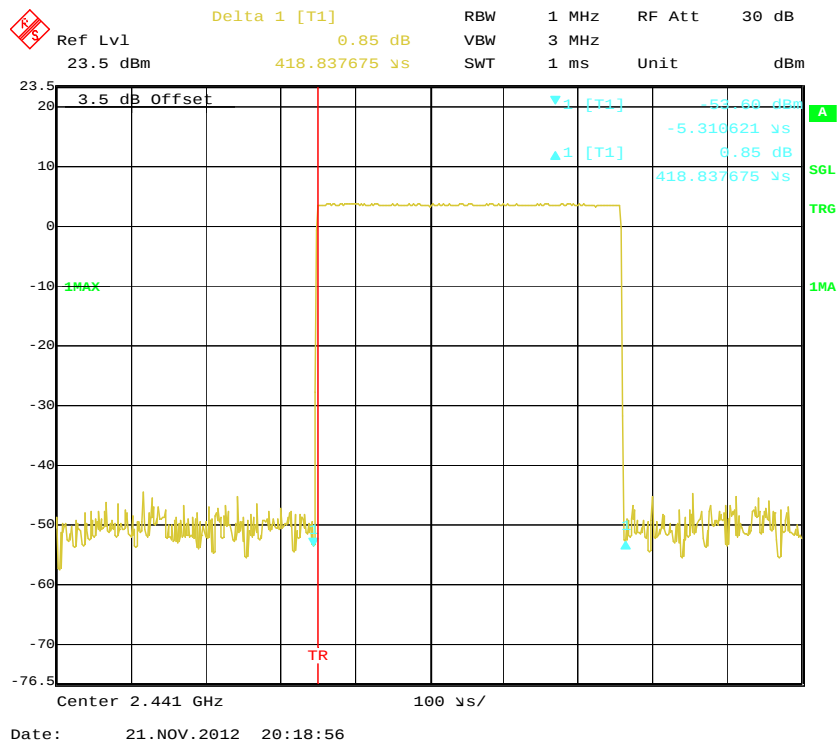

Pulse time, High Channel, DH1

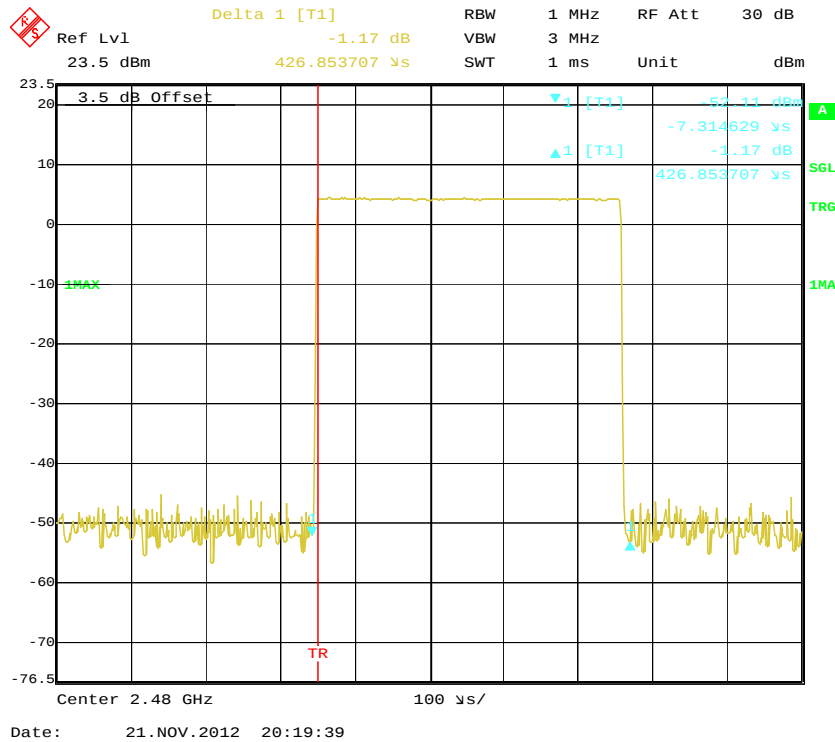

Pulse time, Low Channel, DH3

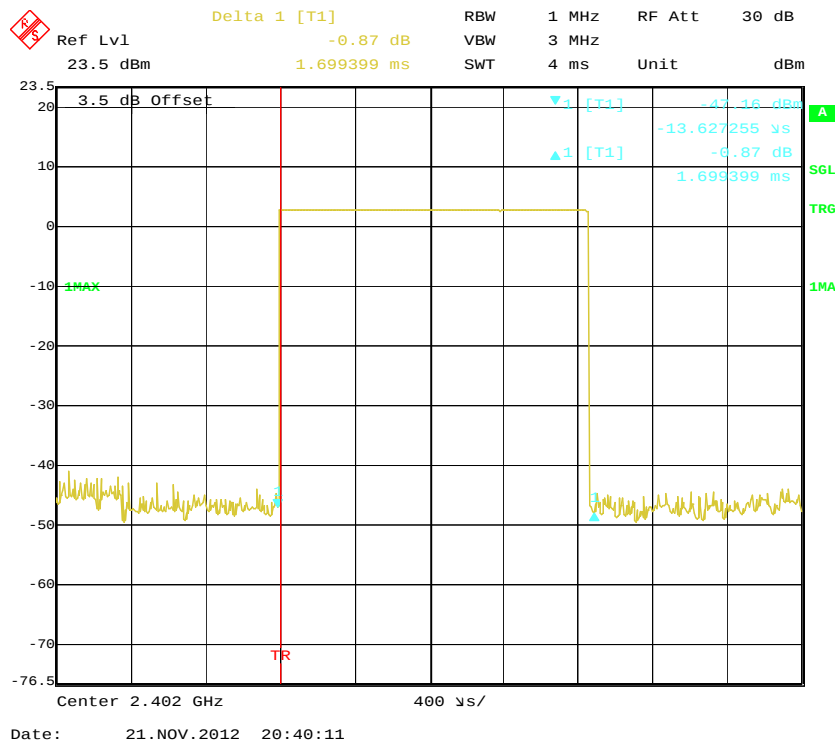

Delta 1 [T1] -4.17 dB

Ref Lvl 23.5 dBm

3.5 dB Offset

1.691383 ms

RBW 1 MHz

VBW 3 MHz

SWT 4 ms

RF Att 30 dB

Unit dBm

23.5

20

10

0

-10

-20

-30

-40

-50

-60

-70

-76.5

Center 2.441 GHz

400 us/div

3.5 dB Offset

1.691383 ms

-4.17 dB

-13.627255 us

-4.55 dBm

1MA

TRG


SGL

A


TR

[illegible]


Pulse time, Low Channel, DH5

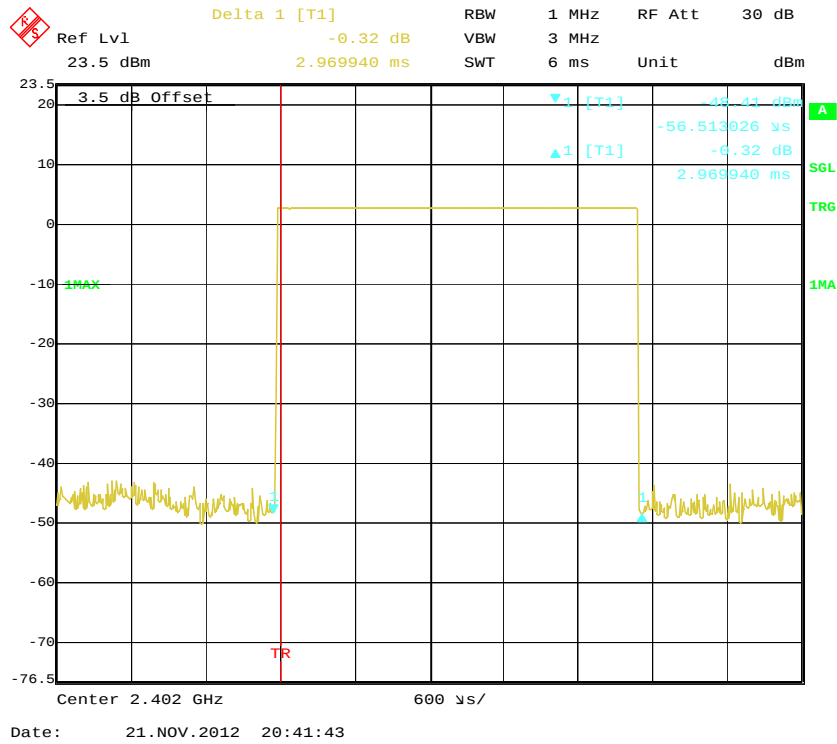

Pulse time, Middle Channel, DH5

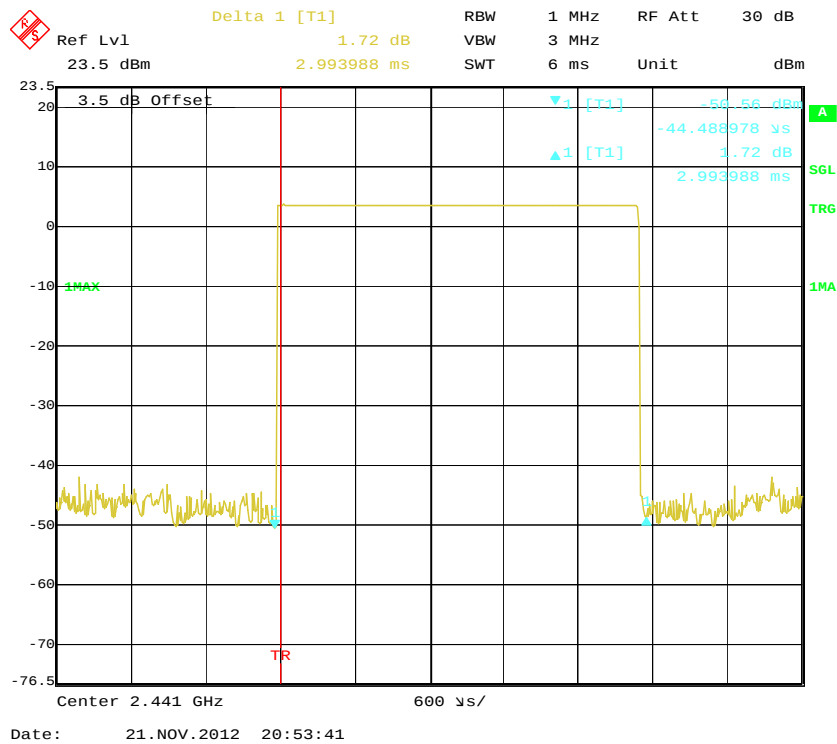


Pulse time, High Channel, DH5

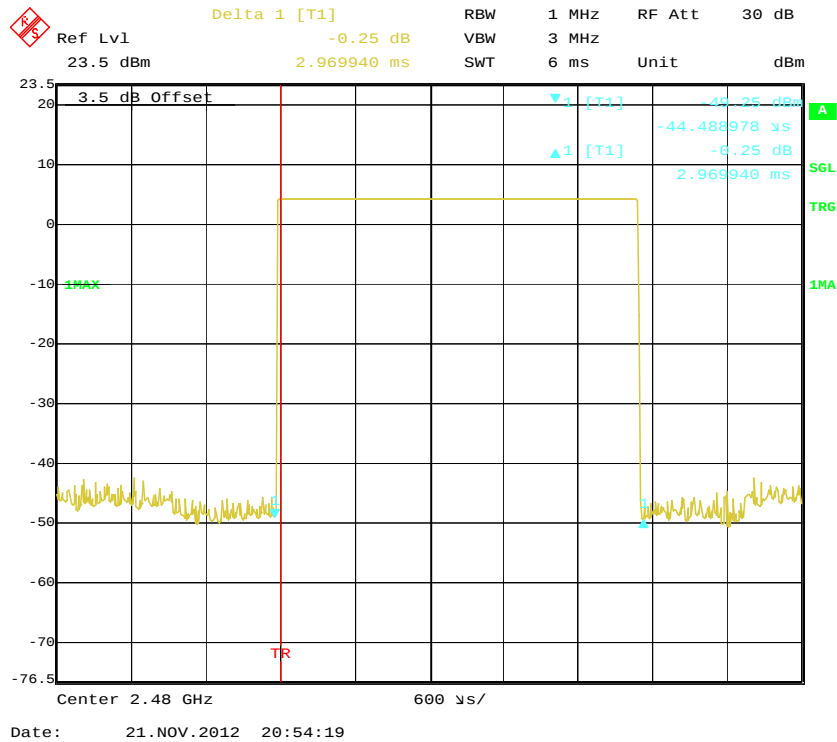

EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, DH1

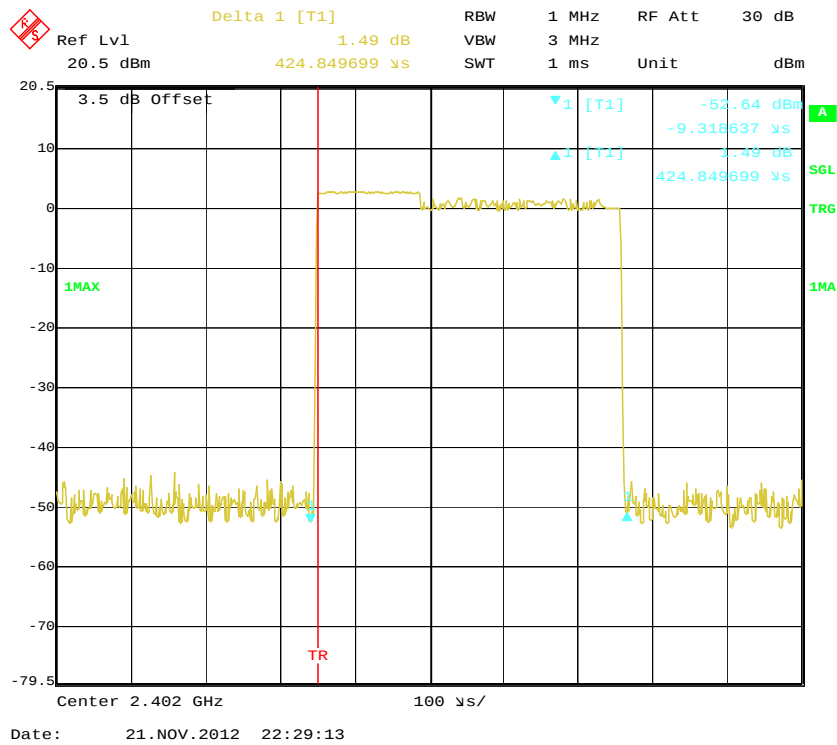

Ref Lvl 20.5 dBm

Delta 1 [T1] 1.09 dB

RBW 1 MHz

VBW 3 MHz

RF Att 30 dB

Unit dBm

SWT 1 ms

Center 2.441 GHz

100 μs/

TR

1MAX

1 [T1]

-54.02 dBm

-5.316621 μs

1.09 dB

424.849699 μs

A

SGL

TRG

1MA

Date: 21.NOV.2012 22:30:01

Ref Lvl 20.5 dBm Delta 1 [T1] -1.21 dB RBW 1 MHz RF Att 30 dB Unit dBm

3.5 dB Offset -48.10 dBm -5.316621 uV -1.21 dB 418.837675 uV

1MAX 1 [T1] 1 [T1] 1 [T1]

Center 2.48 GHz 100 uV/

Date: 21.NOV.2012 22:30:39

[illegible]

The screenshot displays a Spectrum Analyzer interface. At the top, a red 'A' icon is visible. The main display area shows a graph of power (dBm) versus time (μs). The graph has a grid with major lines every 10 dBm and 100 μs. A yellow trace shows a signal that is relatively flat at approximately -50 dBm until about 300 μs, where it drops sharply to about -40 dBm and then rises back to -50 dBm. A red vertical line is drawn at approximately 300 μs, labeled 'TR' in red. A blue arrow points to the start of the signal at approximately 300 μs. A green arrow points to the end of the signal at approximately 400 μs. The graph is labeled '3.5 dB Offset' in the top left corner. The x-axis is labeled 'Center 2.441 GHz' and '400 μs/'. The y-axis is labeled 'dBm' and ranges from -79.5 to 20.5. The top of the screen shows various parameters: 'Ref Lvl' (20.5 dBm), 'Delta 1 [T1]' (2.57 dB), 'RBW' (1 MHz), 'RF Att' (30 dB), 'VBW' (3 MHz), 'SWT' (4 ms), 'Unit' (dBm), and '1.707415 ms'. The bottom of the screen shows the date and time: 'Date: 21.NOV.2012 22:31:43'.

Delta 1 [T1] -0.34 dB
1.683367 ms

RBW 1 MHz RF Att 30 dB
Ref Lvl 20.5 dBm Unit dBm

3.5 dB Offset

1MAX

1A

1MA

TRG

400 μ s/

Center 2.48 GHz

Date: 21.NOV.2012 22:31:18


Ref Lvl: 20.5 dBm
Delta 1 [T1]: -0.69 dB
RBW: 1 MHz
RF Att: 30 dB
VSWR: 3 MHz
SWT: 6 ms
Unit: dBm

3.5 dB Offset


Center: 2.402 GHz
Scale: 600 μs/div

Date: 21.NOV.2012 22:33:02

Pulse time, Middle Channel, DH5

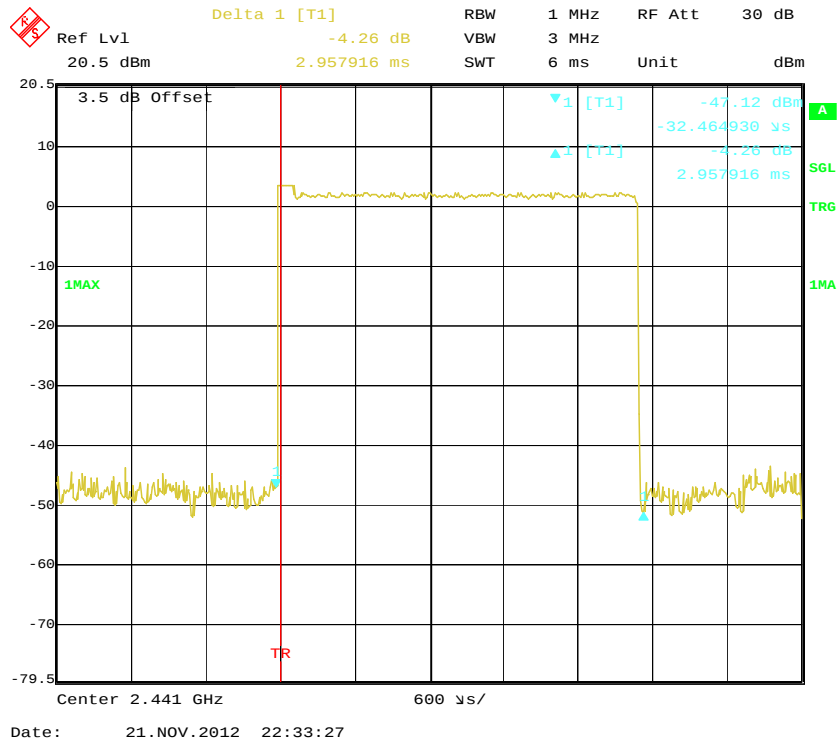


Pulse time, High Channel, DH5

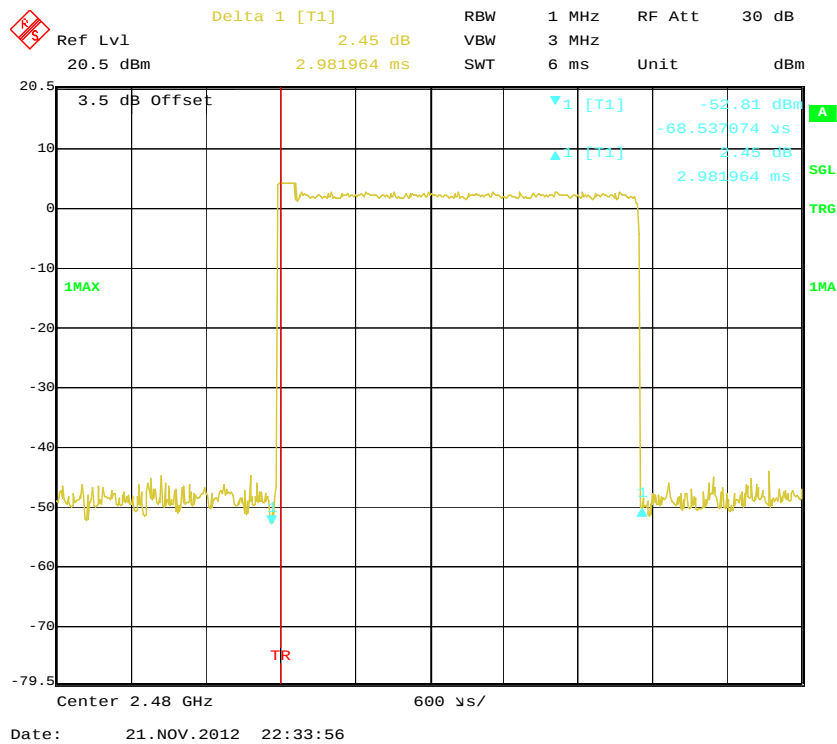


EDR (8DPSK):


Pulse time, Low Channel, DH1

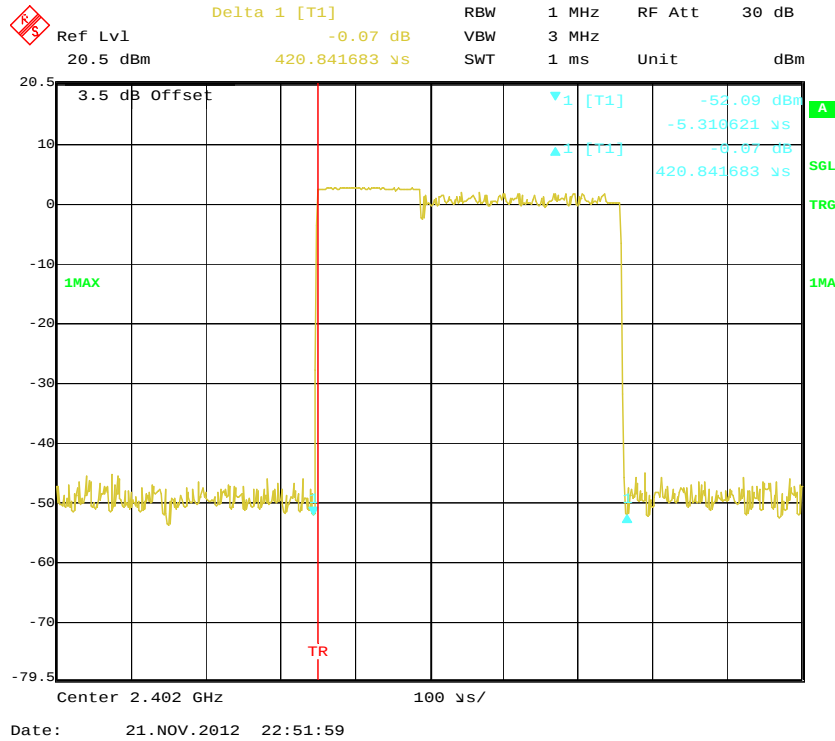


Pulse time, Middle Channel, DH1

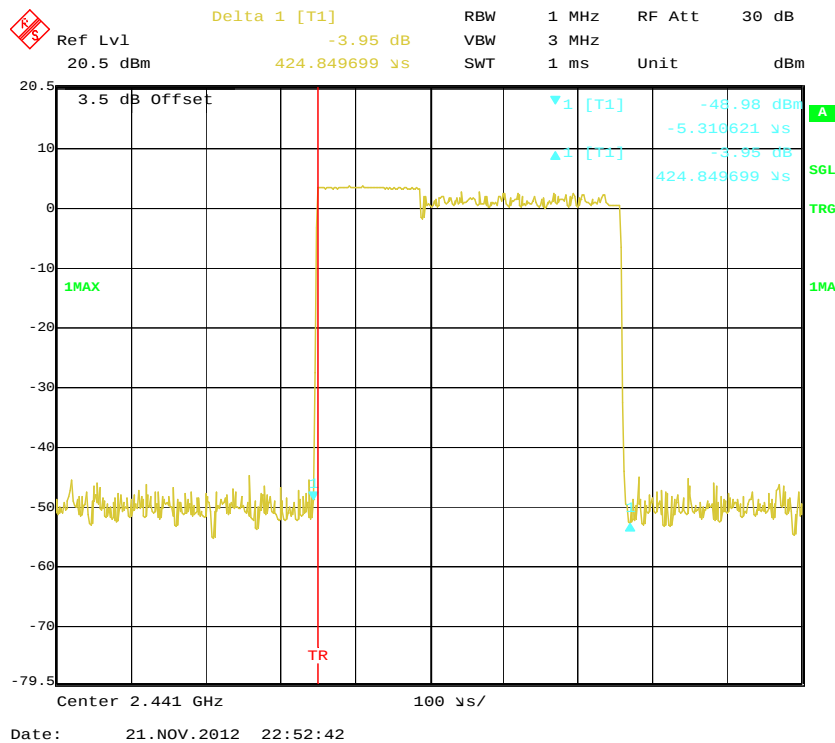


Pulse time, High Channel, DH1

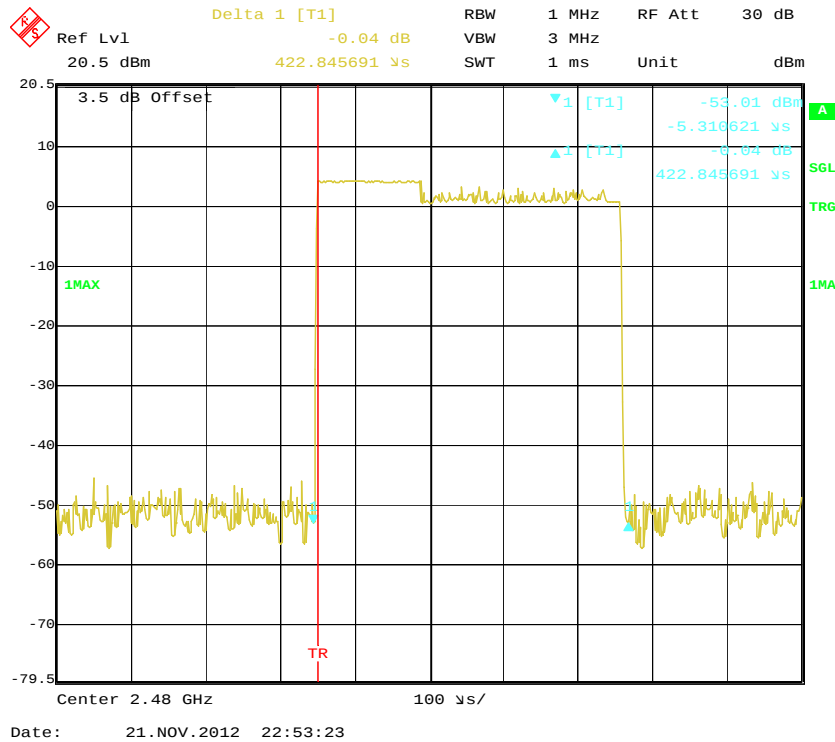


Pulse time, Low Channel, DH3

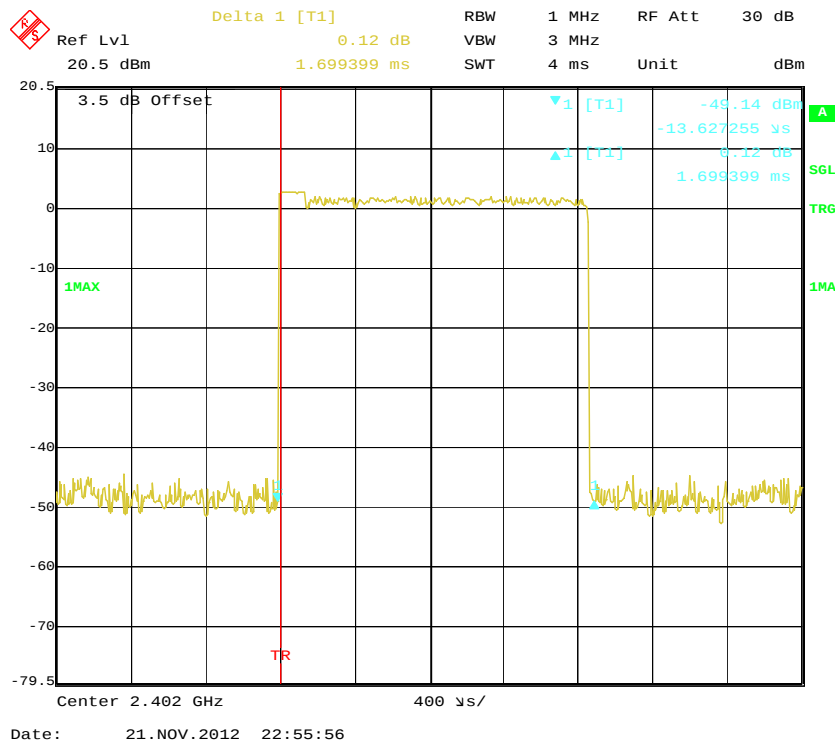


Pulse time, Middle Channel, DH3

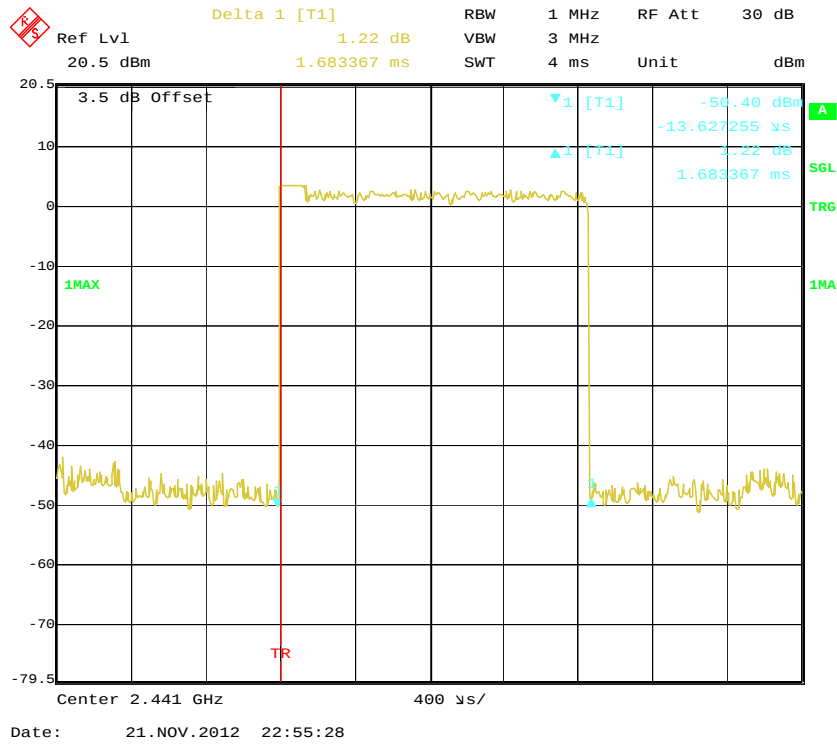


Pulse time, High Channel, DH3

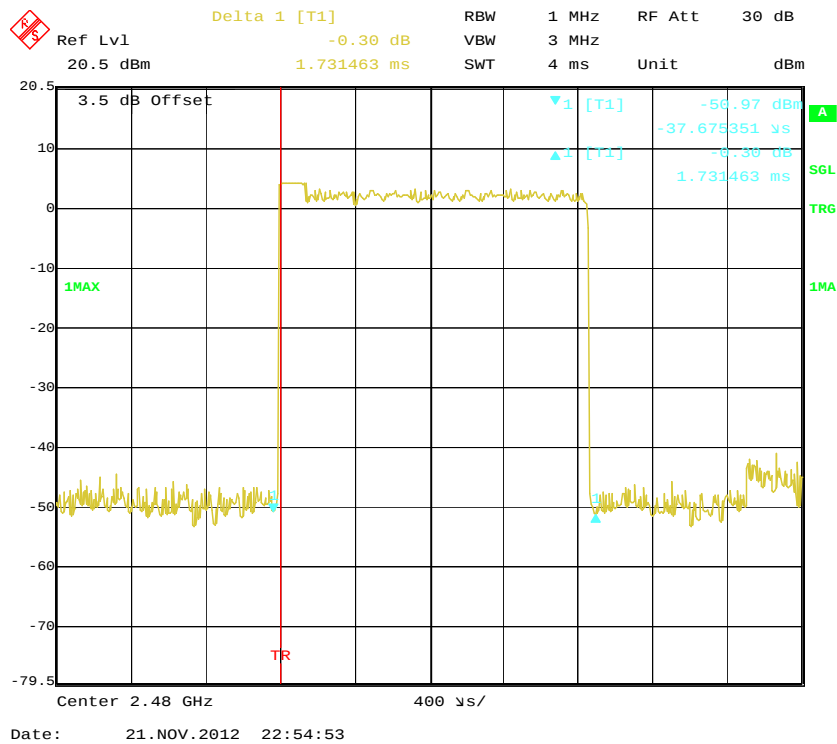


Pulse time, Low Channel, DH5

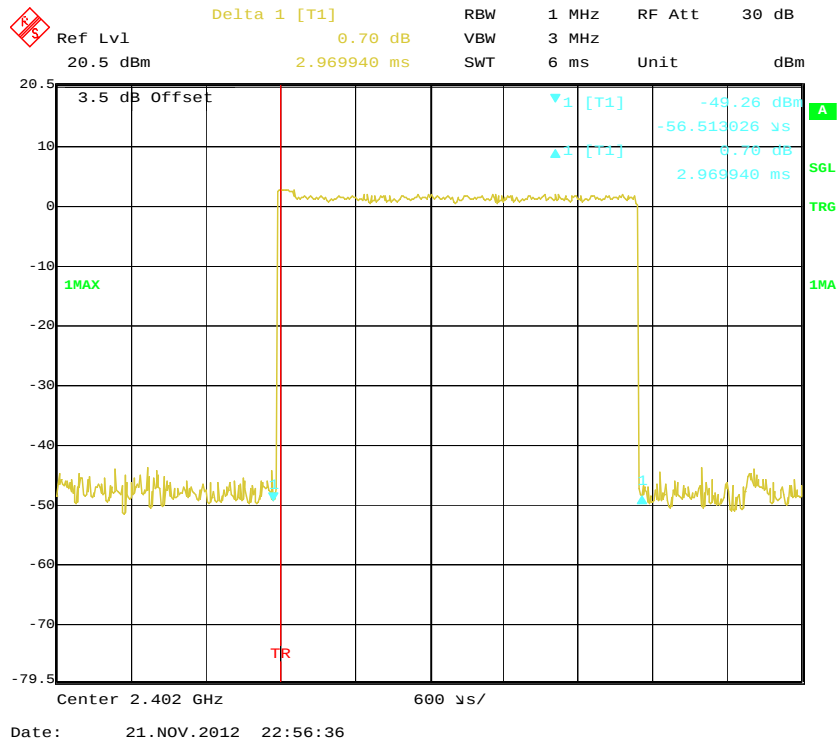

Pulse time, Middle Channel, DH5

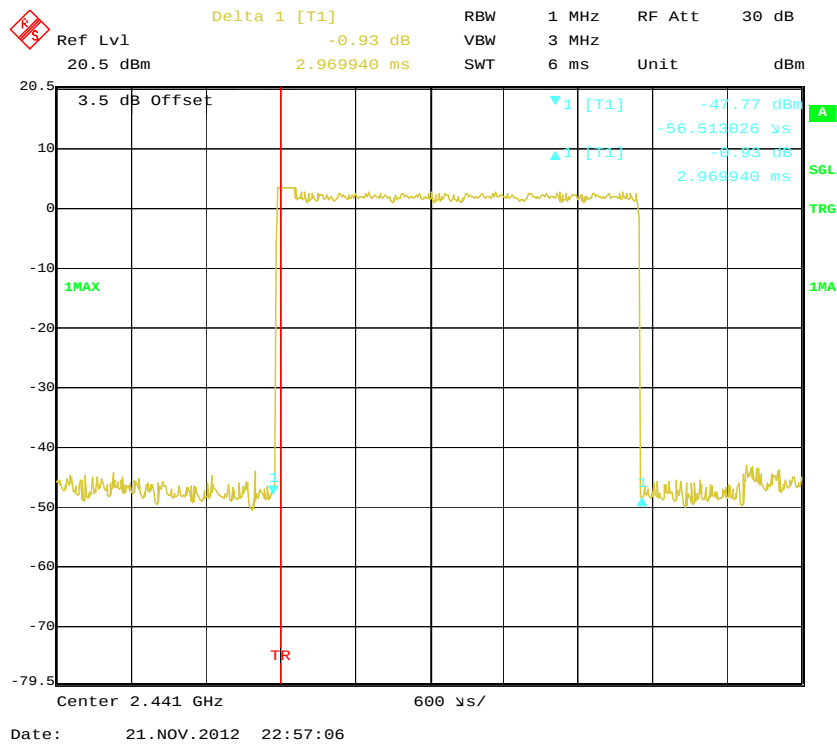

Pulse time, High Channel, DH5

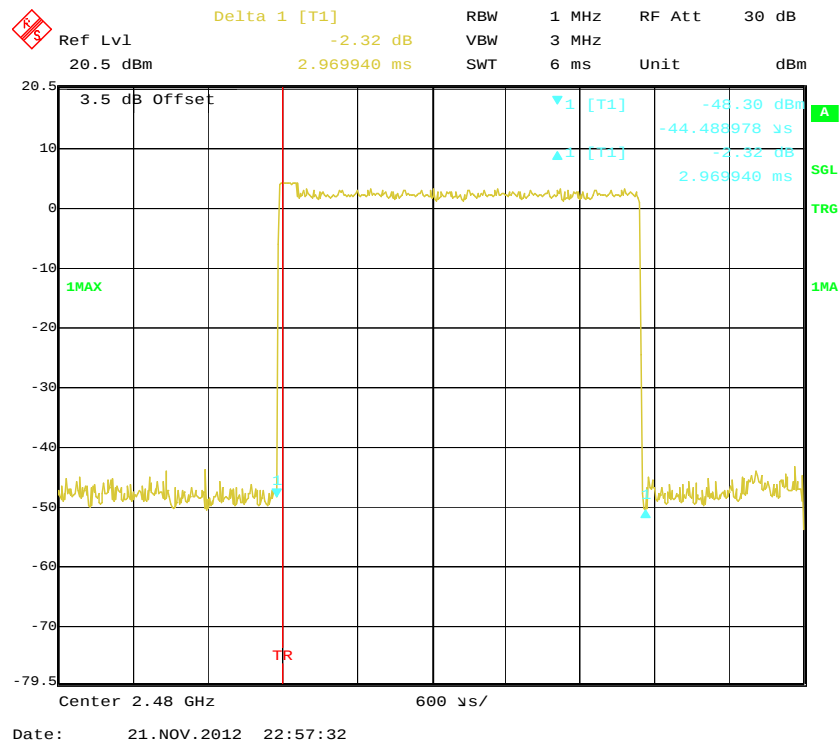


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

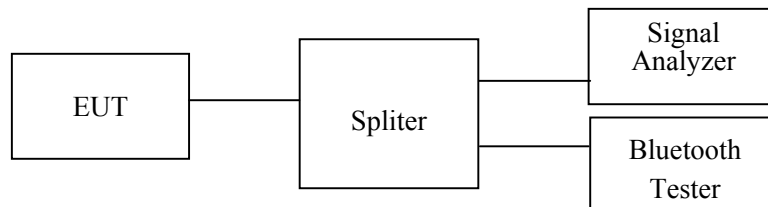

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Test Data

Environmental Conditions


Temperature:	24°C
Relative Humidity:	55 %
ATM Pressure:	100 kPa

The testing was performed by Jimmy Xiao on 2012-11-21.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	2.62	1.828	1000
	Middle	2441	3.54	2.259	1000
	High	2480	4.31	2.698	1000
EDR ($\pi/4$-DQPSK)	Low	2402	2.79	1.901	1000
	Middle	2441	3.66	2.323	1000
	High	2480	4.31	2.698	1000
EDR (8DPSK)	Low	2402	2.80	1.905	1000
	Middle	2441	3.66	2.323	1000
	High	2480	4.31	2.698	1000

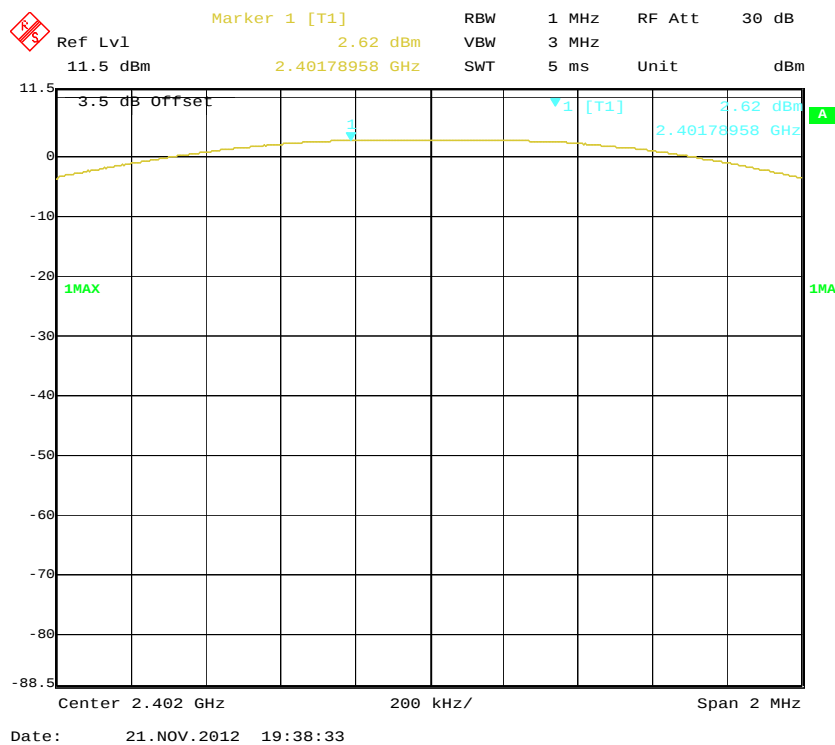BDR (GFSK): Low Channel


BDR (GFSK): Middle Channel

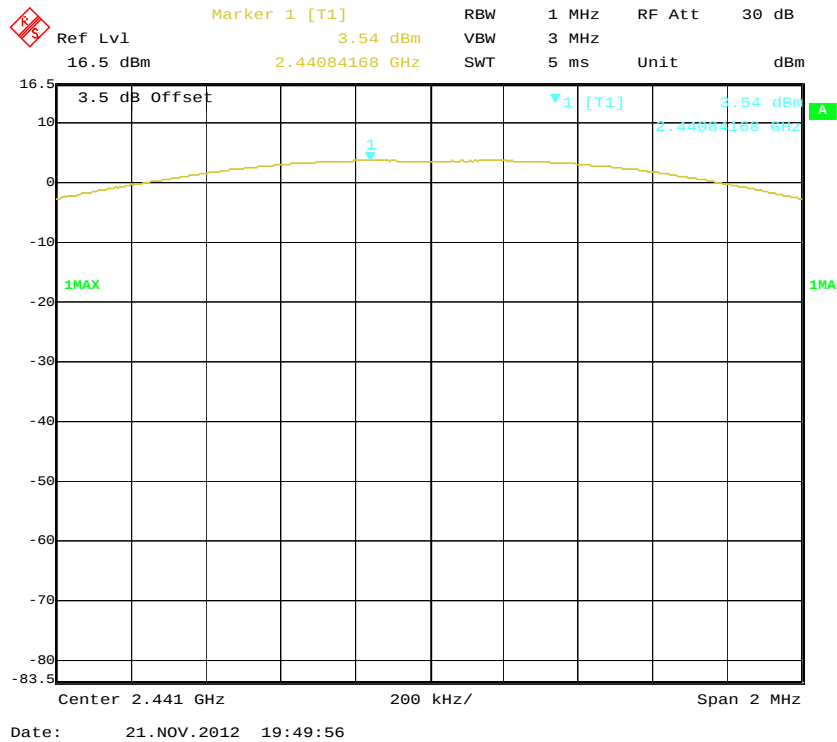


BDR (GFSK): High Channel

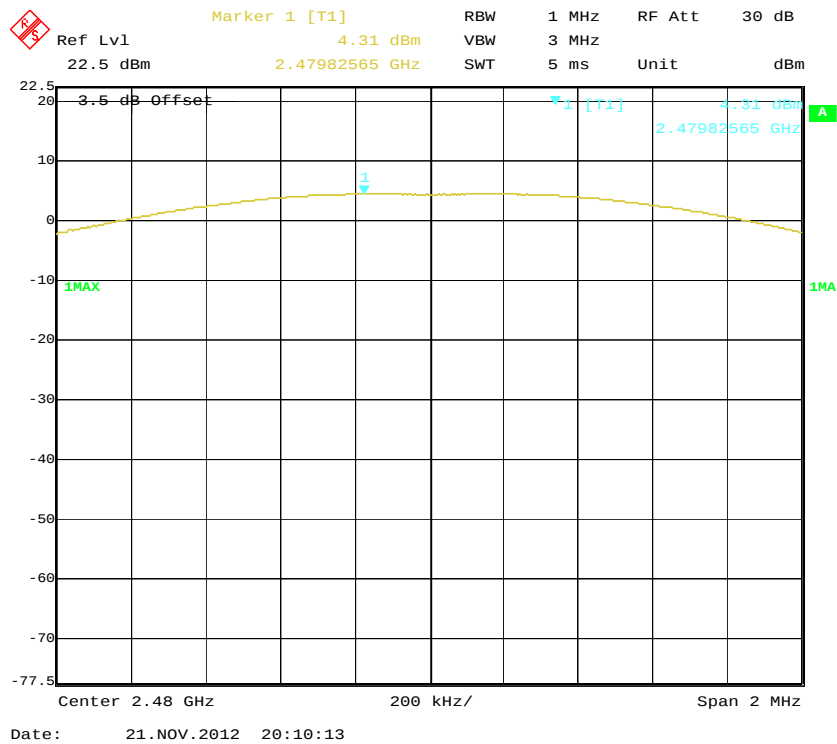


EDR($\pi/4$ -DQPSK): Low Channel

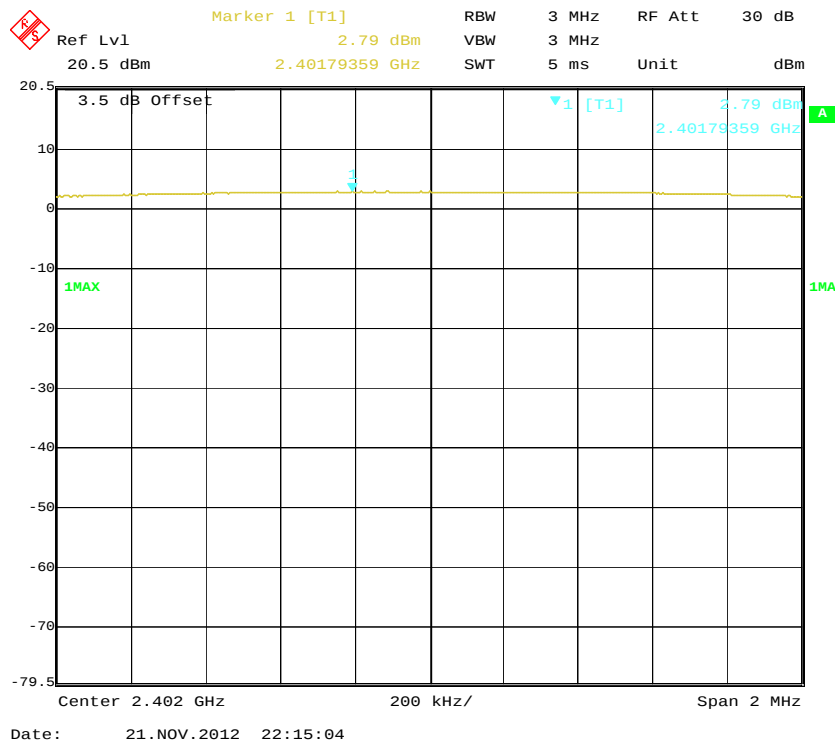


EDR($\pi/4$ -DQPSK): Middle Channel

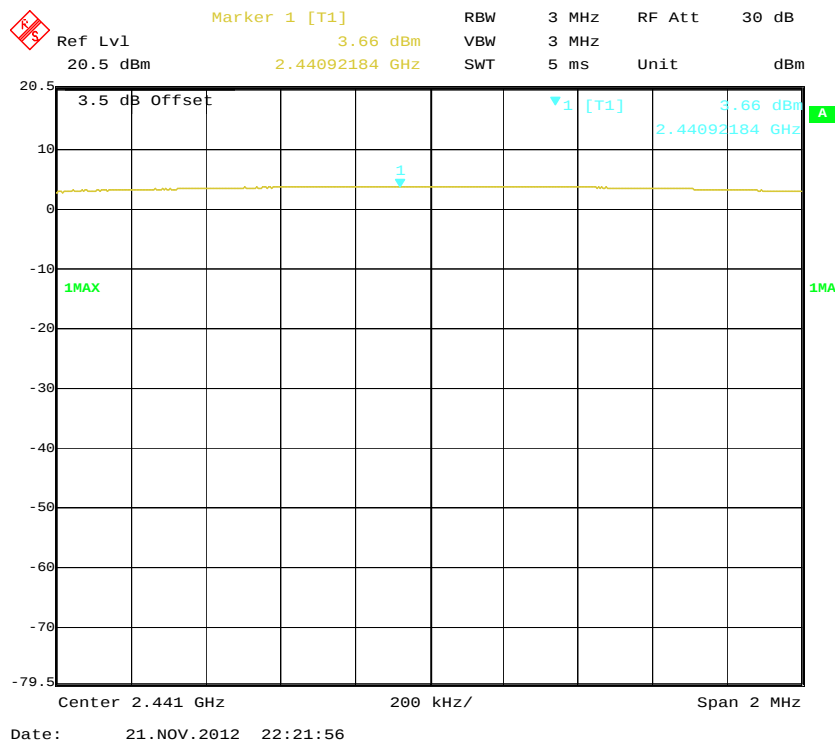


EDR($\pi/4$ -DQPSK): High Channel

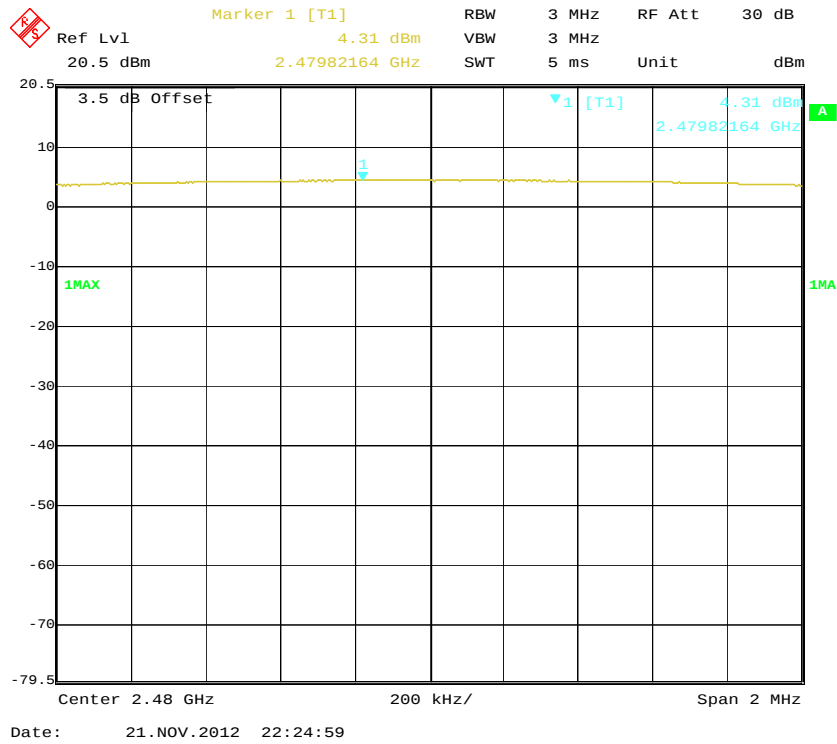


EDR(8DPSK): Low Channel

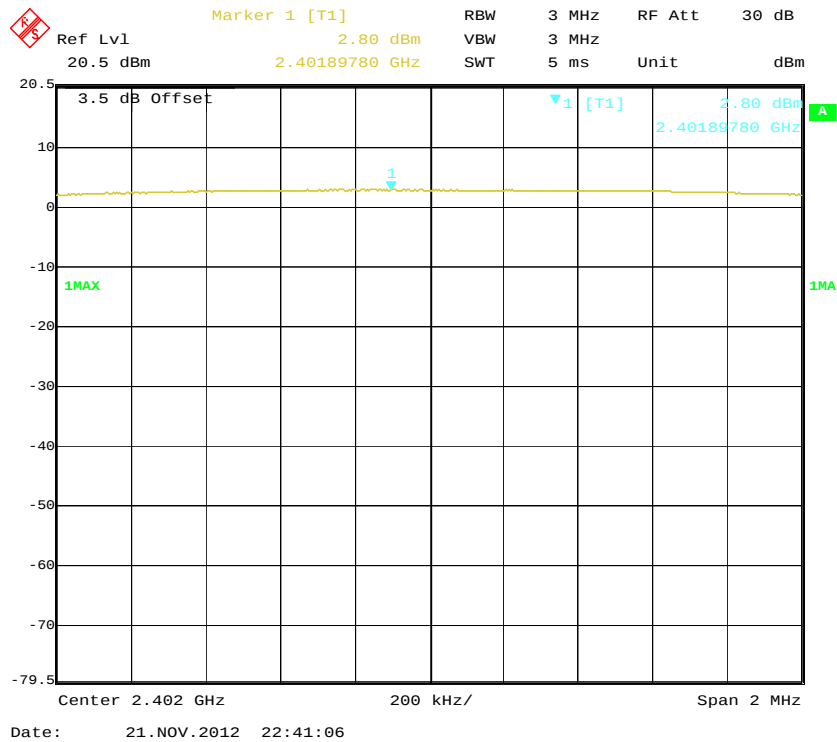

EDR(8DPSK): Middle Channel

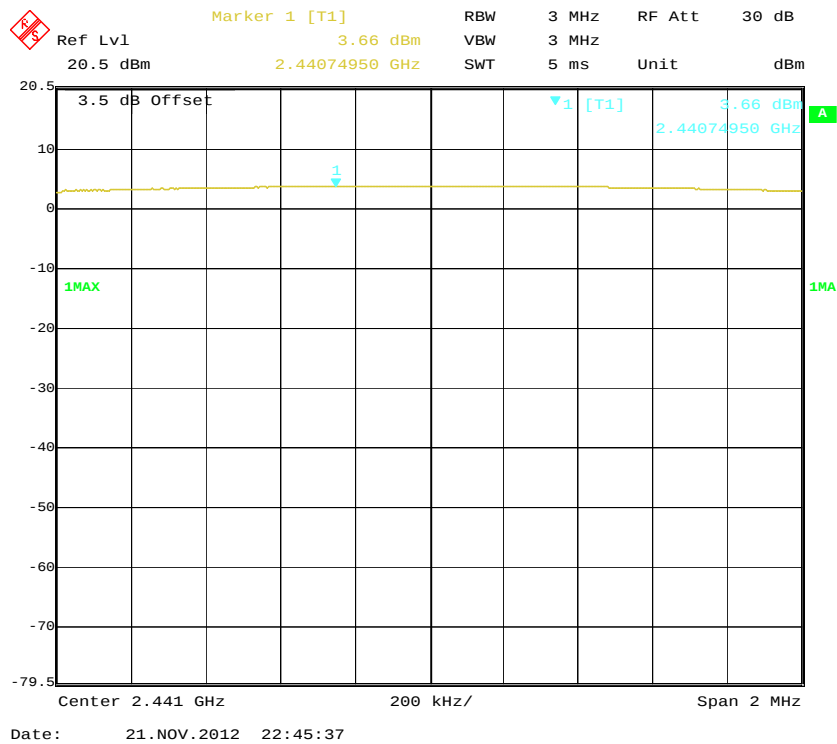

EDR(8DPSK): High Channel

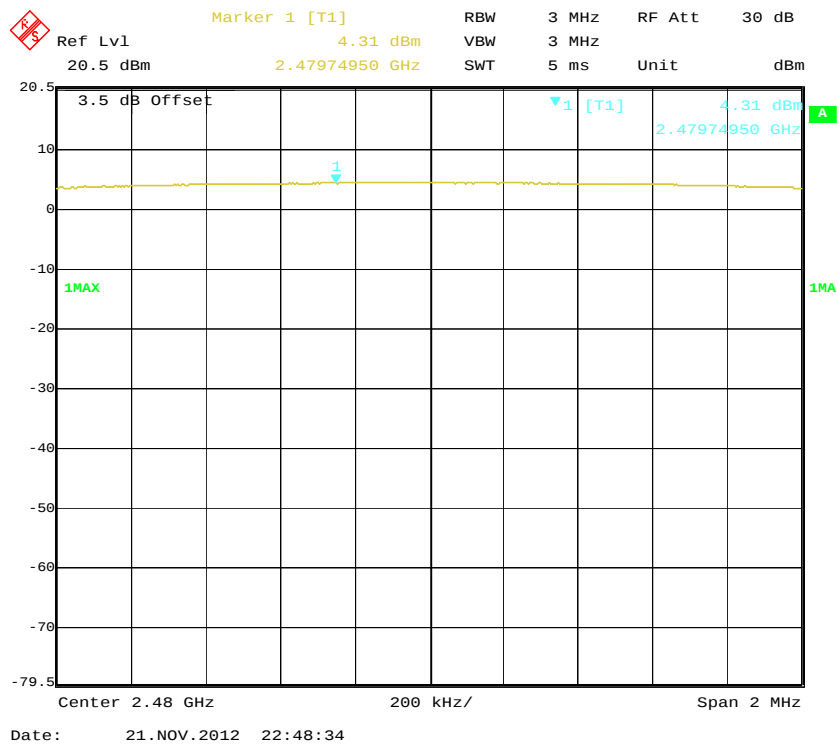

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM)

Test Data

Environmental Conditions


Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

The testing was performed by Jimmy Xiao on 2012-11-21.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots


BDR (GFSK): Band Edge-Left Side

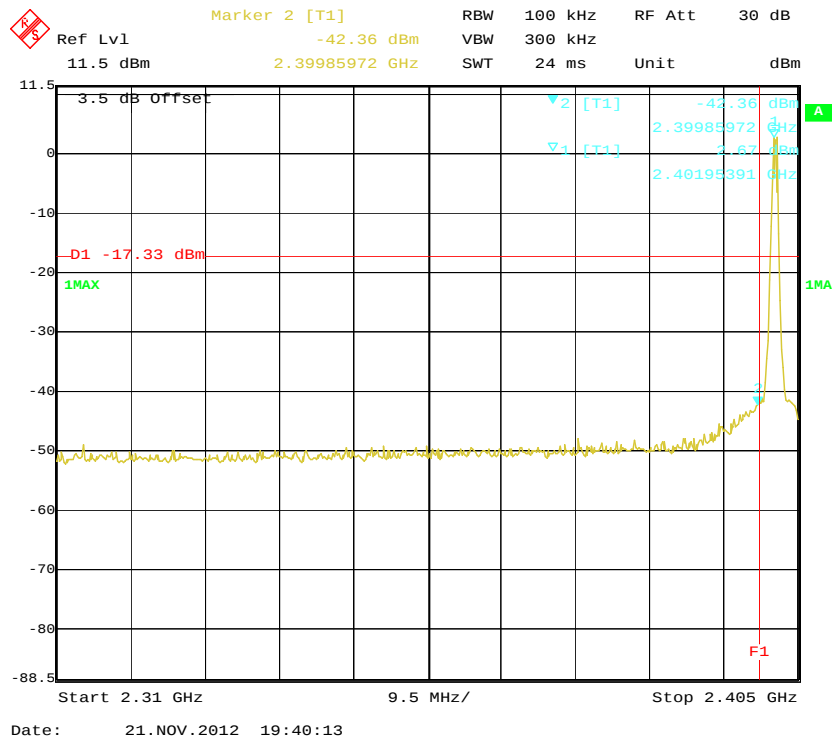


BDR (GFSK): Band Edge-Right Side


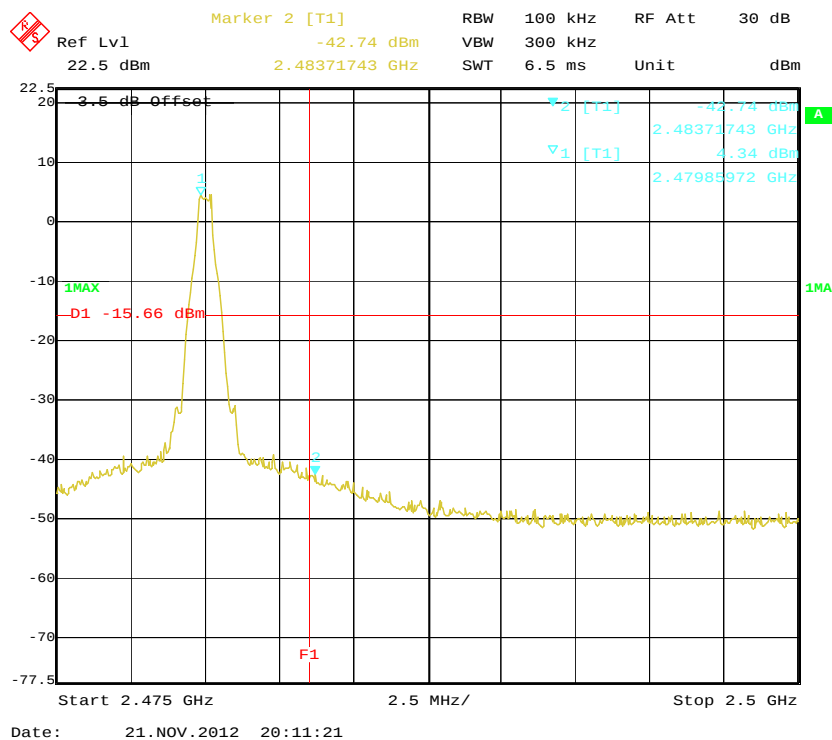


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

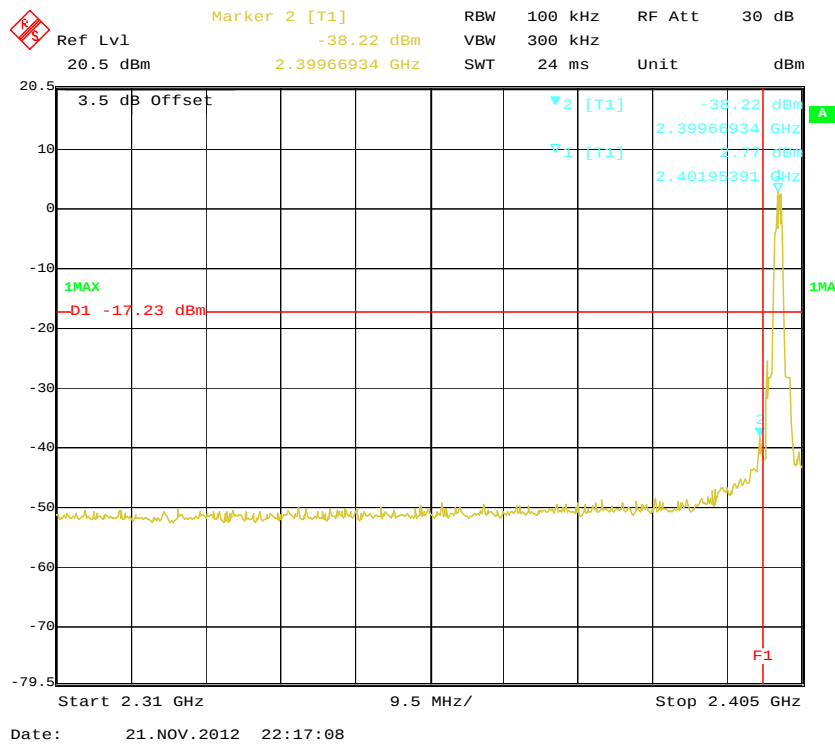

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

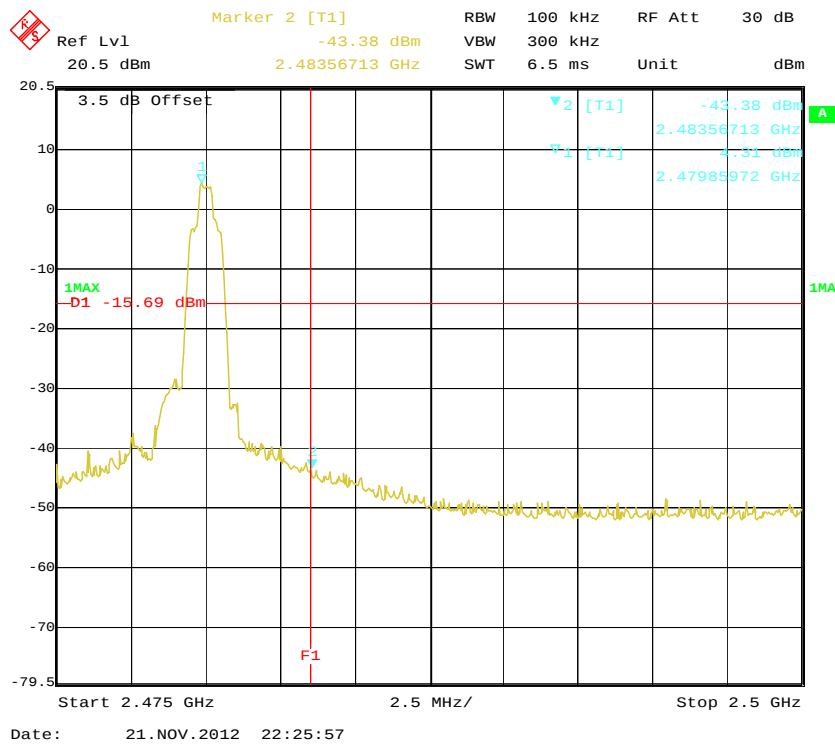

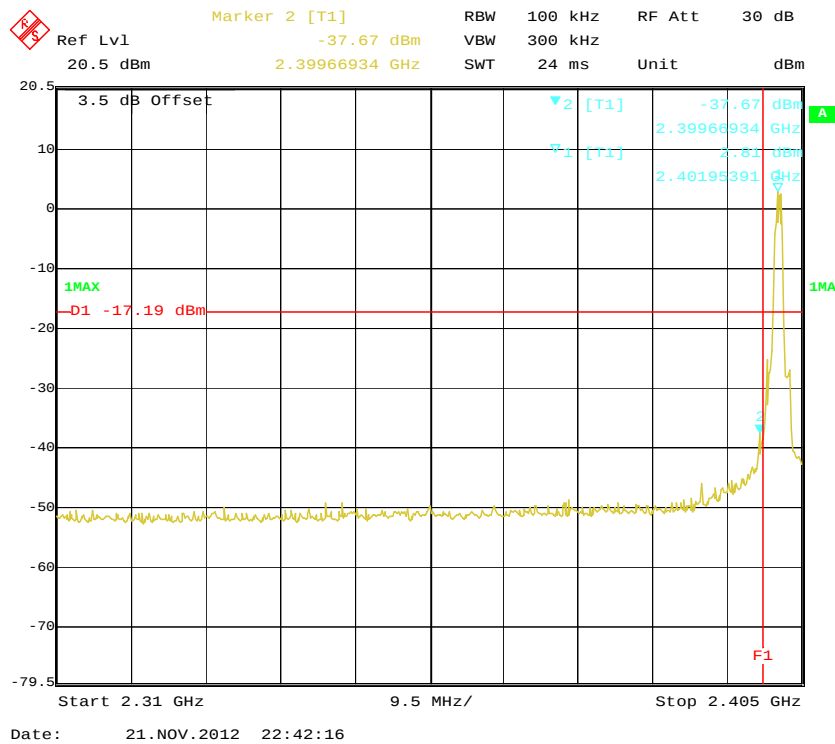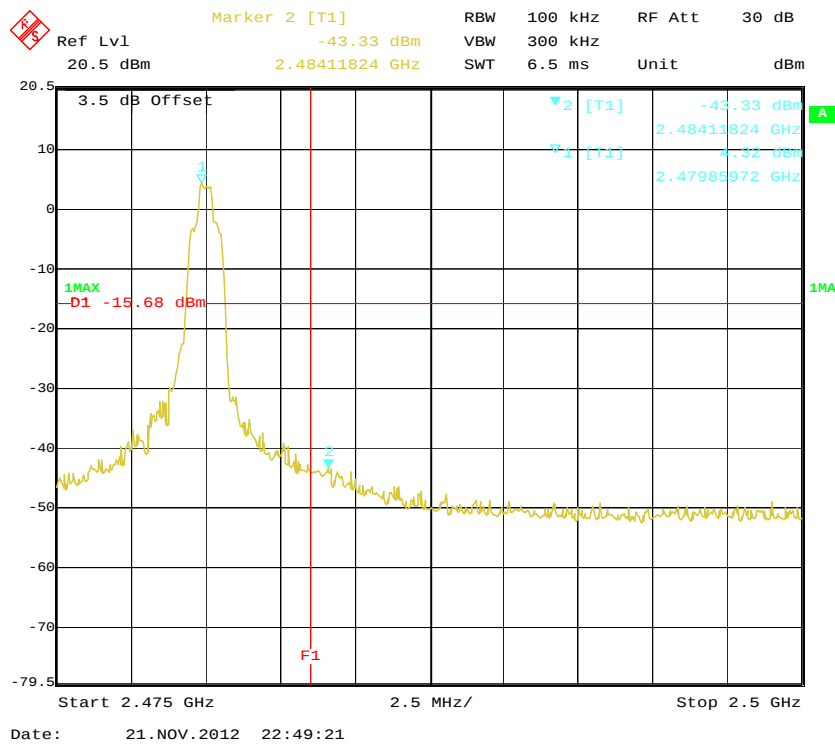EDR (8DPSK): Band Edge-Left Side**EDR (8DPSK): Band Edge-Right Side********* END OF REPORT *******