

MEASUREMENT REPORT

of

2.4G Remote Pointer

Applicant : TopSeed Technology Corp.
FCC ID : PTITSBQ-2410
EUT : 2.4GHz Remote Pointer
Model : TSBQ-2410
Report No. : AA515694

Test by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

No. 255, Nan-yang Street, Shijr, Taipei Hsien 221, Taiwan

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All tests were conducted by **Training Research Co., Ltd.**, No. 255, Nan-yang Street, Shijr, Taipei Hsien 221, Taiwan. Also, we attest to the accuracy of each.


We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.249.

Applicant : TopSeed Technology Corp.
Applicant address : 9F-3, No. 16, Jain Ba Road, Chung Ho City, Taipei Hsien, Taiwan 235
FCC ID : PTITSBQ-2410
Test Date : July 7, 2004

Prepared by:

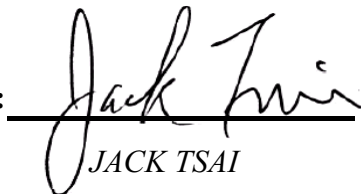
JACK TSAI

Approved by:

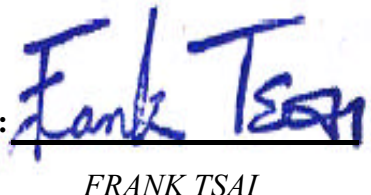
FRANK TSAI

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**

★ NVLAP LAB CODE: 200174-0

Tables of Contents

CHAPTER 1	GENERAL	4
1.1	INTRODUCTION.....	4
1.2	DESCRIPTION OF EUT	4
1.3	TEST METHOD	4
1.4	DESCRIPTION OF SUPPORT EQUIPMENT	4
1.5	CONFIGURATION OF SYSTEM UNDER TEST.....	5
1.6	TEST PROCEDURE	6
1.7	LOCATION OF THE TEST SITE.....	6
1.8	GENERAL TEST CONDITION.....	6
CHAPTER 2	CONDUCTED EMISSIONS MEASUREMENTS.....	7
2.1	TEST CONDITION & SETUP	7
2.2	LIST OF TEST INSTRUMENTS	7
2.3	TEST RESULT OF CONDUCTED EMISSIONS	7
CHAPTER 3	TRANSMITTER DUTY CYCLE MEASUREMENTS.....	8
3.1	TEST CONDITION AND SETUP	8
3.2	LIST OF TEST INSTRUMENTS	8
3.3	TEST INSTRUMENTS CONFIGURATION	9
3.4	TEST RESULT	9
CHAPTER 4	RADIATED EMISSIONS MEASUREMENTS	11
4.1	TEST CONDITION & SETUP	11
4.2	LIST OF TEST INSTRUMENTS	13
4.3	TEST RESULT OF RADIATED EMISSIONS	14
	Fundamental Emissions	14
4.4	TEST RESULT OF SPURIOUS RADIATED EMISSIONS.....	15
	Horizontal for 30MHz to 25GHz [Lowest CH, X-axis].....	15
	Vertical for 30MHz to 25GHz [Lowest CH, Y-axis]	15
	Horizontal for 30MHz to 25GHz [Middle CH, X-axis]	16
	Vertical for 30MHz to 25GHz [Middle CH, Y-axis]	16
	Horizontal for 30MHz to 25GHz [Highest CH, X-axis]	17
	Vertical for 30MHz to 25GHz [Highest CH, Y-axis]	17
4.5	TEST RESULT OF THE BANDEDGE	18
	Lowest.....	19
	Highest.....	20

Chapter 1 General

1.1 Introduction

The following measurement report is submitted on behalf of Applicant in support of a Remote Pointer certification in accordance with Part 2 Subpart J and Part 15 Subpart C of the Commission's Rules and Regulations.

1.2 Description of EUT

Product Name	: 2.4GHz Remote Pointer
Model	: TSBQ-2410
Part No.	: RCBQ0014-2410
Granted FCC ID	: PTITSBQ-2410
Frequency Range	: 2400MHz ~ 2483.5MHz
Operating Frequency	: 2402MHz ~ 2477MHz
Modulation Skill	: GFSK
Power Type	: Powered by 1.5V batteries (UM-4*2)

1.3 Test method


The fundamental frequency of transmitter emitted is due to a press on button of the EUT. There are security codes for avoiding the possibility of duplicating codes in adjacent systems. The coding must be matching with the companion receiver.

While testing the EUT was adjusted at a position, which transmits the maximum emission.

1.4 Description of Support Equipment

No support equipment: The EUT itself forms a system. No support equipment is required for its normal operation.

1.5 Configuration of System Under Test

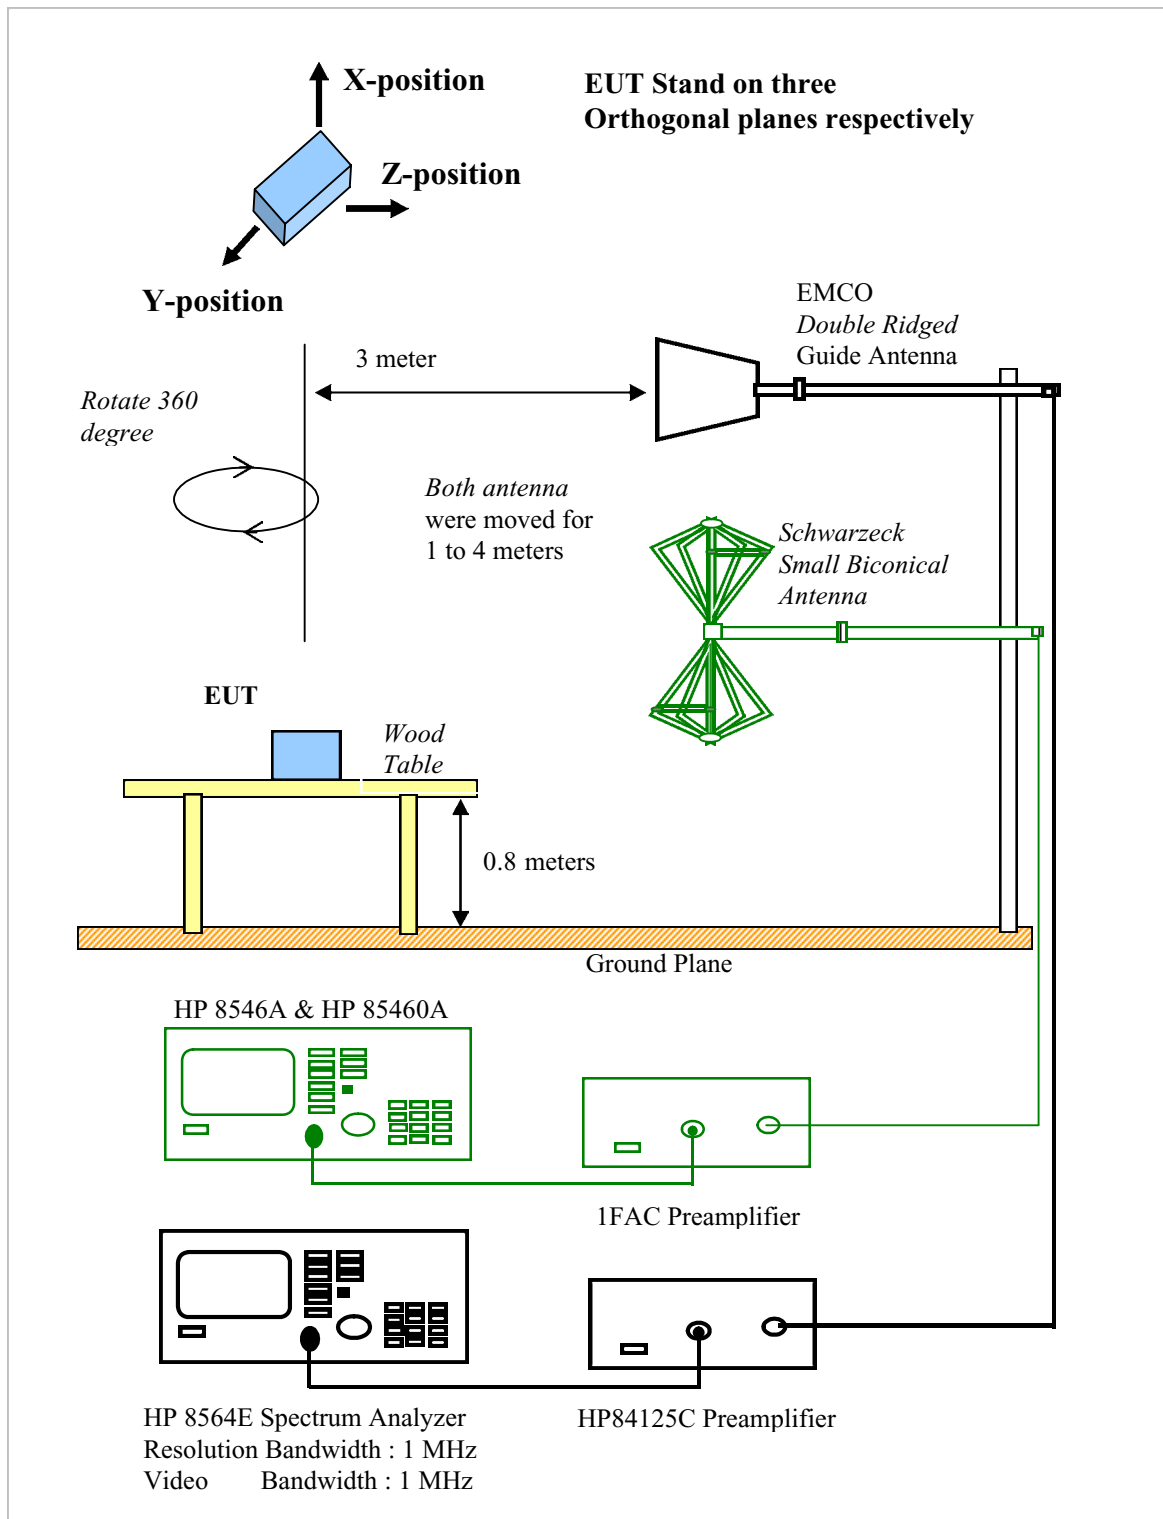

1.6 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in Measurement procedure ANSI C63.4 (1992).

1.7 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255, Nan-yang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in an anechoic chamber also located at Training Research Co., Ltd. 1F, No. 255, Nan-yang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.8 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode. The Highest, Middle and Lowest of EUT were all tested. The setting up procedure is recorded on 1.3 Test Method.

Chapter 2 Conducted Emissions Measurements

2.1 Test Condition & Setup

The EUT operates solely by the batteries (UM-4, Size AAA battery * 2).

According to the rule of section 15.207(c). The EUT exempt to the power line conducted test.

2.2 List of Test Instruments

N/A (Not applicable)

2.3 Test Result of Conducted Emissions

N/A (Not applicable)

Chapter 3 Transmitter Duty Cycle Measurements

3.1 Test Condition and Setup

The duty cycle measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a bi-log periodic antenna was used distance about 3 meters for receiving. While testing EUT was set to transmit continuously. Various key configurations were also investigated to find the maximum duty cycle.

The resolution bandwidth and video bandwidth of the spectrum analyzer was all set to 1MHz to encompass all significant spectral components during the test. The analyzer operated in linear scale and zero span mode after tuning to the transmitter carrier frequency. The spectrum analyzer measured pules width. The pulse width was determined by the difference between the two half voltage points on a pulse.

The duty cycle was determined by the following equation:

$$\text{Duty Cycle (\%)} = \frac{\text{Total on interval in a complete pulse train}}{\text{Length of a complete pulse train}} \times 100\%$$


To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and be obtained from following conversion:

$$\text{Duty Cycle Correction Factor (dB)} = 20 \times \log_{10} \text{Duty Cycle}$$

3.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
EMI Receiver	8546A	H P	3520A00242	07/28/04
RF Filter Section	85460A	H P	3448A00217	07/28/04
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/04
Spectrum Analyzer	8564E	HP	3720A00840	07/23/04
Microwave Preamplifier	84125C	HP	US36433002	07/30/04
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	09/21/04

3.3 Test Instruments Configuration

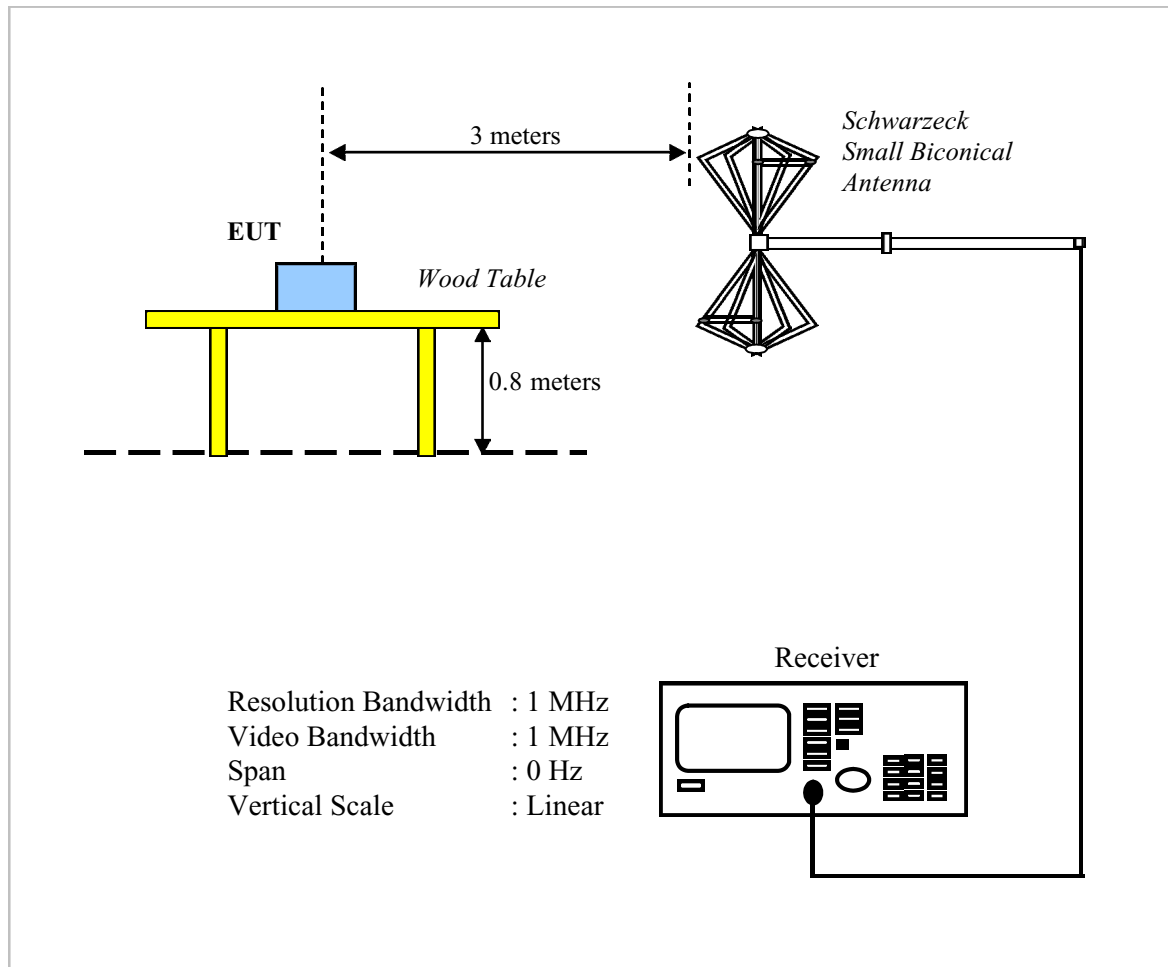

3.4 Test Result

Following is the test result, which produce maximum duty cycle:

Total on interval in a complete pulse train

$$= 330\mu\text{s} * 5$$

Length of a complete pulse train



$$= 16\text{ms}$$

$$\text{Duty Cycle (\%)} = 1.65\text{ms} / 16\text{ms} * 100\% = 0.103125$$

$$\text{Duty Cycle Correction Factor (dB)} = 20 * \text{Log} (0.103125) = -9.87$$

A plot is attached on the following page.

Duty Cycle Test Picture

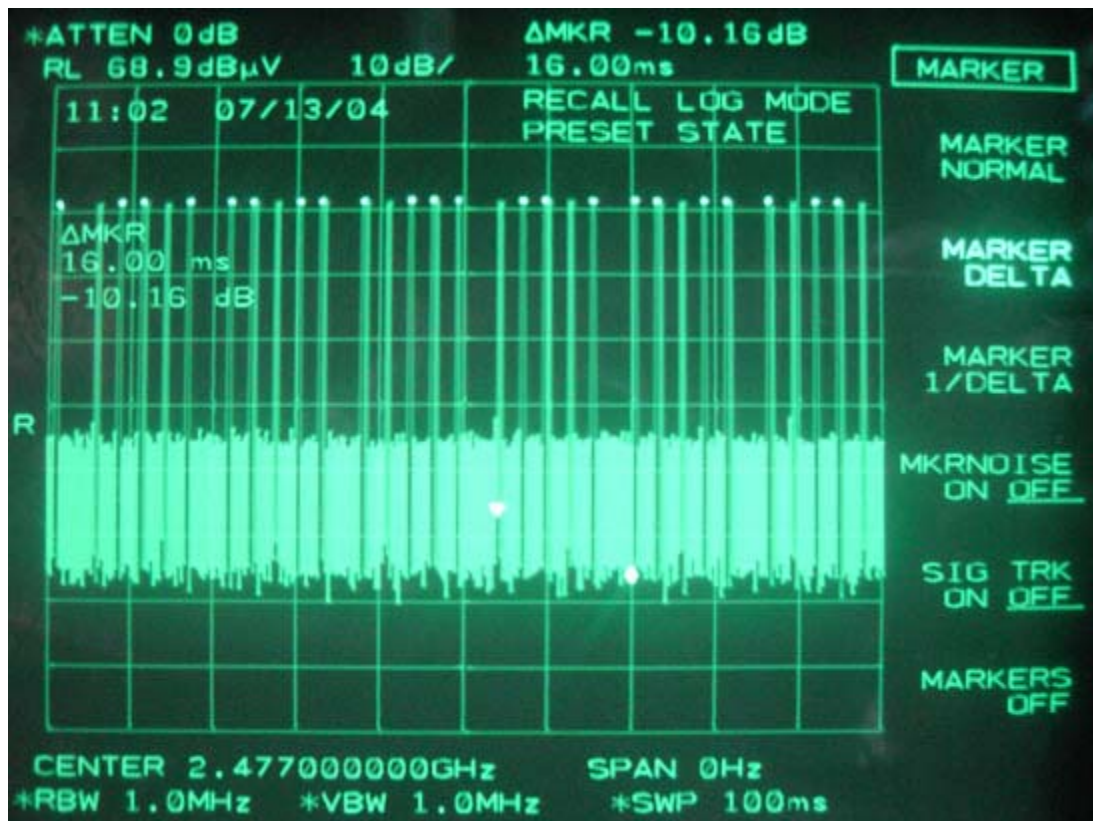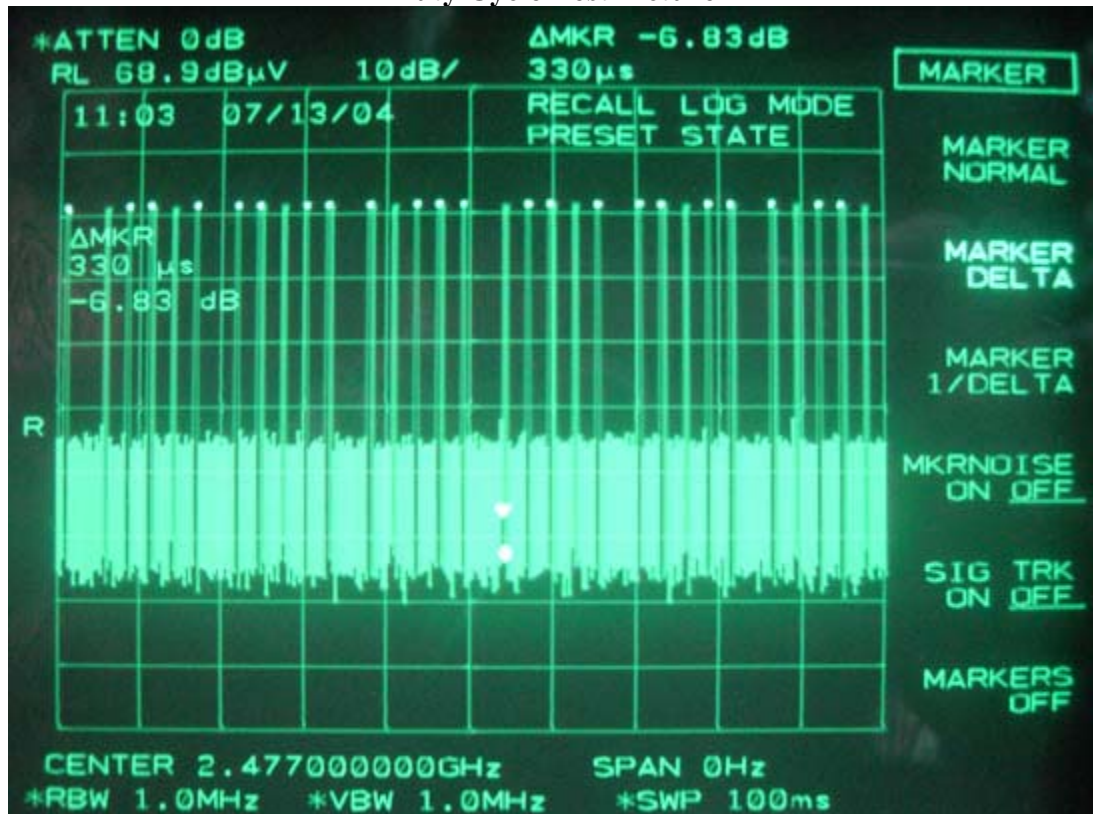

Chapter 4 Radiated Emissions Measurements

4.1 Test Condition & Setup

We'd performed the test by the radiated emission skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top, one in the middle and the other in bottom. The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, with *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors} + \text{Duty Cycle}$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

For frequency between 1GHz to 25GHz

$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor} + \text{Duty Cycle}$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

4.2 List of Test Instruments

				Calibration Date
Instrument Name	Model	Brand	Serial No.	Next time
EMI Receiver	8546A	HP	3520A00242	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/04
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	09/21/04
Pre-amplifier	PA1F	TRC	1FAC	05/20/05
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/05
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/05
Spectrum Analyzer	8564E	HP	3720A00840	07/23/04
Microwave Preamplifier	84125C	HP	US36433002	07/30/04
Horn Antenna	3115	EMCO	9104-3668	12/18/04
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	09/18/04
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	09/18/04
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	12/12/04
Pre-amplifier	PA2F	TRC	2F1GZ	03/20/05
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	03/20/05
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	03/20/05

4.3 Test Result of Radiated Emissions

The peak values of fundamental emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Testing room : Temperature : 25 ° C Humidity : 73 % RH

Fundamental Emissions

Channel	Frequency (MHz)	A. P. (H/V)	A.H. (m)	Table (degree)	Peak (dBì V/m)	Duty Cycle	True Value (dBì V/m)	Limit (dBì V)	Margin (dBì V)
Lowest	2402	H	1.00	273	99.54	-9.87	89.67	94.00	-4.33
		V	1.00	186	96.05	-9.87	86.18	94.00	-7.82
Middle	2437	H	1.00	227	98.81	-9.87	88.94	94.00	-5.06
		V	1.00	256	95.81	-9.87	85.94	94.00	-8.06
Highest	2477	H	1.00	329	97.59	-9.87	87.72	94.00	-6.28
		V	1.00	257	93.76	-9.87	83.89	94.00	-10.11

Note:

1. A. P. means antenna polarization, horizontal and vertical.
2. A. H. means antenna height.
3. Table means turntable turning position.
4. Amplitude means the fundamental emission measured.
5. True Value = Peak Value + Duty Cycle
6. Margin = True Value – limit

4.4 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following. (worst case)

Testing room : Temperature : 25 ° C Humidity : 73 % RH

Horizontal for 30MHz to 25GHz [Lowest CH, X-axis]

Radiated Emission				CF	Peak Value	Duty Cycle	True Value	FCC Class B	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Angle	(dB)	(dBμV/m)	(dB)	(dBμV/m)	Limit (Avg.) (dBμV/m)	Margin (dB)
93.05	33.87	1.00	95	-0.66	33.21	---	33.21	43.50	-10.29
100.32	29.66	1.00	147	-1.24	28.42	---	28.42	43.50	-15.08
941.80	21.51	1.00	202	16.20	37.71	---	37.71	46.00	-8.29
2081.25	35.16	1.00	69	8.32	43.48	---	43.48	53.96	-10.48
4805.00	43.94	1.00	264	3.69	47.63	-9.87	37.76	53.96	-16.20
7203.54	50.11	1.00	54	9.91	60.02	-9.87	50.15	53.96	-3.81
9608.12	37.94	1.00	283	11.47	49.41	-9.87	39.54	53.96	-14.42

Vertical for 30MHz to 25GHz [Lowest CH, Y-axis]

Radiated Emission				CF	Peak Value	Duty Cycle	True Value	FCC Class B	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Angle	(dB)	(dBμV/m)	(dB)	(dBμV/m)	Limit (Avg.) (dBμV/m)	Margin (dB)
39.70	25.84	1.00	260	5.83	31.67	---	31.67	40.00	-8.33
94.26	25.00	1.00	265	-0.76	24.24	---	24.24	43.50	-19.26
288.26	33.22	1.00	178	-3.80	29.42	---	29.42	46.00	-16.58
4805.00	41.60	1.00	179	3.69	45.29	-9.87	35.42	53.96	-18.54
7203.54	47.44	1.00	48	9.91	57.35	-9.87	47.48	53.96	-6.48
9608.12	38.44	1.00	100	11.47	49.91	-9.87	40.04	53.96	-13.92
12006.67	39.61	1.00	204	10.03	49.64	-9.87	39.77	53.96	-14.19

Horizontal for 30MHz to 25GHz [Middle CH, X-axis]

Radiated Emission				CF	Peak Value	Duty Cycle	True Value	FCC Class B	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Angle	(dB)	(dBμV/m)	(dB)	(dBμV/m)	Limit (Avg.) (dBμV/m)	Margin (dB)
39.70	20.46	1.00	52	5.83	26.29	---	26.29	40.00	-13.71
93.05	32.52	1.00	69	-0.66	31.86	---	31.86	43.50	-11.64
100.32	28.60	1.00	4	-1.24	27.36	---	27.36	43.50	-16.14
709.00	21.52	1.00	259	9.73	31.25	---	31.25	46.00	-14.75
1600.00	34.67	1.00	279	14.33	49.00	---	49.00	53.96	-4.96
7312.29	49.77	1.00	37	10.30	60.07	-9.87	50.20	53.96	-3.76
9747.08	38.60	1.00	19	11.89	50.49	-9.87	40.62	53.96	-13.34
12181.87	40.94	1.00	104	9.72	50.66	-9.87	40.79	53.96	-13.17

Vertical for 30MHz to 25GHz [Middle CH, Y-axis]

Radiated Emission				CF	Peak Value	Duty Cycle	True Value	FCC Class B	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Angle	(dB)	(dBμV/m)	(dB)	(dBμV/m)	Limit (Avg.) (dBμV/m)	Margin (dB)
39.70	27.43	1.00	4	5.83	33.26	---	33.26	40.00	-6.74
93.05	24.99	1.00	36	-0.66	24.33	---	24.33	43.50	-19.17
288.26	33.22	1.00	153	-3.80	29.42	---	29.42	46.00	-16.58
1554.17	34.33	1.00	171	15.05	49.38	---	49.38	53.96	-4.58
4871.46	43.27	1.00	141	3.95	47.22	-9.87	37.35	53.96	-16.61
7312.29	46.77	1.00	128	10.30	57.07	-9.87	47.20	53.96	-6.76
9753.12	39.27	1.00	20	11.90	51.17	-9.87	41.30	53.96	-12.66
12181.87	41.94	1.00	21	9.72	51.66	-9.87	41.79	53.96	-12.17

Horizontal for 30MHz to 25GHz [Highest CH, X-axis]

Radiated Emission				CF	Peak Value	Duty Cycle	True Value	FCC Class B	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Angle	(dB)	(dBμV/m)	(dB)	(dBμV/m)	Limit (Avg.) (dBμV/m)	Margin (dB)
94.26	32.67	1.00	69	-0.76	31.91	---	31.91	43.50	-11.59
100.32	30.99	1.00	217	-1.24	29.75	---	29.75	43.50	-13.75
810.85	21.47	1.00	205	11.95	33.42	---	33.42	46.00	-12.58
4956.04	49.28	1.00	292	4.23	53.51	-9.87	43.64	53.96	-10.32
7427.08	46.44	1.00	44	10.35	56.79	-9.87	46.92	53.96	-7.04
9910.21	38.44	1.00	38	11.73	50.17	-9.87	40.30	53.96	-13.66

Vertical for 30MHz to 25GHz [Highest CH, Y-axis]

Radiated Emission				CF	Peak Value	Duty Cycle	True Value	FCC Class B	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Angle	(dB)	(dBμV/m)	(dB)	(dBμV/m)	Limit (Avg.) (dBμV/m)	Margin (dB)
39.70	25.06	1.00	107	5.83	30.89	---	30.89	40.00	-9.11
94.26	27.15	1.00	298	-0.76	26.39	---	26.39	43.50	-17.11
100.32	24.97	1.00	84	-1.24	23.73	---	23.73	43.50	-19.77
288.26	33.29	1.00	169	-3.80	29.49	---	29.49	46.00	-16.51
1645.83	35.16	1.00	266	13.62	48.78	---	48.78	53.96	-5.18
4956.04	46.94	1.00	186	4.23	51.17	-9.87	41.30	53.96	-12.66
7433.12	45.28	1.00	132	10.34	55.62	-9.87	45.75	53.96	-8.21
9910.21	36.94	1.00	85	11.73	48.67	-9.87	38.80	53.96	-15.16
12381.25	39.60	1.00	82	9.11	48.71	-9.87	38.84	53.96	-15.12

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Correction factor = Antenna factor + (Cable Loss – Amplitude gain)
3. Peak Value = Reading Amplitude + Correction Factors
4. True Value = Peak Value + Duty Cycle


4.5 Test Result of the Bandedge

§ 15.249 (c) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 50dB below the highest emission level measured.* If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a).* (Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz)

The following pages show our observations referring to the lowest channel and highest channel respectively. Test Condition & Setup: same as 4.1 to 4.2.

Lowest

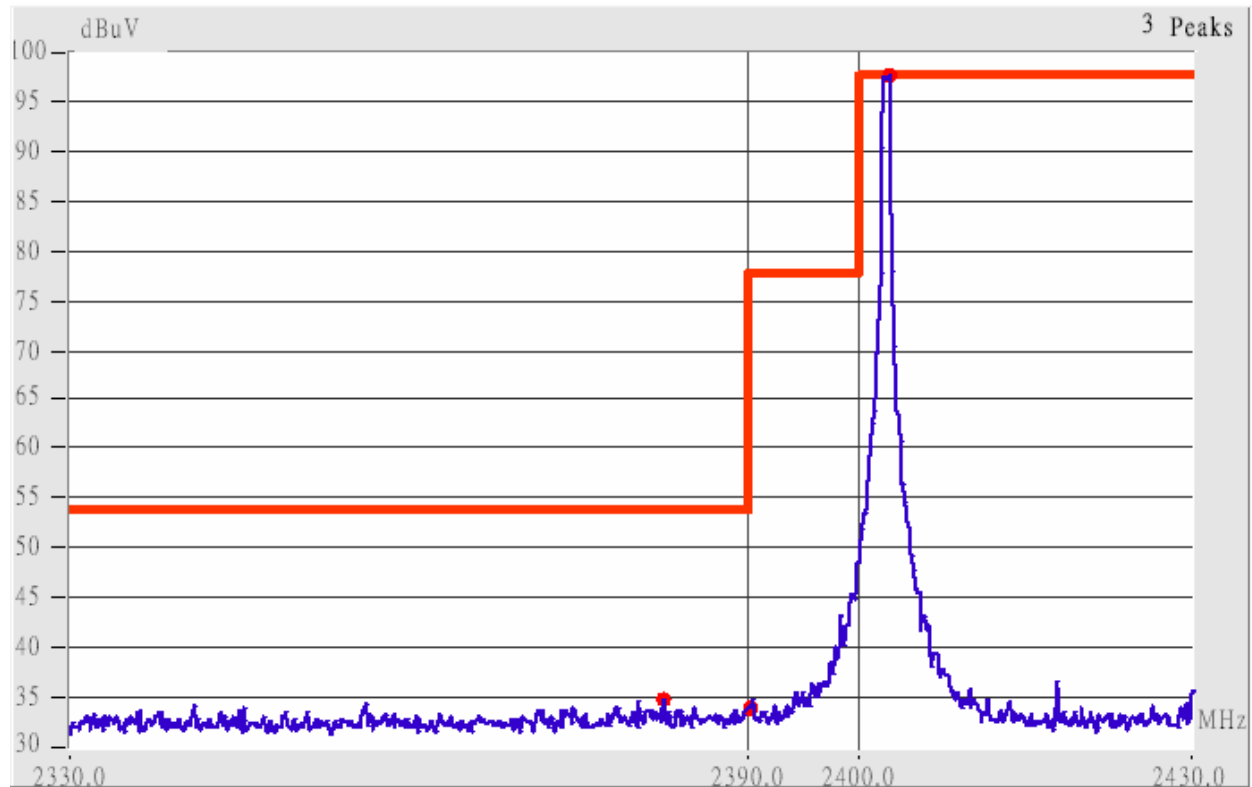


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of lowest channel.

1. The lobe left by the fundamental side is already 50dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		FCC Class B		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2386.28	Hor	1.00	275	9.17	45.00	---	73.96	53.96	-8.96
2390.02	Hor	1.00	10	9.18	43.02	---	73.96	53.96	-10.94
2356.22	Ver	1.00	322	9.09	44.42	---	73.96	53.96	-9.54
2390.02	Ver	1.00	19	9.18	43.02	---	73.96	53.96	-10.94

Highest

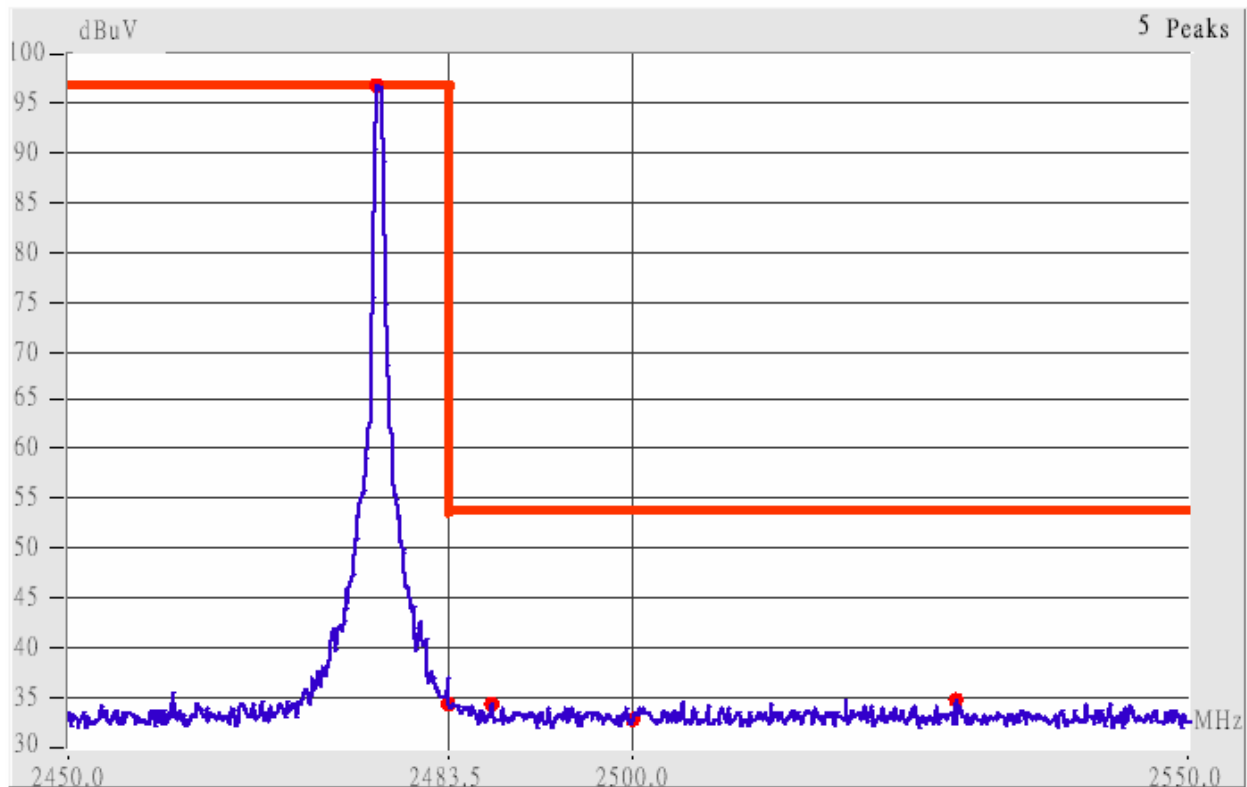

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of highest channel.

1. The lobe right by the fundamental side is already 50dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.50	Hor	1.00	355	9.44	44.94	---	73.96	53.96	-9.02
2484.08	Hor	1.00	355	9.45	45.78	---	73.96	53.96	-8.18
2504.79	Hor	1.00	197	9.50	44.67	---	73.96	53.96	-9.29
2488.87	Ver	1.00	159	9.46	45.29	---	73.96	53.96	-8.67
2500.01	Ver	1.00	164	9.49	43.16	---	73.96	53.96	-10.80
2511.15	Ver	1.00	358	9.51	45.18	---	73.96	53.96	-8.78