




FCC RADIO TEST REPORT

FCC ID : PU5-TP00139AM
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00139A
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist,
New Taipei City 221, Taiwan
Manufacturer : Lenovo PC HK Limited.
23/F, Lincoln House, Taikoo Place, 979 King's
Road, Quarry Bay, Hong Kong, China
Standard : FCC Part 15 Subpart C §15.247

Equipment: Murata LBEE5QG2CX tested inside of Lenovo Notebook Computer.

The product was received on Dec. 16, 2021 and testing was performed from Feb. 19, 2022 to Feb. 28, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
4 List of Measuring Equipment	35
5 Uncertainty of Evaluation.....	37
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR1D1645B	01	Initial issue of report	Mar. 01, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	5.63 dB under the limit at 2312.240 MHz
3.6	15.207	AC Conducted Emission	Pass	11.47 dB under the limit at 0.159 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Clio Lo

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00139A
FCC ID	PU5-TP00139AM
Sample 1	EUT with INPAQ Antenna
Sample 2	EUT with WNC Antenna
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE

Remark:

1. The EUT's information above is declared by manufacturer.
2. Equipment: Murata LBEE5QG2CX tested inside of Lenovo Notebook Computer.

Antenna Information			
Antenna 1	Manufacturer	INPAQ	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Part number	025.901YK.0011	025.901YL.0011
	Peak gain (dBi)	Main Antenna : WLAN (2.4G): 2.48	Aux. Antenna : Bluetooth: 2.45 WLAN (2.4G): 2.45
Antenna 2	Manufacturer	WNC	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Part number	025.901YK.0001	025.901YL.0001
	Peak gain (dBi)	Main Antenna : WLAN (2.4G): 2.62	Aux. Antenna : Bluetooth: 2.54 WLAN (2.4G): 2.54

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth – LE (1Mbps): 5.30 dBm / 0.0034 W Bluetooth – LE (2Mbps): 5.40 dBm / 0.0035 W
99% Occupied Bandwidth	Bluetooth – LE (1Mbps): 1.015 MHz Bluetooth – LE (2Mbps): 1.998 MHz
Type of Modulation	Bluetooth LE : GFSK



1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, 03CH13-HY, CO07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + Earphone + Adapter 2 + USB Cable (Data Link with HD) for Sample 1
Remark: - For Radiated Test Cases, the tests were performed with Adapter 2 and Sample 2. - Data Link with USB HD means data application transferred mode between EUT and USB HD.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	GT-AXE11000	MSQ-RTAXJF00	N/A	Unshielded, 1.8m
3.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
4.	Earphone	SONY	MH750	Verification	Unshielded, 1.8 m	N/A
5.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Notebook	msi	MS-1552	PD9AX201NG	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	USB HD	WD	WDBGPU0010BBL	FCC DoC	Shielded, 1m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT 4.0.00195.0" was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

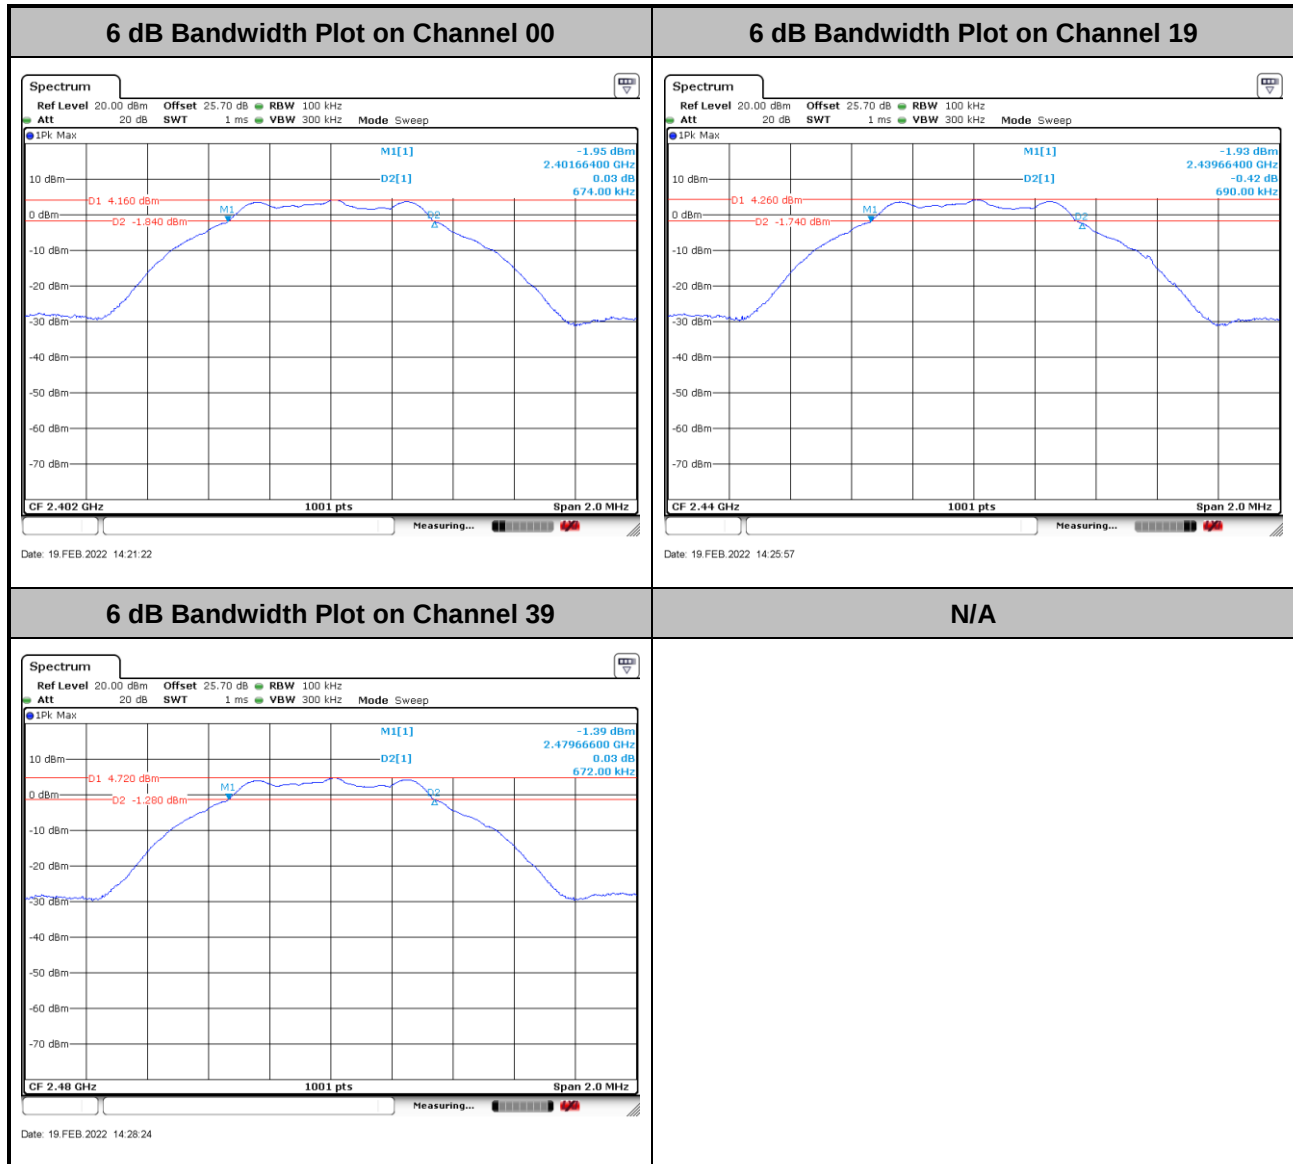




3.1.5 Test Result of 6dB Bandwidth

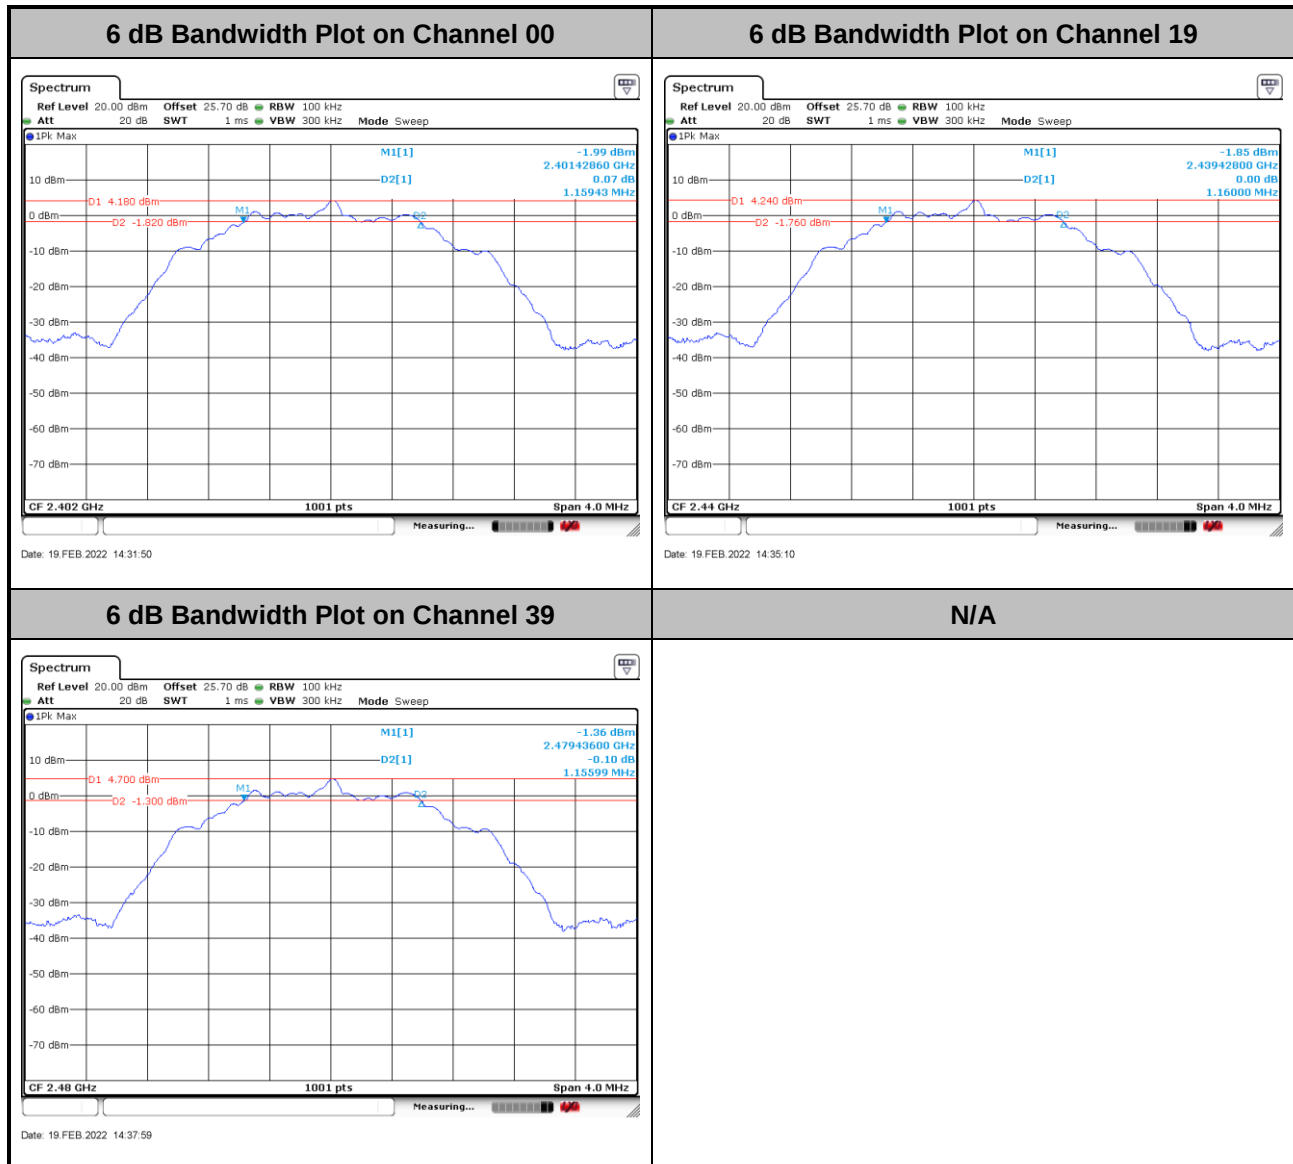
Please refer to Appendix A.

<1Mbps>





<2Mbps>

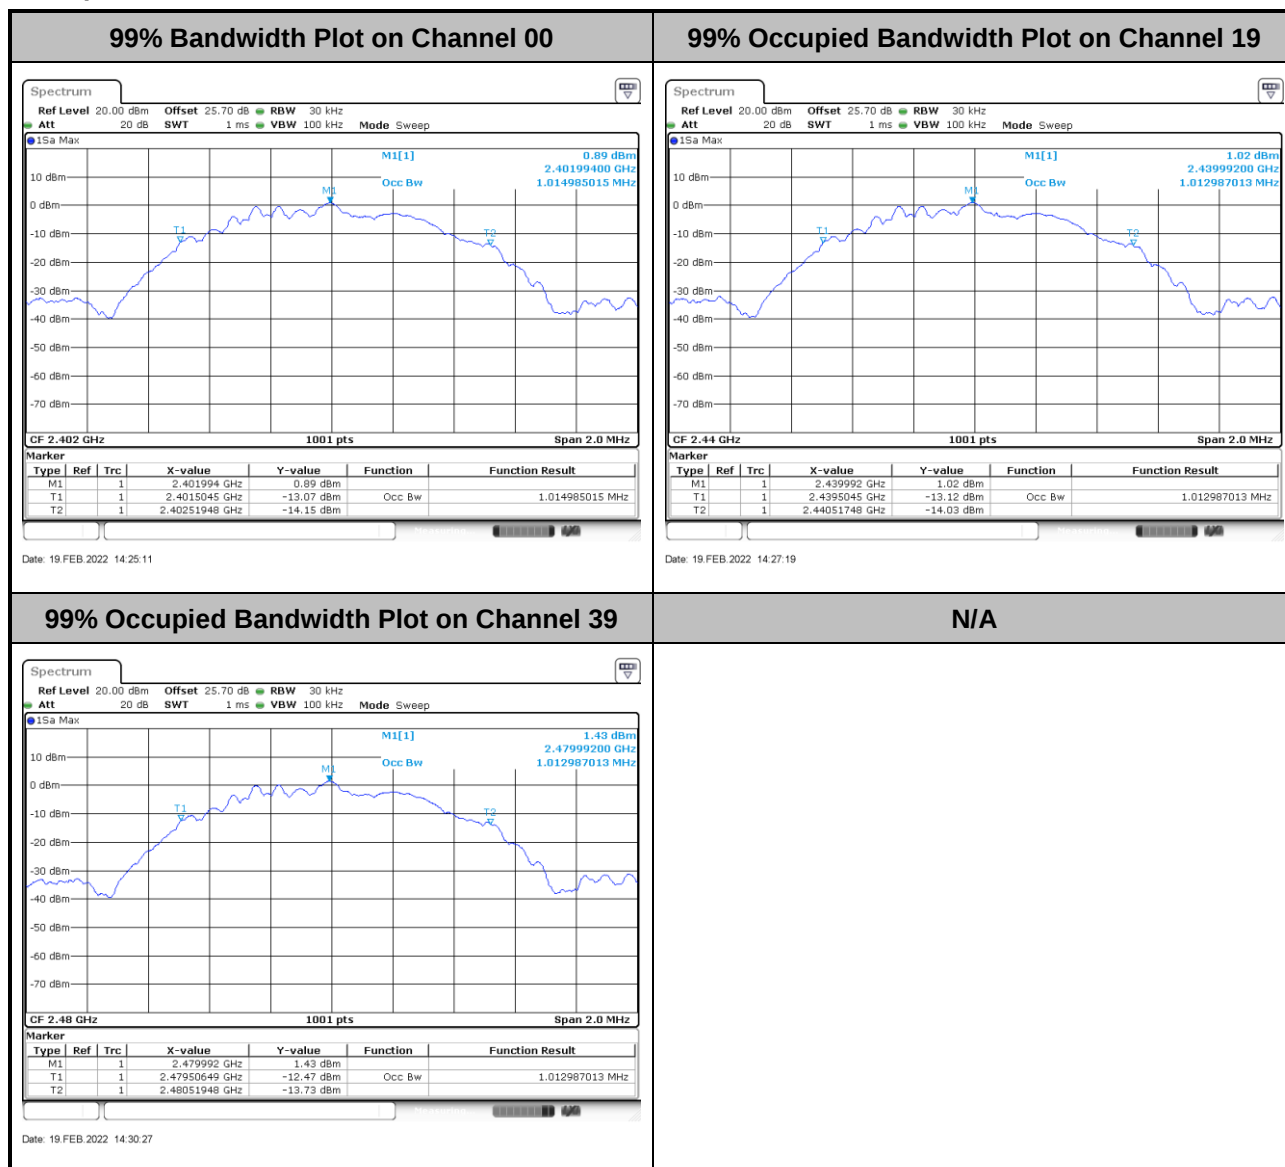




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

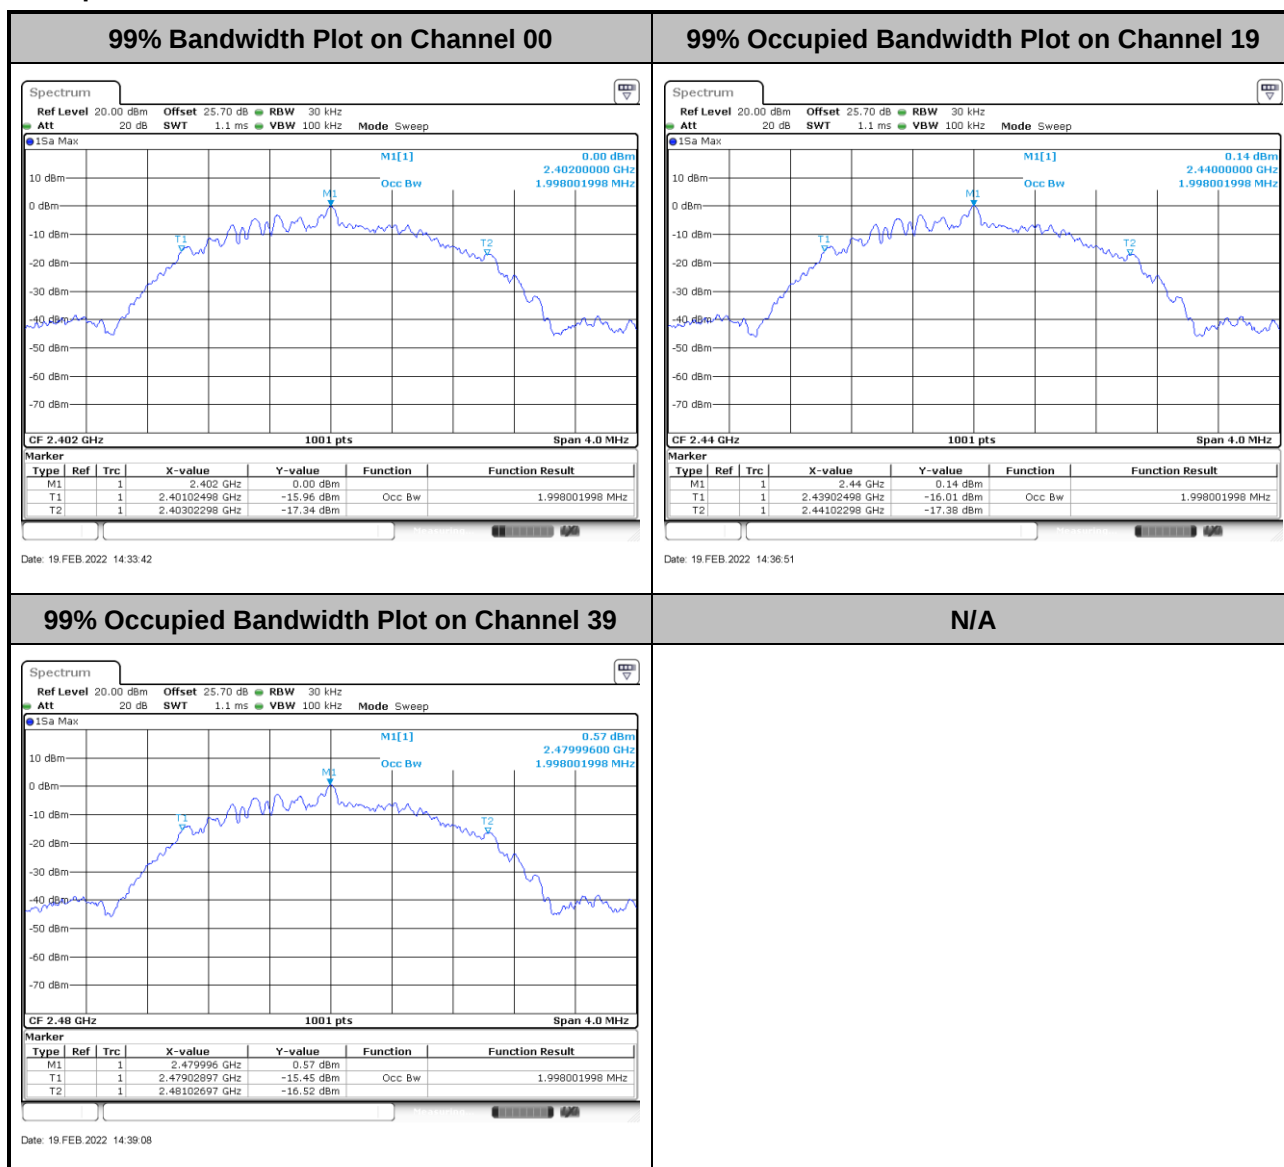
<1Mbps>



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

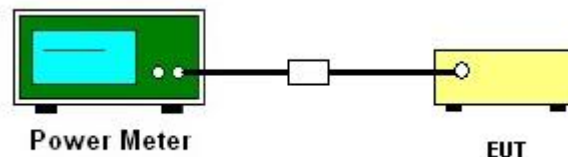
3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

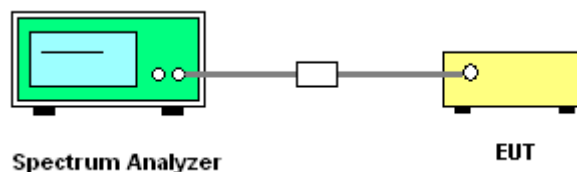
3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



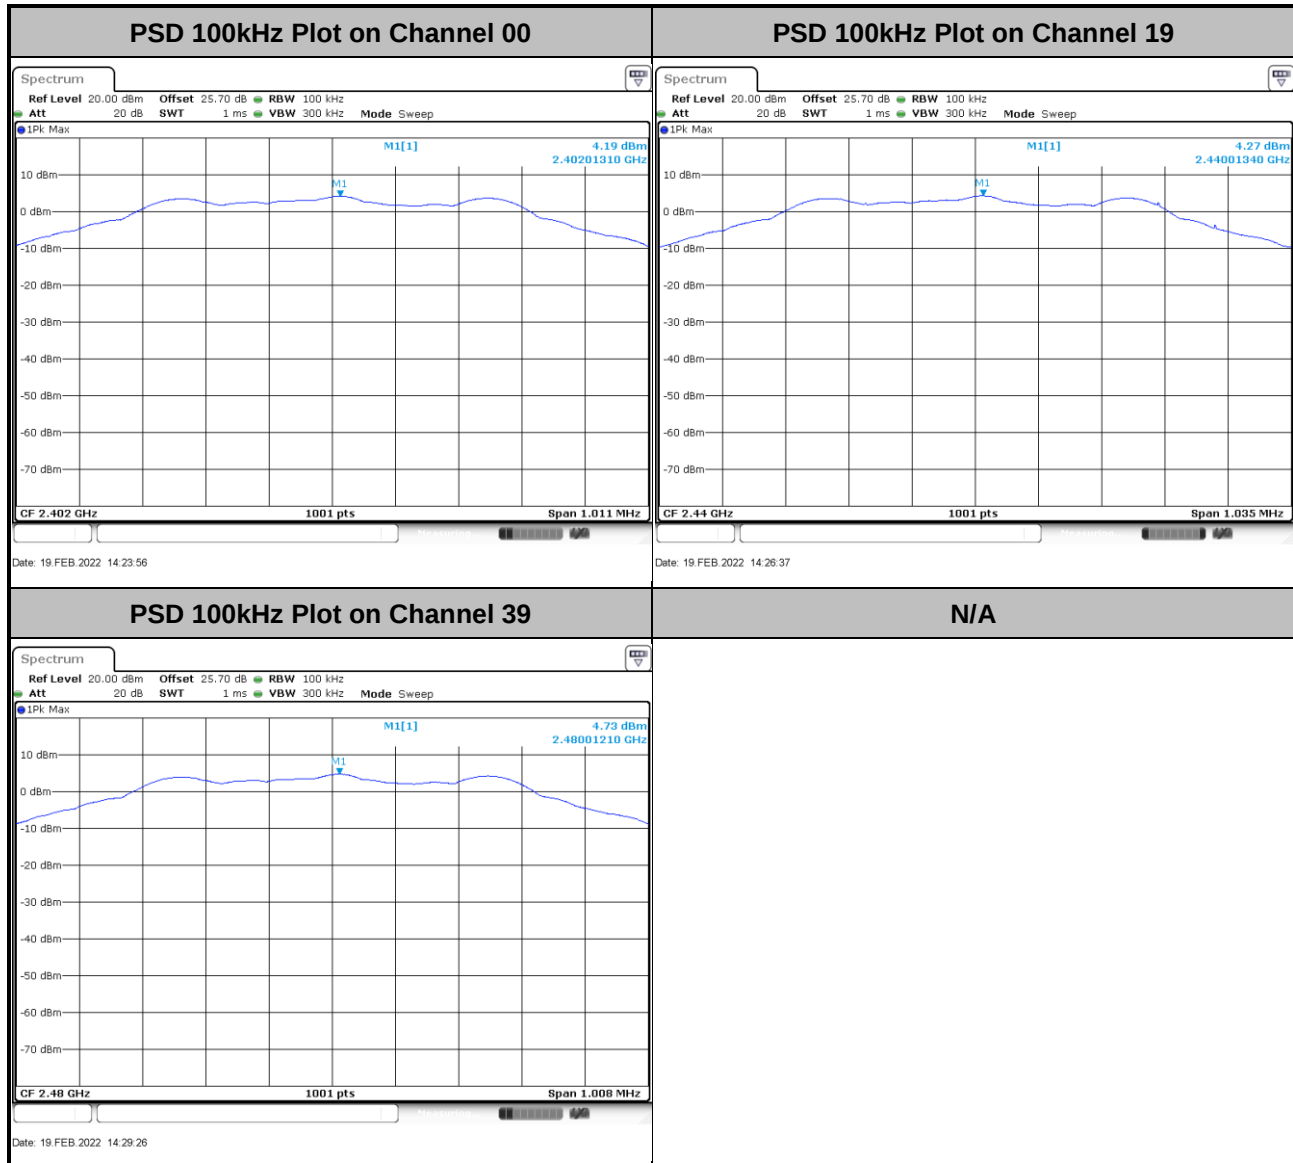
3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



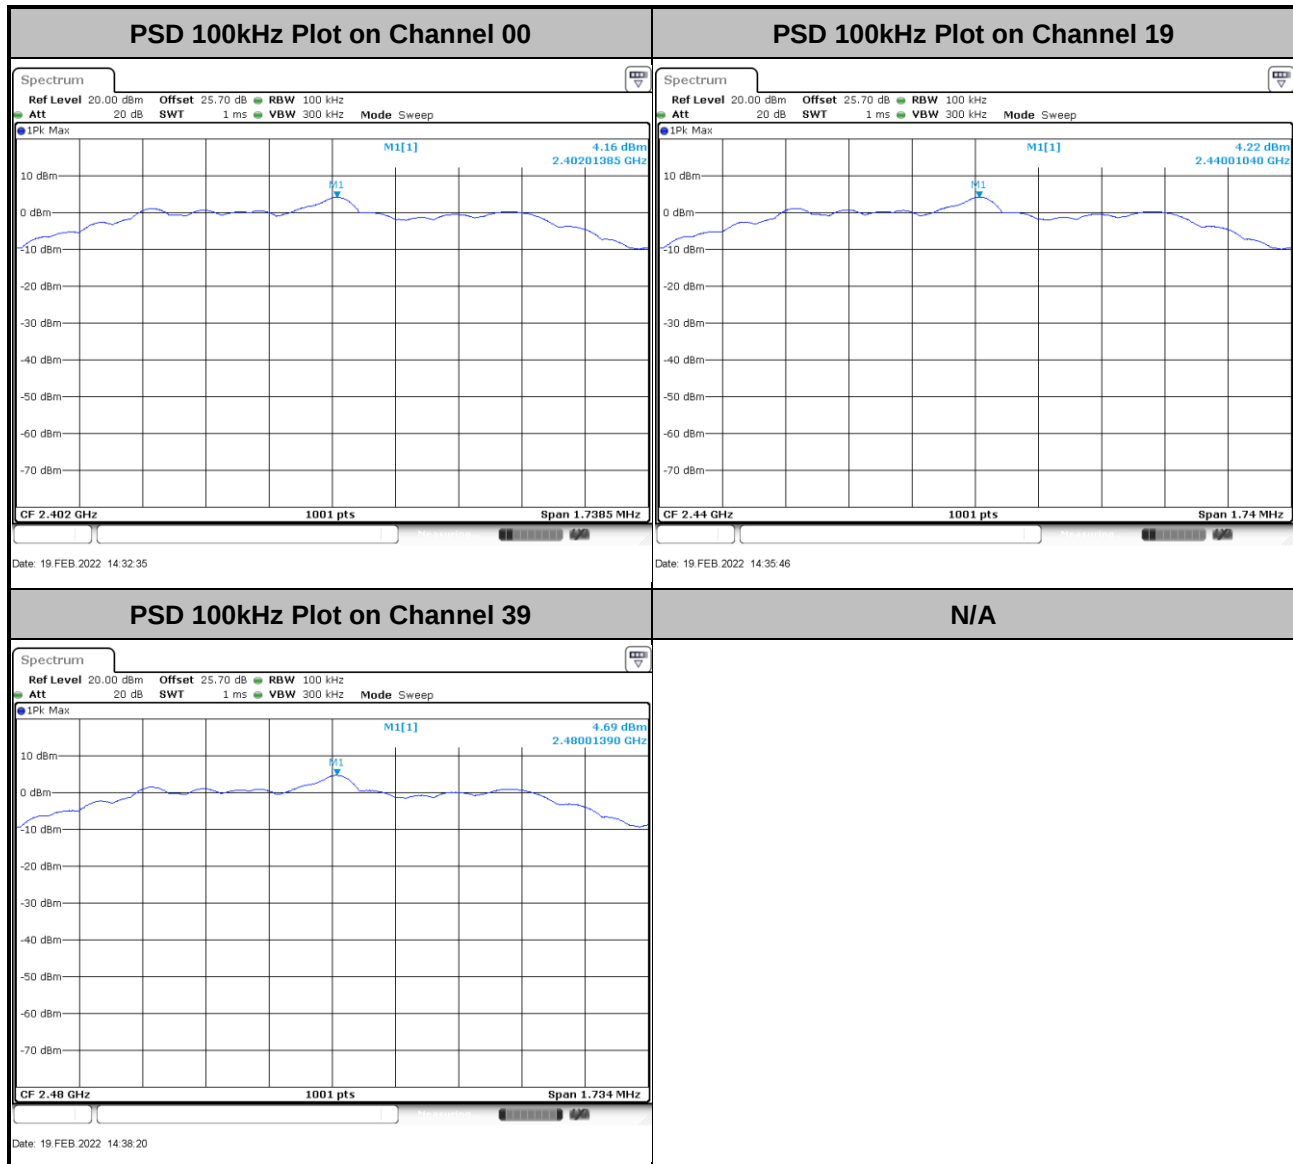
3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>





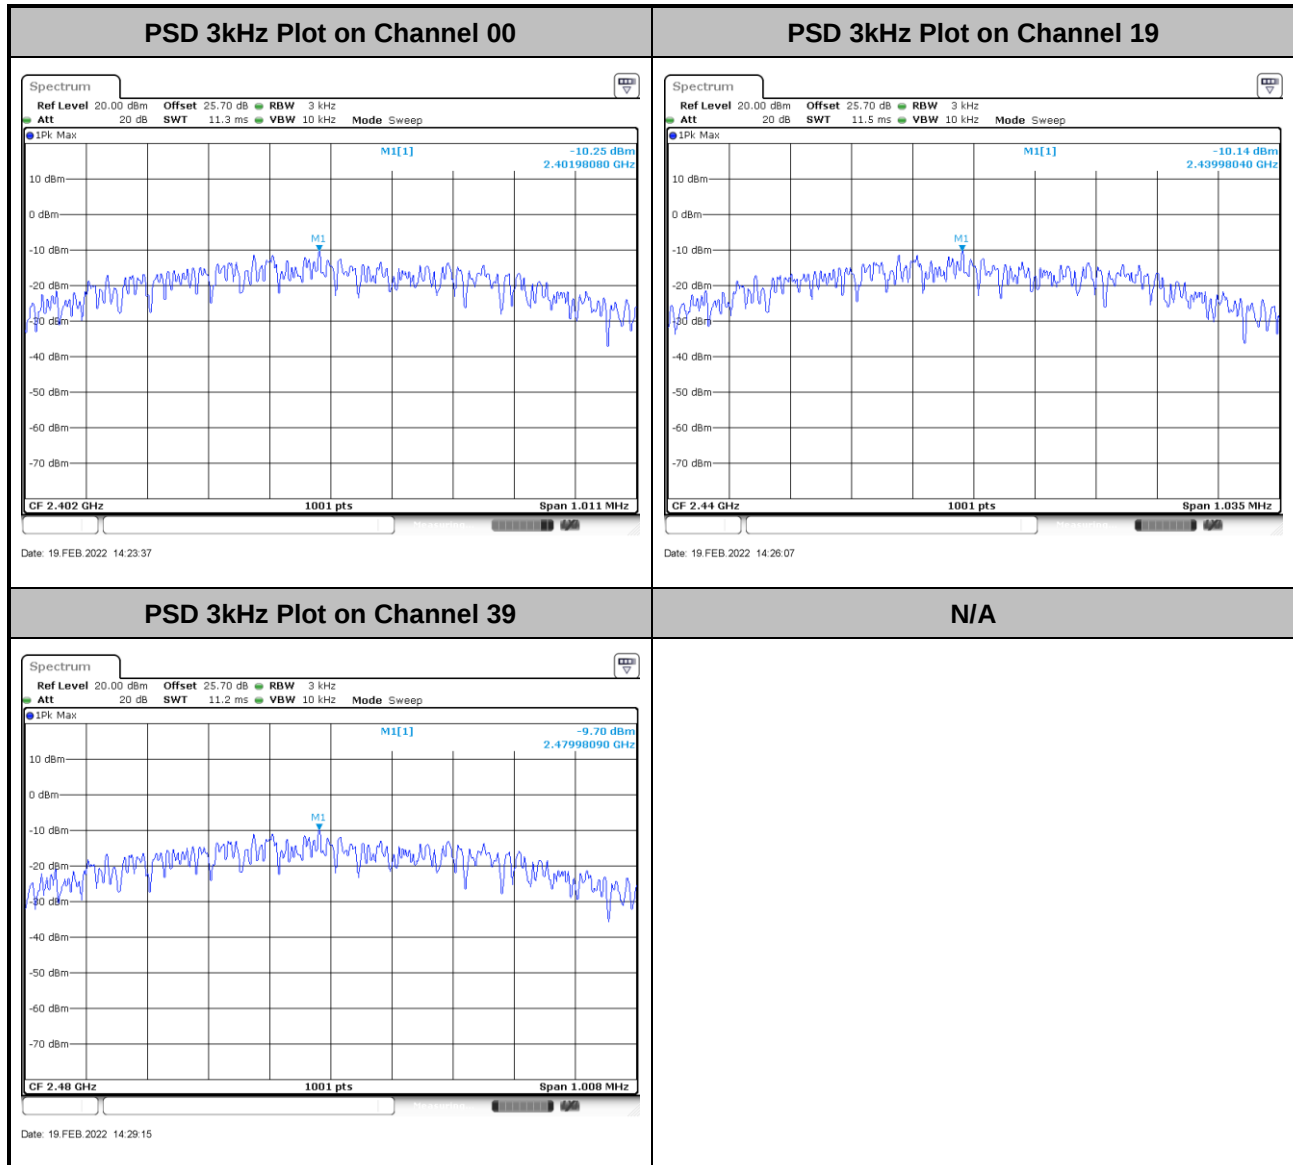
<2Mbps>





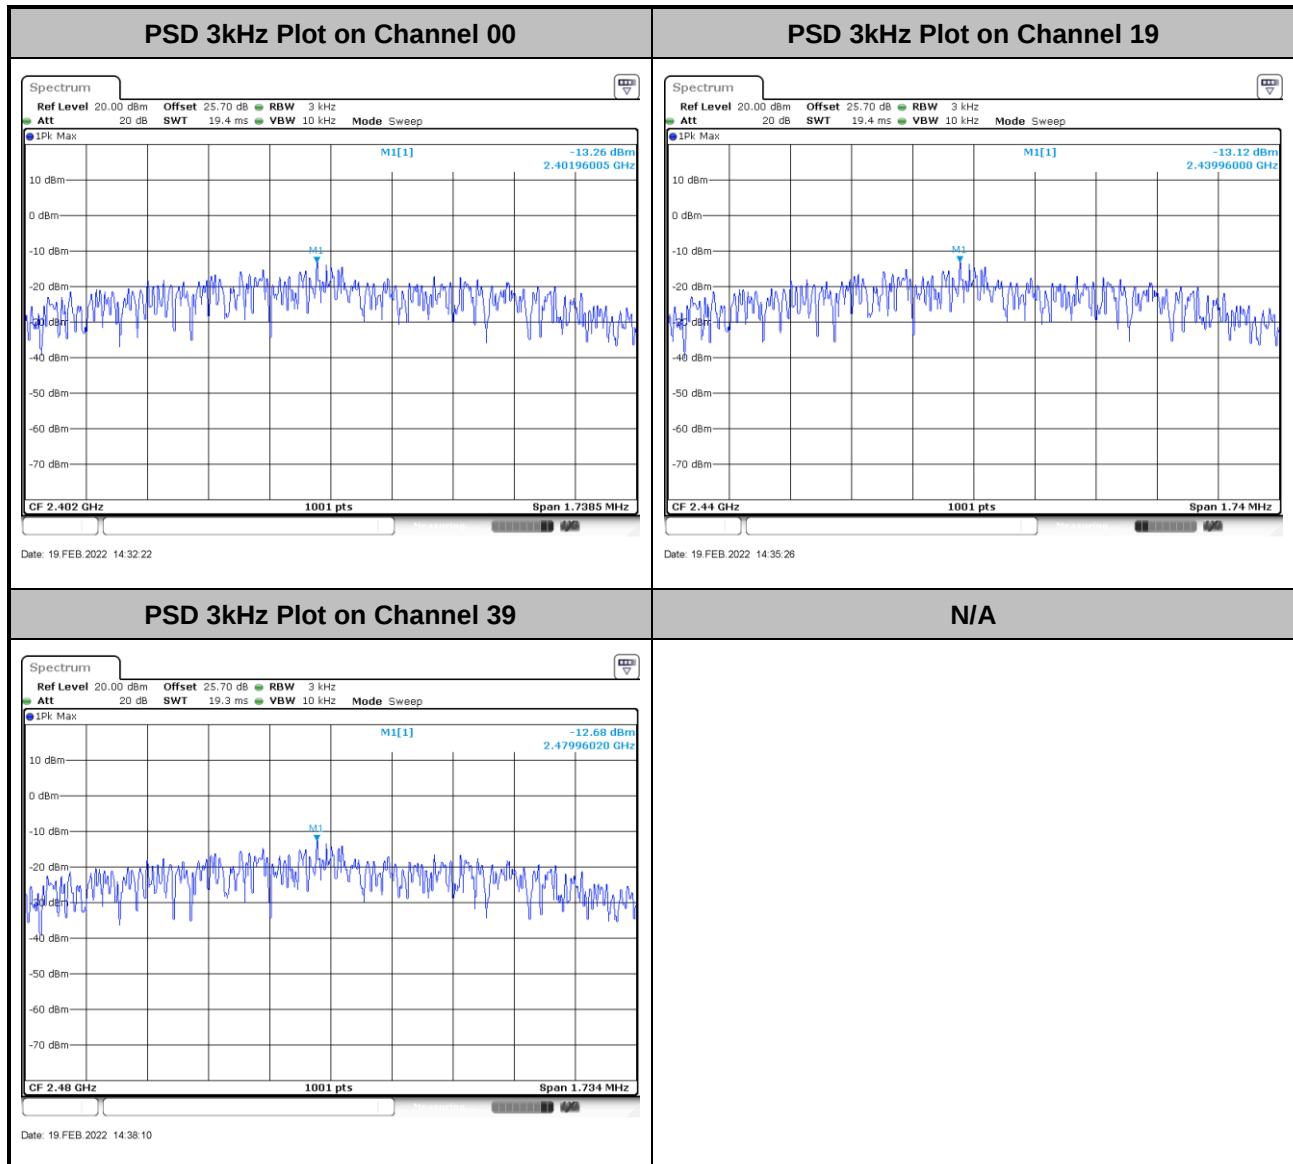
3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>





<2Mbps>



3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

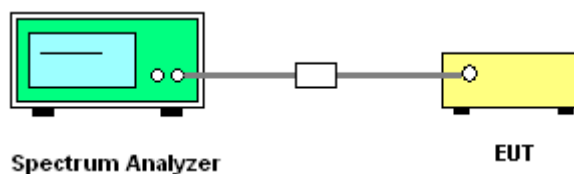
3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

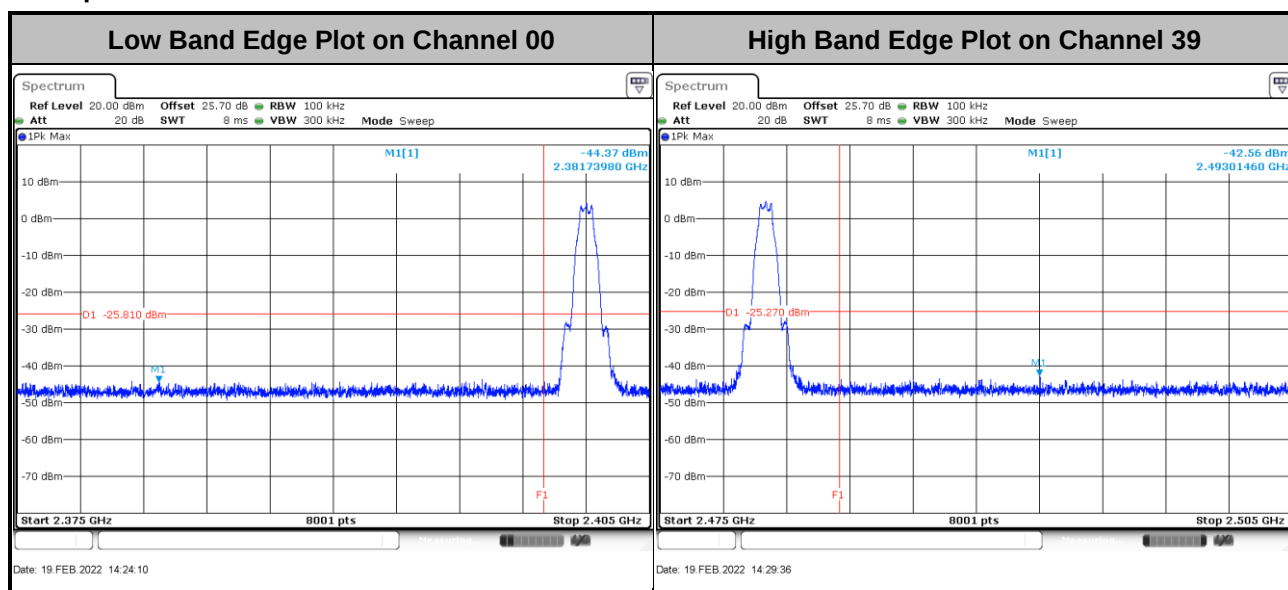
3.4.4 Test Setup



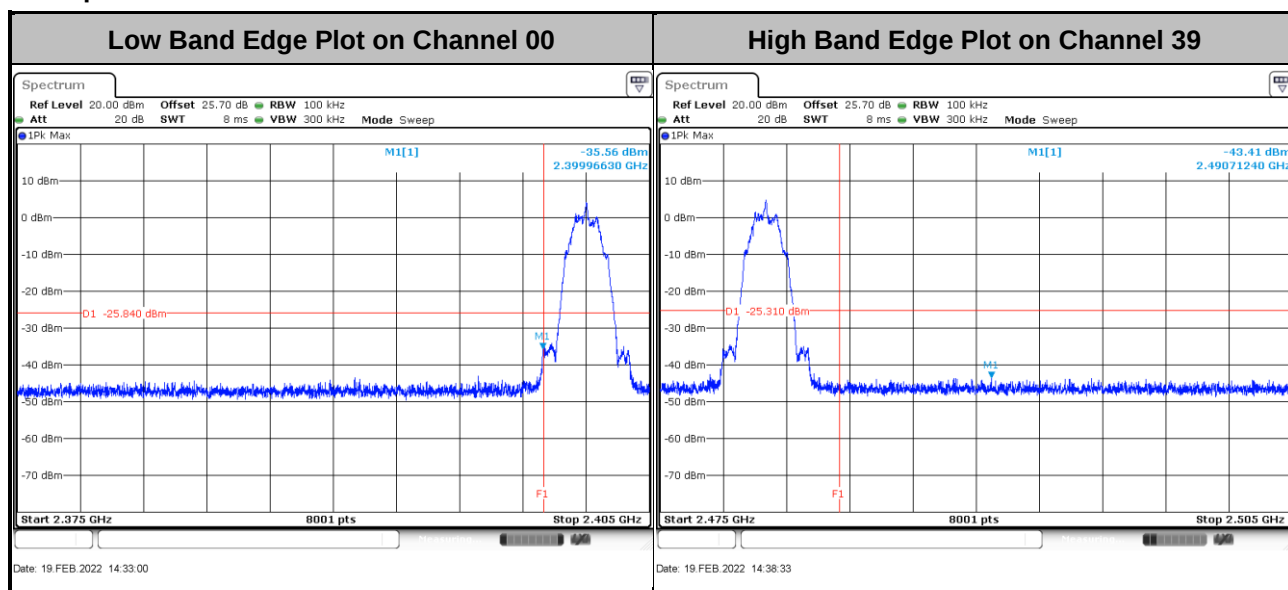


3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>



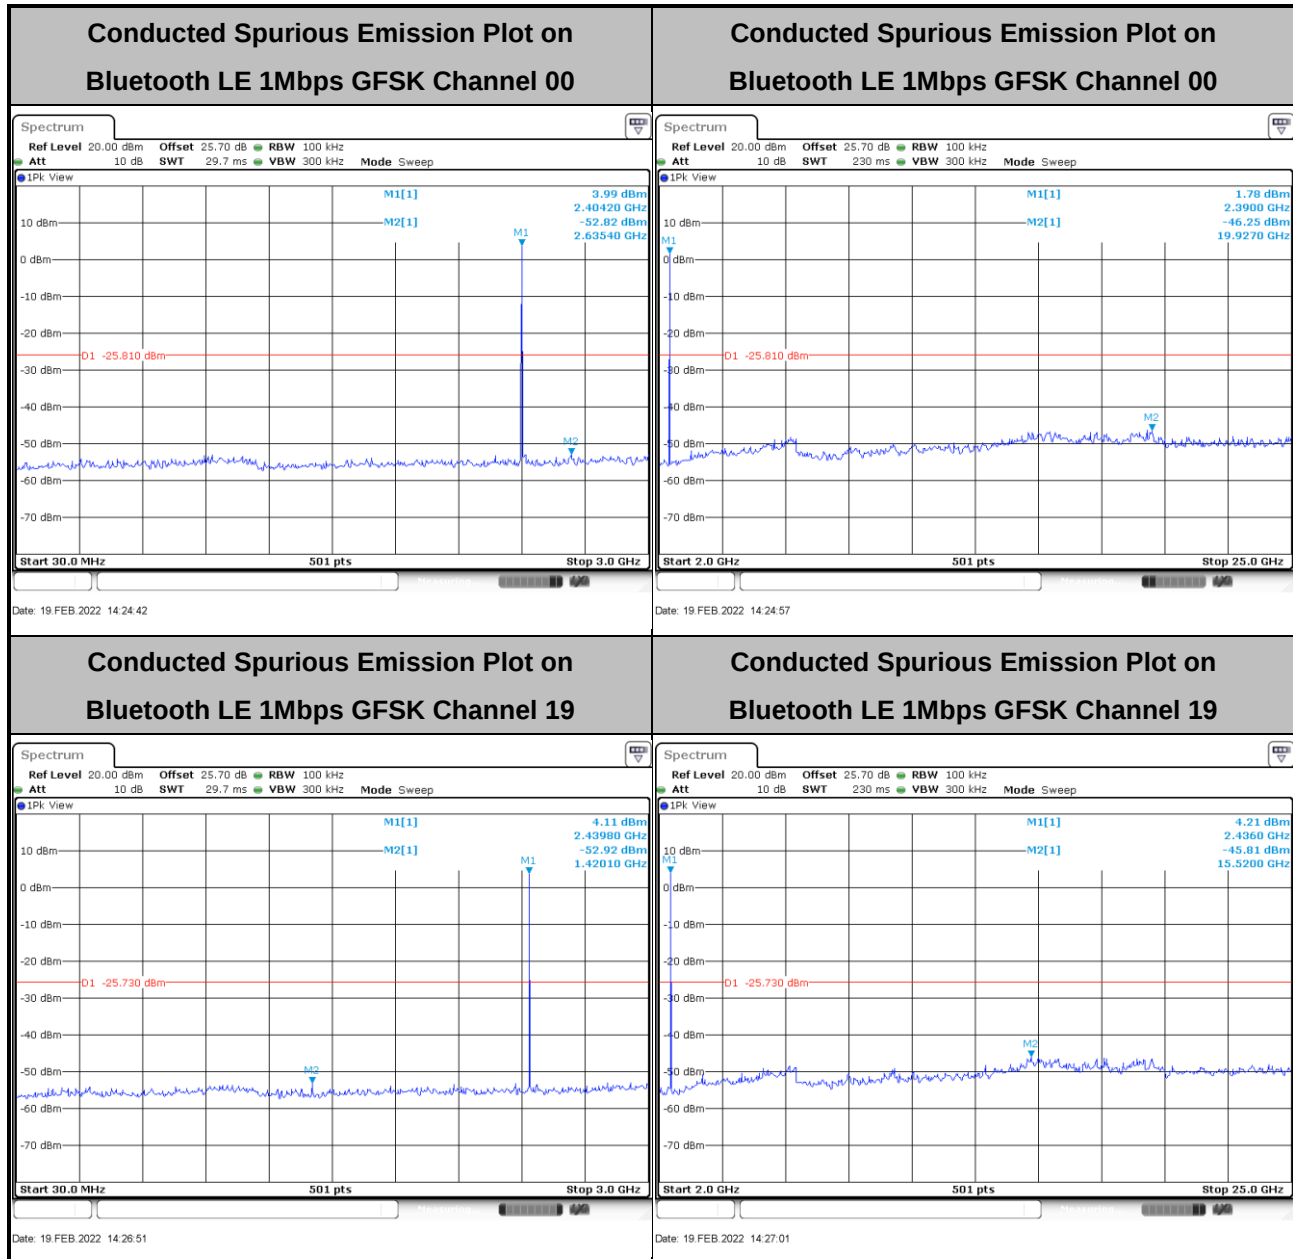
<2Mbps>

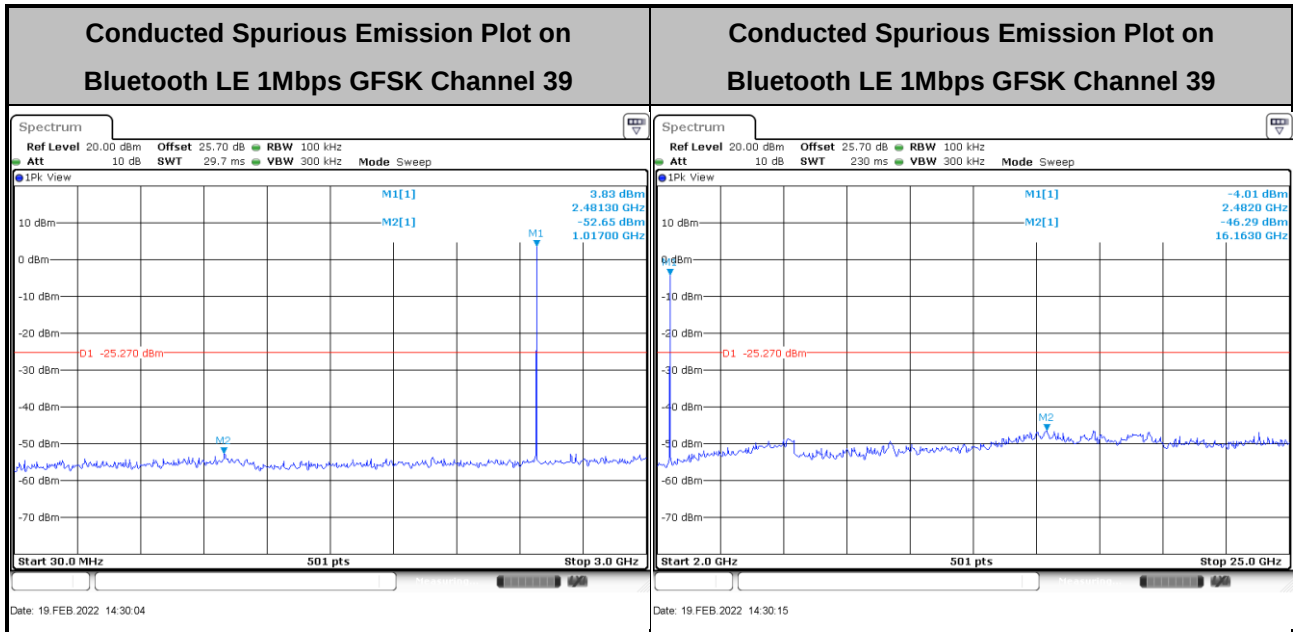




3.4.6 Test Result of Conducted Spurious Emission Plots

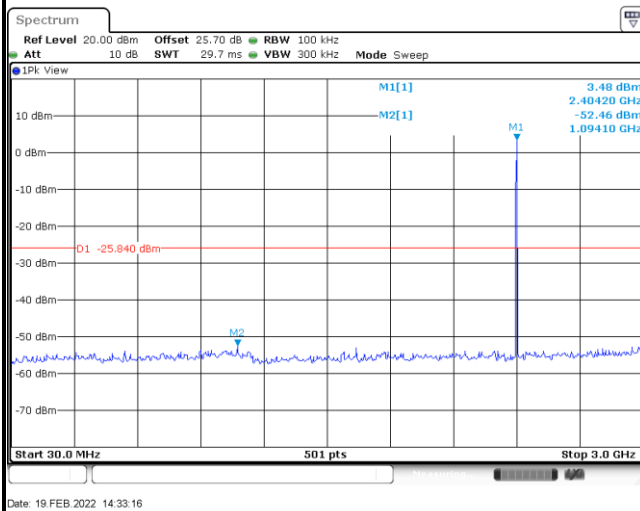
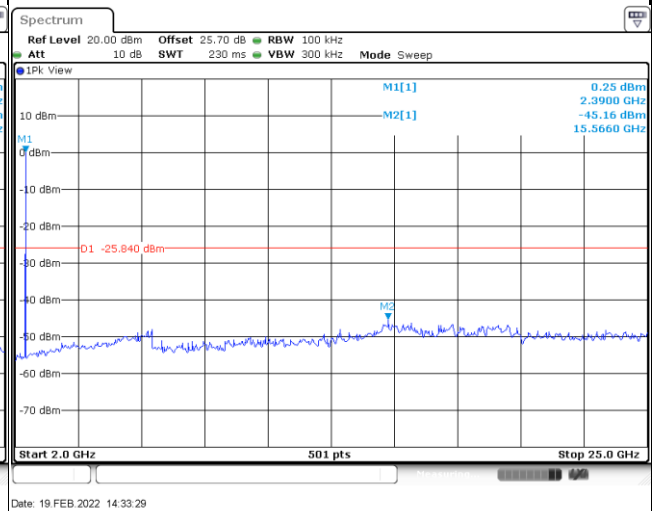
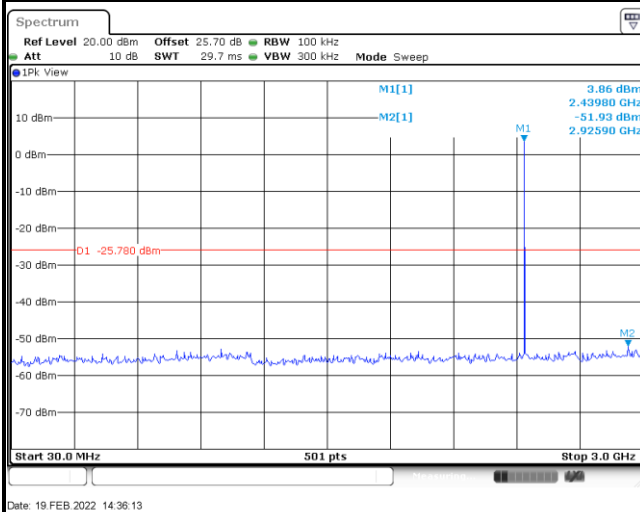
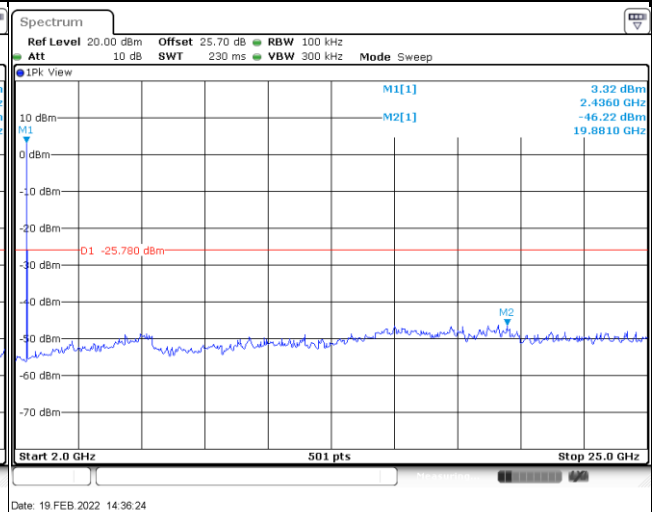
<1Mbps>

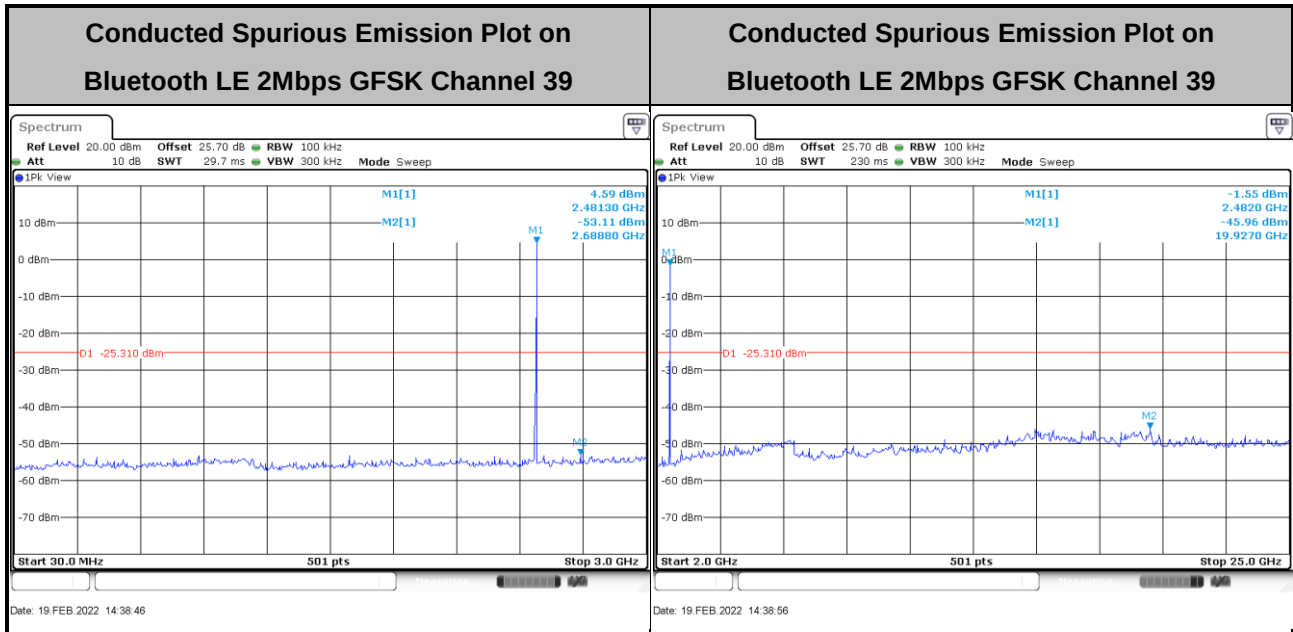






<2Mbps>

Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

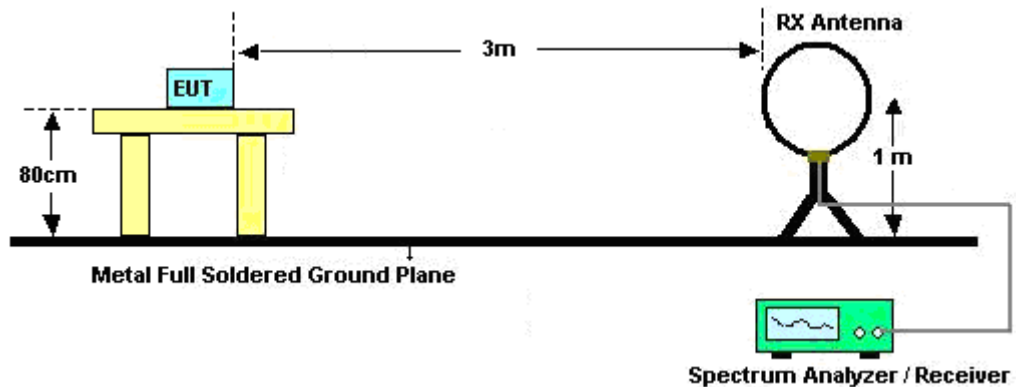
Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

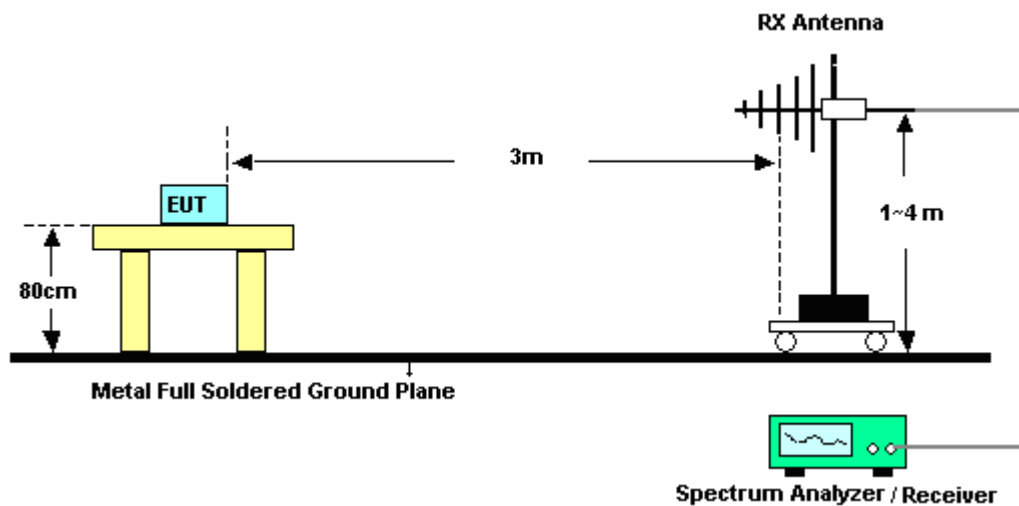
1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

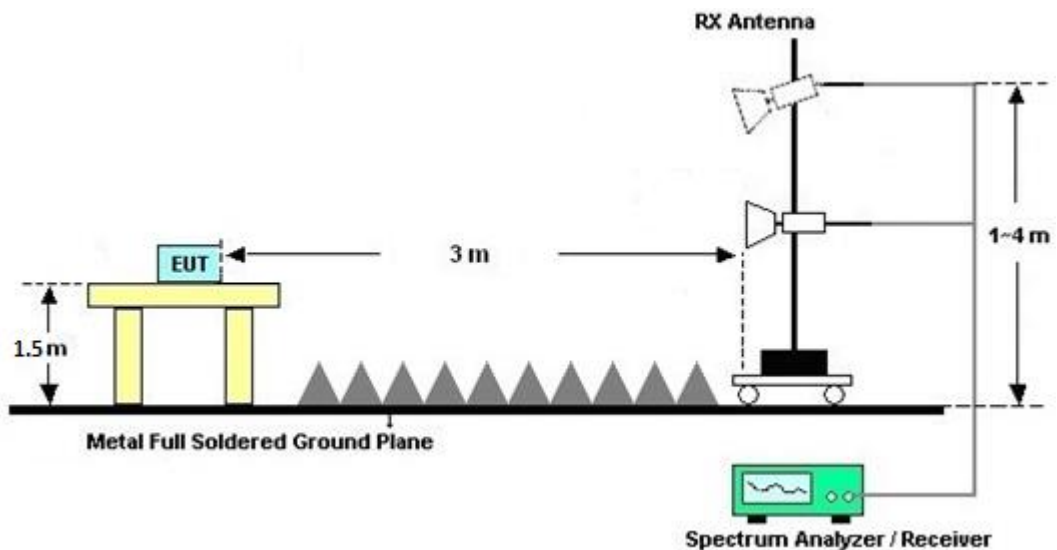
For radiated test below 30MHz



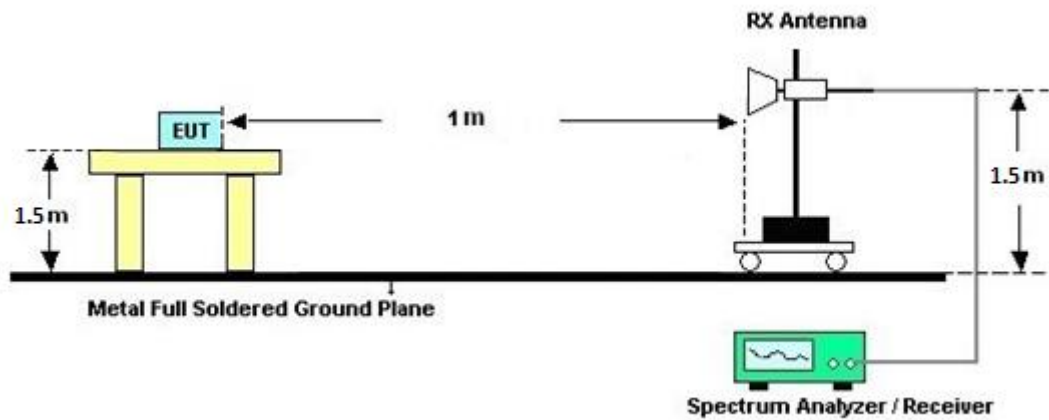
For radiated test from 30MHz to 1GHz



For radiated test from 1GHz to 18GHz



For radiated test above 18GHz



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

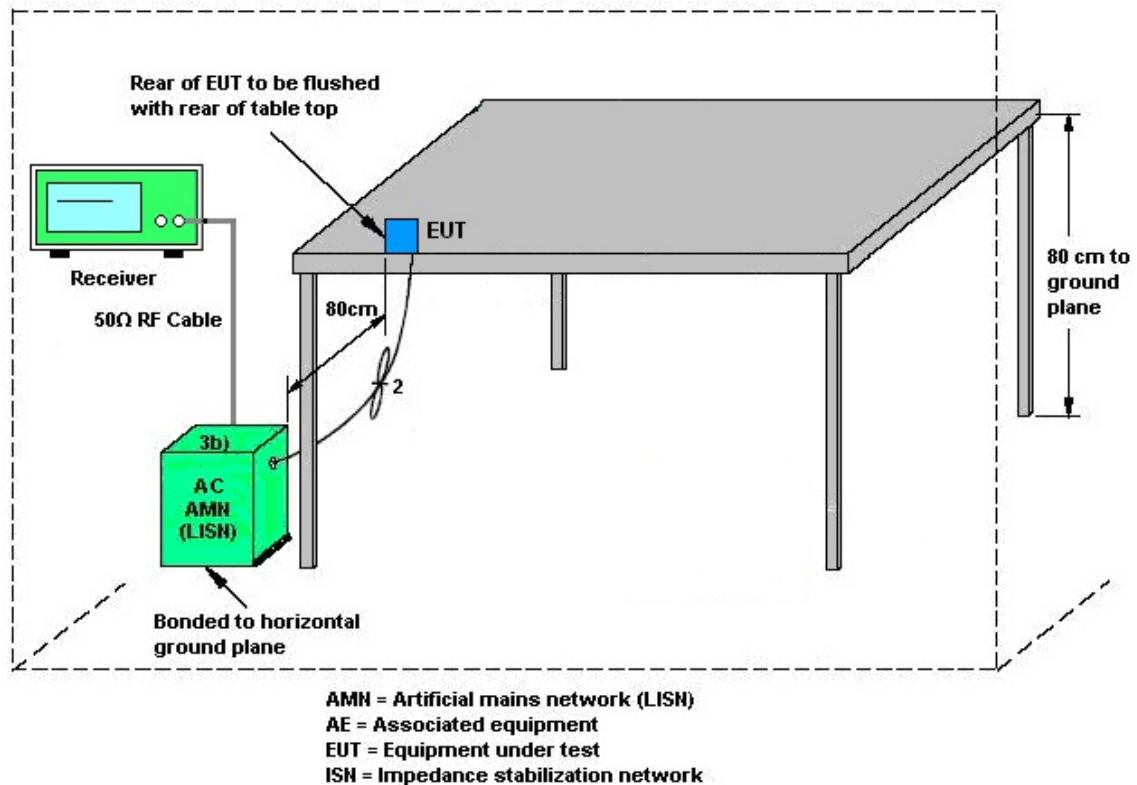
3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Sep. 07, 2021	Feb. 21, 2022~ Feb. 28, 2022	Sep. 06, 2022	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 28, 2021	Feb. 21, 2022~ Feb. 28, 2022	Apr. 27, 2022	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Jul. 13, 2021	Feb. 21, 2022~ Feb. 28, 2022	Jul. 12, 2022	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00993	18GHz~40GHz	Nov. 30, 2021	Feb. 21, 2022~ Feb. 28, 2022	Nov. 29, 2022	Radiation (03CH13-HY)
Amplifier	Sonoma-Instru ment	310 N	187282	9kHz~1GHz	Dec. 15, 2021	Feb. 21, 2022~ Feb. 28, 2022	Dec. 14, 2022	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 18, 2021	Feb. 21, 2022~ Feb. 28, 2022	May 17, 2022	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Oct. 26, 2021	Feb. 21, 2022~ Feb. 28, 2022	Oct. 25, 2022	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Feb. 21, 2022~ Feb. 28, 2022	Jun. 21, 2022	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 18, 2021	Feb. 21, 2022~ Feb. 28, 2022	Mar. 17, 2022	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303B	TP200889	N/A	Sep. 30, 2021	Feb. 21, 2022~ Feb. 28, 2022	Sep. 29, 2022	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Feb. 21, 2022~ Feb. 28, 2022	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Feb. 21, 2022~ Feb. 28, 2022	N/A	Radiation (03CH13-HY)
Software	Audix	E3 6.2009-8-24	RK-000992	N/A	N/A	Feb. 21, 2022~ Feb. 28, 2022	N/A	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 09, 2022	Feb. 21, 2022~ Feb. 28, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 09, 2022	Feb. 21, 2022~ Feb. 28, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 09, 2022	Feb. 21, 2022~ Feb. 28, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2, 804012/2	18GHz~40GHz	Jan. 04, 2022	Feb. 21, 2022~ Feb. 28, 2022	Jan. 03, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 11, 2021	Feb. 21, 2022~ Feb. 28, 2022	Mar. 10, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 14, 2021	Feb. 21, 2022~ Feb. 28, 2022	Sep. 13, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OSS	SN2	3GHz High Pass Filter	Jul. 12, 2021	Feb. 21, 2022~ Feb. 28, 2022	Jul. 11, 2022	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 21, 2022	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 21, 2022	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Oct. 29, 2021	Feb. 21, 2022	Oct. 28, 2022	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 17, 2021	Feb. 21, 2022	Mar. 16, 2022	Conduction (CO07-HY)
AC LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2021	Feb. 21, 2022	Nov. 15, 2022	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2021	Feb. 21, 2022	Oct. 20, 2022	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303B	TP200728	N/A	Mar. 09, 2021	Feb. 21, 2022	Mar. 08, 2022	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Feb. 19, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Dec. 30, 2021	Feb. 19, 2022	Dec. 29, 2022	Conducted (TH05-HY)
Switch Control Manframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Feb. 19, 2022	Aug. 11, 2022	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Aug. 01, 2021	Feb. 19, 2022	Jul. 31, 2022	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 01, 2021	Feb. 19, 2022	Jul. 31, 2022	Conducted (TH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.9 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu	Temperature:	21~25	°C
Test Date:	2022/2/19	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.015	0.674	0.50	Pass
BLE	1Mbps	1	19	2440	1.013	0.690	0.50	Pass
BLE	1Mbps	1	39	2480	1.013	0.672	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.00	30.00	2.54	7.54	36.00	Pass
BLE	1Mbps	1	19	2440	4.90	30.00	2.54	7.44	36.00	Pass
BLE	1Mbps	1	39	2480	5.30	30.00	2.54	7.84	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.19	-10.25	2.54	8.00	Pass
BLE	1Mbps	1	19	2440	4.27	-10.14	2.54	8.00	Pass
BLE	1Mbps	1	39	2480	4.73	-9.70	2.54	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.998	1.159	0.50	Pass
BLE	2Mbps	1	19	2440	1.998	1.160	0.50	Pass
BLE	2Mbps	1	39	2480	1.998	1.156	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.20	30.00	2.54	7.74	36.00	Pass
BLE	2Mbps	1	19	2440	5.00	30.00	2.54	7.54	36.00	Pass
BLE	2Mbps	1	39	2480	5.40	30.00	2.54	7.94	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	4.16	-13.26	2.54	8.00	Pass
BLE	2Mbps	1	19	2440	4.22	-13.12	2.54	8.00	Pass
BLE	2Mbps	1	39	2480	4.69	-12.68	2.54	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



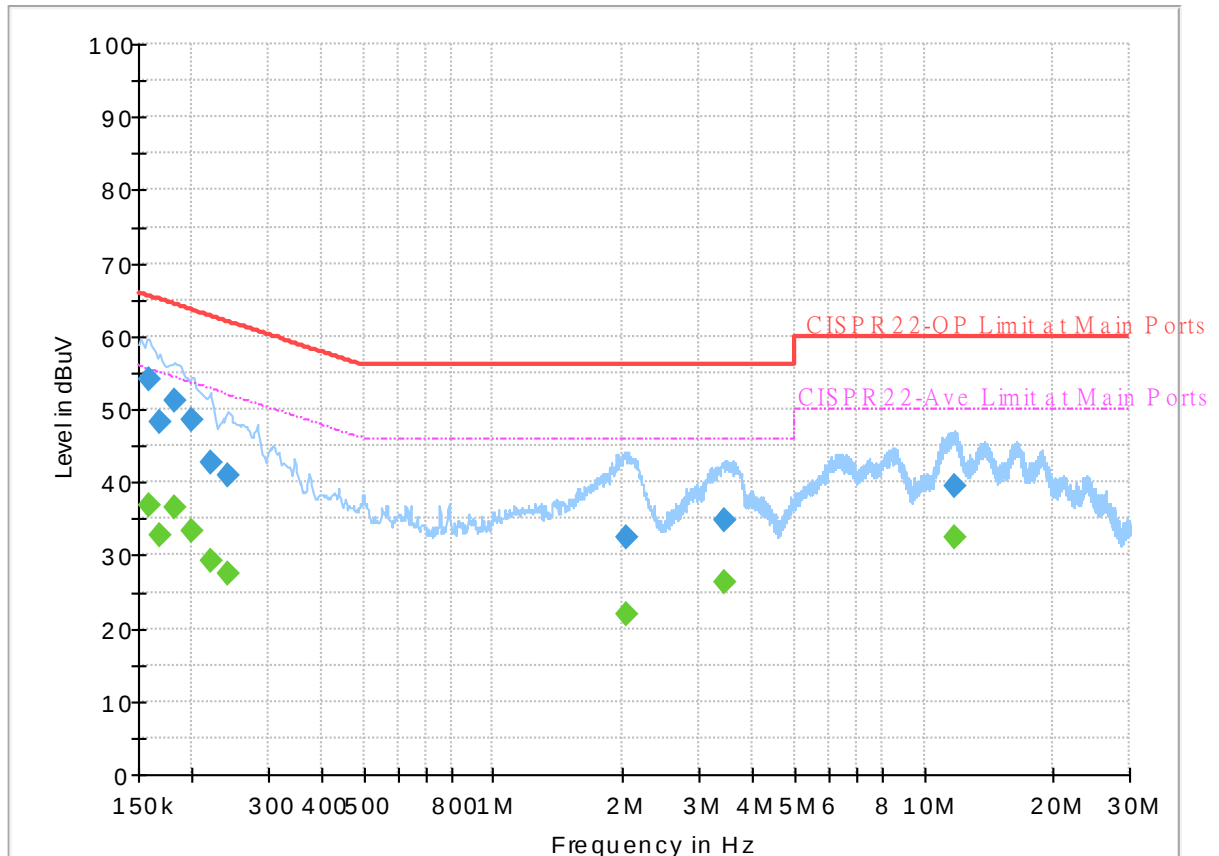
Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 1D1645
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum



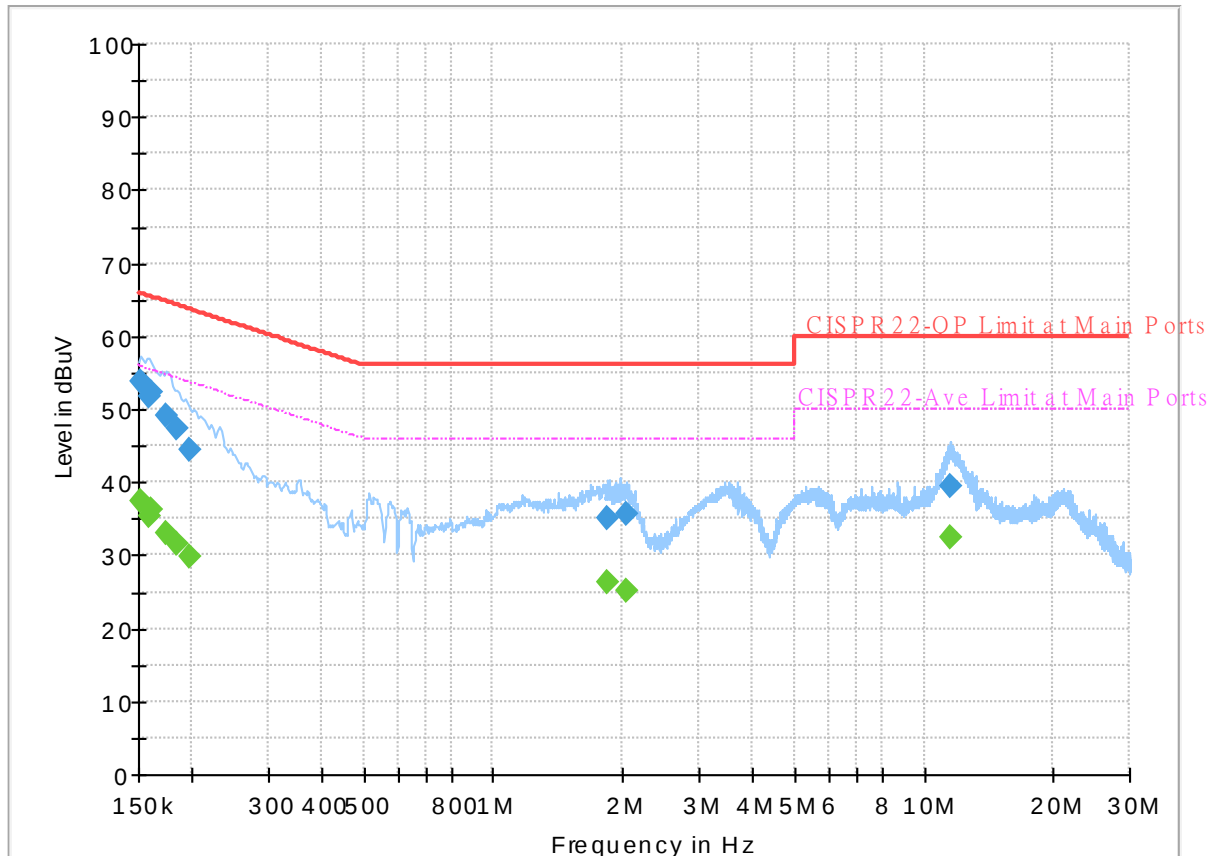
Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	36.70	55.52	18.82	L1	OFF	19.7
0.159000	54.05	---	65.52	11.47	L1	OFF	19.7
0.168000	---	32.65	55.06	22.41	L1	OFF	19.7
0.168000	48.19	---	65.06	16.87	L1	OFF	19.7
0.181500	---	36.60	54.42	17.82	L1	OFF	19.7
0.181500	51.29	---	64.42	13.13	L1	OFF	19.7
0.199500	---	33.29	53.63	20.34	L1	OFF	19.7
0.199500	48.52	---	63.63	15.11	L1	OFF	19.7
0.219750	---	29.27	52.83	23.56	L1	OFF	19.7
0.219750	42.73	---	62.83	20.10	L1	OFF	19.7
0.242250	---	27.53	52.02	24.49	L1	OFF	19.7
0.242250	40.86	---	62.02	21.16	L1	OFF	19.7
2.031000	---	21.88	46.00	24.12	L1	OFF	19.7
2.031000	32.44	---	56.00	23.56	L1	OFF	19.7
3.462000	---	26.24	46.00	19.76	L1	OFF	19.8
3.462000	34.87	---	56.00	21.13	L1	OFF	19.8
11.782500	---	32.47	50.00	17.53	L1	OFF	19.9
11.782500	39.50	---	60.00	20.50	L1	OFF	19.9

EUT Information

Report NO : 1D1645
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum



Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.47	55.88	18.41	N	OFF	19.7
0.152250	53.73	---	65.88	12.15	N	OFF	19.7
0.159000	---	35.51	55.52	20.01	N	OFF	19.7
0.159000	51.75	---	65.52	13.77	N	OFF	19.7
0.161250	---	36.22	55.40	19.18	N	OFF	19.7
0.161250	52.40	---	65.40	13.00	N	OFF	19.7
0.174750	---	32.96	54.73	21.77	N	OFF	19.7
0.174750	49.11	---	64.73	15.62	N	OFF	19.7
0.183750	---	31.52	54.31	22.79	N	OFF	19.7
0.183750	47.31	---	64.31	17.00	N	OFF	19.7
0.197250	---	29.91	53.73	23.82	N	OFF	19.7
0.197250	44.31	---	63.73	19.42	N	OFF	19.7
1.848750	---	26.37	46.00	19.63	N	OFF	19.7
1.848750	35.10	---	56.00	20.90	N	OFF	19.7
2.033250	---	25.09	46.00	20.91	N	OFF	19.7
2.033250	35.82	---	56.00	20.18	N	OFF	19.7
11.539500	---	32.58	50.00	17.42	N	OFF	19.9
11.539500	39.58	---	60.00	20.42	N	OFF	19.9



Appendix C. Radiated Spurious Emission

Test Engineer :	Yuan Lee, Jacky Hong and Peter Liao	Temperature :	20~25°C
		Relative Humidity :	58~68%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2374.365	55.39	-18.61	74	40.66	27.75	14.05	27.07	287	69	P	H
		2322.495	46.32	-7.68	54	31.39	28.02	14	27.09	287	69	A	H
	*	2402	98.57	-	-	83.86	27.7	14.07	27.06	287	69	P	H
	*	2402	98	-	-	83.29	27.7	14.07	27.06	287	69	A	H
													H
													H
		2348.535	55.23	-18.77	74	40.48	27.81	14.02	27.08	389	214	P	V
		2365.23	46.19	-7.81	54	31.45	27.77	14.04	27.07	389	214	A	V
	*	2402	100.63	-	-	85.92	27.7	14.07	27.06	389	214	P	V
	*	2402	100.02	-	-	85.31	27.7	14.07	27.06	389	214	A	V
													V
													V
BLE CH 19 2440MHz		2326.94	55.55	-18.45	74	40.66	27.98	14	27.09	310	59	P	H
		2322.88	46.25	-7.75	54	31.32	28.02	14	27.09	310	59	A	H
	*	2440	98.32	-	-	83.64	27.62	14.11	27.05	310	59	P	H
	*	2440	97.73	-	-	83.05	27.62	14.11	27.05	310	59	A	H
		2498.6	56.62	-17.38	74	41.79	27.7	14.16	27.03	310	59	P	H
		2489.92	46.13	-7.87	54	31.33	27.68	14.15	27.03	310	59	A	H
		2325.4	55.4	-18.6	74	40.49	28	14	27.09	369	215	P	V
		2364.46	46.21	-7.79	54	31.47	27.77	14.04	27.07	369	215	A	V
	*	2440	100.56	-	-	85.88	27.62	14.11	27.05	369	215	P	V
	*	2440	99.95	-	-	85.27	27.62	14.11	27.05	369	215	A	V
		2488.45	55.75	-18.25	74	40.95	27.68	14.15	27.03	369	215	P	V
		2494.19	46.25	-7.75	54	31.44	27.69	14.15	27.03	369	215	A	V



BLE CH 39 2480MHz	*	2480	99.49	-	-	84.73	27.66	14.14	27.04	301	60	P	H
	*	2480	98.94	-	-	84.18	27.66	14.14	27.04	301	60	A	H
		2493.04	56.01	-17.99	74	41.2	27.69	14.15	27.03	301	60	P	H
		2499.76	46.09	-7.91	54	31.26	27.7	14.16	27.03	301	60	A	H
													H
													H
	*	2480	102.08	-	-	87.32	27.66	14.14	27.04	400	212	P	V
	*	2480	101.5	-	-	86.74	27.66	14.14	27.04	400	212	A	V
		2488.92	55.55	-18.45	74	40.75	27.68	14.15	27.03	400	212	P	V
		2498.96	46.23	-7.77	54	31.4	27.7	14.16	27.03	400	212	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.5	-34.5	74	58.39	31.41	6.79	57.09	-	-	P	H
		10875	49.6	-24.4	74	54.71	40.85	9.98	55.94	-	-	P	H
		10875	39.23	-14.77	54	44.34	40.85	9.98	55.94	-	-	A	H
		14475	50.91	-23.09	74	53.46	41.8	11.76	56.11	-	-	P	H
		14475	41.09	-12.91	54	43.64	41.8	11.76	56.11	-	-	A	H
		18000	57.81	-16.19	74	52.48	48.5	13.55	56.72	-	-	P	H
		18000	48.14	-5.86	54	42.81	48.5	13.55	56.72	-	-	A	H
													H
													H
													H
													H
													H
		4804	40.56	-33.44	74	59.45	31.41	6.79	57.09	-	-	P	V
		10830	49.37	-24.63	74	54.64	40.76	9.97	56	-	-	P	V
		10830	39.3	-14.7	54	44.57	40.76	9.97	56	-	-	A	V
		14490	51.21	-22.79	74	53.66	41.86	11.77	56.08	-	-	P	V
		14490	41.32	-12.68	54	43.77	41.86	11.77	56.08	-	-	A	V
		18000	58.07	-15.93	74	52.74	48.5	13.55	56.72	-	-	P	V
		18000	48.15	-5.85	54	42.82	48.5	13.55	56.72	-	-	A	V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	39.13	-34.87	74	57.83	31.44	6.82	56.96	-	-	P	H
		7320	45.6	-28.4	74	57	37.06	8.46	56.92	-	-	P	H
		10845	49.56	-24.44	74	54.78	40.79	9.97	55.98	-	-	P	H
		10845	39.41	-14.59	54	44.63	40.79	9.97	55.98	-	-	A	H
		14490	51.6	-22.4	74	54.05	41.86	11.77	56.08	-	-	P	H
		14490	41.39	-12.61	54	43.84	41.86	11.77	56.08	-	-	A	H
		18000	57.81	-16.19	74	52.48	48.5	13.55	56.72	-	-	P	H
		18000	48.17	-5.83	54	42.84	48.5	13.55	56.72	-	-	A	H
													H
													H
													H
													H
		4880	40.13	-33.87	74	58.83	31.44	6.82	56.96	-	-	P	V
		7320	45.9	-28.1	74	57.3	37.06	8.46	56.92	-	-	P	V
		11130	49.22	-24.78	74	54.79	40.08	10.12	55.77	-	-	P	V
		11130	38.54	-15.46	54	44.11	40.08	10.12	55.77	-	-	A	V
		14490	51.87	-22.13	74	54.32	41.86	11.77	56.08	-	-	P	V
		14490	41.44	-12.56	54	43.89	41.86	11.77	56.08	-	-	A	V
		18000	57.43	-16.57	74	52.1	48.5	13.55	56.72	-	-	P	V
		18000	48.06	-5.94	54	42.73	48.5	13.55	56.72	-	-	A	V
													V
													V
													V
													V

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		4960	40.31	-33.69	74	58.54	31.72	6.86	56.81	-	-	P	H
		7440	45.05	-28.95	74	56.67	37.02	8.53	57.17	-	-	P	H
		10965	49.56	-24.44	74	54.57	40.77	10.04	55.82	-	-	P	H
		10965	39.31	-14.69	54	44.32	40.77	10.04	55.82	-	-	A	H
		14490	51.01	-22.99	74	53.46	41.86	11.77	56.08	-	-	P	H
		14490	41.29	-12.71	54	43.74	41.86	11.77	56.08	-	-	A	H
		17985	57.57	-16.43	74	52.65	48.1	13.54	56.72	-	-	P	H
		17985	47.89	-6.11	54	42.97	48.1	13.54	56.72	-	-	A	H
													H
													H
													H
													H
		4960	40.28	-33.72	74	58.51	31.72	6.86	56.81	-	-	P	V
		7440	45.03	-28.97	74	56.65	37.02	8.53	57.17	-	-	P	V
		12525	49.29	-24.71	74	55.81	38.72	10.69	55.93	-	-	P	V
		12525	38.15	-15.85	54	44.67	38.72	10.69	55.93	-	-	A	V
		14475	50.92	-23.08	74	53.47	41.8	11.76	56.11	-	-	P	V
		14475	41.13	-12.87	54	43.68	41.8	11.76	56.11	-	-	A	V
		17985	57.39	-16.61	74	52.47	48.1	13.54	56.72	-	-	P	V
		17985	47.74	-6.26	54	42.82	48.1	13.54	56.72	-	-	A	V
													V
													V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												
	4. The emission level close to 18GHz is checked that the average emission level is noise floor only.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2330.16	55.26	-18.74	74	40.37	27.96	14.01	27.08	288	58	P	H
		2350.32	47.66	-6.34	54	32.91	27.8	14.03	27.08	288	58	A	H
	*	2402	98.88	-	-	84.17	27.7	14.07	27.06	288	58	P	H
	*	2402	97.42	-	-	82.71	27.7	14.07	27.06	288	58	A	H
													H
													H
		2311.26	55.77	-18.23	74	40.76	28.11	13.99	27.09	343	213	P	V
		2377.2	47.79	-6.21	54	33.06	27.75	14.05	27.07	343	213	A	V
	*	2402	100.8	-	-	86.09	27.7	14.07	27.06	343	213	P	V
	*	2402	99.38	-	-	84.67	27.7	14.07	27.06	343	213	A	V
													V
													V
BLE CH 19 2440MHz		2387	55.57	-18.43	74	40.85	27.73	14.06	27.07	313	59	P	H
		2312.24	48.37	-5.63	54	33.37	28.1	13.99	27.09	313	59	A	H
	*	2440	99.29	-	-	84.61	27.62	14.11	27.05	313	59	P	H
	*	2440	98	-	-	83.32	27.62	14.11	27.05	313	59	A	H
		2492.58	55.41	-18.59	74	40.6	27.69	14.15	27.03	313	59	P	H
		2496.43	47.61	-6.39	54	32.79	27.69	14.16	27.03	313	59	A	H
		2340.1	55.94	-18.06	74	41.12	27.88	14.02	27.08	379	210	P	V
		2386.86	47.84	-6.16	54	33.12	27.73	14.06	27.07	379	210	A	V
	*	2440	100.94	-	-	86.26	27.62	14.11	27.05	379	210	P	V
	*	2440	99.46	-	-	84.78	27.62	14.11	27.05	379	210	A	V
		2498.39	55.11	-18.89	74	40.28	27.7	14.16	27.03	379	210	P	V
		2486.7	47.45	-6.55	54	32.66	27.67	14.15	27.03	379	210	A	V



BLE CH 39 2480MHz	*	2480	100.36	-	-	85.6	27.66	14.14	27.04	301	60	P	H
	*	2480	99.06	-	-	84.3	27.66	14.14	27.04	301	60	A	H
		2493.88	56.04	-17.96	74	41.23	27.69	14.15	27.03	301	60	P	H
		2488.64	47.76	-6.24	54	32.96	27.68	14.15	27.03	301	60	A	H
													H
													H
	*	2480	102.04	-	-	87.28	27.66	14.14	27.04	400	209	P	V
	*	2480	100.81	-	-	86.05	27.66	14.14	27.04	400	209	A	V
		2490.52	55.67	-18.33	74	40.87	27.68	14.15	27.03	400	209	P	V
		2492.56	47.62	-6.38	54	32.81	27.69	14.15	27.03	400	209	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	38.83	-35.17	74	57.72	31.41	6.79	57.09	-	-	P	H
		10665	48.59	-25.41	74	54.55	40.4	9.87	56.23	-	-	P	H
		10665	39.63	-14.37	54	45.59	40.4	9.87	56.23	-	-	A	H
		14490	51.39	-22.61	74	53.84	41.86	11.77	56.08	-	-	P	H
		14490	42.41	-11.59	54	44.86	41.86	11.77	56.08	-	-	A	H
		18000	57.72	-16.28	74	52.39	48.5	13.55	56.72	-	-	P	H
		18000	48.98	-5.02	54	43.65	48.5	13.55	56.72	-	-	A	H
													H
													H
													H
													H
													H
		4804	38.4	-35.6	74	57.29	31.41	6.79	57.09	-	-	P	V
		10995	49.24	-24.76	74	54.25	40.71	10.06	55.78	-	-	P	V
		10995	40.82	-13.18	54	45.83	40.71	10.06	55.78	-	-	A	V
		14475	50.77	-23.23	74	53.32	41.8	11.76	56.11	-	-	P	V
		14475	42.04	-11.96	54	44.59	41.8	11.76	56.11	-	-	A	V
		18000	57.55	-16.45	74	52.22	48.5	13.55	56.72	-	-	P	V
		18000	49.01	-4.99	54	43.68	48.5	13.55	56.72	-	-	A	V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	40.19	-33.81	74	58.89	31.44	6.82	56.96	-	-	P	H
		7320	45.13	-28.87	74	56.53	37.06	8.46	56.92	-	-	P	H
		10995	49.53	-24.47	74	54.54	40.71	10.06	55.78	-	-	P	H
		10995	40.66	-13.34	54	45.67	40.71	10.06	55.78	-	-	A	H
		14490	51.3	-22.7	74	53.75	41.86	11.77	56.08	-	-	P	H
		14490	42.68	-11.32	54	45.13	41.86	11.77	56.08	-	-	A	H
		18000	58.09	-15.91	74	52.76	48.5	13.55	56.72	-	-	P	H
		18000	48.97	-5.03	54	43.64	48.5	13.55	56.72	-	-	A	H
													H
													H
													H
													H
		4880	39.4	-34.6	74	58.1	31.44	6.82	56.96	-	-	P	V
		7320	45.46	-28.54	74	56.86	37.06	8.46	56.92	-	-	P	V
		10965	49.64	-24.36	74	54.65	40.77	10.04	55.82	-	-	P	V
		10965	40.78	-13.22	54	45.79	40.77	10.04	55.82	-	-	A	V
		14490	51.1	-22.9	74	53.55	41.86	11.77	56.08	-	-	P	V
		14490	42.48	-11.52	54	44.93	41.86	11.77	56.08	-	-	A	V
		17970	57.05	-16.95	74	52.56	47.69	13.52	56.72	-	-	P	V
		17970	48.34	-5.66	54	43.85	47.69	13.52	56.72	-	-	A	V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	39.66	-34.34	74	57.89	31.72	6.86	56.81	-	-	P	H
		7440	44.94	-29.06	74	56.56	37.02	8.53	57.17	-	-	P	H
		11010	50.39	-23.61	74	55.45	40.65	10.06	55.77	-	-	P	H
		11010	42.67	-11.33	54	47.73	40.65	10.06	55.77	-	-	A	H
		14475	50.89	-23.11	74	53.44	41.8	11.76	56.11	-	-	P	H
		14475	42	-12	54	44.55	41.8	11.76	56.11	-	-	A	H
		18000	58.11	-15.89	74	52.78	48.5	13.55	56.72	-	-	P	H
		18000	49.08	-4.92	54	43.75	48.5	13.55	56.72	-	-	A	H
													H
													H
													H
													H
		4960	41.12	-32.88	74	59.35	31.72	6.86	56.81	-	-	P	V
		7440	45	-29	74	56.62	37.02	8.53	57.17	-	-	P	V
		10845	48.84	-25.16	74	54.06	40.79	9.97	55.98	-	-	P	V
		10845	40.28	-13.72	54	45.5	40.79	9.97	55.98	-	-	A	V
		14475	51.29	-22.71	74	53.84	41.8	11.76	56.11	-	-	P	V
		14475	42.03	-11.97	54	44.58	41.8	11.76	56.11	-	-	A	V
		17985	57.61	-16.39	74	52.69	48.1	13.54	56.72	-	-	P	V
		17985	48.68	-5.32	54	43.76	48.1	13.54	56.72	-	-	A	V
													V
													V
													V
													V
Remark	1.	No other spurious found.											
	2.	All results are PASS against Peak and Average limit line.											
	3.	The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											
	4.	The emission level close to 18GHz is checked that the average emission level is noise floor only.											

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	22.05	-17.95	40	29.1	24.57	0.72	32.34	-	-	P	H
		132.82	16.7	-26.8	43.5	30.32	17.52	1.15	32.29	-	-	P	H
		343.31	26.02	-19.98	46	36.39	20.08	1.7	32.15	-	-	P	H
		754.59	28.99	-17.01	46	31.12	27.69	2.33	32.15	-	-	P	H
		842.86	30.31	-15.69	46	31.03	28.52	2.57	31.81	-	-	P	H
		962.17	32.79	-21.21	54	30.37	30.85	2.58	31.01	-	-	P	H
													H
													H
													H
													H
													H
													H
		30.97	22.84	-17.16	40	30.62	23.85	0.72	32.35	-	-	P	V
		120.21	22.76	-20.74	43.5	36.43	17.5	1.13	32.3	-	-	P	V
		343.31	27.58	-18.42	46	37.95	20.08	1.7	32.15	-	-	P	V
		596.48	27.51	-18.49	46	32.24	25.38	2.16	32.27	-	-	P	V
		915.61	30.57	-15.43	46	30.54	28.88	2.55	31.4	-	-	P	V
		970.9	33	-21	54	30.42	30.9	2.6	30.92	-	-	P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Yuan Lee, Jacky Hong and Peter Liao	Temperature :	20~25°C
		Relative Humidity :	58~68%

Note symbol

-L	Low channel location
-R	High channel location

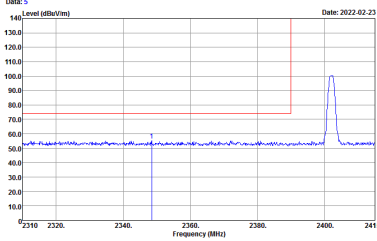
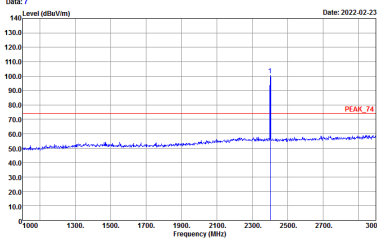
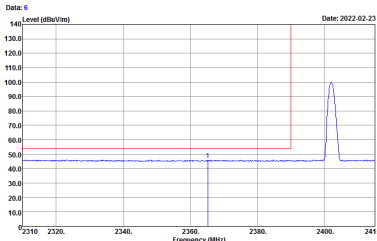
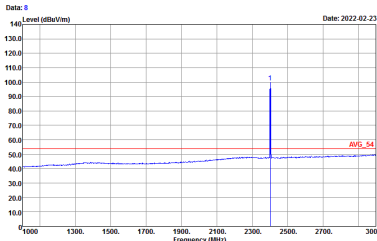


<1Mbps>

2.4GHz 2400~2483.5MHz

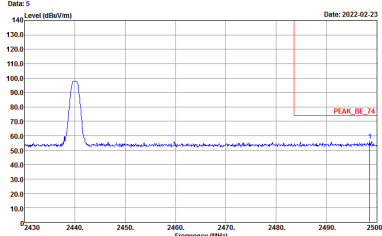
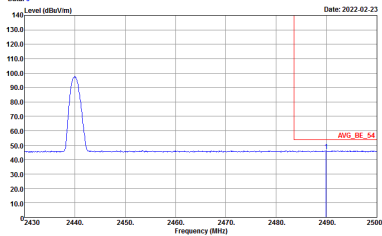
BLE (Band Edge @ 3m)

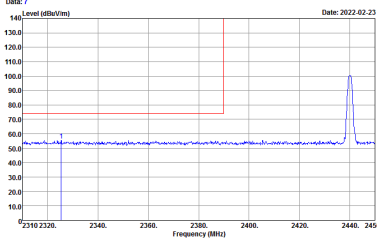
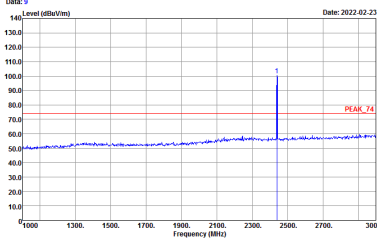
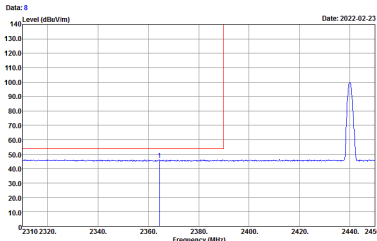
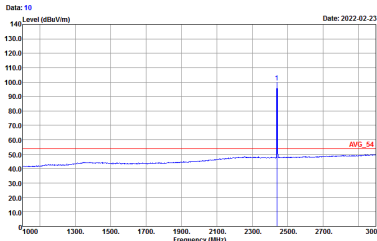
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	Data: 1 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 3 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 2 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 4 Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

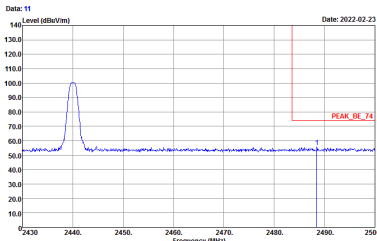
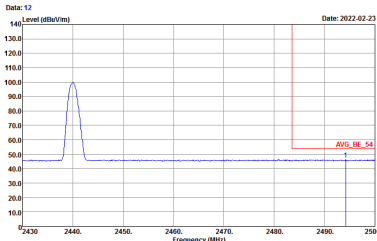
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Data: 5 Level (dBuV/m)  Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 7 Level (dBuV/m)  Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg	Data: 6 Level (dBuV/m)  Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto	Data: 8 Level (dBuV/m)  Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto



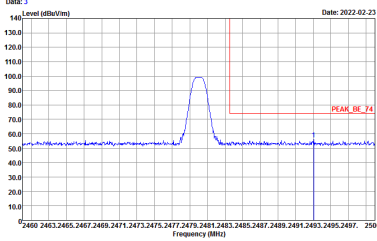
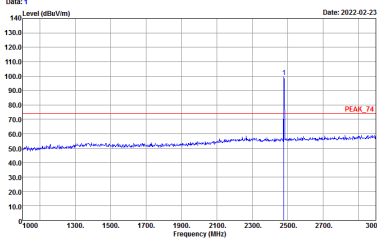
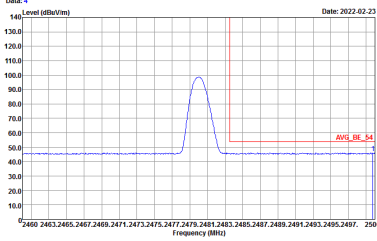
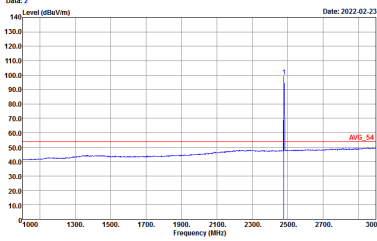
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	Date: 1 Date: 2022-02-23 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Date: 3 Date: 2022-02-23 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Date: 2 Date: 2022-02-23 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	Date: 4 Date: 2022-02-23 Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

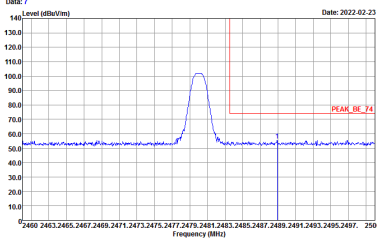
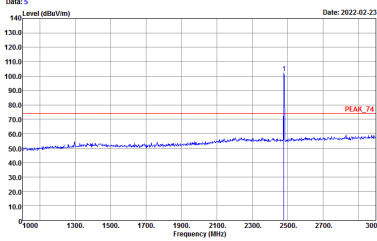
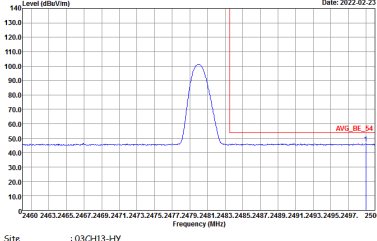
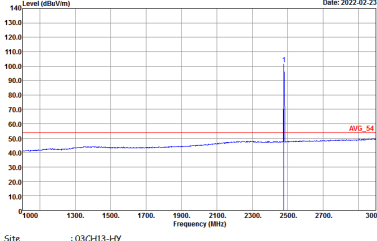
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	Data: 7 Level (dBuV/m)  Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 9 Level (dBuV/m)  Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 8 Level (dBuV/m)  Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto	Data: 10 Level (dBuV/m)  Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto

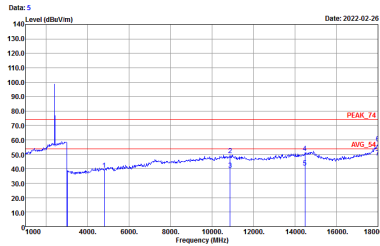
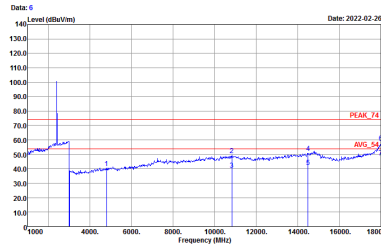
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

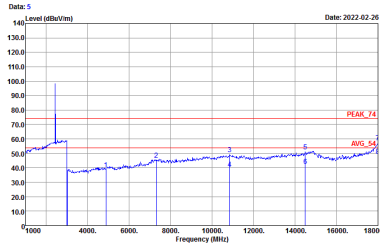
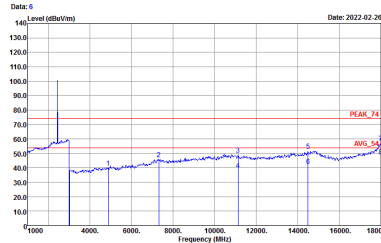


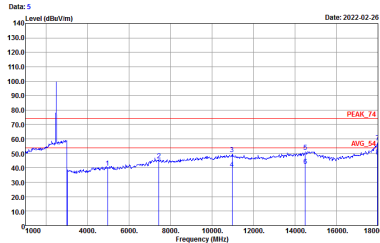
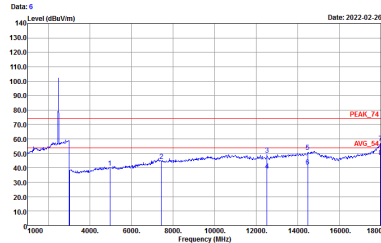
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 	Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 
Avg.	Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto 	Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto 

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	Data: 7 Level (dBm/1m)  Date: 2022-02-23 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 5 Level (dBm/1m)  Date: 2022-02-23 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 8 Level (dBm/1m)  Date: 2022-02-23 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	Data: 6 Level (dBm/1m)  Date: 2022-02-23 Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL

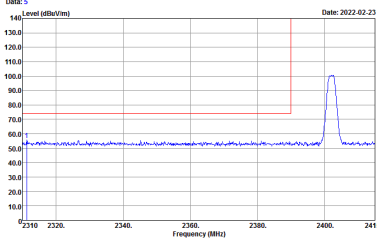
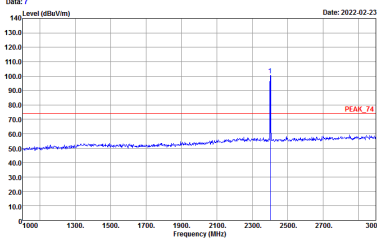
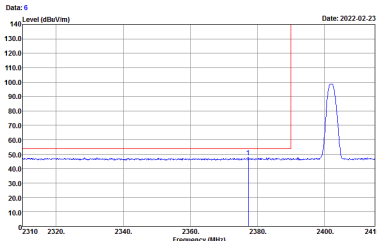
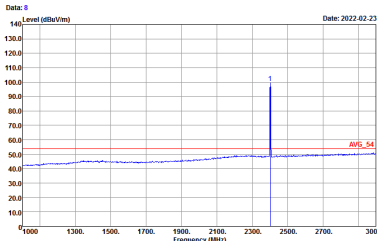


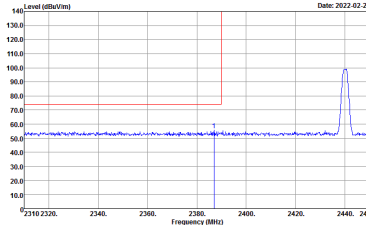
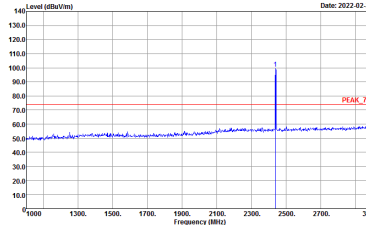
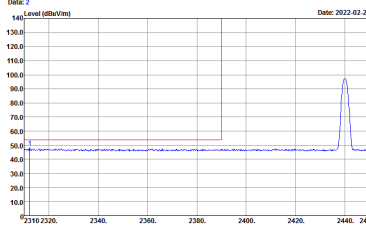
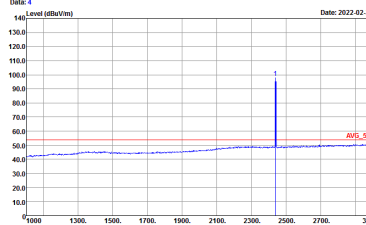
<2Mbps>

2.4GHz 2400~2483.5MHz

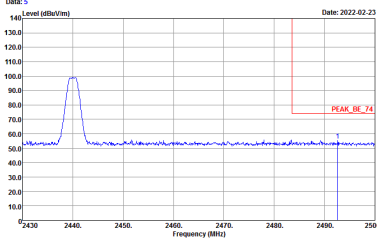
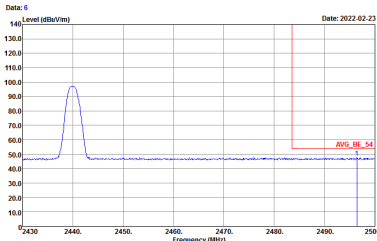
BLE (Band Edge @ 3m)

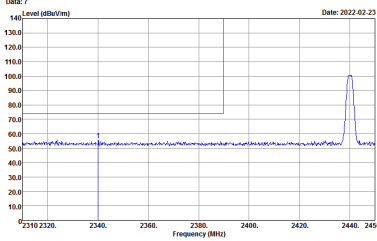
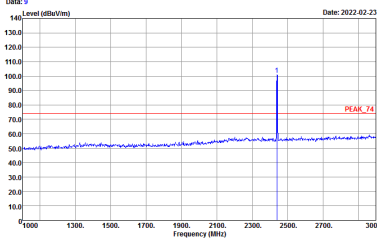
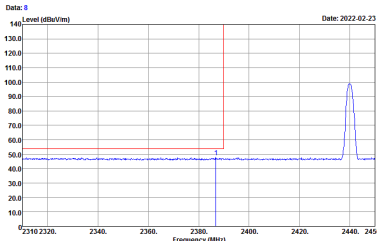
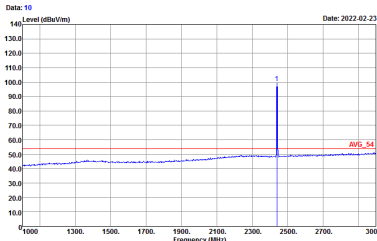
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	Data: 1 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 3 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 2 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 4 Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Data: 5 Level (dBuV/m) Date: 2022-02-23  Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 7 Level (dBuV/m) Date: 2022-02-23  Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg	Data: 6 Level (dBuV/m) Date: 2022-02-23  Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto	Data: 8 Level (dBuV/m) Date: 2022-02-23  Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	Date: 1 Date: 2022-02-23  Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Date: 3 Date: 2022-02-23  Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Date: 2 Date: 2022-02-23  Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto	Date: 4 Date: 2022-02-23  Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto



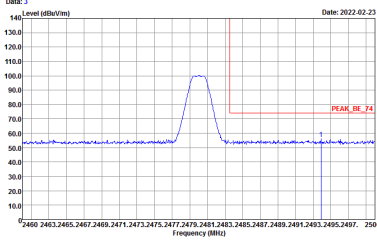
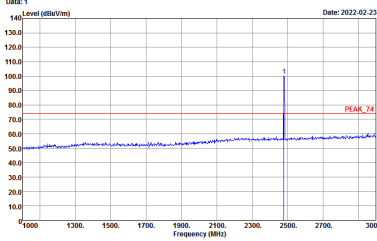
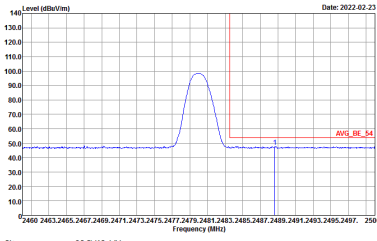
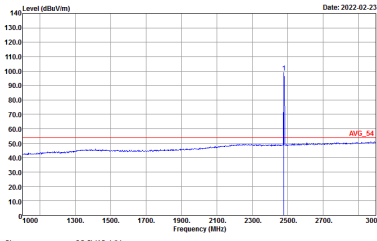
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	Graph 5: Level (dBm/100kHz) vs Frequency (MHz). Date: 2022-02-23.  Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank
Avg.	Graph 6: Level (dBm/100kHz) vs Frequency (MHz). Date: 2022-02-23.  Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	Data: 7 Level (dBuV/m)  Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 9 Level (dBuV/m)  Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 8 Level (dBuV/m)  Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto	Data: 10 Level (dBuV/m)  Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	Graph 11: Spectrum plot showing a peak at 2440 MHz. The Y-axis is Level (dBm/100Hz) from 10.0 to 140.0. The X-axis is Frequency (MHz) from 2430 to 2500. The peak is labeled PEAK_BE_74. Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	Graph 12: Spectrum plot showing a peak at 2440 MHz. The Y-axis is Level (dBm/100Hz) from 10.0 to 140.0. The X-axis is Frequency (MHz) from 2430 to 2500. The peak is labeled AVG_BE_54. Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:30.000KHz SWT:Auto	Left blank

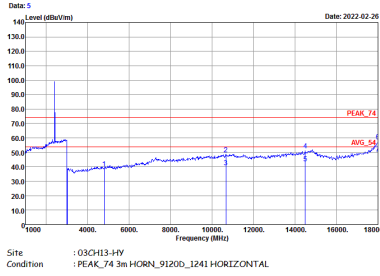
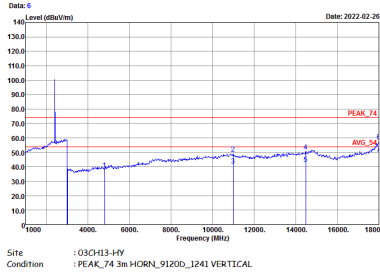


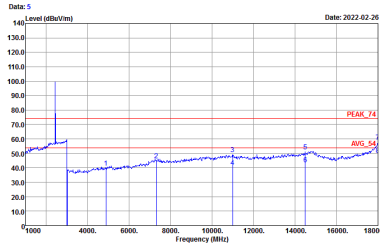
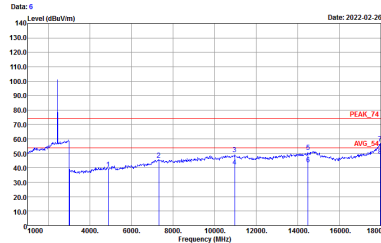
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 	Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 
Avg.	Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto 	Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto 

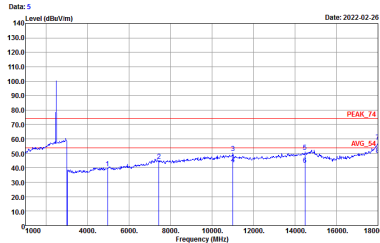
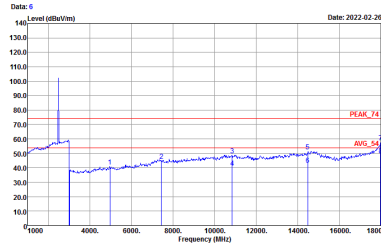


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	Data: 7 Level (dBuV/m) Date: 2022-02-23 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 5 Level (dBuV/m) Date: 2022-02-23 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 8 Level (dBuV/m) Date: 2022-02-23 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto	Data: 6 Level (dBuV/m) Date: 2022-02-23 Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto

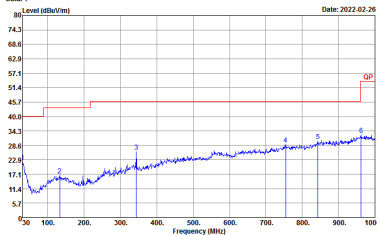
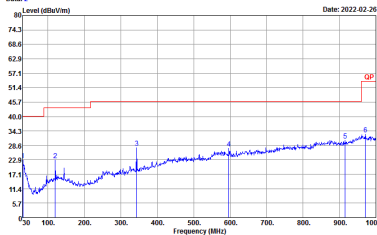
2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL

Emission below 1GHz
2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	Date: 1 Level (dBuV/m) Date: 2022-02-26  Site : 03CH13-HY Condition : QP 3m BIL06_40103 HORIZONTAL	Date: 2 Level (dBuV/m) Date: 2022-02-26  Site : 03CH13-HY Condition : QP 3m BIL06_40103 VERTICAL



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth -LE for 1Mbps	62.01	386	2.59	3kHz
Bluetooth -LE for 2Mbps	32.37	202.3	4.94	10kHz

