



REPORT No.: SZ25050280W01

TEST REPORT

APPLICANT : Savant Technologies Llc, dba Ge lighting,
a Savant Company

PRODUCT NAME : LED LAMP

MODEL NAME : CLEDA199CD1, CLEDA199CDRV

BRAND NAME : GE

FCC ID : PUU-A19-DMFCX

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2025-05-23

TEST DATE : 2025-06-06 to 2025-06-20

ISSUE DATE : 2025-07-28

Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	4
1.2. Test Equipment List	5
1.3. Measurement Uncertainty	7
1.4. Testing Laboratory	7
2. General Description	8
2.1. Information of Applicant and Manufacturer	8
2.2. Information of EUT	8
2.3. Channel List of EUT	9
2.4. Test Configuration of EUT	10
2.5. Test Conditions	10
2.6. Test Setup Layout Diagram	10
3. Test Results	13
3.1. Antenna Requirement	13
3.2. Duty Cycle of Test Signal	14
3.3. Maximum Peak Conducted Output Power	15
3.4. Maximum Average Conducted Output Power	16
3.5. 6 dB Bandwidth	17
3.6. Conducted Spurious Emissions and Band Edge	18
3.7. Power Spectral Density	19
3.8. Conducted Emission	20
3.9. Restricted Frequency Bands	21
3.10. Radiated Emission	22
Annex A Test Data and Result	24



REPORT No.: SZ25050280W01

Change History		
Version	Date	Reason for change
1.0	2025-07-28	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Jun. 07, 2025	Li Xinpeng	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Jun. 07, 2025	Li Xinpeng	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Jun. 07, 2025	Li Xinpeng	PASS	/
5	15.247(a)	Bandwidth	Jun. 07, 2025	Li Xinpeng	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jun. 07, 2025	Li Xinpeng	PASS	/
7	15.247(e)	Power Spectral Density	Jun. 07, 2025	Li Xinpeng	PASS	/
8	15.207	Conducted Emission	Jun. 18, 2025	Fan Shengquan Wang Yapeng	PASS	/
9	15.247(d)	Restricted Frequency Bands	Jun. 19, 2025	Zhang Liyun	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Jun. 20, 2025	Zhang Liyun	PASS	/

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2025.01.06	2026.01.05
LISN	8127449	NSLK 8127	Schwarzbeck	2025.01.09	2026.01.18
Pulse Limiter (10dB)	VTSD 9561 F- B #206	VTSD 9561-F	Schwarzbeck	2025.05.13	2026.05.12
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.07.03	2025.07.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Savant Technologies LLc, dba Ge lighting, a Savant Company
Applicant Address:	1975 Noble Road Cleveland Ohio United States 44112
Manufacturer:	Savant Technologies LLc, dba Ge lighting, a Savant Company
Manufacturer Address:	1975 Noble Road Cleveland Ohio United States 44112

2.2. Information of EUT

Product Name:	LED LAMP
Sample No.:	1#, 2#, 3#
Hardware Version:	6
Software Version:	1.1.162.AB(for CLEDA199CD1) 1.1.162.6B(for CLEDA199CDRV)
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.0
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps, 512kbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	On-board antenna
Antenna Gain:	-1.20dBi

Note 1: According to the certificate holder, they declared that the models: CLEDA199CD1, CLEDA199CDRV have the same hardware. It's just that the model and software version are different. The color temperature controlled by the software is different, but everything else is exactly the same. The main measuring model is CLEDA199CD1, only the results for CLEDA199CD1 were recorded in this report.

Note 2: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


The EUT is controlled by dedicated software to transmit at the default maximum power level.

2.5. Test Conditions


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

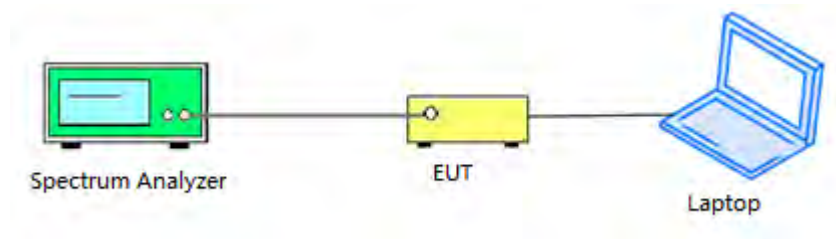


2.6.2. Conducted Emission Measurement

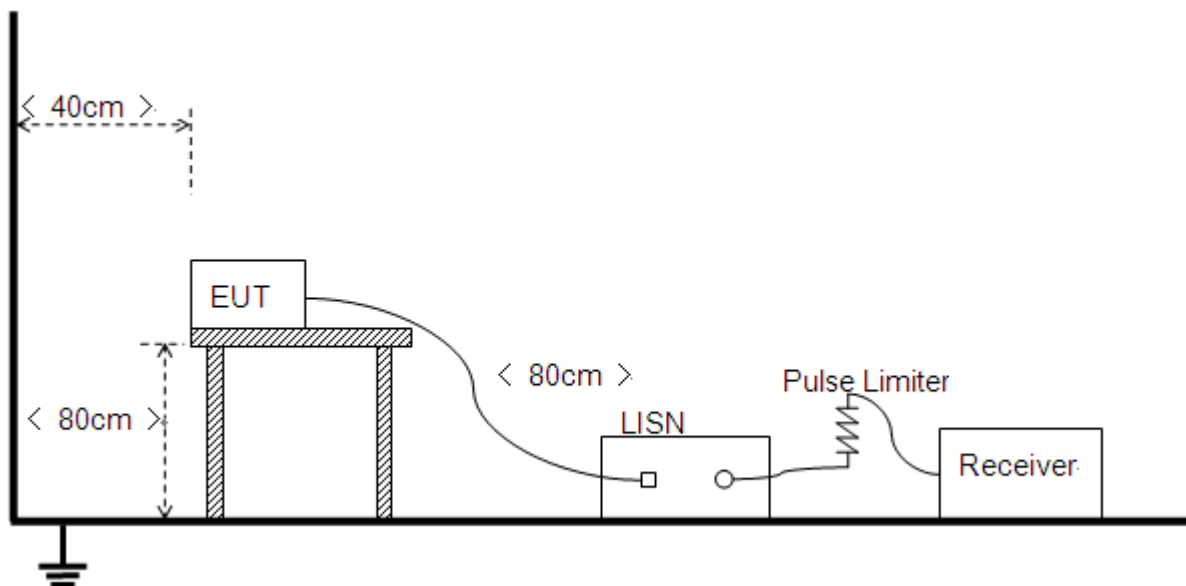


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

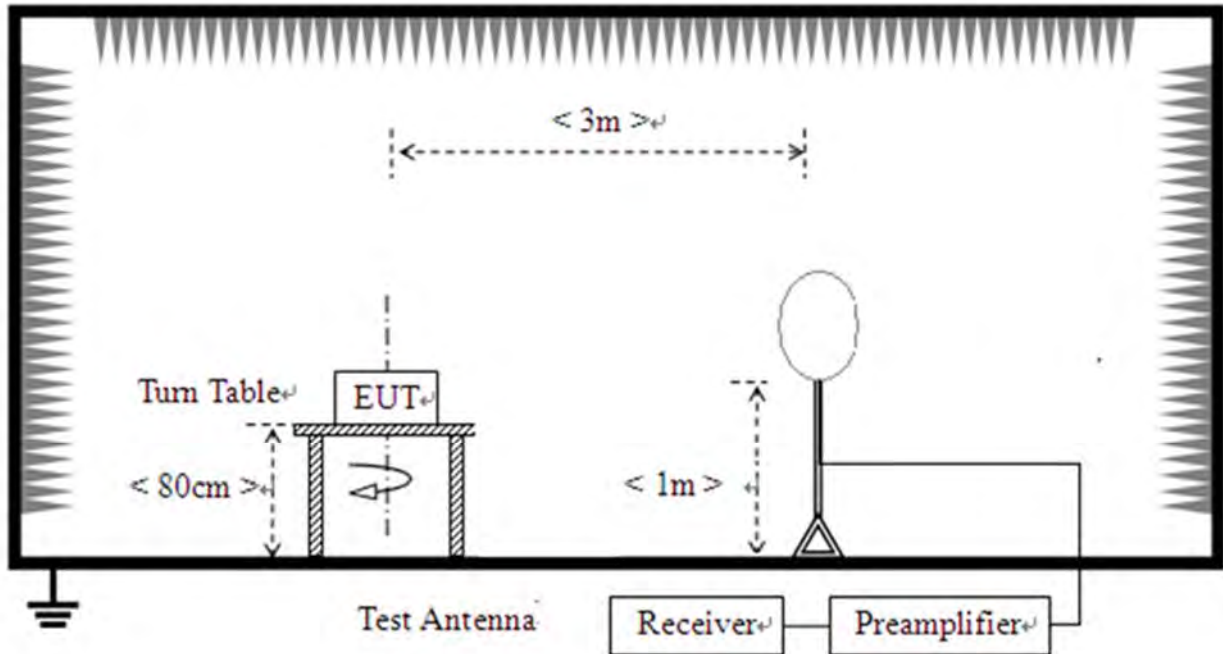

2) For radiated emissions from 30MHz to 1GHz

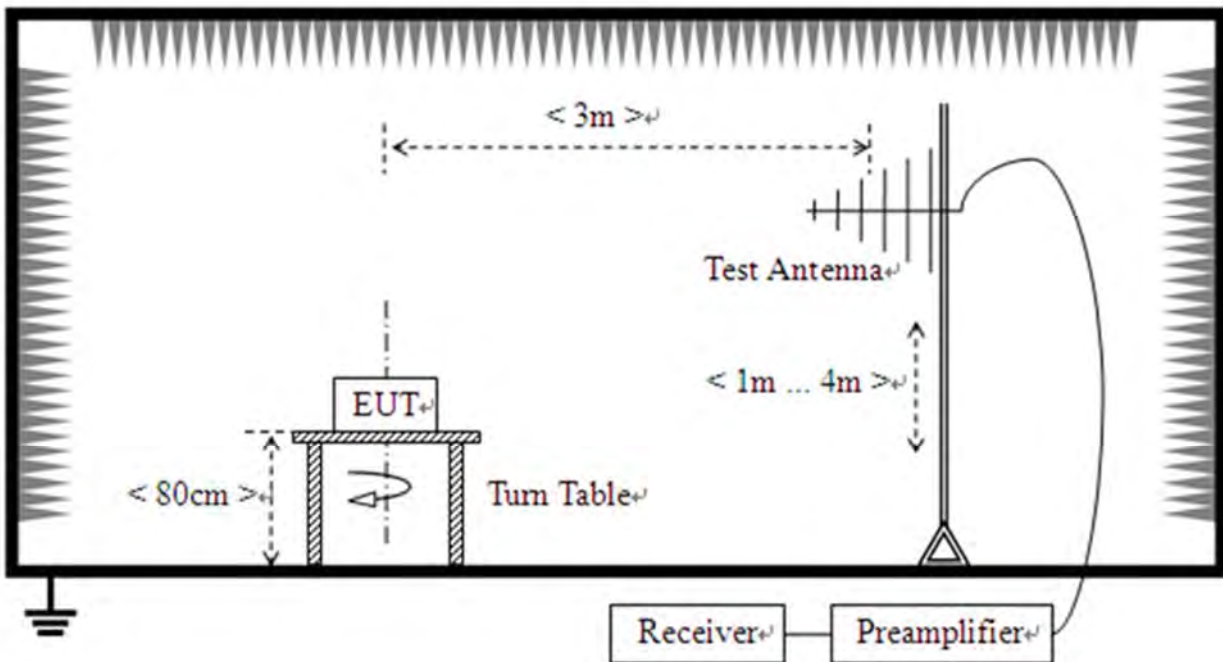

3) For radiated emissions above 1GHz

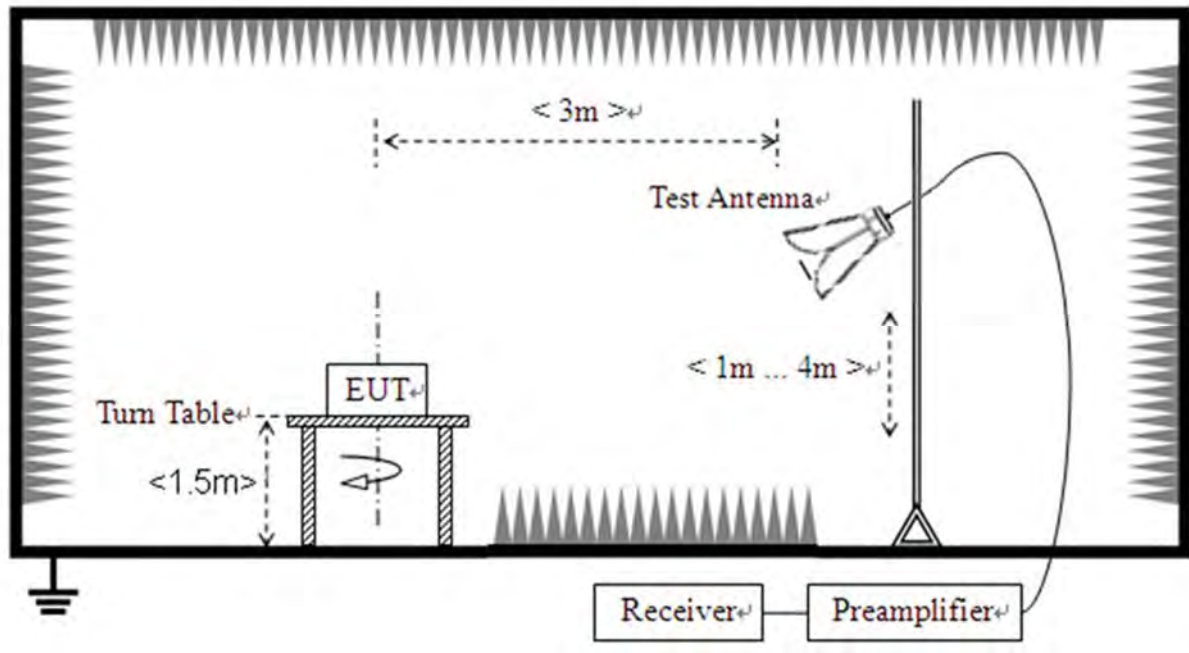



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☐ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☐ Dipole Antenna ☐ PCB Antenna ☐ PIFA Antenna ☐ External Antenna ☒ On-board antenna	☐ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☐ Metal Shrapnel ☒ Layout

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.

3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

Refer to Annex A.8 in this report.

3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.9 in this report.

3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.10 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	63.36	1.98	2.53
NVNT	BLE 1M	2440	Ant1	63.44	1.98	2.52
NVNT	BLE 1M	2480	Ant1	63.44	1.98	2.52
NVNT	BLE 2M	2402	Ant1	33.84	4.71	4.73
NVNT	BLE 2M	2440	Ant1	33.84	4.71	4.73
NVNT	BLE 2M	2480	Ant1	33.84	4.71	4.73
NVNT	BLE_512K	2402	Ant1	57.29	2.42	0.93
NVNT	BLE_512K	2440	Ant1	57.31	2.42	0.93
NVNT	BLE_512K	2480	Ant1	57.29	2.42	0.93

Test Graphs


Duty Cycle NVNT BLE 1M 2402MHz Ant1

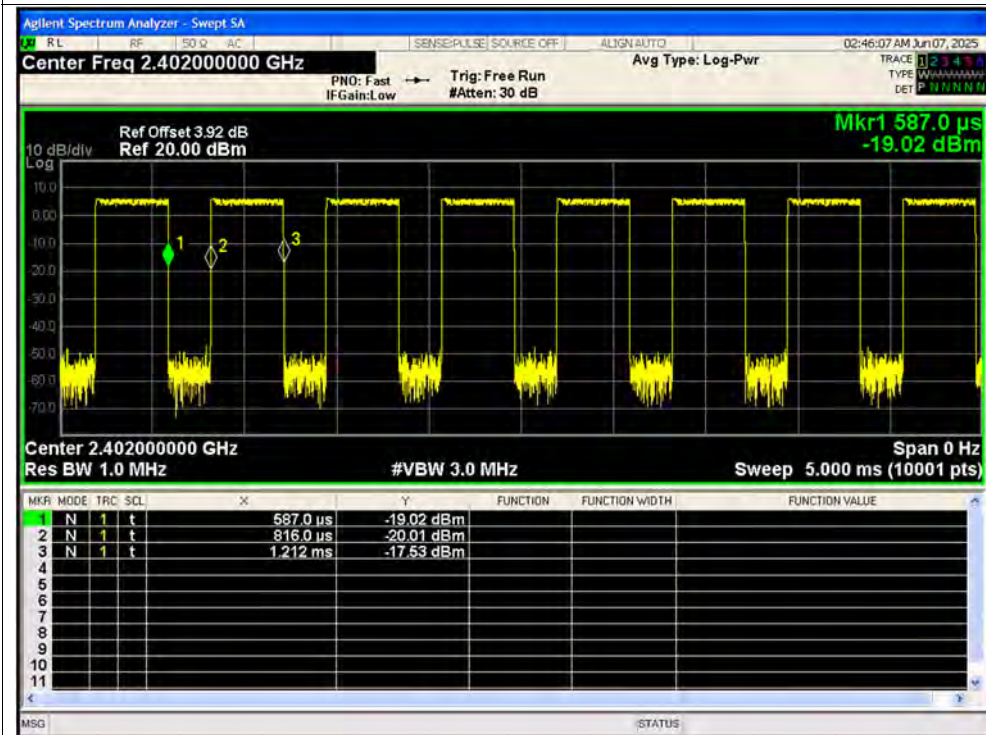


Duty Cycle NVNT BLE 1M 2440MHz Ant1

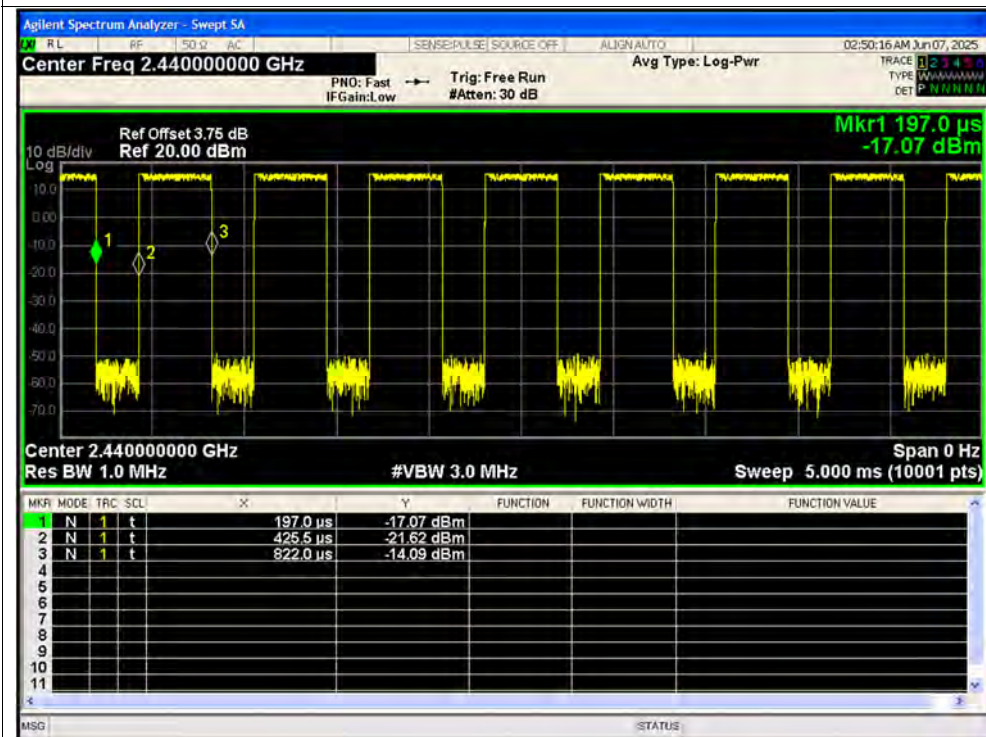


Duty Cycle NVNT BLE 1M 2480MHz Ant1

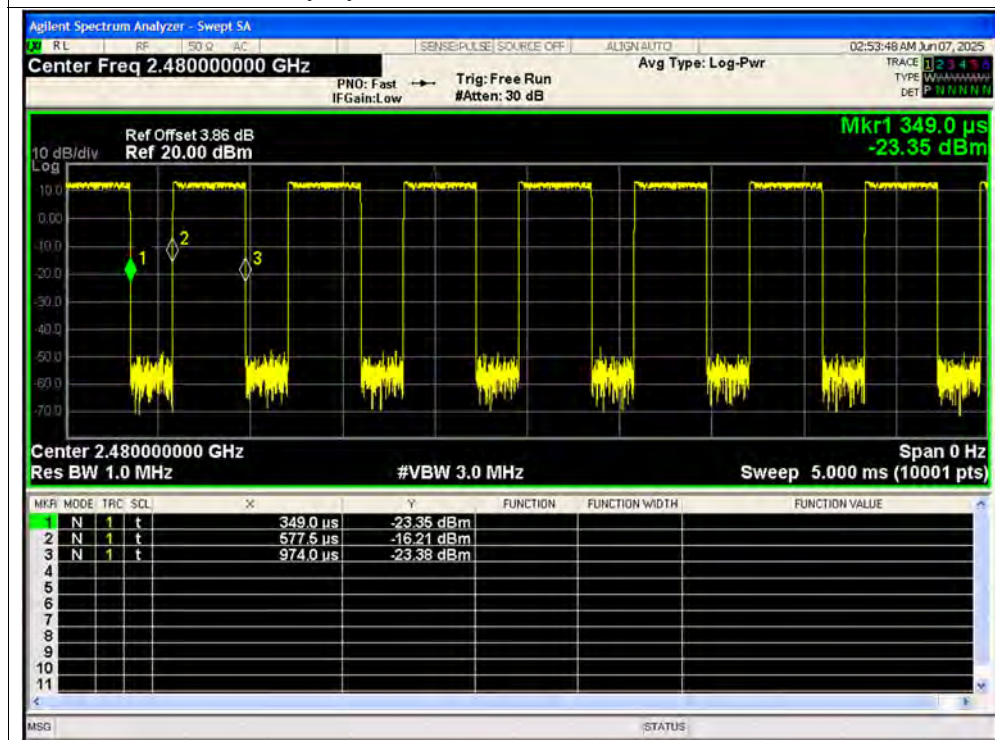


Duty Cycle NVNT BLE 2M 2402MHz Ant1

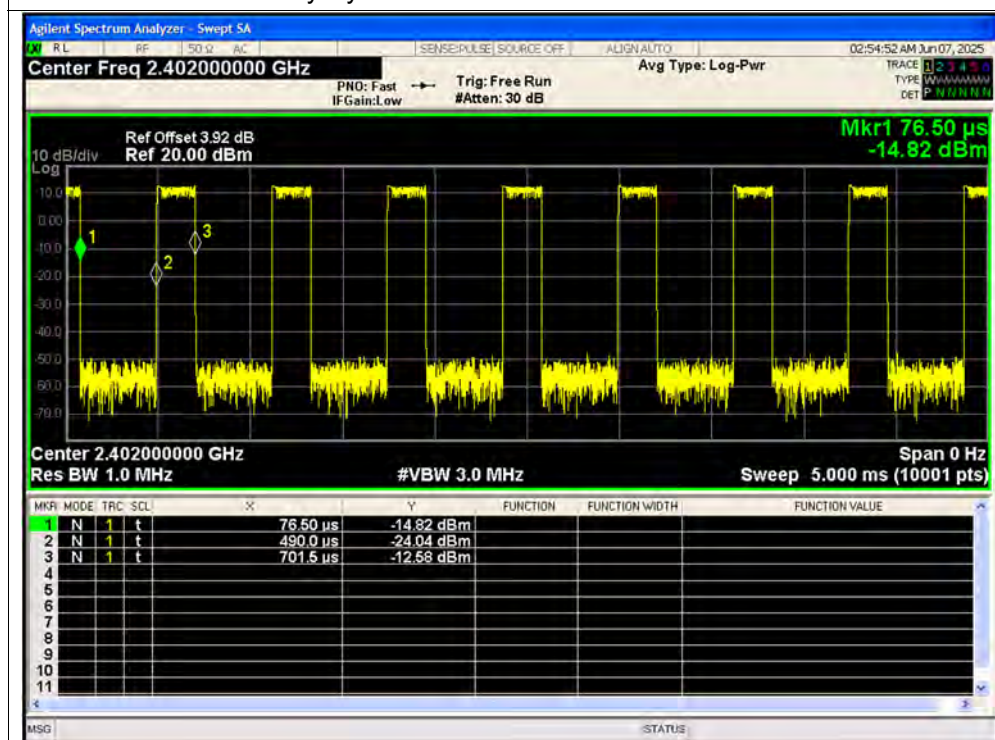


Duty Cycle NVNT BLE 2M 2440MHz Ant1

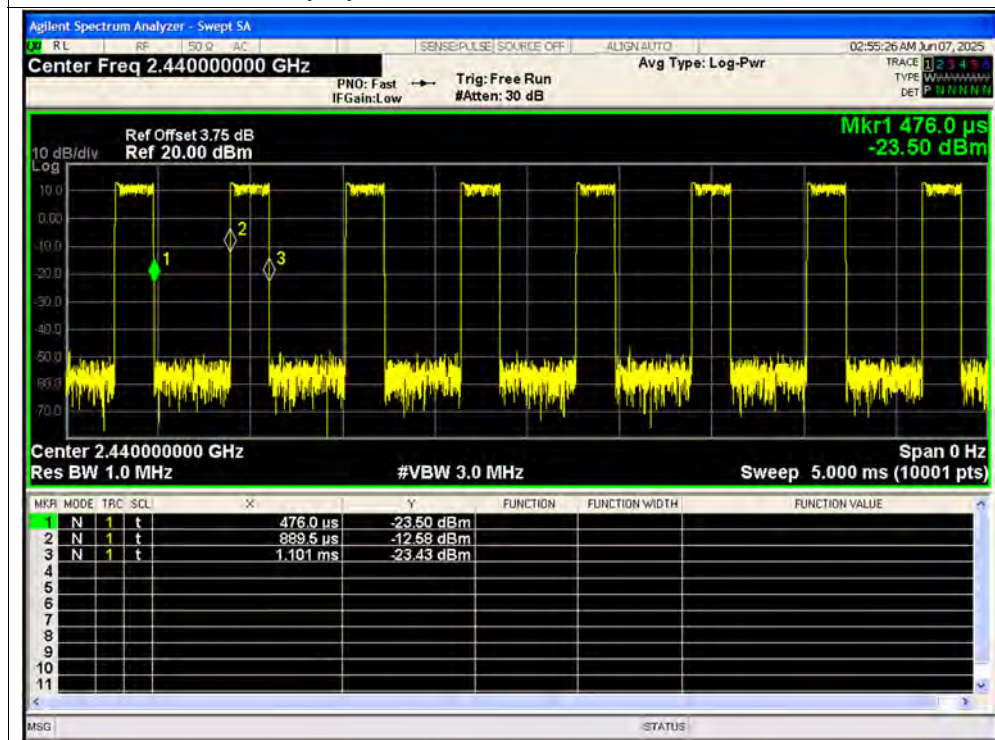


Duty Cycle NVNT BLE 2M 2480MHz Ant1

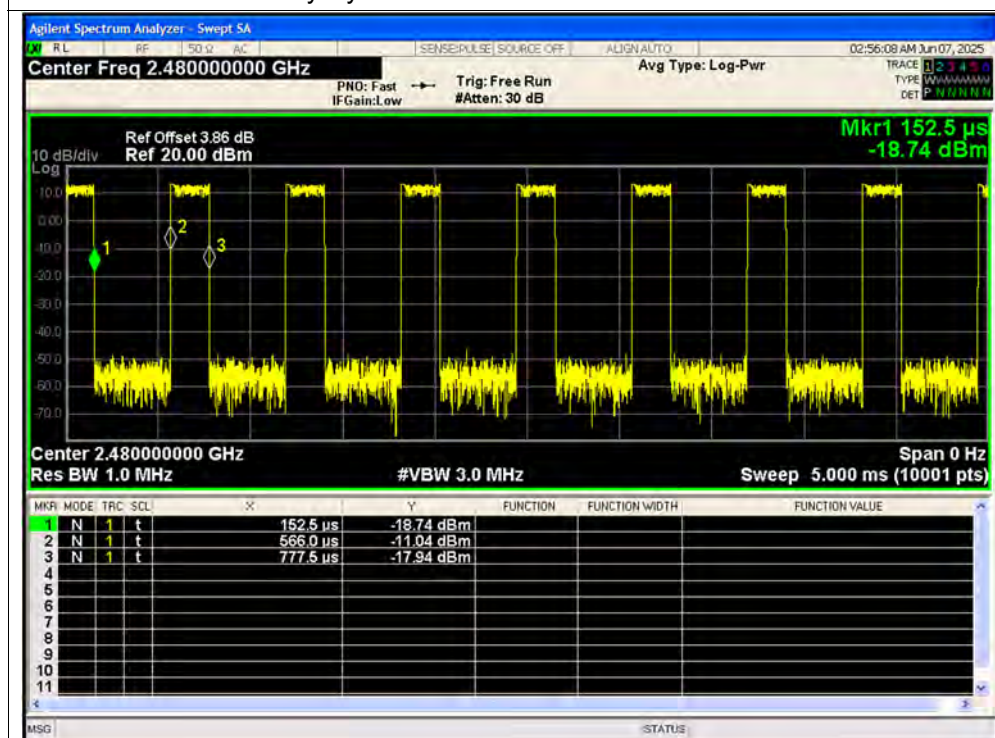

Duty Cycle NVNT BLE 512k 2402MHz Ant1

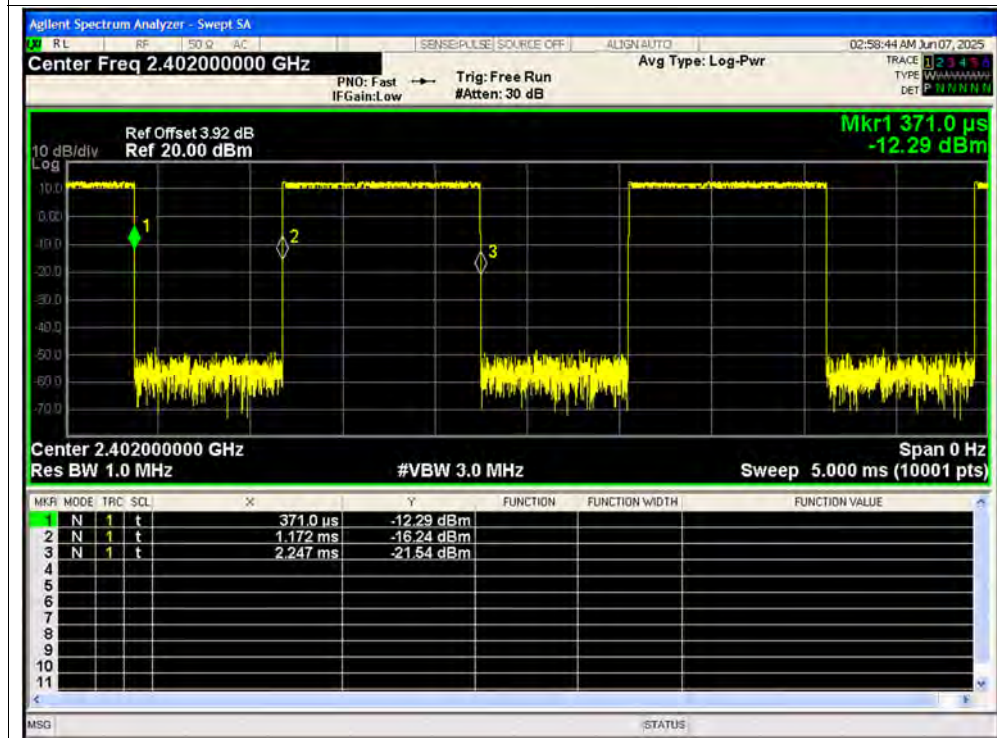


Duty Cycle NVNT BLE 512k 2440MHz Ant1

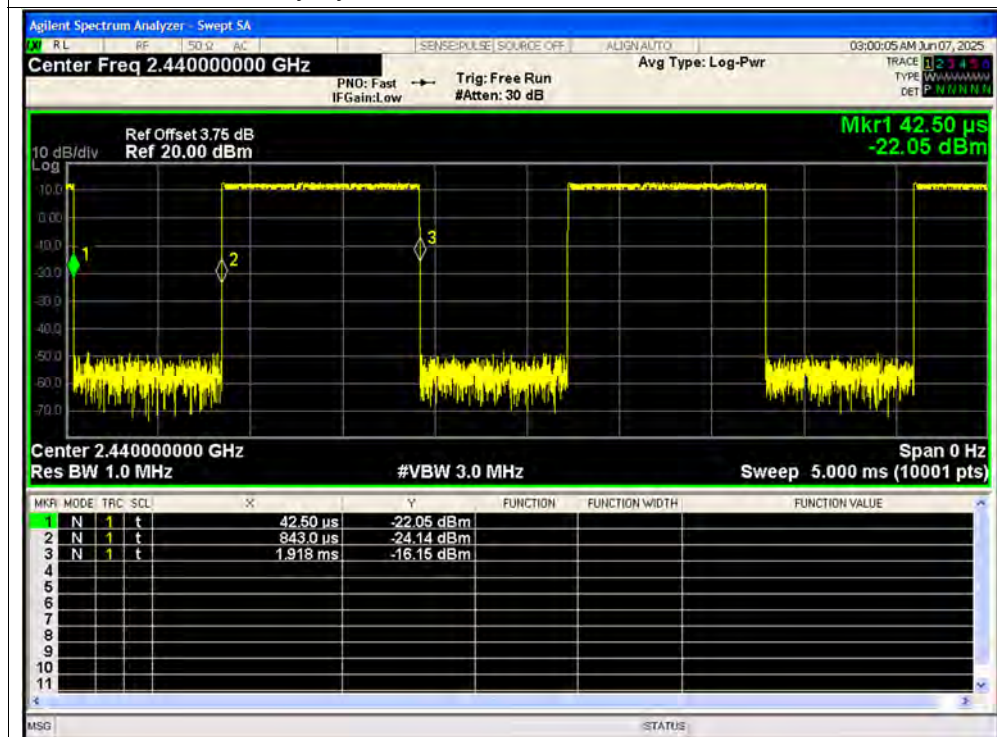



Duty Cycle NVNT BLE 512k 2480MHz Ant1

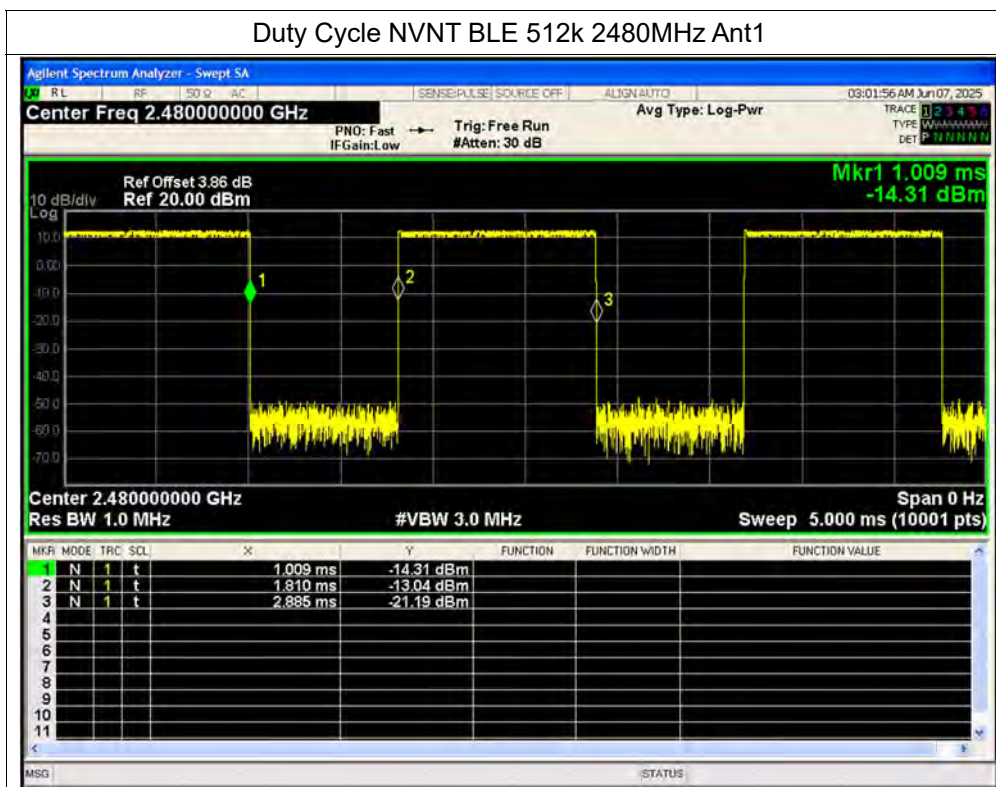

**A.2. Maximum Peak Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	12.51	0	12.51	0.01782	30	Pass
NVNT	BLE 1M	2440	Ant1	13.07	0	13.07	0.02028	30	Pass
NVNT	BLE 1M	2480	Ant1	13.38	0	13.38	0.02178	30	Pass
NVNT	BLE 2M	2402	Ant1	12.87	0	12.87	0.01936	30	Pass
NVNT	BLE 2M	2440	Ant1	12.85	0	12.85	0.01928	30	Pass
NVNT	BLE 2M	2480	Ant1	13.39	0	13.39	0.02183	30	Pass
NVNT	BLE_512K	2402	Ant1	12.84	0	12.84	0.01923	30	Pass
NVNT	BLE_512K	2440	Ant1	12.87	0	12.87	0.01936	30	Pass
NVNT	BLE_512K	2480	Ant1	13.02	0	13.02	0.02004	30	Pass

Test Graphs


Peak Power NVNT BLE 1M 2402MHz Ant1




Peak Power NVNT BLE 1M 2440MHz Ant1

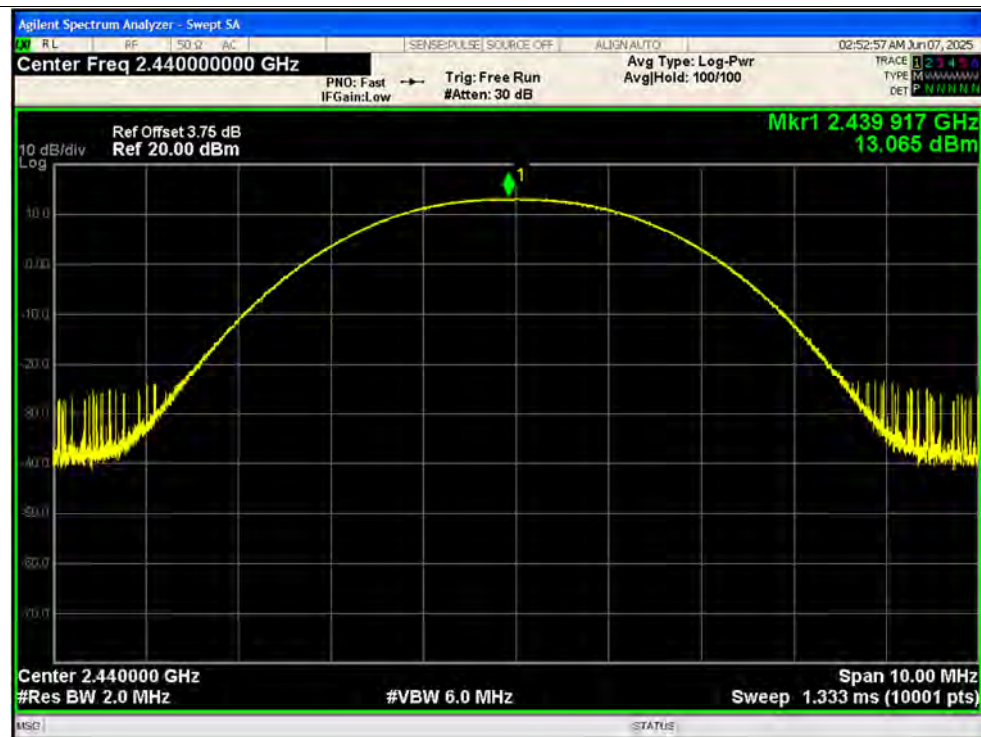


Peak Power NVNT BLE 1M 2480MHz Ant1

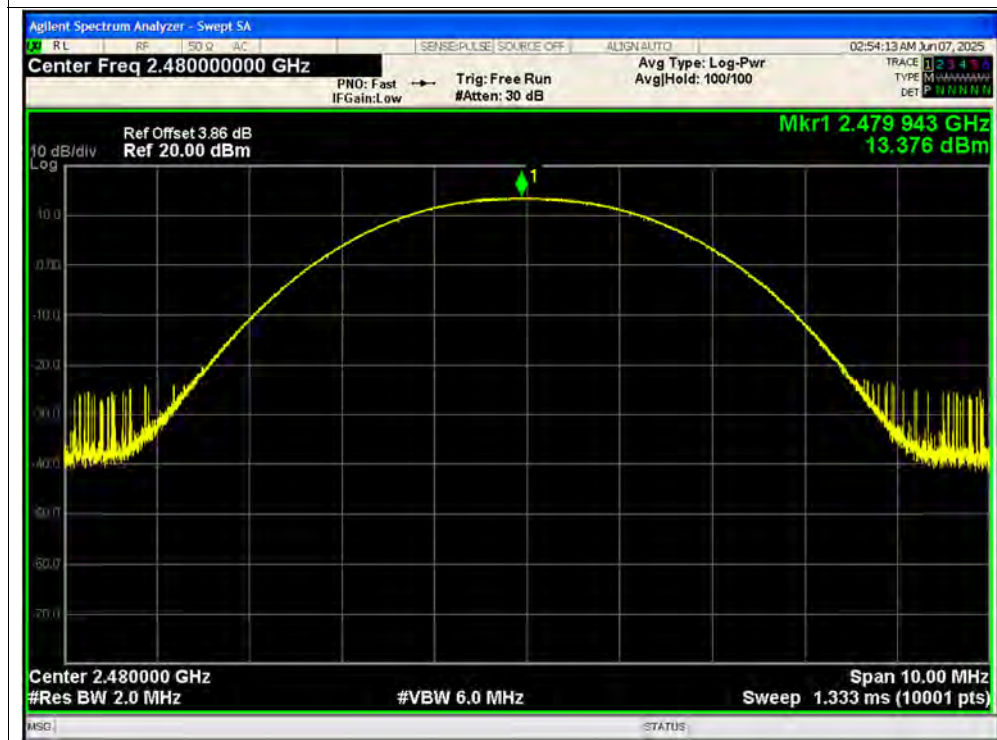

Peak Power NVNT BLE 2M 2402MHz Ant1

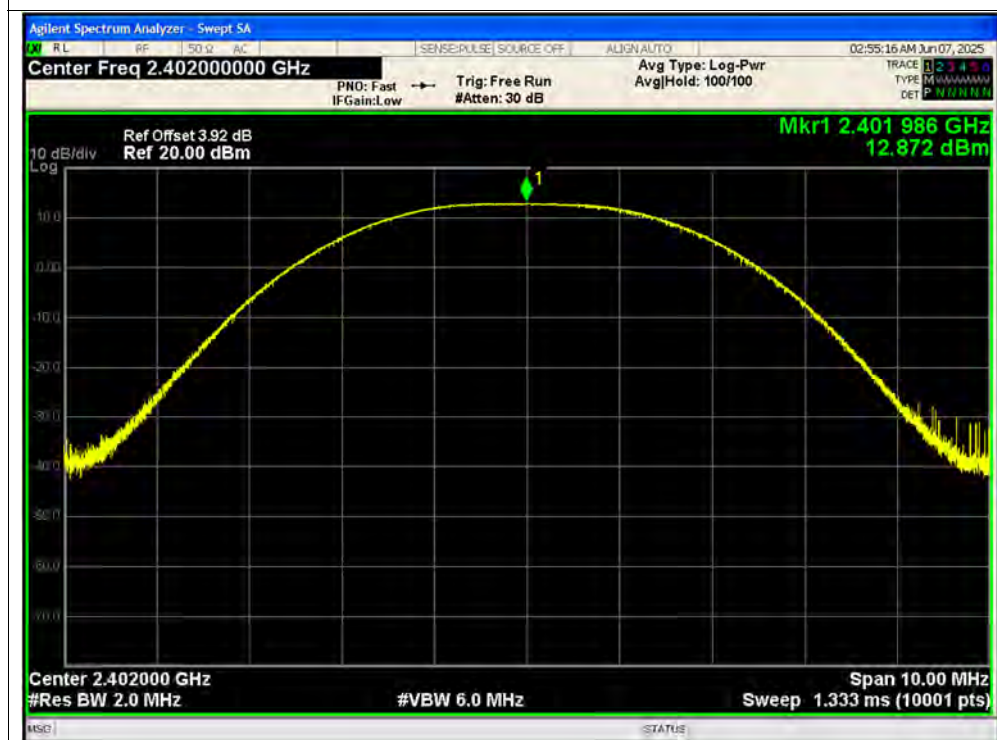


Peak Power NVNT BLE 2M 2440MHz Ant1

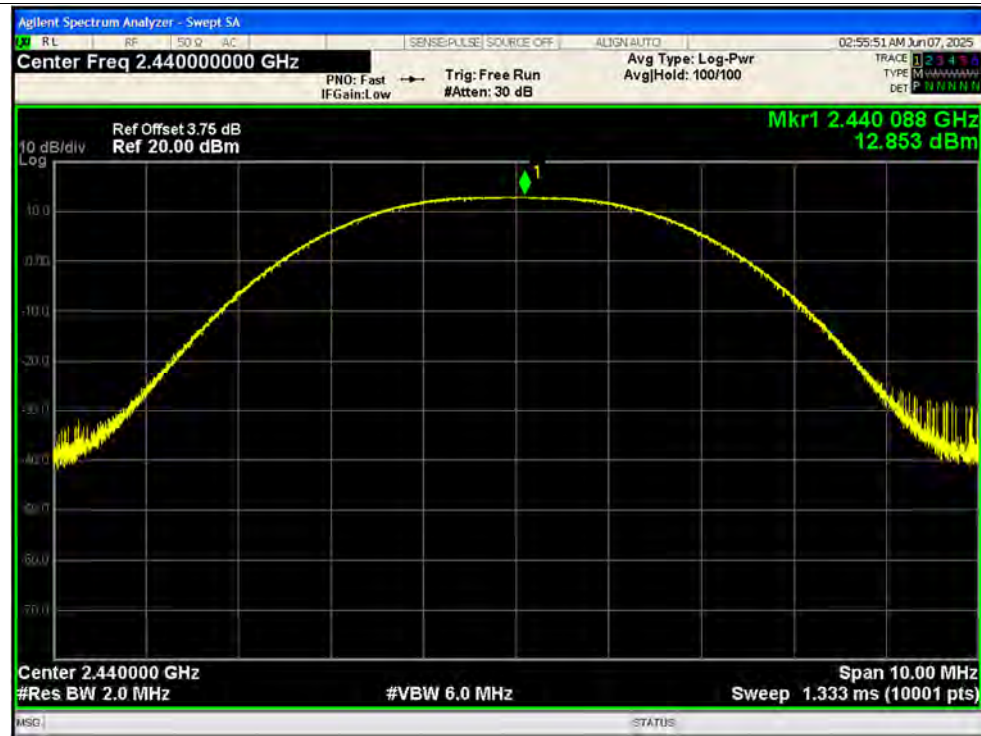


Peak Power NVNT BLE 2M 2480MHz Ant1



Peak Power NVNT BLE 512k 2402MHz Ant1

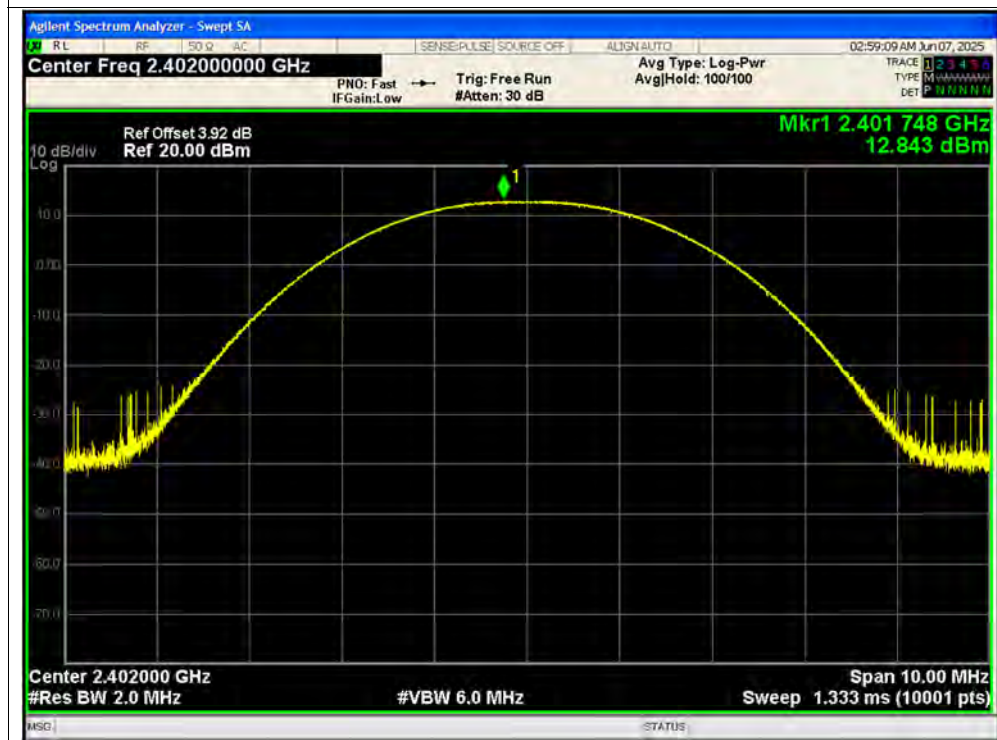


Peak Power NVNT BLE 512k 2440MHz Ant1

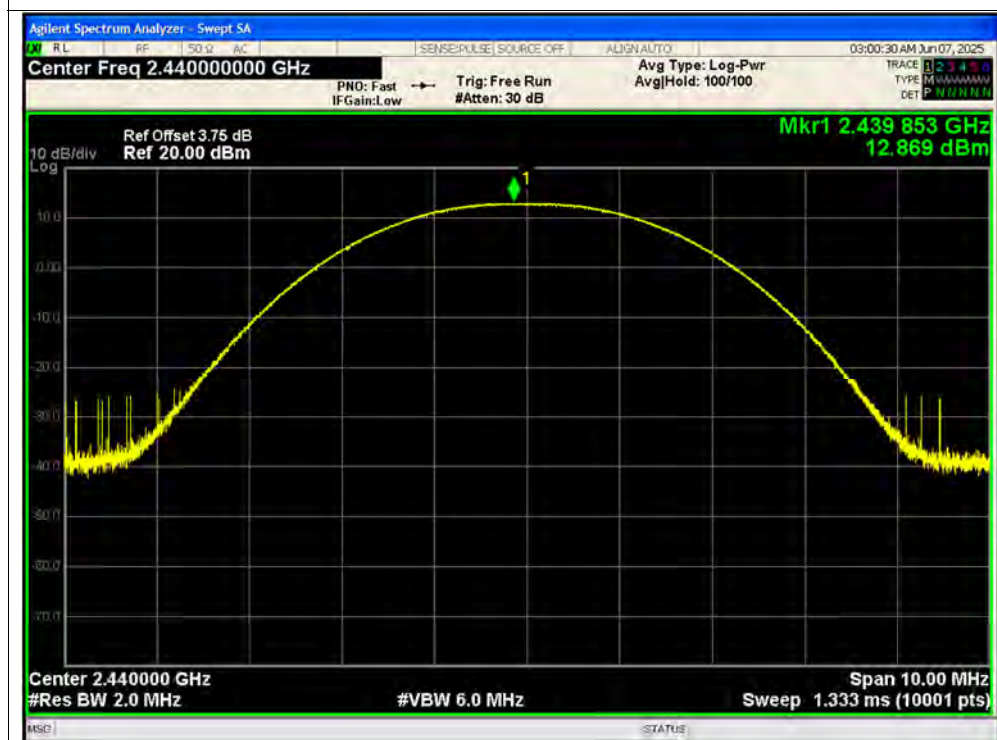



Peak Power NVNT BLE 512k 2480MHz Ant1

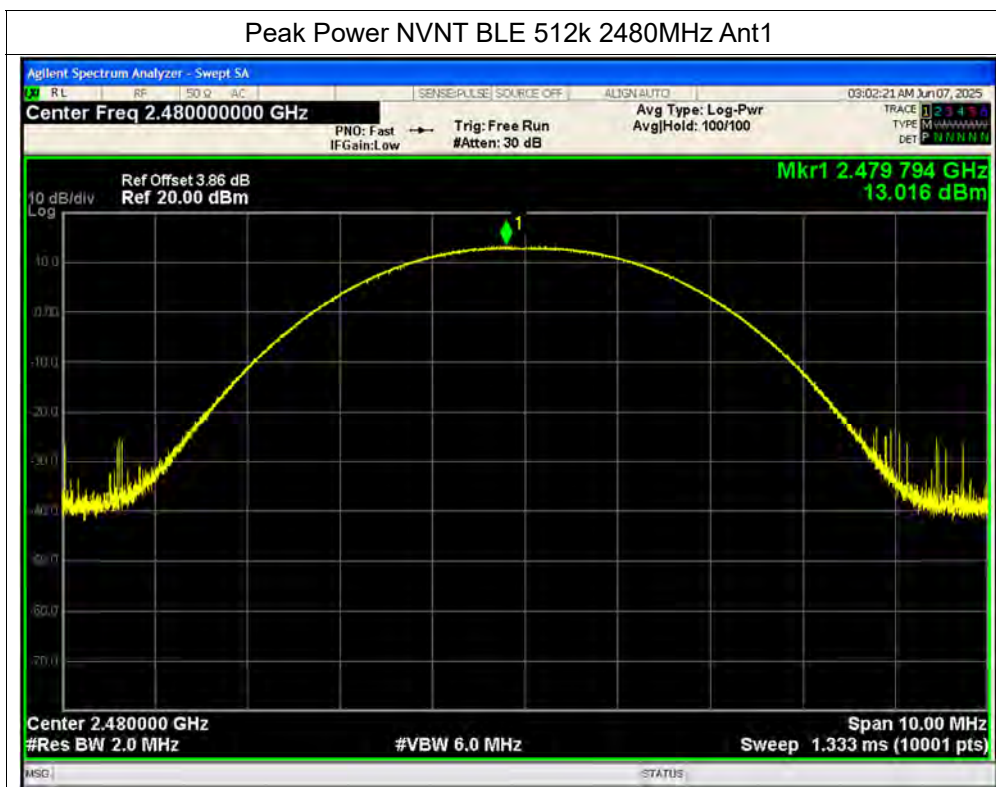


**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	9.23	1.98	11.21	0.01321	30	Pass
NVNT	BLE 1M	2440	Ant1	9.89	1.98	11.87	0.01538	30	Pass
NVNT	BLE 1M	2480	Ant1	10.14	1.98	12.12	0.01629	30	Pass
NVNT	BLE 2M	2402	Ant1	7.26	4.71	11.97	0.01574	30	Pass
NVNT	BLE 2M	2440	Ant1	7.25	4.71	11.96	0.0157	30	Pass
NVNT	BLE 2M	2480	Ant1	7.75	4.71	12.46	0.01762	30	Pass
NVNT	BLE_512K	2402	Ant1	8.72	2.42	11.14	0.013	30	Pass
NVNT	BLE_512K	2440	Ant1	9.33	2.42	11.75	0.01496	30	Pass
NVNT	BLE_512K	2480	Ant1	9.31	2.42	11.73	0.01489	30	Pass




Test Graphs


Average Power NVNT BLE 1M 2402MHz Ant1

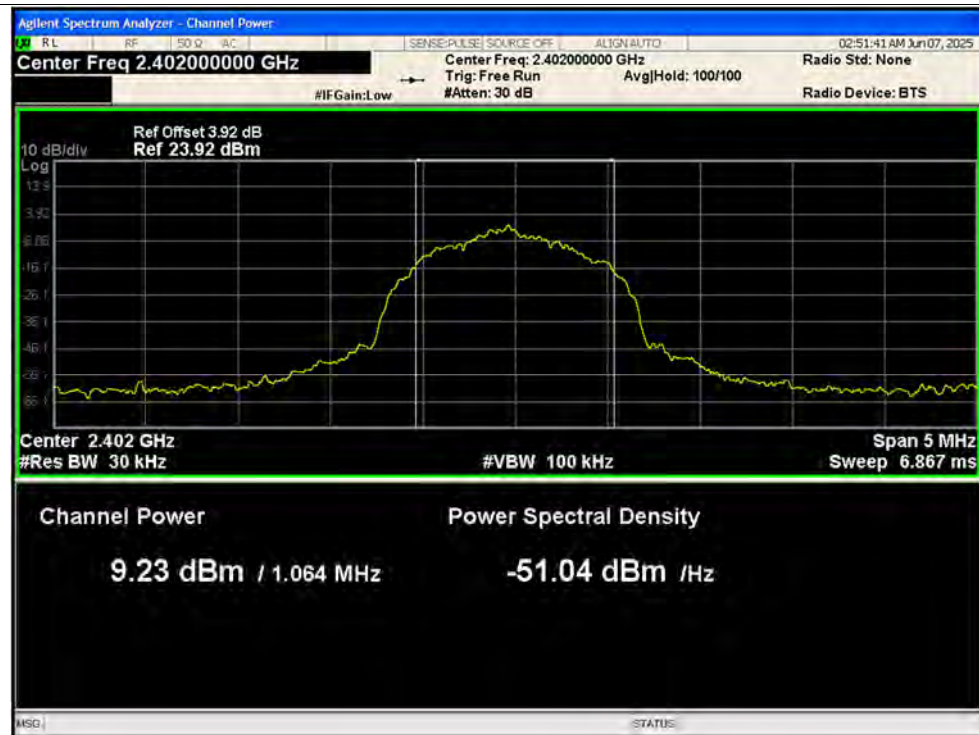

Average Power NVNT BLE 1M 2440MHz Ant1

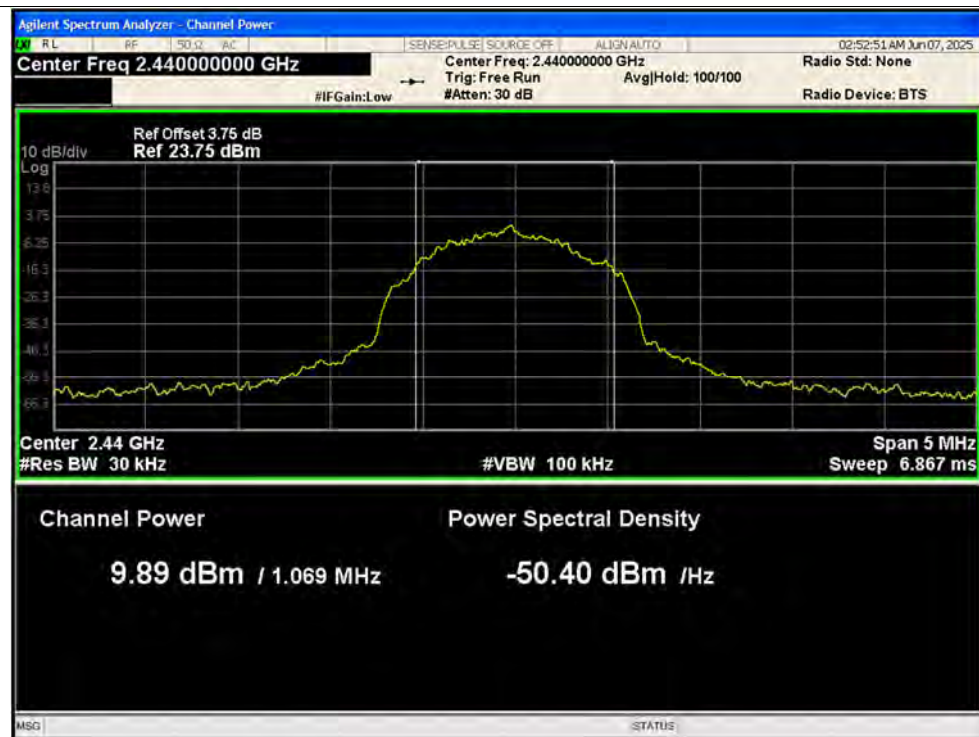

Average Power NVNT BLE 1M 2480MHz Ant1

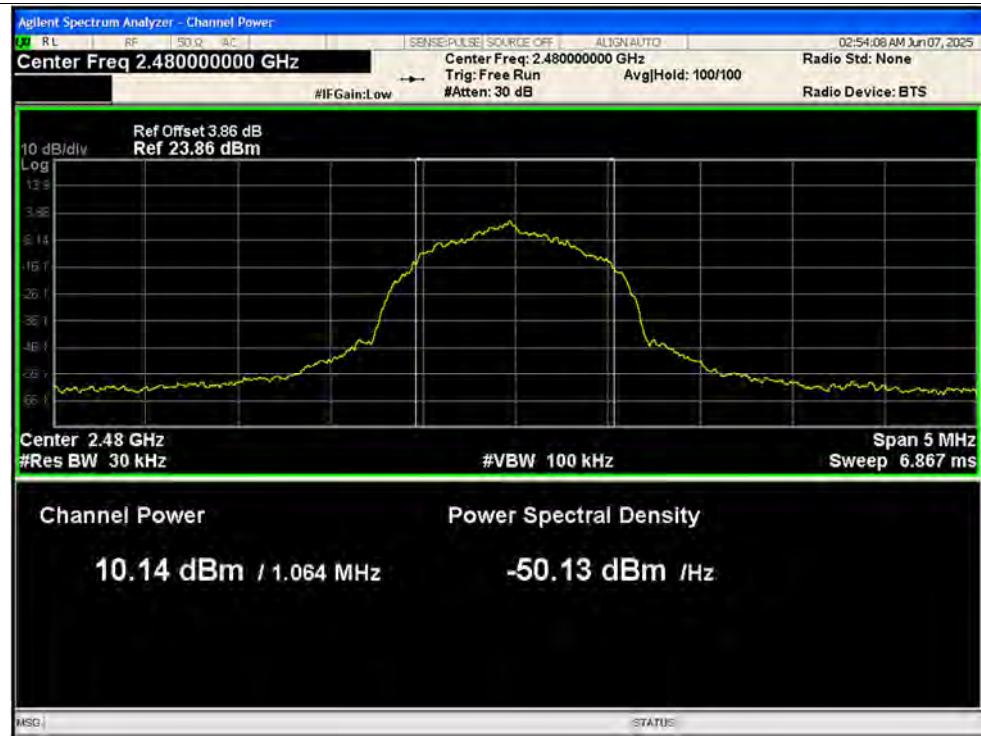


Average Power NVNT BLE 2M 2402MHz Ant1






Average Power NVNT BLE 2M 2440MHz Ant1

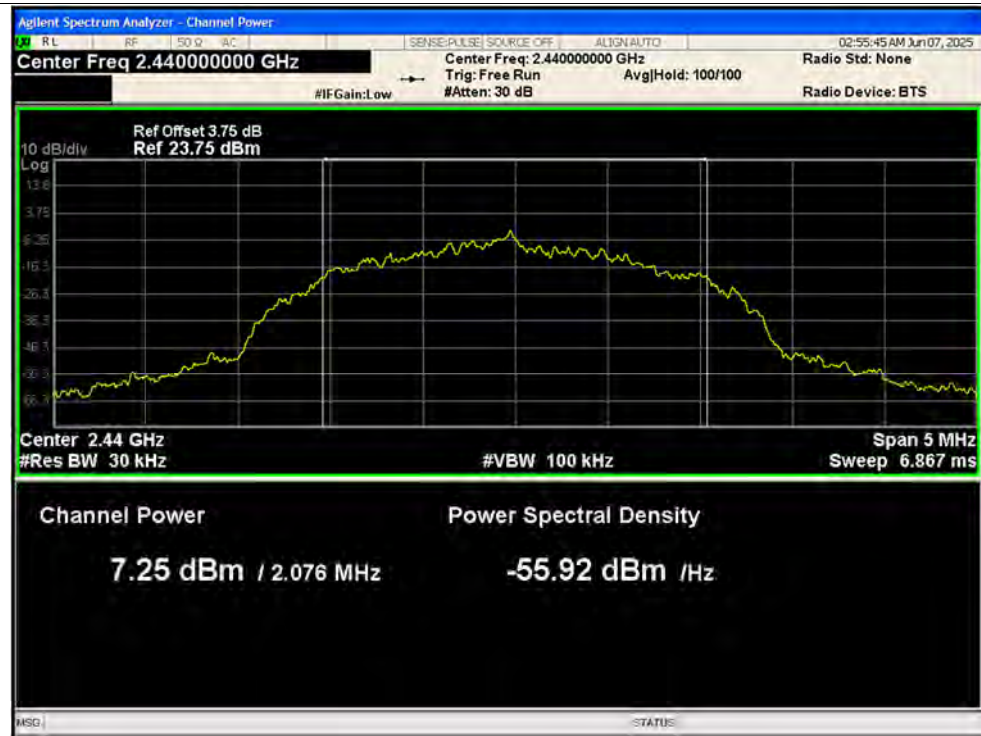


Average Power NVNT BLE 2M 2480MHz Ant1



Average Power NVNT BLE 512k 2402MHz Ant1

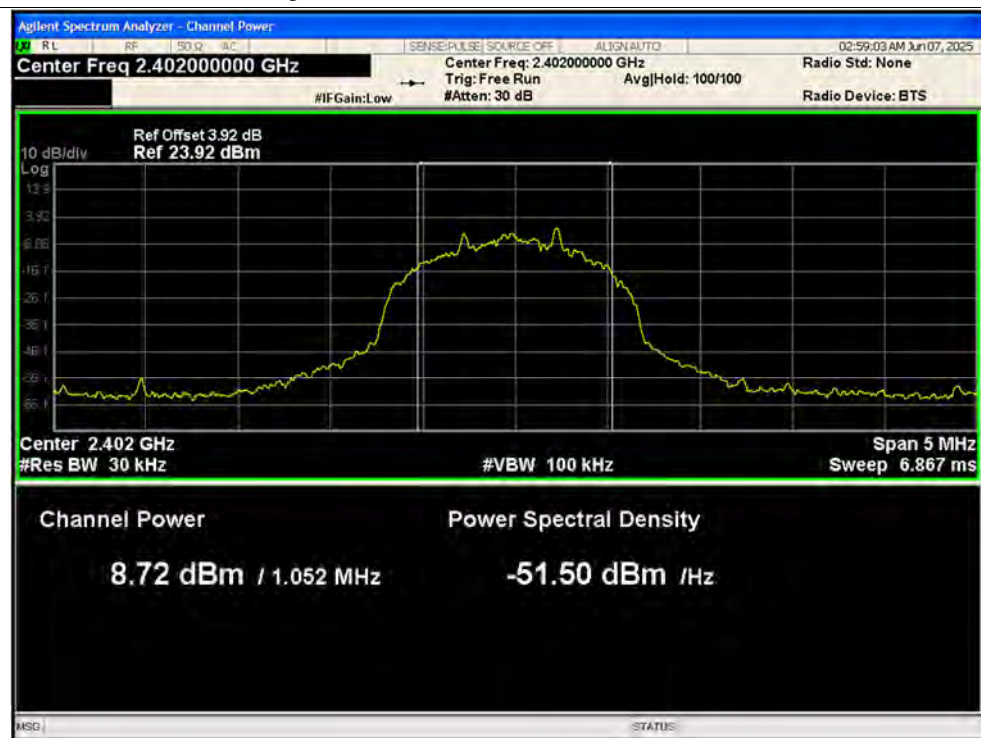


Average Power NVNT BLE 512k 2440MHz Ant1

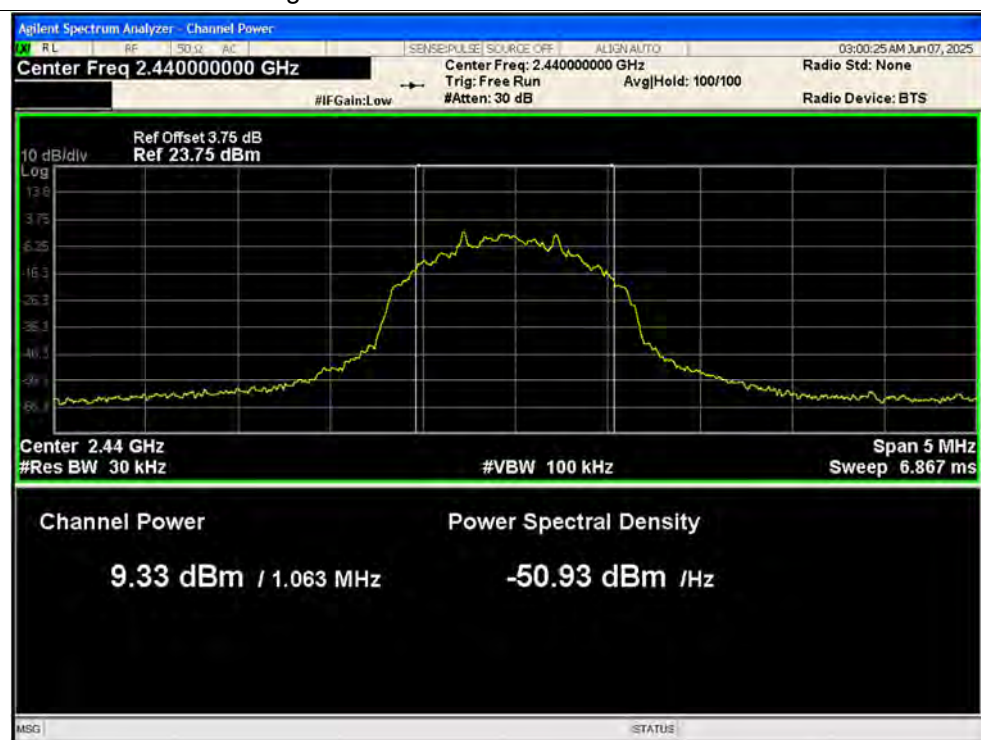



Average Power NVNT BLE 512k 2480MHz Ant1

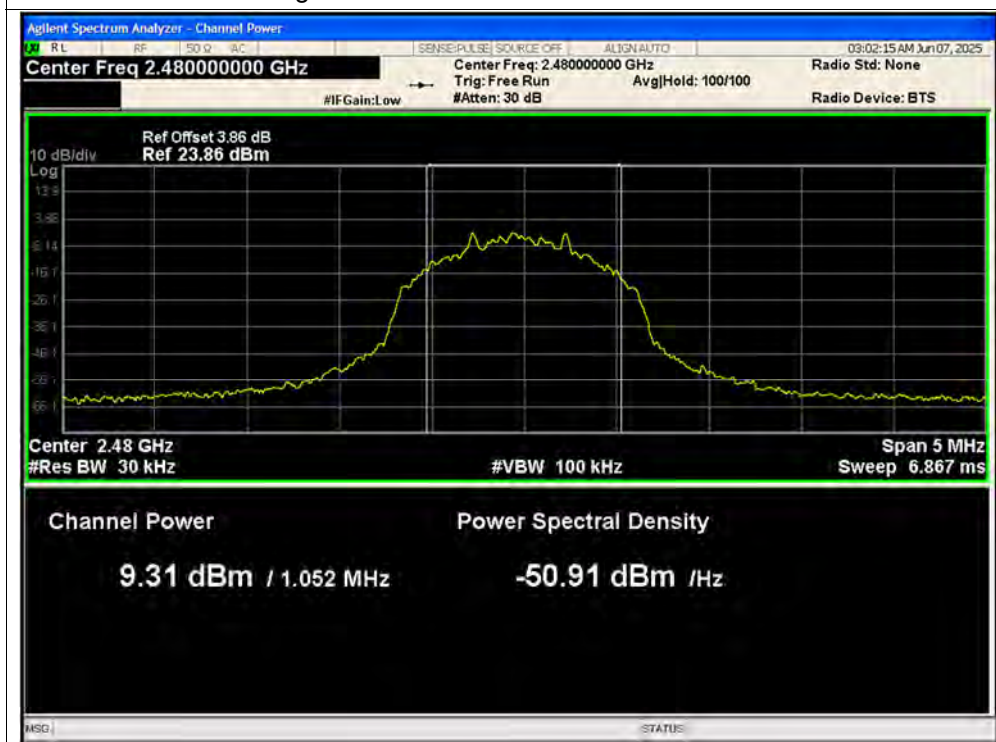


**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6154	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6322	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.636	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.098	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.047	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.068	0.5	Pass
NVNT	BLE_512K	2402	Ant1	0.616	0.5	Pass
NVNT	BLE_512K	2440	Ant1	0.6445	0.5	Pass
NVNT	BLE_512K	2480	Ant1	0.6287	0.5	Pass




Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

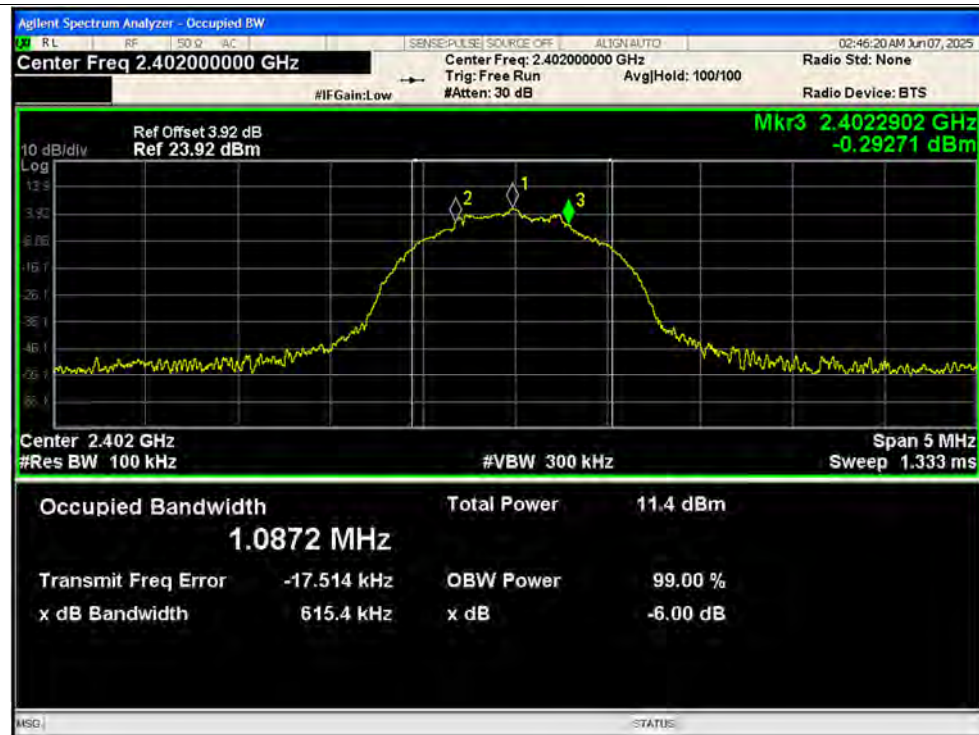


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

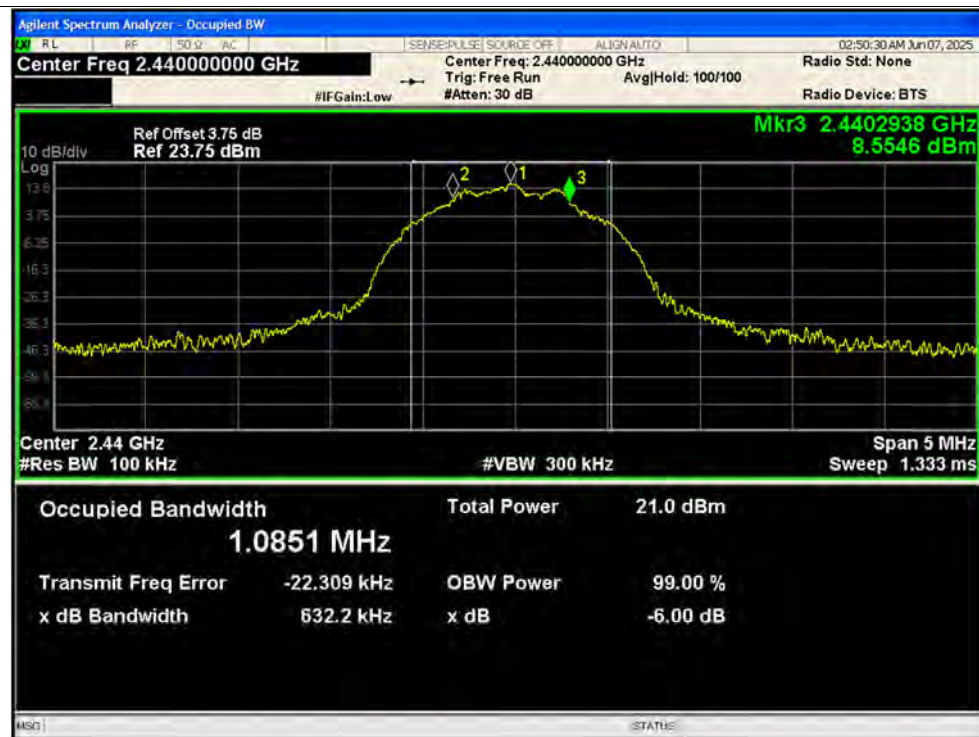



-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

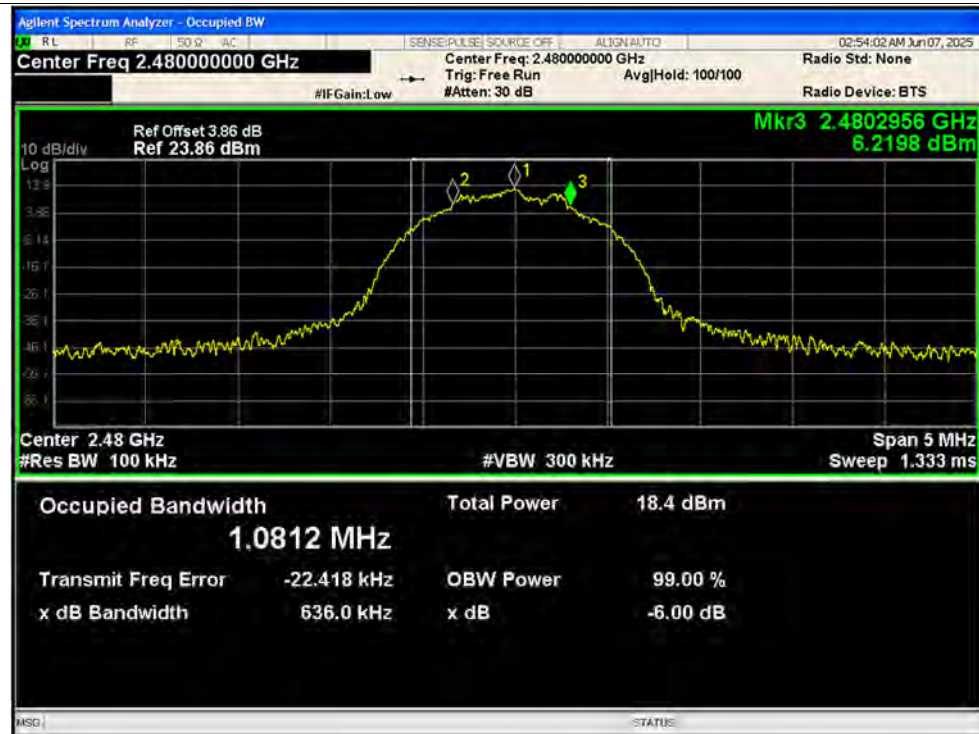

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1




-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1




-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1



-6dB Bandwidth NVNT BLE_512K 2402MHz Ant1

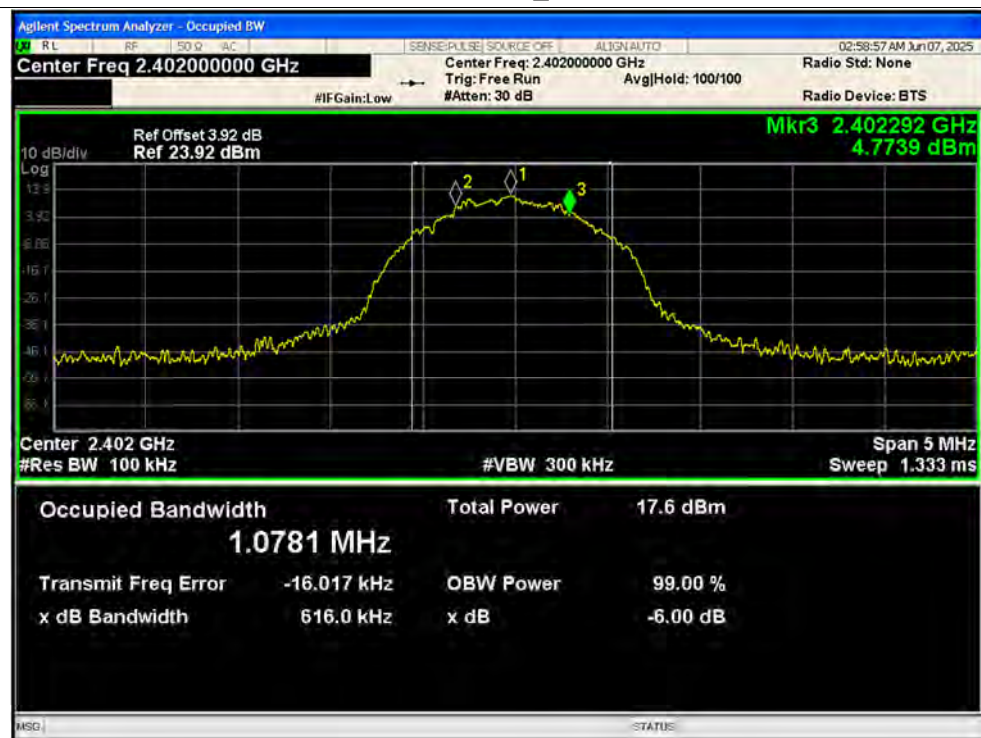


-6dB Bandwidth NVNT BLE_512K 2440MHz Ant1

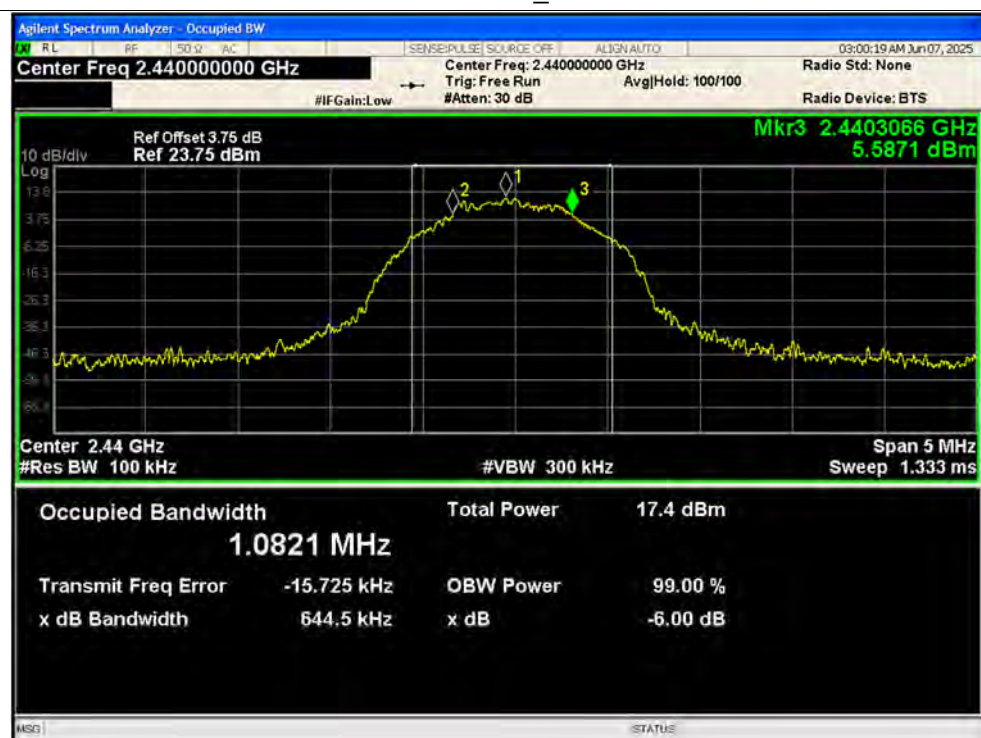



-6dB Bandwidth NVNT BLE_512K 2480MHz Ant1

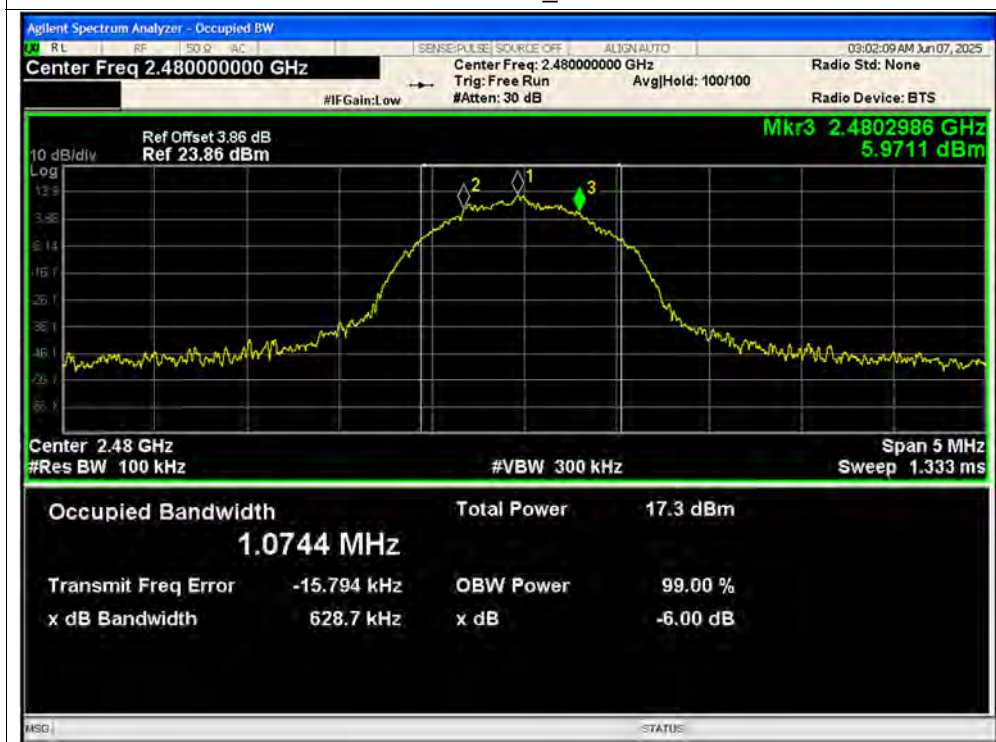

**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.4	-20	Pass
NVNT	BLE 1M	2440	Ant1	-55.26	-20	Pass
NVNT	BLE 1M	2480	Ant1	-53.81	-20	Pass
NVNT	BLE 2M	2402	Ant1	-56.49	-20	Pass
NVNT	BLE 2M	2440	Ant1	-55.58	-20	Pass
NVNT	BLE 2M	2480	Ant1	-55.58	-20	Pass
NVNT	BLE_512K	2402	Ant1	-52.03	-20	Pass
NVNT	BLE_512K	2440	Ant1	-51.55	-20	Pass
NVNT	BLE_512K	2480	Ant1	-51.5	-20	Pass

Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

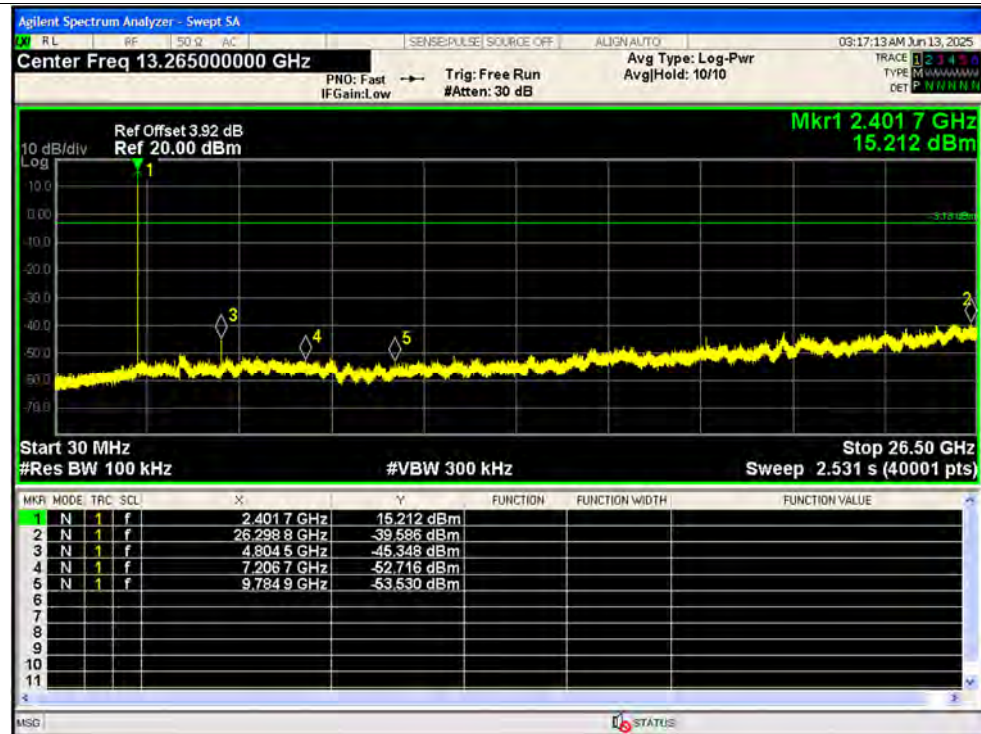

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

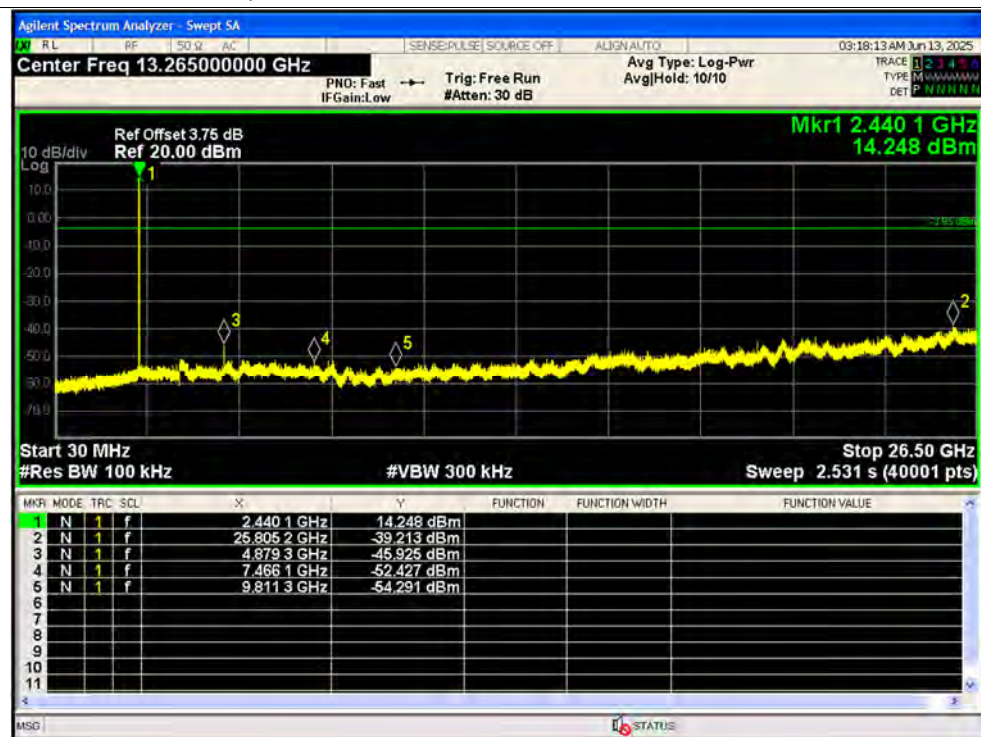

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

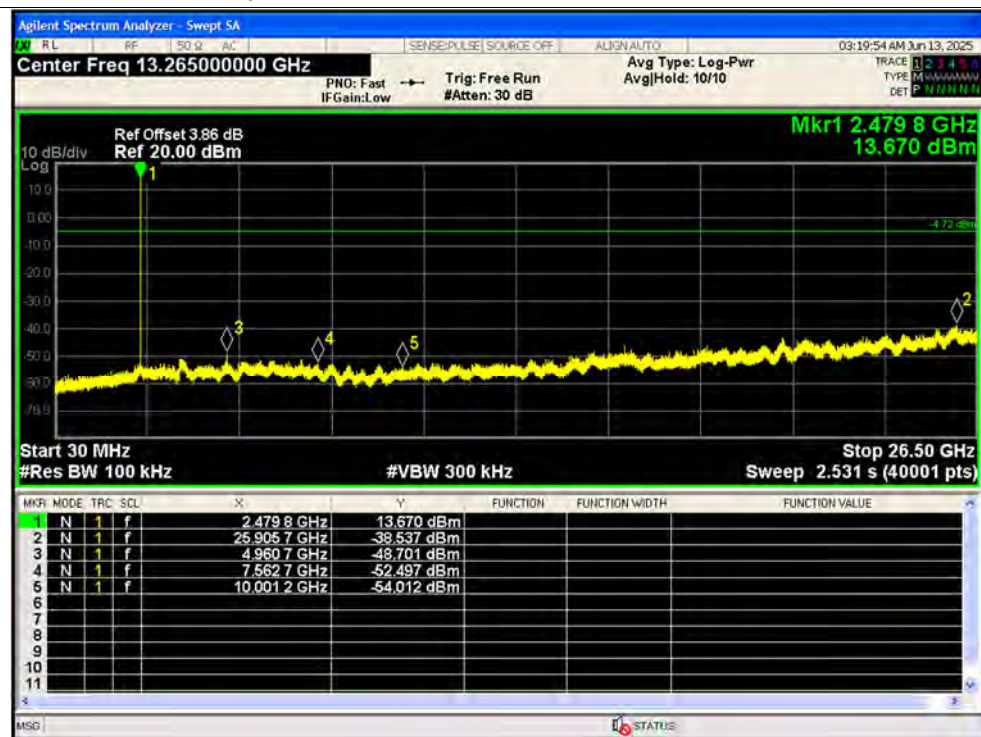

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

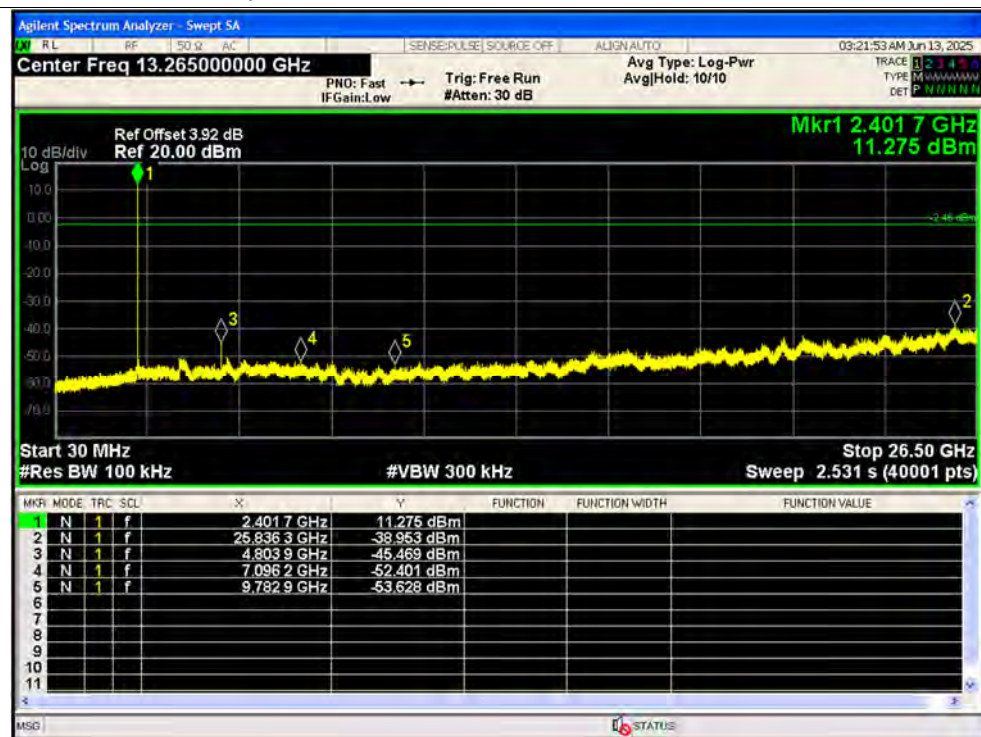

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

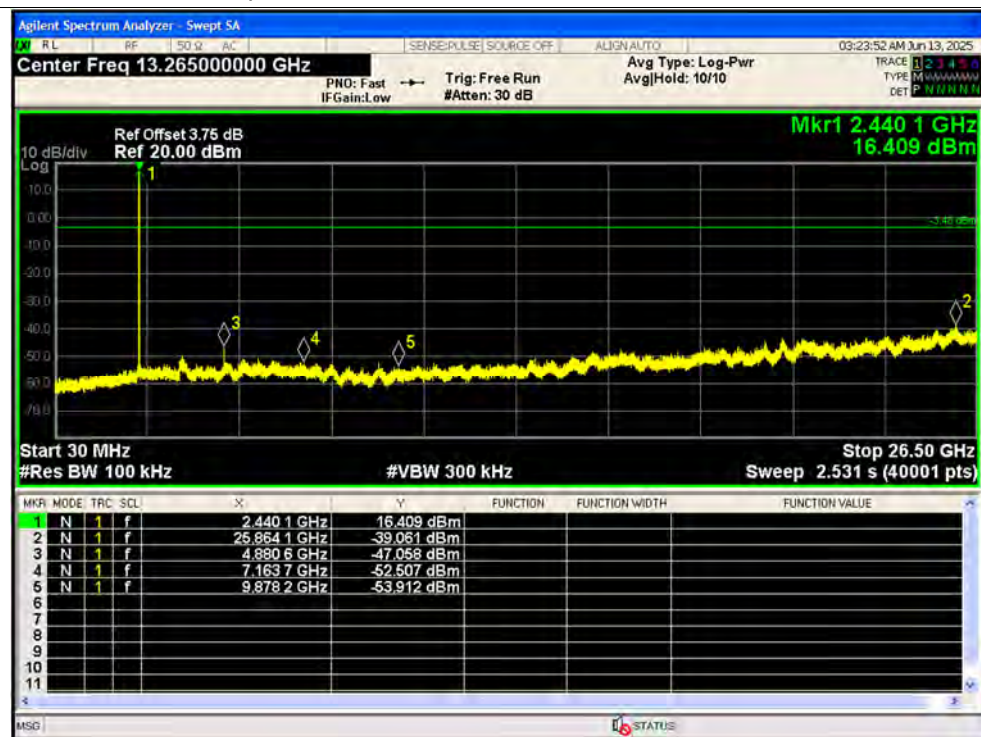

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

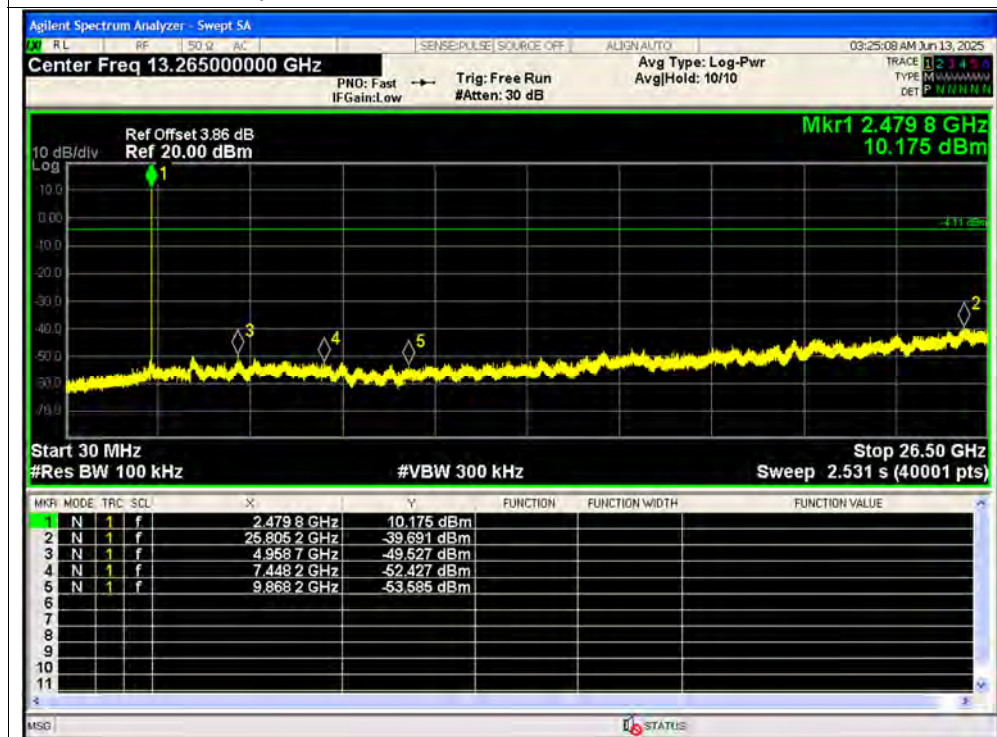

Tx. Spurious NVNT BLE 512k 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 512k 2402MHz Ant1 Emission

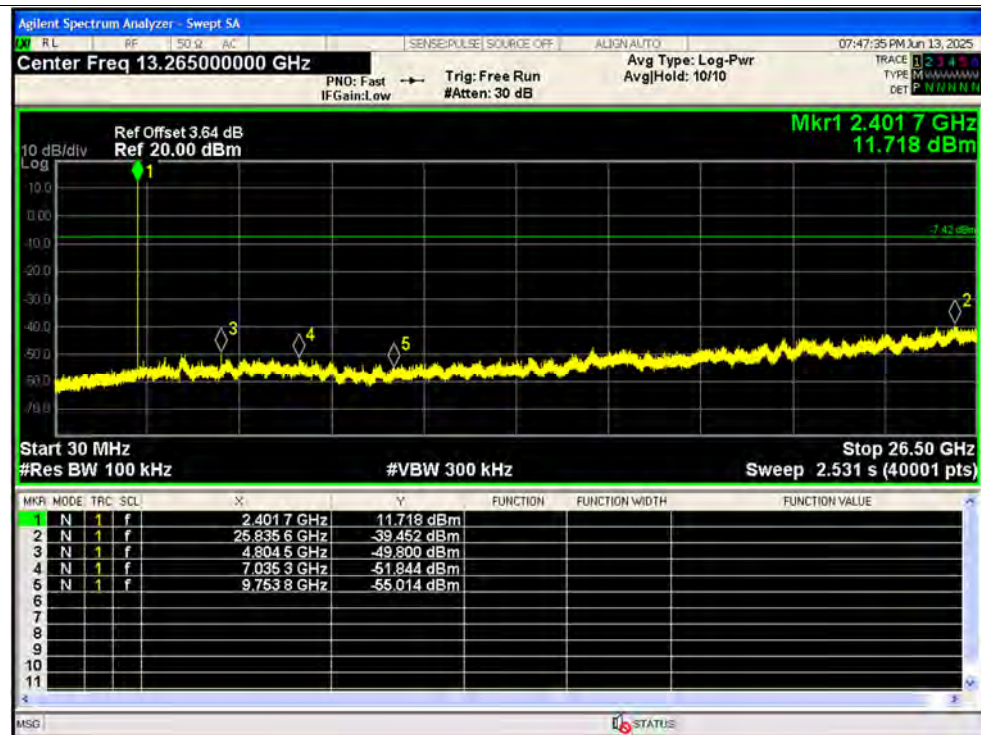

Tx. Spurious NVNT BLE 512k 2440MHz Ant1 Ref




Tx. Spurious NVNT BLE 512k 2440MHz Ant1 Emission

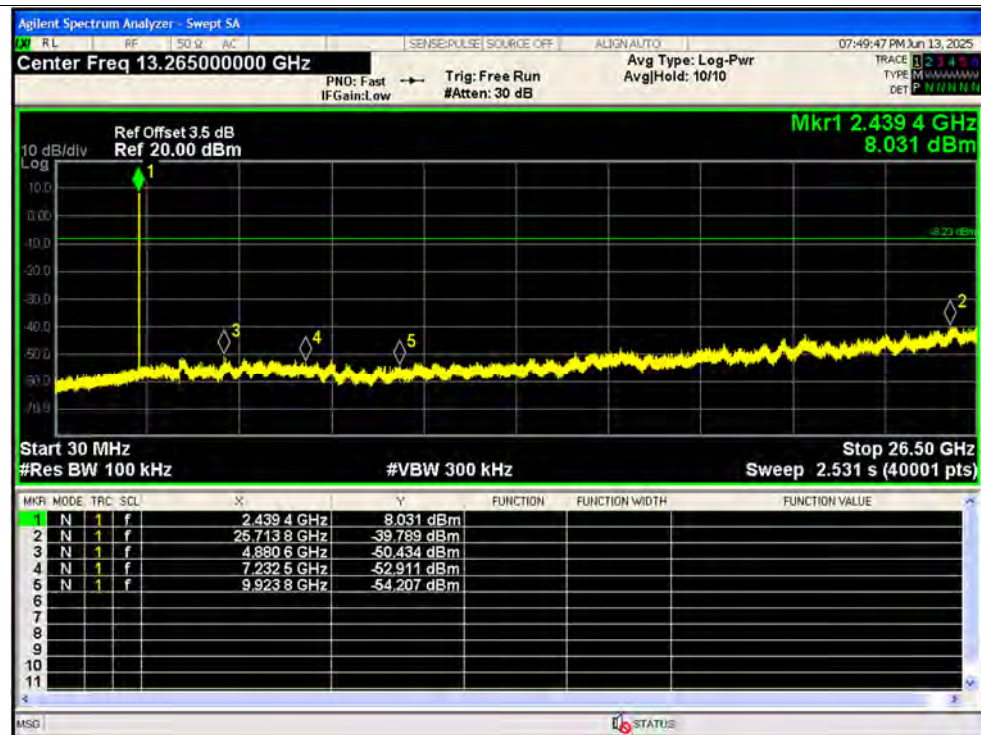

Tx. Spurious NVNT BLE 512k 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 512k 2480MHz Ant1 Emission

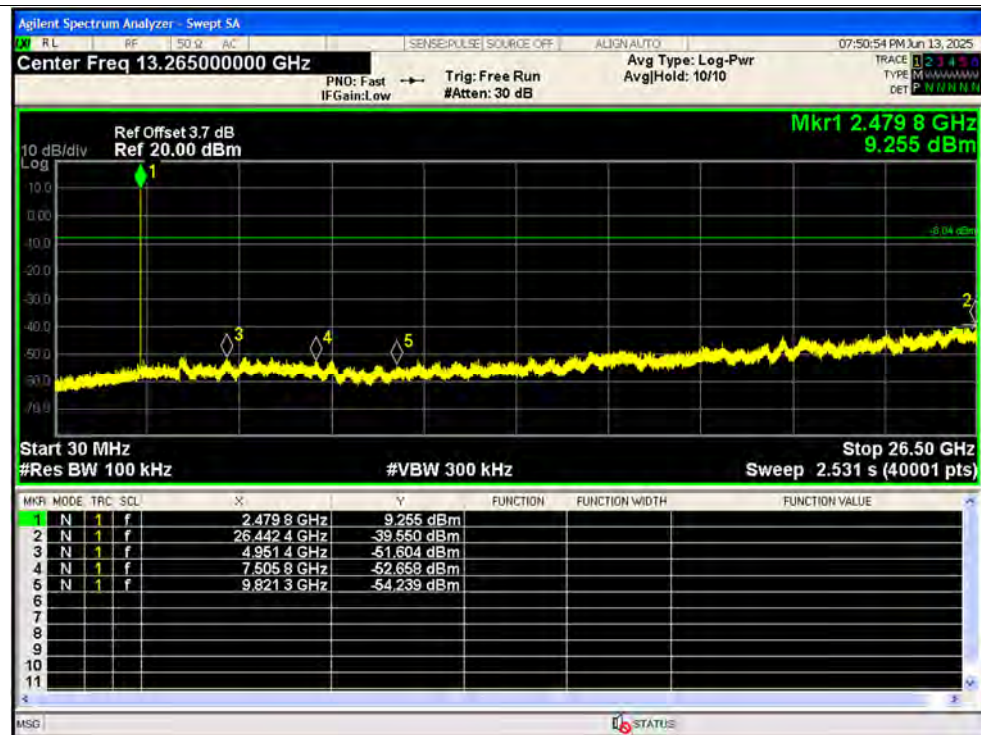

**A.6. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.47	-20	Pass
NVNT	BLE 1M	2480	Ant1	-59.4	-20	Pass
NVNT	BLE 2M	2402	Ant1	-51.43	-20	Pass
NVNT	BLE 2M	2480	Ant1	-60.37	-20	Pass
NVNT	BLE_512K	2402	Ant1	-55.83	-20	Pass
NVNT	BLE_512K	2480	Ant1	-59.93	-20	Pass

Test Graphs


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

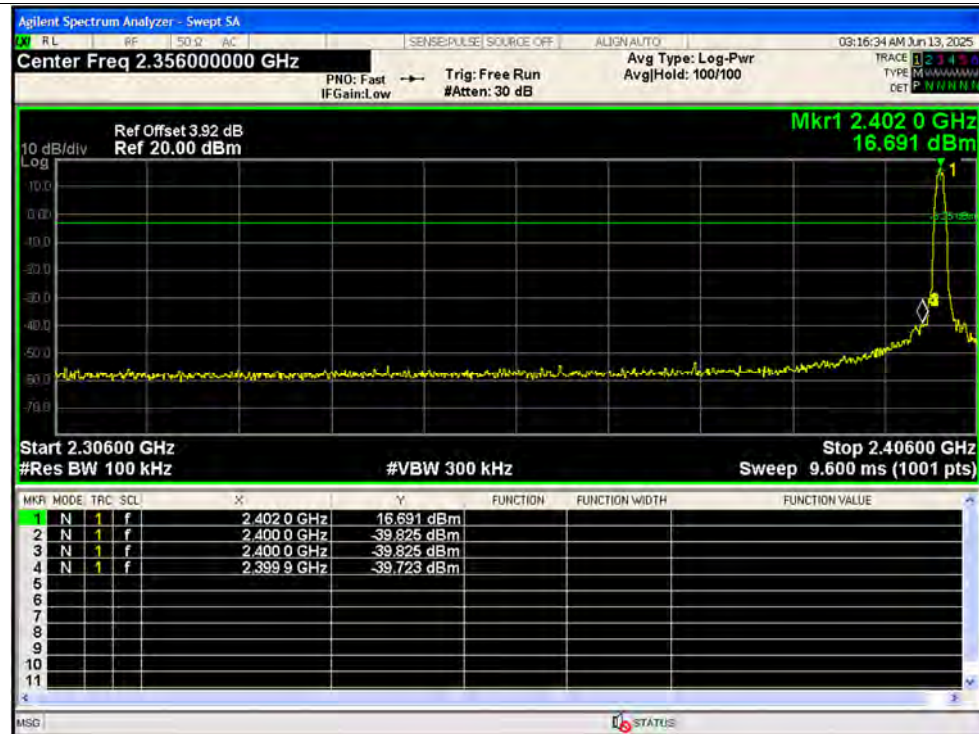

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

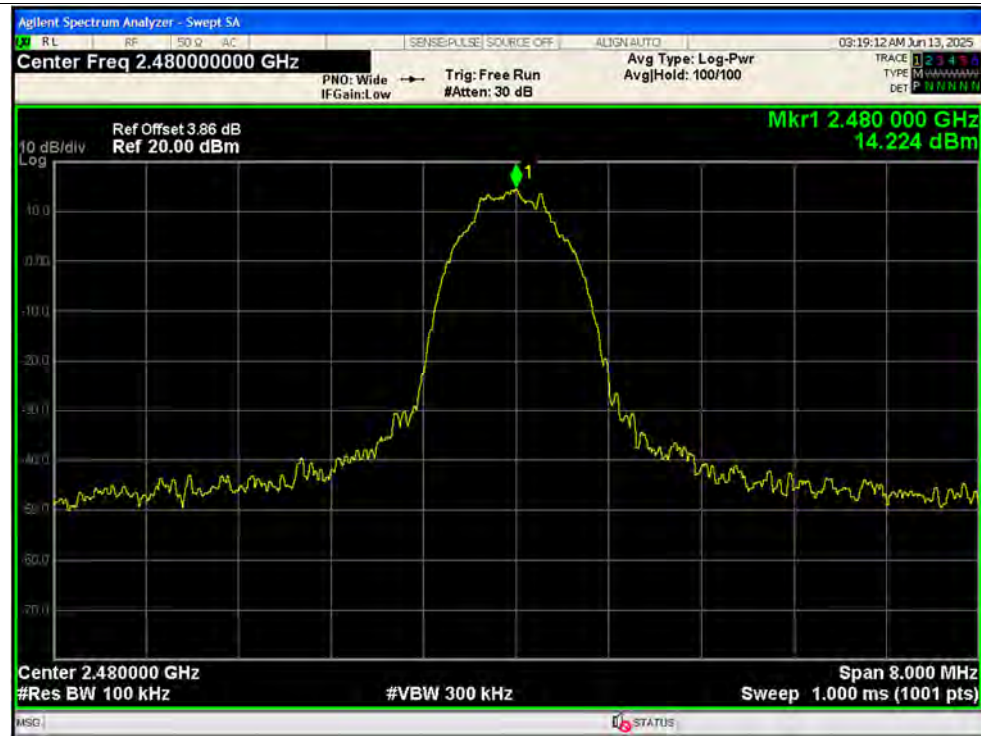


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

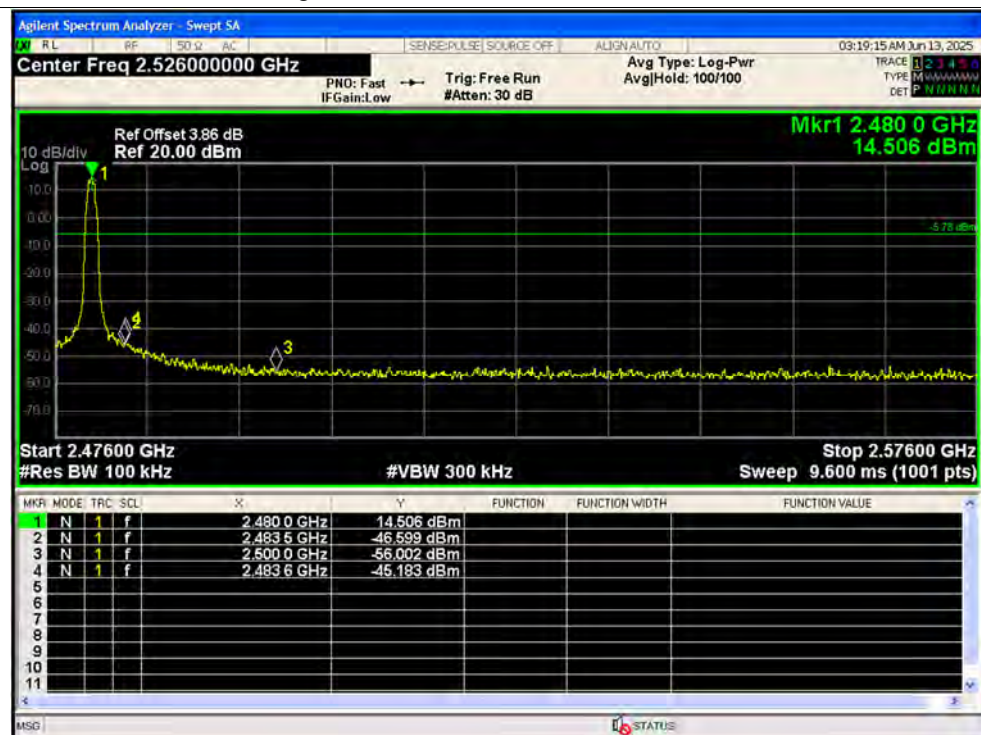

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

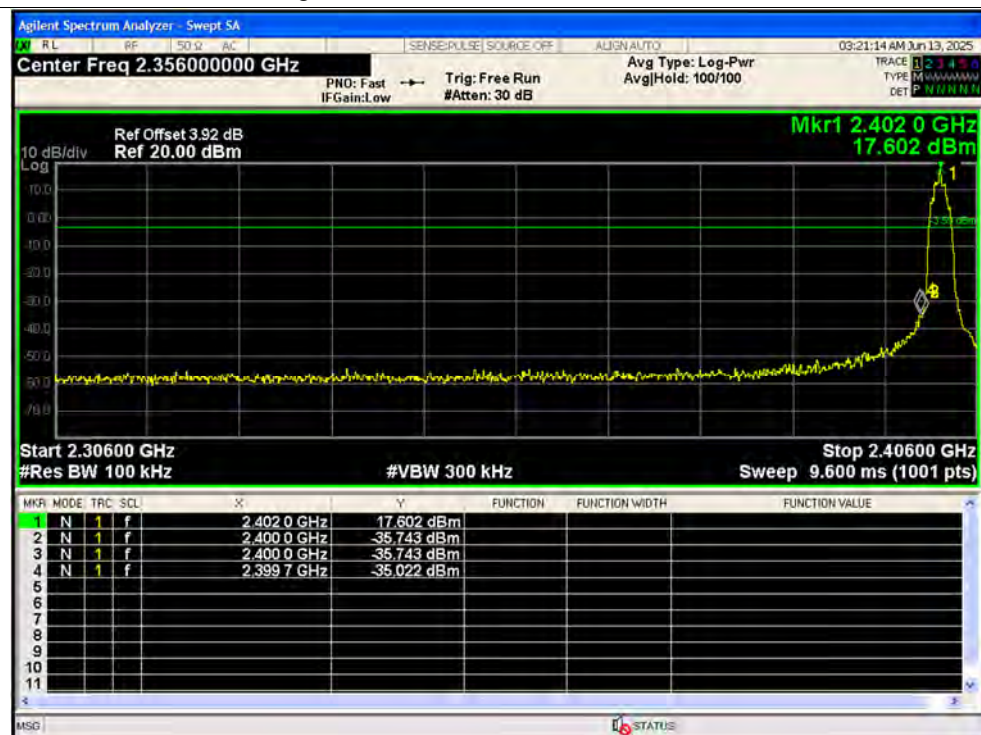


Band Edge NVNT BLE 2M 2480MHz Ant1 Ref




Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

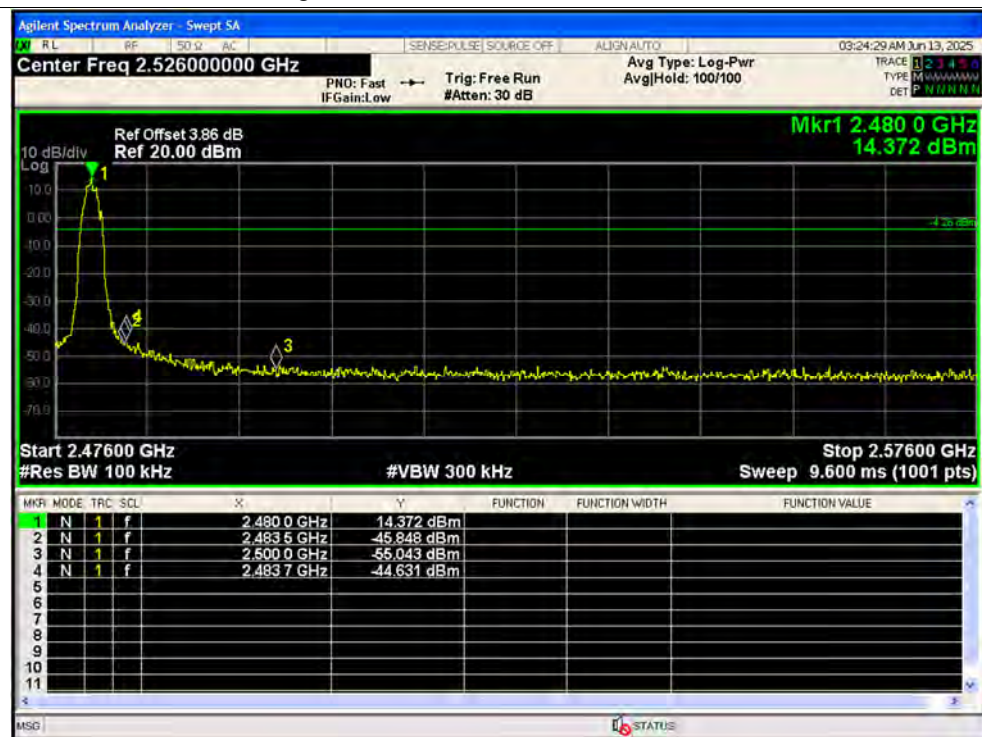


Band Edge NVNT BLE 512k 2402MHz Ant1 Ref

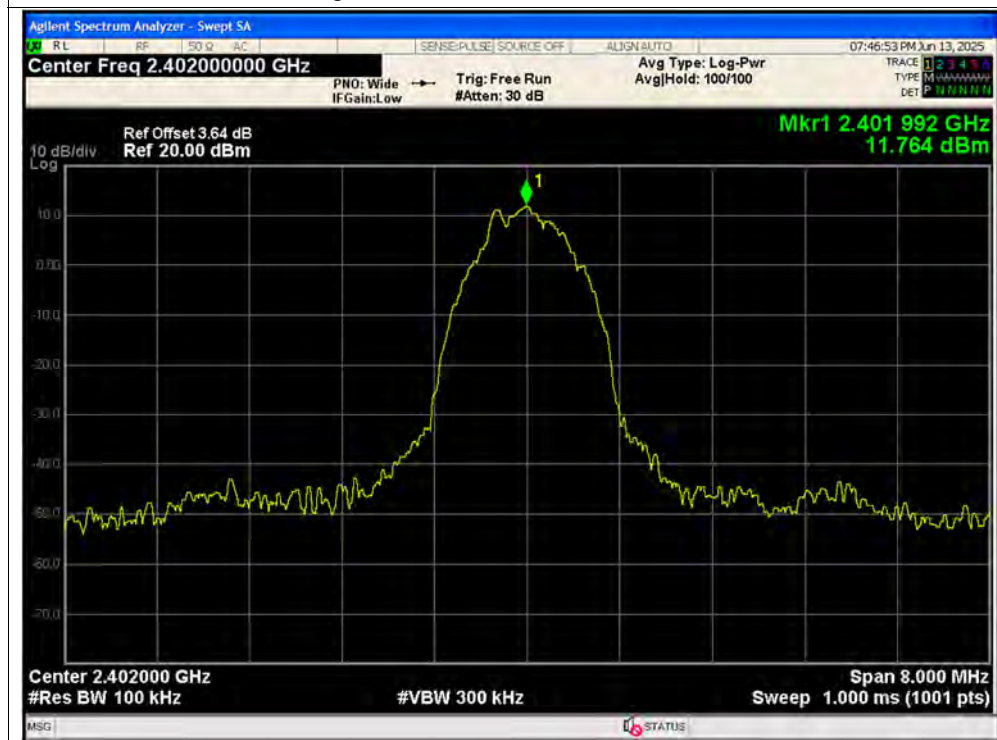


Band Edge NVNT BLE 512k 2402MHz Ant1 Emission

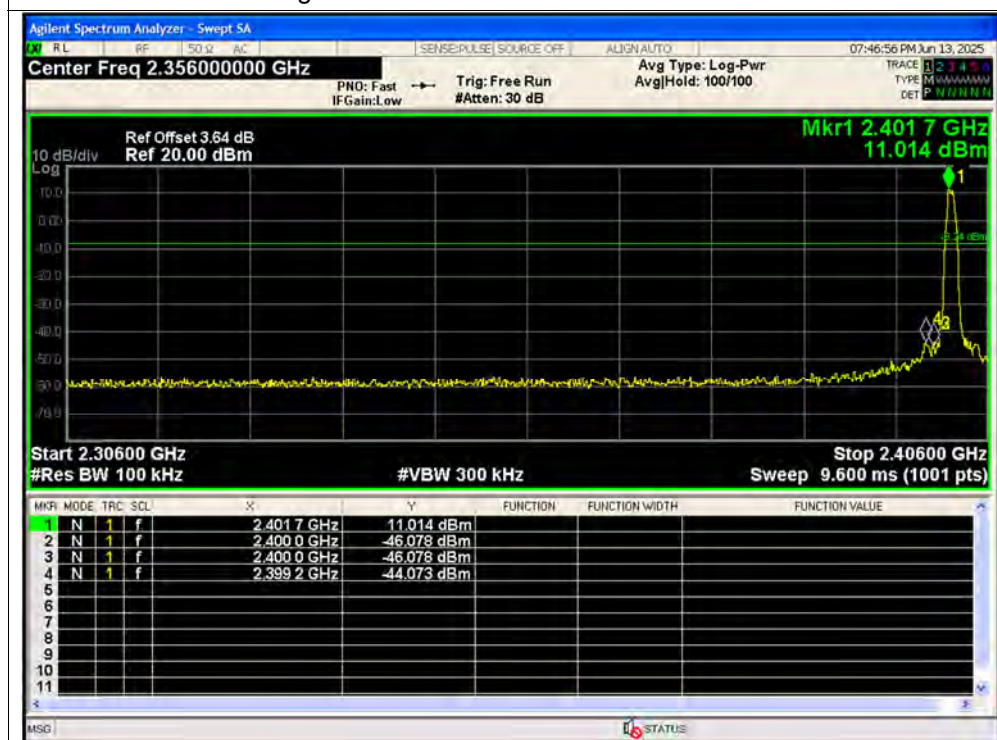

Band Edge NVNT BLE 512k 2480MHz Ant1 Ref

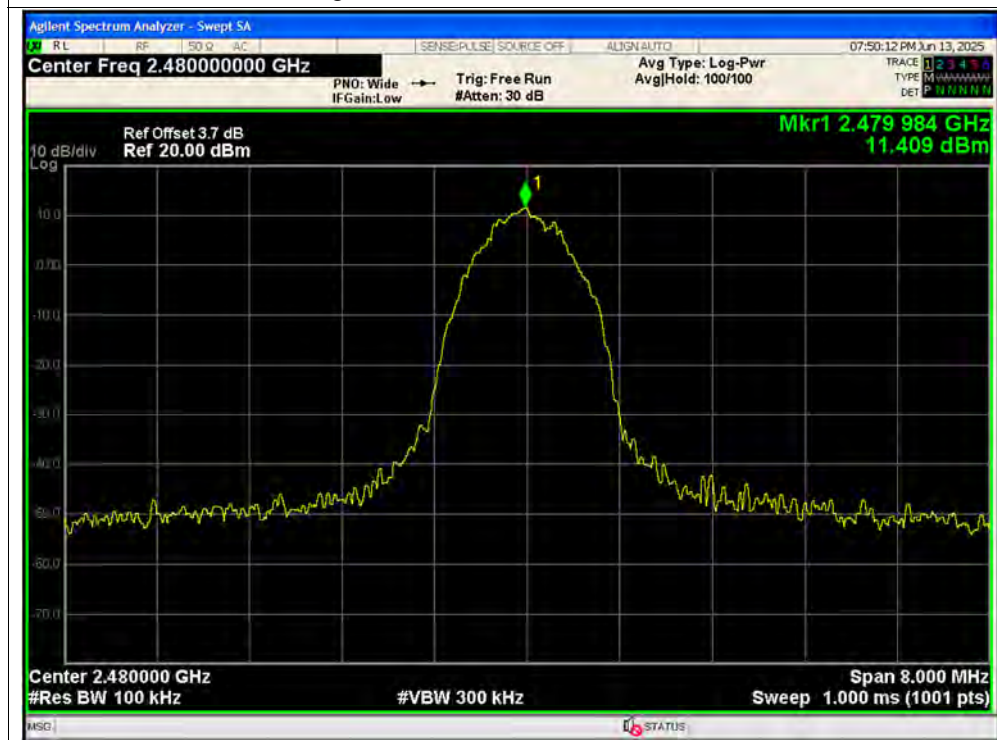

Band Edge NVNT BLE 512k 2480MHz Ant1 Emission

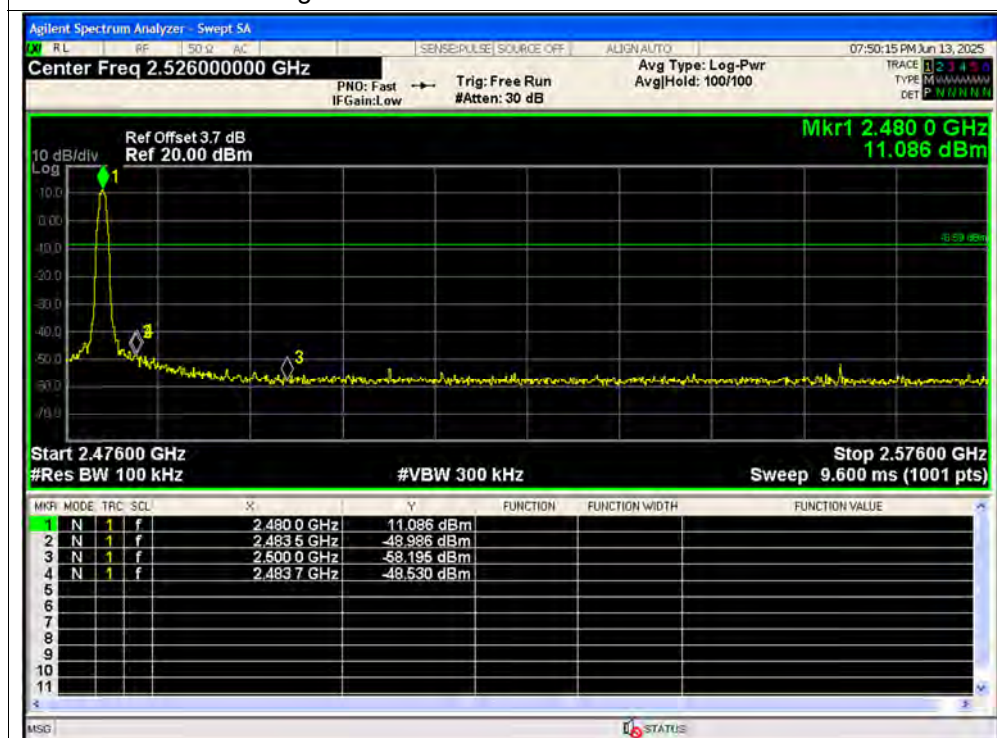


**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	1.45	0	1.45	8	Pass
NVNT	BLE 1M	2440	Ant1	0.84	0	0.84	8	Pass
NVNT	BLE 1M	2480	Ant1	0.1	0	0.1	8	Pass
NVNT	BLE 2M	2402	Ant1	-0.03	0	-0.03	8	Pass
NVNT	BLE 2M	2440	Ant1	-0.49	0	-0.49	8	Pass
NVNT	BLE 2M	2480	Ant1	-1.2	0	-1.2	8	Pass
NVNT	BLE_512K	2402	Ant1	4.99	0	4.99	8	Pass
NVNT	BLE_512K	2440	Ant1	4.22	0	4.22	8	Pass
NVNT	BLE_512K	2480	Ant1	4.47	0	4.47	8	Pass




Test Graphs


PSD NVNT BLE 1M 2402MHz Ant1

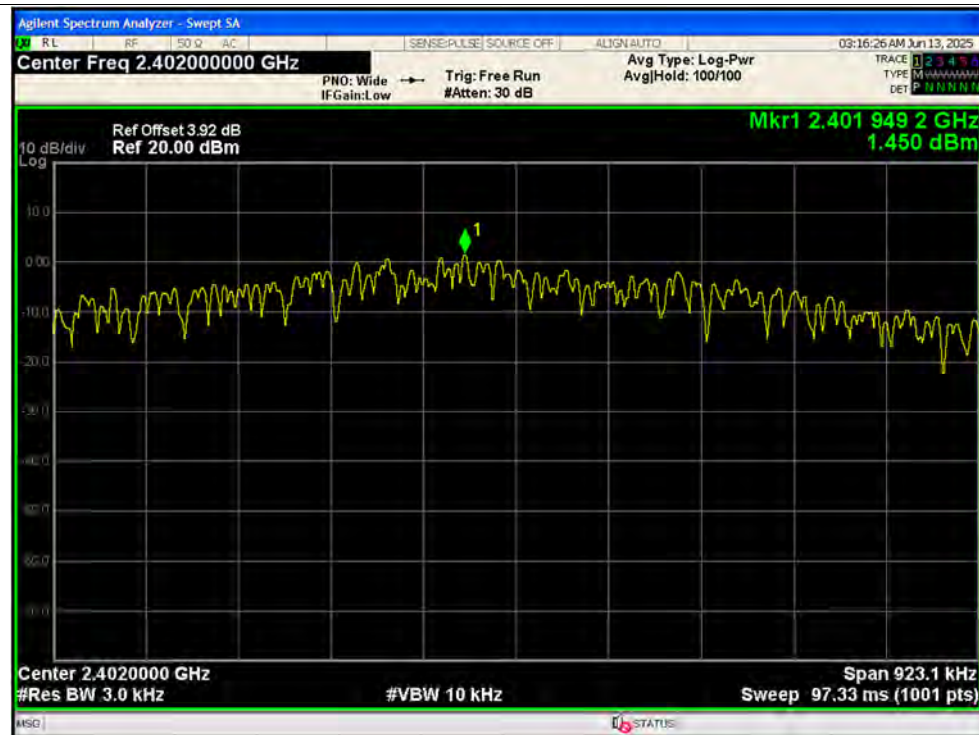


PSD NVNT BLE 1M 2440MHz Ant1

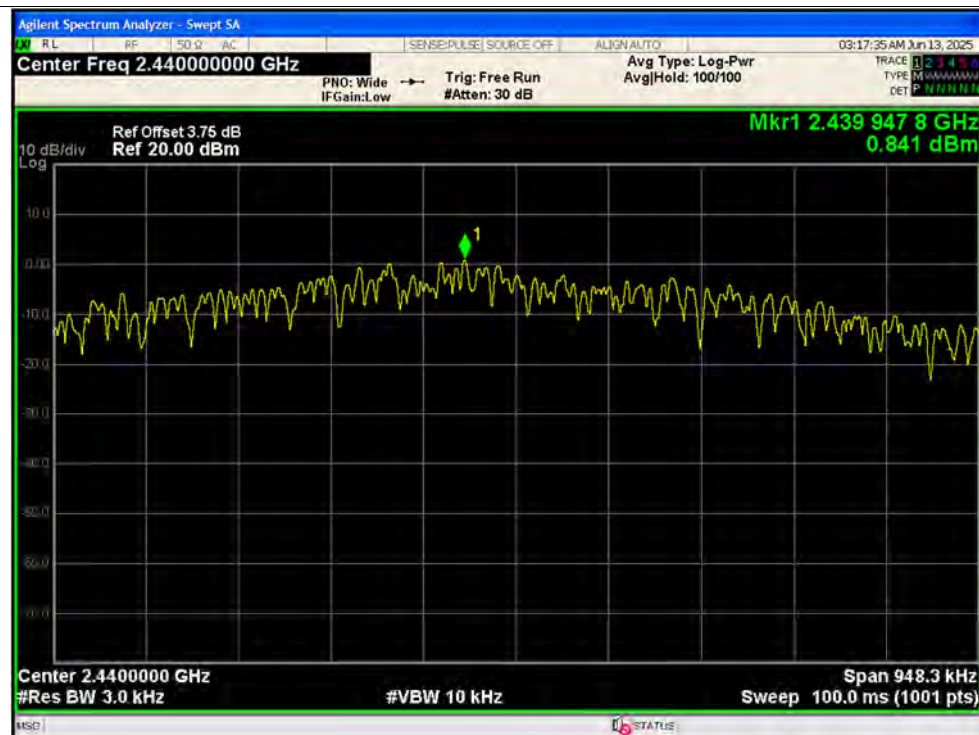

PSD NVNT BLE 1M 2480MHz Ant1

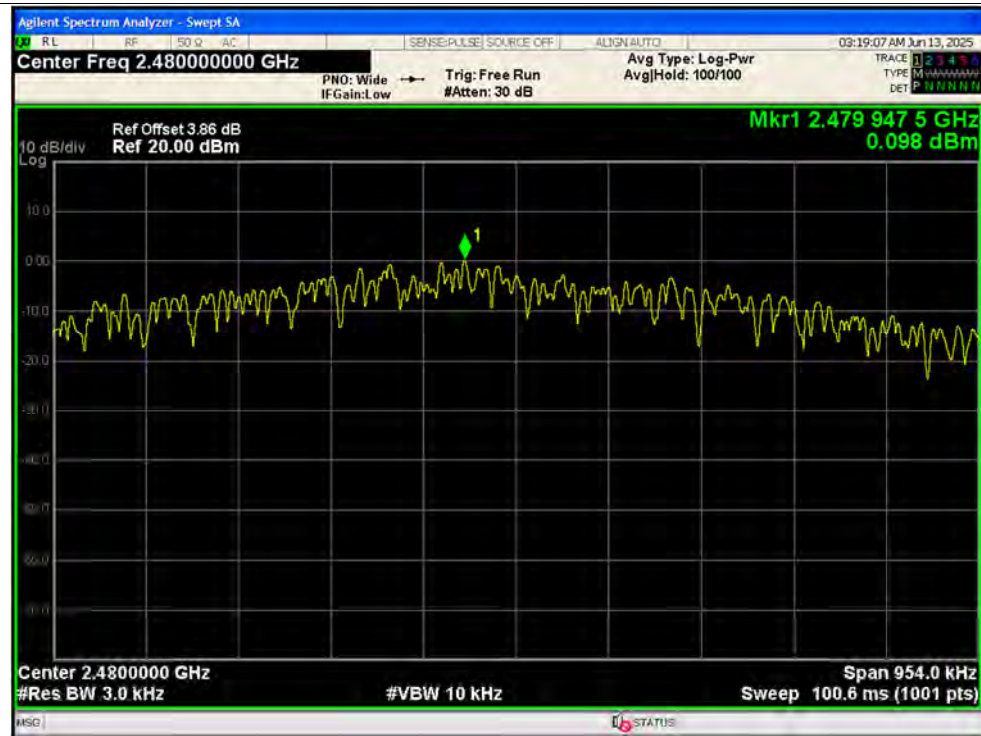


PSD NVNT BLE 2M 2402MHz Ant1

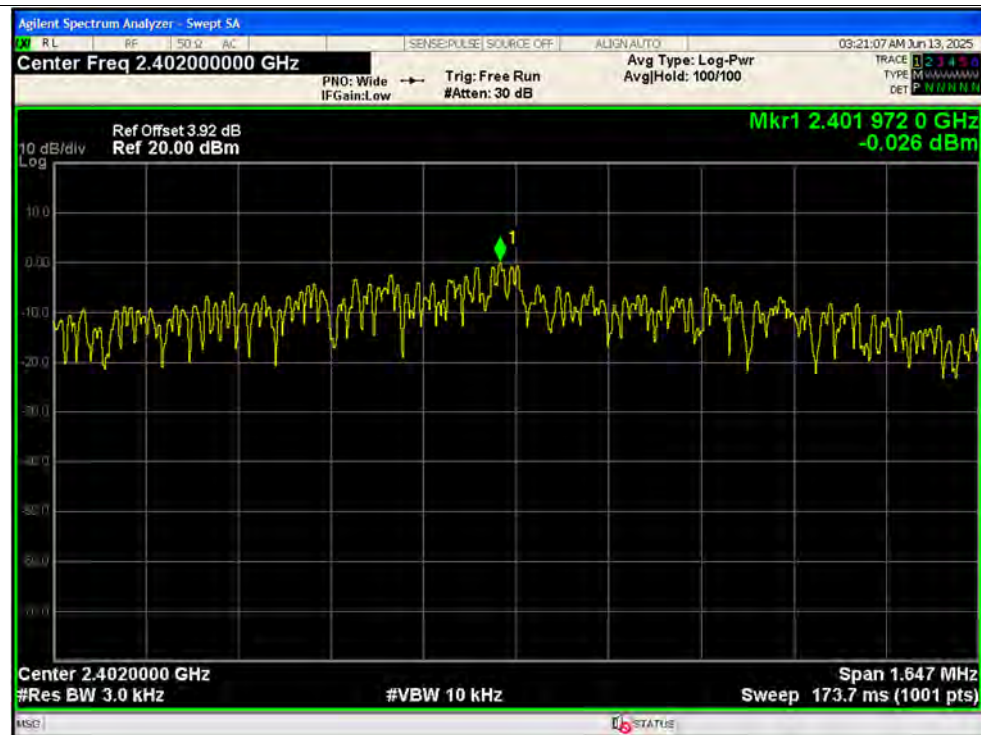




PSD NVNT BLE 2M 2440MHz Ant1

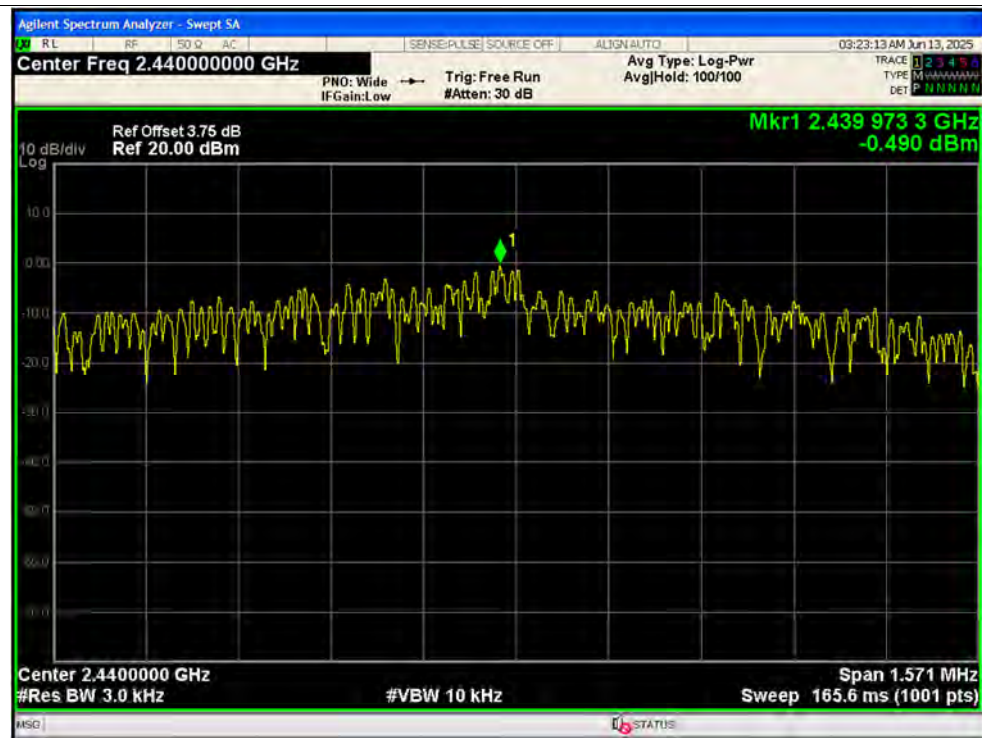


PSD NVNT BLE 2M 2480MHz Ant1

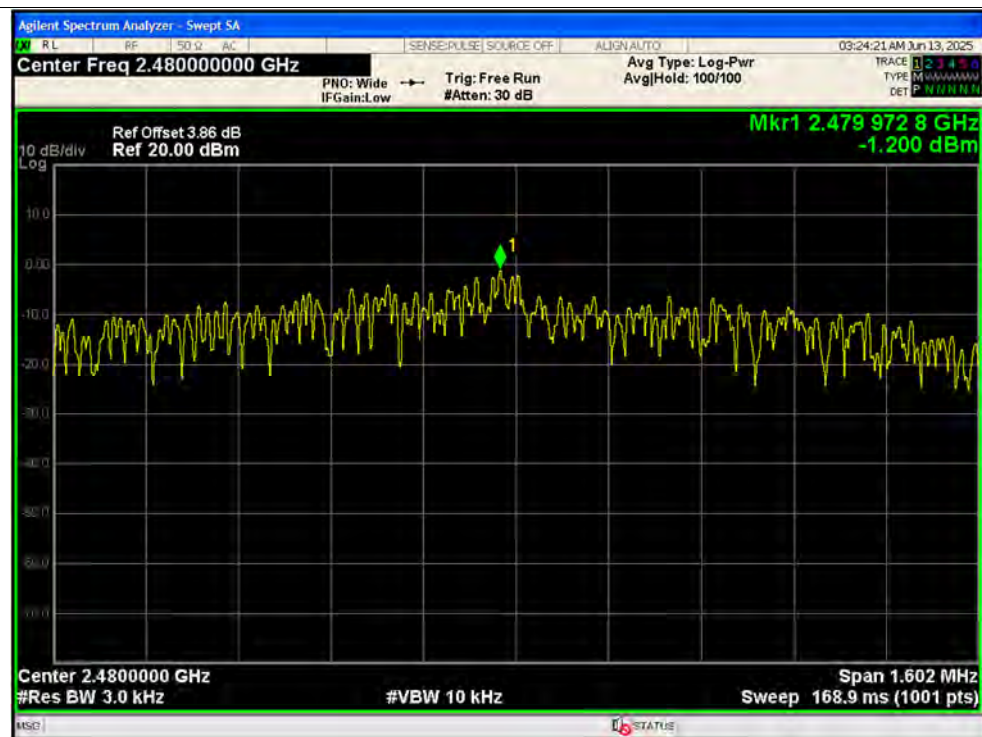




PSD NVNT BLE 512k 2402MHz Ant1

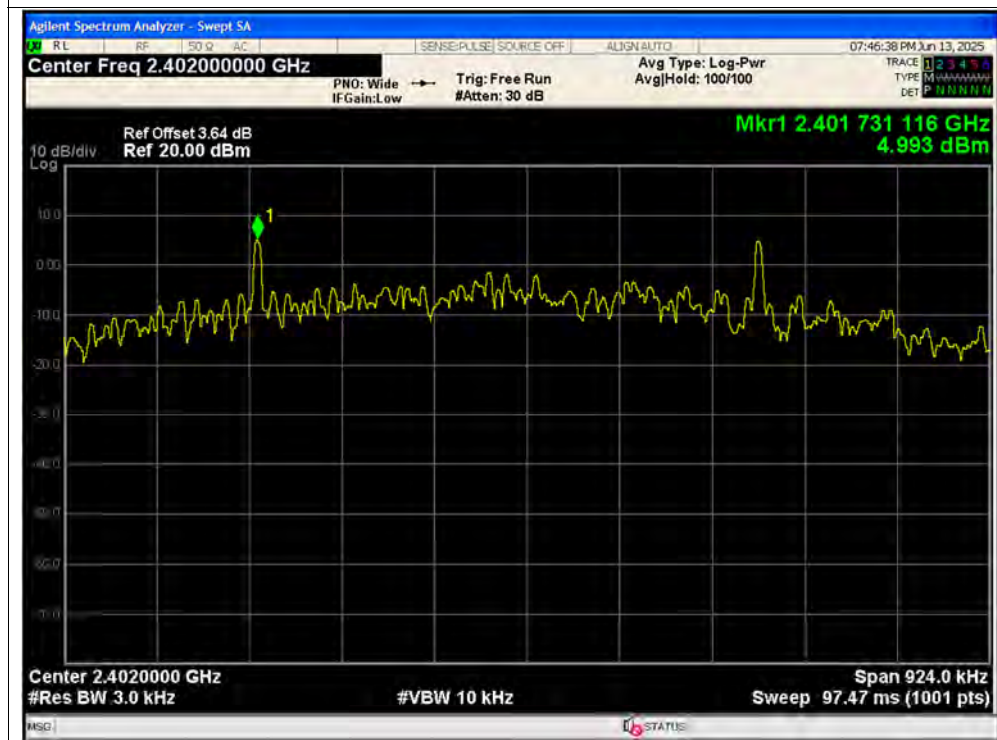


PSD NVNT BLE 512k 2440MHz Ant1

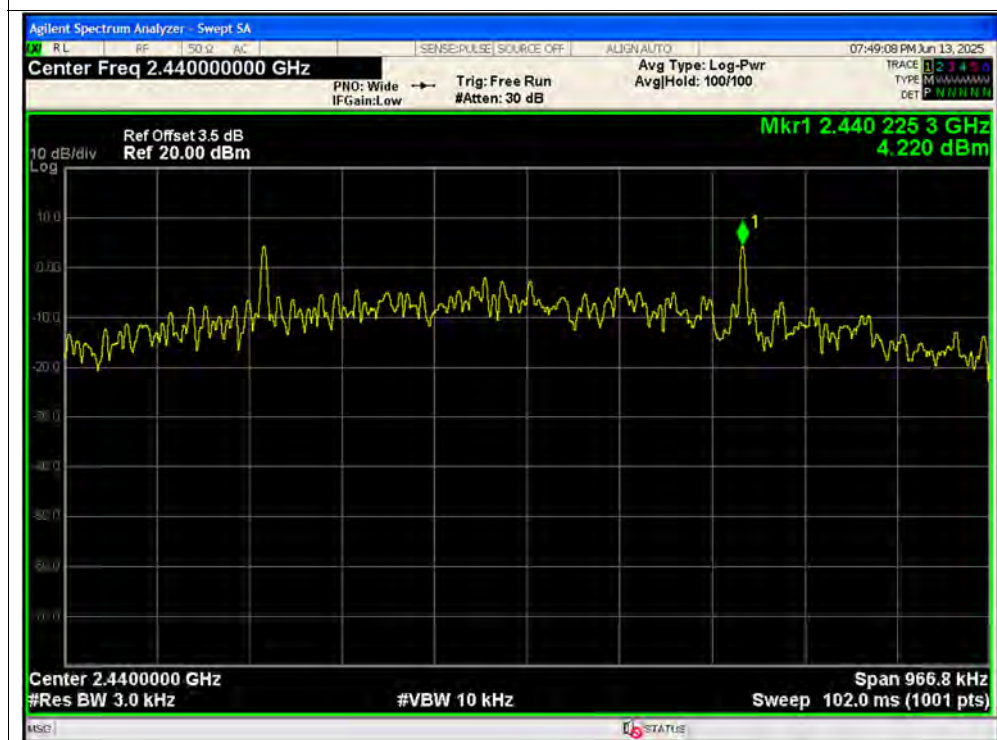



PSD NVNT BLE 512k 2480MHz Ant1

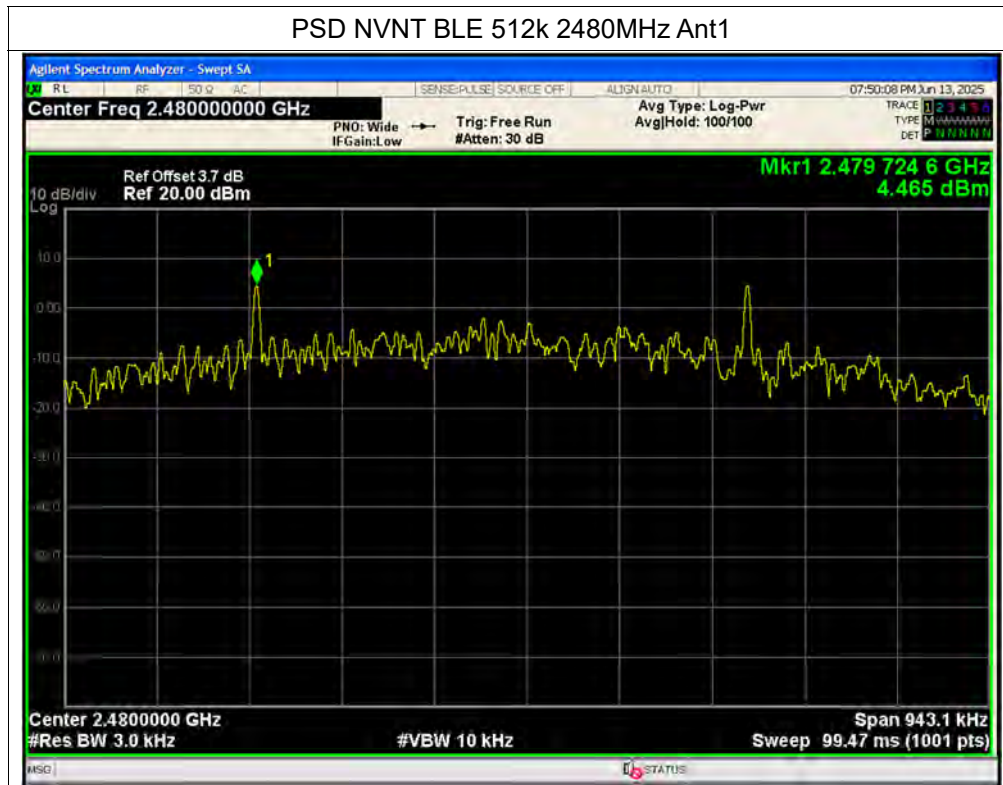



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ LED LAMP+Mobile phone+BLE TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

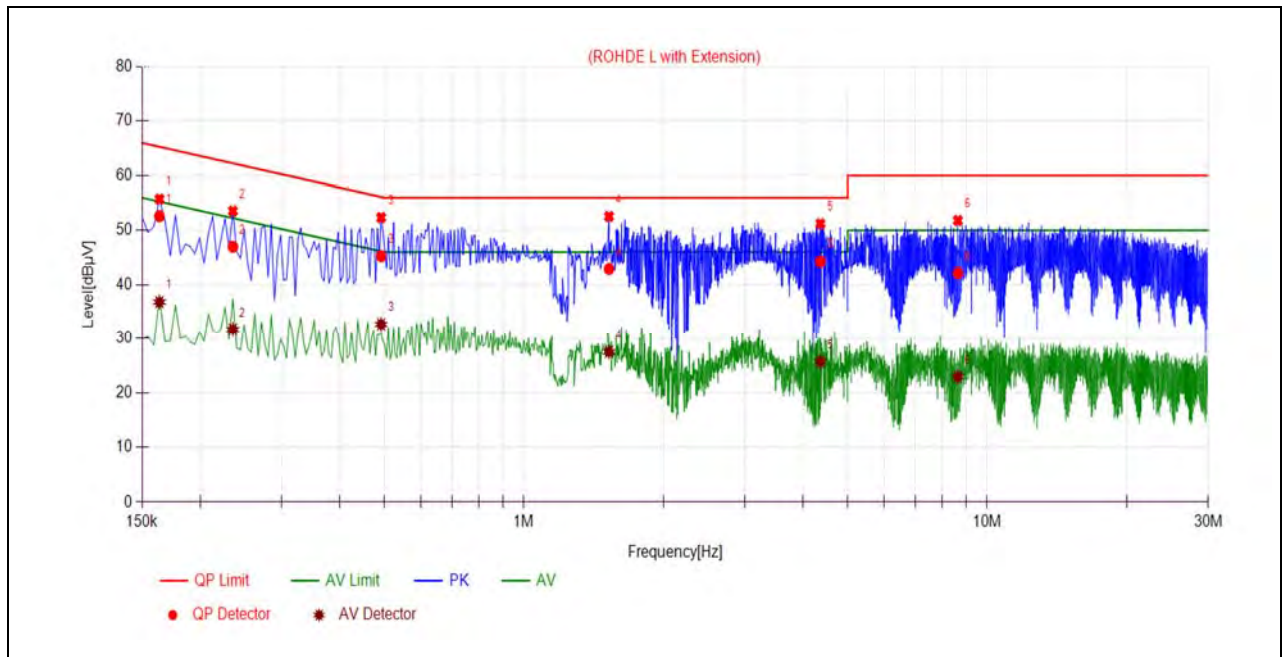

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1635	52.63	36.81	65.28	55.28	Line	PASS
2	0.2355	47.01	31.71	62.25	52.25		PASS
3	0.4920	45.25	32.67	56.13	46.13		PASS
4	1.5271	42.91	27.49	56.00	46.00		PASS
5	4.3664	44.26	25.69	56.00	46.00		PASS
6	8.6461	42.15	22.90	60.00	50.00		PASS

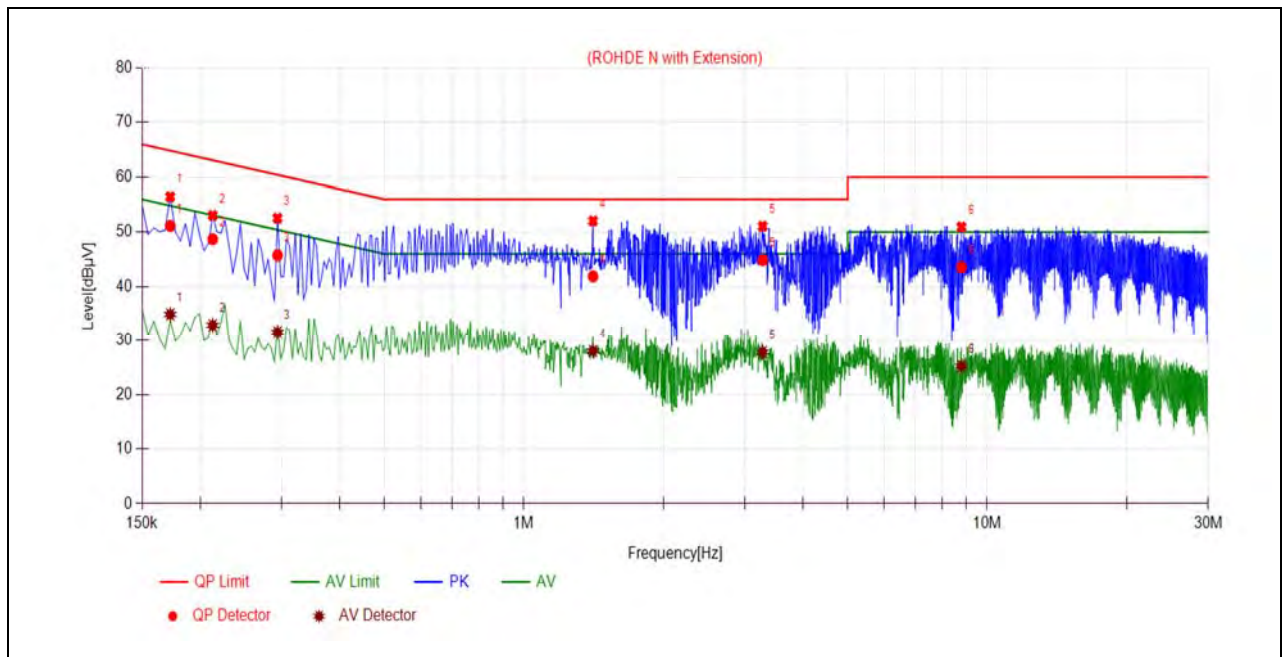

(N Phase)


No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1725	51.15	34.88	64.84	54.84	Neutral	PASS
2	0.2130	48.71	32.88	63.09	53.09		PASS
3	0.2940	45.76	31.56	60.41	50.41		PASS
4	1.4101	41.89	28.02	56.00	46.00		PASS
5	3.2778	44.87	27.80	56.00	46.00		PASS
6	8.8030	43.57	25.23	60.00	50.00		PASS

A.9. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.

1Mbps


Plot for Channel 0

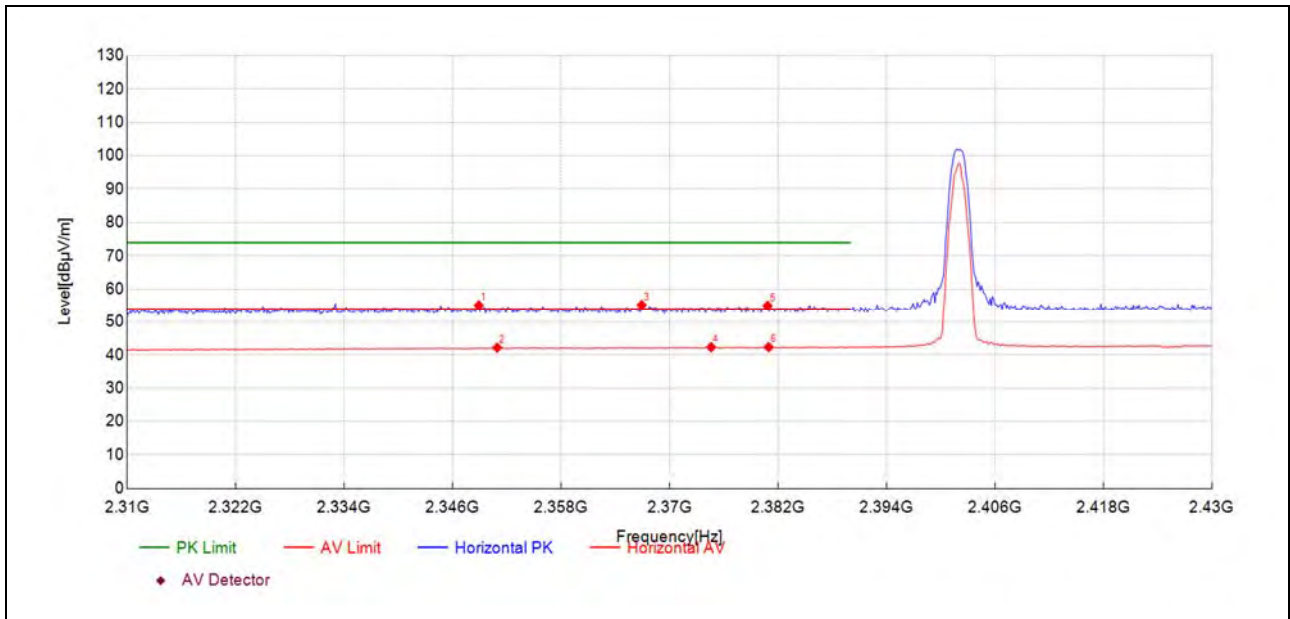

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2348.92	22.7	55.13	32.390	74.00	18.87	150	32	PK	PASS
2350.96	9.8	42.17	32.400	54.00	11.83	150	9	AV	PASS
2366.94	22.7	55.20	32.460	74.00	18.80	150	360	PK	PASS
2374.62	9.8	42.32	32.490	54.00	11.68	150	360	AV	PASS
2380.87	22.5	55.03	32.510	74.00	18.97	150	140	PK	PASS
2380.99	9.8	42.33	32.510	54.00	11.67	150	104	AV	PASS



Plot for Channel 39

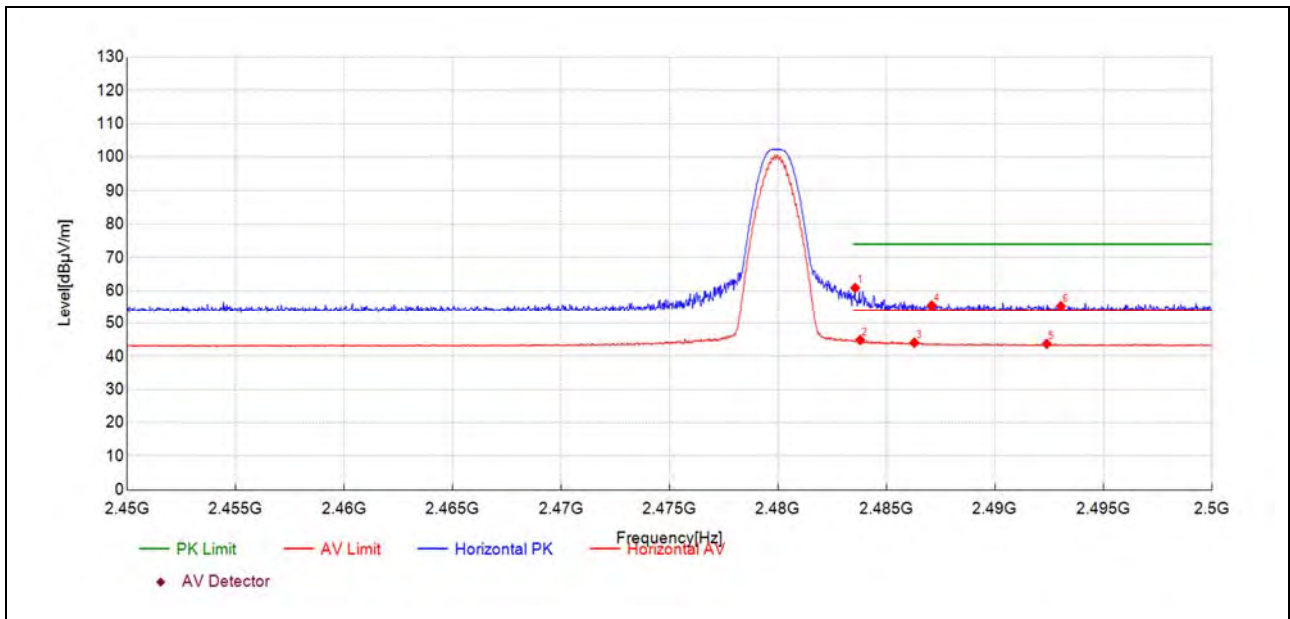


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.57	27.8	60.83	33.030	74.00	13.17	150	152	PK	PASS
2483.79	11.9	44.88	33.030	54.00	9.12	150	152	AV	PASS
2486.29	11.1	44.08	33.030	54.00	9.92	150	160	AV	PASS
2487.09	22.5	55.53	33.030	74.00	18.47	150	152	PK	PASS
2492.40	10.7	43.74	33.020	54.00	10.26	150	46	AV	PASS
2493.05	22.3	55.31	33.010	74.00	18.69	150	3	PK	PASS



2Mbps


Plot for Channel 0

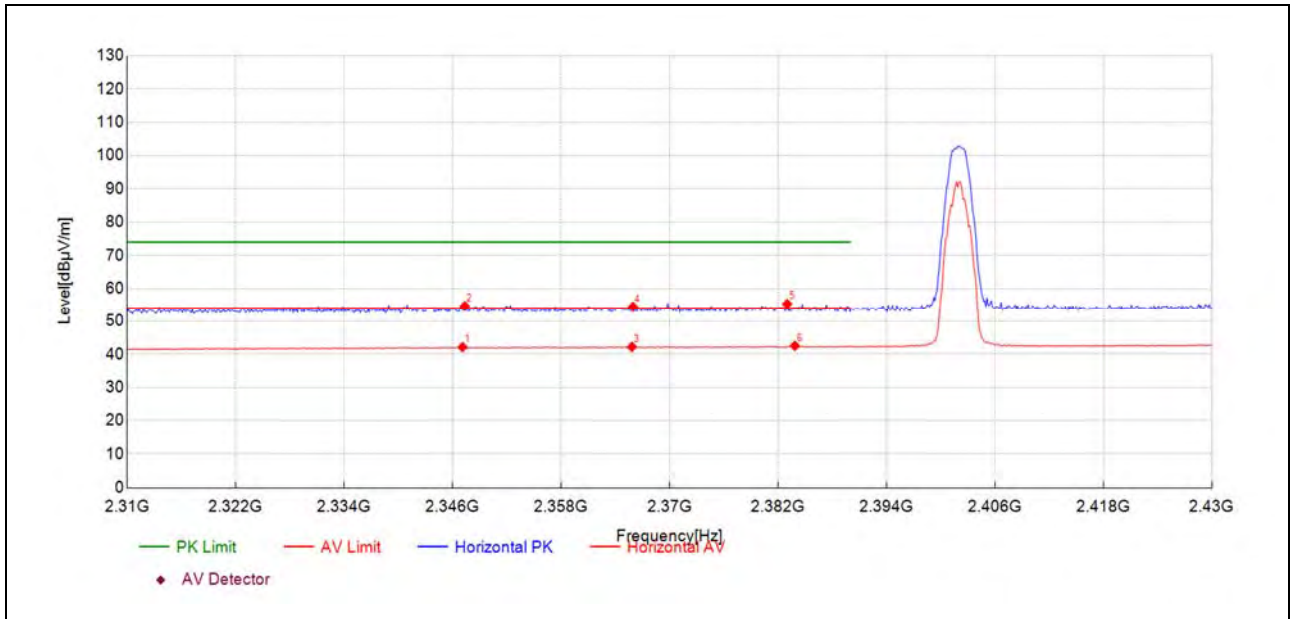

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2347.12	9.8	42.13	32.380	54.00	11.87	150	149	AV	PASS
2347.36	22.3	54.66	32.380	74.00	19.34	150	47	PK	PASS
2365.86	9.7	42.20	32.460	54.00	11.80	150	236	AV	PASS
2365.98	22.0	54.44	32.460	74.00	19.56	150	329	PK	PASS
2383.03	22.8	55.33	32.520	74.00	18.67	150	360	PK	PASS
2383.87	10.0	42.51	32.520	54.00	11.49	150	55	AV	PASS



Plot for Channel 39

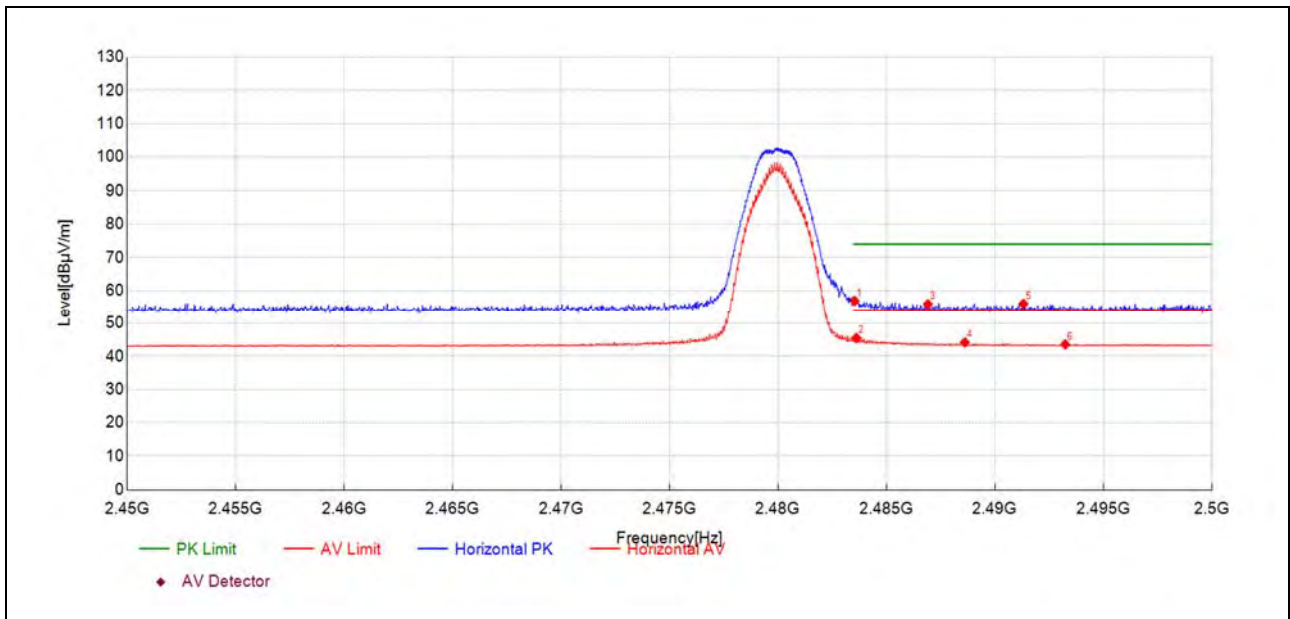


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.54	23.8	56.86	33.030	74.00	17.14	150	161	PK	PASS
2483.62	12.5	45.51	33.030	54.00	8.49	150	146	AV	PASS
2486.92	22.9	55.92	33.030	74.00	18.08	150	161	PK	PASS
2488.62	11.1	44.16	33.020	54.00	9.84	150	161	AV	PASS
2491.32	23.0	56.02	33.020	74.00	17.98	150	297	PK	PASS
2493.25	10.6	43.57	33.010	54.00	10.43	150	0	AV	PASS



512kbps


Plot for Channel 0

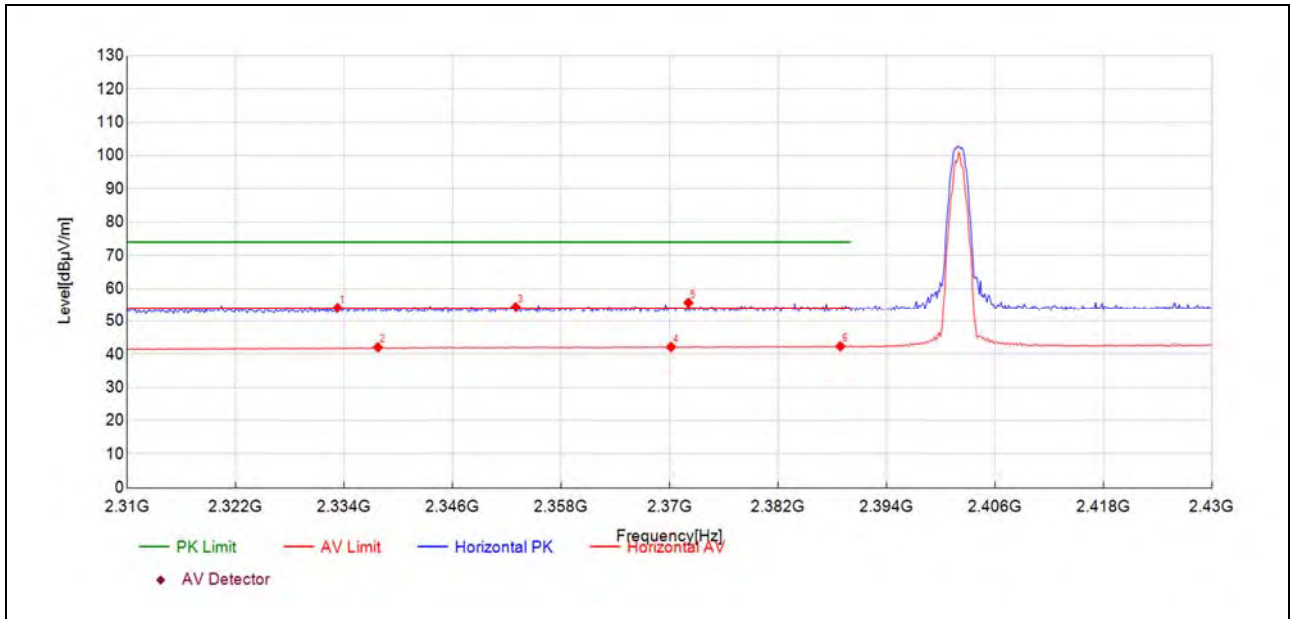

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2333.30	21.9	54.12	32.240	74.00	19.88	150	256	PK	PASS
2337.75	9.8	42.07	32.280	54.00	11.93	150	112	AV	PASS
2353.00	22.0	54.36	32.410	74.00	19.64	150	11	PK	PASS
2370.18	9.7	42.17	32.470	54.00	11.83	150	315	AV	PASS
2372.10	23.3	55.74	32.480	74.00	18.26	150	336	PK	PASS
2388.92	9.8	42.37	32.540	54.00	11.63	150	126	AV	PASS



Plot for Channel 39

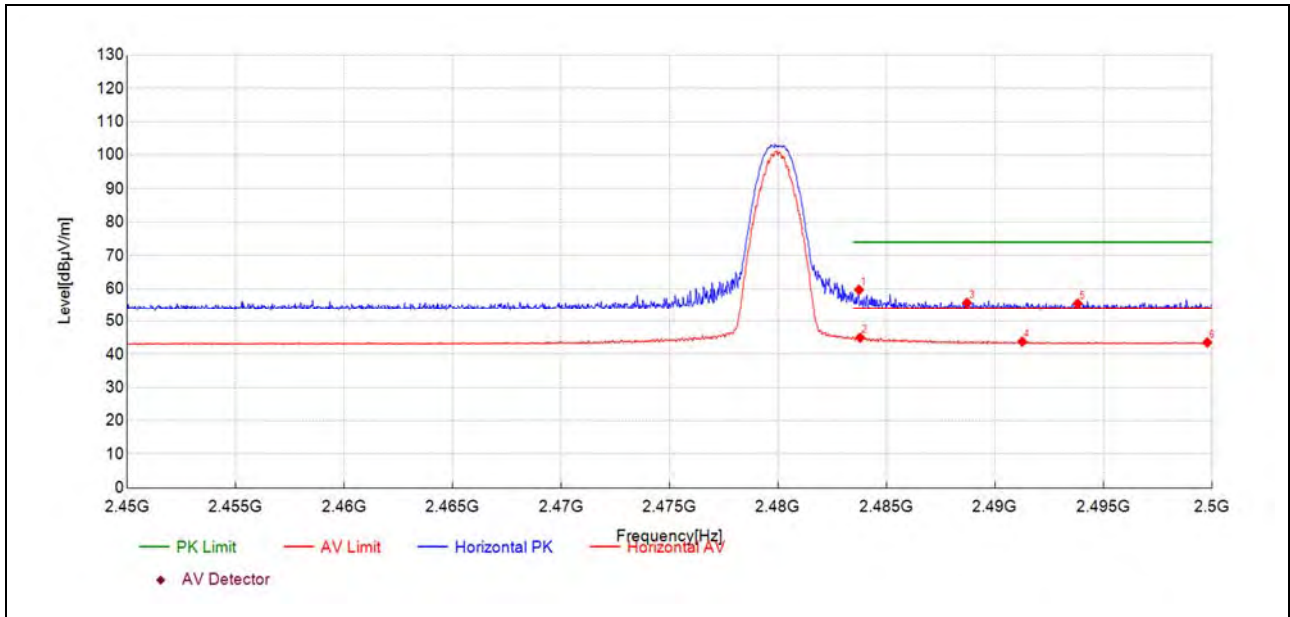

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.74	26.7	59.68	33.030	74.00	14.32	150	162	PK	PASS
2483.79	11.9	44.97	33.030	54.00	9.03	150	155	AV	PASS
2488.72	22.7	55.73	33.020	74.00	18.27	150	132	PK	PASS
2491.27	10.8	43.77	33.020	54.00	10.23	150	147	AV	PASS
2493.82	22.5	55.51	33.010	74.00	18.49	150	155	PK	PASS
2499.80	10.5	43.51	33.000	54.00	10.49	150	155	AV	PASS



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.


**1Mbps**

Plot for Channel 0

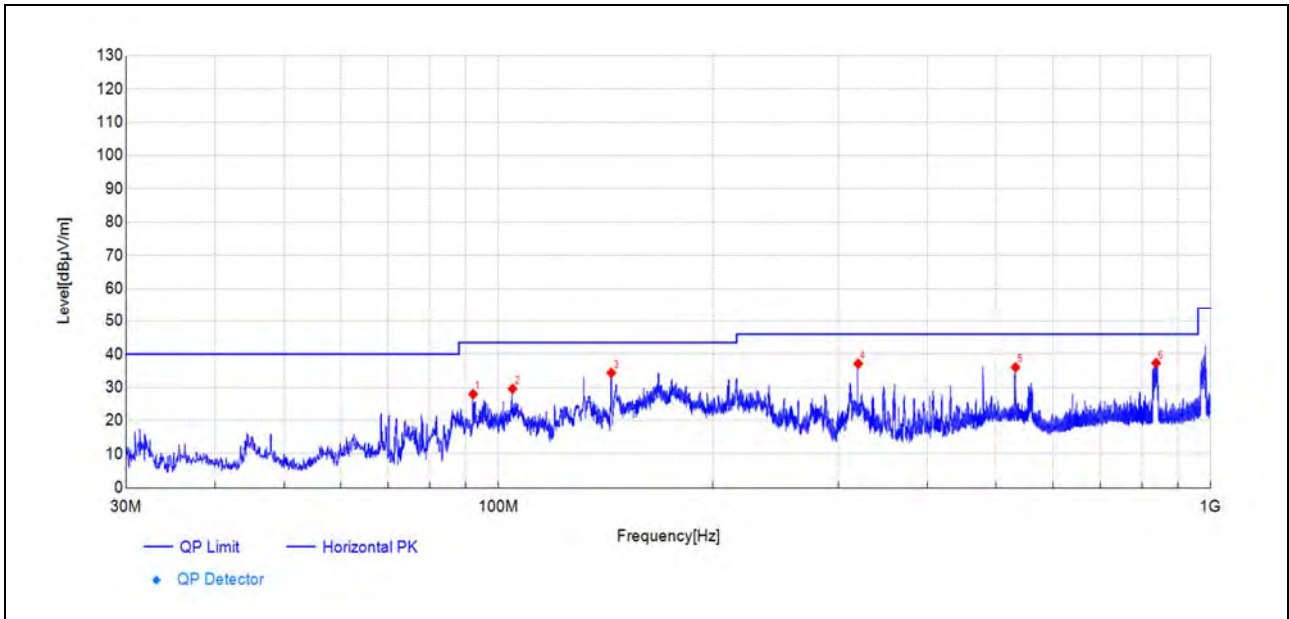


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
92.13	59.3	27.97	-31.330	43.50	15.53	150	241	PK	PASS
104.69	60.0	29.57	-30.390	43.50	13.93	150	71	PK	PASS
144.03	67.9	34.38	-33.550	43.50	9.12	150	61	PK	PASS
320.00	63.5	37.13	-26.370	46.00	8.87	150	222	PK	PASS
532.05	57.5	36.06	-21.400	46.00	9.94	150	152	PK	PASS
837.95	53.2	37.33	-15.850	46.00	8.67	150	111	PK	PASS

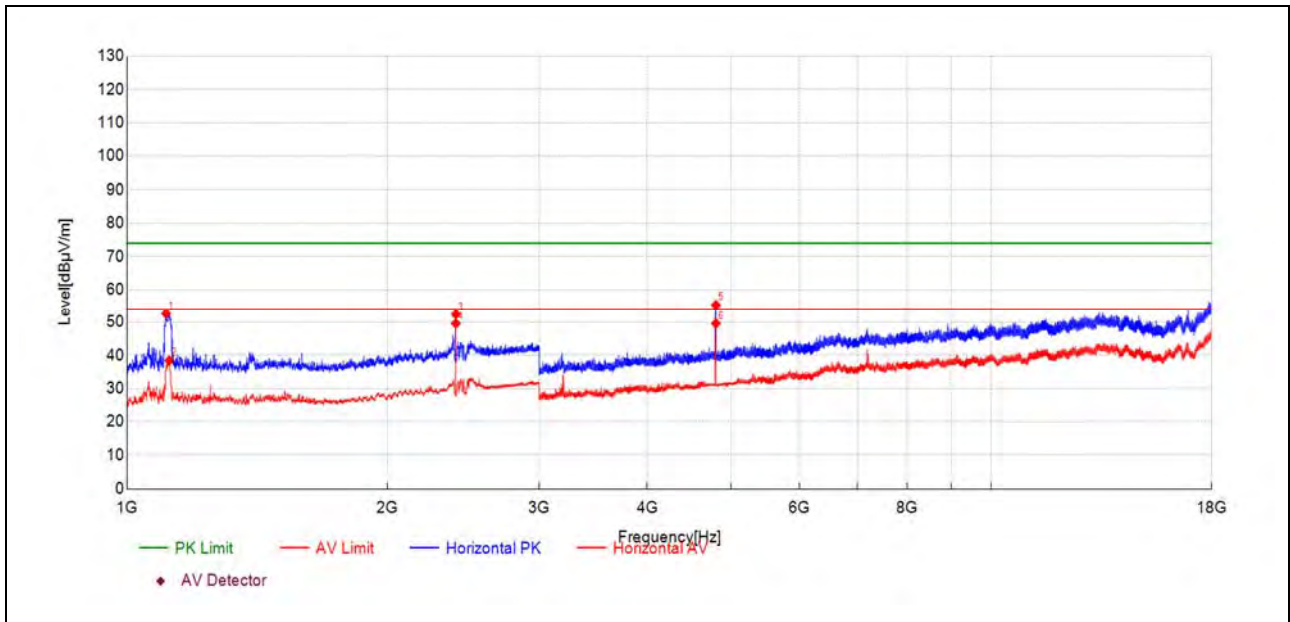


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1109.80	57.9	52.58	-5.290	74.00	21.42	150	249	PK	PASS
1119.14	43.7	38.43	-5.280	54.00	15.57	150	224	AV	PASS
2402.09	51.6	52.38	0.750	74.00	21.62	150	198	PK	NA
2402.09	48.8	49.58	0.750	54.00	4.42	150	198	AV	NA
4803.56	66.1	55.33	-10.720	74.00	18.67	150	81	PK	PASS
4803.56	60.3	49.58	-10.720	54.00	4.42	150	65	AV	PASS

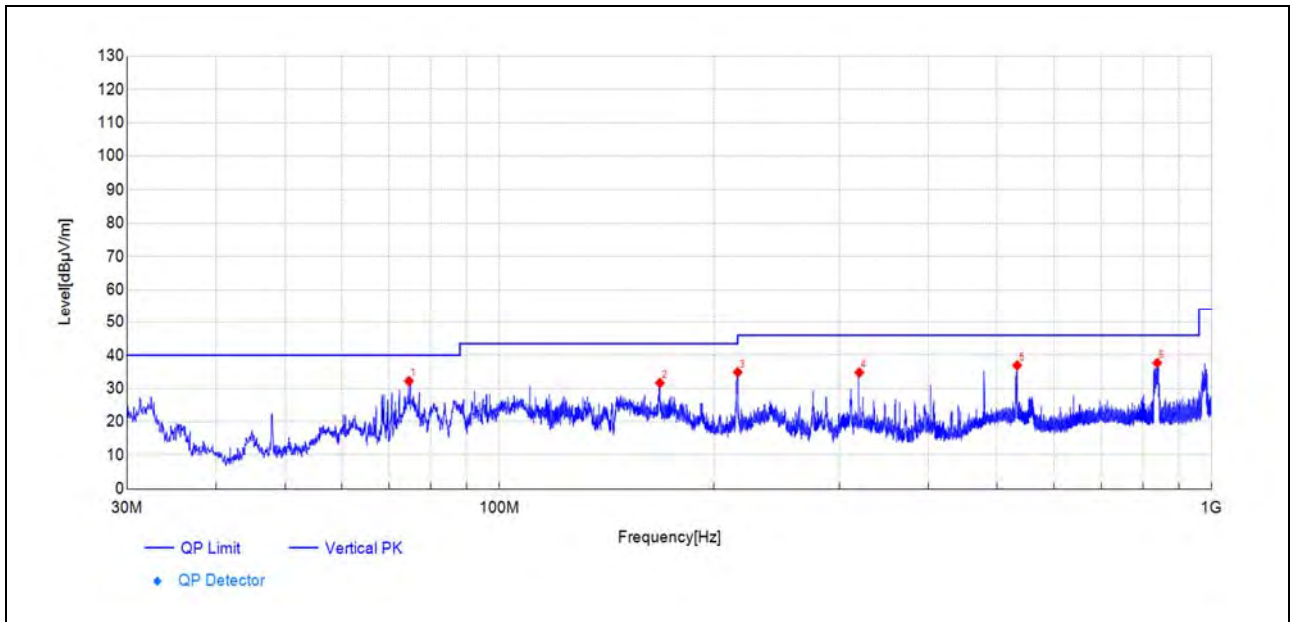

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
74.62	67.4	32.24	-35.110	40.00	7.76	150	5	PK	PASS
167.99	64.0	31.65	-32.330	43.50	11.85	150	147	PK	PASS
216.01	64.4	34.89	-29.500	46.00	11.11	150	88	PK	PASS
320.00	61.2	34.80	-26.370	46.00	11.20	150	178	PK	PASS
533.16	58.3	36.96	-21.380	46.00	9.04	150	169	PK	PASS
838.34	53.5	37.67	-15.840	46.00	8.33	150	198	PK	PASS

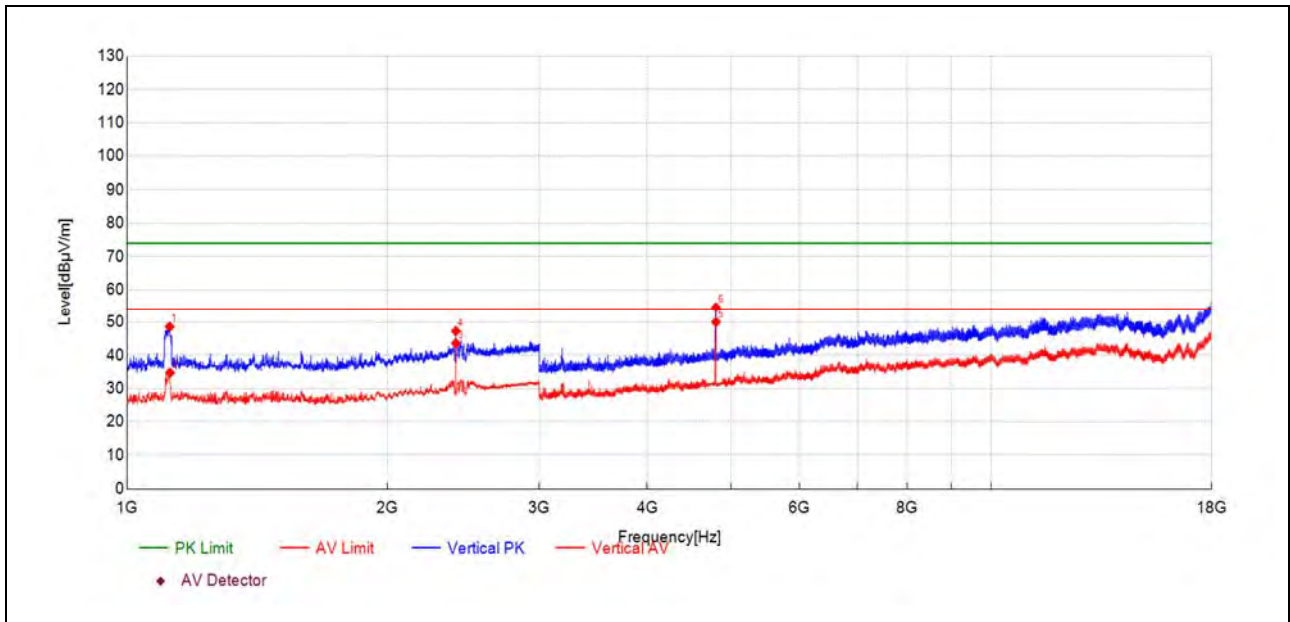


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1120.47	53.9	48.61	-5.270	74.00	25.39	150	281	PK	PASS
1121.36	40.0	34.74	-5.270	54.00	19.26	150	281	AV	PASS
2402.09	42.9	43.64	0.750	54.00	10.36	150	256	AV	NA
2402.53	46.5	47.28	0.760	74.00	26.72	150	256	PK	NA
4803.56	60.8	50.05	-10.720	54.00	3.95	150	274	AV	PASS
4804.06	65.3	54.59	-10.720	74.00	19.41	150	185	PK	PASS




Plot for Channel 19

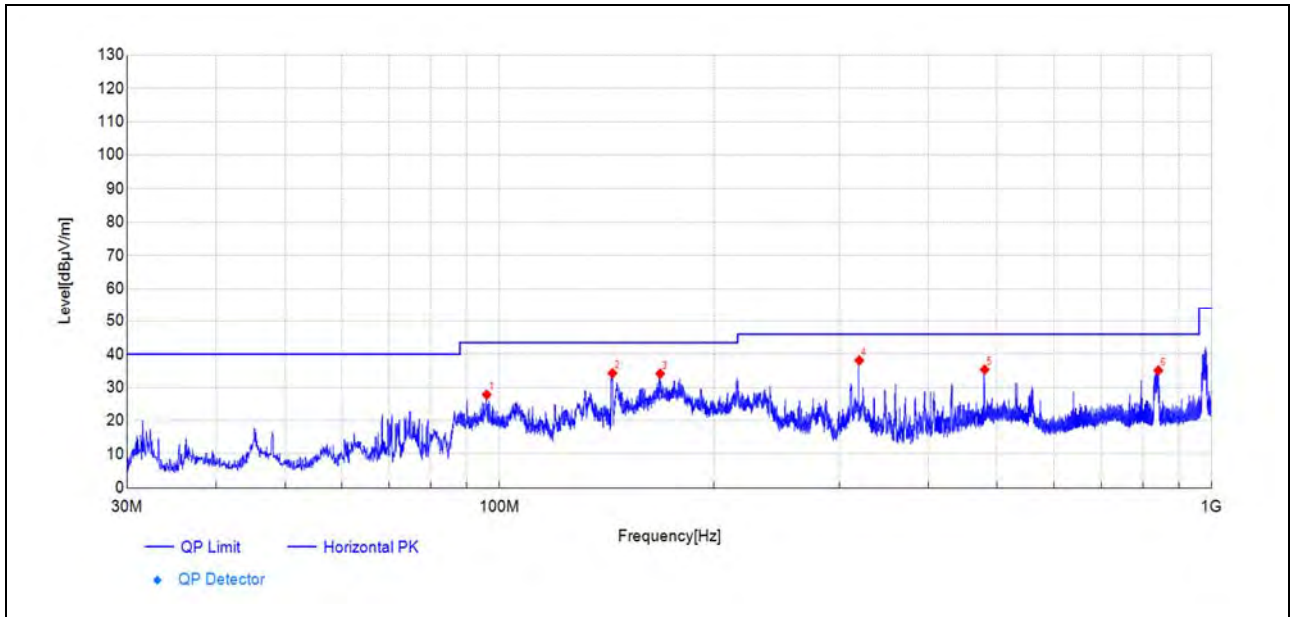


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
95.96	58.4	27.83	-30.520	43.50	15.67	150	102	PK	PASS
144.08	67.8	34.26	-33.550	43.50	9.24	150	62	PK	PASS
168.13	66.5	34.16	-32.330	43.50	9.34	150	192	PK	PASS
320.00	64.5	38.16	-26.370	46.00	7.84	150	213	PK	PASS
480.01	57.7	35.38	-22.330	46.00	10.62	150	172	PK	PASS
841.64	50.9	35.12	-15.750	46.00	10.88	150	112	PK	PASS

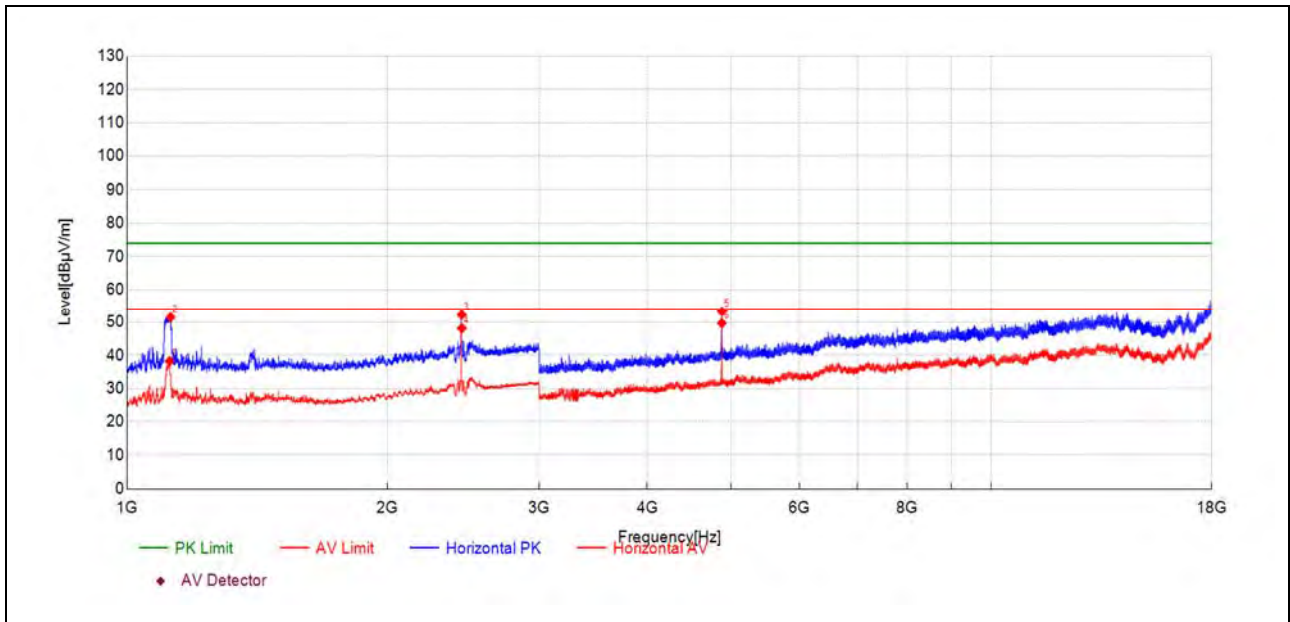


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1120.03	43.5	38.21	-5.270	54.00	15.79	150	213	AV	PASS
1123.14	56.8	51.48	-5.270	74.00	22.52	150	247	PK	PASS
2439.88	51.2	52.22	1.010	74.00	21.78	150	179	PK	NA
2440.32	47.2	48.17	1.010	54.00	5.83	150	179	AV	NA
4879.56	63.3	53.29	-10.010	74.00	20.71	150	134	PK	PASS
4879.56	59.7	49.70	-10.010	54.00	4.30	150	114	AV	PASS

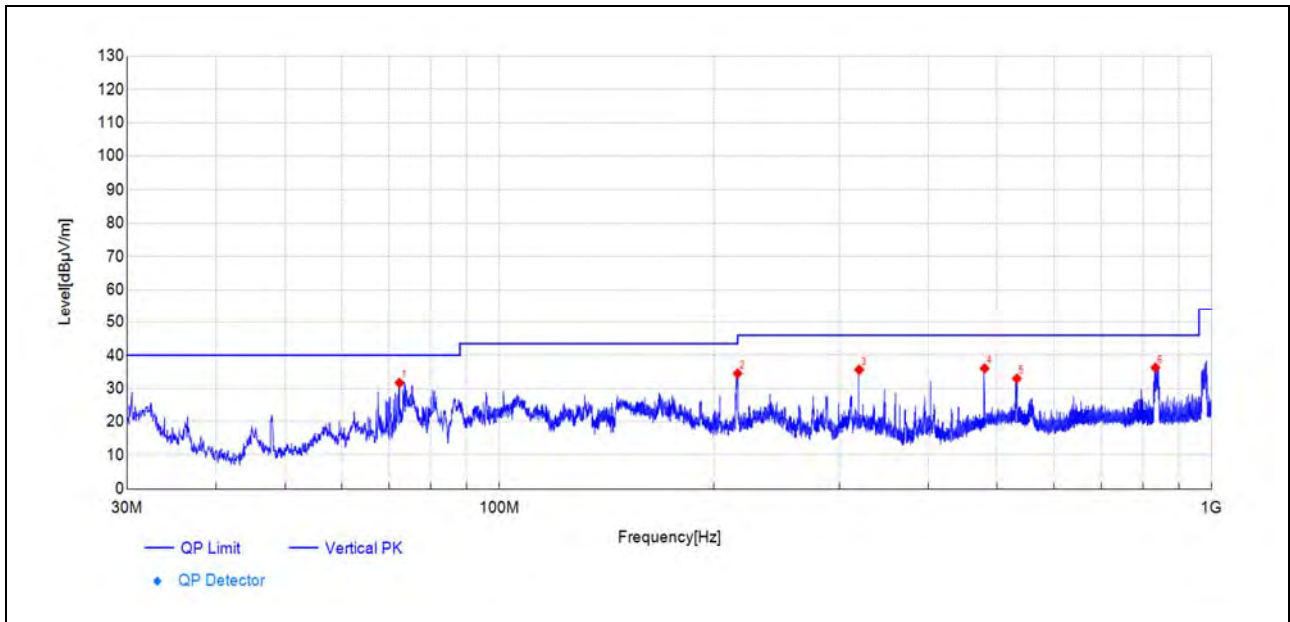

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
72.39	66.6	31.67	-34.900	40.00	8.33	150	69	PK	PASS
215.96	64.0	34.52	-29.500	43.50	8.98	150	69	PK	PASS
320.00	62.0	35.64	-26.370	46.00	10.36	150	179	PK	PASS
480.01	58.4	36.05	-22.330	46.00	9.95	150	240	PK	PASS
532.68	54.4	33.00	-21.390	46.00	13.00	150	170	PK	PASS
833.59	52.2	36.27	-15.930	46.00	9.73	150	199	PK	PASS

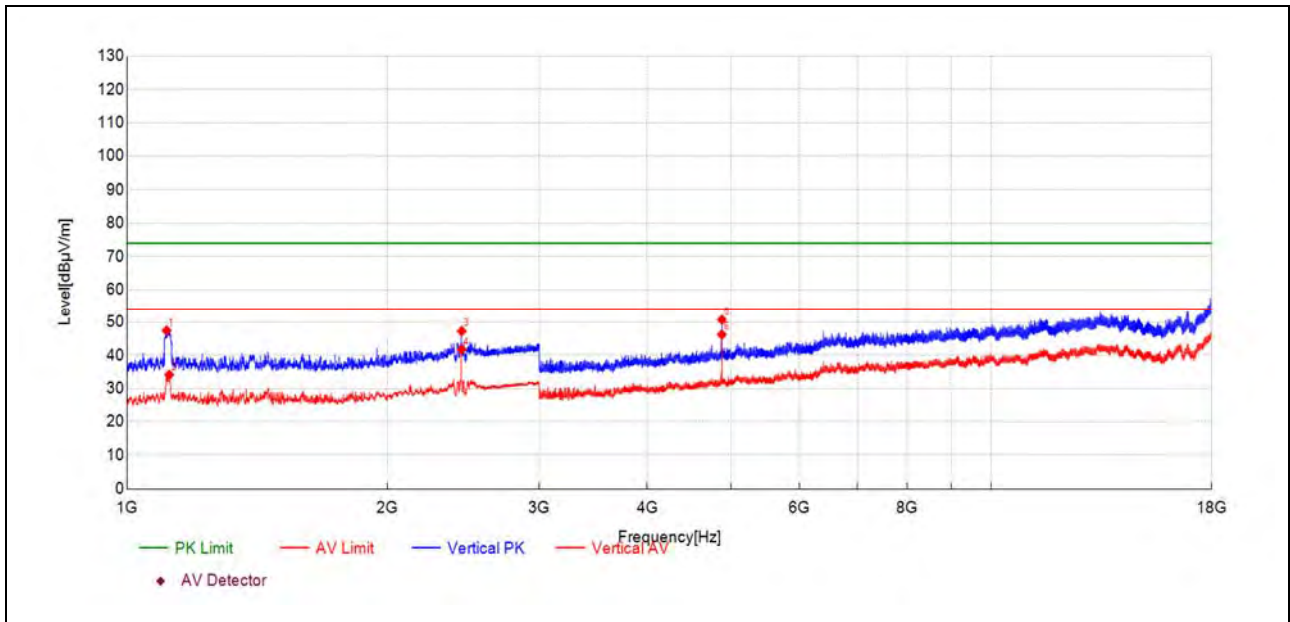


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1111.14	52.8	47.46	-5.290	74.00	26.54	150	112	PK	PASS
1119.14	39.4	34.11	-5.280	54.00	19.89	150	205	AV	PASS
2439.88	46.3	47.26	1.010	74.00	26.74	150	222	PK	NA
2439.88	40.8	41.77	1.010	54.00	12.23	150	214	AV	NA
4879.56	60.8	50.74	-10.010	74.00	23.26	150	204	PK	PASS
4879.56	56.2	46.22	-10.010	54.00	7.78	150	98	AV	PASS




Plot for Channel 39

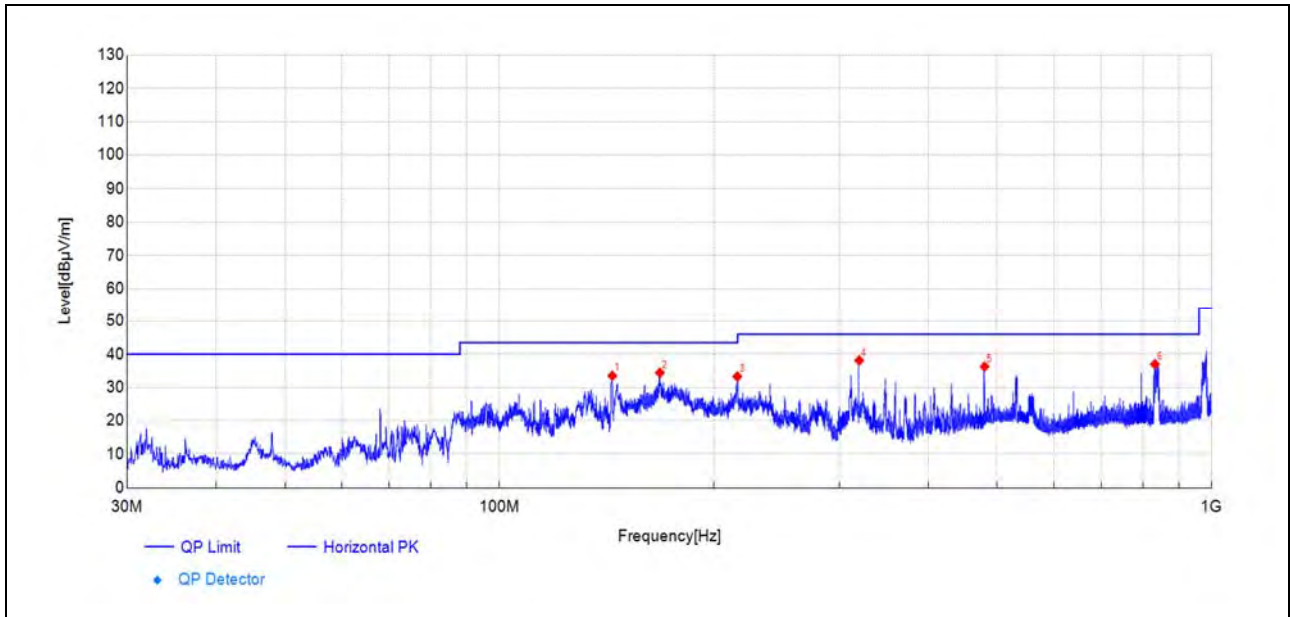


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
144.03	67.1	33.53	-33.550	43.50	9.97	150	61	PK	PASS
167.99	66.8	34.44	-32.330	43.50	9.06	150	231	PK	PASS
215.76	62.8	33.29	-29.510	43.50	10.21	150	61	PK	PASS
320.00	64.5	38.12	-26.370	46.00	7.88	150	212	PK	PASS
479.96	58.6	36.28	-22.330	46.00	9.72	150	171	PK	PASS
832.33	52.9	36.97	-15.950	46.00	9.03	150	110	PK	PASS

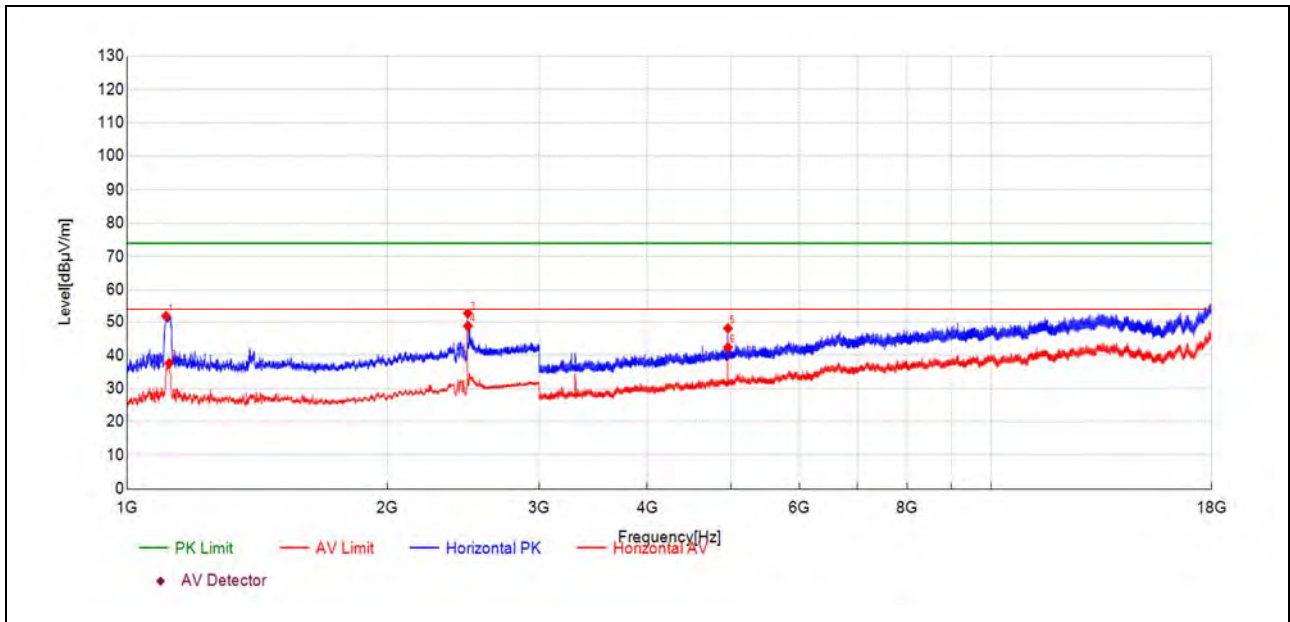


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1109.36	57.1	51.78	-5.290	74.00	22.22	150	247	PK	PASS
1119.14	42.9	37.61	-5.280	54.00	16.39	150	247	AV	PASS
2479.88	51.7	52.62	0.920	74.00	21.38	150	196	PK	NA
2479.88	47.9	48.80	0.920	54.00	5.20	150	196	AV	NA
4959.57	58.3	48.13	-10.130	74.00	25.87	150	114	PK	PASS
4960.07	52.5	42.40	-10.130	54.00	11.60	150	114	AV	PASS

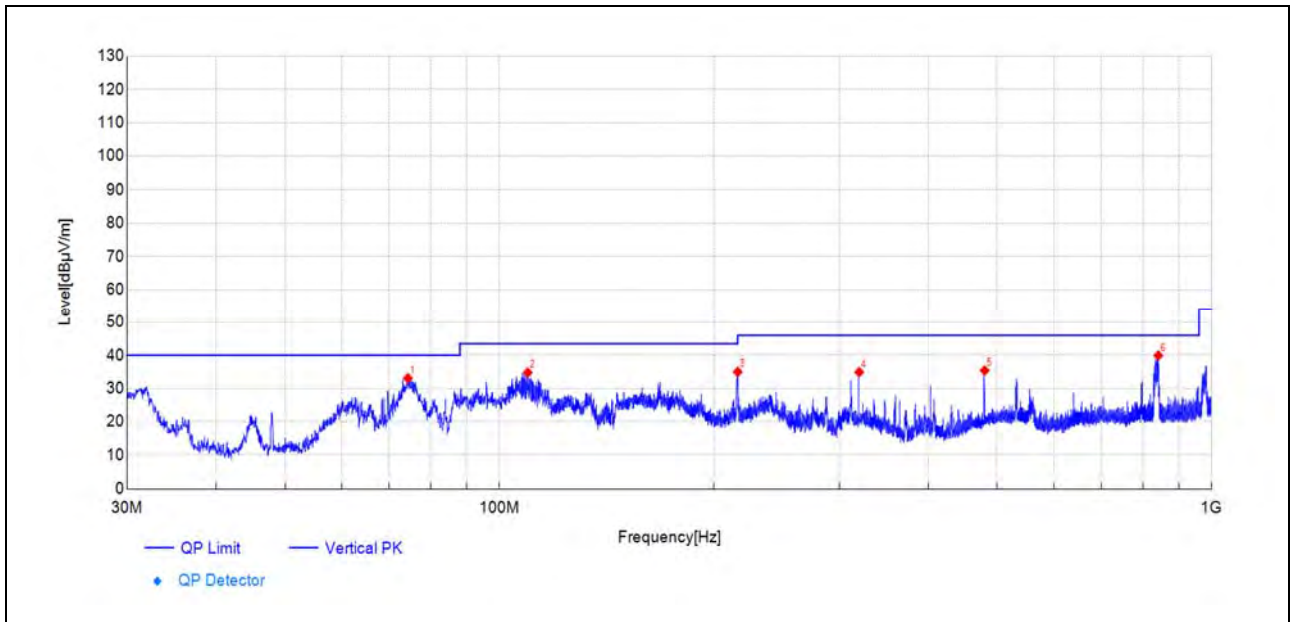

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
74.38	68.2	33.10	-35.090	40.00	6.90	150	18	PK	PASS
109.59	65.6	34.79	-30.760	43.50	8.71	150	10	PK	PASS
216.01	64.5	35.01	-29.500	46.00	10.99	150	88	PK	PASS
320.00	61.3	34.94	-26.370	46.00	11.06	150	180	PK	PASS
480.01	57.8	35.43	-22.330	46.00	10.57	150	259	PK	PASS
841.45	55.7	39.93	-15.750	46.00	6.07	150	199	PK	PASS

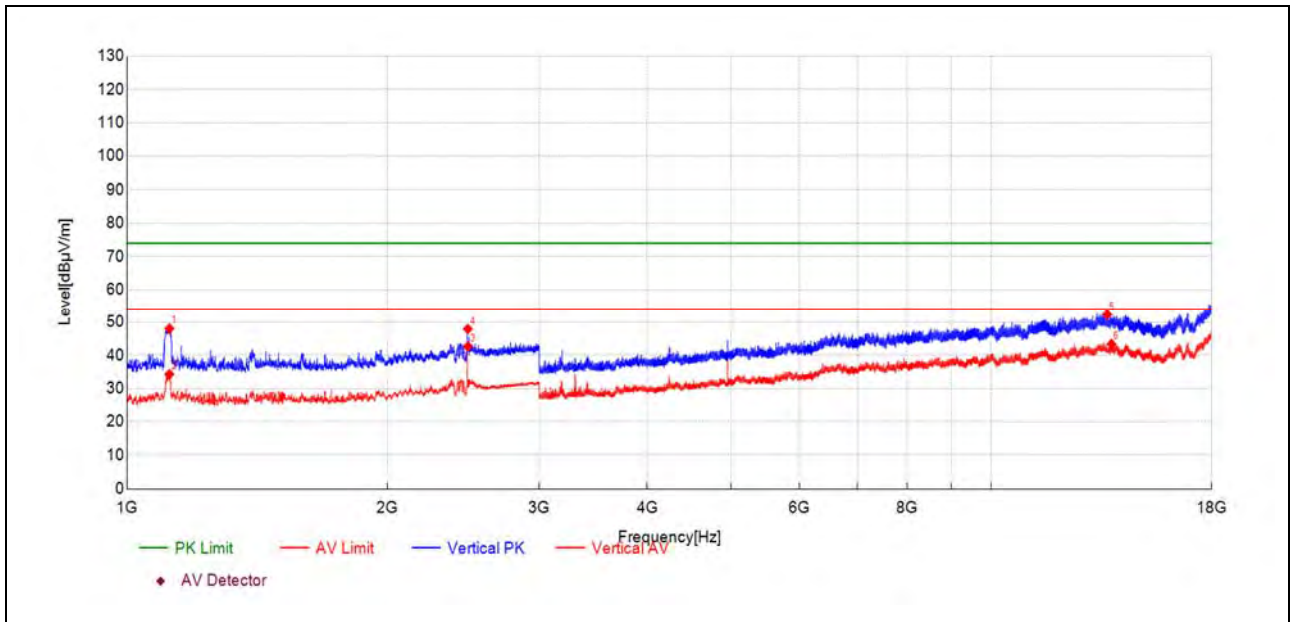


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1119.58	53.3	48.04	-5.280	74.00	25.96	150	120	PK	PASS
1119.58	39.6	34.29	-5.280	54.00	19.71	150	86	AV	PASS
2479.88	41.7	42.65	0.920	54.00	11.35	150	6	AV	NA
2479.88	47.0	47.91	0.920	74.00	26.09	150	281	PK	NA
13622.85	47.5	52.29	4.750	74.00	21.71	150	183	PK	PASS
13778.86	38.0	43.37	5.350	54.00	10.63	150	218	AV	PASS




512kbps

Plot for Channel 0

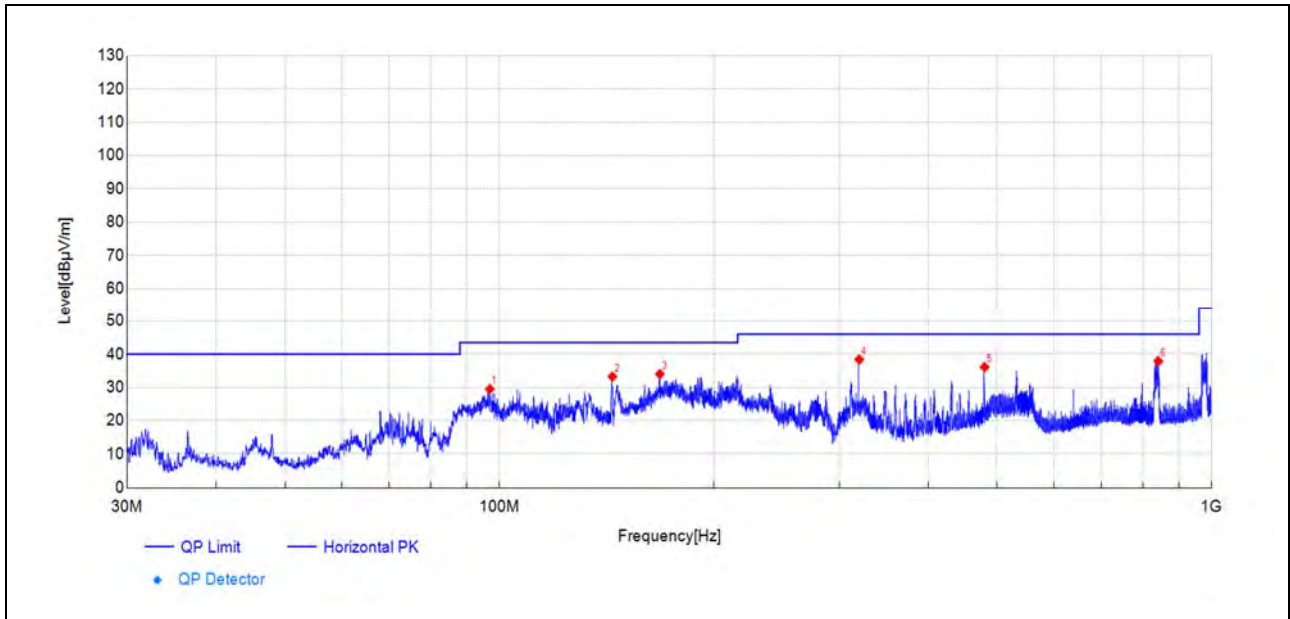


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
96.93	59.9	29.53	-30.400	43.50	13.97	150	359	PK	PASS
144.08	66.8	33.24	-33.550	43.50	10.26	150	72	PK	PASS
167.99	66.4	34.02	-32.330	43.50	9.48	150	213	PK	PASS
320.00	64.8	38.40	-26.370	46.00	7.60	150	213	PK	PASS
480.01	58.4	36.11	-22.330	46.00	9.89	150	173	PK	PASS
841.49	53.7	37.90	-15.750	46.00	8.10	150	112	PK	PASS

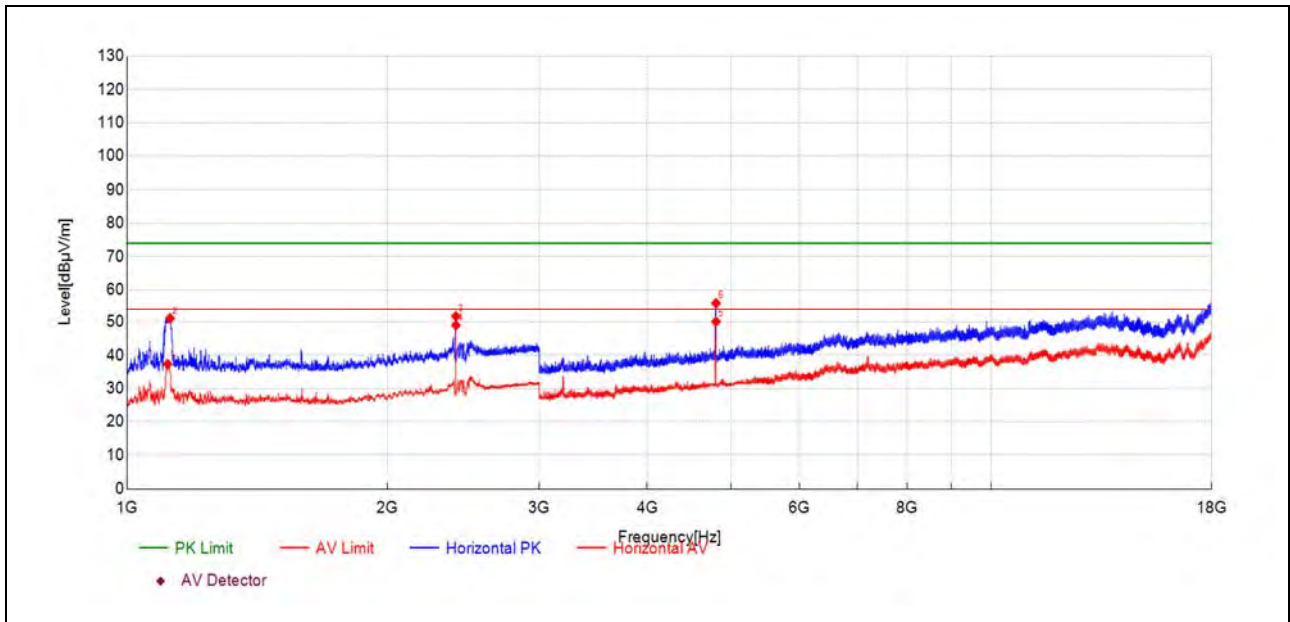


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1114.25	42.7	37.38	-5.290	54.00	16.62	150	256	AV	PASS
1121.36	56.4	51.10	-5.270	74.00	22.90	150	247	PK	PASS
2402.09	51.0	51.73	0.750	74.00	22.27	150	196	PK	NA
2402.09	48.3	49.04	0.750	54.00	4.96	150	196	AV	NA
4803.56	60.9	50.13	-10.720	54.00	3.87	150	65	AV	PASS
4804.06	66.7	55.94	-10.720	74.00	18.06	150	116	PK	PASS

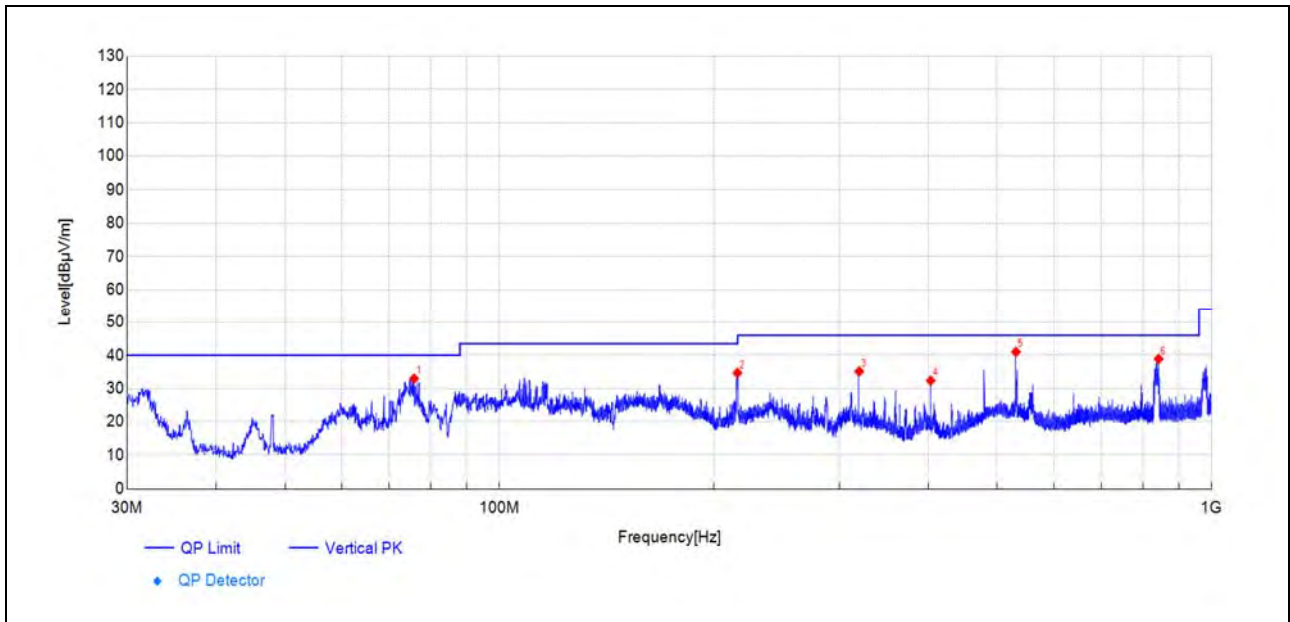

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
75.88	68.2	32.98	-35.230	40.00	7.02	150	199	PK	PASS
215.86	64.2	34.68	-29.510	43.50	8.82	150	78	PK	PASS
320.00	61.5	35.16	-26.370	46.00	10.84	150	189	PK	PASS
403.18	56.4	32.39	-24.040	46.00	13.61	150	238	PK	PASS
531.03	62.4	41.00	-21.400	46.00	5.00	150	27	PK	PASS
842.42	54.6	38.90	-15.720	46.00	7.10	150	208	PK	PASS

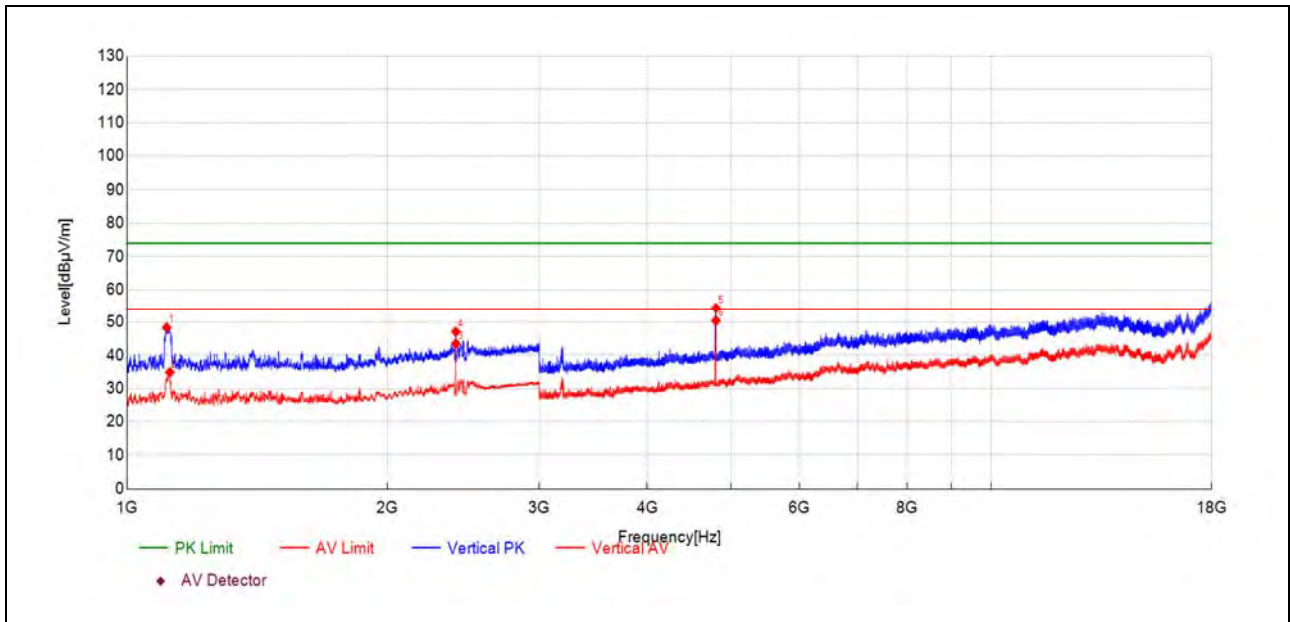


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1111.58	53.6	48.35	-5.290	74.00	25.65	150	280	PK	PASS
1120.92	40.1	34.87	-5.270	54.00	19.13	150	117	AV	PASS
2402.09	42.8	43.52	0.750	54.00	10.48	150	254	AV	PASS
2402.09	46.3	47.09	0.750	74.00	26.91	150	42	PK	PASS
4803.06	65.1	54.37	-10.730	74.00	19.63	150	204	PK	PASS
4803.56	61.2	50.46	-10.720	54.00	3.54	150	185	AV	PASS




Plot for Channel 19

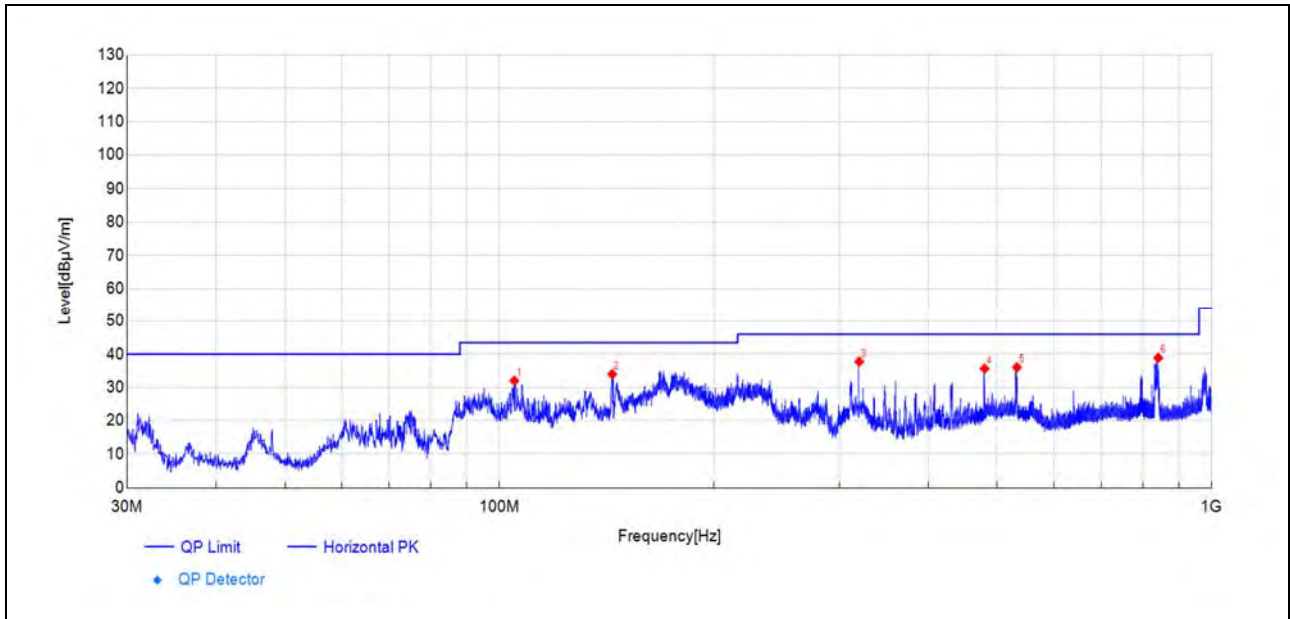


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
104.94	62.4	32.02	-30.410	43.50	11.48	150	121	PK	PASS
143.98	67.6	34.01	-33.550	43.50	9.49	150	70	PK	PASS
320.00	64.1	37.76	-26.370	46.00	8.24	150	212	PK	PASS
479.96	58.0	35.68	-22.330	46.00	10.32	150	171	PK	PASS
532.78	57.5	36.07	-21.390	46.00	9.93	150	151	PK	PASS
841.54	54.7	38.92	-15.750	46.00	7.08	150	111	PK	PASS

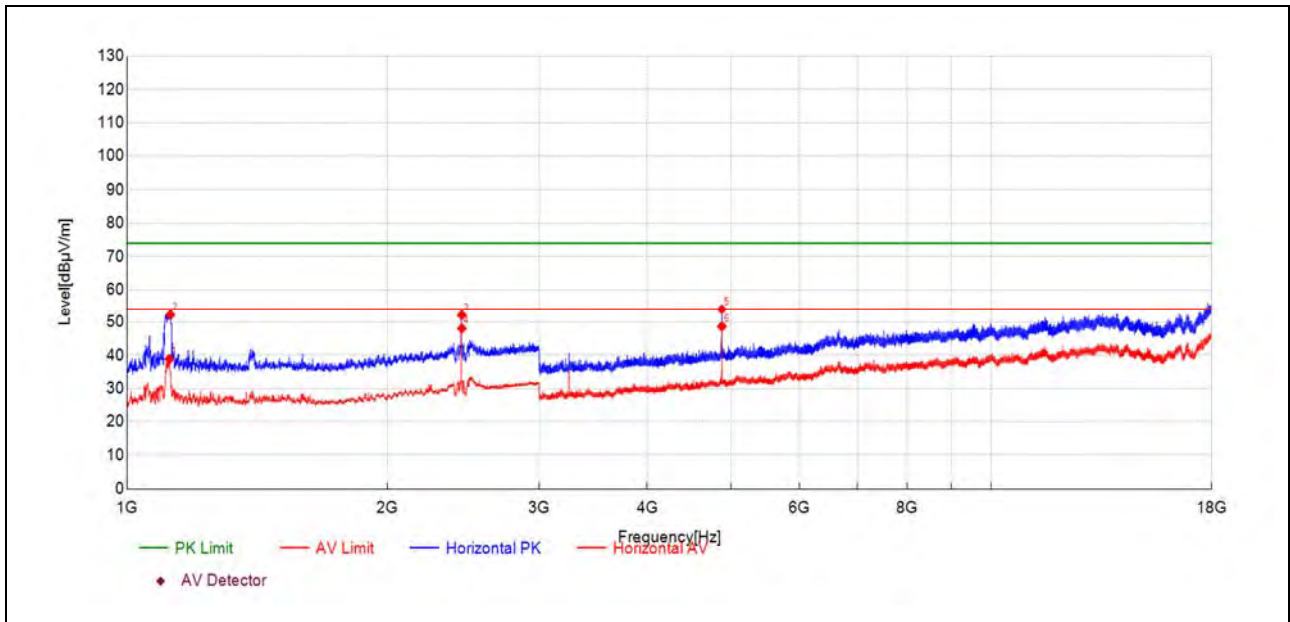


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1119.14	44.1	38.86	-5.280	54.00	15.14	150	222	AV	PASS
1122.69	57.5	52.25	-5.270	74.00	21.75	150	247	PK	PASS
2440.32	51.1	52.15	1.010	74.00	21.85	150	179	PK	NA
2440.32	47.1	48.09	1.010	54.00	5.91	150	179	AV	NA
4879.06	64.0	53.94	-10.020	74.00	20.06	150	134	PK	PASS
4880.06	58.7	48.68	-10.010	54.00	5.32	150	114	AV	PASS

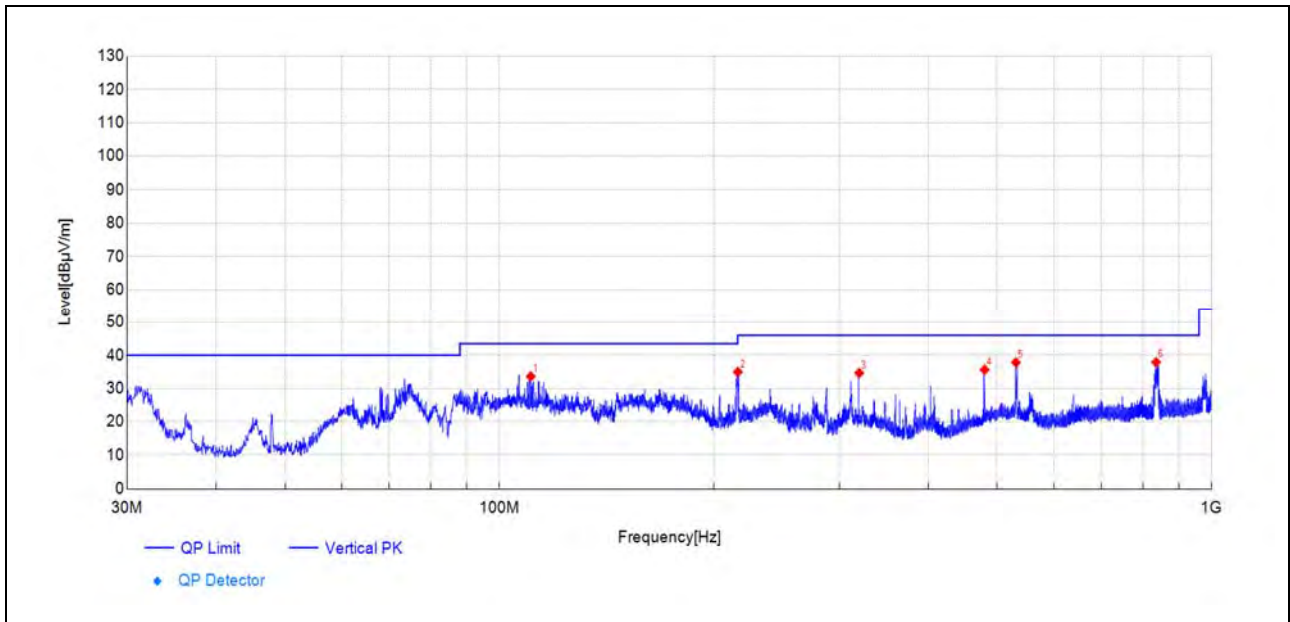

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
110.66	64.5	33.64	-30.860	43.50	9.86	150	0	PK	PASS
216.15	64.5	34.98	-29.490	46.00	11.02	150	78	PK	PASS
320.00	61.1	34.68	-26.370	46.00	11.32	150	170	PK	PASS
479.96	58.0	35.65	-22.330	46.00	10.35	150	241	PK	PASS
531.03	59.2	37.83	-21.400	46.00	8.17	150	351	PK	PASS
835.33	53.8	37.90	-15.890	46.00	8.10	150	209	PK	PASS

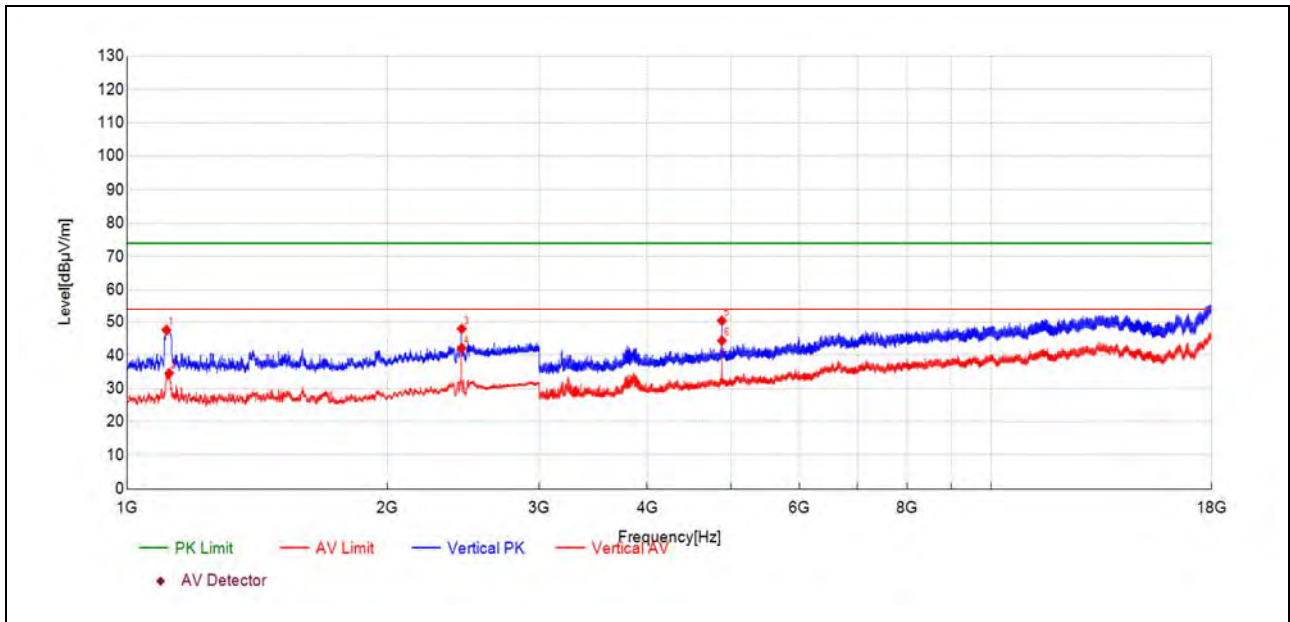


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1110.69	52.9	47.62	-5.290	74.00	26.38	150	108	PK	PASS
1118.69	39.9	34.61	-5.280	54.00	19.39	150	108	AV	PASS
2439.88	46.9	47.95	1.010	74.00	26.05	150	194	PK	NA
2439.88	41.1	42.15	1.010	54.00	11.85	150	202	AV	NA
4880.06	60.4	50.40	-10.010	74.00	23.60	150	185	PK	PASS
4880.06	54.4	44.41	-10.010	54.00	9.59	150	80	AV	PASS




Plot for Channel 39

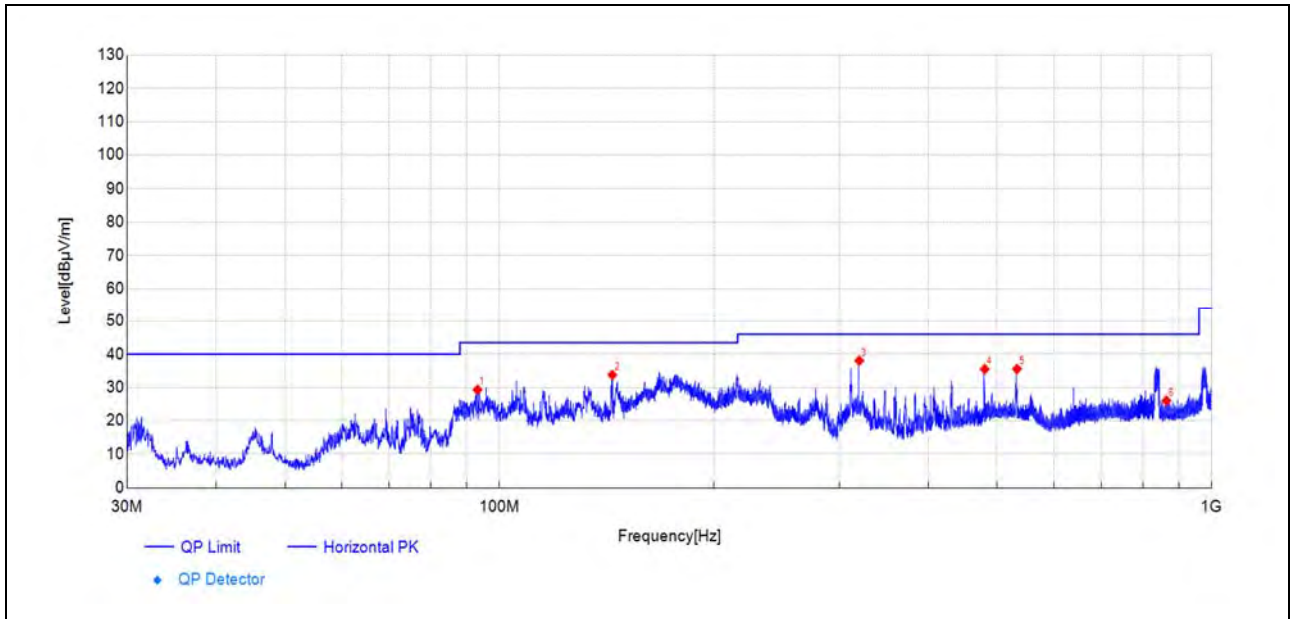


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
93.15	60.3	29.32	-31.020	43.50	14.18	150	71	PK	PASS
144.03	67.3	33.79	-33.550	43.50	9.71	150	51	PK	PASS
320.00	64.4	38.07	-26.370	46.00	7.93	150	212	PK	PASS
480.01	57.9	35.52	-22.330	46.00	10.48	150	181	PK	PASS
532.87	56.9	35.55	-21.390	46.00	10.45	150	131	PK	PASS
863.95	41.5	26.07	-15.410	46.00	19.93	150	355	PK	PASS

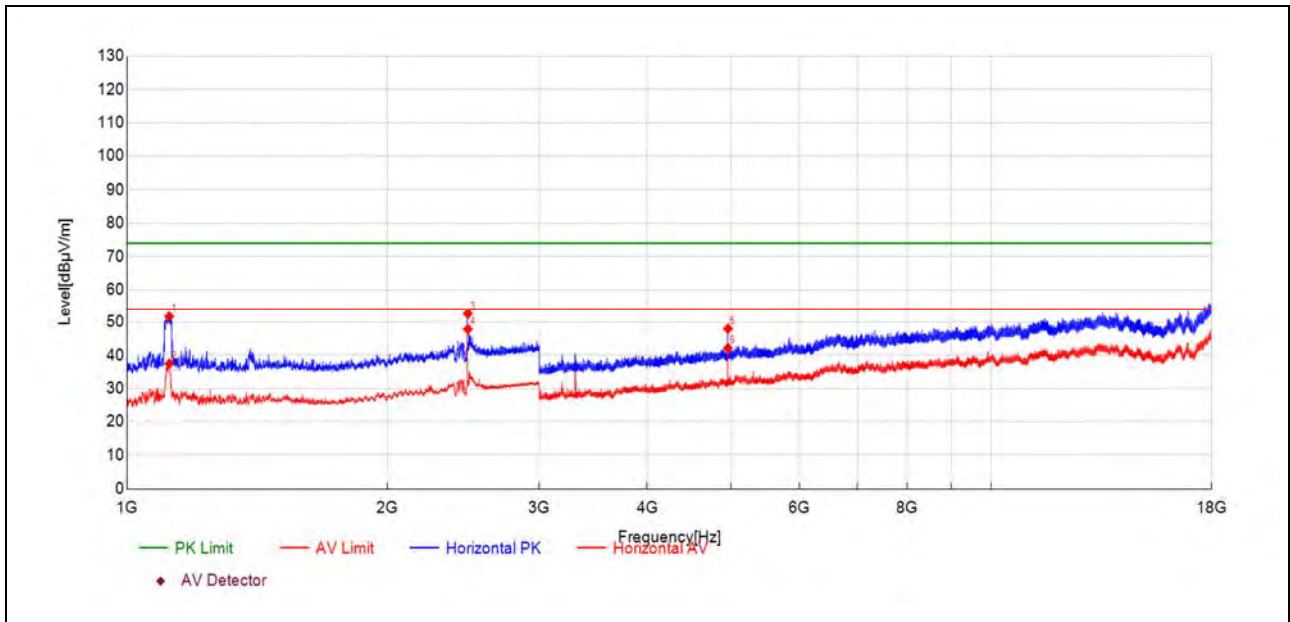


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1119.14	57.0	51.69	-5.280	74.00	22.31	150	248	PK	PASS
1119.58	42.8	37.49	-5.280	54.00	16.51	150	248	AV	PASS
2479.88	51.6	52.56	0.920	74.00	21.44	150	196	PK	NA
2479.88	46.9	47.86	0.920	54.00	6.14	150	179	AV	NA
4959.57	58.1	47.98	-10.130	74.00	26.02	150	134	PK	PASS
4959.57	52.3	42.14	-10.130	54.00	11.86	150	98	AV	PASS

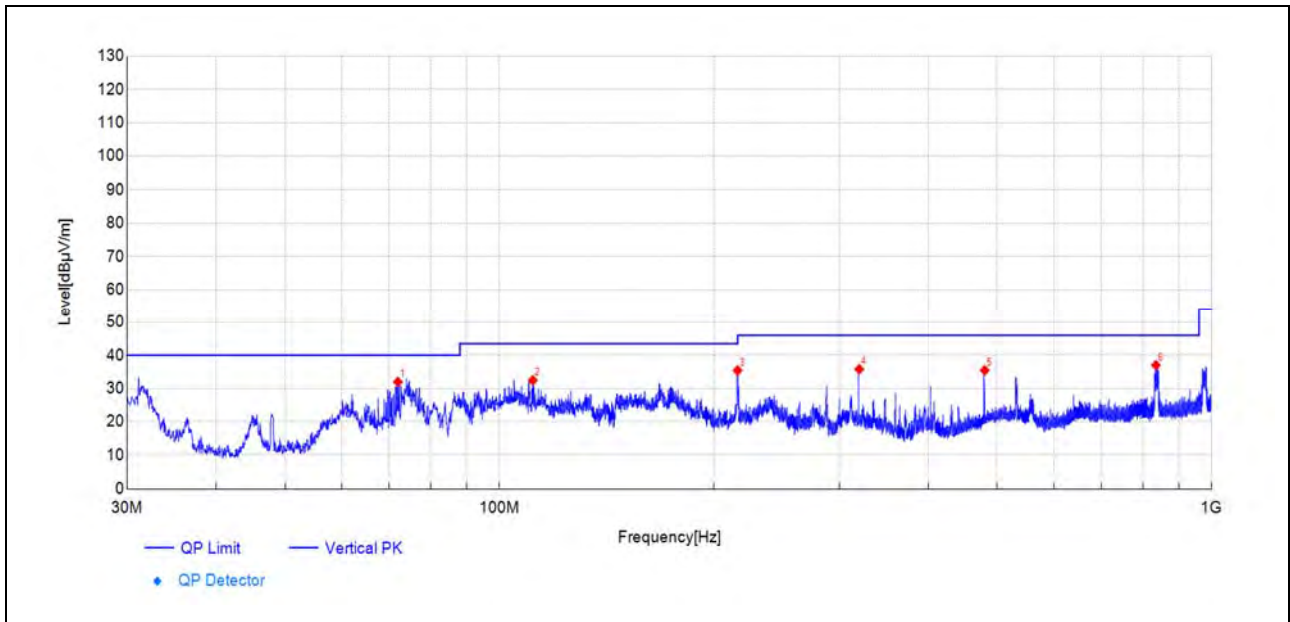

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
72.00	66.9	31.99	-34.860	40.00	8.01	150	97	PK	PASS
111.39	63.4	32.47	-30.970	43.50	11.03	150	279	PK	PASS
215.96	64.9	35.43	-29.500	43.50	8.07	150	88	PK	PASS
320.00	62.2	35.82	-26.370	46.00	10.18	150	180	PK	PASS
480.01	57.8	35.47	-22.330	46.00	10.53	150	240	PK	PASS
835.04	52.9	37.02	-15.900	46.00	8.98	150	208	PK	PASS

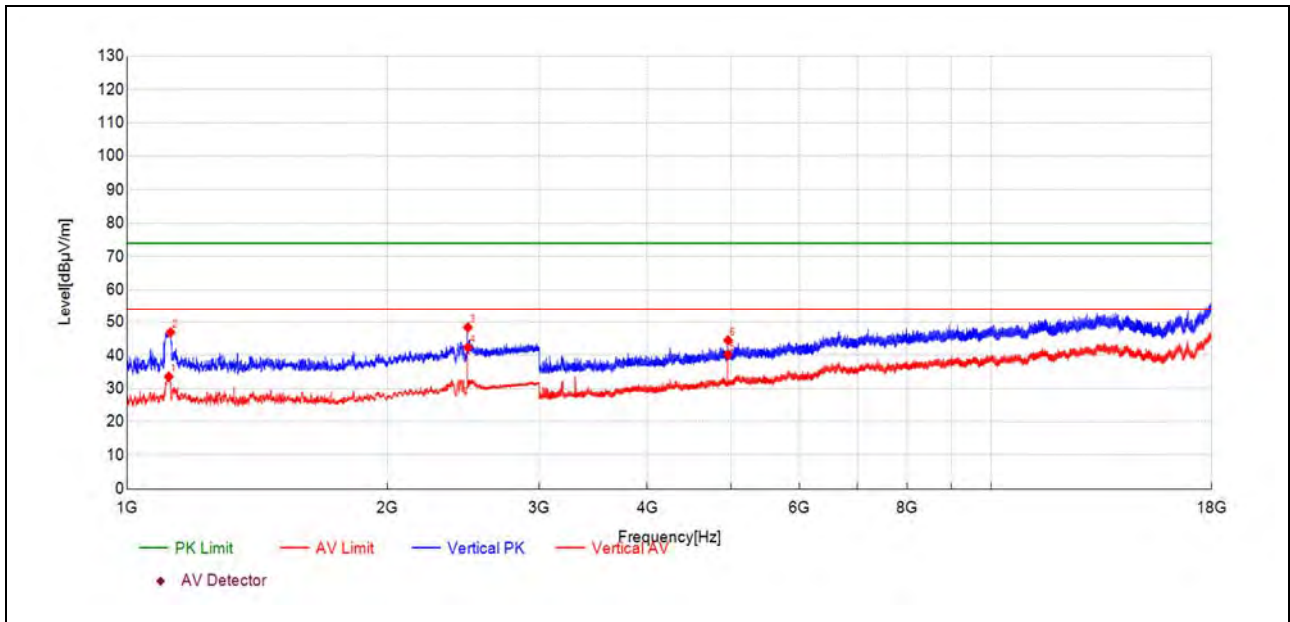

(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1117.80	38.9	33.57	-5.280	54.00	20.43	150	114	AV	PASS
1122.69	52.1	46.85	-5.270	74.00	27.15	150	114	PK	PASS
2479.88	47.5	48.39	0.920	74.00	25.61	150	283	PK	NA
2479.88	41.5	42.37	0.920	54.00	11.63	150	283	AV	NA
4959.57	50.3	40.16	-10.130	54.00	13.84	150	97	AV	PASS
4960.07	54.6	44.50	-10.130	74.00	29.50	150	97	PK	PASS

END OF REPORT