

FCC PART 15.247 TEST REPORT

For

JiangSu HuiTong Group Co.,Ltd

24#,2 block TaoHuawu new district,ZhenJiang City, JiangSu,P.R.C,China

FCC ID: PUW-2K19-YKF473

Report Type: Original Report	Product Type: Remote Plus
Test Engineer: Jack Jiao <i>Jack Jiao</i>	
Report Number: RSHD190909002-00B	
Report Date: 2019-10-10	
Reviewed By:	Oscar Ye <i>Oscar Ye</i> RF Leader
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE	11
MEASUREMENT RESULT	11
FCC §15.203 – ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	19
TEST RESULTS SUMMARY	19
TEST DATA	20
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	44

APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	63
APPLICABLE STANDARD	63
TEST PROCEDURE	63
TEST DATA	63
FCC §15.247(d) - BAND EDGES TESTING	70
APPLICABLE STANDARD	70
TEST PROCEDURE	70
TEST DATA	70

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	JiangSu HuiTong Group Co.,Ltd
Tested Model	YKF473-001
Series Model	YKF473-00* (* can be 0,2,3...9,a,b,c,...x,y,z)
Product Type	Remote Plus
Dimension	18mm(L)*3.8 mm(W)* 1.6mm(H)
Power Supply	DC 3.7V from battery and DC 5.0V charging by adapter

Note: The model difference was explained in the attached declaration letter in detail.

**All measurement and test data in this report was gathered from production sample serial number: 20190909002.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2019-09-09)*

Objective

This test report is prepared on behalf of JiangSu HuiTong Group Co.,Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part15.247 DTS submissions with FCC ID: PUW-2K19-YKF473.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for BT3.0:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RTLBTAPP Version:5.2.2.29

GFSK, $\pi/4$ -DQPSK, 8DPSK Power level: Default

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Power Cable	0.8	EUT	Adapter


Block Diagram of Test Setup

For Conducted Emissions:

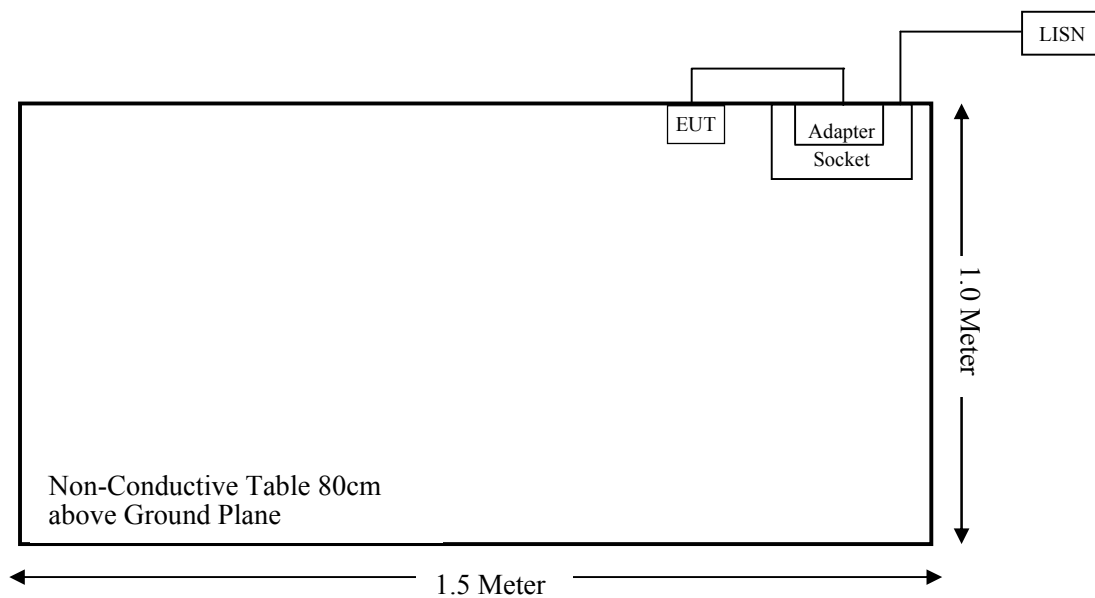


For Radiated Emissions(Below 1GHz):

Turntable
2m Diameter

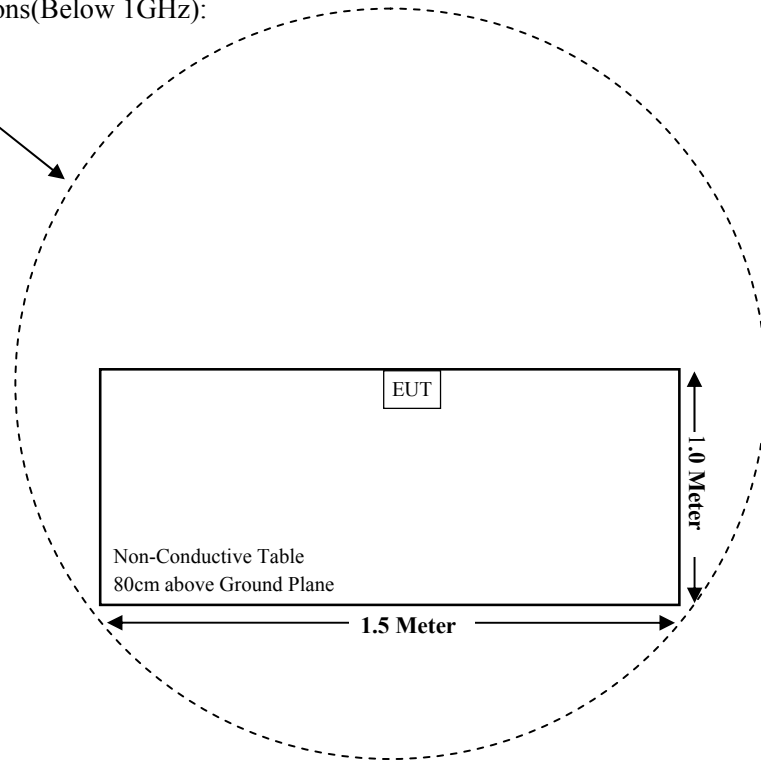

For Radiated Emissions(Above 1GHz):

Turntable
2m Diameter

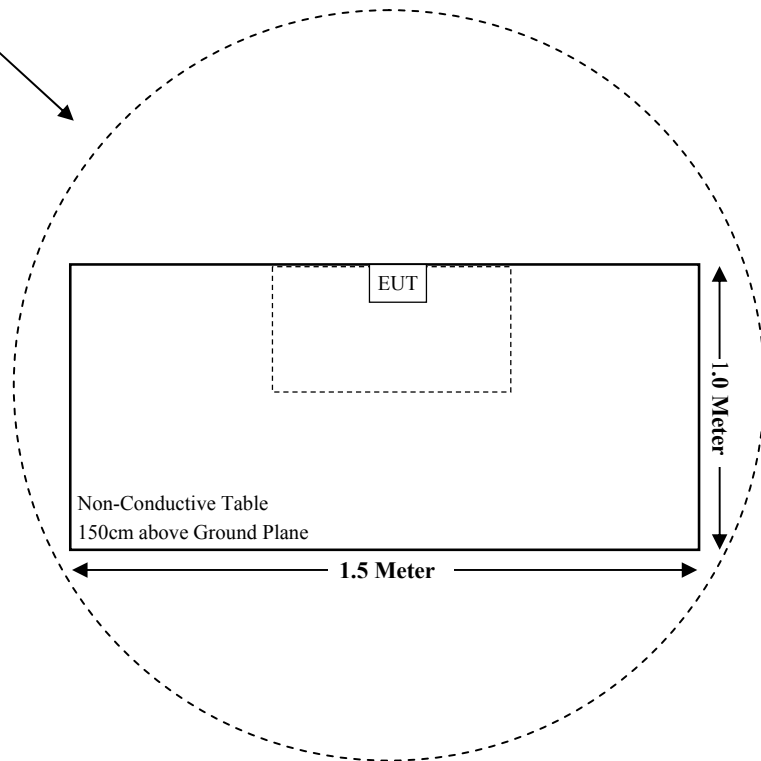

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §1.1310 & §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrunent	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2019-05-30	2020-05-29
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	ESIB26	100146	2018-11-30	2019-11-29
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
SecuRam	RF Cable	SecuRam C01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2018-11-12	2019-11-11
Audix	Test Software	e3	V9	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

For worst case:

Mode	Chip model	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
			(dBm)	(mW)				
BLE	8752CJF	2402-2480	-1.00	0.79	5	0.2	3.0	Yes
BLE	RTL8763BF	2402-2480	4.50	2.82	5	0.9	3.0	Yes
BT3.0	RTL8763BF	2402-2480	6.00	3.98	5	1.3	3.0	Yes

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}/x] \text{ W/kg}$ for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Result: No SAR test is required.

Standalone SAR estimation:

Mode	Chip model	Frequency Range (MHz)	Max tune-up power		Distance (mm)	Estimated _{1-g} (W/kg)
			(dBm)	(mW)		
BLE	8752CJF	2402-2480	-1.00	0.79	5	0.09
BT3.0	RTL8763BF	2402-2480	6.00	3.98	5	0.46

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including } \textbf{tune-up tolerance}, \text{ mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;
where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion

Simultaneous SAR test exclusion considerations:

Mode (ANT 0+ ANT 1)	Reported SAR (W/kg)		$\Sigma \text{SAR} < 1.6 \text{ W/kg}$
BT3.0+BLE	0.09	0.46	0.55

Conclusion: $\Sigma \text{SAR} < 1.6 \text{ W/kg}$ therefore simultaneous transmission SAR is not required.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PIFA antenna and the antenna gain is 0 dBi for Bluetooth, which was permanently attached; fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

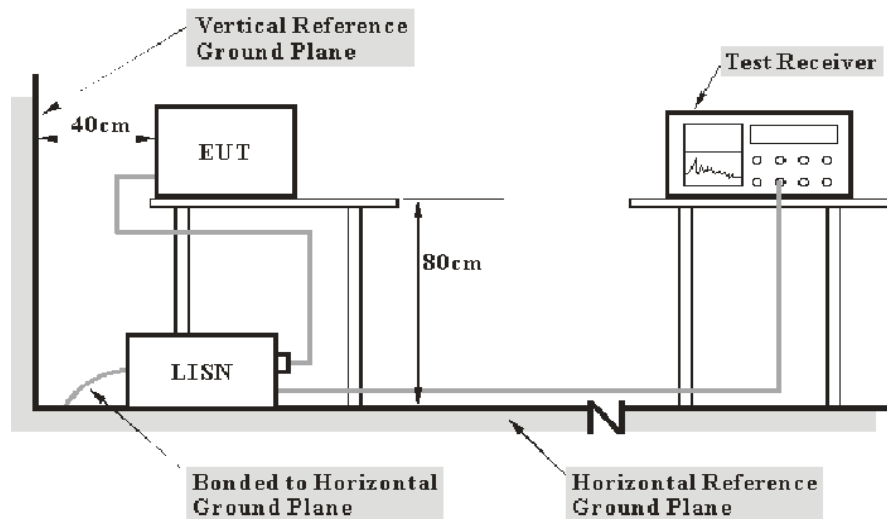

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over Limit of 7dB means the emission is 7 dB above the limit. The equation for over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	22 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2019-09-20.

Test Result: Compliant.

EUT operation mode: Transmitting in low channel of 8DPSK Mode (worst case) .


AC 120V/60 Hz, Line

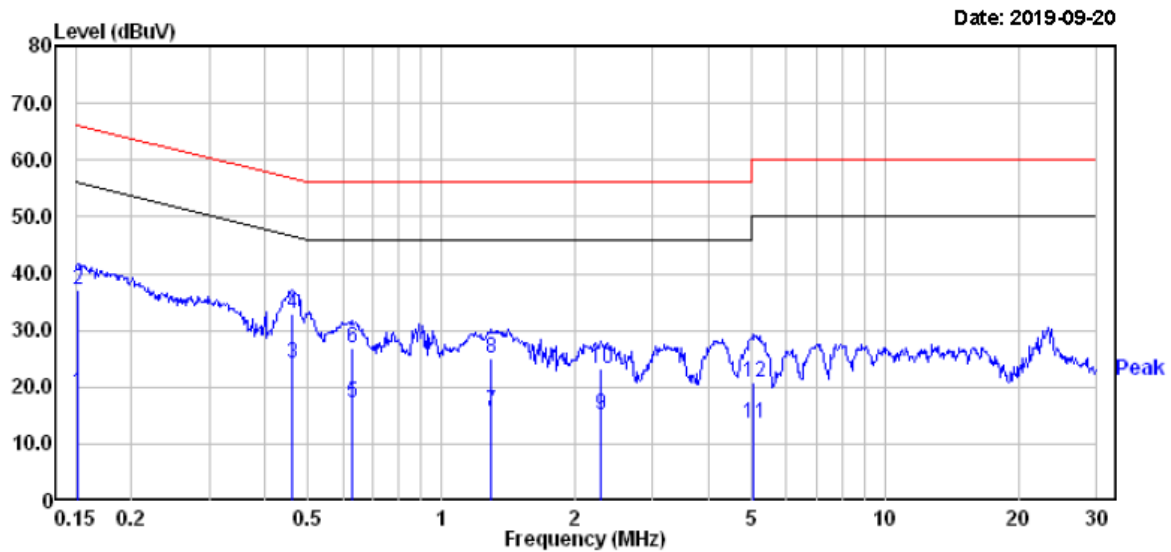

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	-0.70	19.82	19.12	55.91	-36.79	Average
2	0.152	17.20	19.82	37.02	65.91	-28.89	QP
3	0.461	4.40	19.75	24.15	46.67	-22.52	Average
4	0.461	13.20	19.75	32.95	56.67	-23.72	QP
5	0.627	-2.40	19.75	17.35	46.00	-28.65	Average
6	0.627	7.20	19.75	26.95	56.00	-29.05	QP
7	1.296	-4.00	19.82	15.82	46.00	-30.18	Average
8	1.296	5.20	19.82	25.02	56.00	-30.98	QP
9	2.297	-4.50	19.61	15.11	46.00	-30.89	Average
10	2.297	3.60	19.61	23.21	56.00	-32.79	QP
11	5.058	-5.80	19.49	13.69	50.00	-36.31	Average
12	5.058	1.30	19.49	20.79	60.00	-39.21	QP

AC 120V/60 Hz, Neutral

Date: 2019-09-20

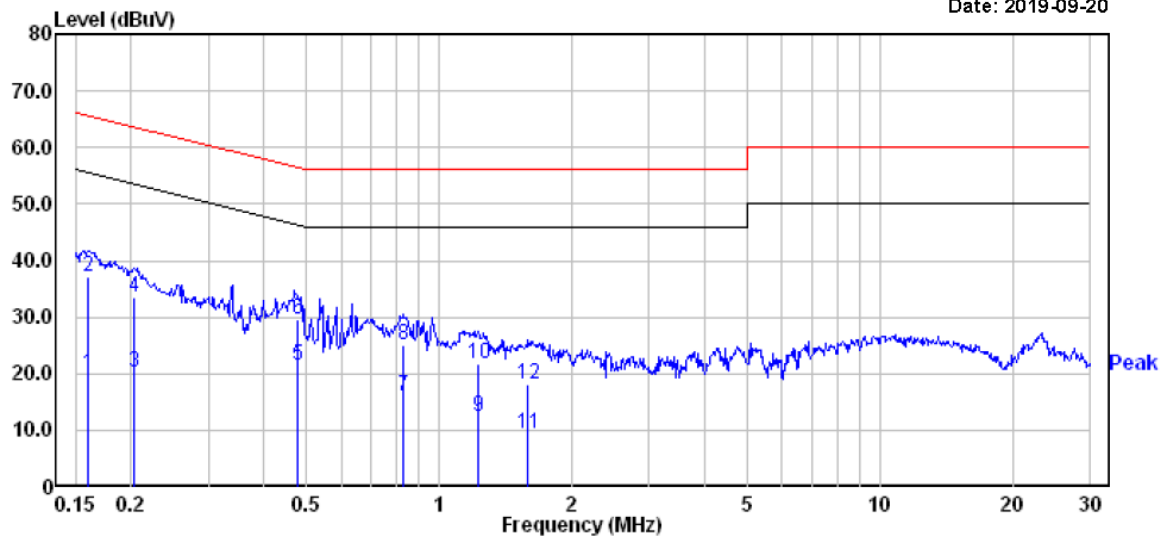

	Read Freq	Level dBUV	Factor dB	Level dBUV	Limit Line dBUV	Over Limit dB	Remark
	MHz	dBUV	dB	dBUV	dBUV	dB	
1	0.160	0.20	19.83	20.03	55.47	-35.44	Average
2	0.160	17.20	19.83	37.03	65.47	-28.44	QP
3	0.204	0.40	19.82	20.22	53.45	-33.23	Average
4	0.204	13.80	19.82	33.62	63.45	-29.83	QP
5	0.476	1.70	19.76	21.46	46.41	-24.95	Average
6	0.476	9.90	19.76	29.66	56.41	-26.75	QP
7	0.830	-3.70	19.71	16.01	46.00	-29.99	Average
8	0.830	5.40	19.71	25.11	56.00	-30.89	QP
9	1.229	-7.29	19.81	12.52	46.00	-33.48	Average
10	1.229	2.01	19.81	21.82	56.00	-34.18	QP
11	1.593	-10.41	19.85	9.44	46.00	-36.56	Average
12	1.593	-1.81	19.85	18.04	56.00	-37.96	QP



Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBUV) + Factor (dB) - Limit (dBUV)

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

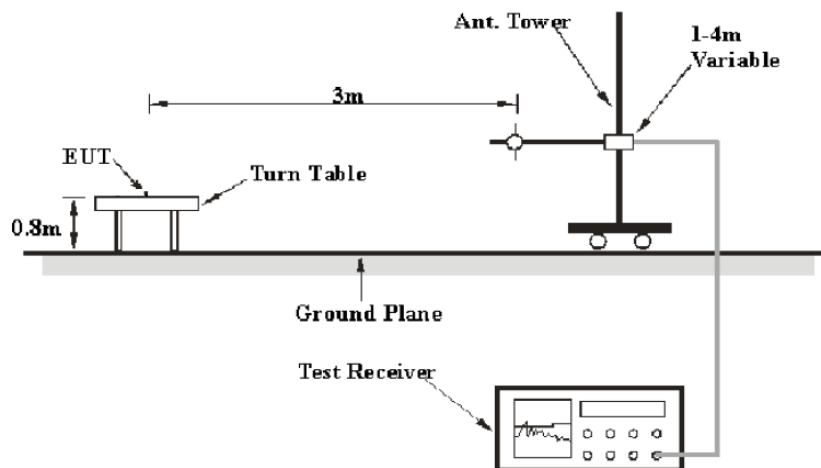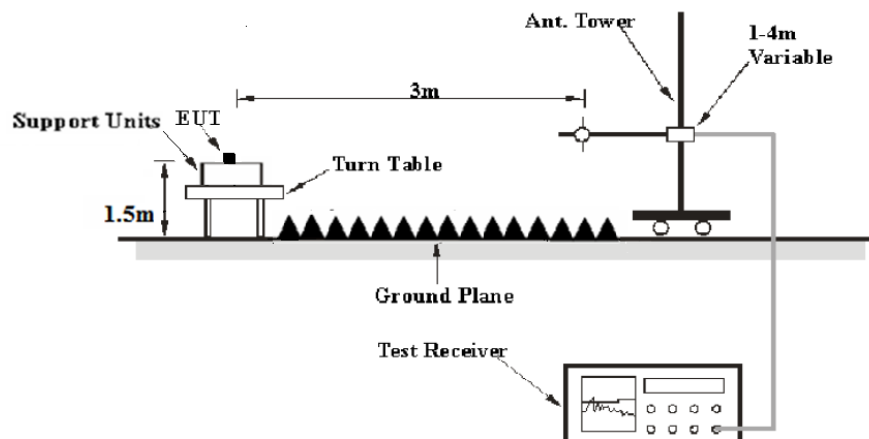EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Factor & Over Limit Calculation (for below 1GHz)

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Corrected Amplitude & Margin Calculation (for above 1GHz)

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	24.8~25.2 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.2~101.3 kPa

The testing was performed by Jack Jiao 2019-09-20 to 2019-10-08.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz**


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low channel of 8DPSK Mode in X-axis of orientation** was recorded)

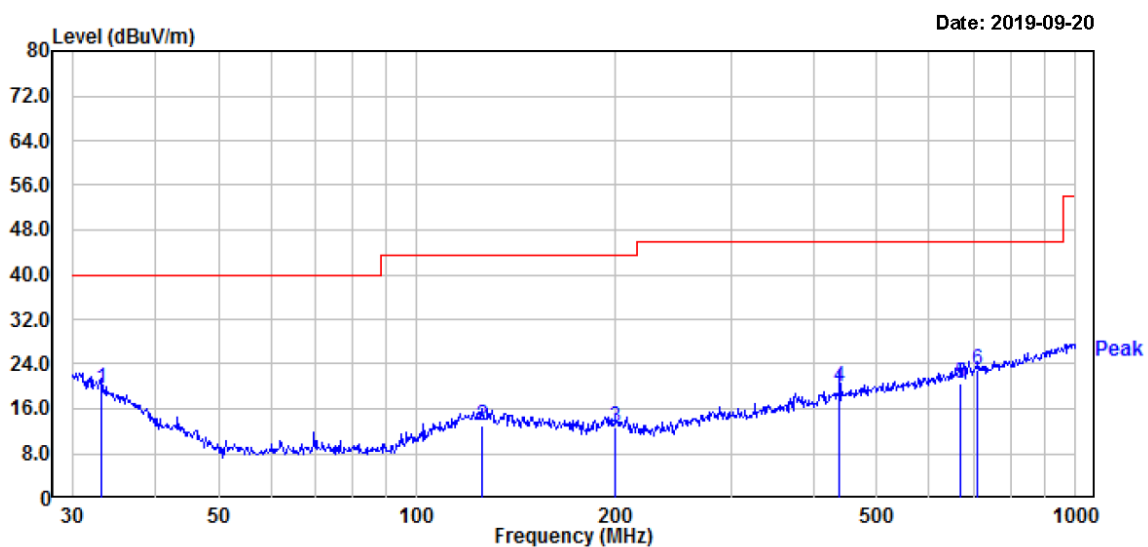Horizontal:

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	33.10	25.23	-5.70	19.53	40.00	-20.47	200	151	QP
2	125.45	23.92	-10.97	12.95	43.50	-30.55	200	249	QP
3	200.69	24.38	-11.69	12.69	43.50	-30.81	200	357	QP
4	438.66	26.83	-6.85	19.98	46.00	-26.02	200	359	QP
5	668.14	23.30	-2.71	20.59	46.00	-25.41	100	81	QP
6	711.67	24.73	-1.91	22.82	46.00	-23.18	200	84	QP

Vertical:

Date: 2019-09-20

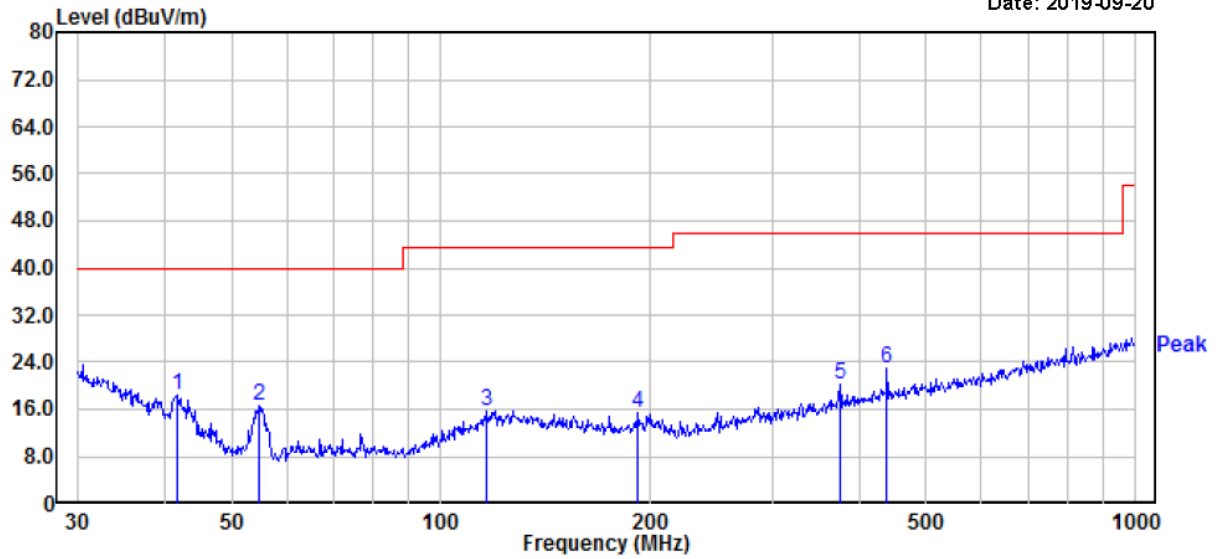

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	41.71	30.91	-12.38	18.53	40.00	-21.47	100	41	Peak
2	54.84	33.99	-17.25	16.74	40.00	-23.26	145	356	Peak
3	116.54	27.11	-11.33	15.78	43.50	-27.72	200	180	Peak
4	192.42	27.54	-12.12	15.42	43.50	-28.08	200	38	Peak
5	375.94	28.70	-8.35	20.35	46.00	-25.65	112	356	Peak
6	438.66	29.89	-6.85	23.04	46.00	-22.96	200	155	Peak

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case low channel of 8DPSK Mode in X-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz


Full Spectrum

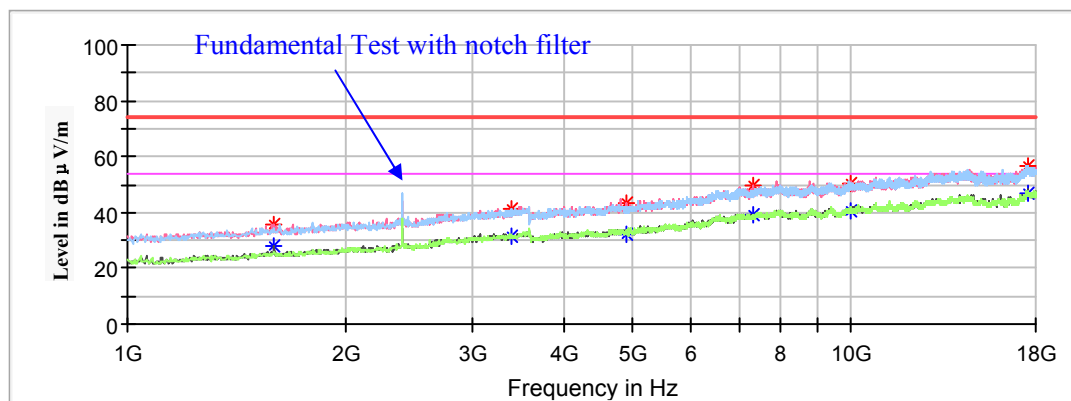

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1591.600000	---	27.69	200.0	V	93.0	-9.6	54.00	26.31
1591.600000	35.83	---	200.0	V	93.0	-9.6	74.00	38.17
3400.400000	---	31.74	150.0	H	98.0	-3.7	54.00	22.26
3400.400000	41.36	---	150.0	H	98.0	-3.7	74.00	32.64
4804.000000	---	32.43	200.0	V	257.0	-0.4	54.00	21.57
4804.000000	43.02	---	200.0	V	257.0	-0.4	74.00	30.98
7206.000000	---	38.90	200.0	V	34.0	5.8	54.00	15.10
7206.000000	49.92	---	200.0	V	34.0	5.8	74.00	24.08
9969.200000	---	40.47	150.0	H	168.0	8.2	54.00	13.53
9969.200000	50.46	---	150.0	H	168.0	8.2	74.00	23.54
17592.000000	---	47.09	200.0	H	319.0	14.1	54.00	6.91
17592.000000	56.49	---	200.0	H	319.0	14.1	74.00	17.51

Middle Channel: 2441MHz


Full Spectrum

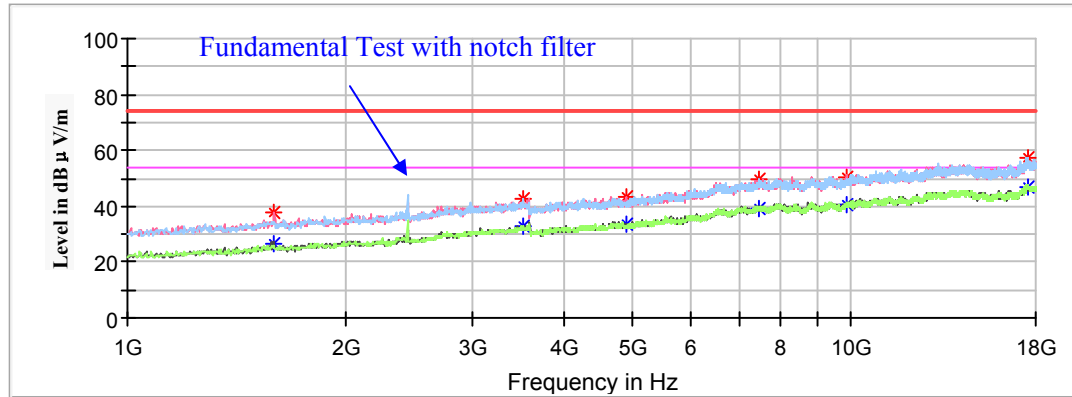

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.000000	---	26.38	150.0	V	151.0	-9.6	54.00	27.62
1595.000000	38.09	---	150.0	V	151.0	-9.6	74.00	35.91
3526.200000	---	32.55	200.0	H	0.0	-3.5	54.00	21.45
3526.200000	42.69	---	200.0	H	0.0	-3.5	74.00	31.31
4882.000000	---	33.47	150.0	V	233.0	-0.4	54.00	20.53
4882.000000	43.62	---	150.0	V	233.0	-0.4	74.00	30.38
7477.000000	---	39.45	150.0	H	0.0	6.1	54.00	14.55
7477.000000	49.69	---	150.0	H	0.0	6.1	74.00	24.31
9891.000000	---	40.51	150.0	V	263.0	8.1	54.00	13.49
9891.000000	50.36	---	150.0	V	263.0	8.1	74.00	23.64
17537.600000	---	46.70	150.0	H	3.0	14.2	54.00	7.30
17537.600000	57.46	---	150.0	H	3.0	14.2	74.00	16.54

High Channel: 2480MHz


Full Spectrum

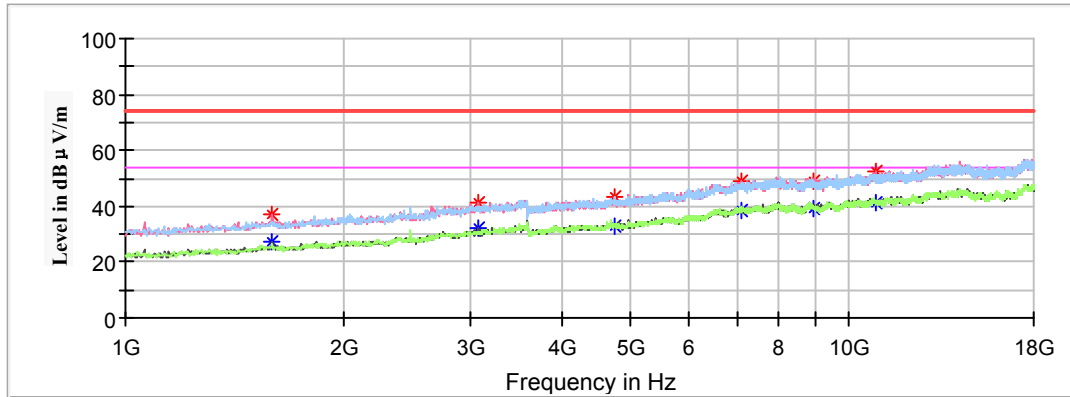


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1595.000000	---	27.34	200.0	V	89.0	-9.6	54.00	26.66
1595.000000	36.87	---	200.0	V	89.0	-9.6	74.00	37.13
3070.600000	---	32.43	200.0	V	289.0	-4.3	54.00	21.57
3070.600000	41.59	---	200.0	V	289.0	-4.3	74.00	32.41
4746.800000	---	32.96	150.0	H	124.0	-0.6	54.00	21.04
4746.800000	43.52	---	150.0	H	124.0	-0.6	74.00	30.48
7089.400000	---	38.30	200.0	V	136.0	5.5	54.00	15.70
7089.400000	48.76	---	200.0	V	136.0	5.5	74.00	25.24
8942.400000	---	39.24	200.0	H	337.0	7.5	54.00	14.76
8942.400000	49.13	---	200.0	H	337.0	7.5	74.00	24.87
10866.800000	---	41.23	150.0	V	250.0	9.6	54.00	12.77
10866.800000	52.19	---	150.0	V	250.0	9.6	74.00	21.81

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case low channel of 8DPSK Mode in X-axis of orientation was recorded

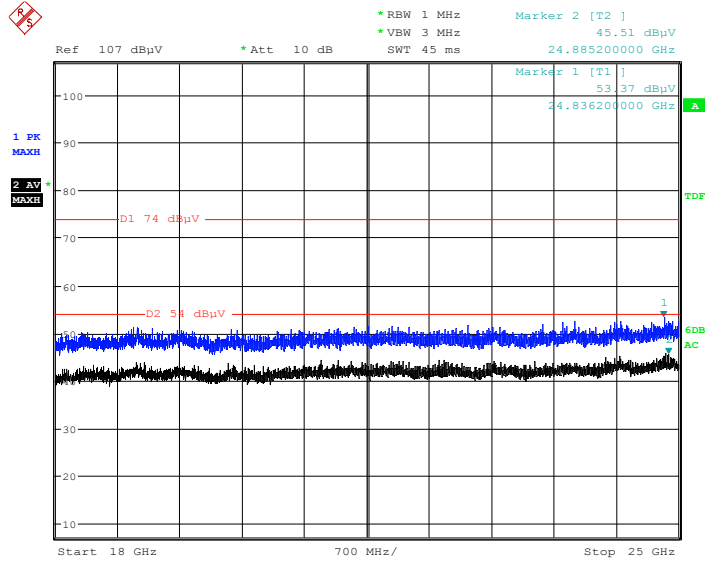Horizontal

Date: 26.SEP.2019 21:40:22

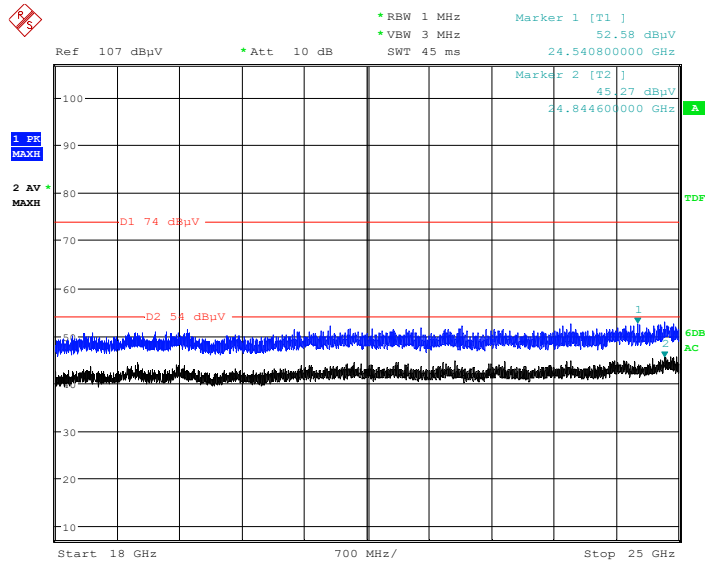Vertical

Date: 26.SEP.2019 21:40:53

Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case low channel of 8DPSK Mode in X-axis of orientation was recorded

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	---	36.64	200.0	H	231.0	2.8	54.00	17.36
2390.00	46.47	---	200.0	H	231.0	2.8	74.00	27.53
2390.00	---	37.56	150.0	V	107.0	2.8	54.00	16.44
2390.00	47.67	---	150.0	V	107.0	2.8	74.00	26.33
High Channel: 2480MHz								
2483.50	---	36.63	150.0	V	0.0	3.0	54.00	17.37
2483.50	46.76	---	150.0	V	0.0	3.0	74.00	27.24
2483.50	---	37.96	150.0	H	104.0	3.0	54.00	16.04
2483.50	47.11	---	150.0	H	104.0	3.0	74.00	26.89



Conducted Spurious Emissions at Antenna Port

BDR (GFSK): Low Channel

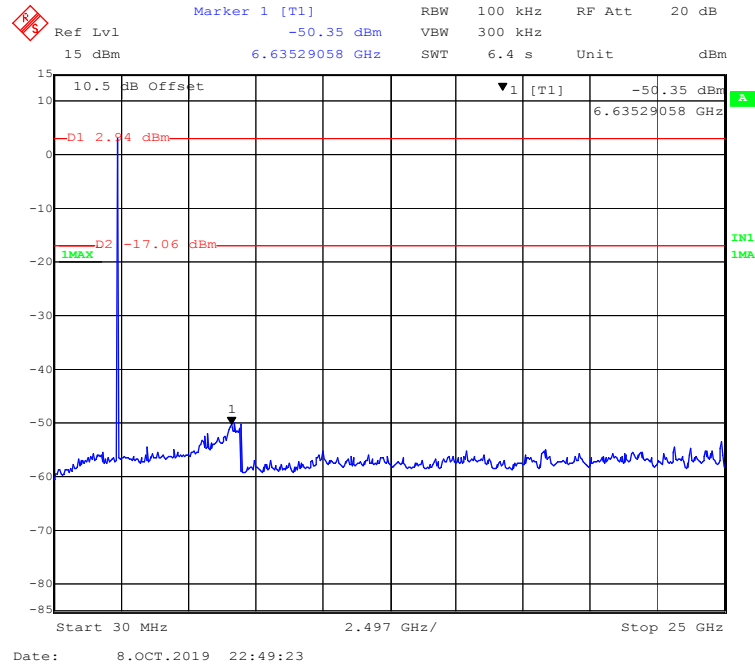


BDR (GFSK): Middle Channel

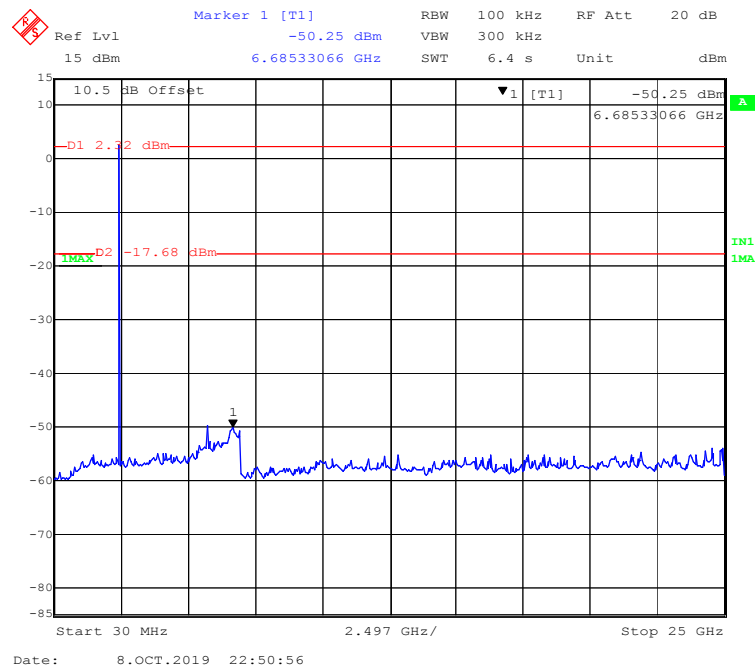


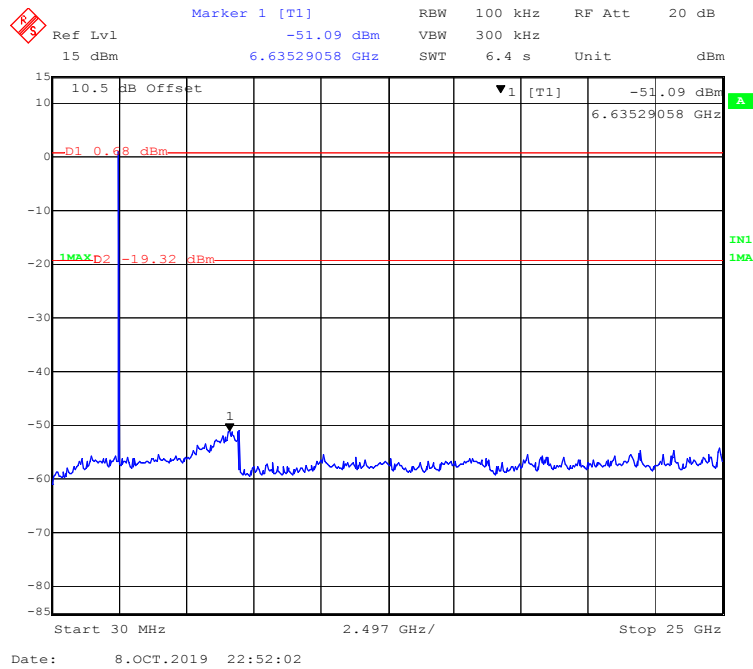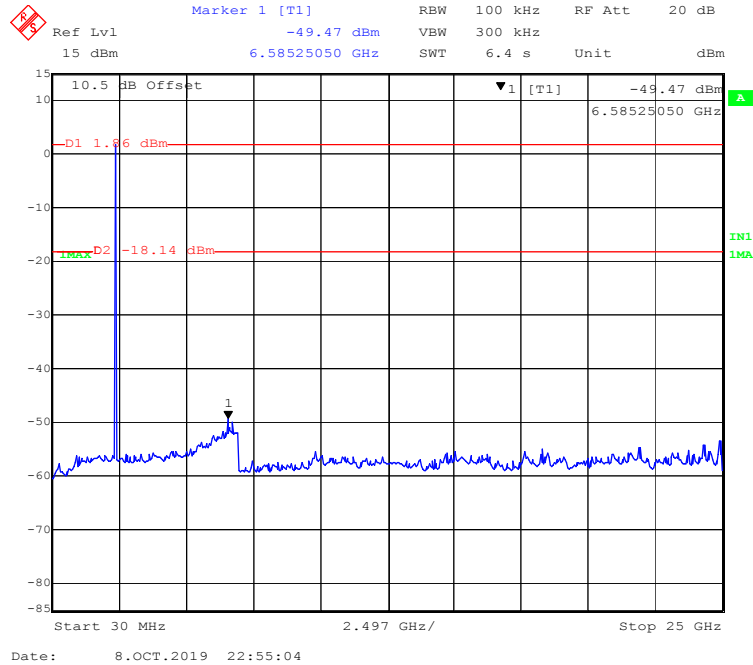BDR (GFSK): High Channel**EDR ($\pi/4$ -DQPSK): Low Channel**


EDR ($\pi/4$ -DQPSK): Middle Channel

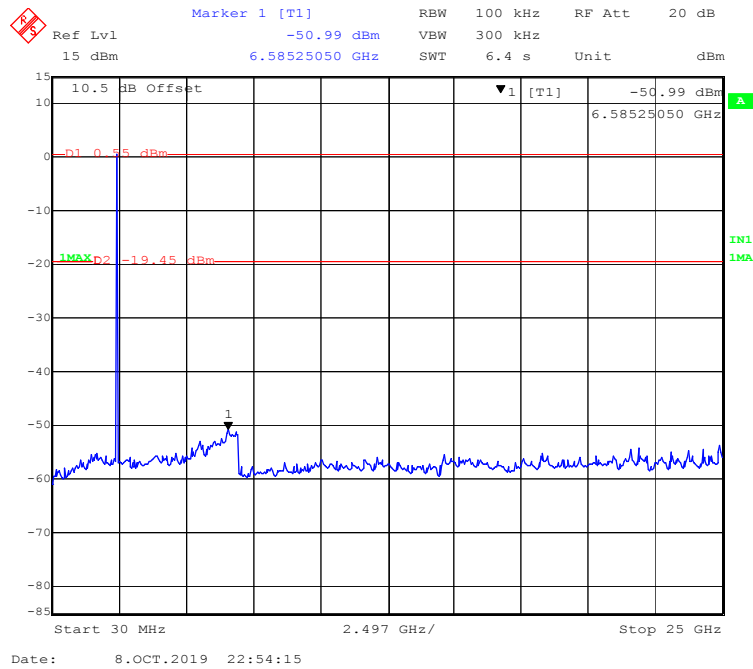


EDR ($\pi/4$ -DQPSK): High Channel

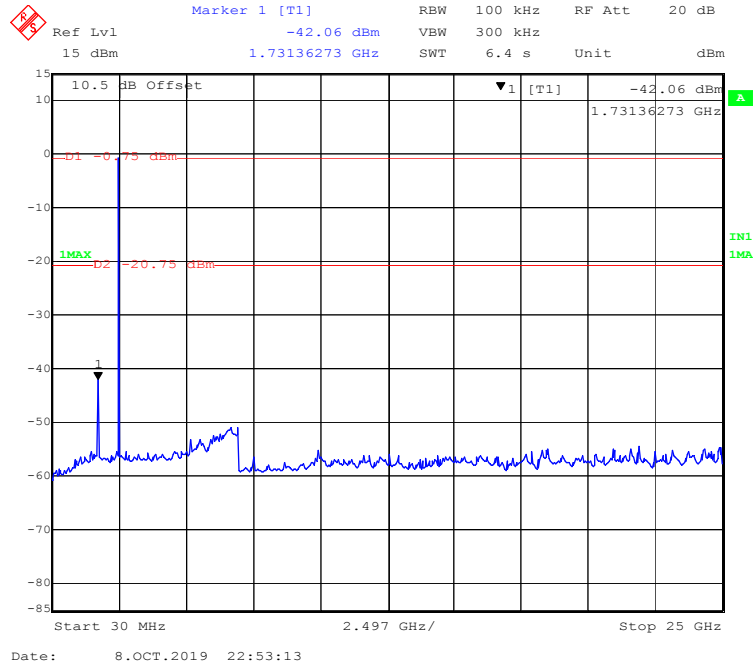


EDR (8DPSK): Low Channel

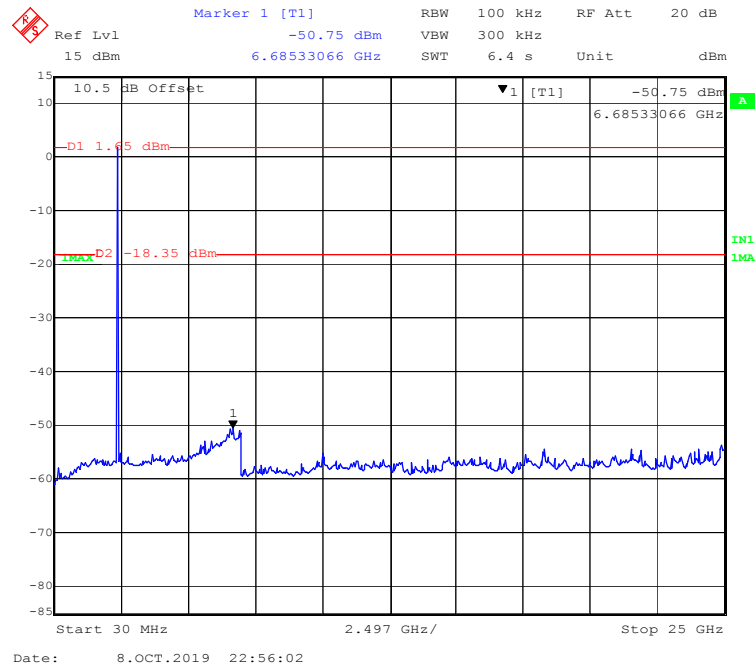

EDR (8DPSK): Middle Channel

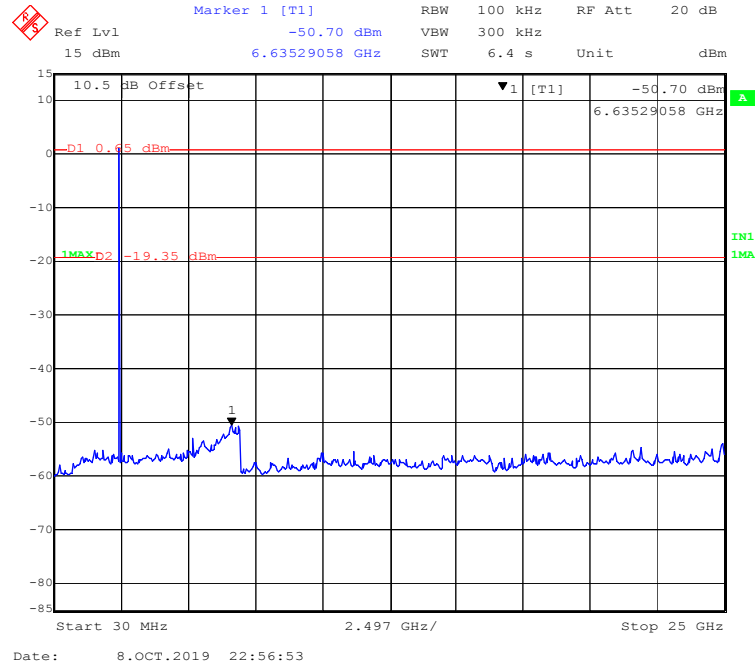

EDR (8DPSK): High Channel

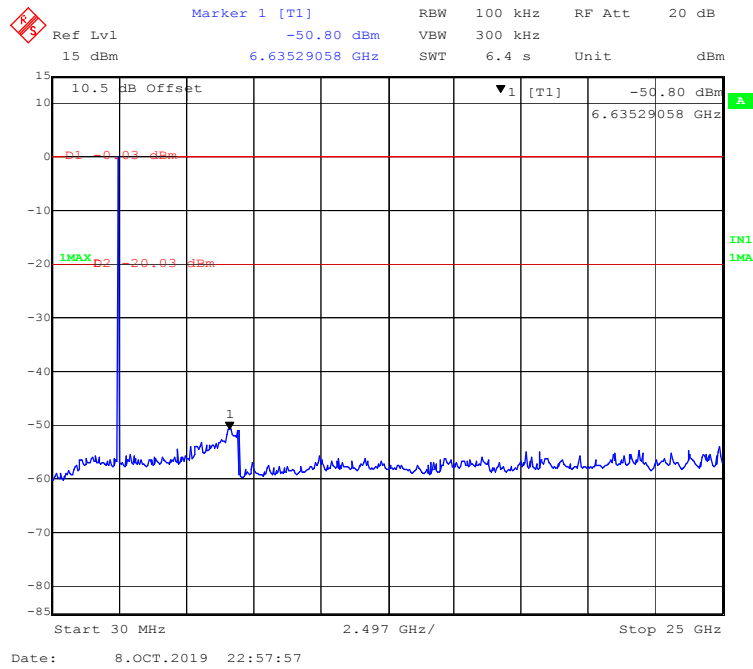

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Test Data

Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2019-10-08.


EUT operation mode: Transmitting

Test Result: Compliant.


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.681	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.680	Pass
	Adjacent	2442			
	High	2480	1.004	0.681	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.004	0.922	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.918	Pass
	Adjacent	2442			
	High	2480	1.004	0.918	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.010	0.910	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.906	Pass
	Adjacent	2442			
	High	2480	1.004	0.906	Pass
	Adjacent	2479			

Note: For BDR mode and EDR mode, Limit = 20 dB bandwidth*2/3


BDR (GFSK): Low Channel


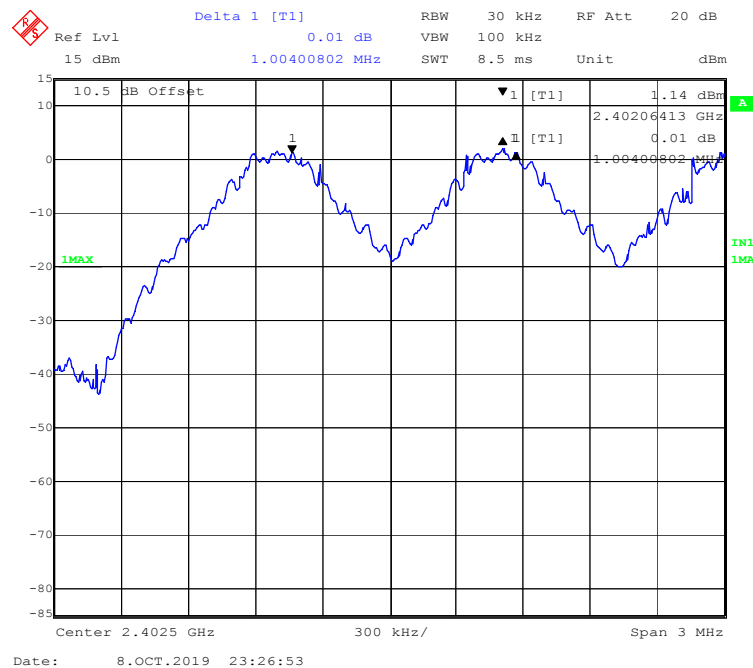




BDR (GFSK): Middle Channel

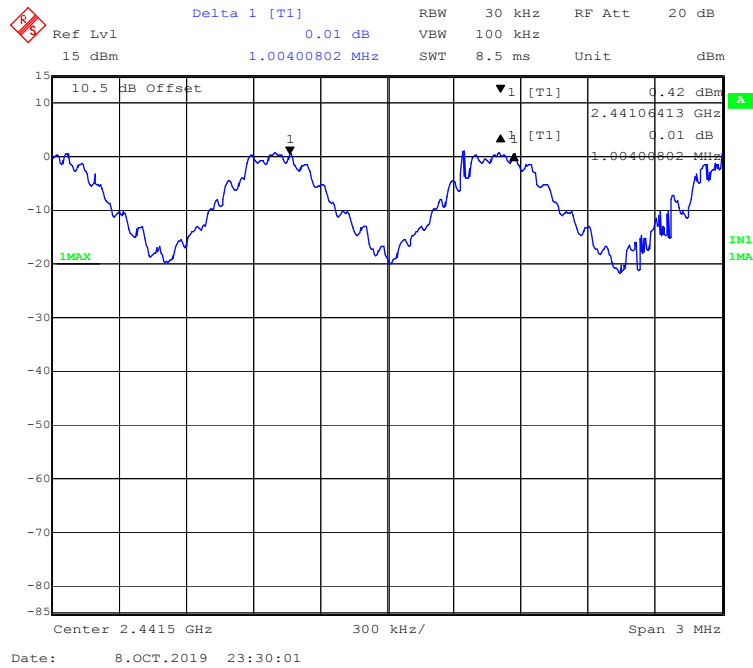


BDR (GFSK): High Channel

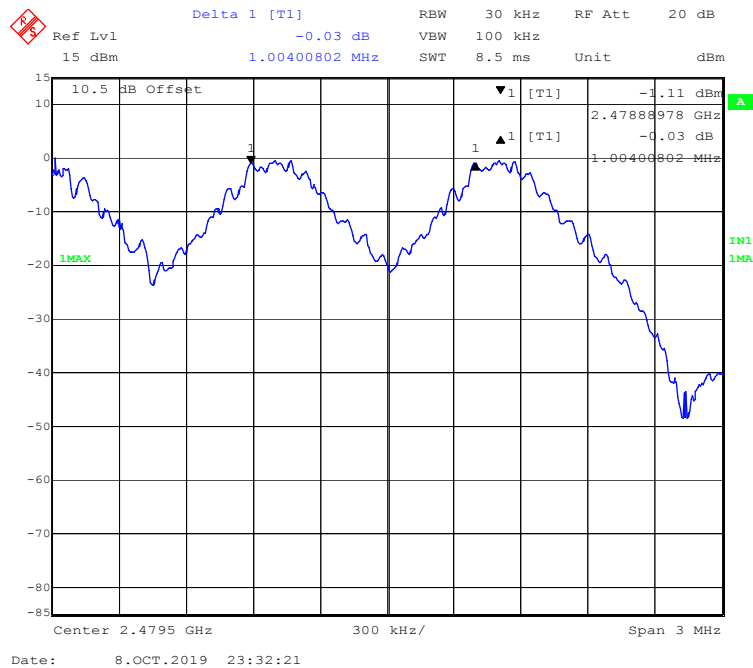

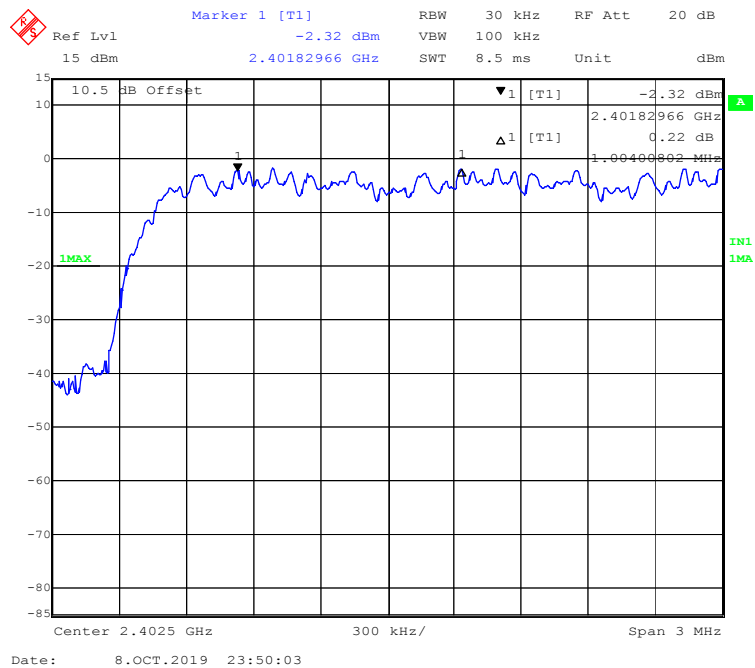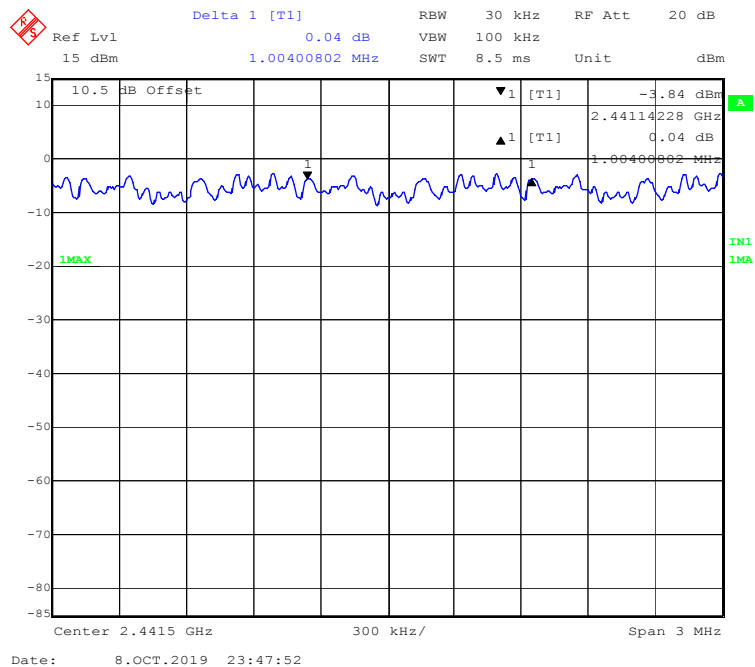
EDR ($\pi/4$ -DQPSK): Low Channel**EDR ($\pi/4$ -DQPSK): Middle Channel**

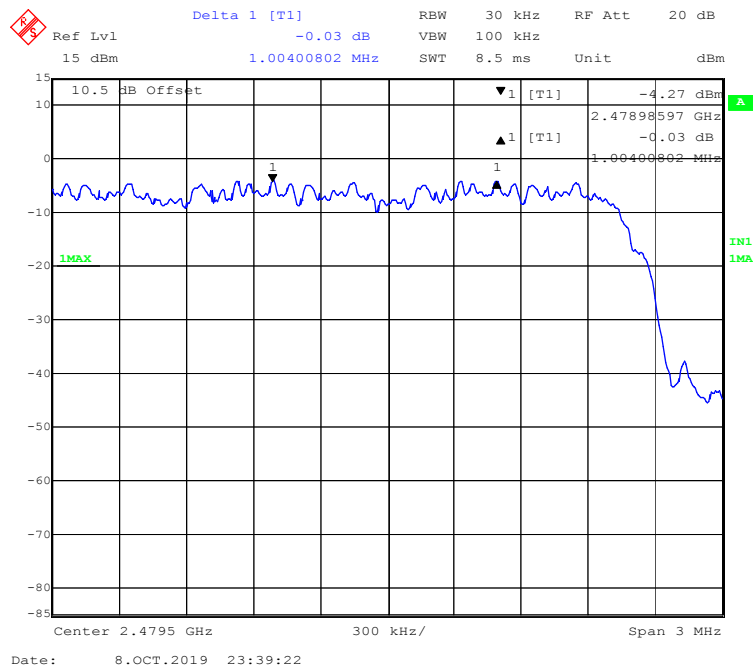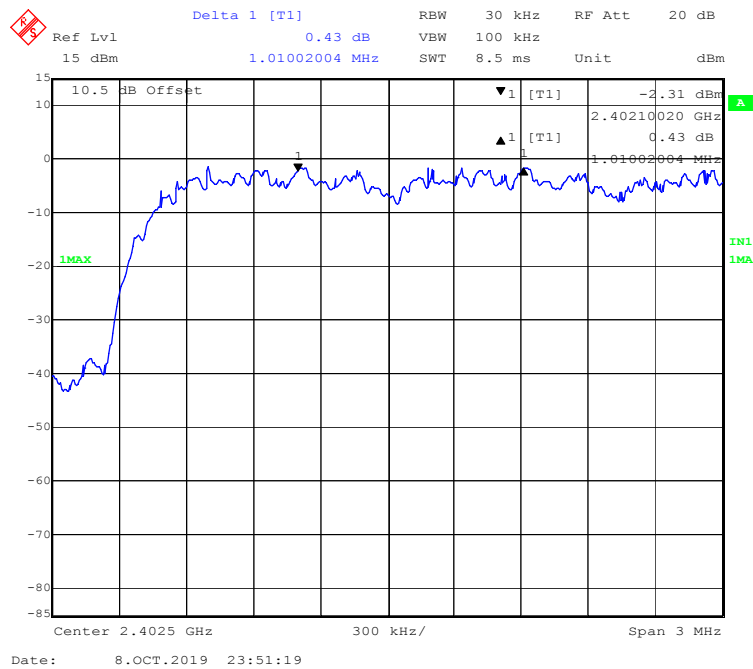EDR ($\pi/4$ -DQPSK): High Channel**EDR (8DPSK): Low Channel**

EDR (8DPSK): Middle Channel

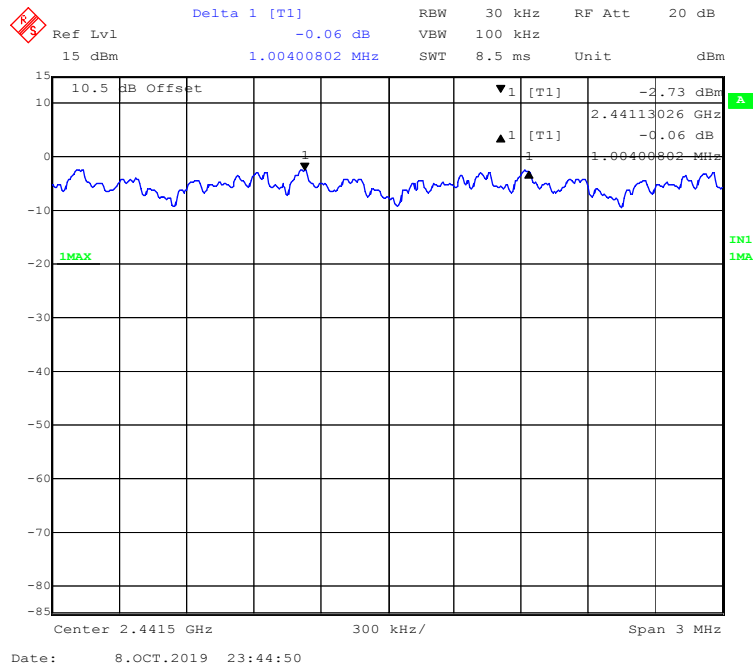

EDR (8DPSK): High Channel

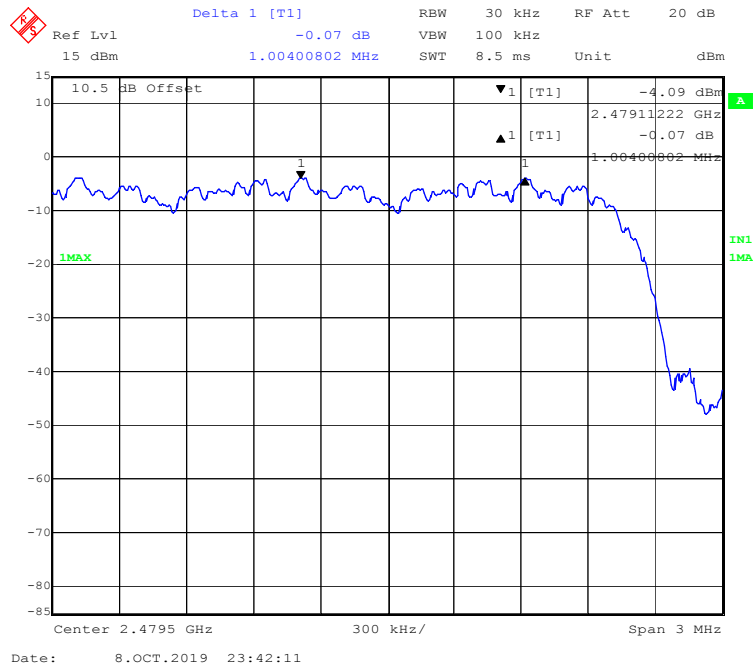

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	25.2 °C~25.9 °C
Relative Humidity:	50 %~52 %
ATM Pressure:	101.3 kPa~102.3 kPa

The testing was performed by Jack Jiao from 2019-10-08 to 2019-10-10.

EUT operation mode: Transmitting

Test Result: Compliant.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.022
	Middle	2441	1.020
	High	2480	1.022
EDR ($\pi/4$-DQPSK)	Low	2402	1.383
	Middle	2441	1.377
	High	2480	1.377
EDR (8DPSK)	Low	2402	1.365
	Middle	2441	1.359
	High	2480	1.359

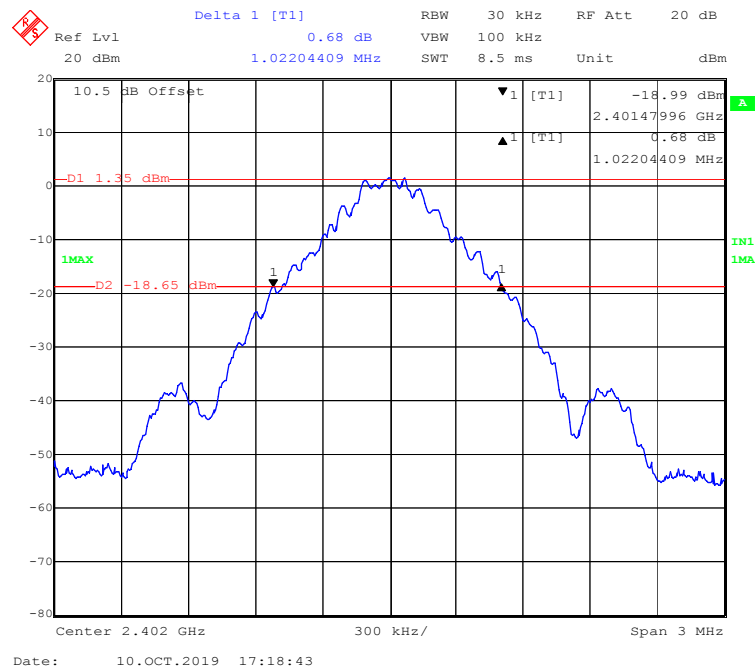BDR (GFSK): Low Channel

Delta 1 [T1] 0.48 dB
 RBW 30 kHz RF Att 20 dB
 Ref Lvl 15 dBm
 1.02805611 MHz
 VBW 100 kHz
 SWT 8.5 ms Unit dBm

10.5 dB Offset
 ▼ 1 [T1] -19.86 dBm
 ▲ 1 [T1] 0.48 dB
 1.02805611 MHz

1MAX D2 -19.48 dBm

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 8.OCT.2019 22:47:01

Marker 1 [T1]

Ref Lvl -21.03 dBm RBW 30 kHz RF Att 20 dB

15 dBm VBW 100 kHz

2.47947996 GHz SWT 8.5 ms Unit dBm

10.5 dB Offset

▼ 1 [T1] -21.03 dBm

Δ 1 [T1] 2.47947996 GHz

0.43 dB

D1 -20.63 dBm 1.02204489 MHz

1MAX -20.63 dBm


1

1


Center 2.48 GHz 300 kHz/ Span 3 MHz

Date: 8.OCT.2019 22:46:13

EDR ($\pi/4$ -DQPSK): Low Channel

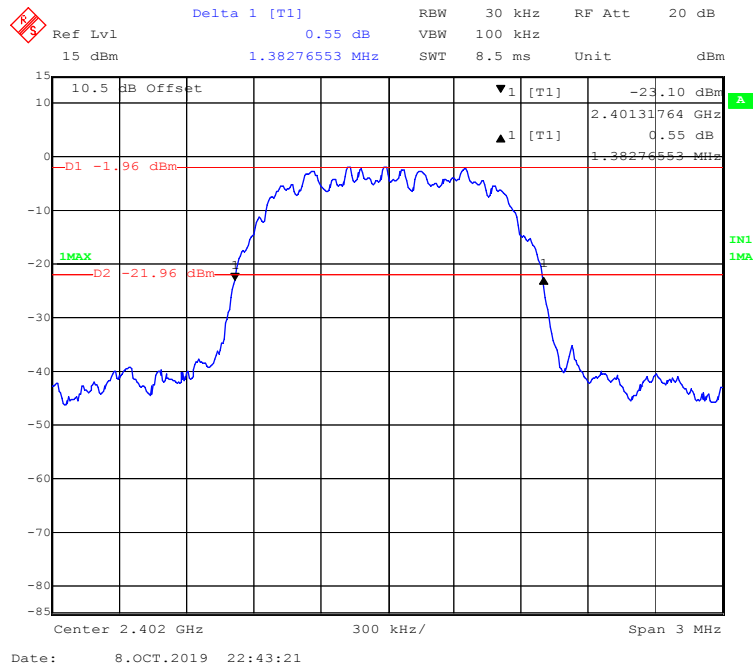

EDR($\pi/4$ -DQPSK): Middle Channel

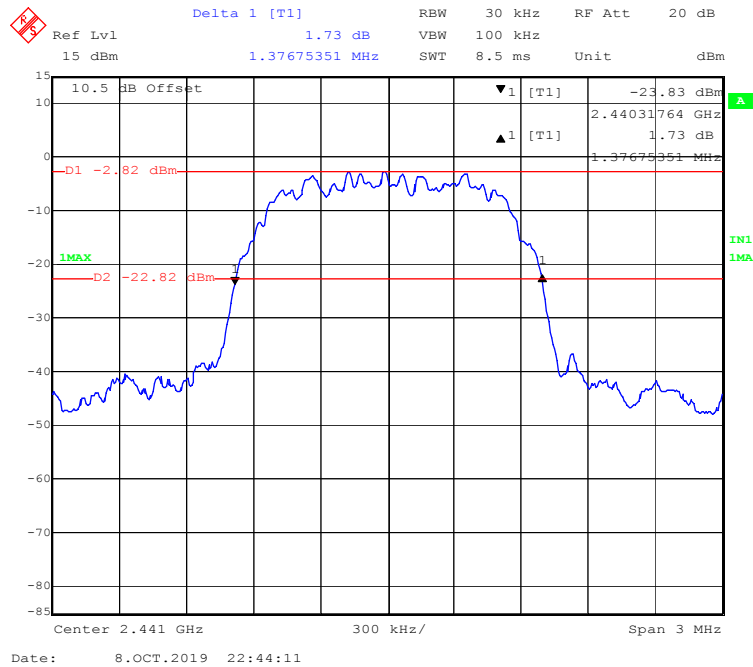

Delta 1 [T1] 1.60 dB
 Ref Lvl 15 dBm
 1.37675351 MHz
 RBW 30 kHz
 VBW 100 kHz
 SWT 8.5 ms
 RF Att 20 dB
 Unit dBm

10.5 dB Offset
 -25.11 dBm
 2.47931764 GHz
 1.60 dB
 1.37675351 MHz

D1 -4.26 dBm
 1MAX
 D2 -24.26 dBm
 IN1 1MAX

Center 2.48 GHz
 300 kHz/
 Span 3 MHz

Date: 8.OCT.2019 22:45:00

Delta 1 [T1] 1.36 dB
 Ref Lvl 15 dBm
 1.36472946 MHz
 RBW 30 kHz
 VBW 100 kHz
 SWT 8.5 ms
 RF Att 20 dB
 Unit dBm


10.5 dB Offset

▼ 1 [T1] -22.80 dBm
 ▲ 1 [T1] 1.36 dB
 -D1 -1.79 dBm
 1.36472946 MHz
 1MAX
 -D2 -21.79 dBm
 1
 IN1
 1MAX


Center 2.402 GHz 300 kHz/ Span 3 MHz

Date: 8.OCT.2019 22:42:35

EDR (8DPSK): Middle Channel

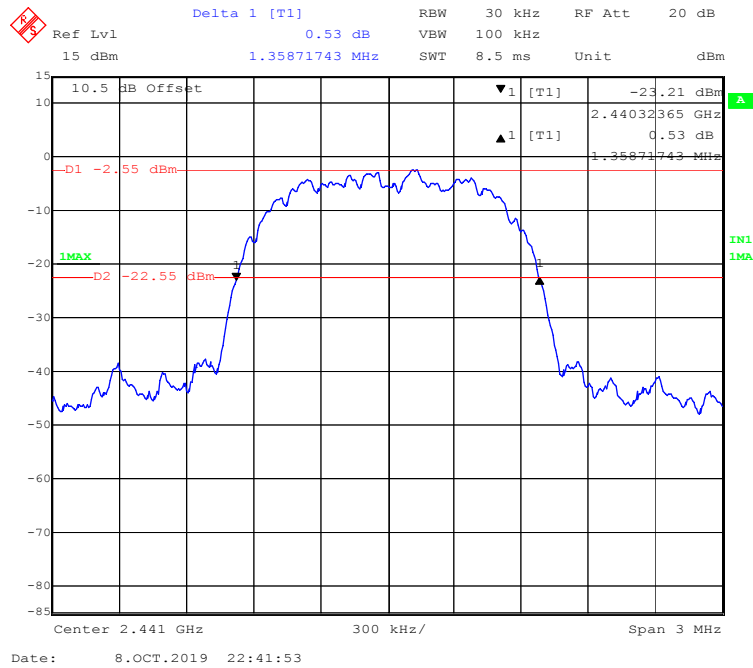

EDR (8DPSK): High Channel

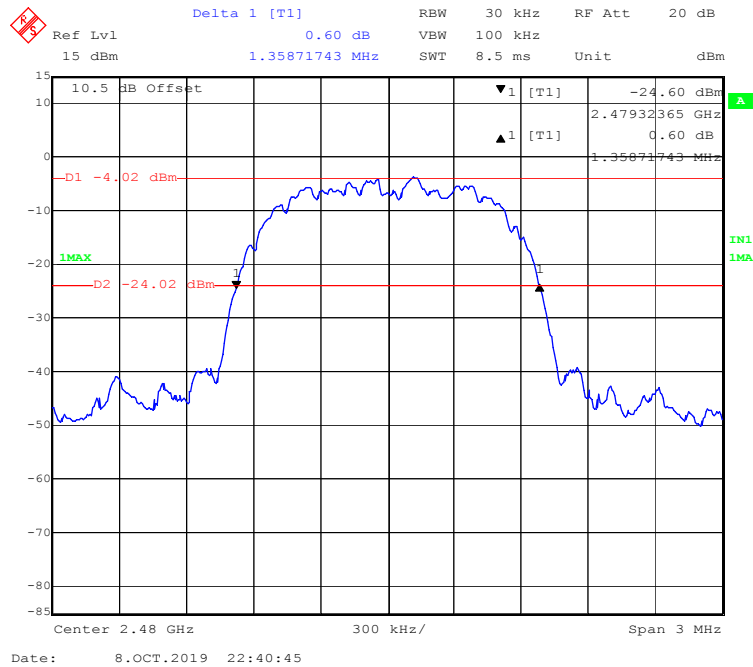

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Test Data**Environmental Conditions**

Temperature:	25 °C~26.1 °C
Relative Humidity:	50 %~52 %
ATM Pressure:	101.3 kPa~103.3 kPa


The testing was performed by Jack Jiao from 2019-10-08 to 2019-10-09.

EUT operation mode: Hopping


Test Result: Compliant.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


BDR (GFSK): Number of Hopping Channels

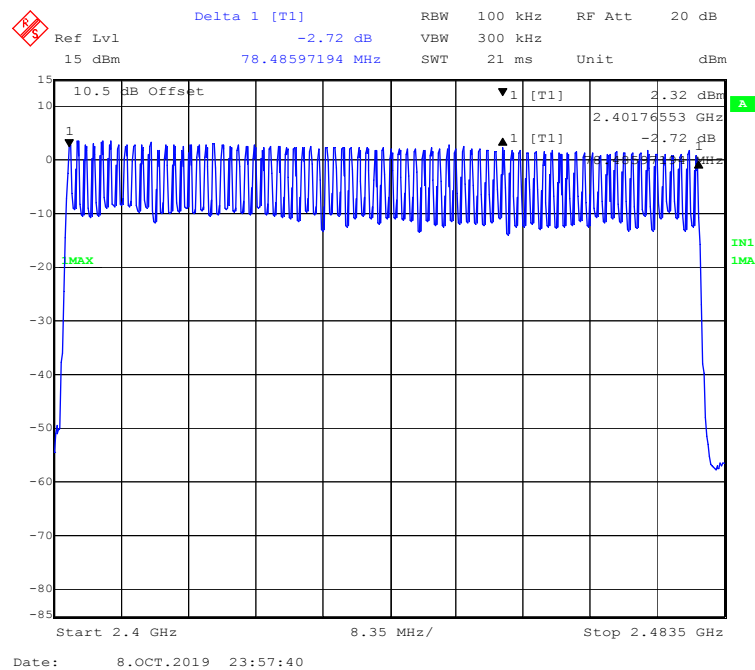

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

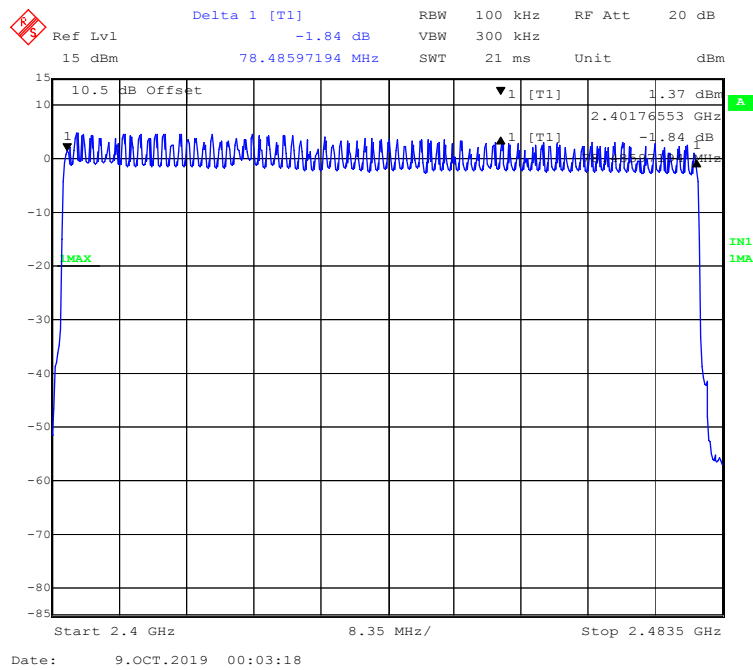

EDR (8DPSK): Number of Hopping Channels

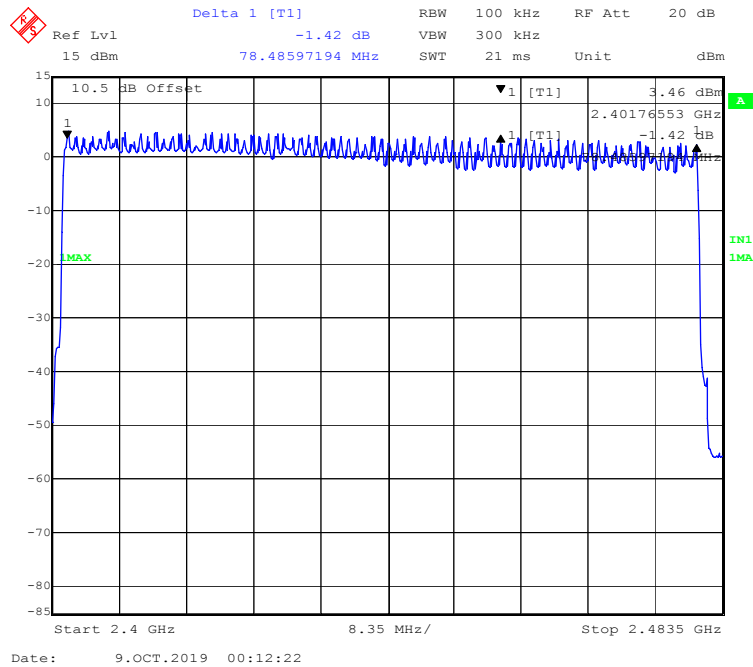

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

Test Data**Environmental Conditions**


Temperature:	25.3°C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2019-10-09.


EUT operation mode: Hopping



Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.406	0.130	0.4	Pass
		Middle	0.398	0.127	0.4	Pass
		High	0.404	0.129	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.675	0.268	0.4	Pass
		Middle	1.705	0.273	0.4	Pass
		High	1.687	0.270	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	2.934	0.313	0.4	Pass
		Middle	2.914	0.311	0.4	Pass
		High	2.914	0.311	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.412	0.132	0.4	Pass
		Middle	0.414	0.132	0.4	Pass
		High	0.410	0.131	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.693	0.271	0.4	Pass
		Middle	1.675	0.268	0.4	Pass
		High	1.687	0.270	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	2.924	0.312	0.4	Pass
		Middle	2.944	0.314	0.4	Pass
		High	2.934	0.313	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.410	0.131	0.4	Pass
		Middle	0.414	0.132	0.4	Pass
		High	0.414	0.132	0.4	Pass
		Note:3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.675	0.268	0.4	Pass
		Middle	1.705	0.273	0.4	Pass
		High	1.687	0.270	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	2.944	0.314	0.4	Pass
		Middle	2.934	0.313	0.4	Pass
		High	2.934	0.313	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK): Pulse time, Low Channel, DH1

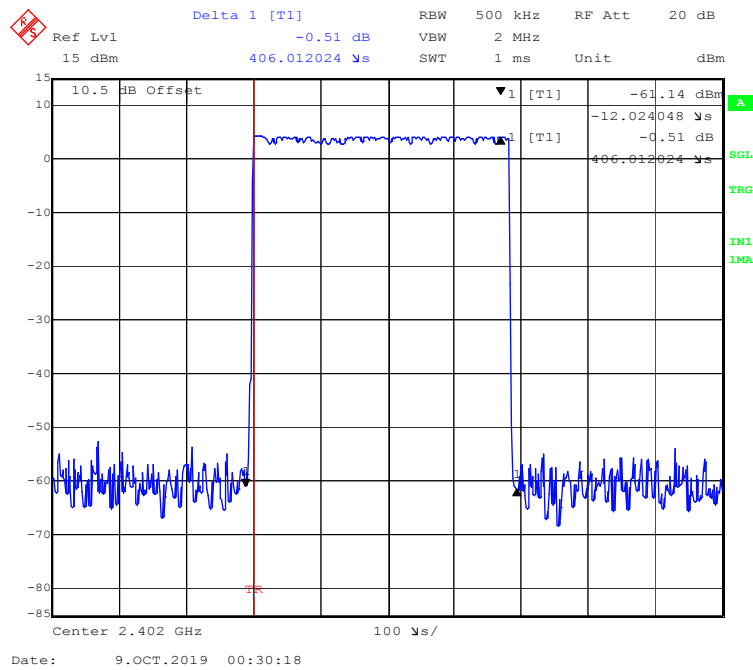


BDR (GFSK): Pulse time, Middle Channel, DH1

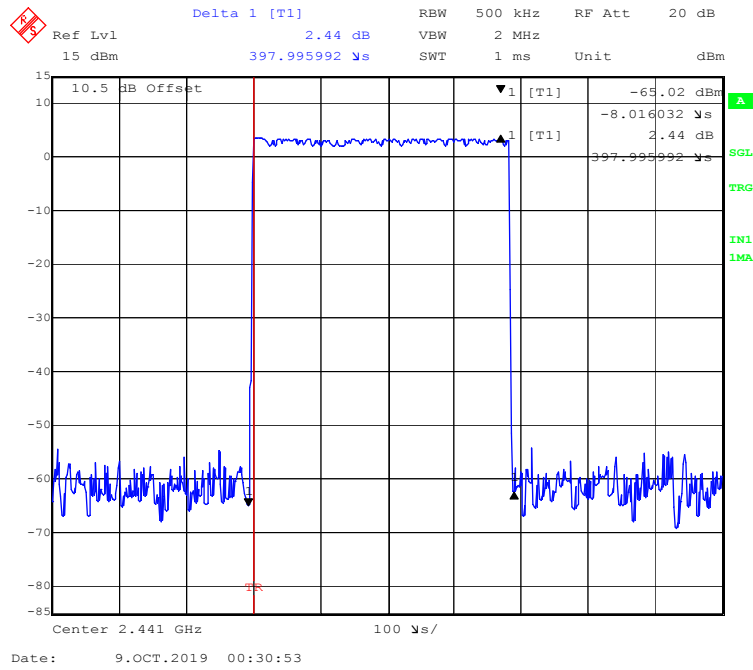


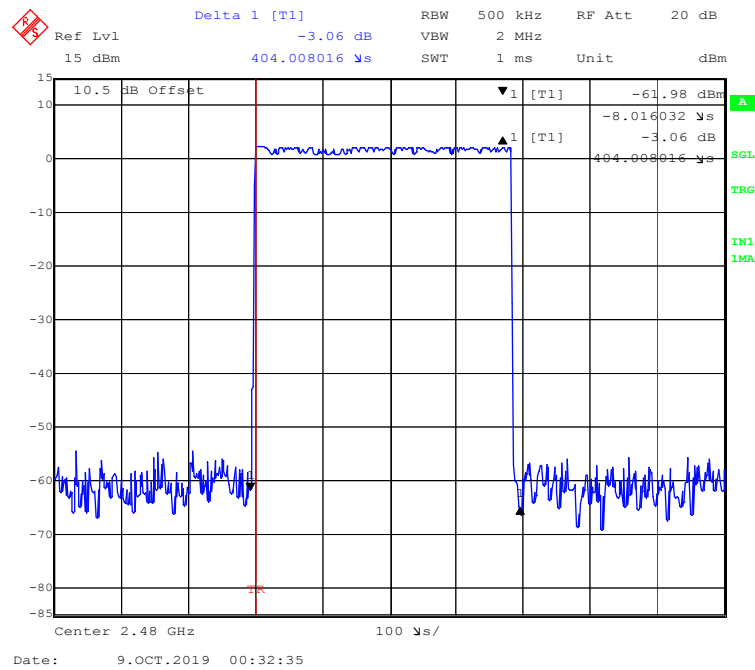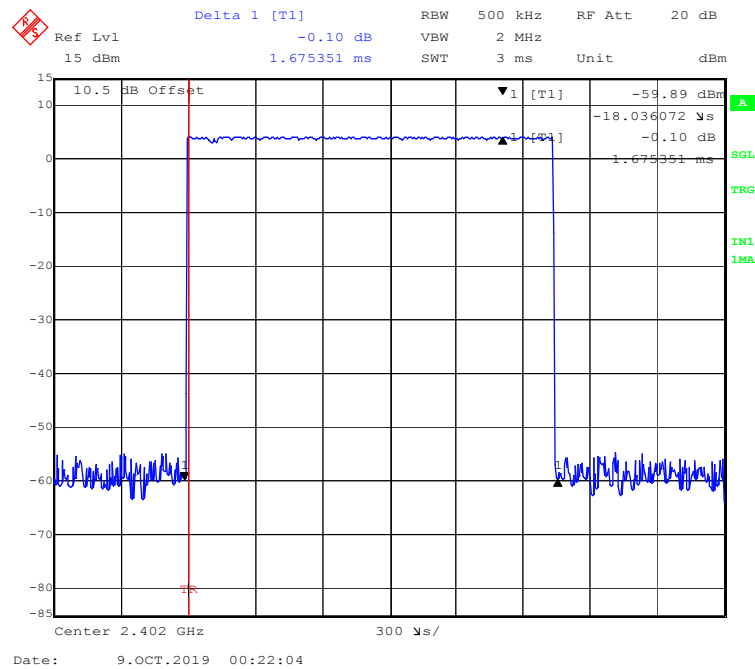BDR (GFSK): Pulse time, High Channel, DH1**BDR (GFSK): Pulse time, Low Channel, DH3**


BDR (GFSK): Pulse time, Middle Channel, DH3

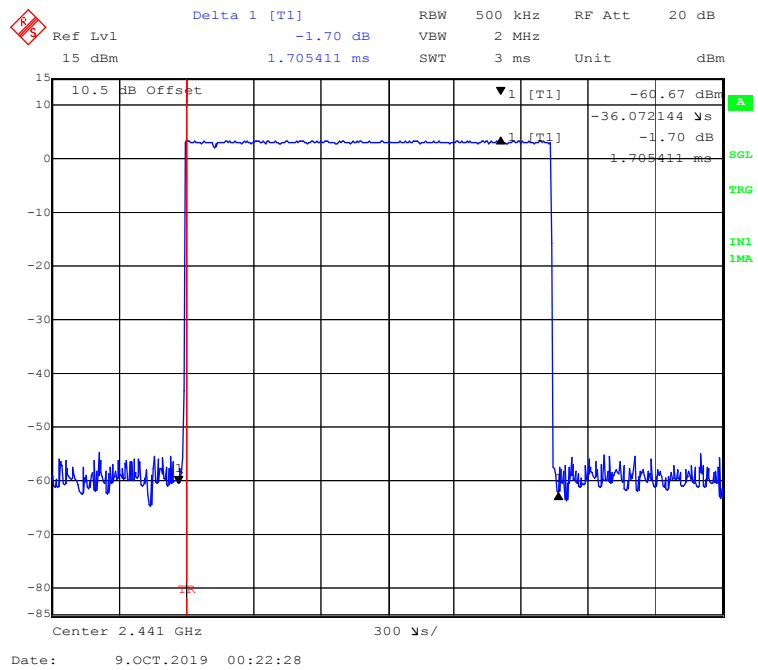


BDR (GFSK): Pulse time, High Channel, DH3

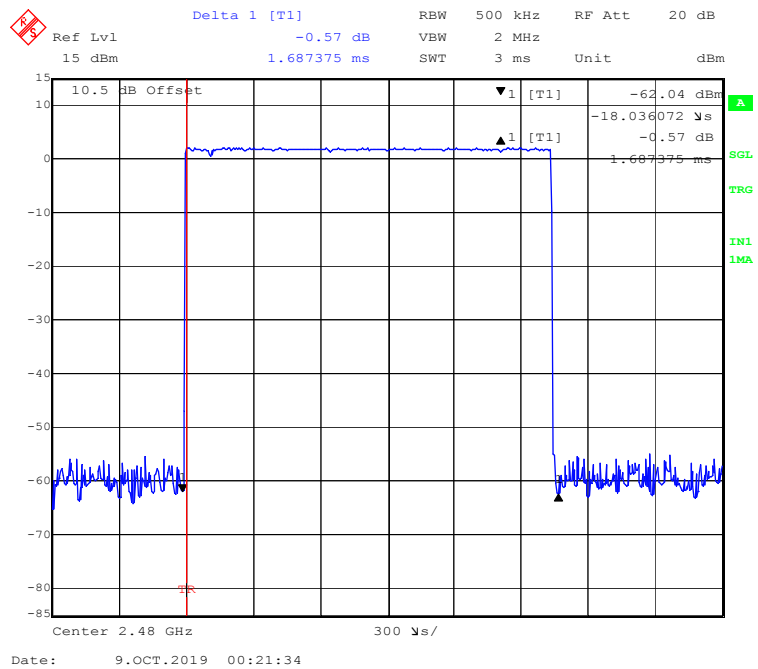

BDR (GFSK): Pulse time, Low Channel, DH5

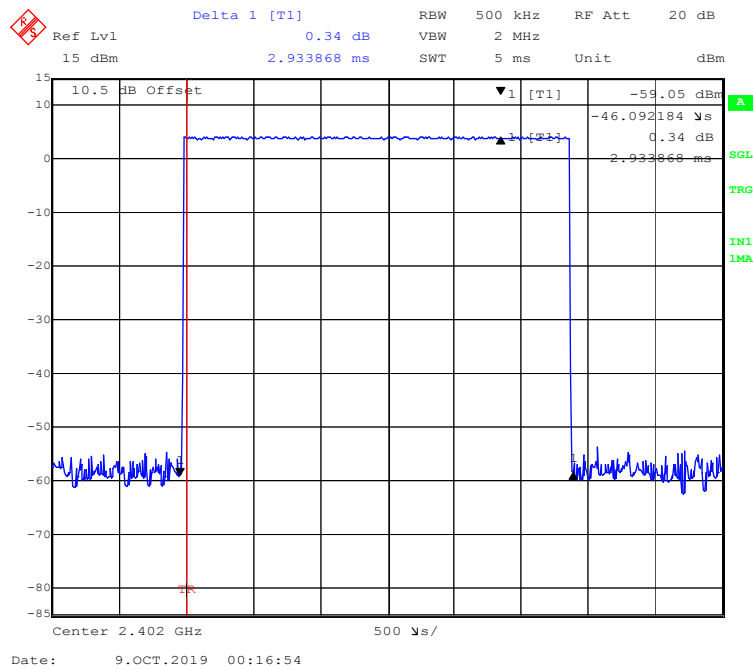

BDR (GFSK): Pulse time, Middle Channel, DH5

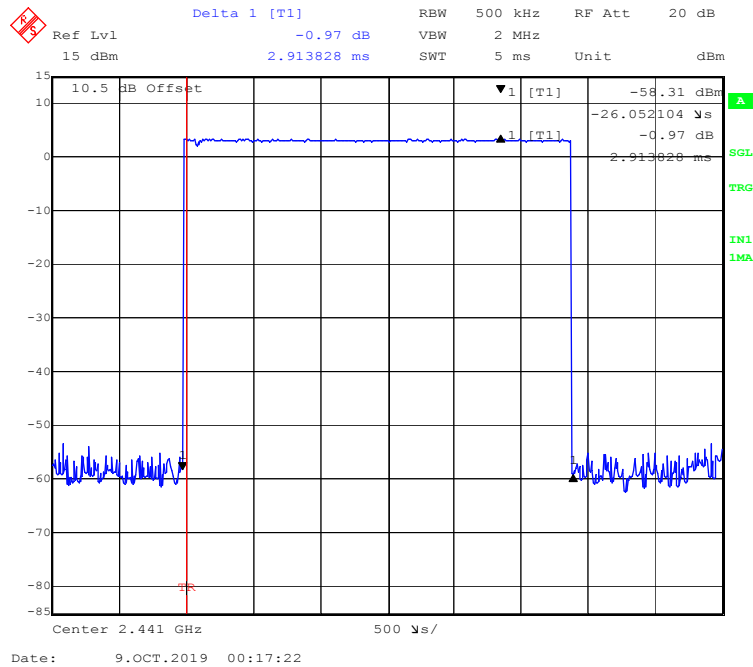

Delta 1 [T1]

Ref Lvl 15 dBm

2.35 dB

RBW 500 kHz

VBW 2 MHz

SWT 5 ms

RF Att 20 dB

Unit dBm

10.5 dB Offset

▼ 1 [T1]

▲ 1 [T1]

-60.24 dBm

-36.072144 μ s

2.35 dB

2.913828 ms

Center 2.48 GHz

500 μ s/

Date: 9.OCT.2019 00:17:49

Delta 1 [T1]

RBW 500 kHz RF Att 20 dB

Ref Lvl -0.12 dB

15 dBm

412.024048 μs

SWT 1 ms Unit dBm

10.5 dB Offset

▼ 1 [T1] -62.82 dBm

-10.020040 μs

-0.12 dB

412.024048 μs

Center 2.402 GHz 100 μs/

Date: 9.OCT.2019 00:29:43

Delta 1 [T1] 1.23 dB

RBW 500 kHz RF Att 20 dB

Ref Lvl 15 dBm VBW 2 MHz

SWT 1 ms Unit dBm

10.5 dB Offset

Center 2.441 GHz 100 μ s/

Date: 9.OCT.2019 00:29:01

Delta 1 [T1] RBW 500 kHz RF Att 20 dB
 Ref Lvl -2.00 dB VBW 2 MHz
 15 dBm 410.020040 μ s SWT 1 ms Unit dBm


10.5 dB Offset

▼ 1 [T1] -63.45 dBm
 ▲ 1 [T1] -10.020040 μ s
 -2.00 dB
 410.020040 μ s


Center 2.48 GHz 100 μ s/

Date: 9.OCT.2019 00:28:35


EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3

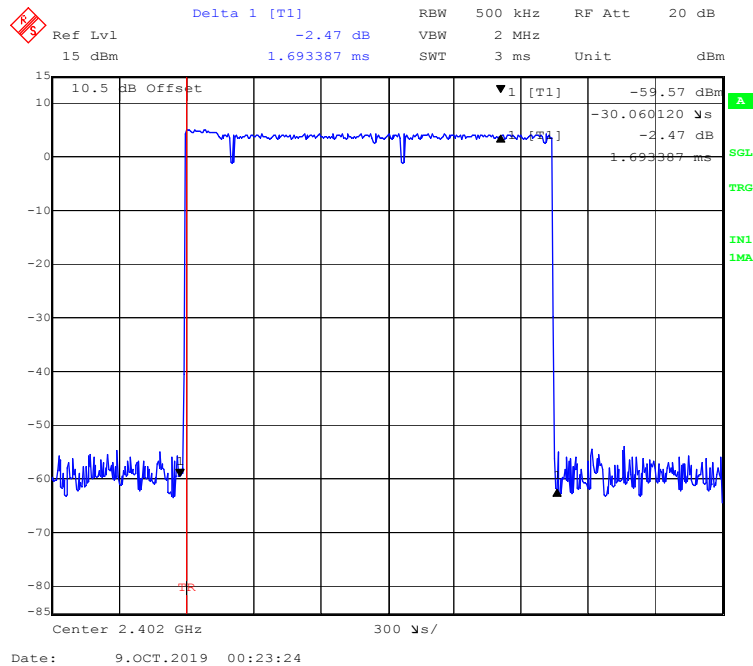


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3

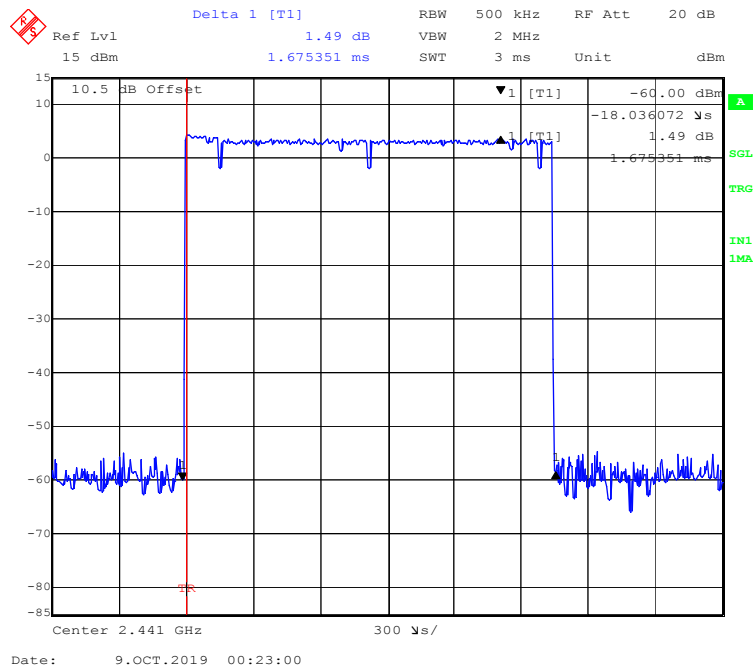


EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3

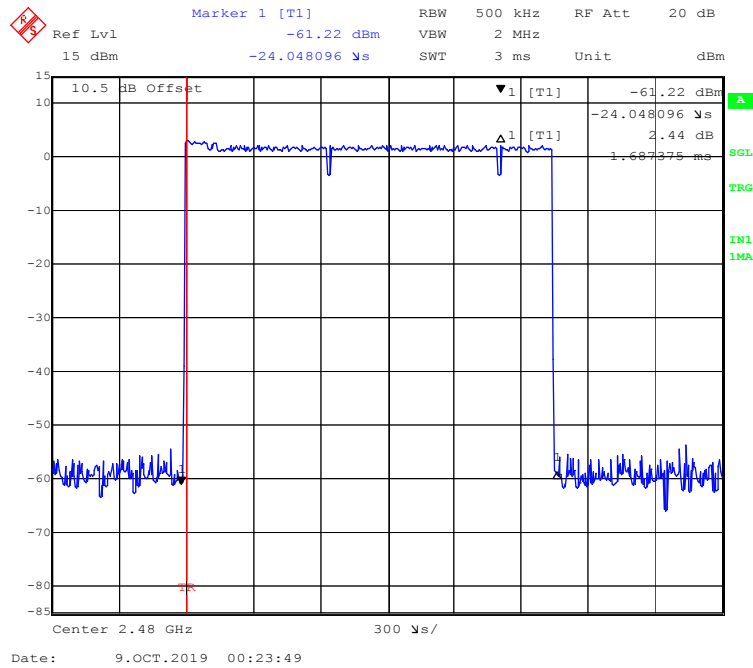


EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5

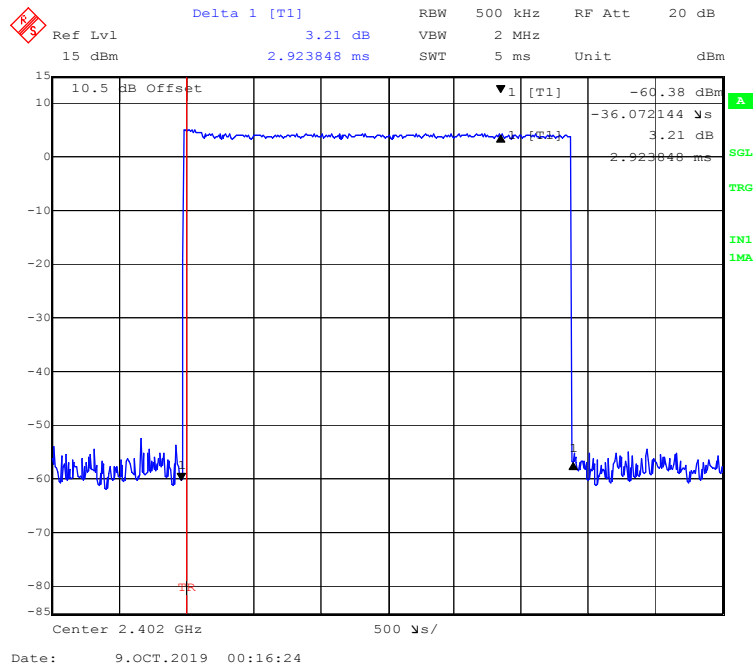


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5

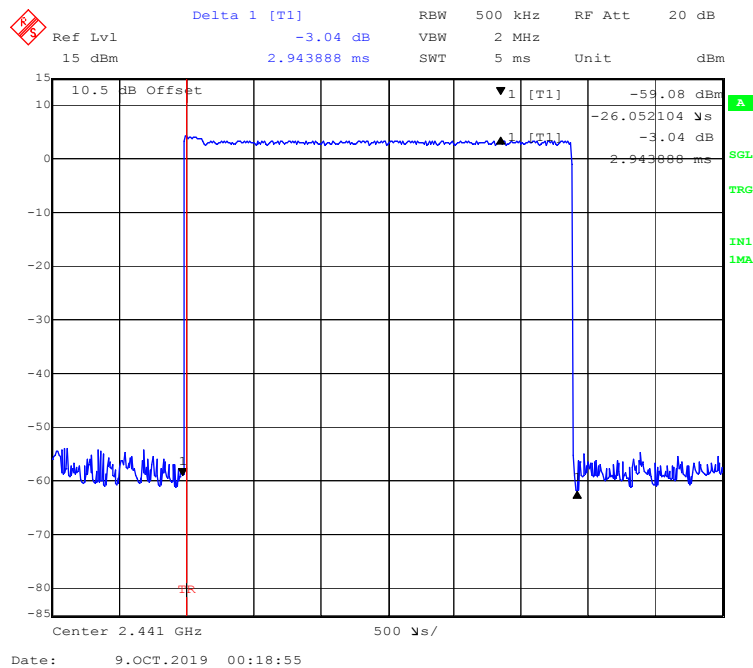


EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5

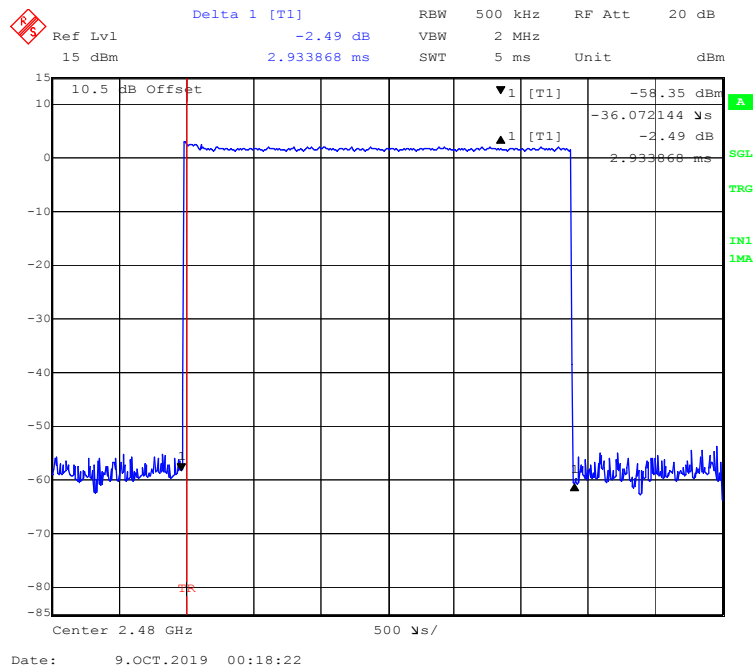


EDR (8DPSK): Pulse time, Low Channel, 3DH1

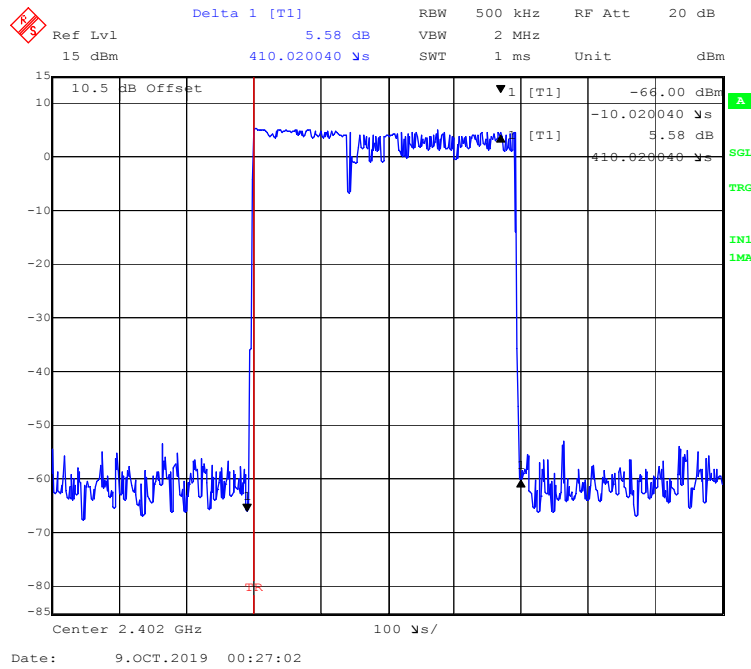


EDR (8DPSK): Pulse time, Middle Channel, 3DH1

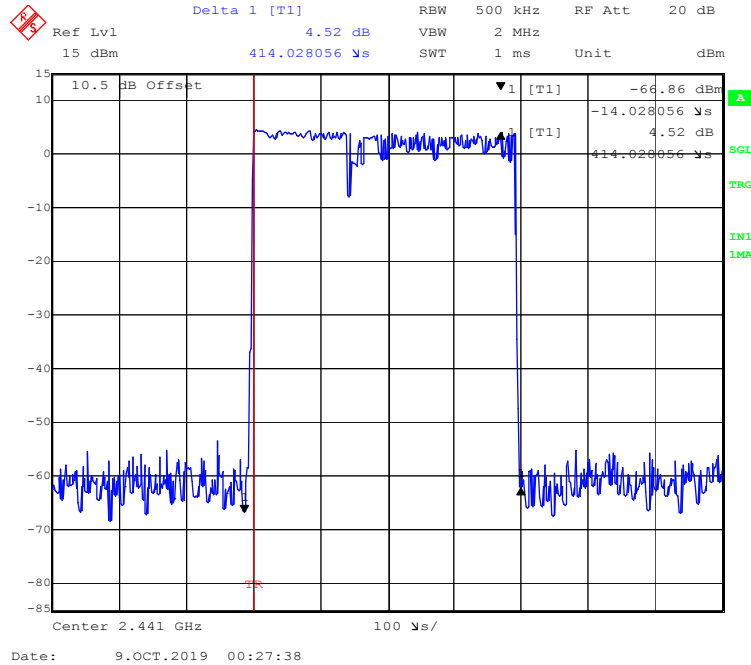


EDR (8DPSK): Pulse time, High Channel, 3DH1

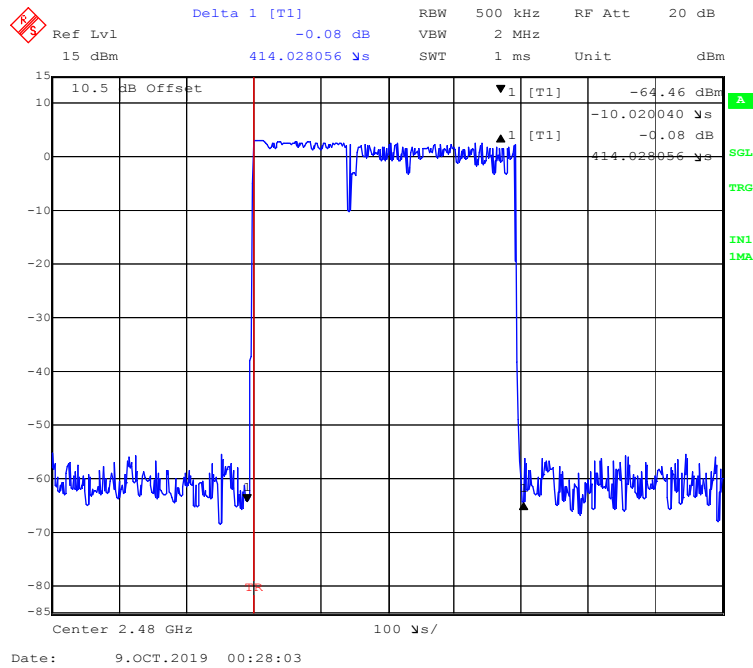


EDR (8DPSK): Pulse time, Low Channel, 3DH3

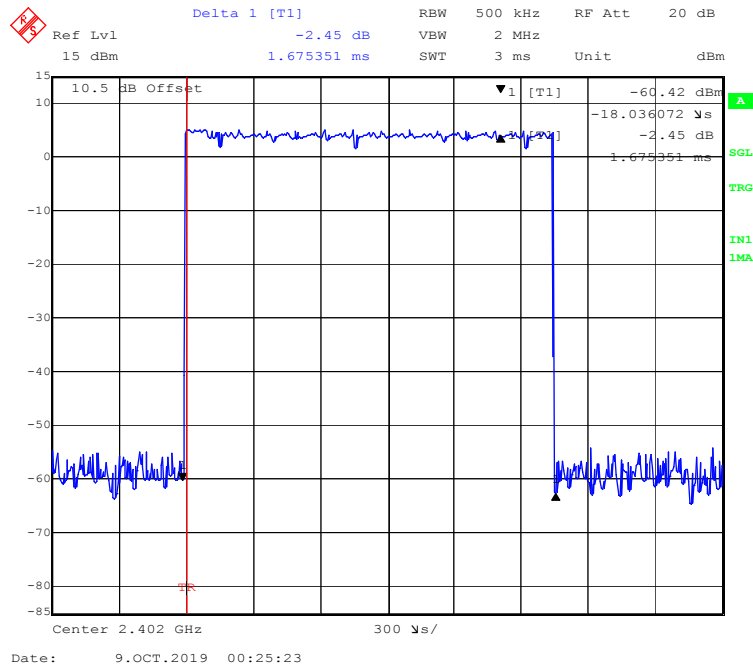


EDR (8DPSK): Pulse time, Middle Channel, 3DH3

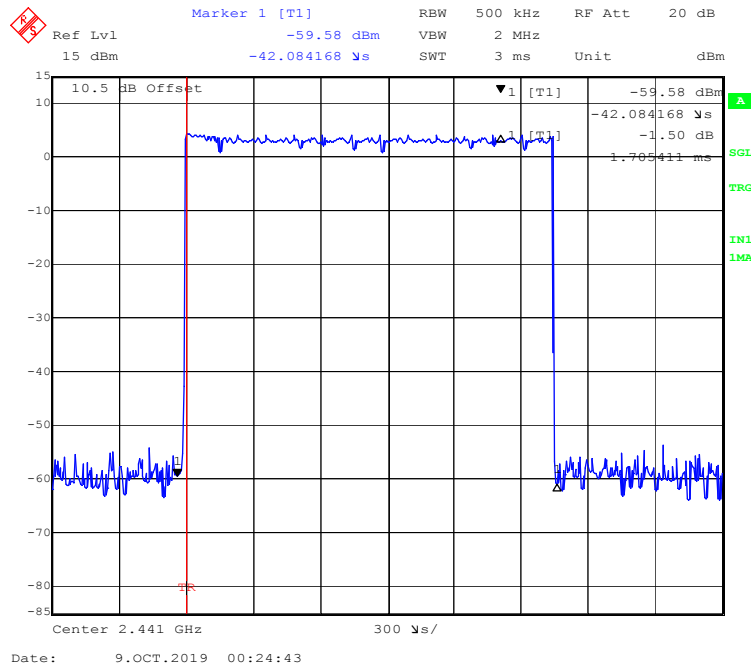


EDR (8DPSK): Pulse time, High Channel, 3DH3

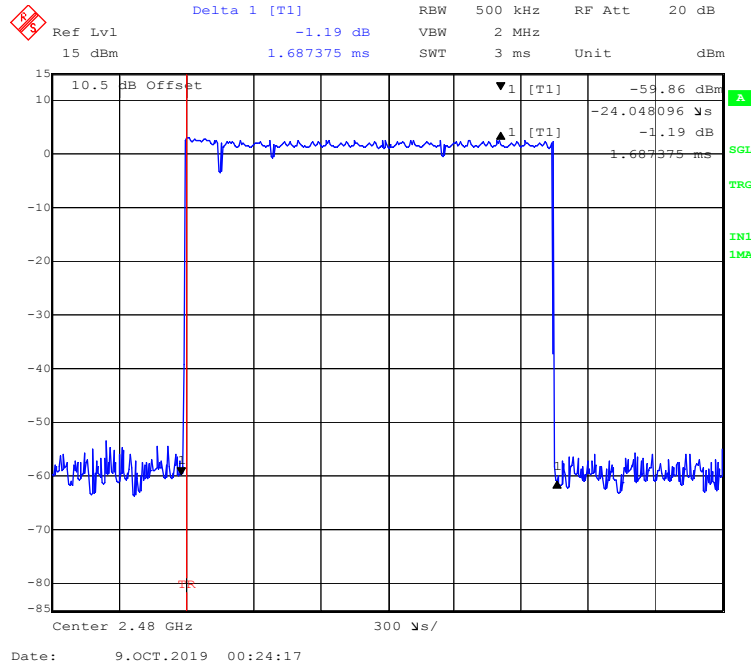


EDR (8DPSK): Pulse time, Low Channel, 3DH5

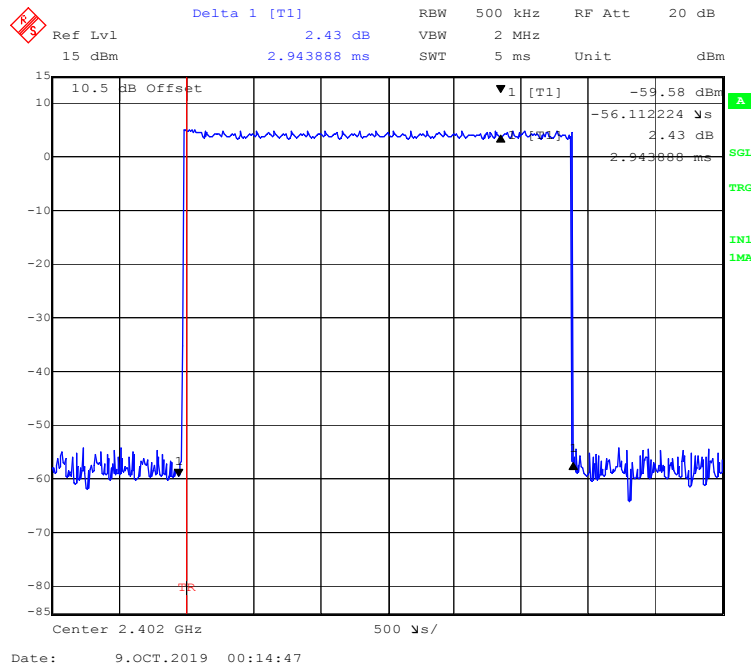

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

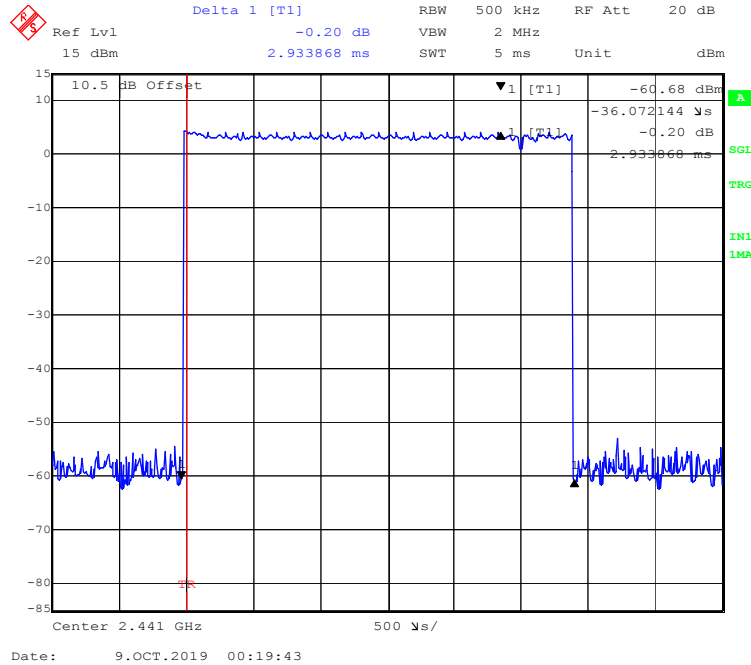

EDR (8DPSK): Pulse time, High Channel, 3DH5

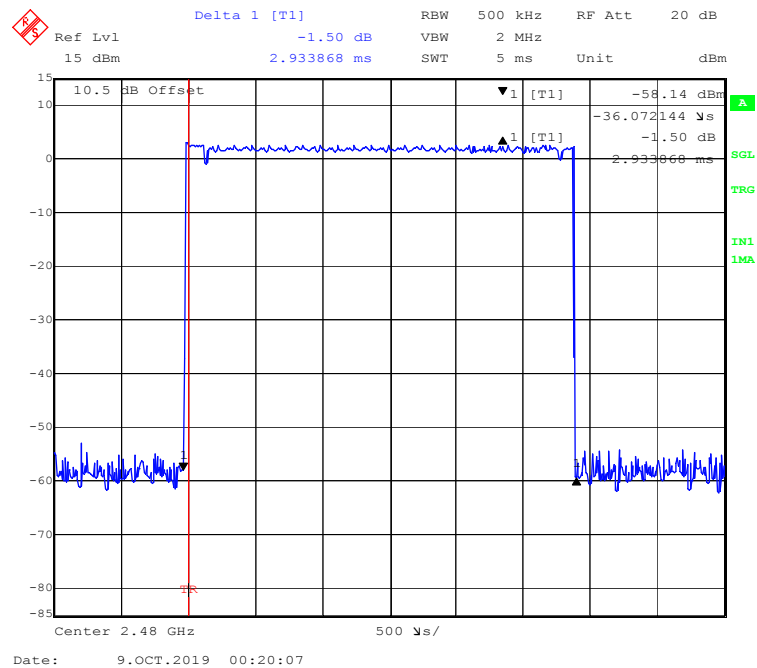

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.6 kPa


The testing was performed by Jack Jiao on 2019-10-08.

EUT operation mode: Transmitting


Test Result: Compliant.

Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	3.86	2.43	125
	2441	3.08	2.03	125
	2480	1.86	1.53	125
EDR ($\pi/4$-DQPSK)	2402	5.74	3.75	125
	2441	5.25	3.35	125
	2480	3.99	2.51	125
EDR (8DPSK)	2402	5.59	3.62	125
	2441	5.11	3.24	125
	2480	4.48	2.81	125


BDR (GFSK): 2402MHz

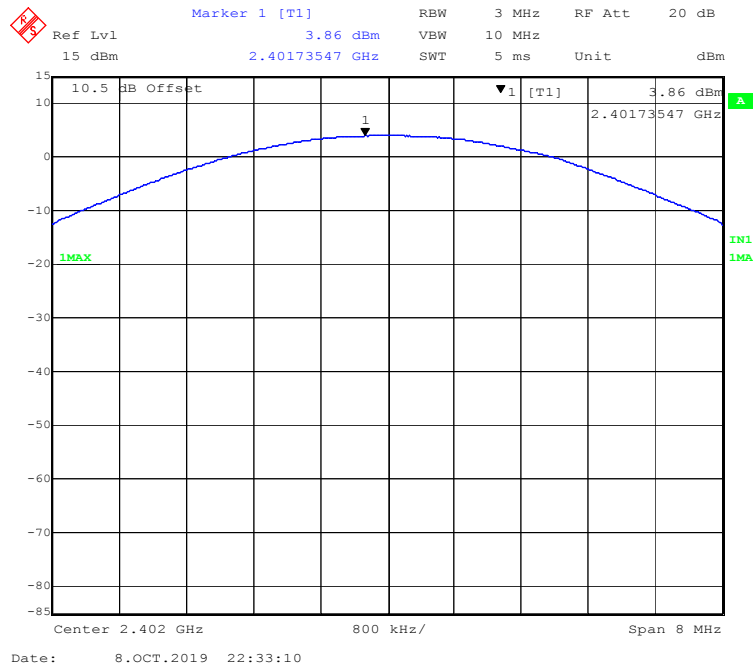


BDR (GFSK): 2441MHz

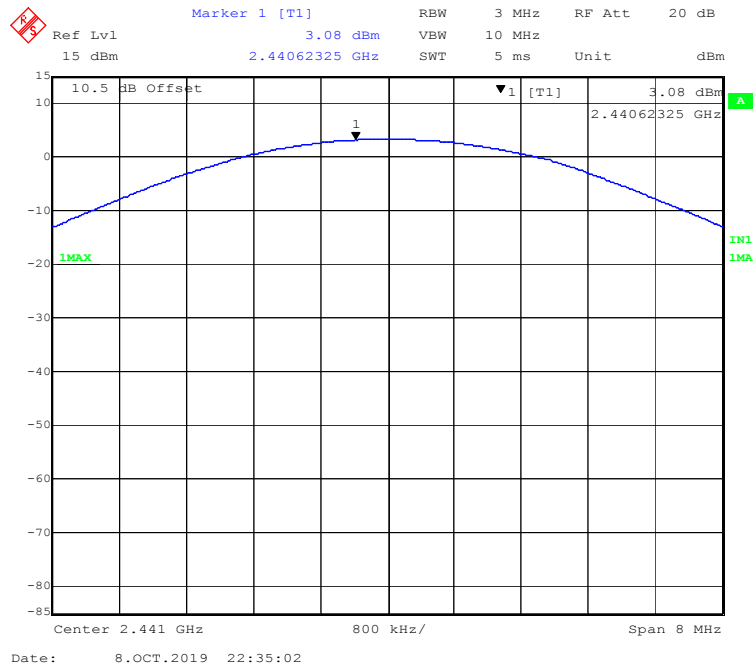


BDR (GFSK): 2480MHz

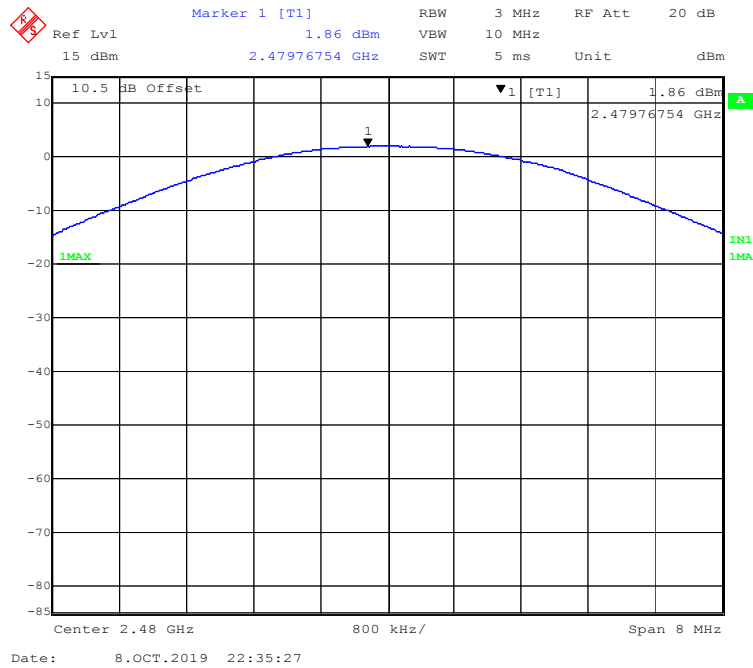


EDR($\pi/4$ -DQPSK): 2402MHz

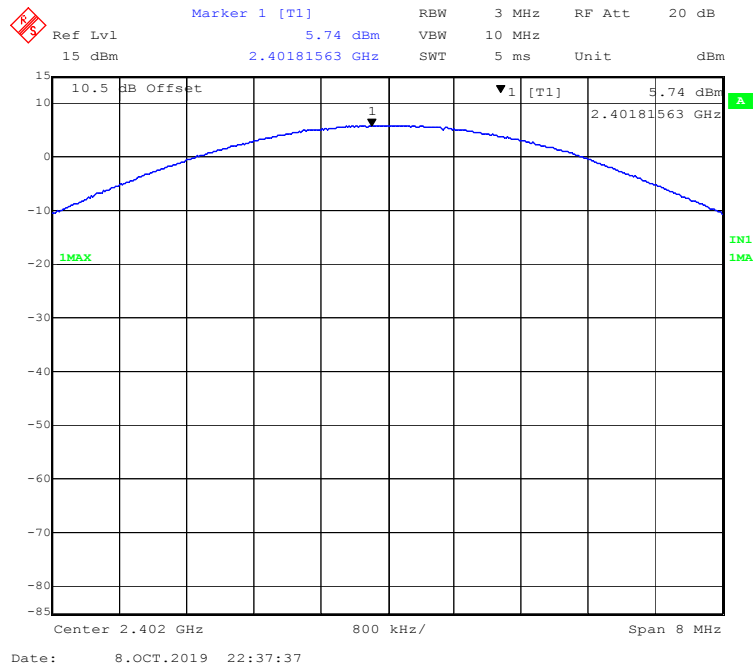


EDR($\pi/4$ -DQPSK): 2441MHz

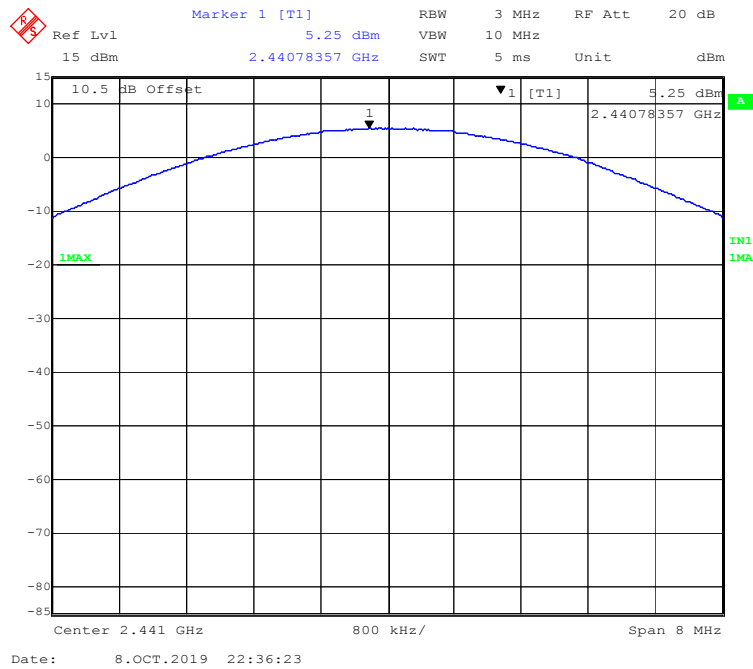


EDR($\pi/4$ -DQPSK): 2480MHz

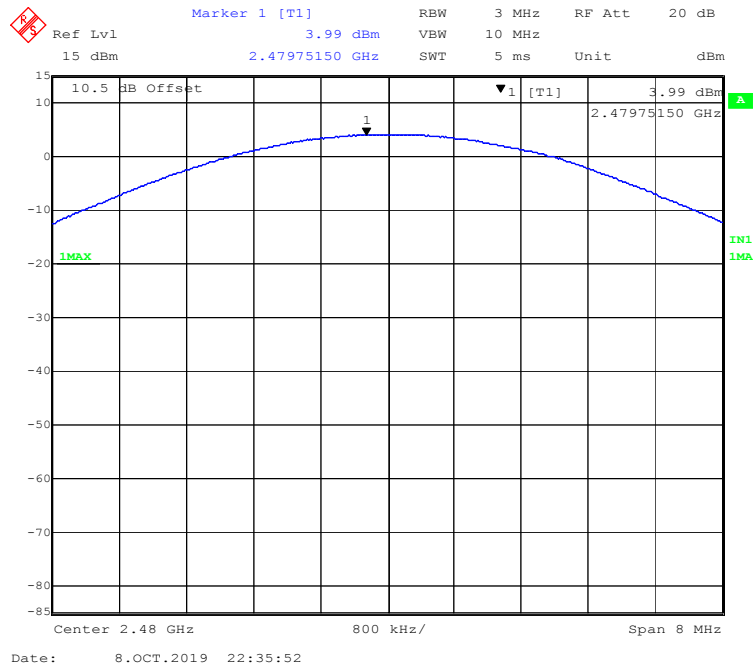


EDR(8DPSK): 2402MHz

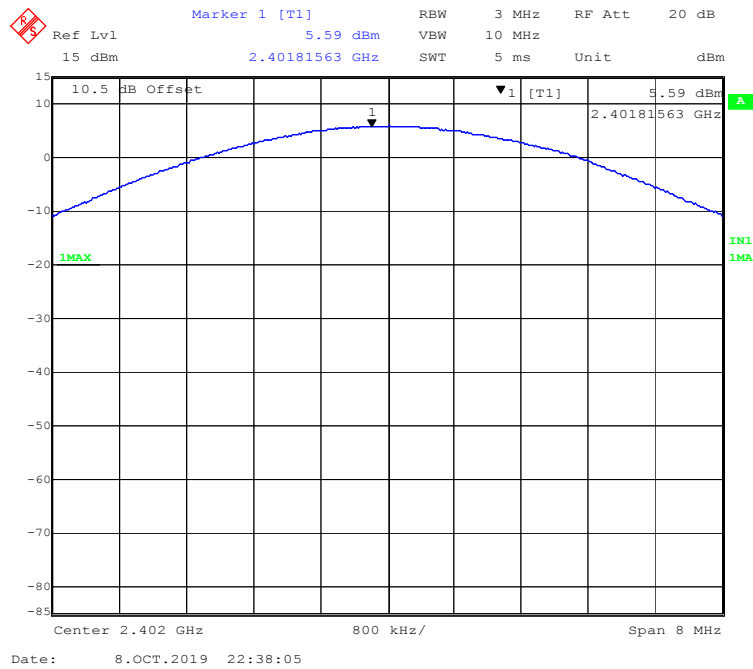

EDR(8DPSK): 2441MHz

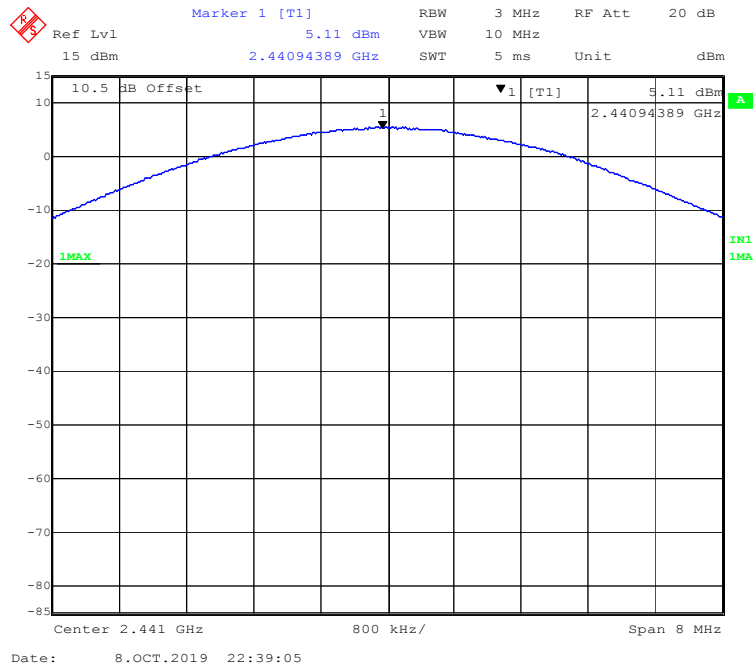

EDR(8DPSK): 2480MHz

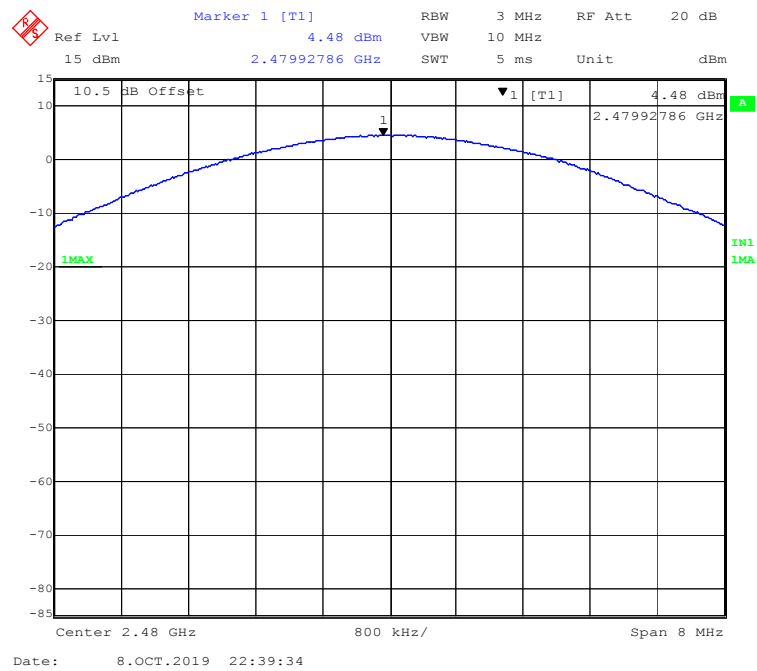

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	23.2℃
Relative Humidity:	50 %
ATM Pressure:	102.3 kPa


The testing was performed by Jack Jiao on 2019-10-08.

EUT operation mode: Transmitting & Hopping


Test Result: Compliant.

Band Edge


BDR (GFSK): Left Side - Transmitting

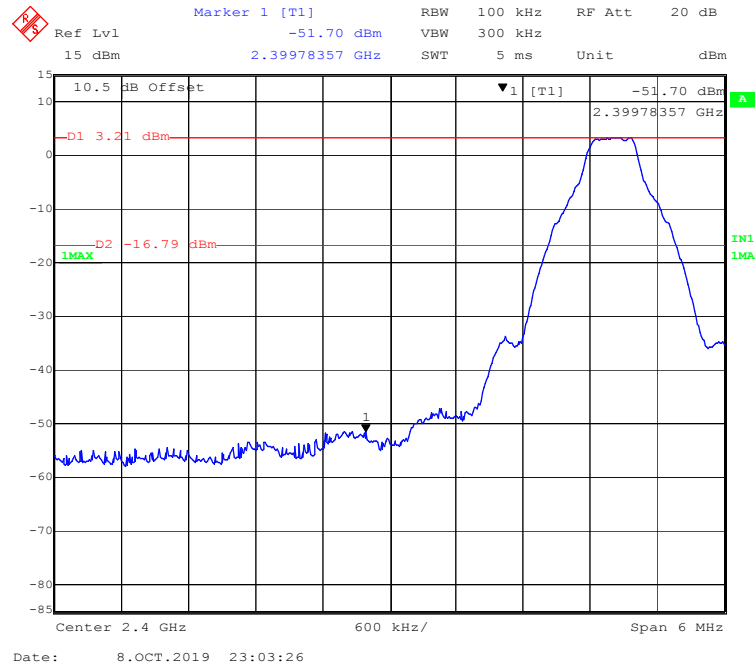


BDR (GFSK): Right Side - Transmitting

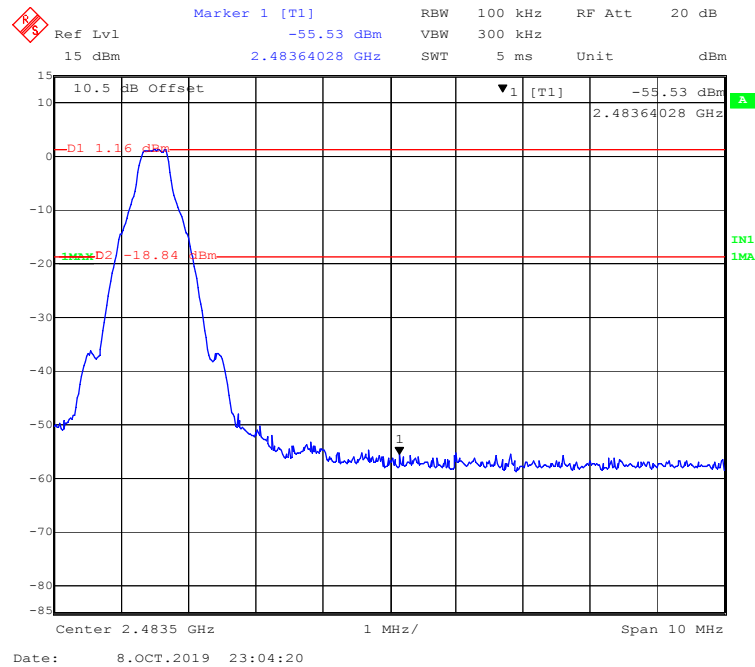


EDR ($\pi/4$ -DQPSK): Left Side - Transmitting

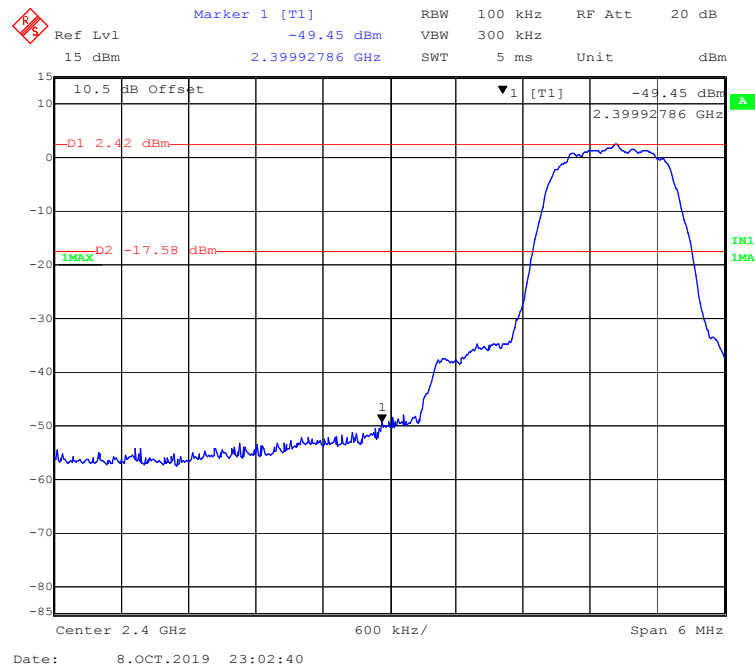


EDR ($\pi/4$ -DQPSK): Right Side - Transmitting

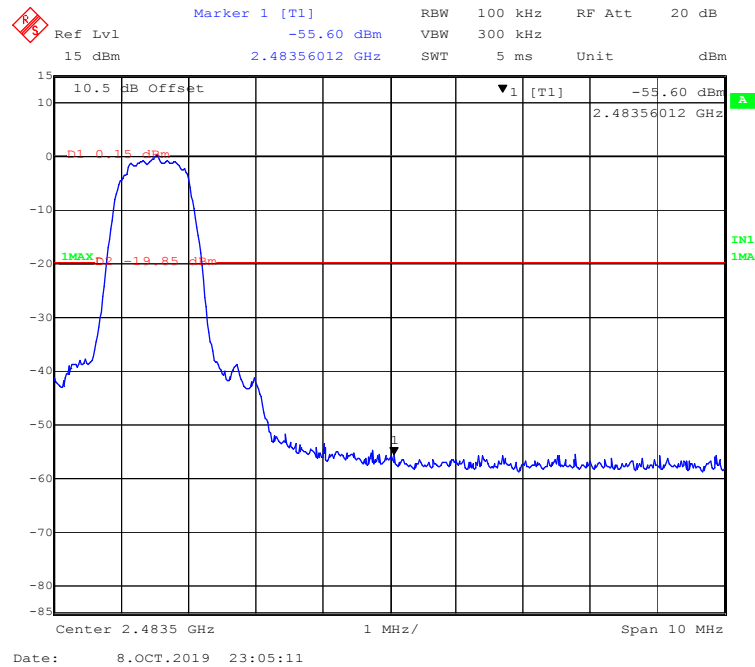


EDR (8DPSK): Left Side - Transmitting

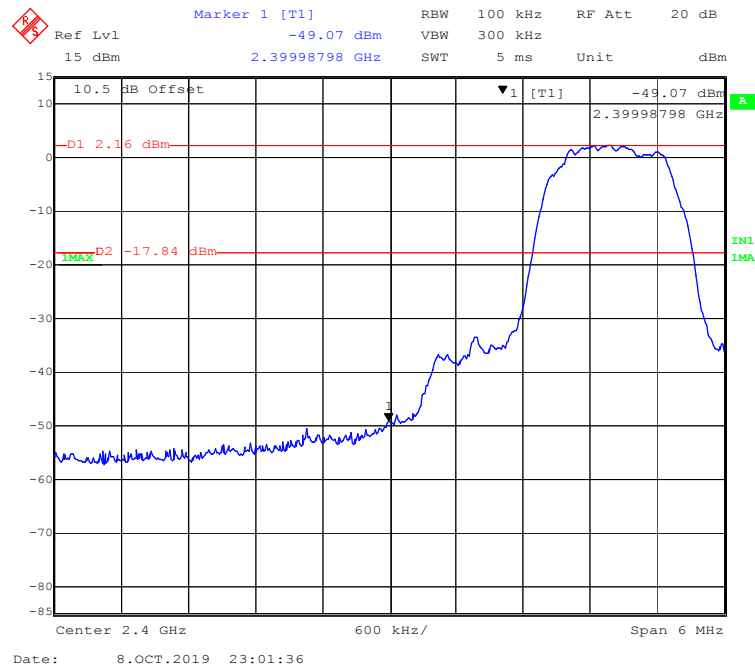


EDR (8DPSK): Right Side - Transmitting

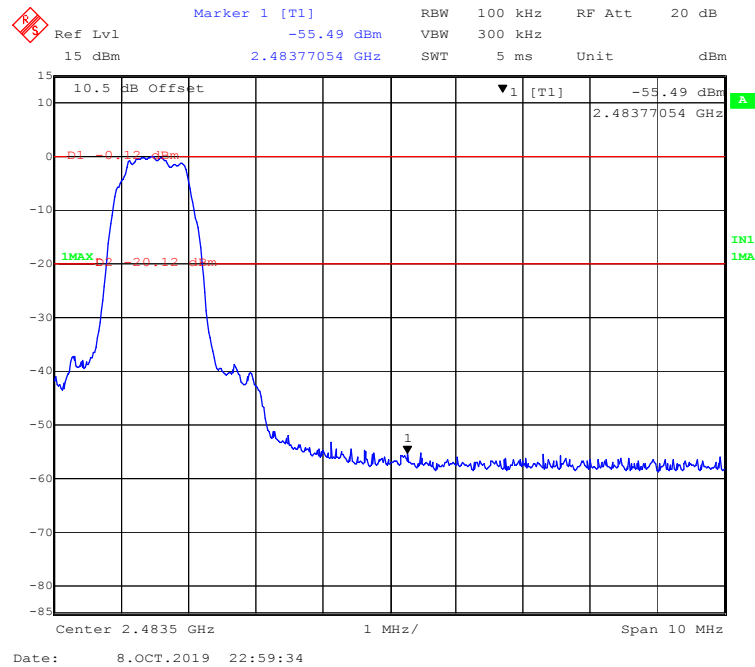


BDR (GFSK): Left Side - Hopping

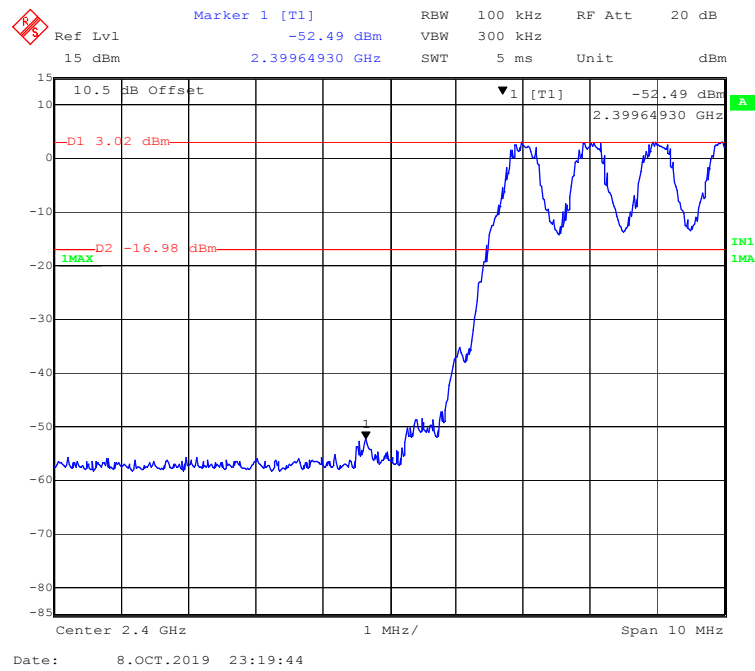


BDR (GFSK): Right Side- Hopping

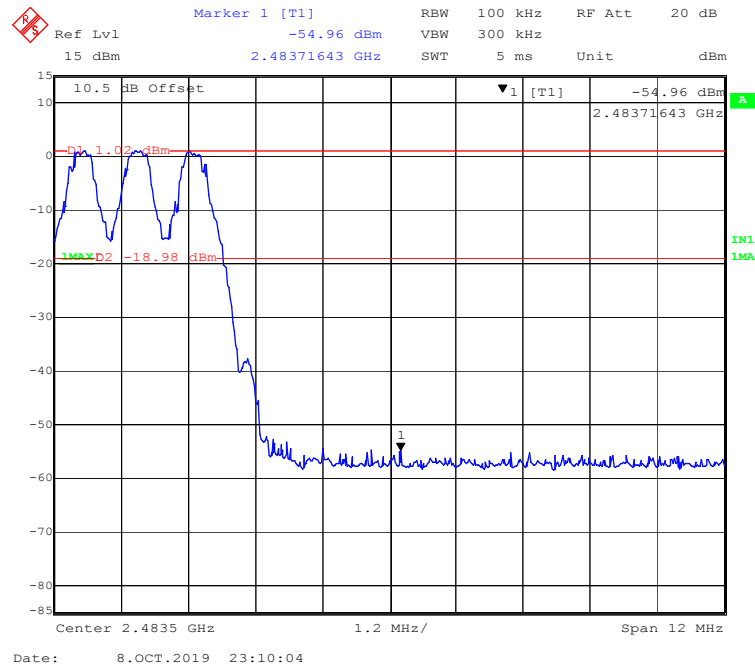


EDR ($\pi/4$ -DQPSK): Left Side- Hopping

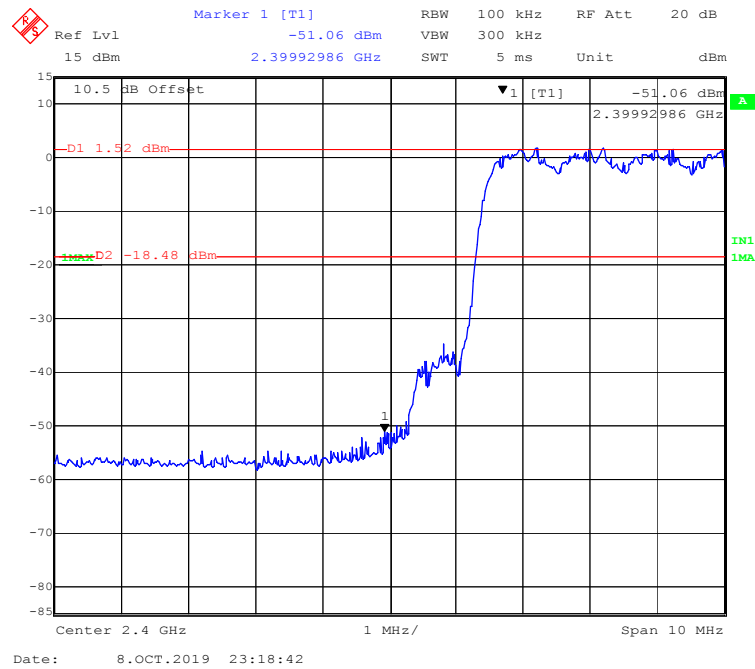


EDR ($\pi/4$ -DQPSK): Right Side- Hopping

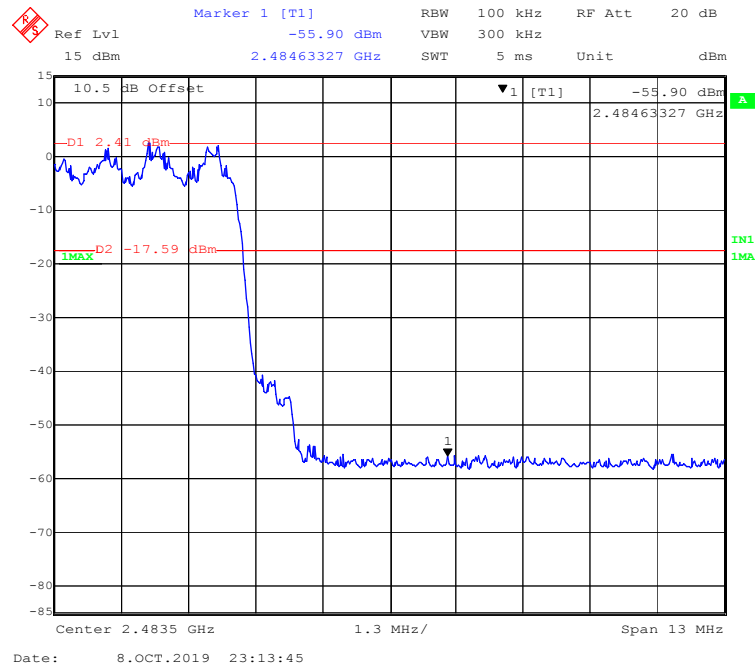

EDR (8DPSK): Left Side- Hopping

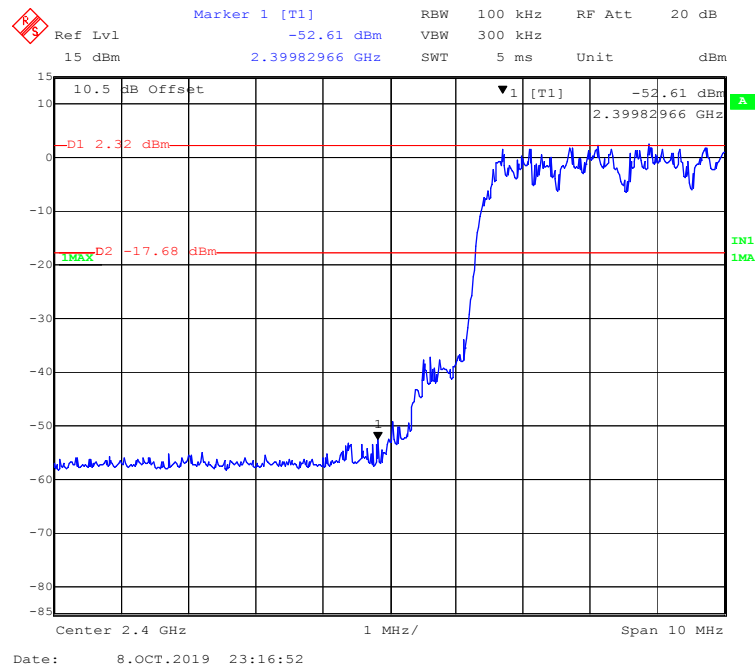

EDR (8DPSK): Right Side- Hopping

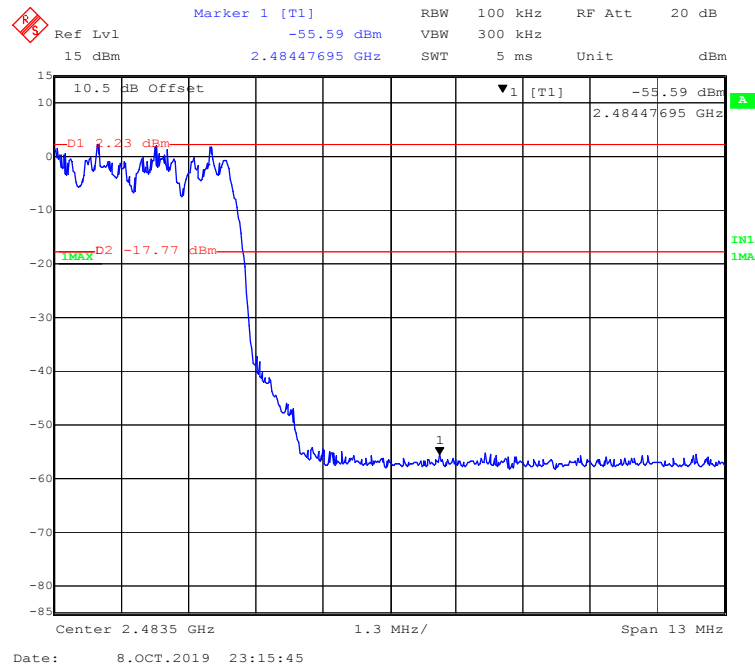

***** END OF REPORT *****