



EMISSION TEST REPORT

Test report file No. : **03-IST-059/FB**Date of issue : Feb. 24, 2003Model / Type No. : HL700M☒ Basic ☐ AlternateKind of product : 17" LCD MonitorBrand name : WOOYOUNGApplicant : WOO YOUNG Telecom CO.,LTD.Manufacturer : WOO YOUNG Telecom CO.,LTD.License holder : WOO YOUNG Telecom CO.,LTD.Address : 222-1, Suwolam-Ri, Seotan-Myum, Pyungtaek-City, Kyunggi-Do,
451-852, Korea**Test result** according to the regulation(s)☒ Positive ☐ Negative

at page 3.

This test report with appendix consists of 17 pages. The test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the Test Laboratory. This equipment is complied with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

DIRECTORY

A) Documentation.

Page

Directory	<u>2</u>
Test regulations	<u>3</u>
Information of Test Regulation	<u>3</u>
Equipment under Test	<u>4</u>
Test Conditions	<u>5 ~ 6</u>
Test Result	<u>7</u>
Measurement Uncertainty	<u>8</u>
Test-setup	<u>9 ~ 11</u>
Summary	<u>17</u>

B) Test Data.

Conducted emissions (Mains)	: 150 kHz - 30 MHz	<u>12 ~ 14</u>
Radiated emissions	: 30 MHz – 1 GHz	<u>15 ~ 16</u>

C) Appendix

TEST REGULATIONS

The tests were performed according to the following regulations ;

- - FCC Part 15, Subpart B (Unintentional Radiators, Class B)

Information of Test Laboratory

IST EMC Lab.

San 21-8 Goan-Ri, Baekam-Myun, Yongin-Si, Kyunggi-Do, Korea

International - Tel : 82-31 - 333 - 4093. Fax : 82-31 - 333 - 4094.

Domestic - Tel : 031 - 333 - 4093. Fax : 031 - 333 - 4094.

EQUIPMENT UNDER TEST

Equipment Description :

Panel :	TFT active matrix Size – 337.92 x 270.336 mm M170EN05 (AU Optronics Corp.)
Resolution :	1280 x 1024, 75 Hz (max.)
Plug & Play :	VESA DDC 1/2B
Power Saving :	VESA DPMS
Power Supply Adapter :	Maker - Edac Power Electronics Co., Ltd. Model - EA1050C0120 Input - 100 ~ 240 Vac, 1.5 A, 50/60 Hz Output – 12 Vdc, 4.2 A

EQUIPMENT UNDER TEST

EUT Type :

- ☒ Table-Top.
☐ Floor-Standing.
☐ Table-Top and Floor-Standing(Combination).

Operation – mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- ☐ Standby.
- ☒ Operational Condition : Scrolling “H” characters under MS Windows,
at test mode of 1280 X 1024, 75 Hz

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.
PC	Vectra VL420MT	HP	SG23101784
Keyboard	SK-2502C	HP	M020321066
PS/2 Mouse	M-S48a	HP	LZC20602926
Serial Mouse	M-S428	Logitech	LCA53305547
Printer	A0302384	Northern Telecom	26633S60168
Head set	NM-V33	TOCO	Unknown
Tuner	TAPC-H701F	LG Innotek	Unknown

Connecting Interface Cables :

- Unshielded AC power cable : 1.8 m
- Unshielded DC power cable : 1.5 m
- Shielded monitor's signal cable : 1.5 m
- Shielded printer's signal cable : 1.8 m
- Unshielded RCA cable : 1.8 m
- Unshielded S-Video Cable : 1.5 m
- Shielded DVI cable : 1.9 m

TEST CONDITIONS

The **measurement of the conducted emissions (Interference voltage)** was performed in a shielded room.

Test location :

☒ Shielded room. No.1

☐ Compact chamber 2

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 25, 2002	892108/018
3725/2	LISN	EMCO	Aug. 22, 2002	9101-2068
KNW-407	LISN	Hyup-Rip	Aug. 21, 2002	8-883-10
ESH 3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 25, 2002	357.8810.52

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement Procedures :

Conducted emissions measurements were made in accordance with ANSI C63.4-1992, "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMI/Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an IF bandwidth of 10kHz or for "quasi-peak" within a bandwidth of 9kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



S. G. Kim / Research Engineer
IST EMC Lab.

The **measurement of the radiated emissions (Electric field)** in the frequency range from 30 MHz to 1GHz was performed in horizontal and vertical antenna polarization at a open-site which meet the site attenuation requirement of ANSI C63.4-1992 and a test distance of :

Location : ☒ Open Site No. 1 ☐ Open Site No. 2 ☐ Open Site No. 3
 Distance : ☒ 3 meters ☐ 10 meters

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVP	Test Receiver	Rohde & Schwarz	Aug. 16, 2002	861744/004
VULB 9160	Antenna	Schwarzbeck	Jul. 10, 2002	3048

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement procedures

Radiated measurements were in accordance with ANSI C63.4-1992 "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a EMI/Field Intensity Meter. The measurements were made with the detector set for "quasi-peak" within a bandwidth of 120kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



S. G. Kim / Research Engineer

IST EMC Lab.

TEST RESULT

Conducted emissions : 150 kHz - 30 MHz

The requirements are.

☒ KEPT ☐ NOT KEPT

Min. limit margin

13.3 dB at 0.182 MHz

Remarks : See test-data at pages 12 ~ 14.

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are.

☒ KEPT ☐ NOT KEPT

Min. limit margin

3.1 dB at 403.8 MHz

Remarks : See test-data at page 15 ~ 16.

Measurement Uncertainty Calculation

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Conducted Emissions)	Probability Distribution	Uncertainty ($\pm$ dB)
		0.15-30MHz
Receiver Specification	Rectangular	1.5
LISN Coupling Specification	Rectangular	1.5
Cable and Input Attenuator Calibration	Normal (k=2)	0.5
Mismatch to Reciver	U-Shaped	-0.8 / +0.7
System Repeatability	Normal (k=1)	0.2
Combined Standard Uncertainty	Normal (k=2)	-1.85 / +1.71
Expanded Uncertainty U	Normal (k=2)	-3.7 / +3.42

$$U_{c,min\ us} = -1.85, \ U_{c,plus} = 1.71$$


$$U = -3.70 / +3.42 \ (k=2, 95.45\% \text{ confidence level})$$

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties($\pm$ dB)
		3 m
Antenna		
Factor	Normal (k=2)	0.9968
Frequency Interpolation	Rectangular	0.1039
Height Variation	Rectangular	-2.6 / +1.5
Directivity Difference	Rectangular	-1.0 / +0
Phase Center Location	Rectangular	1.0
Cable Loss	Normal (k=2)	0.5
Receiver		
Voltage Accuracy	Normal (k=2)	2.0
Pulse Response	Rectangular	1.5
Absolute Repetition Rate	Rectangular	1.5
Mismatch to Receiver		
$G_{antenna}$ = 0.33	U-Shaped	-1.0 / +0.9
$G_{receiver}$ = 0.33		
System Repeatability	Std Deviation	0.5
Combined Standard Uncertainty	Normal	-2.6048 / 2.2775
Expanded Uncertainty U	Normal (k=2)	-5.21 / +4.55


$$U_{c,min\ us} = -2.6048, \ U_{c,plus} = 2.2775$$

$$U = -5.21 / +4.55 \ (k=2, 95.45\% \text{ confidence level})$$

TEST SETUP (Drawings)

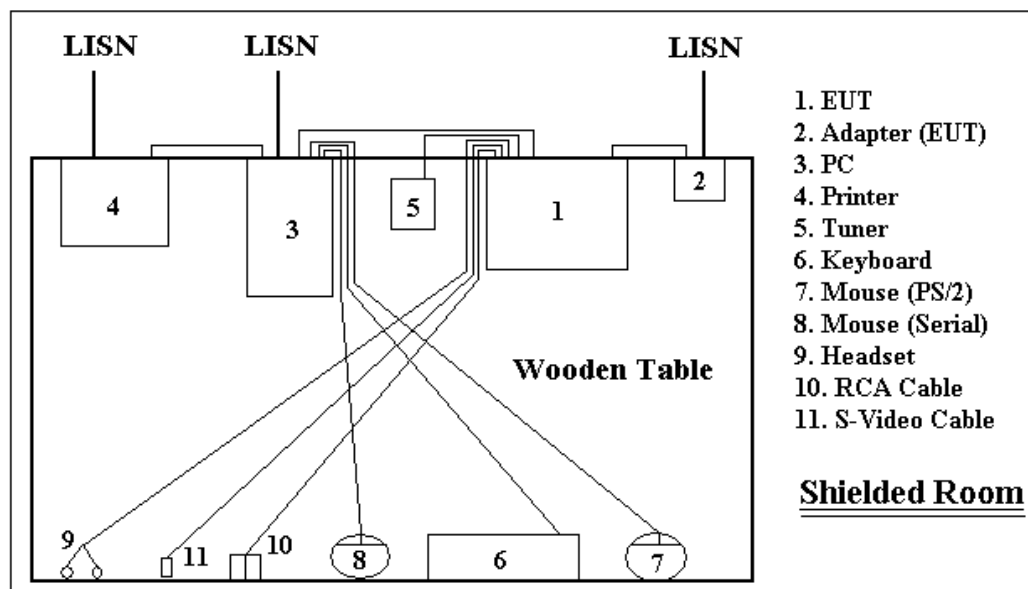Type : HL700M

Conducted Emissions 150kHz - 30 MHz

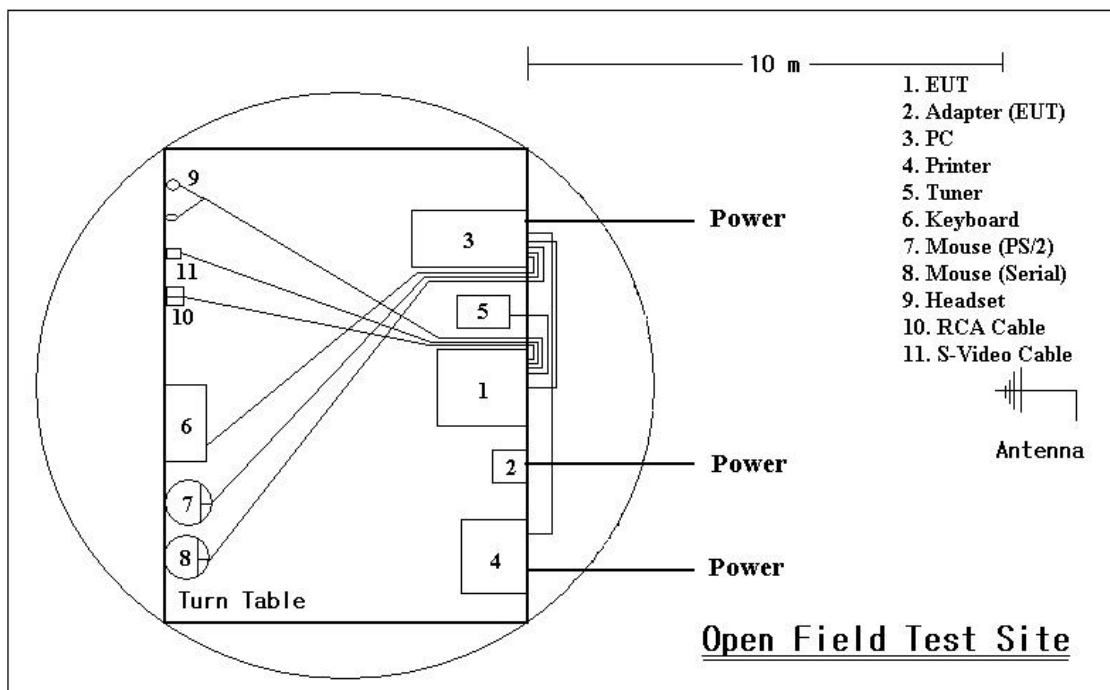

Radiated Emissions 30 MHz - 1000 MHz

TEST SETUP (Photos)

Type : HL700M



Conducted Emissions 150kHz - 30 MHz



TEST SETUP (Photos)

Type : HL700M



Radiated Emissions 30MHz - 1000 MHz



Conducted Emission Test Data

Type HL700M
 Manufacturer WOO YOUNG Telecom CO.,LTD.
 Operation mode Scrolling "H" pattern display at 1280 x 1024, 75Hz
 Environmental Condition Temperature : 18 °C
 Humidity : 40 %
 Atmospheric pressure : 1000 mbar
 Date Feb. 19, 2003

Highest Emissions relative to the limit


Frequency [MHz]	Reading [dB? V]		Phase	Insertion Loss (LISN)	Limit [dB? V]		Margin [dB]	
	Q-peak	AV			Q-peak	AV	Q-peak	AV
0.182	50.3	37.7	L1	0.8	64.4	54.4	13.3	15.9
0.240	41.8	29.8		0.8	62.1	52.1	19.5	21.5
0.303	36.6	27.9		0.8	60.1	50.1	22.7	21.4
0.365	31.8	23.9		0.8	58.6	48.6	26.0	23.9
2.976	35.6	23.8		0.8	56.0	46.0	19.6	21.4
3.037	31.2	24.2		0.8	56.0	46.0	24.0	21.0
0.150	47.6	13.7		N	0.8	66.0	56.0	17.6
0.182	46.2	35.5	0.8		64.4	54.4	17.4	18.1
0.361	29.4	22.8	0.8		58.7	48.7	28.5	25.1
2.845	33.9	20.8	0.8		56.0	46.0	21.3	24.4
3.813	29.1	21.9	0.8		56.0	46.0	26.1	23.3
22.877	28.6	23.3	0.8		60.0	50.0	30.6	25.9
Cable loss are less than 0.1 dB								


*L1 : Live Line

**N : Neutral Line

*** Please refer to data graphs at page 13 ~ 14.

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -3.70 / +3.42 [dB]

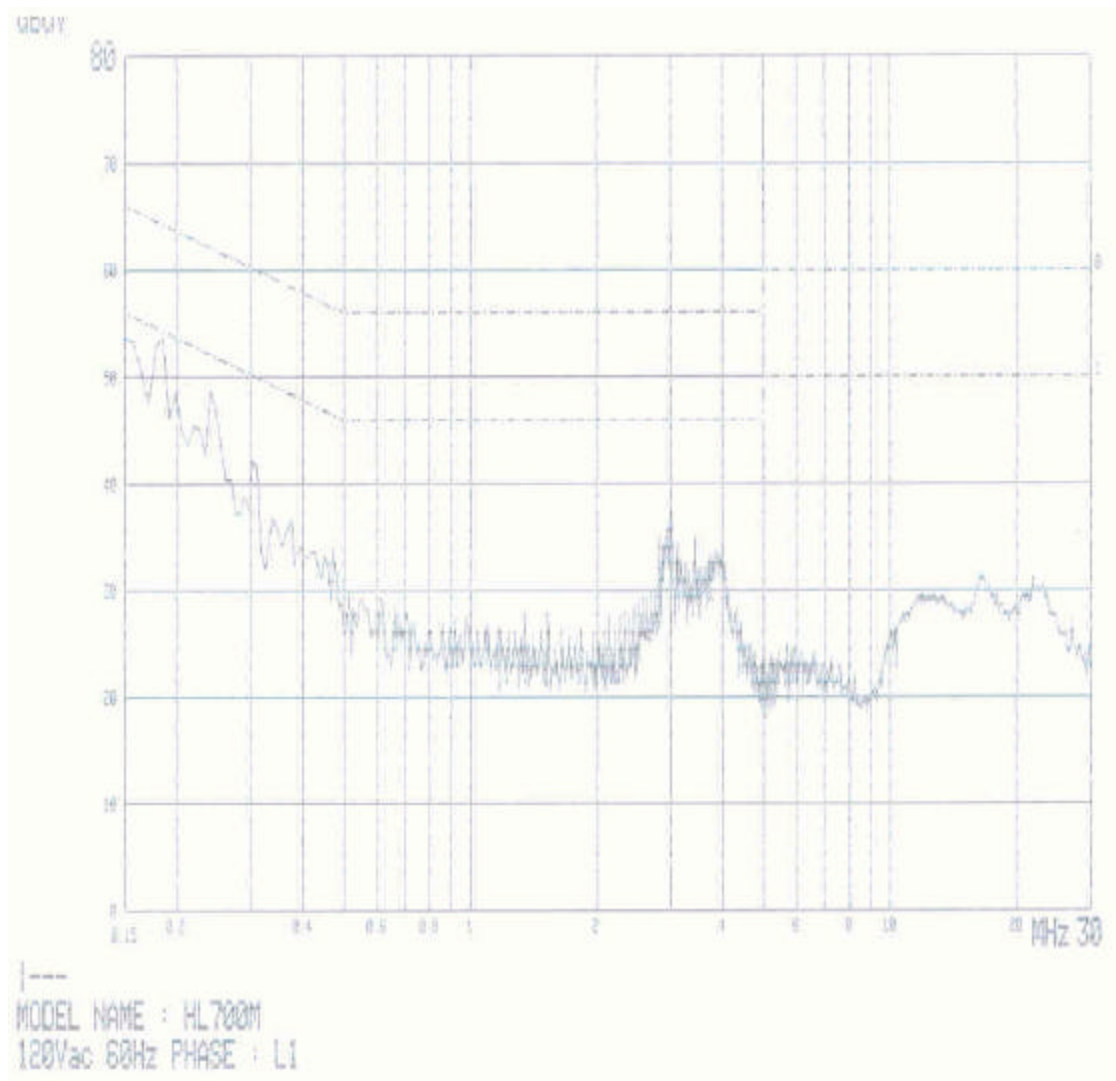

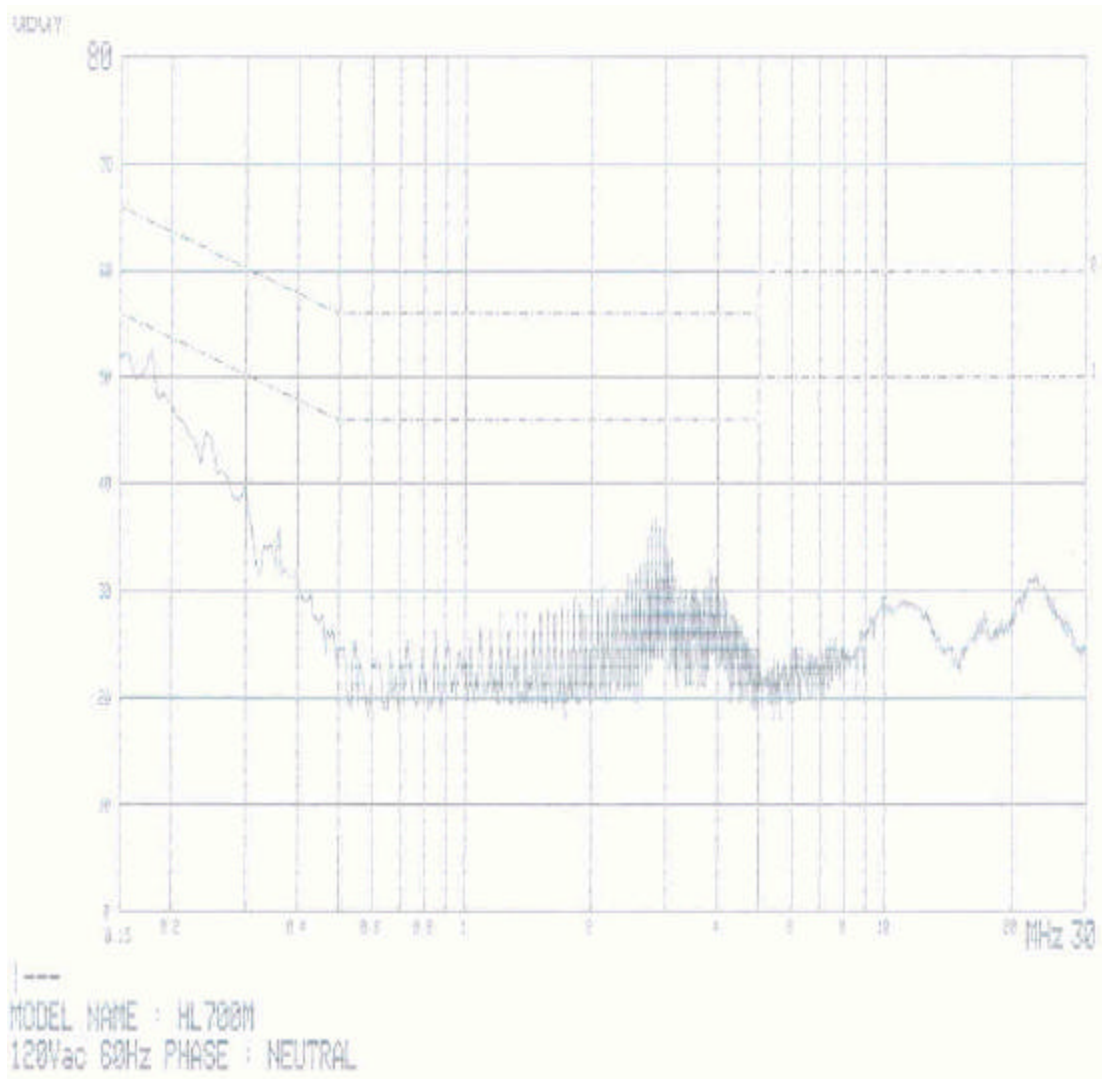


Radiation Test Data

Type HL700M
 Manufacturer WOO YOUNG Telecom CO.,LTD.
 Operation mode Scrolling "H" pattern display at 1280 x 1024, 75Hz
 Environmental Condition Temperature : 13 °C
 Humidity : 40 %
 Atmospheric pressure : 1000 mbar
 Test distance 3 m
 Antenna VULB9160
 Date Feb. 20, 2003

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
40.4	22.0	13.6	1.2	50	100	V	36.8	40.0	3.2
109.6	19.2	9.3	1.9	166	100	V	30.4	43.5	13.1
134.6	22.7	10.9	2.1	155	100	V	35.7	43.5	7.8
161.5	20.5	12.3	2.3	318	100	V	35.1	43.5	8.4
175.0	18.2	11.4	2.4	184	100	V	32.0	43.5	11.5
188.5	17.4	9.5	2.5	327	140	V	29.4	43.5	14.1
228.8	24.8	9.3	2.8	0	144	H	36.9	46.0	9.1
242.3	24.3	10.3	2.9	18	152	V	37.5	46.0	8.5
255.7	24.0	11.1	2.9	329	120	V	38.0	46.0	8.0
269.2	28.3	11.5	3.0	282	110	V	42.8	46.0	3.2
296.1	23.2	11.7	3.2	110	100	V	38.1	46.0	7.9
309.6	19.4	11.7	3.3	120	100	V	34.4	46.0	11.6
336.4	23.2	11.7	3.5	120	100	V	38.4	46.0	7.6
383.4	19.5	12.5	3.8	108	100	V	35.8	46.0	10.2
403.8	25.3	13.3	4.3	112	100	V	42.9	46.0	3.1
444.2	16.2	13.9	4.5	130	100	V	34.6	46.0	11.4
511.5	18.6	15.1	4.8	110	100	V	38.5	46.0	7.5
578.8	13.5	16.5	4.7	111	100	V	34.7	46.0	11.3

Coverage factor of $k=2$ will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty $U = -5.21 / +4.55$ [dB]

MEASUREMENT OF DISTURBANCE RADIATION

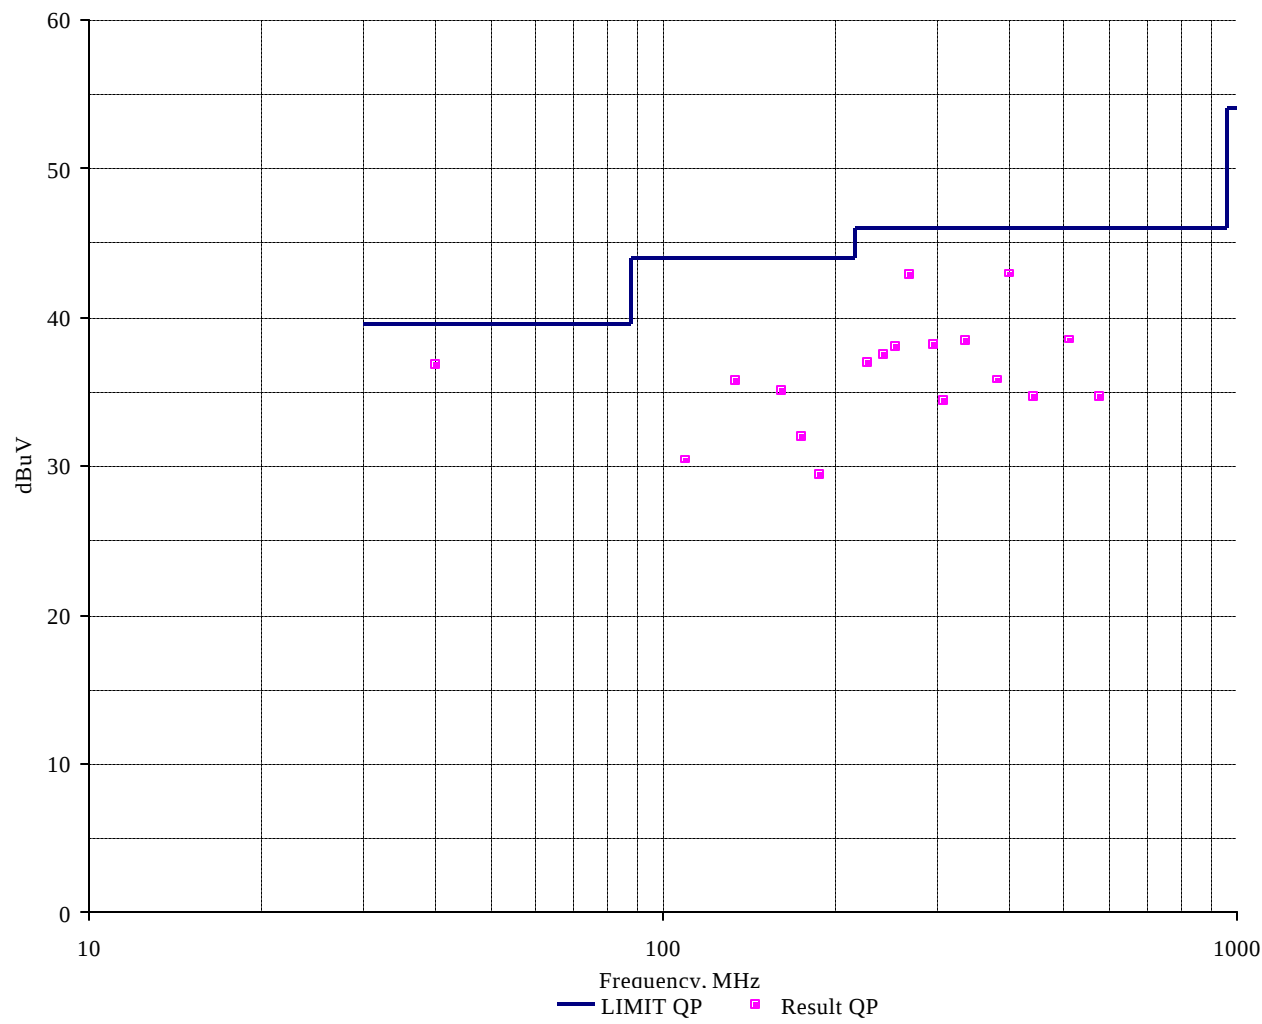

SUMMARY

GENERAL REMARKS :

The equipment is not modified anything, mechanical or circuit to improve EMI status during a measurement and complied the regulation "Part 15 subpart B Class B of CFR 47"

FINAL JUDGMENT :

The requirements according to the technical regulations are

☒ Kept ☐ Not kept

The equipment under test does

☒ Fulfill the general approval requirements mentioned on page 3.
☐ Not fulfill the general approval requirements mentioned on page 3.

Begin of testing : Feb. 19, 2003

End of testing : Feb. 20, 2003

Reviewed by


Joon H. Lee / EMC Group Manager

Issued by


G. Chung / Chief