



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, CA 95134, USA
FCC ID	PY309300117
Manufacturer's company	Ambit Microsystems (Shanghai) Ltd.
Manufacturer Address	No. 1925, Nanle Road, Songjiang Export Processing Zone, Shanghai, China

Product Name	Wireless-N 150 router, Wireless-G Router
Brand Name	NETGEAR
Model Name	WNR1000v3, WGR614v10
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 15, 2009
Final Test Date	Oct. 28, 2009
Submission Type	Original Equipment
Multiple Listing	Please refer to section 3.7



### Statement

**Test result included in this report is for the Draft n and 802.11b/g part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	5
3.5. Table for Test Modes .....	6
3.6. Table for Testing Locations.....	7
3.7. Table for Multiple Listing & Class II Change .....	7
3.8. Table for Supporting Units .....	7
3.9. Table for Parameters of Test Software Setting .....	8
3.10. Test Configurations .....	9
<b>4. TEST RESULT .....</b>	<b>12</b>
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Power Spectral Density Measurement .....	34
4.4. 6dB Spectrum Bandwidth Measurement .....	51
4.5. Radiated Emissions Measurement .....	68
4.6. Band Edge Emissions Measurement .....	122
4.7. Antenna Requirements .....	139
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>140</b>
<b>6. TEST LOCATION.....</b>	<b>141</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>142</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A18</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~C3</b>





## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : Wireless-N 150 router, Wireless-G Router  
**Brand Name** : NETGEAR  
**Model Name** : WNR1000v3, WGR614v10  
**Applicant** : NETGEAR, Inc.  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 15, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

*Jordan Hsiao 2009.11.13*

Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	4.43 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	1.78 dB
4.3	15.247(e)	Power Spectral Density	Complies	9.68 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.80 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.12 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### Draft n

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	Form Power Adapter
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 17.68 MHz ; MCS0 (40MHz): 36.32 MHz
Conducted Output Power	MCS0 (20MHz): 28.06 dBm ; MCS0 (40MHz): 24.77 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### 802.11b/g

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	Form Power Adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 12.20 MHz ; 11g: 16.60 MHz
Conducted Output Power	11b: 22.60 dBm ; 11g: 28.22 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)	
Band width Mode	20 MHz	40 MHz
802.11b	V	X
802.11g	V	X
Draft n	V	V

**Draft n spec**

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

**3.2. Accessories**

Power	Brand	Model	P/N	Rating
Adapter 1	NETGEAR	MT12-Y120100-A1	332-10190-01	Input: 100-120VAC, 60Hz, 0.3A Output: 12VDC, 1.0A
Adapter 2	NETGEAR	T012LF1209 16100-2LF	332-10166-01	Input: 100-120VAC, 50/60Hz, 0.5A Output: 12VDC, 1.0A

### 3.3. Table for Filed Antenna


Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	PCB Antenna	N/A	1.03
2	WHA YU GROUP	C107-510660-A (SSR-93213)	Dipole Antenna	HRS	2.00

Note: The EUT has two antennas (1TX, 1RX).

Ant. 1 and Ant. 2 can be used as transmitting/receiving antenna

But those two antennas could not be active at the same time and transmit the same signal.

The EUT supports the antenna with TX/RX diversity function.

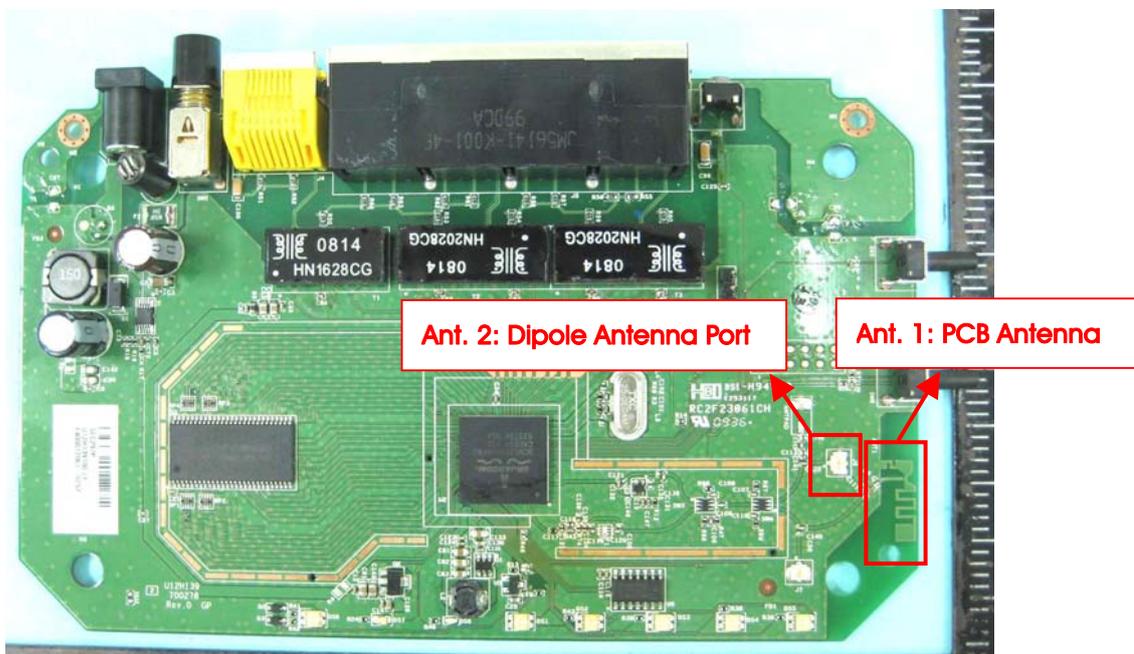

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	1/6/11	1/2
	MCS0/40MHz	13.5 Mbps	3/6/9	1/2
	11b/BPSK	1 Mbps	1/6/11	1/2
	11g/BPSK	6 Mbps	1/6/11	1/2
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	1/6/11	1/2
	MCS0/40MHz	13.5 Mbps	3/6/9	1/2
	11b/BPSK	1 Mbps	1/6/11	1/2
	11g/BPSK	6 Mbps	1/6/11	1/2
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	MCS0/20MHz	6.5 Mbps	1/6/11	1/2
	MCS0/40MHz	13.5 Mbps	3/6/9	1/2
	11b/BPSK	1 Mbps	1/6/11	1/2
	11g/BPSK	6 Mbps	1/6/11	1/2
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	1/11	1/2
	MCS0/40MHz	13.5 Mbps	3/9	1/2
	11b/BPSK	1 Mbps	1/11	1/2
	11g/BPSK	6 Mbps	1/11	1/2

The following test modes were performed for all tests:

Mode 1. EUT + Adapter 1

Mode 2. EUT + Adapter 2

**For Conducted Emission test:**

Due to Mode 1 generated the worst test result, so it was tested and recorded in the report.

**For Radiated Emission test below 1GHz:**

Due to Mode 2 generated the worst test result, so it was tested and recorded in the report.

Note: The EUT was operated at normal link mode, and the EUT will select random antenna to execute TX/RX function.

**For Radiated Emission test above 1GHz:**

Due to Ant. 1 and Ant. 2 are different type antennas, so both of them are tested and recorded in the report.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Multiple Listing & Class II Change

The model names in the following table are all refer to the identical product.

Model Name	Color of Housing	Wireless Function	Description
WNR1000v3	Black	Support 802.11b/g/n	All the models are identical, the difference model served as Housing, PLBL and FW. The IEEE 802.11n technique of WGR614v10 will be disabled by software.
WGR614v10	White	Support 802.11b/g	

### 3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2KWM3945ABG
Notebook	ACER	MS2181	HLZMS2161BG
Notebook	DELL	PP25L	E2K4965AGNM

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Antenna 1 >

#### Power Parameters of Draft n

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	56	84	56
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	56	76	58

#### Power Parameters of IEEE 802.11b/g

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	80	84	74
IEEE 802.11g	56	84	56

<For Antenna 2 >

#### Power Parameters of Draft n

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	56	84	56
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	56	76	58

#### Power Parameters of IEEE 802.11b/g

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	80	84	74
IEEE 802.11g	56	84	56

During the test, the following programs under WIN XP were executed:


At the same time, "DOS" was executed the test program to control the EUT continuously transmit RF signal.

### 3.10. Test Configurations


#### 3.10.1. Radiation Emissions Test Configuration

Test Configuration: 9KHz~1GHz

Test Mode: Mode 2

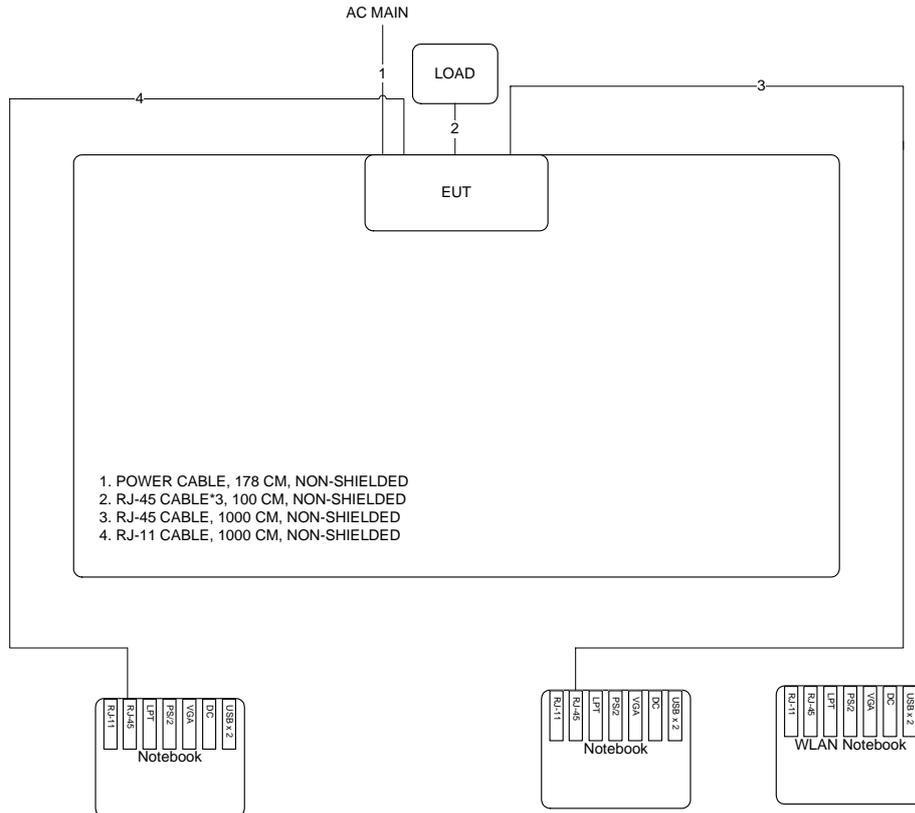


Test Configuration: above 1GHz

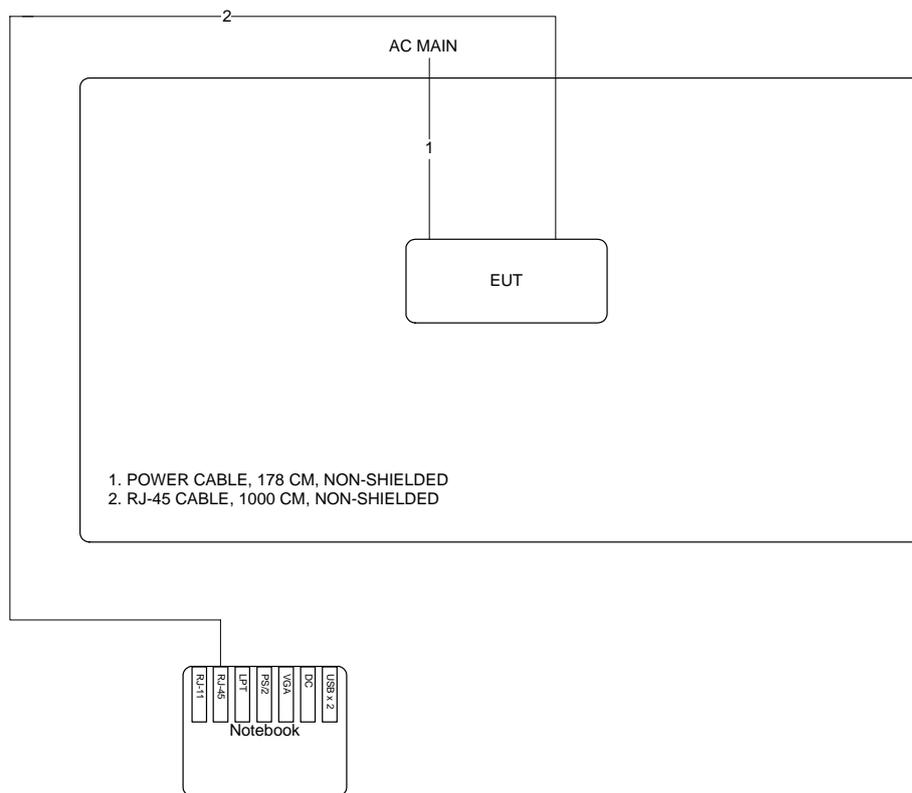

### 3.10.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1

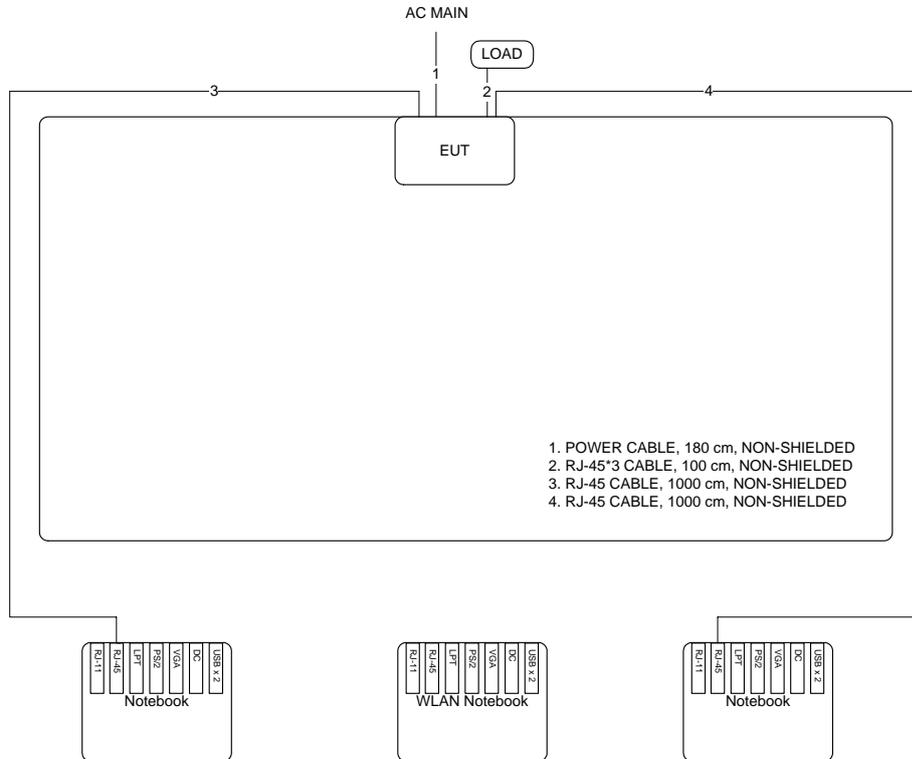

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

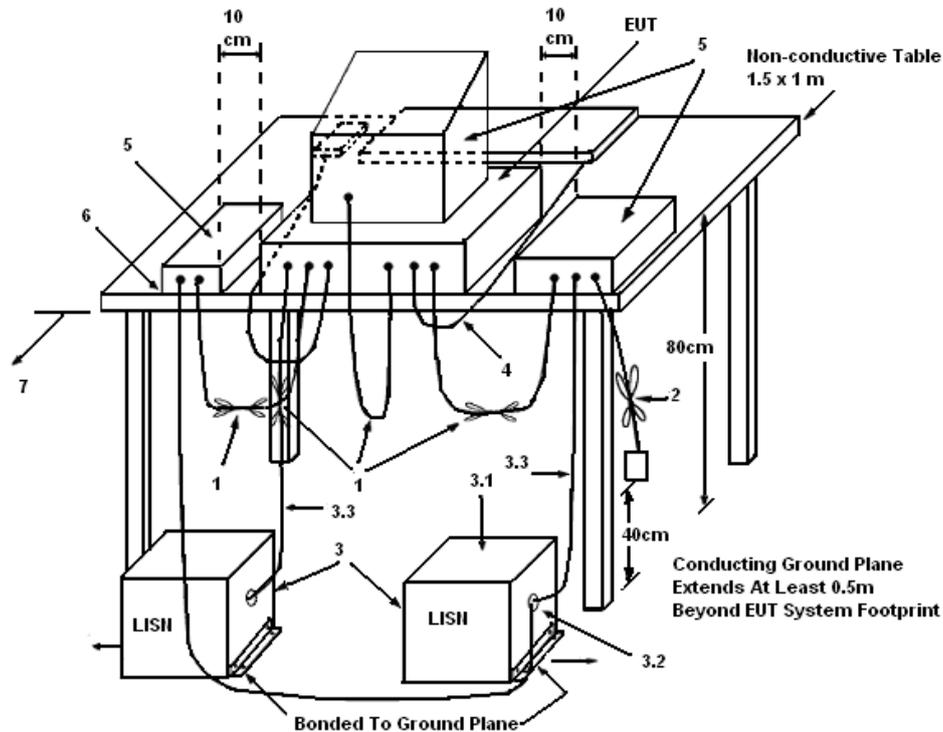

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	56%
Test Engineer	Peter Wu	Phase	Line
Configuration	Normal Link / Mode 1		

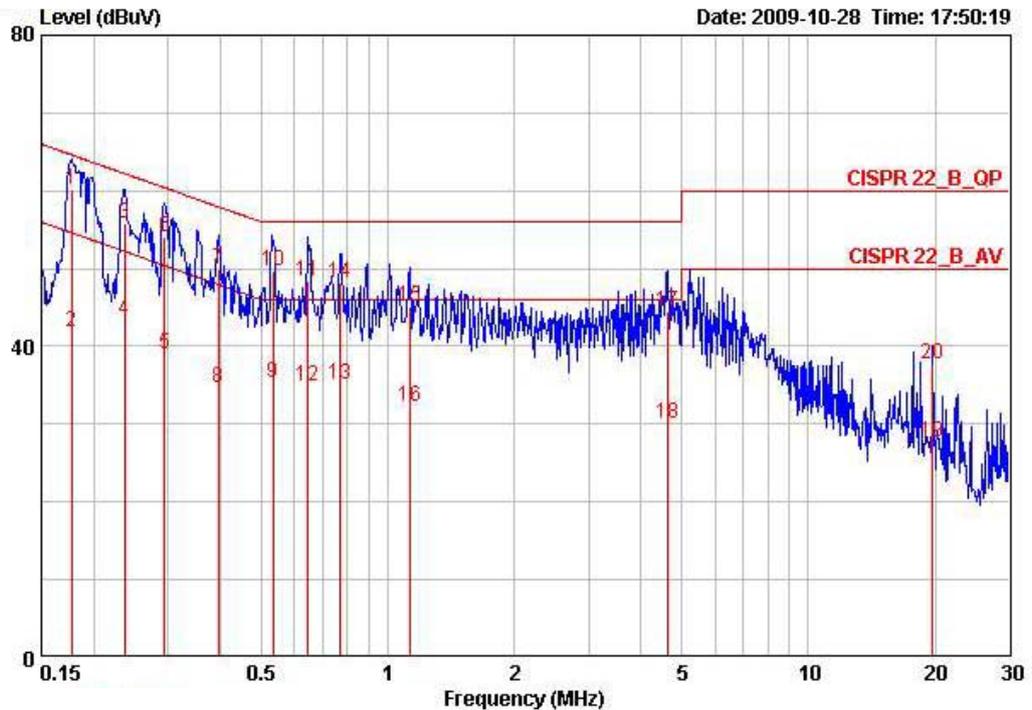

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	Remark
1	0.17678	60.21	-4.43	64.64	59.95	0.06	0.20	QP
2	0.17678	41.76	-12.88	54.64	41.50	0.06	0.20	AVERAGE
3	0.23613	55.78	-6.46	62.23	55.53	0.05	0.20	QP
4	0.23613	43.33	-8.91	52.23	43.08	0.05	0.20	AVERAGE
5	0.29398	38.99	-11.42	50.41	38.75	0.04	0.20	AVERAGE
6	0.29398	54.12	-6.29	60.41	53.88	0.04	0.20	QP
7	0.39553	50.02	-7.93	57.95	49.79	0.03	0.20	QP
8	0.39553	34.74	-13.21	47.95	34.51	0.03	0.20	AVERAGE
9	0.53334	35.29	-10.71	46.00	35.06	0.03	0.20	AVERAGE
10	0.53334	49.80	-6.20	56.00	49.57	0.03	0.20	QP
11	0.64740	48.46	-7.54	56.00	48.23	0.03	0.20	QP
12	0.64740	34.89	-11.11	46.00	34.66	0.03	0.20	AVERAGE
13	0.77110	35.00	-11.00	46.00	34.77	0.03	0.20	AVERAGE
14	0.77110	48.28	-7.72	56.00	48.05	0.03	0.20	QP
15	1.129	45.10	-10.90	56.00	44.90	0.03	0.17	QP
16	1.129	32.22	-13.78	46.00	32.02	0.03	0.17	AVERAGE
17	4.647	44.46	-11.54	56.00	44.02	0.14	0.30	QP
18	4.647	30.04	-15.96	46.00	29.60	0.14	0.30	AVERAGE
19	19.709	27.70	-22.30	50.00	26.39	0.81	0.50	AVERAGE
20	19.709	37.66	-22.34	60.00	36.35	0.81	0.50	QP

Temperature	24°C	Humidity	56%
Test Engineer	Peter Wu	Phase	Neutral
Configuration	Normal Link / Mode 1		

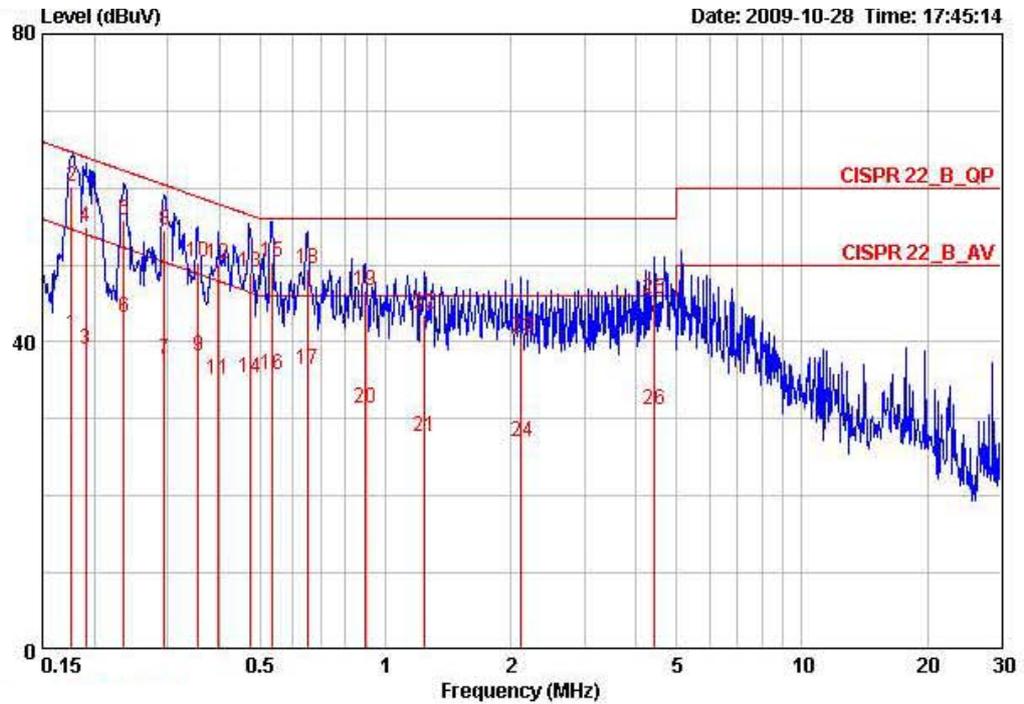

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17638	40.89	-13.76	54.65	40.60	0.09	0.20	AVERAGE
2	0.17638	60.12	-4.53	64.65	59.83	0.09	0.20	QP
3	0.19039	39.11	-14.91	54.02	38.83	0.08	0.20	AVERAGE
4	0.19039	54.94	-9.08	64.02	54.66	0.08	0.20	QP
5	0.23573	55.81	-6.44	62.25	55.53	0.08	0.20	QP
6	0.23573	43.20	-9.05	52.25	42.92	0.08	0.20	AVERAGE
7	0.29398	37.79	-12.62	50.41	37.52	0.07	0.20	AVERAGE
8	0.29398	54.47	-5.94	60.41	54.20	0.07	0.20	QP
9	0.35588	38.10	-10.72	48.82	37.83	0.07	0.20	AVERAGE
10	0.35588	50.27	-8.55	58.82	50.00	0.07	0.20	QP
11	0.39763	35.11	-12.79	47.90	34.84	0.07	0.20	AVERAGE
12	0.39763	50.20	-7.70	57.90	49.93	0.07	0.20	QP
13	0.47270	49.00	-7.47	56.47	48.73	0.07	0.20	QP
14	0.47270	35.34	-11.13	46.47	35.07	0.07	0.20	AVERAGE
15	0.53270	50.29	-5.71	56.00	50.02	0.07	0.20	QP
16	0.53270	35.82	-10.18	46.00	35.55	0.07	0.20	AVERAGE
17	0.65004	36.38	-9.62	46.00	36.11	0.07	0.20	AVERAGE
18	0.65004	49.58	-6.42	56.00	49.31	0.07	0.20	QP
19	0.88969	46.57	-9.43	56.00	46.30	0.07	0.20	QP
20	0.88969	31.31	-14.69	46.00	31.04	0.07	0.20	AVERAGE
21	1.242	27.76	-18.24	46.00	27.54	0.08	0.15	AVERAGE
22	1.242	43.64	-12.36	56.00	43.42	0.08	0.15	QP
23	2.121	40.49	-15.51	56.00	40.20	0.09	0.20	QP
24	2.121	27.11	-18.89	46.00	26.82	0.09	0.20	AVERAGE
25	4.418	45.58	-10.42	56.00	45.11	0.17	0.30	QP

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>LISN Factor</b>	<b>Cable Loss</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV</b>	<b>dB</b>	<b>dBuV</b>	<b>dBuV</b>	<b>dB</b>	<b>dB</b>	
26 B	4.418	31.21	-14.79	46.00	30.74	0.17	0.30	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz
VB	3MHz
Detector	PEAK
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

### 4.2.4. Test Setup Layout

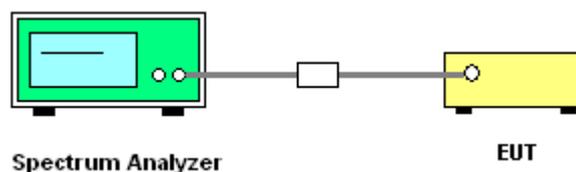

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<For Antenna 1 >

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n / Antenna 1

##### Configuration Draft n MCS0 20MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.81	30.00	Complies
6	2437 MHz	28.06	30.00	Complies
11	2462 MHz	21.70	30.00	Complies

##### Configuration Draft n MCS0 40MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	20.21	30.00	Complies
6	2437 MHz	24.77	30.00	Complies
9	2452 MHz	20.89	30.00	Complies

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b/g / Antenna 1

**Configuration IEEE 802.11b Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.73	30.00	<b>Complies</b>
6	2437 MHz	22.60	30.00	<b>Complies</b>
11	2462 MHz	20.35	30.00	<b>Complies</b>

**Configuration IEEE 802.11g Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.84	30.00	<b>Complies</b>
6	2437 MHz	28.22	30.00	<b>Complies</b>
11	2462 MHz	22.00	30.00	<b>Complies</b>

## &lt;For Antenna 2&gt;

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n / Antenna 2

## Configuration Draft n MCS0 20MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.93	30.00	Complies
6	2437 MHz	27.35	30.00	Complies
11	2462 MHz	20.99	30.00	Complies

## Configuration Draft n MCS0 40MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	19.62	30.00	Complies
6	2437 MHz	24.27	30.00	Complies
9	2452 MHz	20.17	30.00	Complies

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b/g / Antenna 2

**Configuration IEEE 802.11b Ant. 2**


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.70	30.00	<b>Complies</b>
6	2437 MHz	21.72	30.00	<b>Complies</b>
11	2462 MHz	19.58	30.00	<b>Complies</b>

**Configuration IEEE 802.11g Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.87	30.00	<b>Complies</b>
6	2437 MHz	27.20	30.00	<b>Complies</b>
11	2462 MHz	21.26	30.00	<b>Complies</b>


<For Antenna 1>

Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2412 MHz

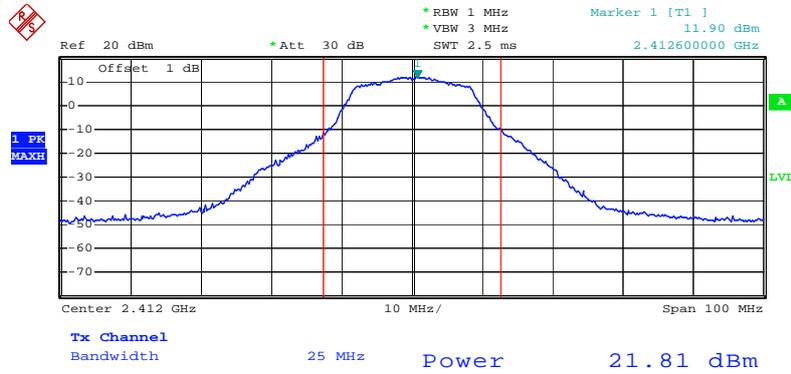


Date: 24.OCT.2009 14:18:54

Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2437 MHz

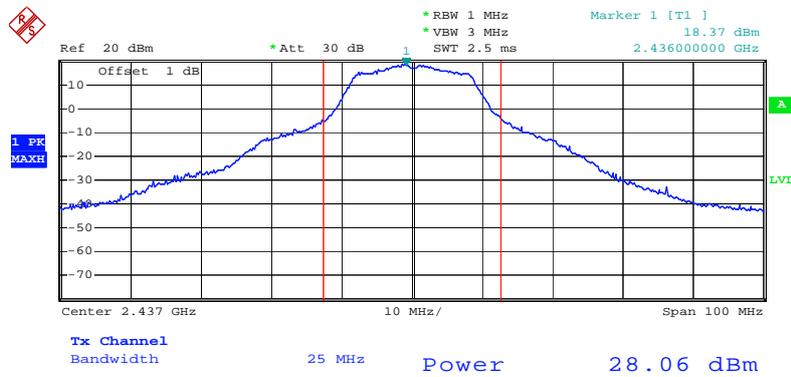


Date: 24.OCT.2009 14:21:26

Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2462 MHz

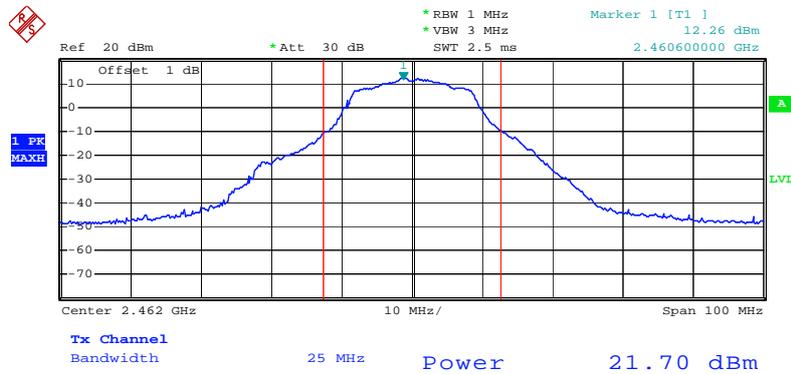

Date: 24.OCT.2009 14:17:32

Conducted Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2422 MHz

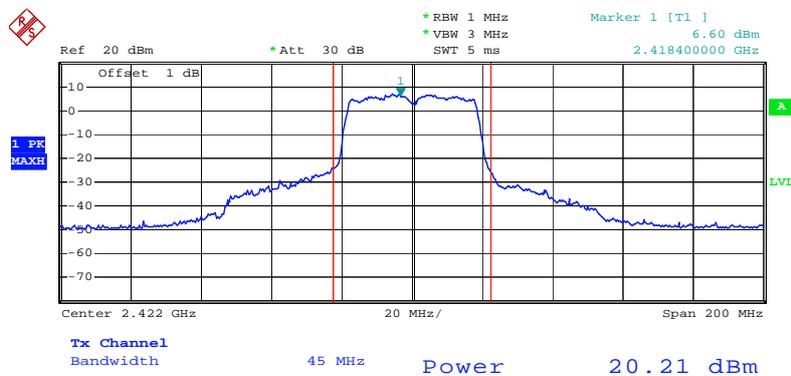

Date: 24.OCT.2009 14:23:00










<For Antenna 2>

Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2412 MHz

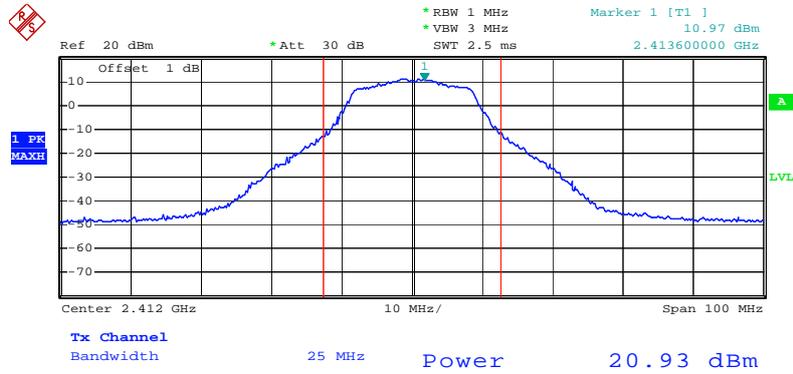


Date: 24.OCT.2009 11:32:55

Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2437 MHz




Date: 24.OCT.2009 11:28:58

Conducted Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2462 MHz

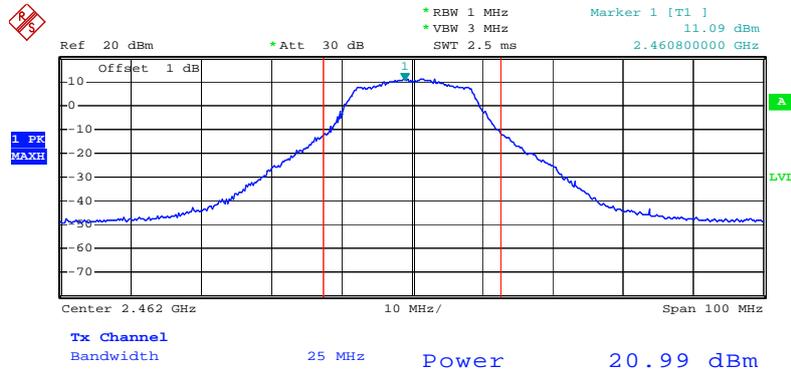

Date: 24.OCT.2009 14:39:34

Conducted Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2422 MHz

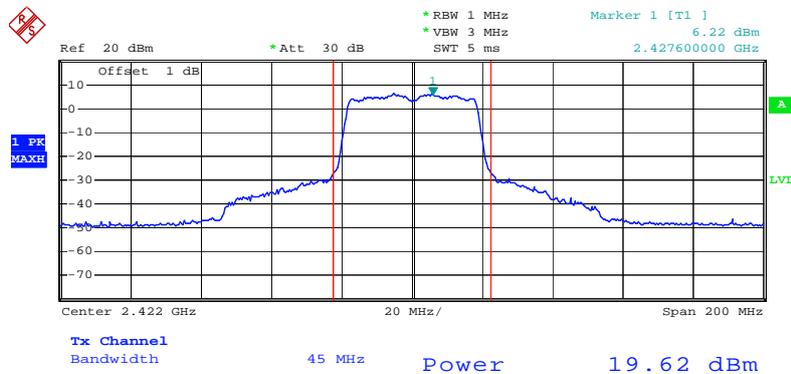

Date: 24.OCT.2009 11:44:33








**Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2437 MHz**



Date: 24.OCT.2009 11:20:50

**Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2462 MHz**

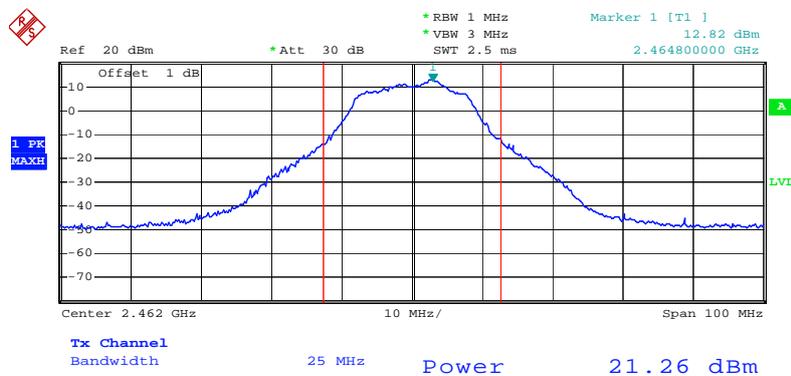

Date: 24.OCT.2009 11:23:51

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

#### 4.3.4. Test Setup Layout

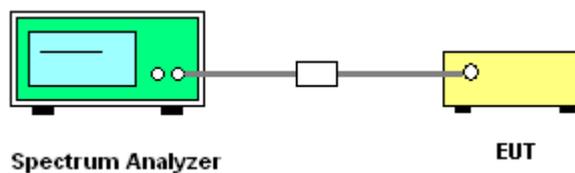

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

<For Antenna 1>

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n / Antenna 1

##### Configuration Draft n MCS0 20MHz Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-10.42	8.00	Complies
6	2437 MHz	-4.72	8.00	Complies
11	2462 MHz	-10.72	8.00	Complies

##### Configuration Draft n MCS0 40MHz Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-16.27	8.00	Complies
6	2437 MHz	-9.35	8.00	Complies
9	2452 MHz	-14.99	8.00	Complies

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b/g / Antenna 1

**Configuration IEEE 802.11b Ant. 1**

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-2.42	8.00	Complies
6	2437 MHz	-1.68	8.00	Complies
11	2462 MHz	-3.87	8.00	Complies

**Configuration IEEE 802.11g Ant. 1**

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-9.88	8.00	Complies
6	2437 MHz	-4.39	8.00	Complies
11	2462 MHz	-9.05	8.00	Complies

## &lt;For Antenna 2&gt;

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n / Antenna 2

## Configuration Draft n MCS0 20MHz Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-12.57	8.00	Complies
6	2437 MHz	-4.54	8.00	Complies
11	2462 MHz	-12.50	8.00	Complies

## Configuration Draft n MCS0 40MHz Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-16.47	8.00	Complies
6	2437 MHz	-10.54	8.00	Complies
9	2452 MHz	-15.63	8.00	Complies

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b/g / Antenna 2

**Configuration IEEE 802.11b Ant. 2**


Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-3.27	8.00	Complies
6	2437 MHz	-2.96	8.00	Complies
11	2462 MHz	-4.56	8.00	Complies

**Configuration IEEE 802.11g Ant. 2**

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-10.39	8.00	Complies
6	2437 MHz	-5.21	8.00	Complies
11	2462 MHz	-9.87	8.00	Complies


<For Antenna 1>

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 / 2412 MHz

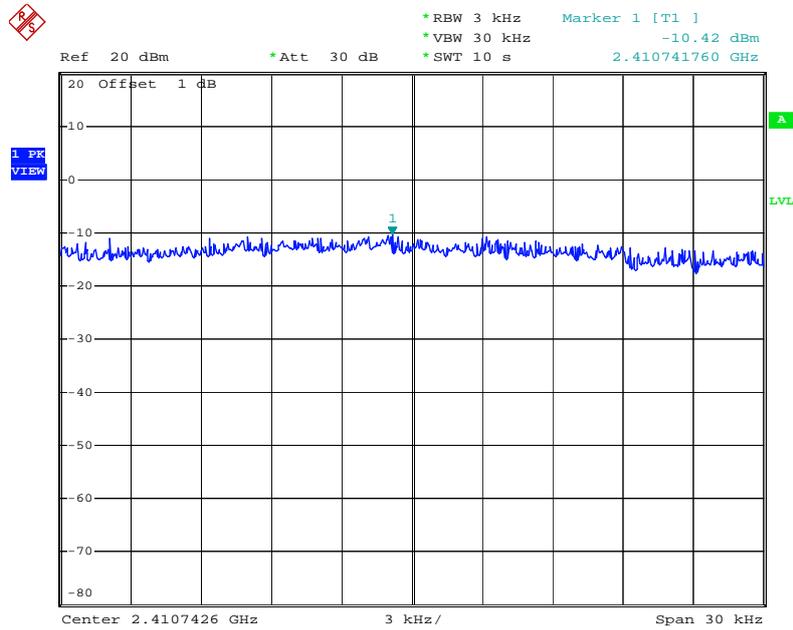


Date: 24.OCT.2009 15:29:00

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 / 2437 MHz

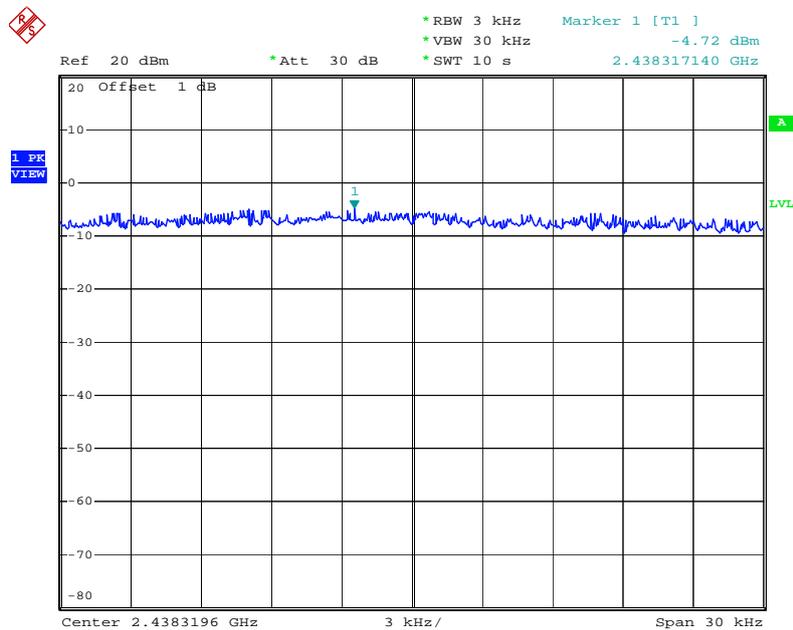


Date: 24.OCT.2009 15:31:03

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 / 2462 MHz

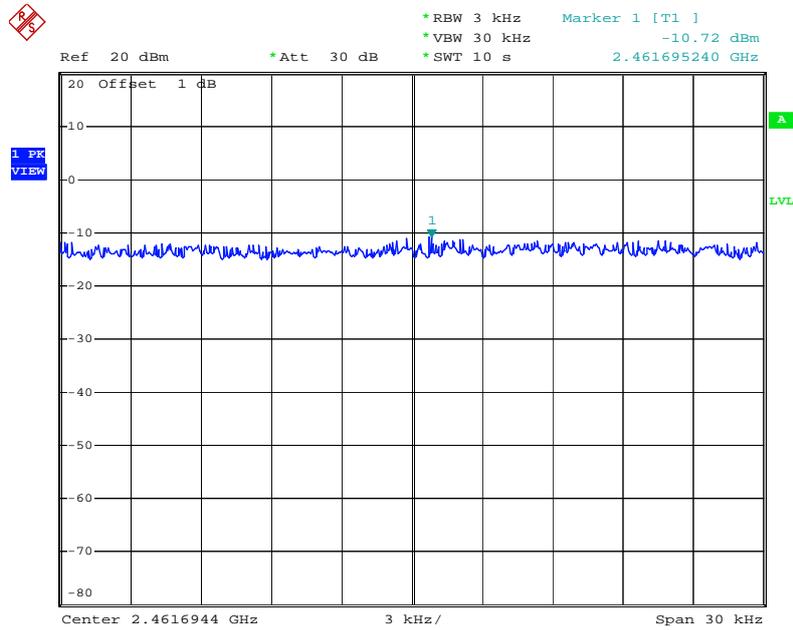


Date: 24.OCT.2009 15:26:20

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 / 2422 MHz

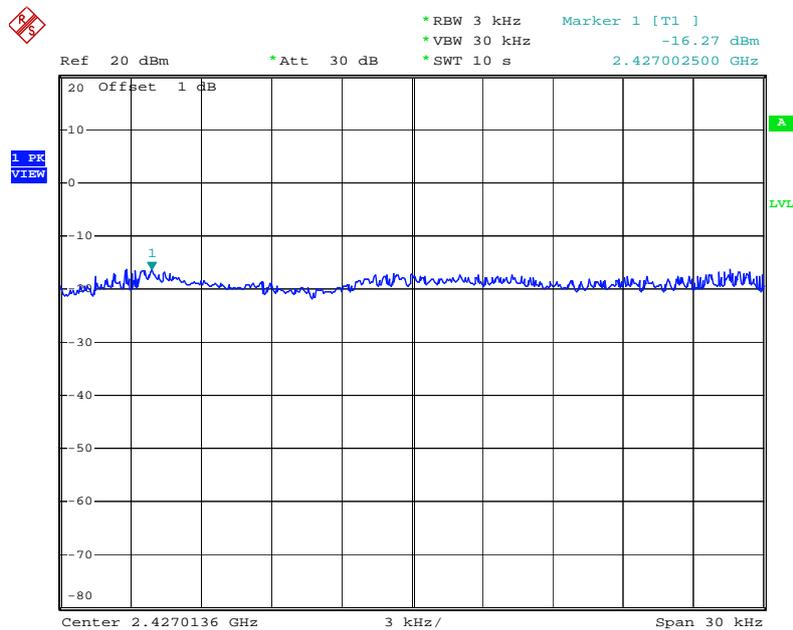


Date: 24.OCT.2009 15:35:29

### Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 / 2437 MHz

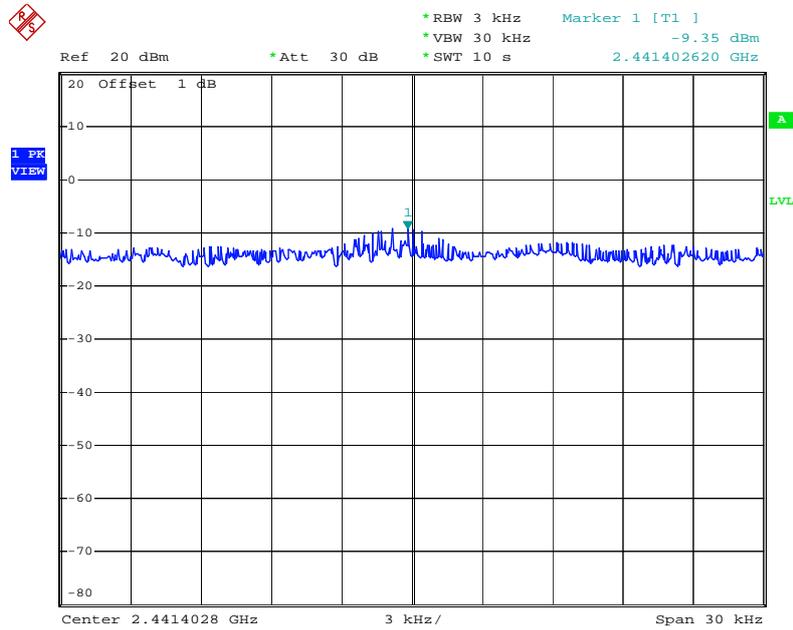


Date: 24.OCT.2009 15:33:50

### Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 / 2452 MHz

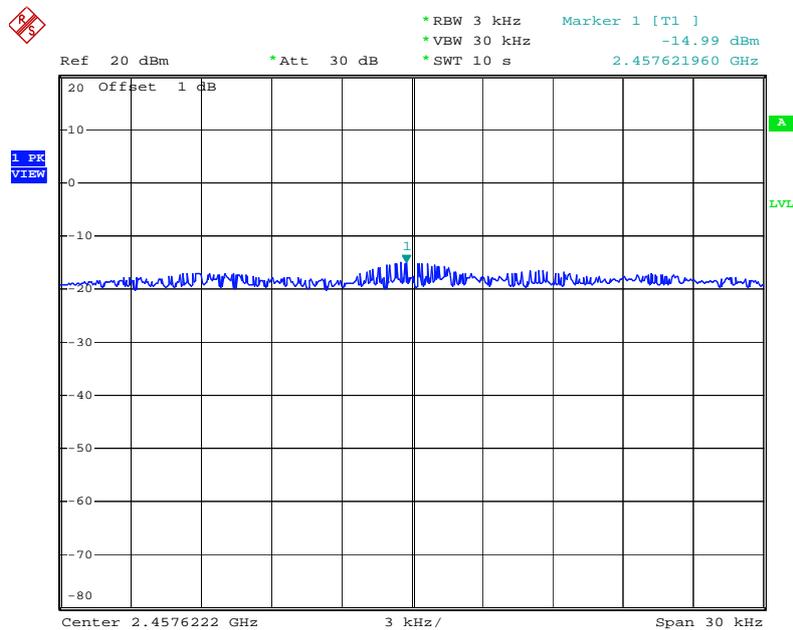


Date: 24.OCT.2009 15:40:58

### Power Density Plot on Configuration IEEE 802.11b Ant. 1 / 2412 MHz

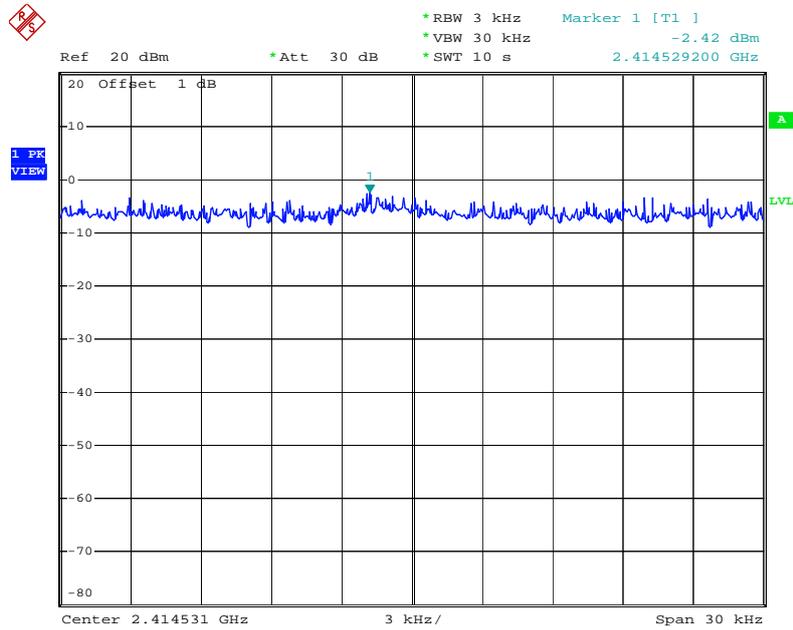


Date: 24.OCT.2009 14:51:20

### Power Density Plot on Configuration IEEE 802.11b Ant. 1 / 2437 MHz

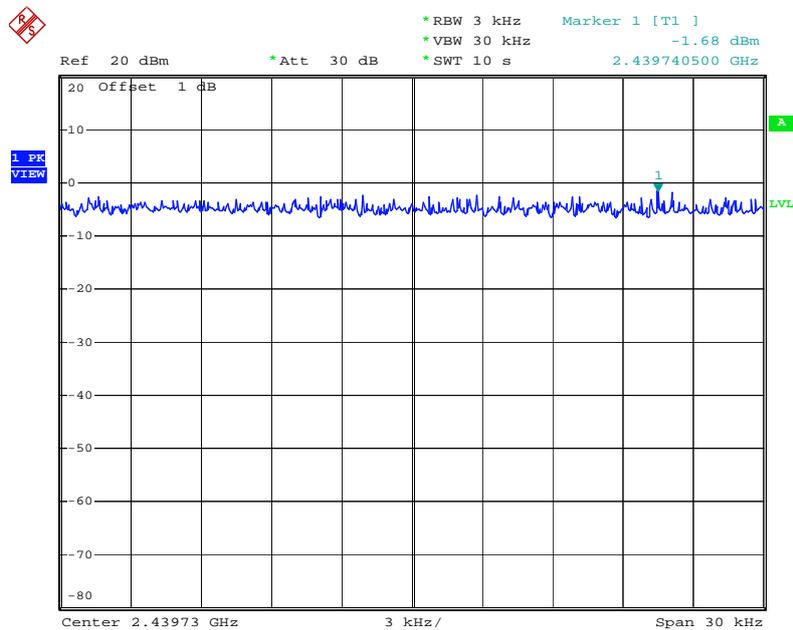


Date: 24.OCT.2009 15:11:00

### Power Density Plot on Configuration IEEE 802.11b Ant. 1 / 2462 MHz

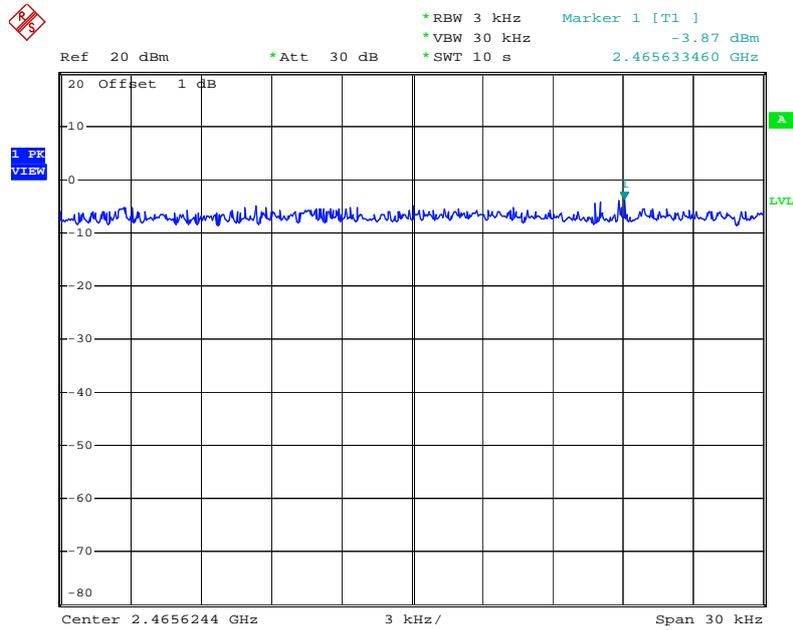


Date: 24.OCT.2009 15:16:11

### Power Density Plot on Configuration IEEE 802.11g Ant. 1 / 2412 MHz

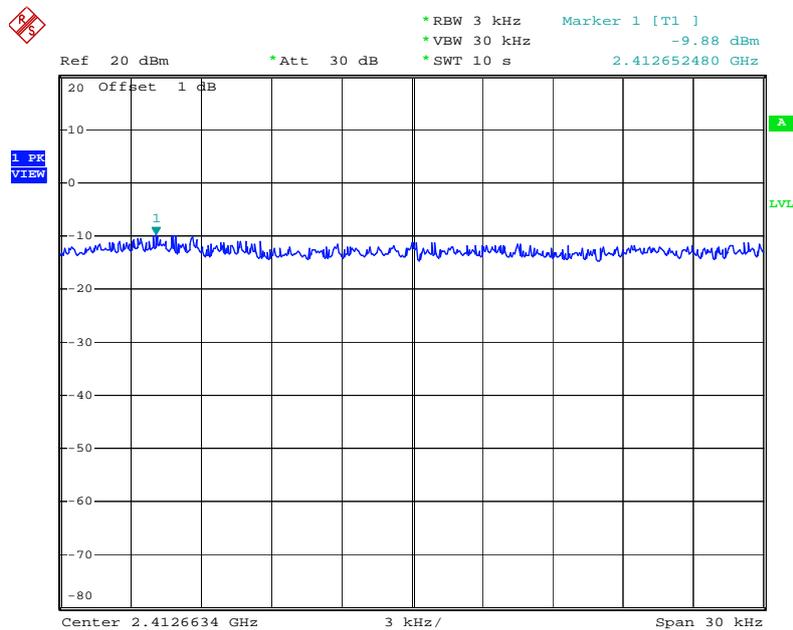


Date: 24.OCT.2009 15:21:24

### Power Density Plot on Configuration IEEE 802.11g Ant. 1 / 2437 MHz

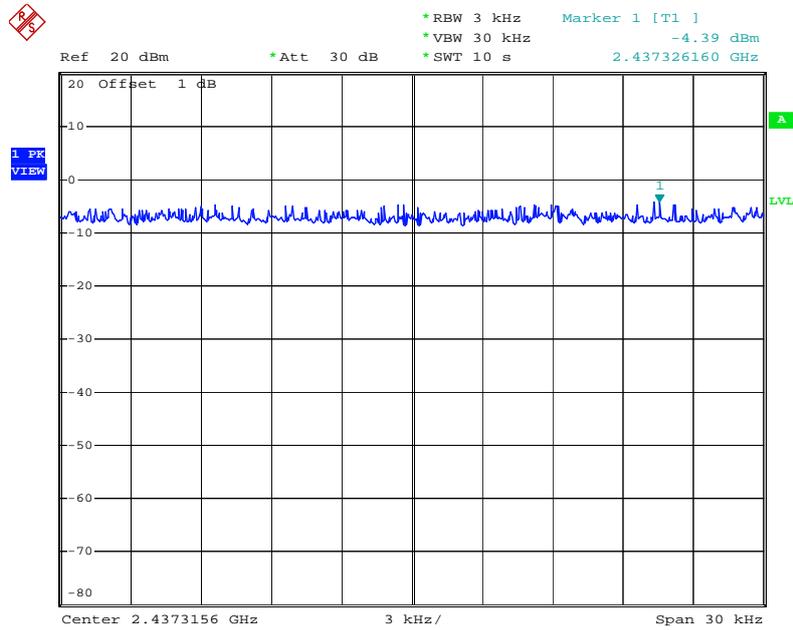

Date: 24.OCT.2009 15:19:06


### Power Density Plot on Configuration IEEE 802.11g Ant. 1 / 2462 MHz

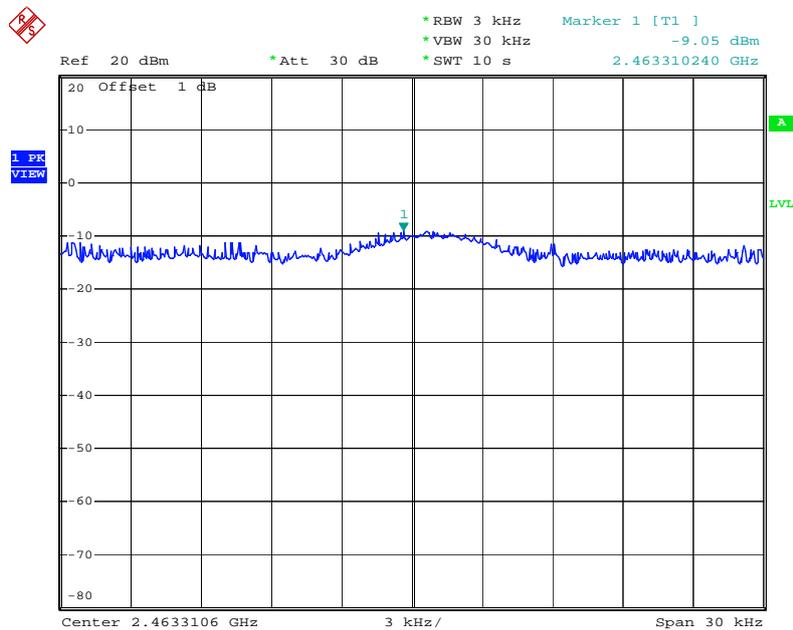

Date: 24.OCT.2009 15:23:40


<For Antenna 2>

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 2 / 2412 MHz

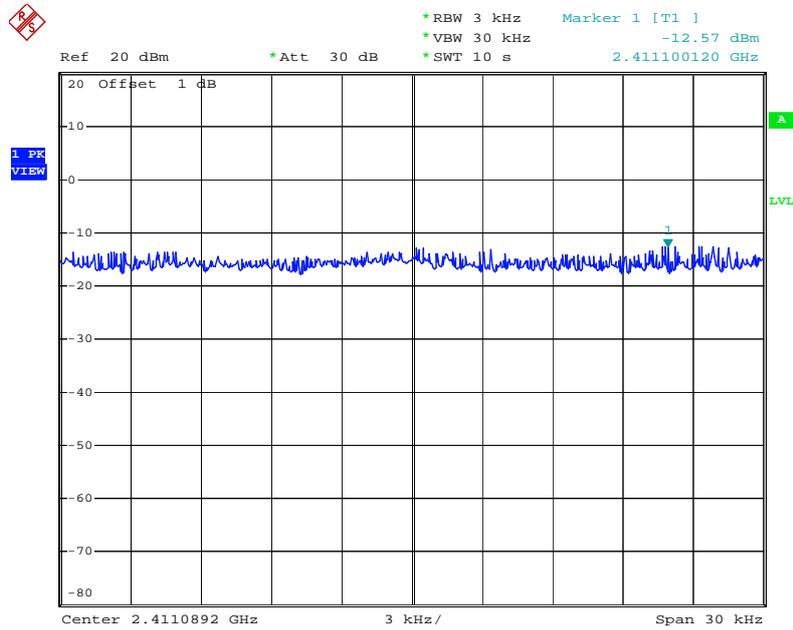


Date: 24.OCT.2009 12:26:26

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 2 / 2437 MHz

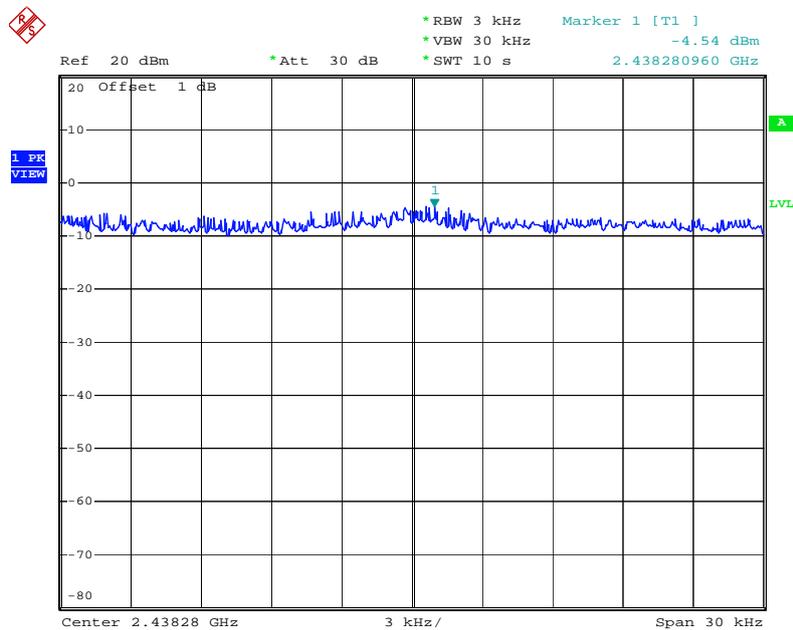


Date: 24.OCT.2009 12:28:40

**Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 2 / 2462 MHz**

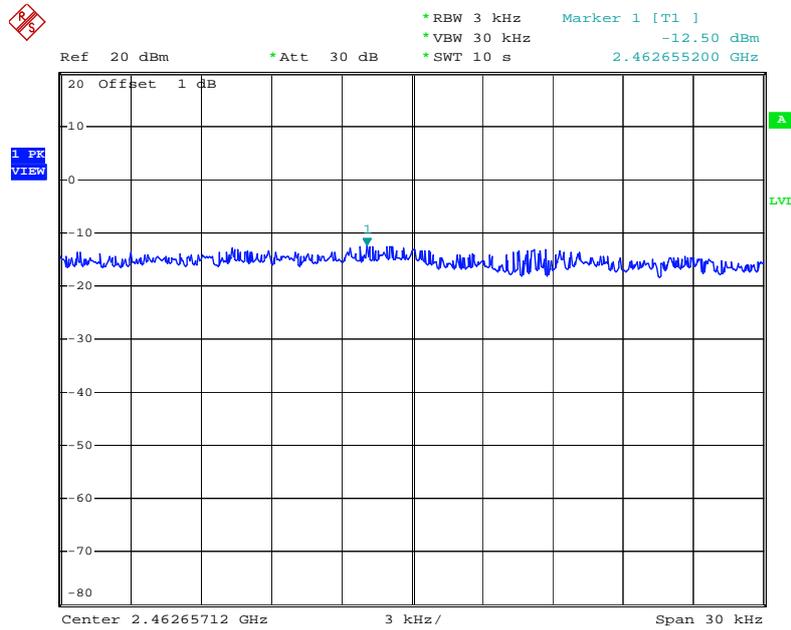


Date: 24.OCT.2009 12:23:30

**Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 2 / 2422 MHz**

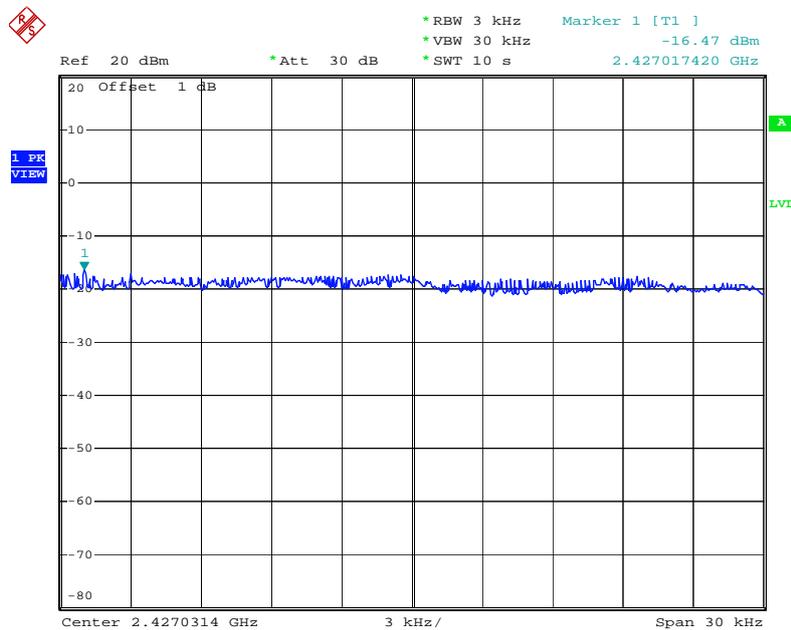


Date: 24.OCT.2009 12:36:22

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 2 / 2437 MHz

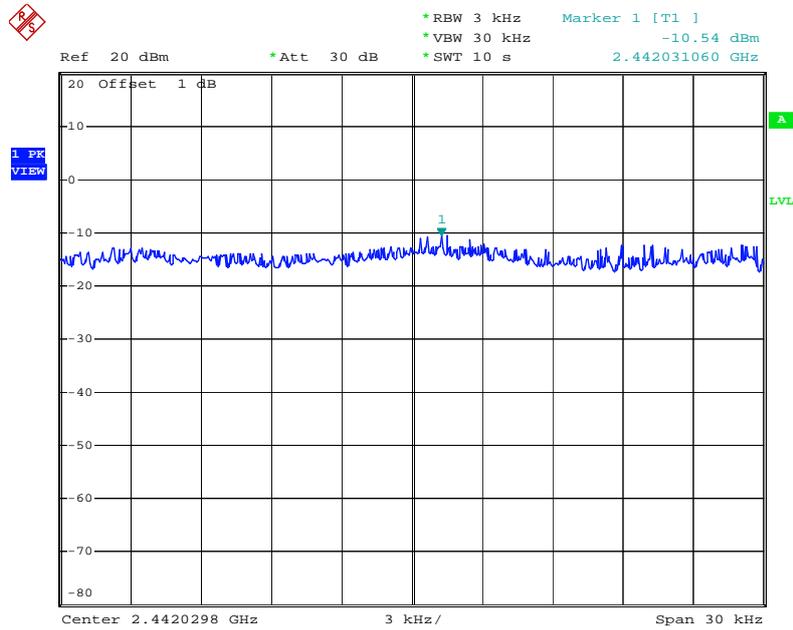


Date: 24.OCT.2009 12:44:01

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 2 / 2452 MHz

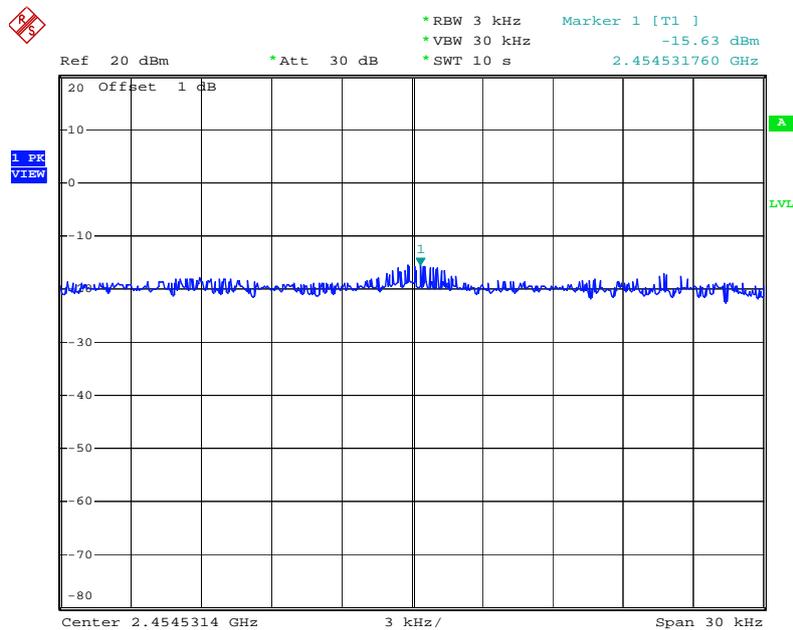


Date: 24.OCT.2009 12:39:37

**Power Density Plot on Configuration IEEE 802.11b Ant. 2 / 2412 MHz**

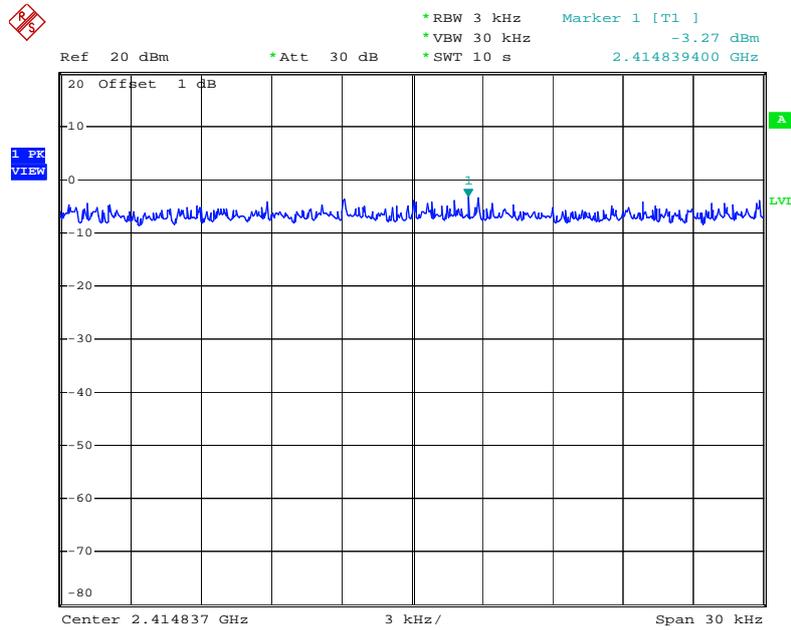


Date: 24.OCT.2009 12:04:00

**Power Density Plot on Configuration IEEE 802.11b Ant. 2 / 2437 MHz**

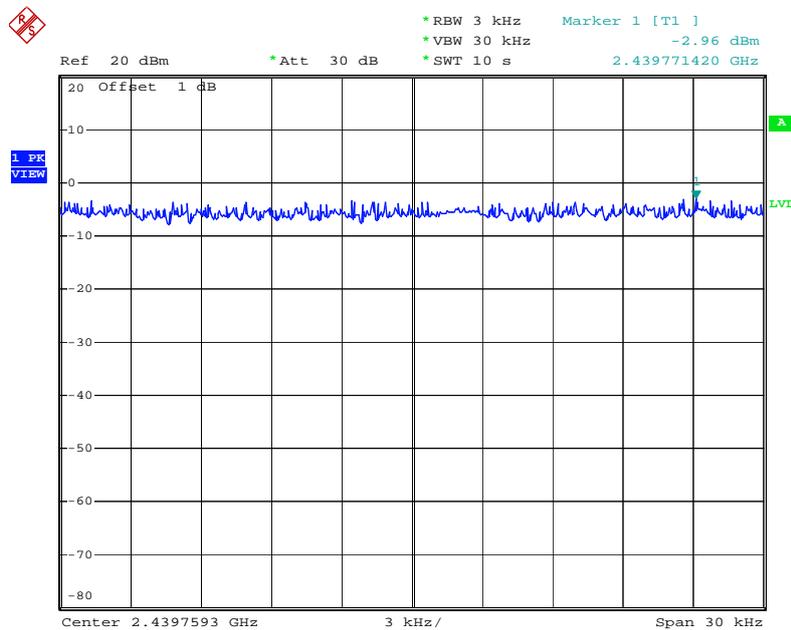


Date: 24.OCT.2009 12:01:45

### Power Density Plot on Configuration IEEE 802.11b Ant. 2 / 2462 MHz

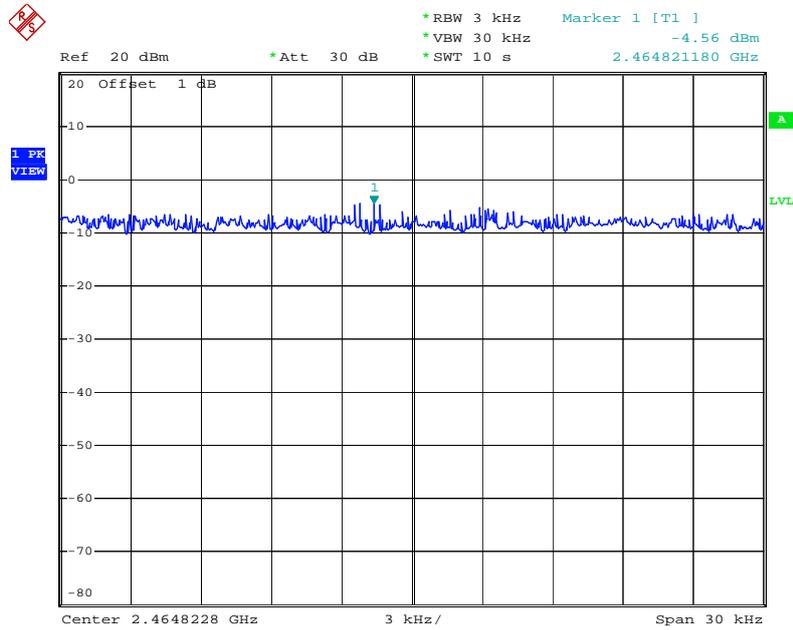


Date: 24.OCT.2009 12:06:53

### Power Density Plot on Configuration IEEE 802.11g Ant. 2 / 2412 MHz

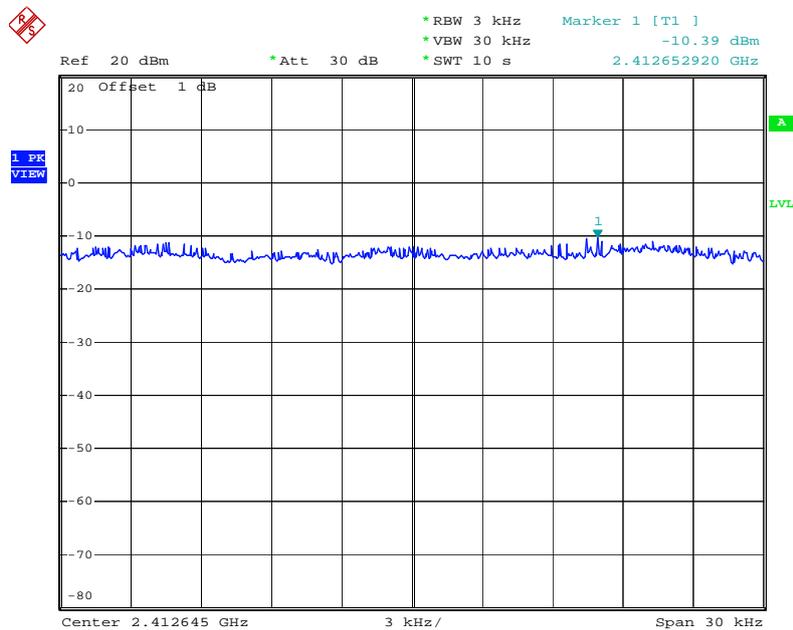


Date: 24.OCT.2009 12:18:36

**Power Density Plot on Configuration IEEE 802.11g Ant. 2 / 2437 MHz**

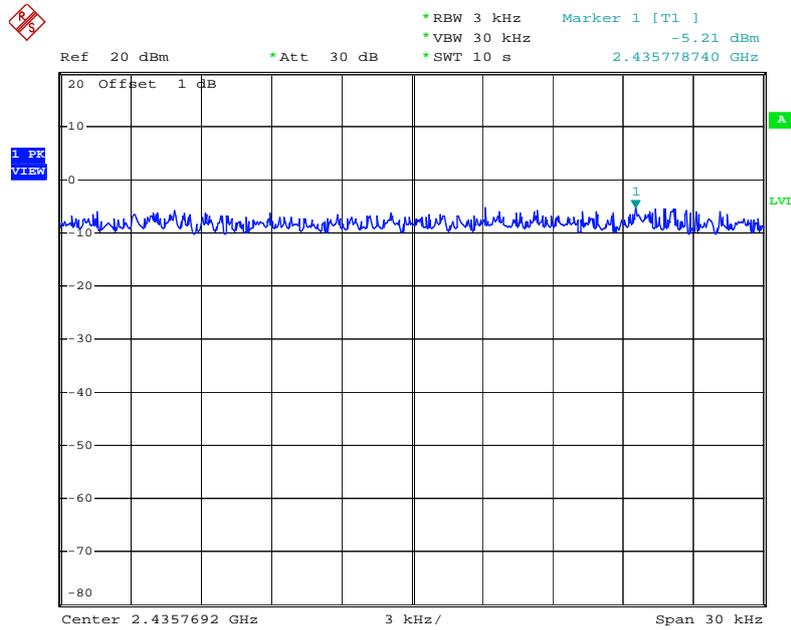

Date: 24.OCT.2009 12:14:28

**Power Density Plot on Configuration IEEE 802.11g Ant. 2 / 2462 MHz**

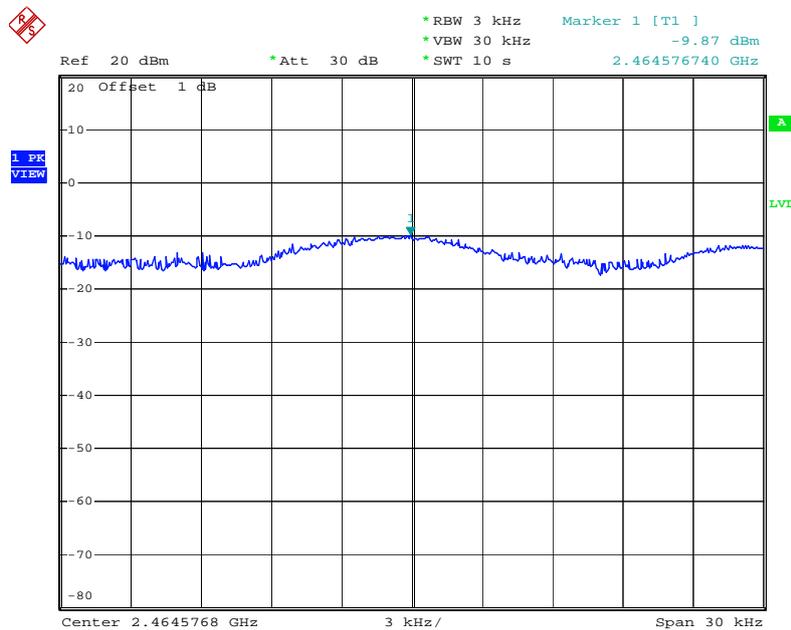

Date: 24.OCT.2009 12:16:52

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

##### 4.4.4. Test Setup Layout

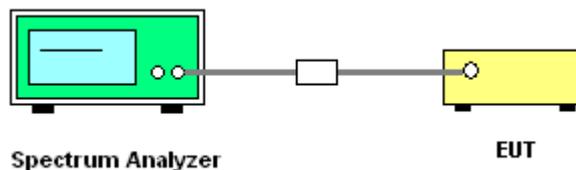

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Antenna 1 >

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n / Antenna 1

##### Configuration Draft n MCS0 20MHz Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.00	17.64	500	Complies
6	2437 MHz	15.04	17.64	500	Complies
11	2462 MHz	16.40	17.68	500	Complies

##### Configuration Draft n MCS0 40MHz Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.92	36.32	500	Complies
6	2437 MHz	35.44	36.24	500	Complies
9	2452 MHz	36.08	36.32	500	Complies

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b/g / Antenna 1

**Configuration IEEE 802.11b Ant. 1**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	7.04	12.12	500	Complies
6	2437 MHz	8.08	12.20	500	Complies
11	2462 MHz	7.56	12.12	500	Complies

**Configuration IEEE 802.11g Ant. 1**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.08	16.60	500	Complies
6	2437 MHz	15.08	16.60	500	Complies
11	2462 MHz	15.28	16.60	500	Complies

## &lt;For Antenna 2&gt;

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n / Antenna 2

## Configuration Draft n MCS0 20MHz Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.04	17.64	500	Complies
6	2437 MHz	15.88	17.68	500	Complies
11	2462 MHz	15.04	17.64	500	Complies

## Configuration Draft n MCS0 40MHz Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.32	36.32	500	Complies
6	2437 MHz	35.76	36.24	500	Complies
9	2452 MHz	35.68	36.24	500	Complies

<b>Temperature</b>	24.3°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b/g / Antenna 2

**Configuration IEEE 802.11b Ant. 2**


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	6.60	12.16	500	Complies
6	2437 MHz	6.60	12.16	500	Complies
11	2462 MHz	6.08	12.12	500	Complies

**Configuration IEEE 802.11g Ant. 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	13.84	16.60	500	Complies
6	2437 MHz	12.60	16.60	500	Complies
11	2462 MHz	10.08	16.28	500	Complies


<For Antenna 1>

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2412 MHz

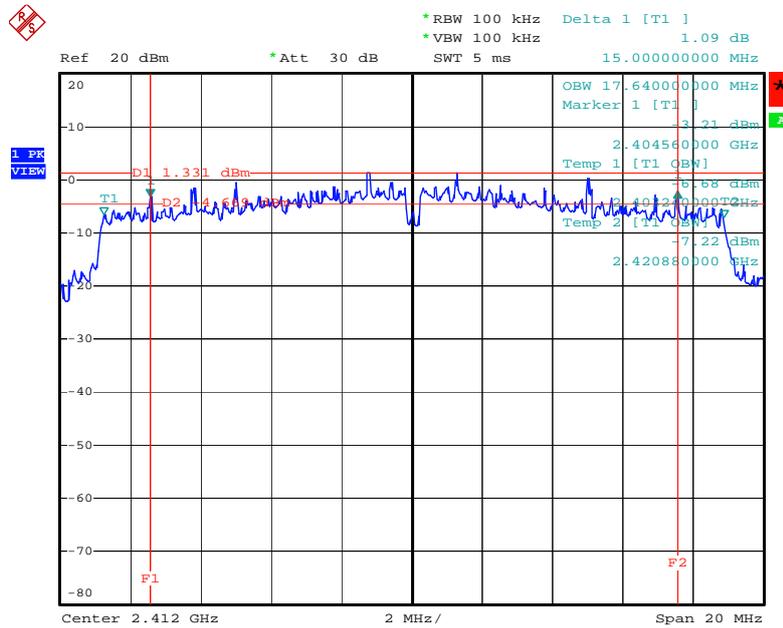


Date: 24.OCT.2009 15:47:43

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2437 MHz

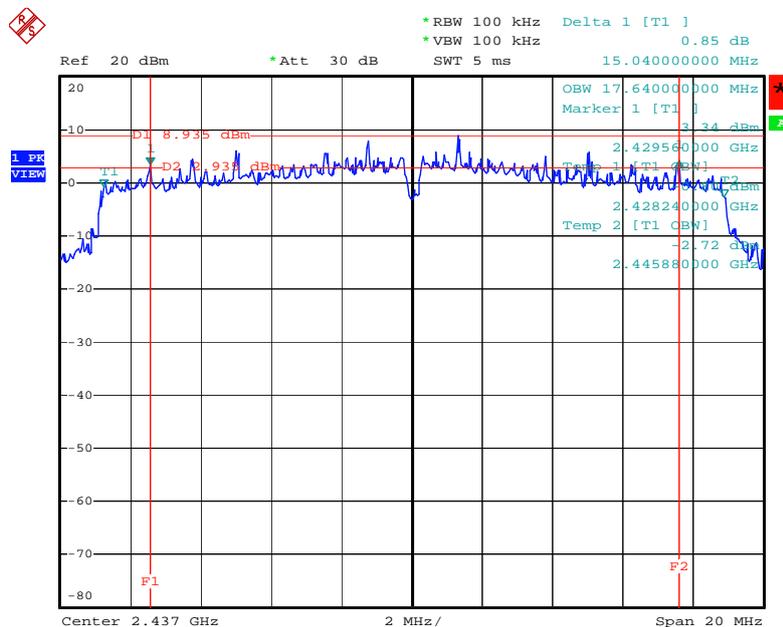


Date: 24.OCT.2009 15:46:44

### 6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2462 MHz

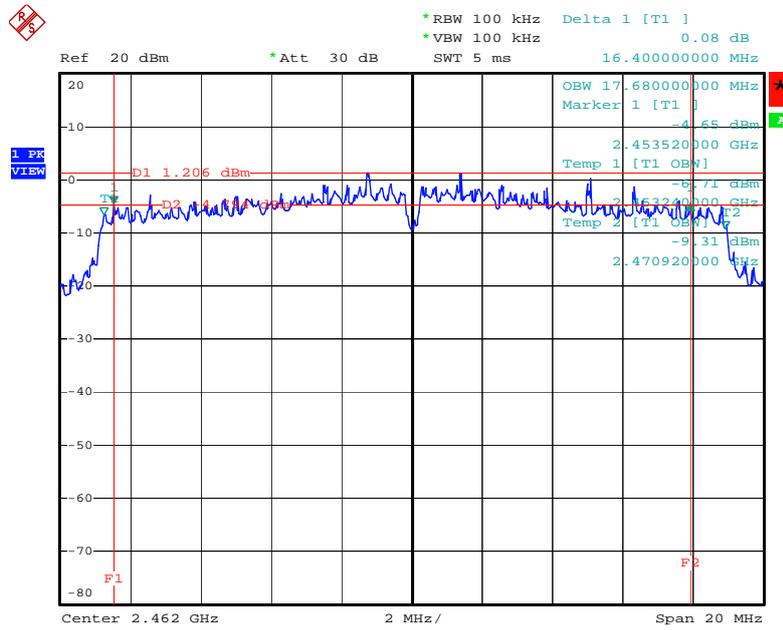


Date: 24.OCT.2009 16:14:30

### 6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2422 MHz

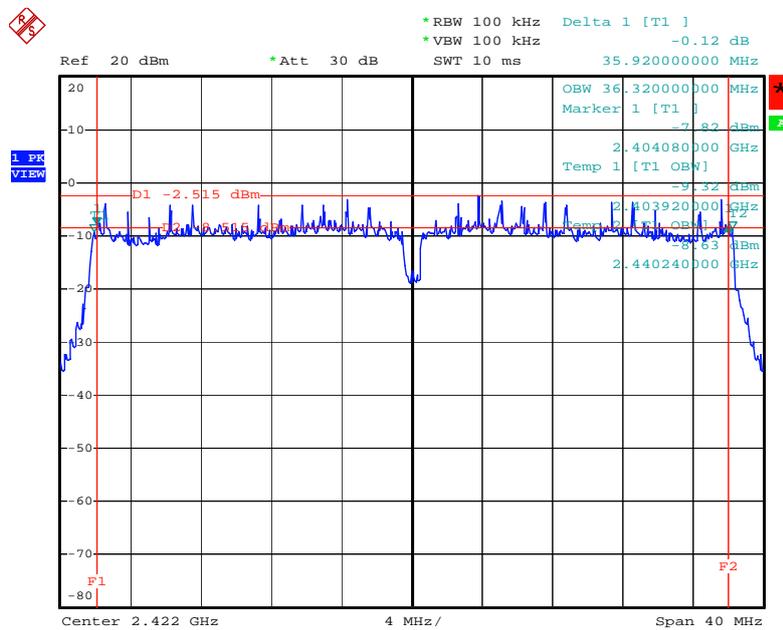


Date: 24.OCT.2009 15:43:40

6 dB Bandwidth Plot on Configuration Drafft n MCS0 40MHz Ant. 1 / 2437 MHz

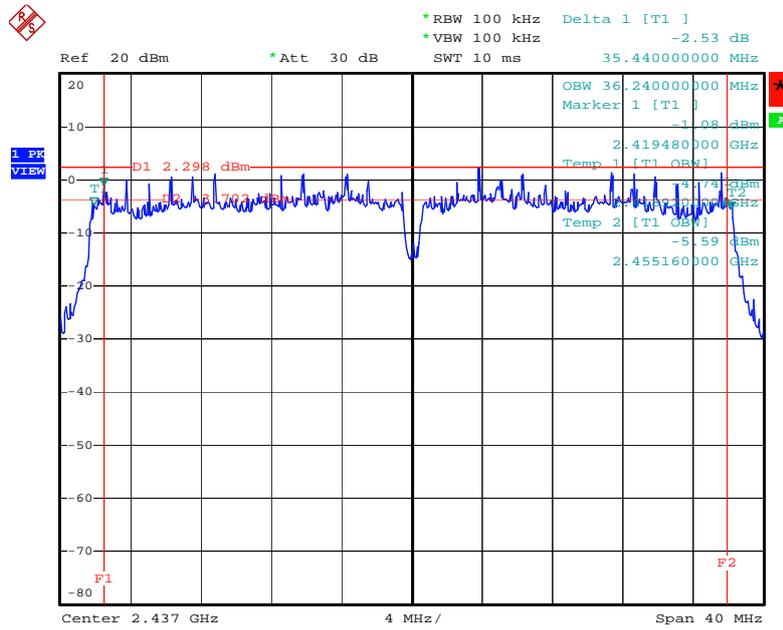


Date: 24.OCT.2009 15:42:49

6 dB Bandwidth Plot on Configuration Drafft n MCS0 40MHz Ant. 1 / 2452 MHz

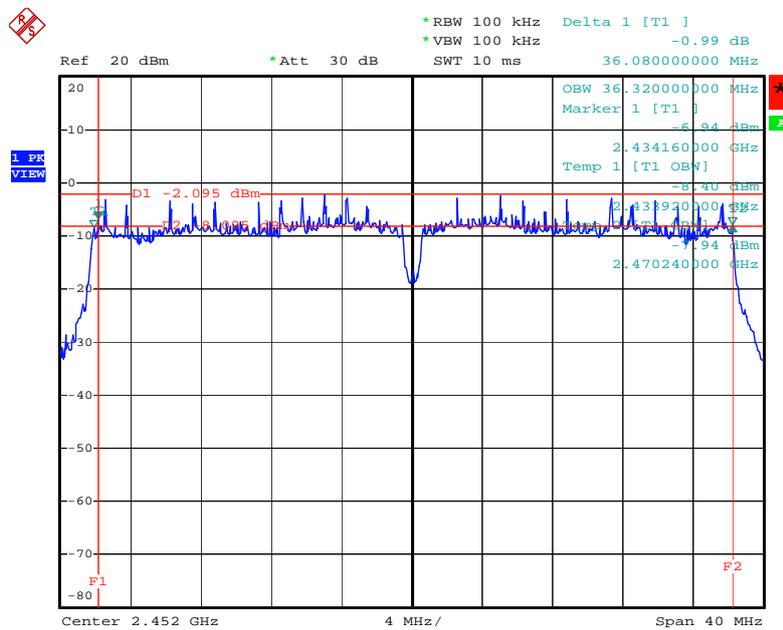


Date: 24.OCT.2009 15:41:59

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1 / 2412 MHz

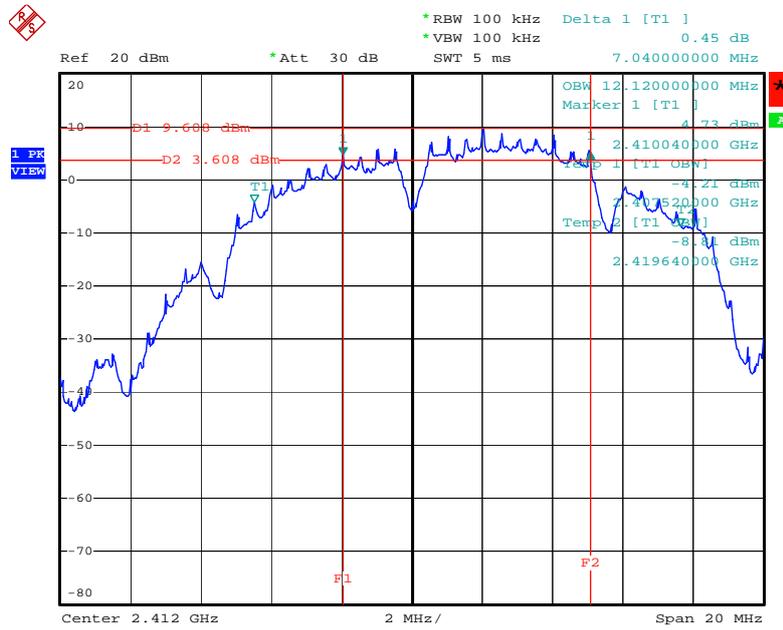


Date: 24.OCT.2009 16:07:55

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1 / 2437 MHz

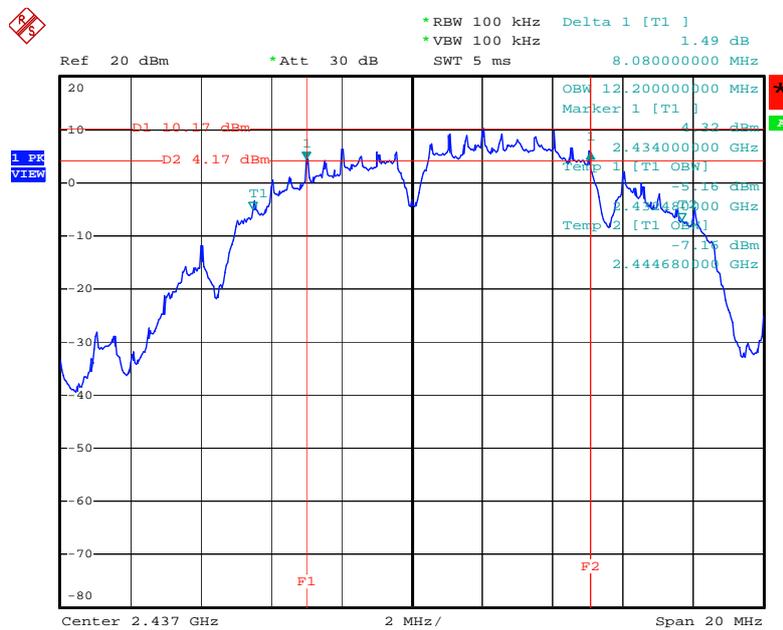


Date: 24.OCT.2009 16:08:54

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1 / 2462 MHz

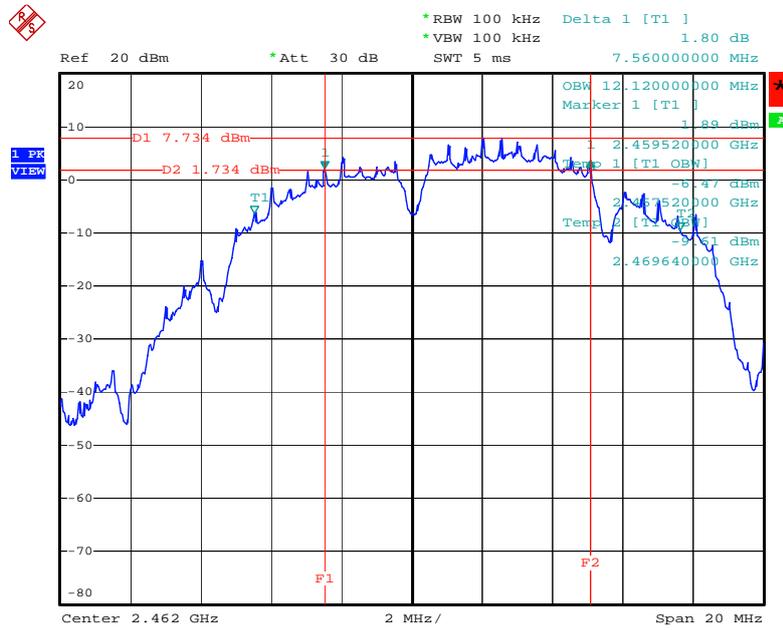


Date: 24.OCT.2009 16:09:46

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1 / 2412 MHz

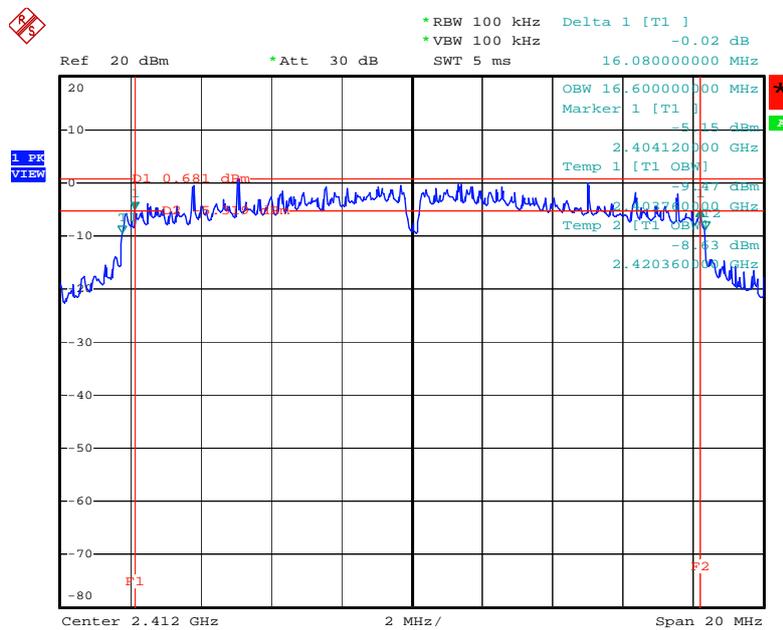


Date: 24.OCT.2009 15:57:43

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1 / 2437 MHz

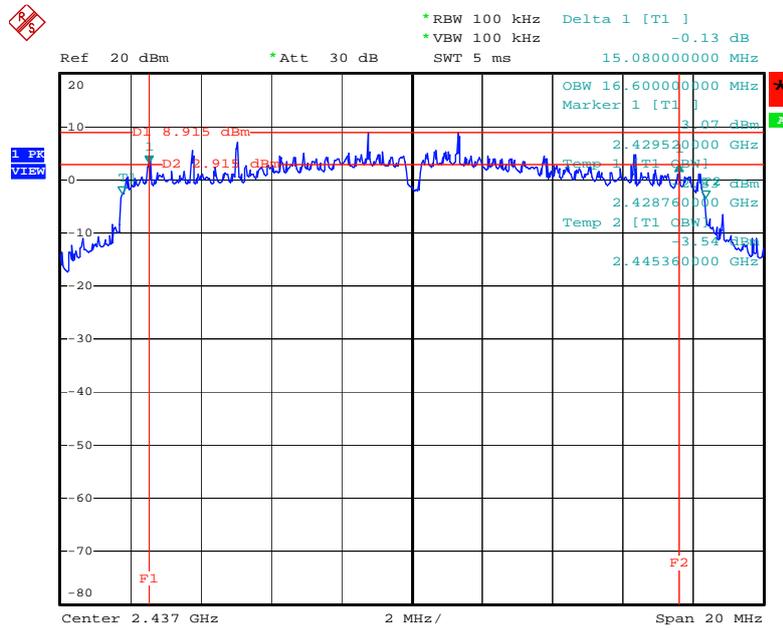

Date: 24.OCT.2009 16:00:25


### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1 / 2462 MHz

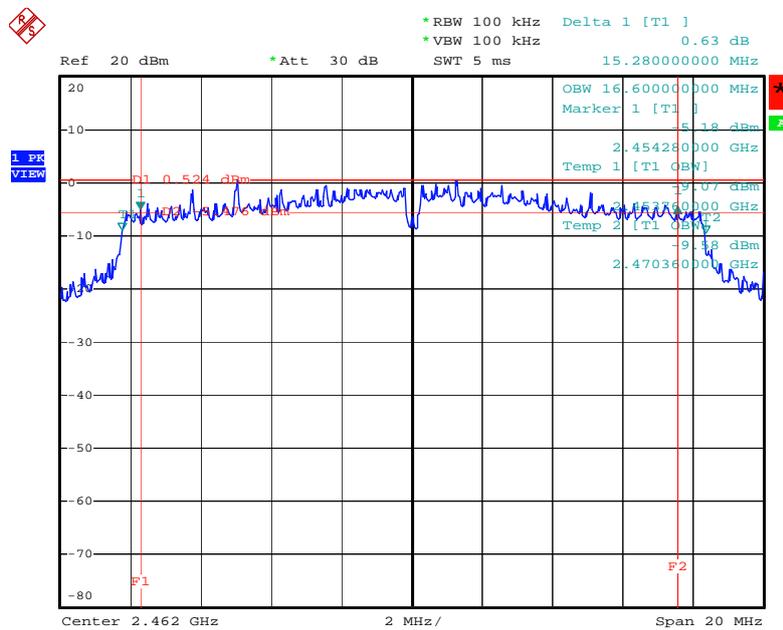

Date: 24.OCT.2009 16:12:40


<For Antenna 2>

6 dB Bandwidth Plot on Configuration Drafft n MCS0 20MHz Ant. 2 / 2412 MHz

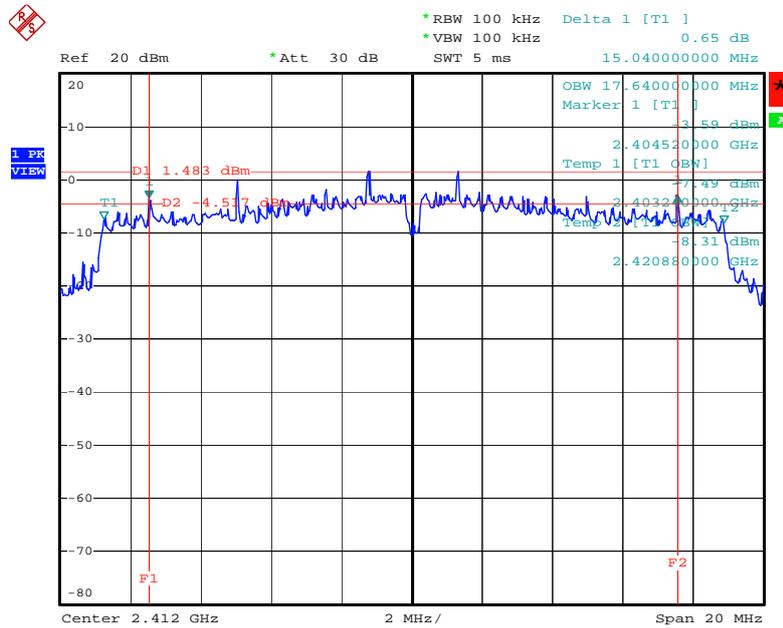


Date: 24.OCT.2009 12:53:24

6 dB Bandwidth Plot on Configuration Drafft n MCS0 20MHz Ant. 2 / 2437 MHz

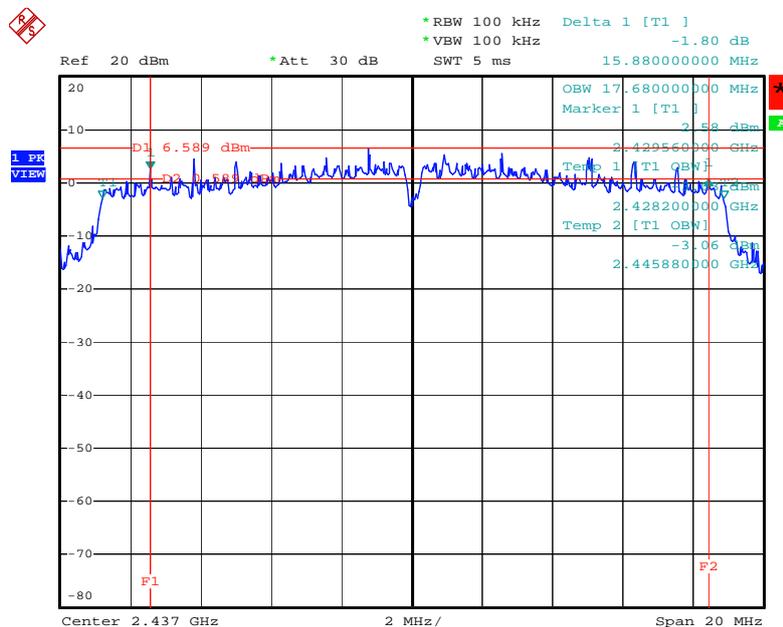


Date: 24.OCT.2009 12:52:09

### 6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2462 MHz

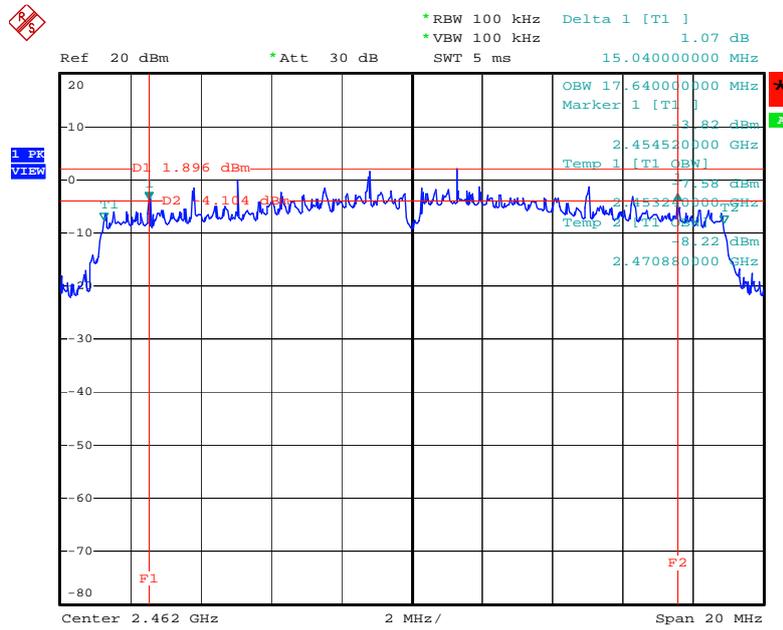


Date: 24.OCT.2009 12:54:05

### 6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2422 MHz

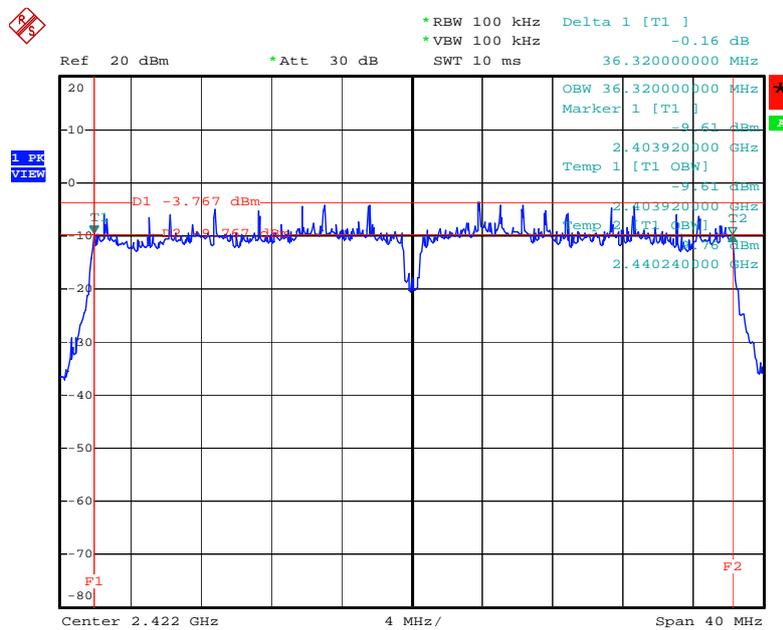


Date: 24.OCT.2009 12:55:47

### 6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2437 MHz

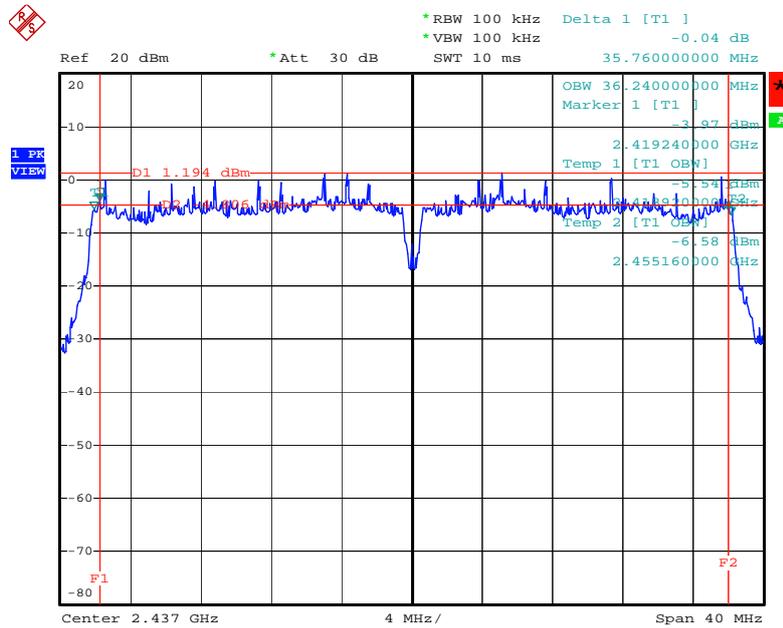


Date: 24.OCT.2009 12:55:07

### 6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2452 MHz

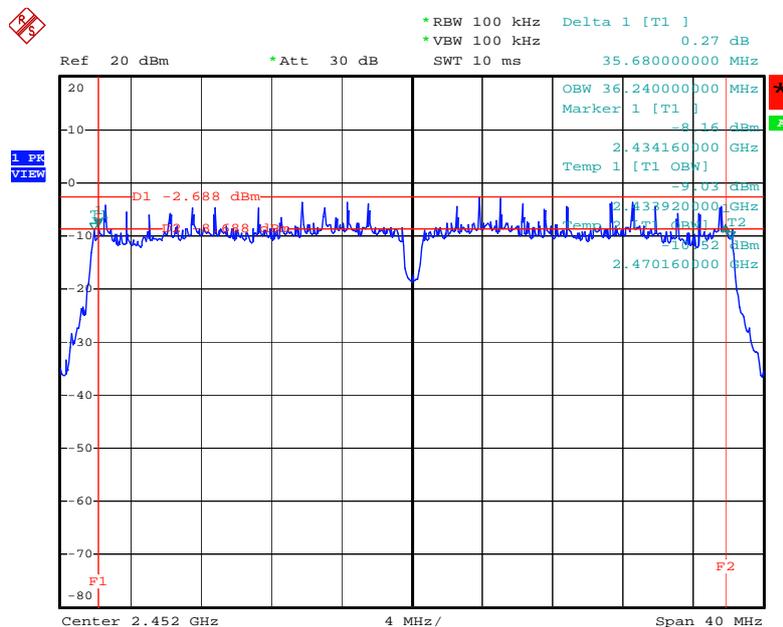


Date: 24.OCT.2009 12:56:31

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 2 / 2412 MHz

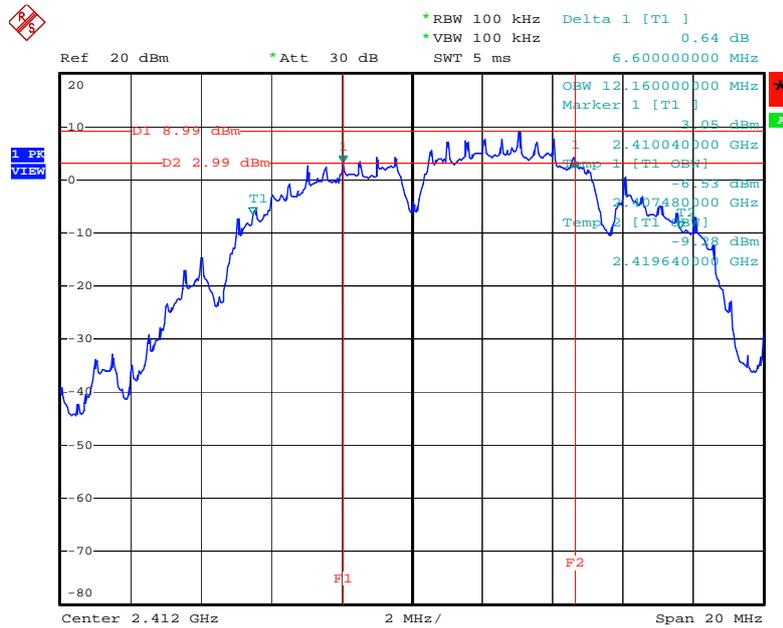


Date: 24.OCT.2009 12:46:34

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 2 / 2437 MHz

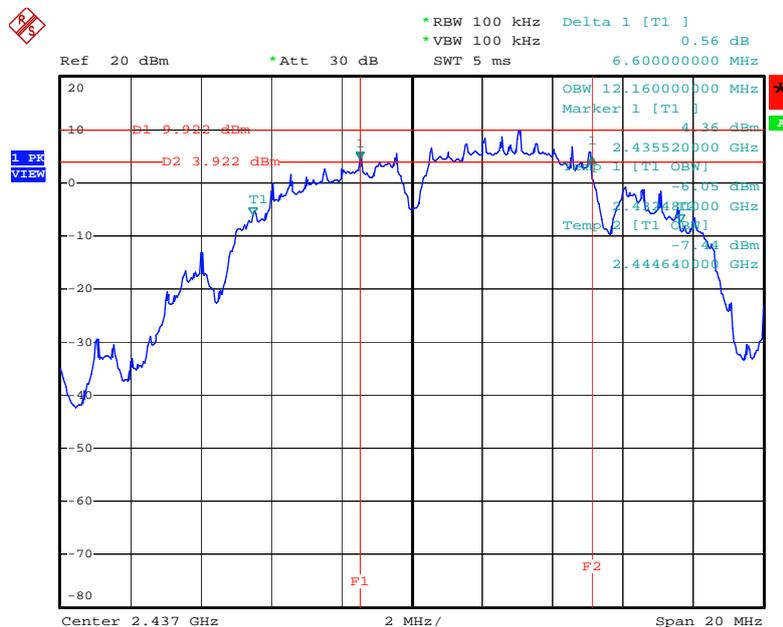


Date: 24.OCT.2009 11:54:44

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 2 / 2462 MHz

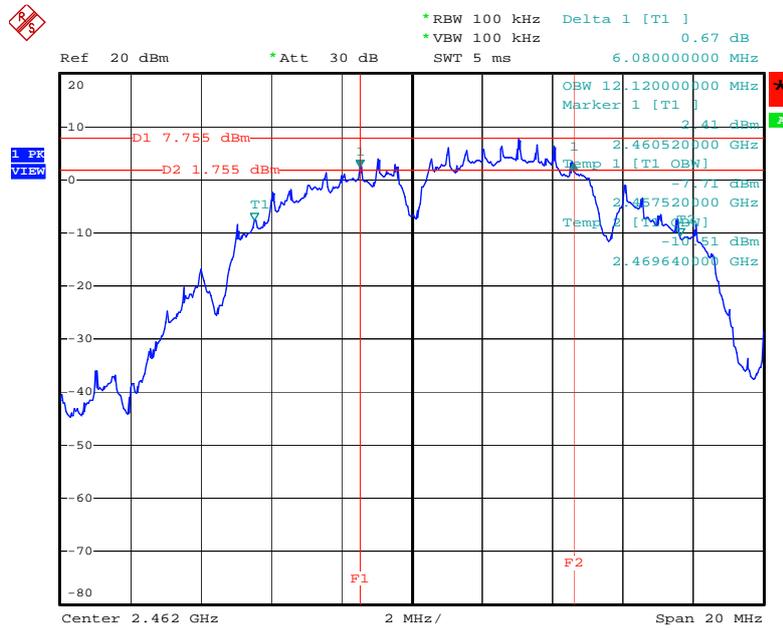


Date: 24.OCT.2009 11:51:39

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 2 / 2412 MHz

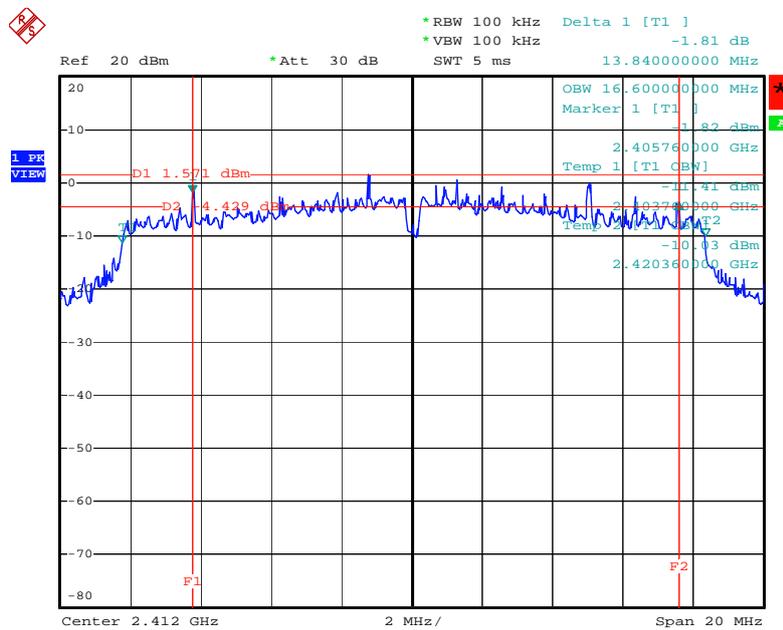


Date: 24.OCT.2009 12:48:28

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 2 / 2437 MHz

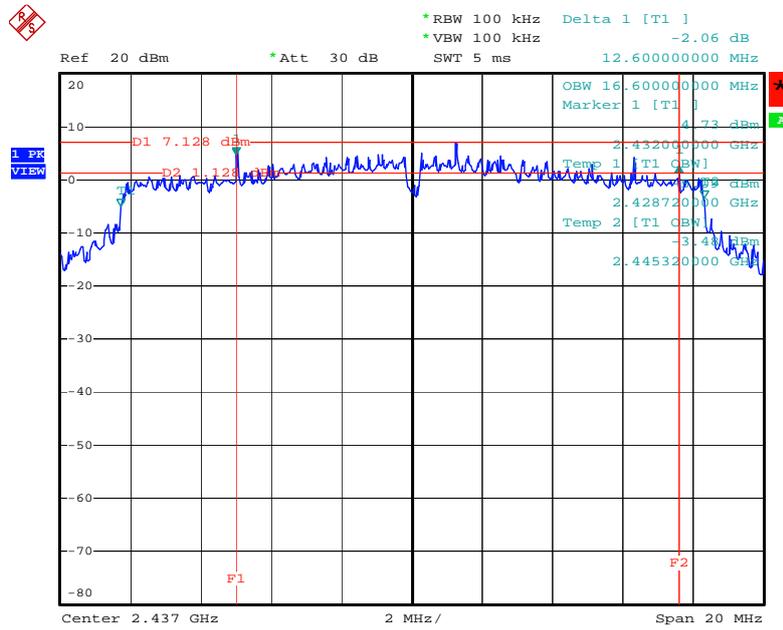

Date: 24.OCT.2009 12:47:27

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 2 / 2462 MHz

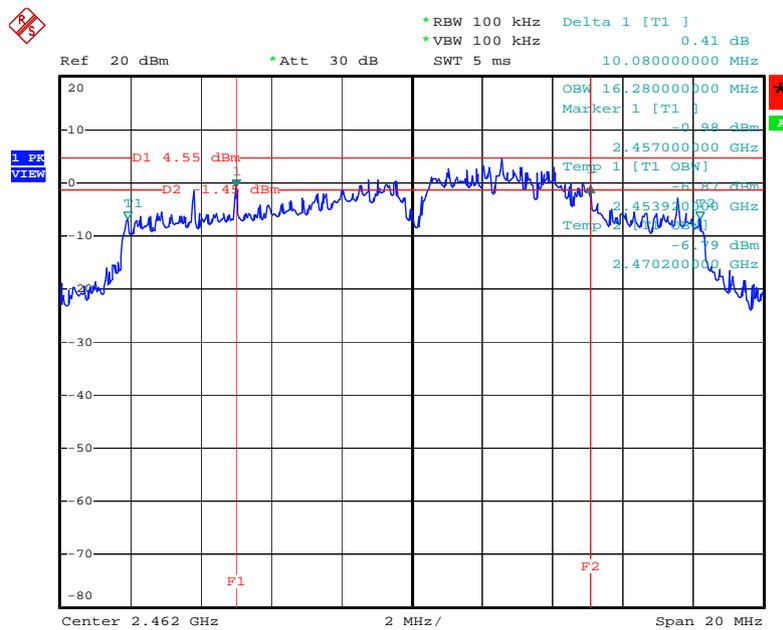

Date: 24.OCT.2009 12:50:51

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

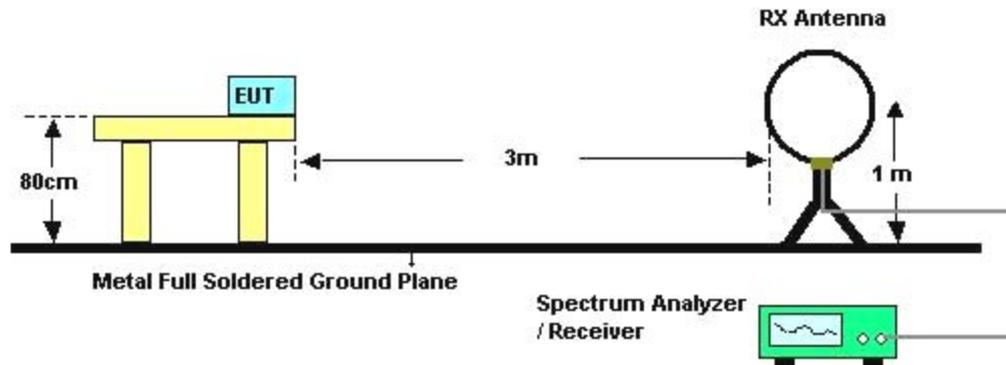

For radiated emissions above 30MHz

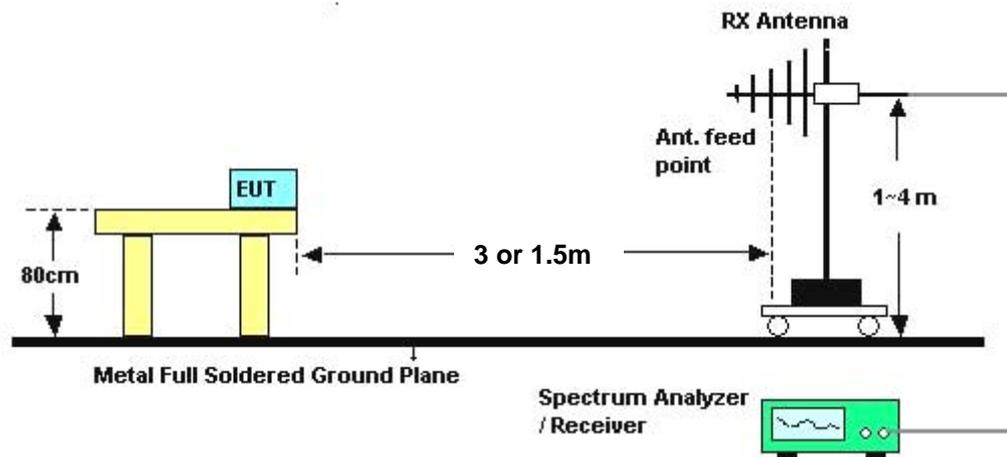

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Normal Link

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Normal Link / Mode 2

Horizontal

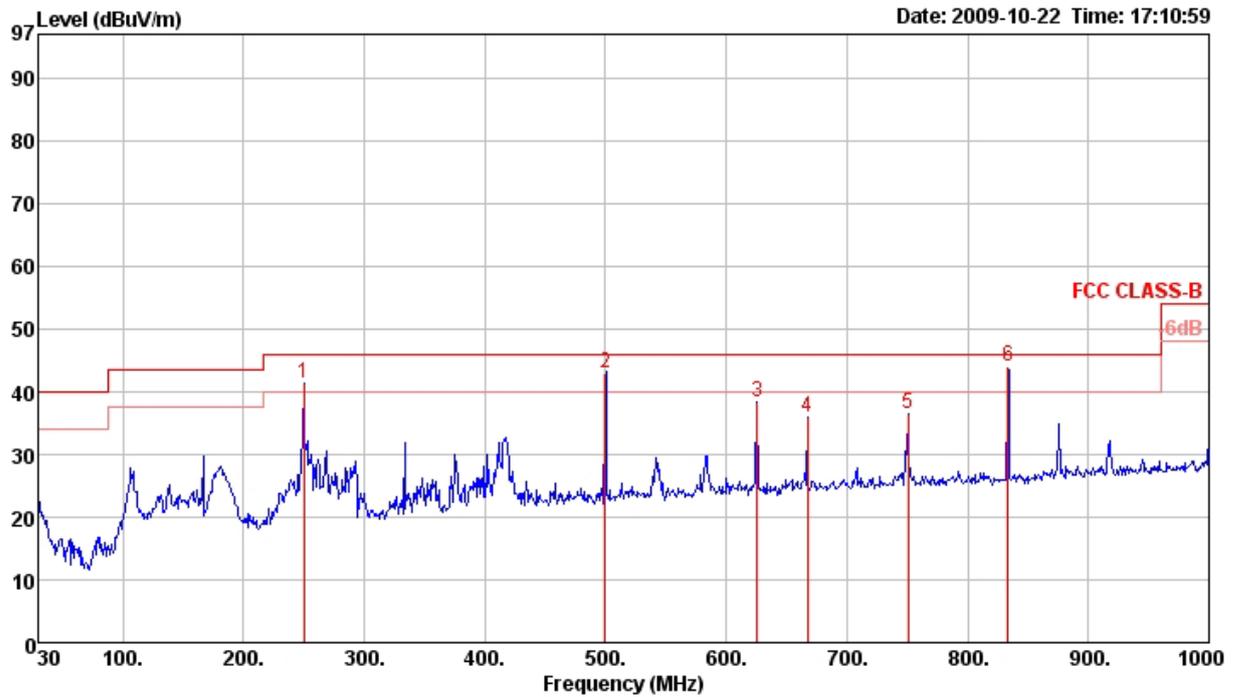

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	250.19	41.36	46.00	-4.64	53.69	1.90	27.00	12.77	0	100	Peak	HORIZONTAL
2 !	500.00	42.91	46.00	-3.09	50.68	2.70	28.10	17.63	25	100	QP	HORIZONTAL
3	625.58	38.41	46.00	-7.59	44.58	3.05	28.07	18.85	0	100	Peak	HORIZONTAL
4	667.29	36.03	46.00	-9.97	41.65	3.43	28.03	18.98	0	100	Peak	HORIZONTAL
5	750.71	36.58	46.00	-9.42	41.45	3.50	27.80	19.43	0	100	Peak	HORIZONTAL
6 q	833.34	43.97	46.00	-2.03	48.10	3.37	27.53	20.03	166	109	QP	HORIZONTAL

**Vertical**

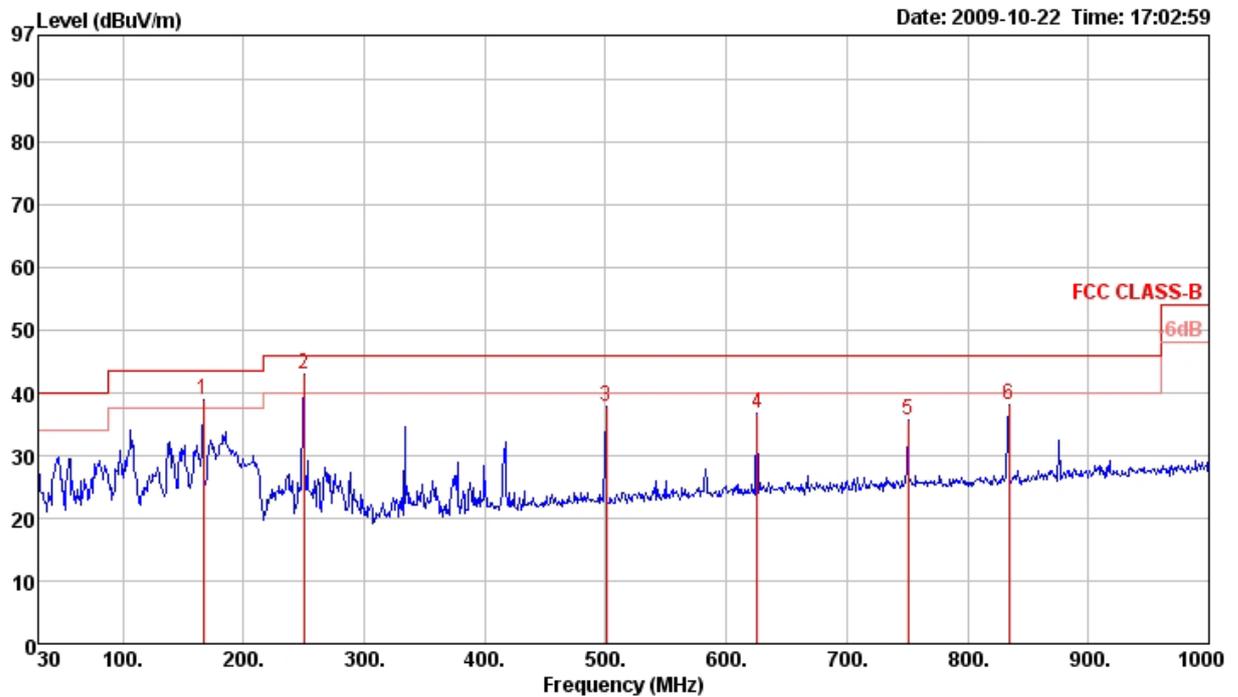

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	166.77	38.81	43.50	-4.69	52.01	1.53	27.27	12.54	0	400	Peak	VERTICAL
2 p	250.19	42.99	46.00	-3.01	55.32	1.90	27.00	12.77	0	400	Peak	VERTICAL
3	500.45	37.90	46.00	-8.10	45.67	2.70	28.10	17.63	0	400	Peak	VERTICAL
4	625.58	36.61	46.00	-9.39	42.78	3.05	28.07	18.85	0	400	Peak	VERTICAL
5	750.71	35.73	46.00	-10.27	40.60	3.50	27.80	19.43	0	400	Peak	VERTICAL
6	834.13	38.14	46.00	-7.86	42.27	3.37	27.53	20.03	0	400	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

<For Antenna 1 >


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 20MHz Ch 1 / Ant. 1

Horizontal

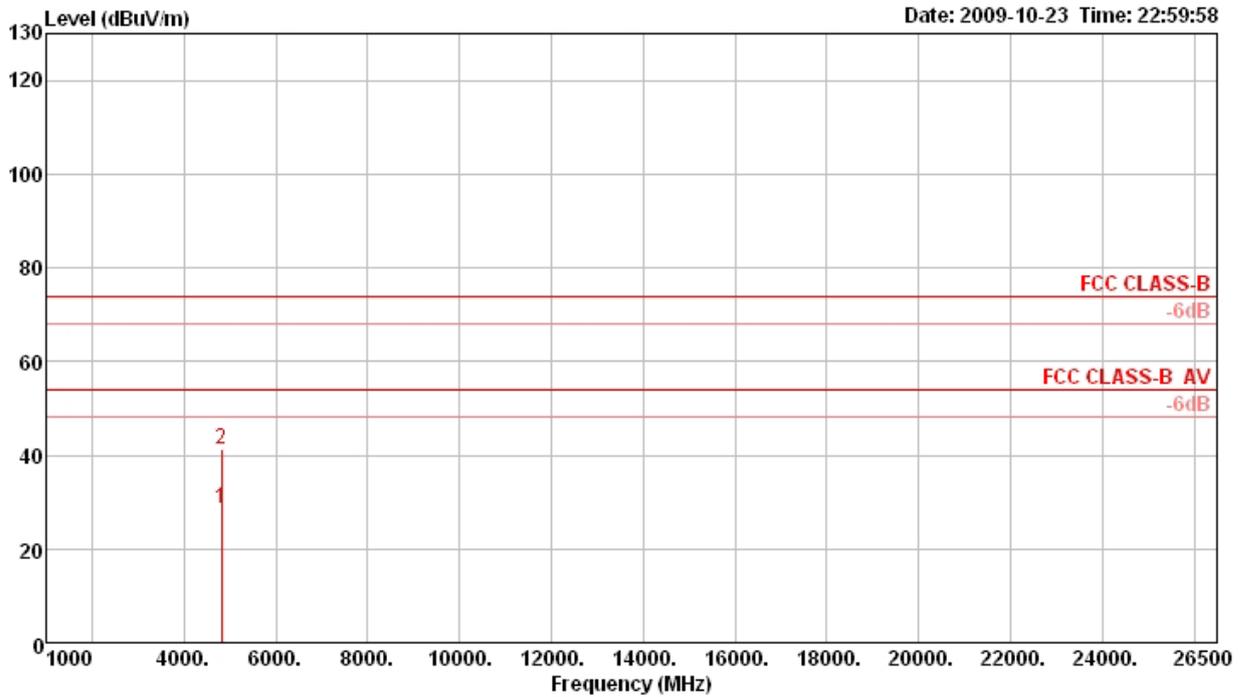

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.90	28.70	54.00	-25.30	28.50	3.00	35.26	32.46	26	197	Average	HORIZONTAL
2 p	4824.02	41.11	74.00	-32.89	40.91	3.00	35.26	32.46	26	197	Peak	HORIZONTAL


**Vertical**

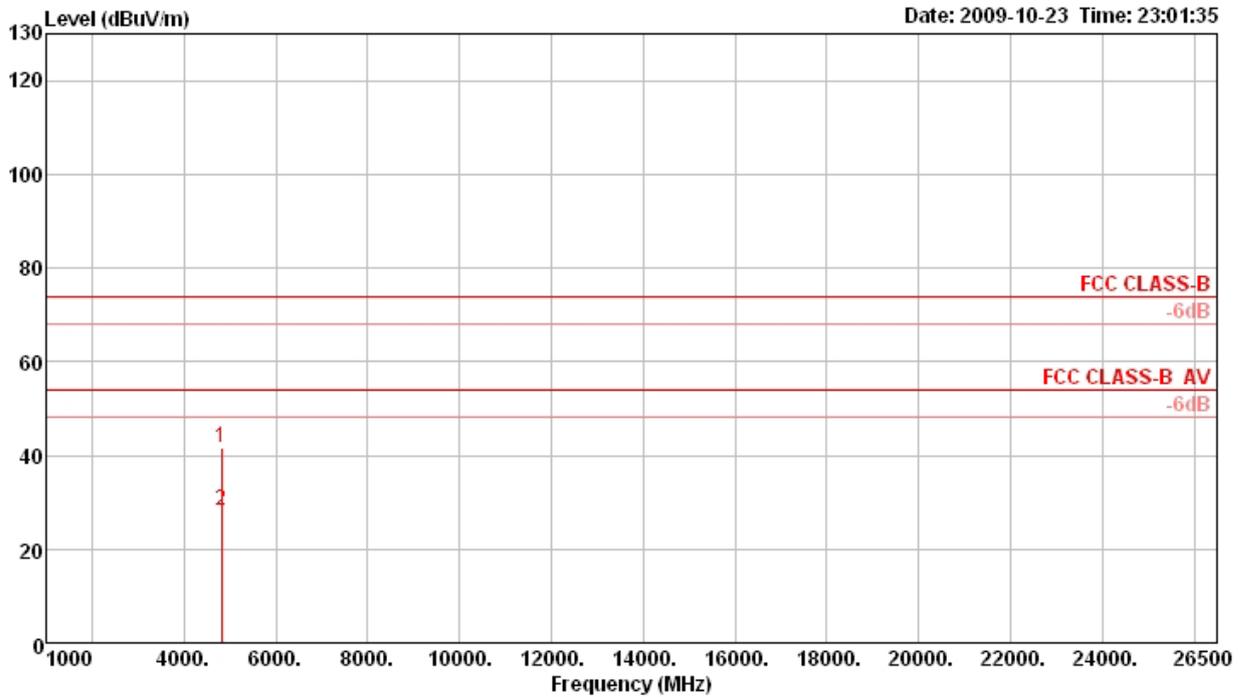

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.99	41.73	74.00	-32.27	41.53	3.00	35.26	32.46	215	116	Peak	VERTICAL
2 a	4824.00	28.35	54.00	-25.65	28.15	3.00	35.26	32.46	215	116	Average	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 20MHz Ch 6 / Ant. 1

**Horizontal**

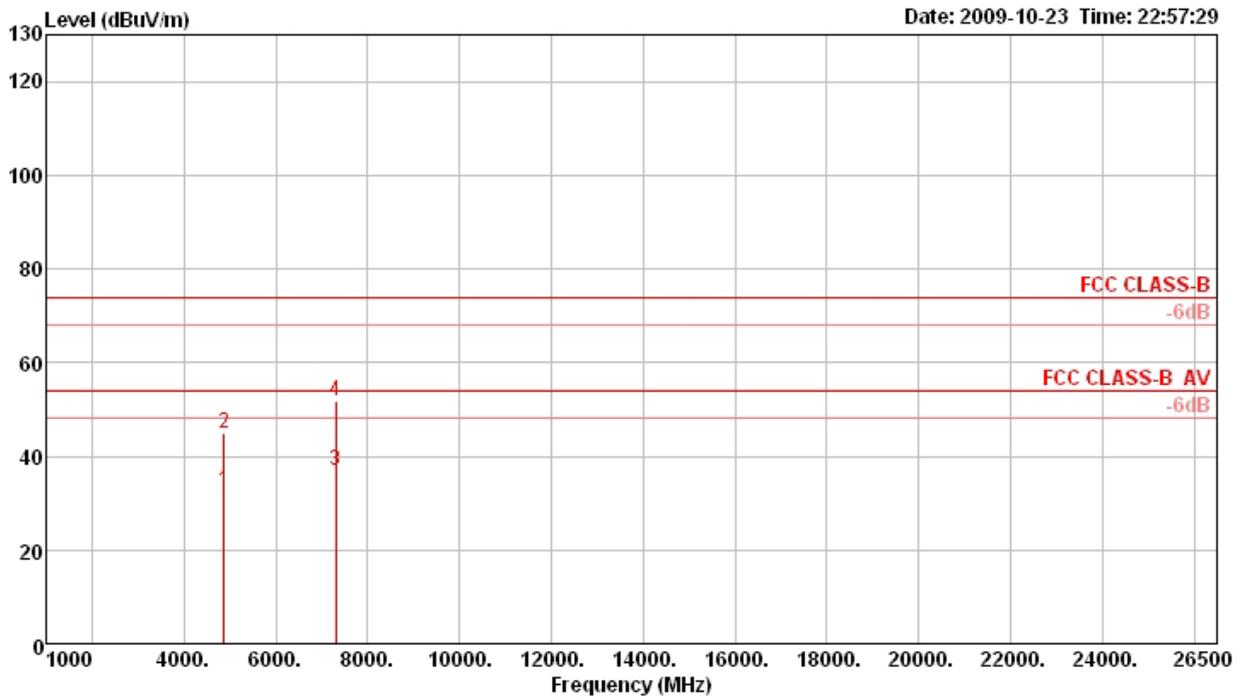

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4869.51	32.41	54.00	-21.59	31.99	3.01	35.15	32.56	61	115	Average	HORIZONTAL
2	4875.28	44.94	74.00	-29.06	44.52	3.01	35.15	32.56	61	115	Peak	HORIZONTAL
3 a	7311.64	36.90	54.00	-17.10	31.41	3.75	34.93	36.67	268	100	Average	HORIZONTAL
4 p	7311.80	51.86	74.00	-22.14	46.37	3.75	34.93	36.67	268	100	Peak	HORIZONTAL


**Vertical**

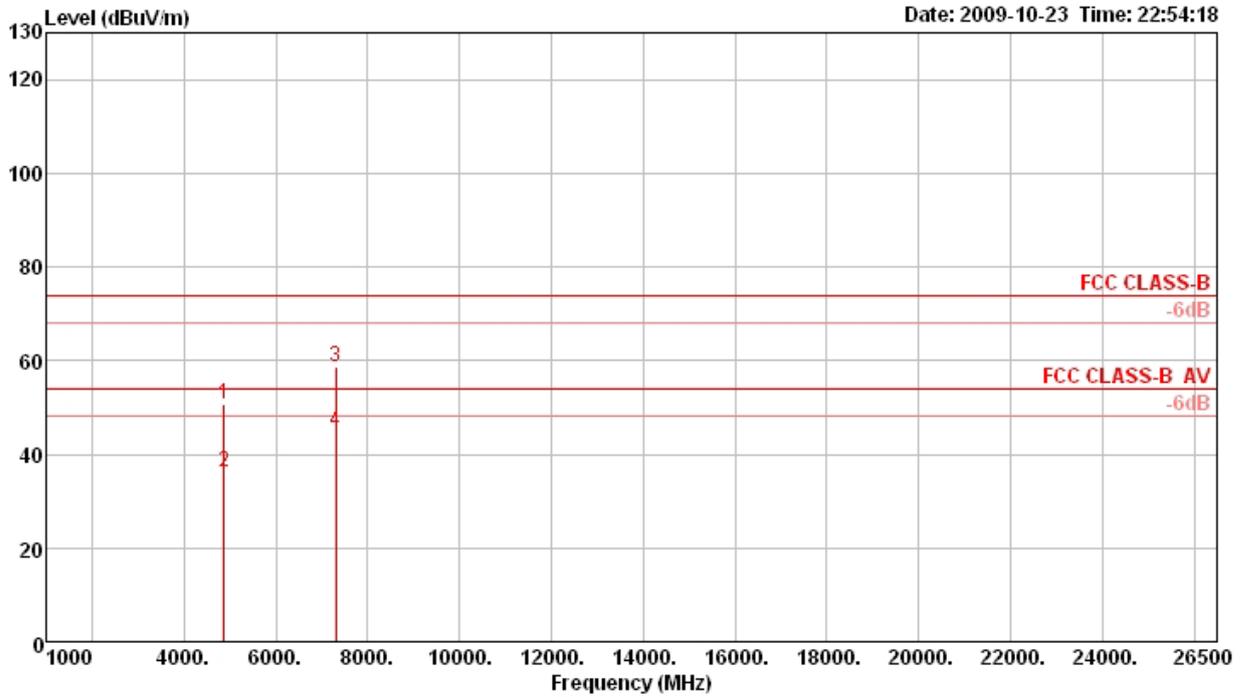

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4875.36	50.63	74.00	-23.37	50.21	3.01	35.15	32.56	163	100	Peak	VERTICAL
2	4876.97	36.12	54.00	-17.88	35.70	3.01	35.15	32.56	163	100	Average	VERTICAL
3 p	7311.24	58.80	74.00	-15.20	53.32	3.75	34.94	36.67	237	179	Peak	VERTICAL
4 a	7313.56	44.81	54.00	-9.19	39.32	3.75	34.93	36.67	237	179	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 20MHz Ch11 / Ant. 1

**Horizontal**

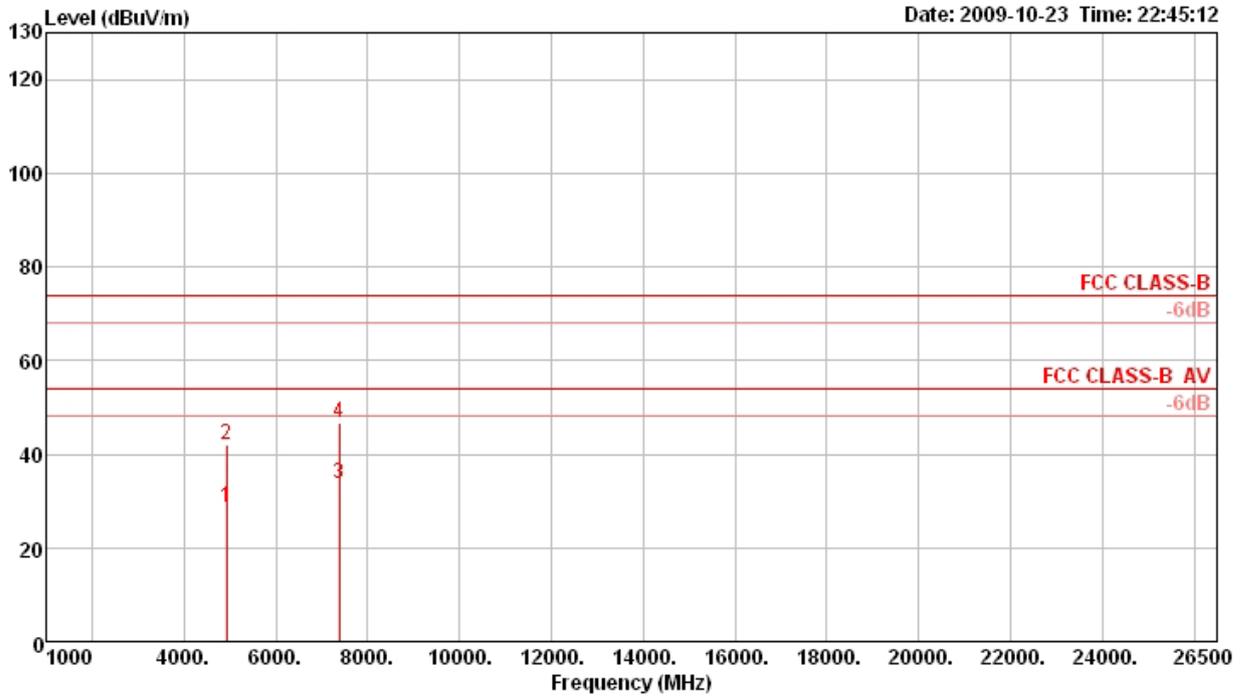

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.76	28.51	54.00	-25.49	27.86	3.02	35.03	32.66	29	189	Average	HORIZONTAL
2	4924.36	42.17	74.00	-31.83	41.52	3.02	35.03	32.66	29	189	Peak	HORIZONTAL
3 a	7386.13	33.66	54.00	-20.34	28.02	3.76	34.90	36.78	267	164	Average	HORIZONTAL
4 p	7386.32	46.64	74.00	-27.36	41.00	3.76	34.90	36.78	267	164	Peak	HORIZONTAL


**Vertical**

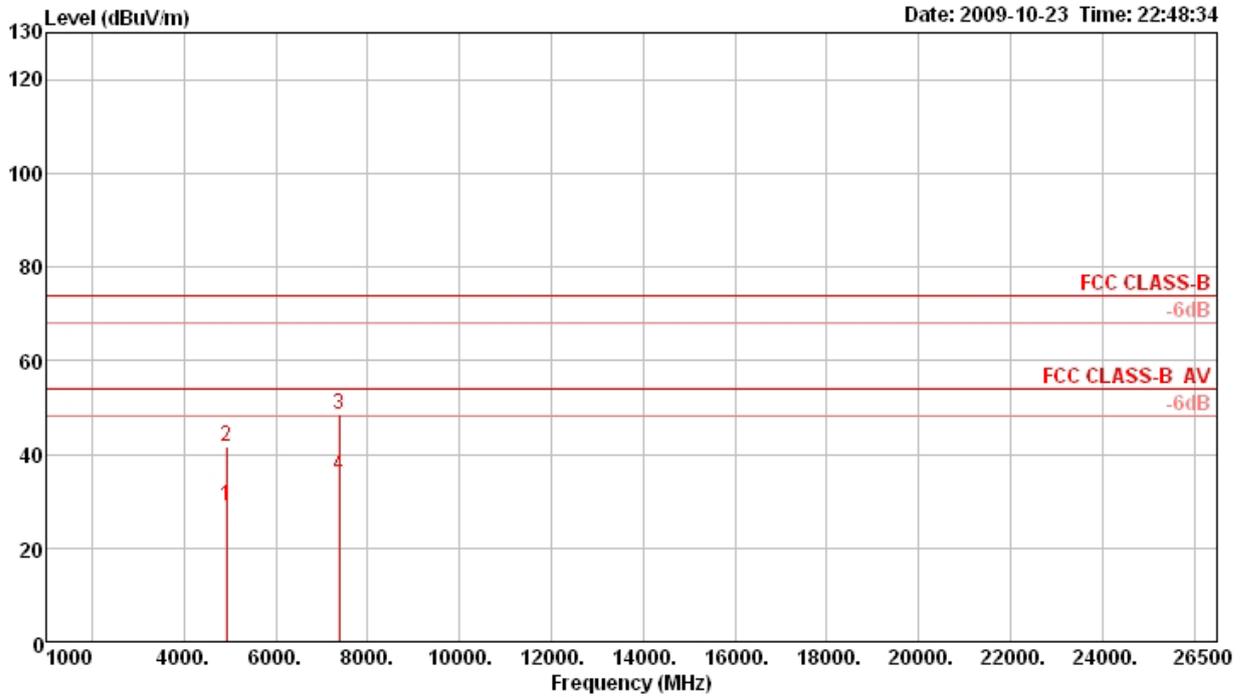

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4922.03	29.08	54.00	-24.92	28.43	3.02	35.03	32.66	108	114	Average	VERTICAL
2	4927.51	41.78	74.00	-32.22	41.13	3.02	35.03	32.66	108	114	Peak	VERTICAL
3 p	7384.53	48.47	74.00	-25.53	42.83	3.76	34.90	36.78	347	112	Peak	VERTICAL
4 a	7386.34	35.59	54.00	-18.41	29.95	3.76	34.90	36.78	347	112	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 40MHz Ch 3 / Ant. 1

**Horizontal**

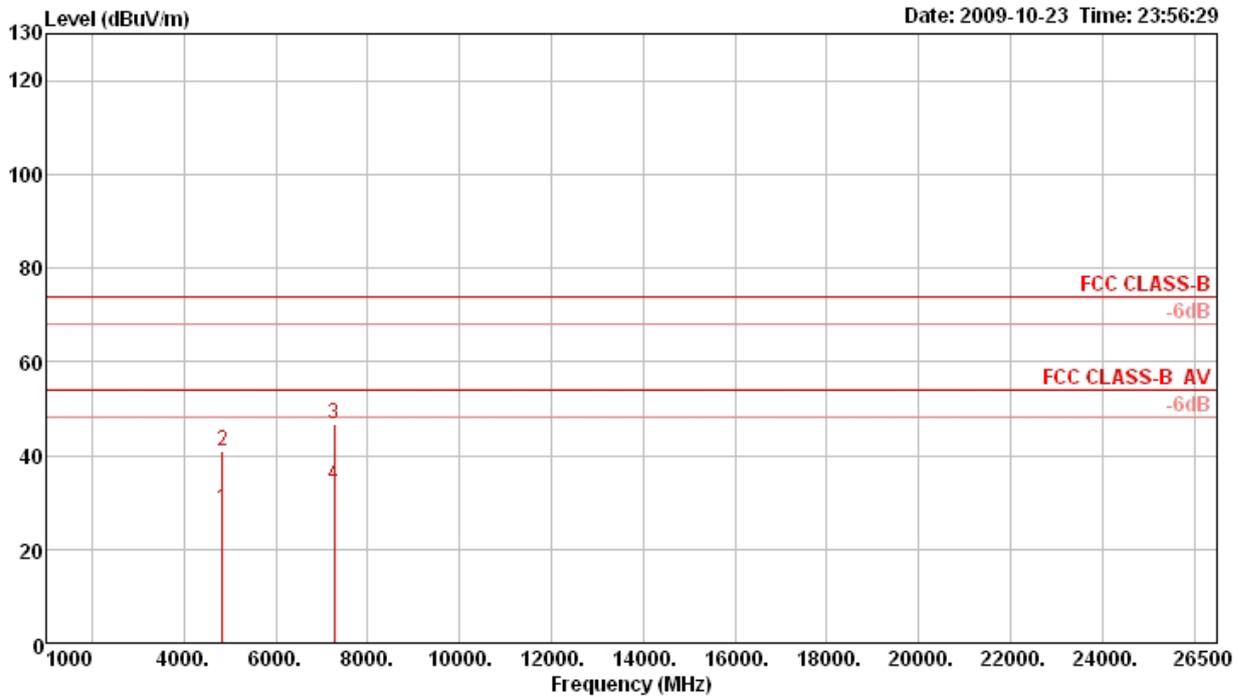

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4845.10	28.46	54.00	-25.54	28.16	3.01	35.20	32.49	12	169	Average	HORIZONTAL
2	4845.87	41.10	74.00	-32.90	40.80	3.01	35.20	32.49	12	169	Peak	HORIZONTAL
3 p	7265.37	46.60	74.00	-27.40	41.18	3.74	34.95	36.63	124	107	Peak	HORIZONTAL
4 a	7265.60	33.57	54.00	-20.43	28.15	3.74	34.95	36.63	124	107	Average	HORIZONTAL


**Vertical**

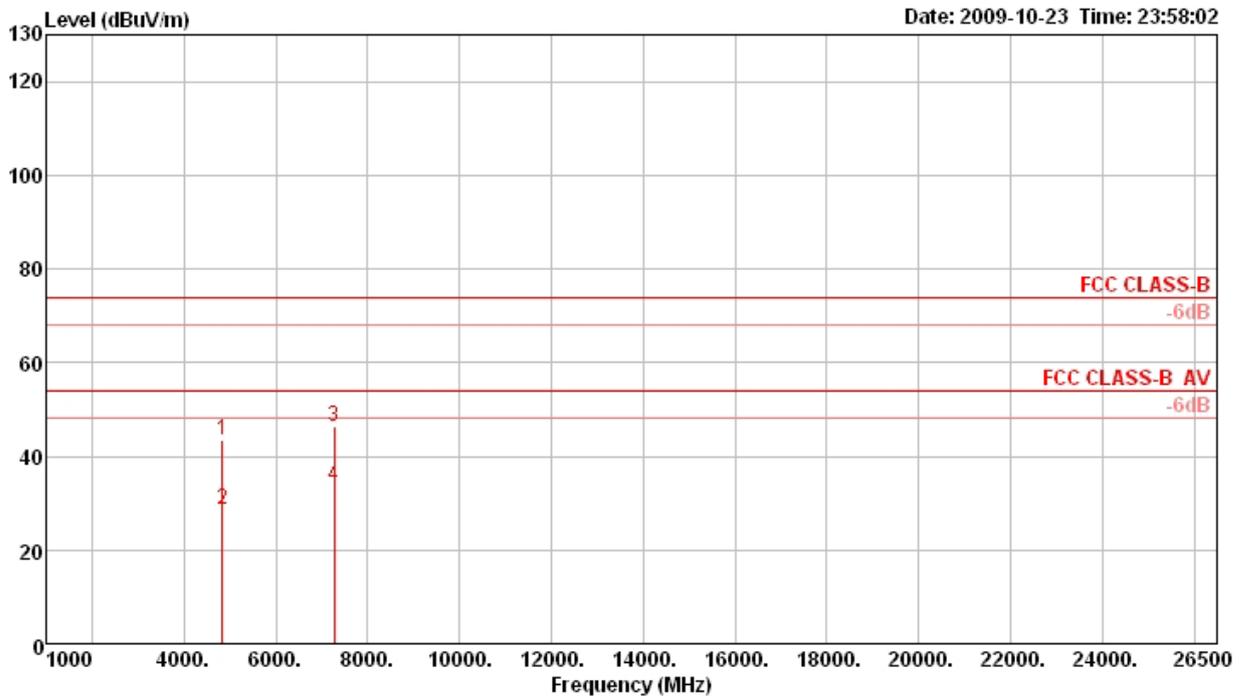

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4843.03	43.32	74.00	-30.68	43.02	3.01	35.20	32.49	212	112	Peak	VERTICAL
2	4844.45	28.67	54.00	-25.33	28.37	3.01	35.20	32.49	212	112	Average	VERTICAL
3 p	7265.57	46.38	74.00	-27.62	40.96	3.74	34.95	36.63	258	100	Peak	VERTICAL
4 a	7266.23	33.59	54.00	-20.41	28.17	3.74	34.95	36.63	258	100	Average	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 40MHz Ch 6 / Ant. 1

**Horizontal**

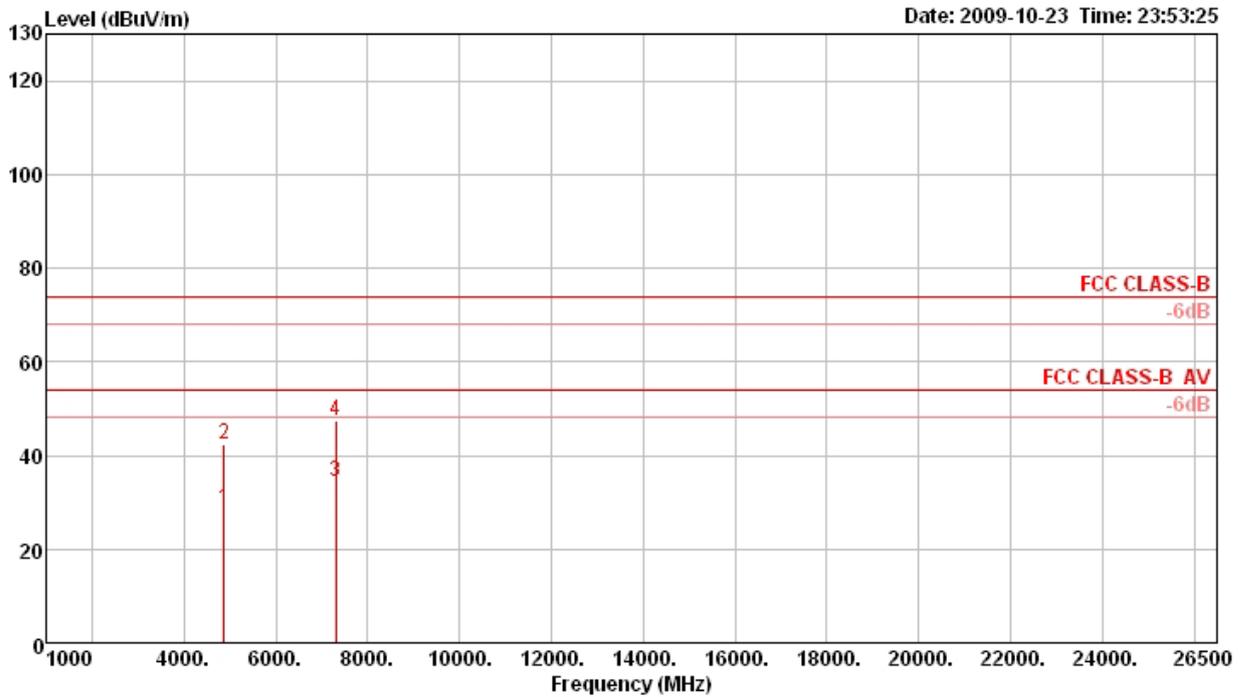

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4874.18	28.74	54.00	-25.26	28.32	3.01	35.15	32.56	63	116	Average	HORIZONTAL
2	4874.99	42.35	74.00	-31.65	41.93	3.01	35.15	32.56	63	116	Peak	HORIZONTAL
3 a	7309.59	34.46	54.00	-19.54	28.98	3.75	34.94	36.67	265	100	Average	HORIZONTAL
4 p	7313.14	47.38	74.00	-26.62	41.89	3.75	34.93	36.67	265	100	Peak	HORIZONTAL


**Vertical**

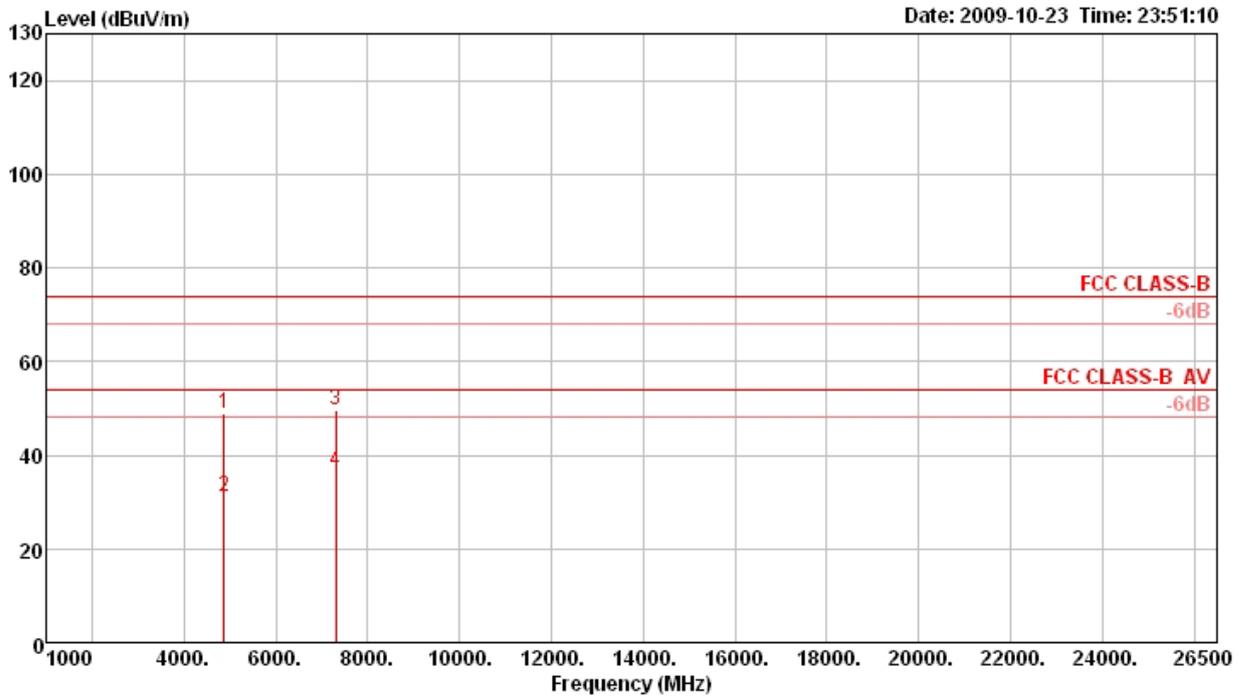

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4872.92	48.98	74.00	-25.02	48.56	3.01	35.15	32.56	162	100	Peak	VERTICAL
2	4874.21	31.00	54.00	-23.00	30.58	3.01	35.15	32.56	162	100	Average	VERTICAL
3 p	7310.43	49.62	74.00	-24.38	44.14	3.75	34.94	36.67	238	180	Peak	VERTICAL
4 a	7313.21	36.56	54.00	-17.44	31.07	3.75	34.93	36.67	238	180	Average	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 40MHz Ch 9 / Ant. 1

**Horizontal**

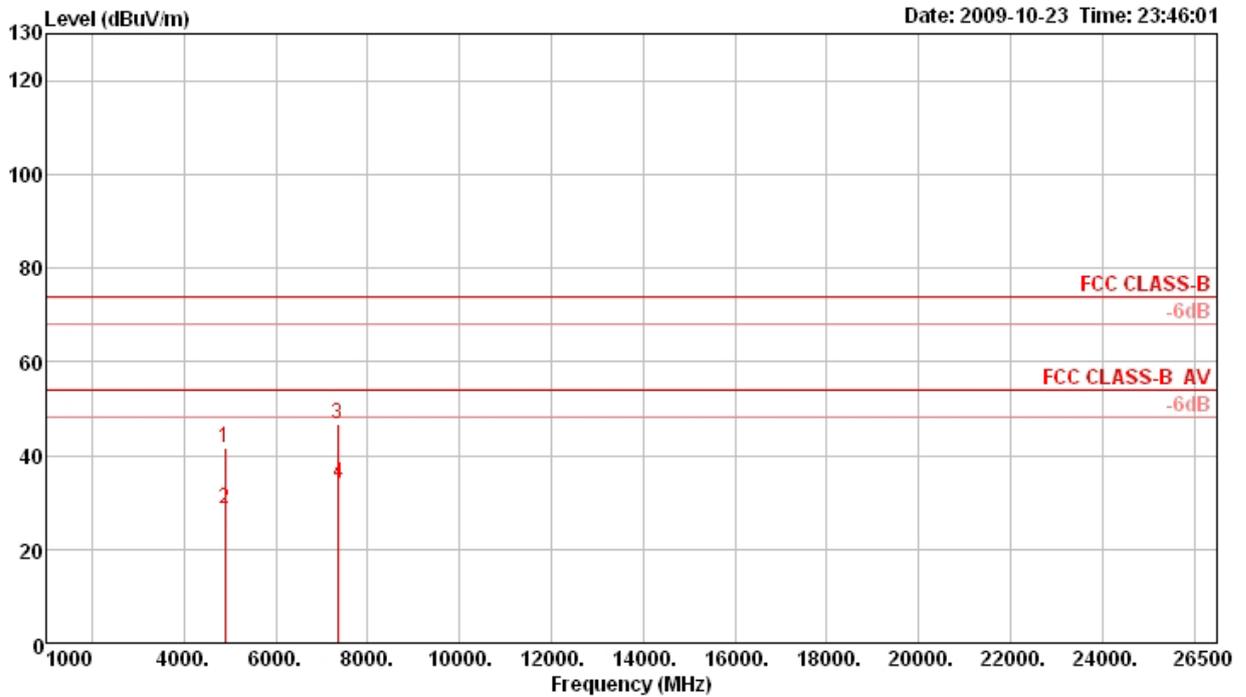

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4902.17	41.79	74.00	-32.21	41.23	3.02	35.09	32.63	28	190	Peak	HORIZONTAL
2	4902.61	28.51	54.00	-25.49	27.95	3.02	35.09	32.63	28	190	Average	HORIZONTAL
3 p	7355.00	46.68	74.00	-27.32	41.11	3.76	34.92	36.73	262	165	Peak	HORIZONTAL
4 a	7357.74	34.12	54.00	-19.88	28.55	3.76	34.92	36.73	262	165	Average	HORIZONTAL

**Vertical**

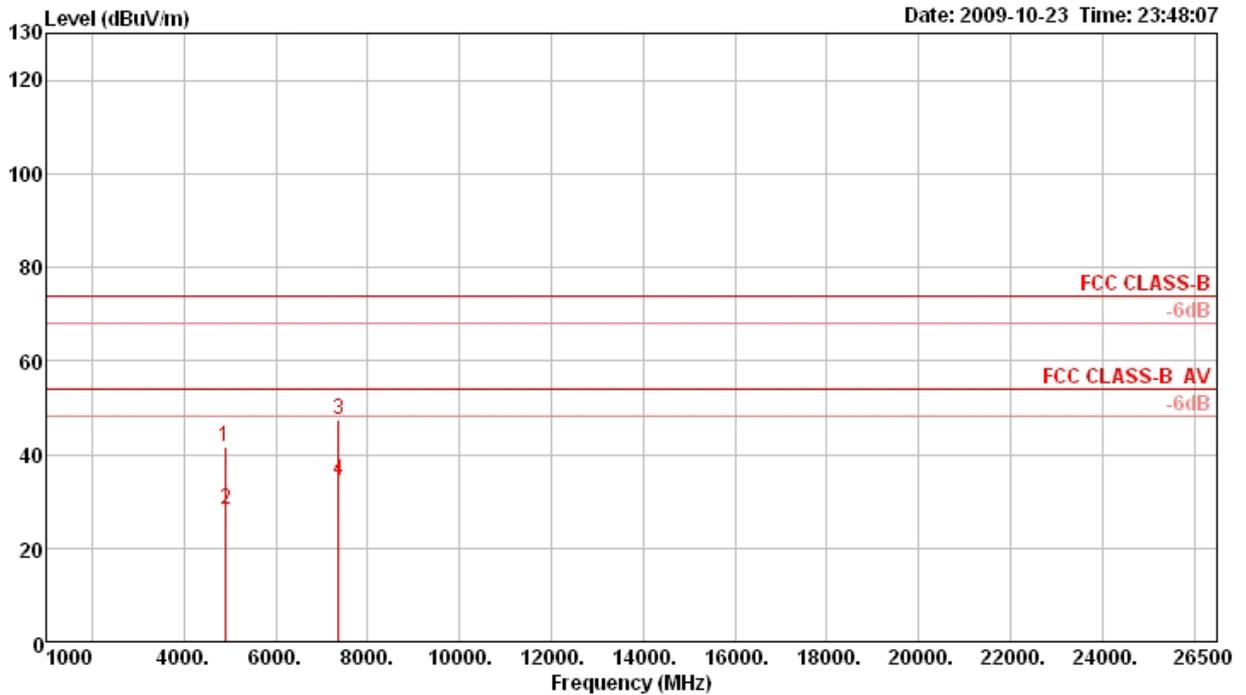

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4902.88	41.69	74.00	-32.31	41.13	3.02	35.09	32.63	113	113	Peak	VERTICAL
2	4905.72	28.32	54.00	-25.68	27.76	3.02	35.09	32.63	113	113	Average	VERTICAL
3 p	7356.66	47.32	74.00	-26.68	41.75	3.76	34.92	36.73	347	105	Peak	VERTICAL
4 a	7358.40	34.52	54.00	-19.48	28.95	3.76	34.92	36.73	347	105	Average	VERTICAL

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11b CH 1 / Ant. 1

**Horizontal**

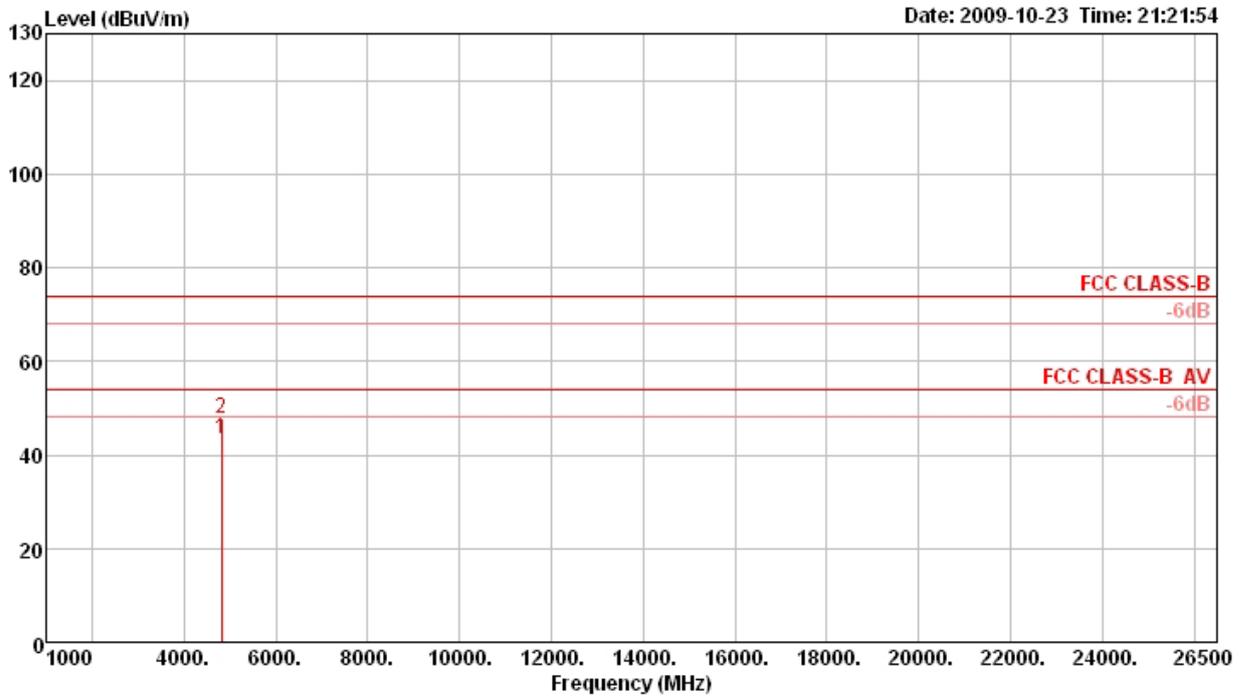

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4824.06	43.54	54.00	-10.46	43.34	3.00	35.26	32.46	10	197	Average	HORIZONTAL
2 p	4824.08	47.72	74.00	-26.28	47.52	3.00	35.26	32.46	10	197	Peak	HORIZONTAL


**Vertical**

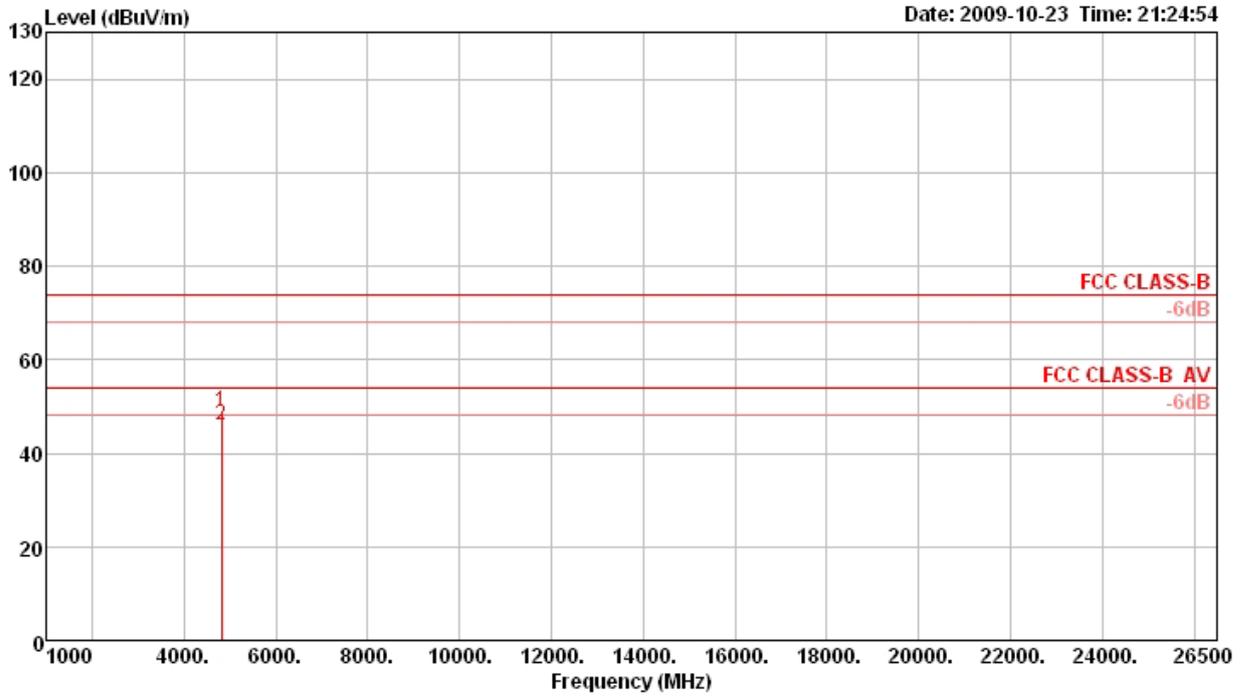

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.97	49.05	74.00	-24.95	48.85	3.00	35.26	32.46	211	111	Peak	VERTICAL
2 a	4824.04	45.96	54.00	-8.04	45.76	3.00	35.26	32.46	211	111	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11b CH 6 / Ant. 1

**Horizontal**

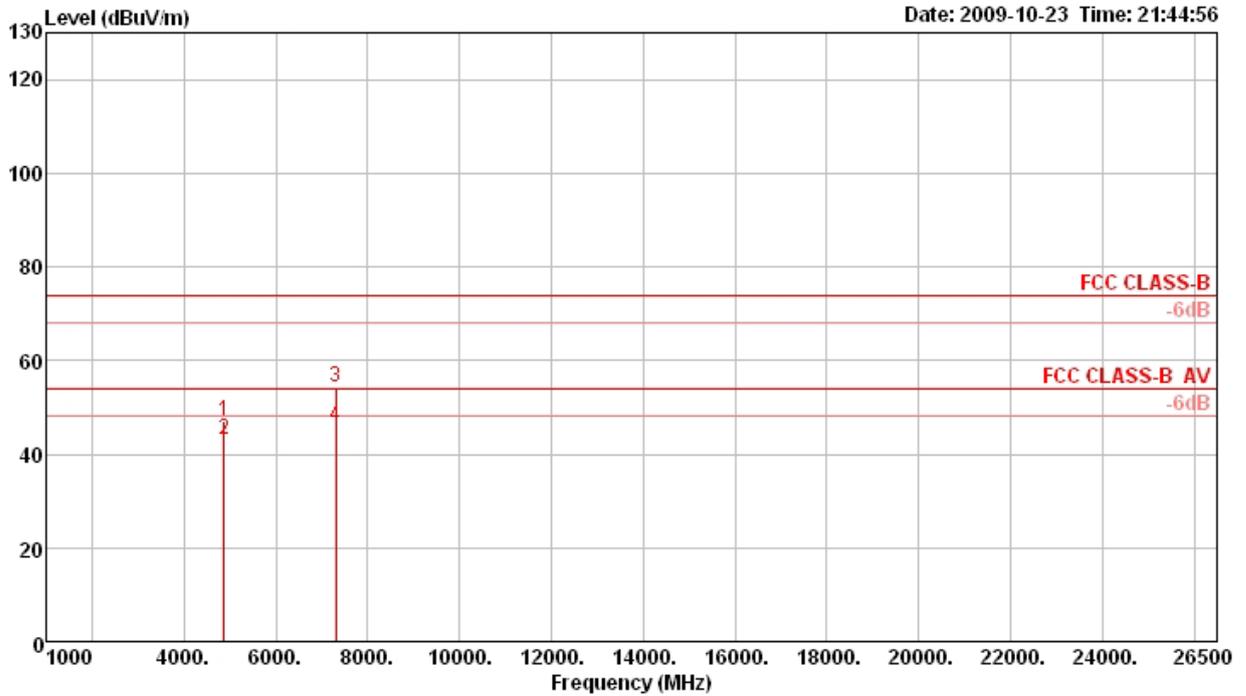

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4874.02	47.10	74.00	-26.90	46.68	3.01	35.15	32.56	63	116	Peak	HORIZONTAL
2	4874.03	42.98	54.00	-11.02	42.56	3.01	35.15	32.56	63	116	Average	HORIZONTAL
3 p	7313.10	54.48	74.00	-19.52	48.99	3.75	34.93	36.67	269	100	Peak	HORIZONTAL
4 a	7314.16	45.84	54.00	-8.16	40.35	3.75	34.93	36.67	269	100	Average	HORIZONTAL


**Vertical**

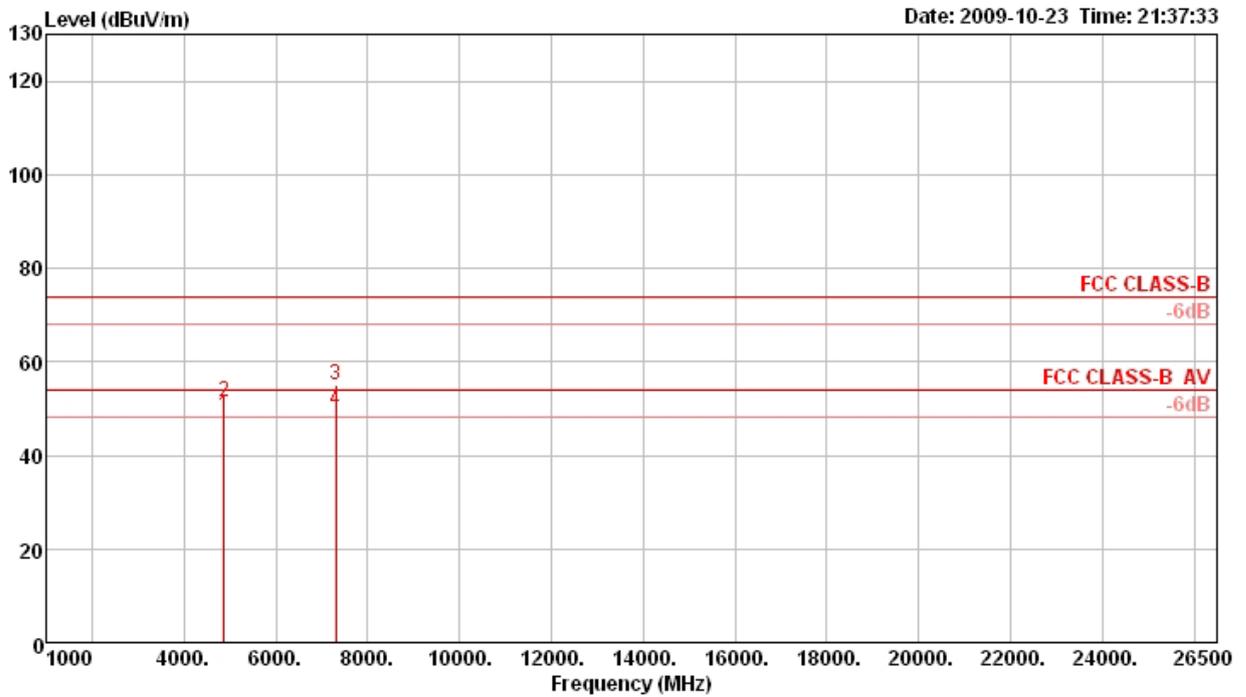

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	4874.05	48.53	54.00	-5.47	48.11	3.01	35.15	32.56	162	100	Average	VERTICAL
2	4874.09	51.52	74.00	-22.48	51.10	3.01	35.15	32.56	162	100	Peak	VERTICAL
3 p	7312.70	55.00	74.00	-19.00	49.51	3.75	34.93	36.67	238	180	Peak	VERTICAL
4 a	7313.87	49.65	54.00	-4.35	44.16	3.75	34.93	36.67	238	180	Average	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b CH 11 / Ant. 1

**Horizontal**

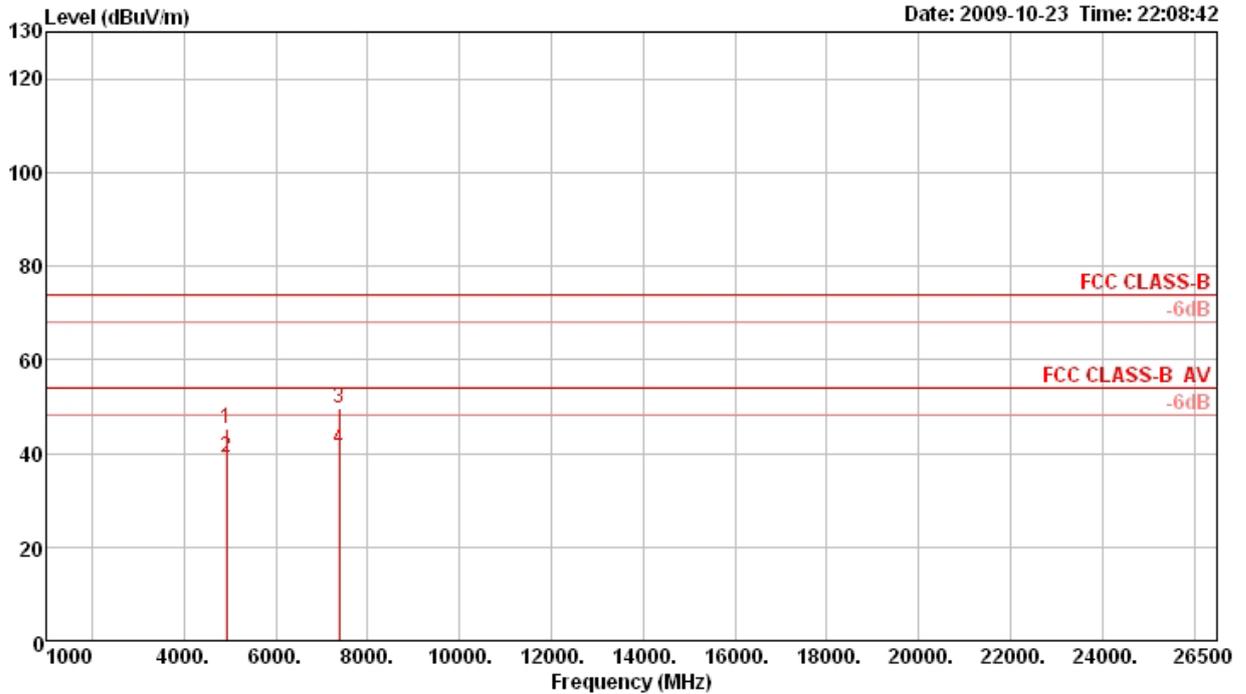

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4924.05	45.25	74.00	-28.75	44.60	3.02	35.03	32.66	26	186	Peak	HORIZONTAL
2	4924.06	39.16	54.00	-14.84	38.51	3.02	35.03	32.66	26	186	Average	HORIZONTAL
3 p	7388.56	49.55	74.00	-24.45	43.89	3.77	34.89	36.78	260	159	Peak	HORIZONTAL
4 a	7388.81	40.96	54.00	-13.04	35.30	3.77	34.89	36.78	260	159	Average	HORIZONTAL


**Vertical**

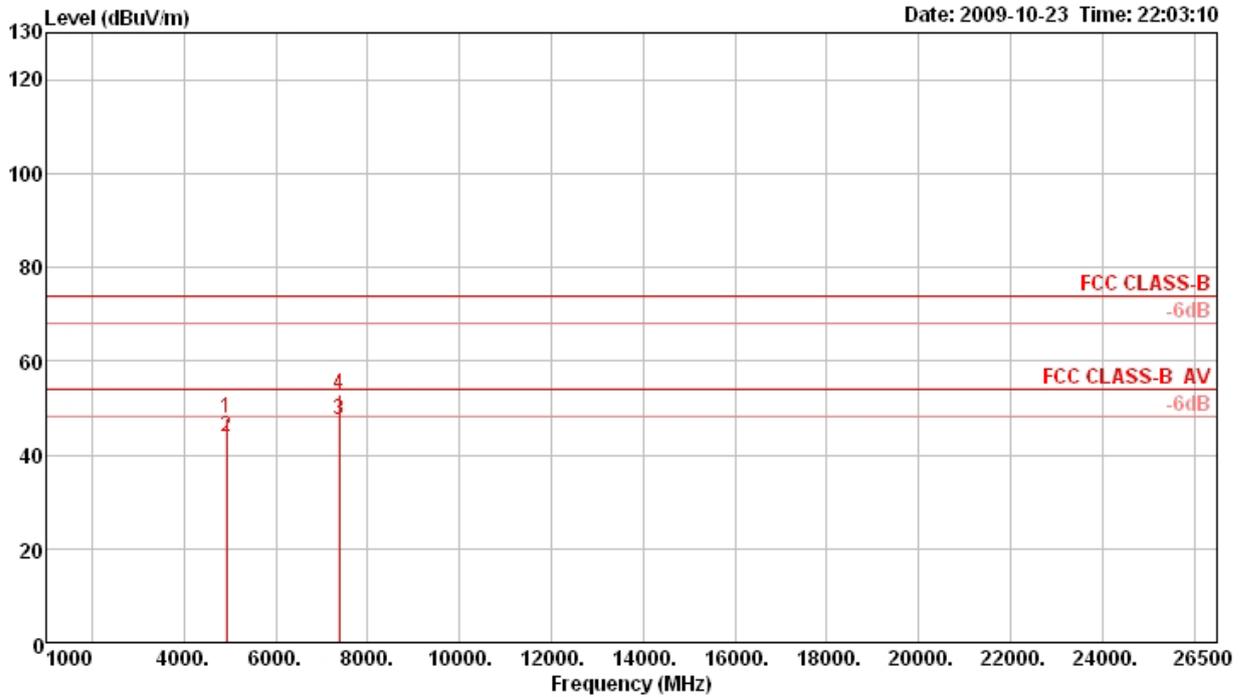

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.96	47.77	74.00	-26.23	47.12	3.02	35.03	32.66	112	112	Peak	VERTICAL
2	4924.06	43.64	54.00	-10.36	42.99	3.02	35.03	32.66	112	112	Average	VERTICAL
3 a	7387.94	47.32	54.00	-6.68	41.66	3.77	34.89	36.78	345	103	Average	VERTICAL
4 p	7388.81	52.96	74.00	-21.04	47.30	3.77	34.89	36.78	345	103	Peak	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11g CH 1 / Ant. 1

**Horizontal**

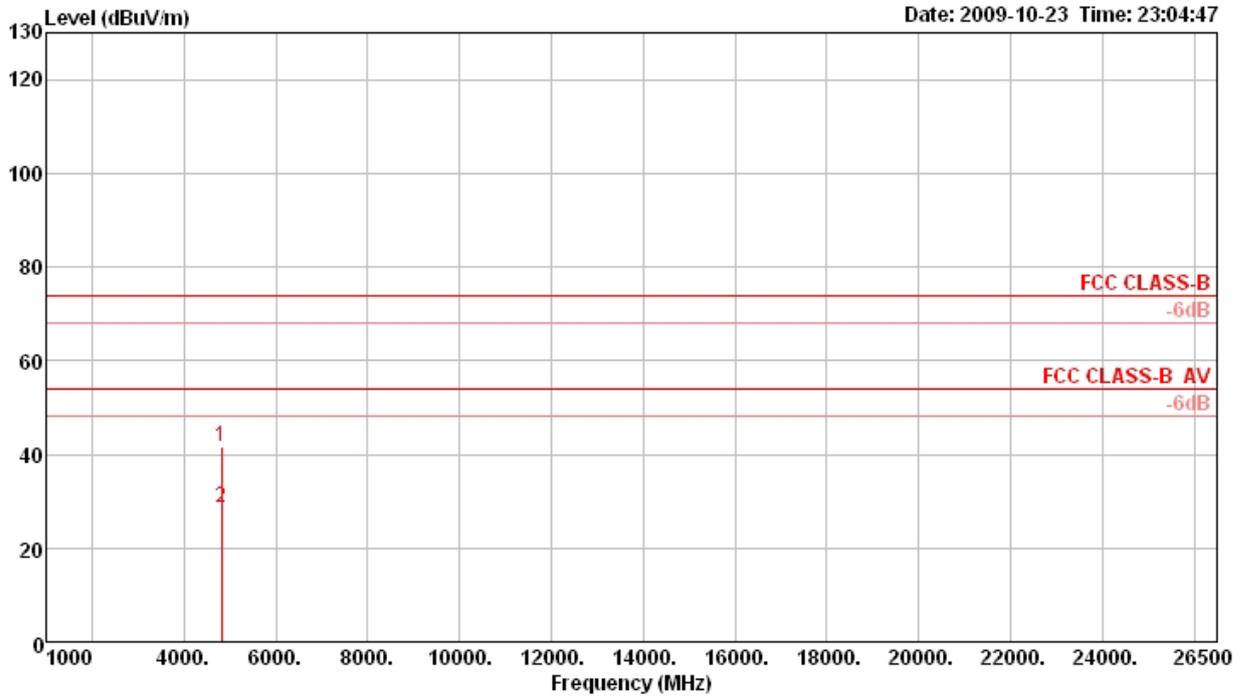

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.99	41.65	74.00	-32.35	41.45	3.00	35.26	32.46	16	198	Peak	HORIZONTAL
2 a	4824.00	28.67	54.00	-25.33	28.47	3.00	35.26	32.46	16	198	Average	HORIZONTAL


**Vertical**

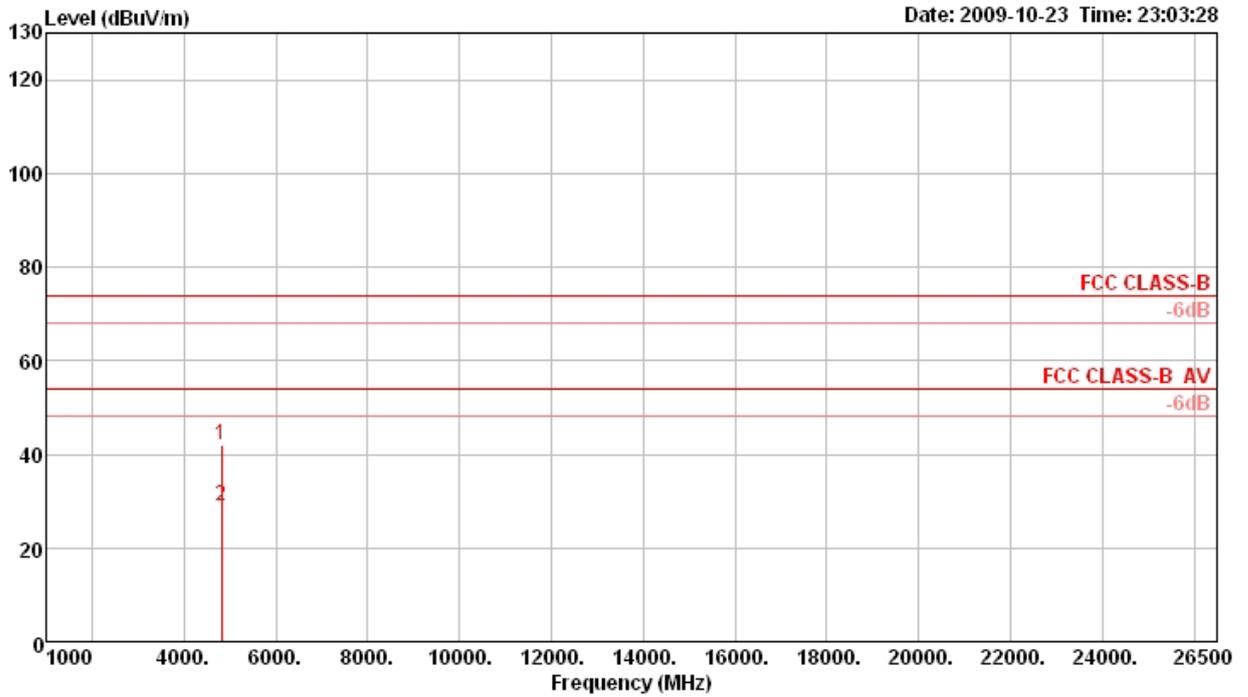

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.02	41.83	74.00	-32.17	41.63	3.00	35.26	32.46	217	112	Peak	VERTICAL
2 a	4824.02	28.98	54.00	-25.02	28.78	3.00	35.26	32.46	217	112	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11g CH 6 / Ant. 1

**Horizontal**

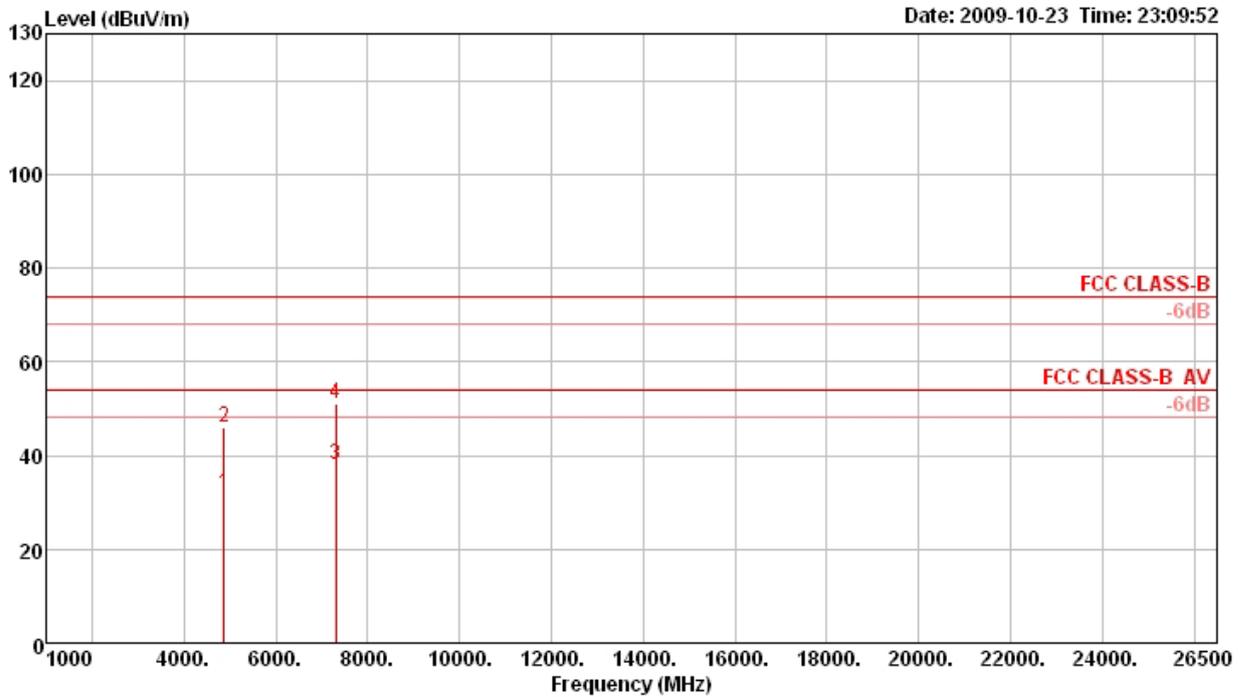

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4873.99	32.00	54.00	-22.00	31.58	3.01	35.15	32.56	62	115	Average	HORIZONTAL
2	4873.99	45.94	74.00	-28.06	45.52	3.01	35.15	32.56	62	115	Peak	HORIZONTAL
3 a	7311.00	38.06	54.00	-15.94	32.58	3.75	34.94	36.67	270	100	Average	HORIZONTAL
4 p	7311.00	50.99	74.00	-23.01	45.51	3.75	34.94	36.67	270	100	Peak	HORIZONTAL


**Vertical**

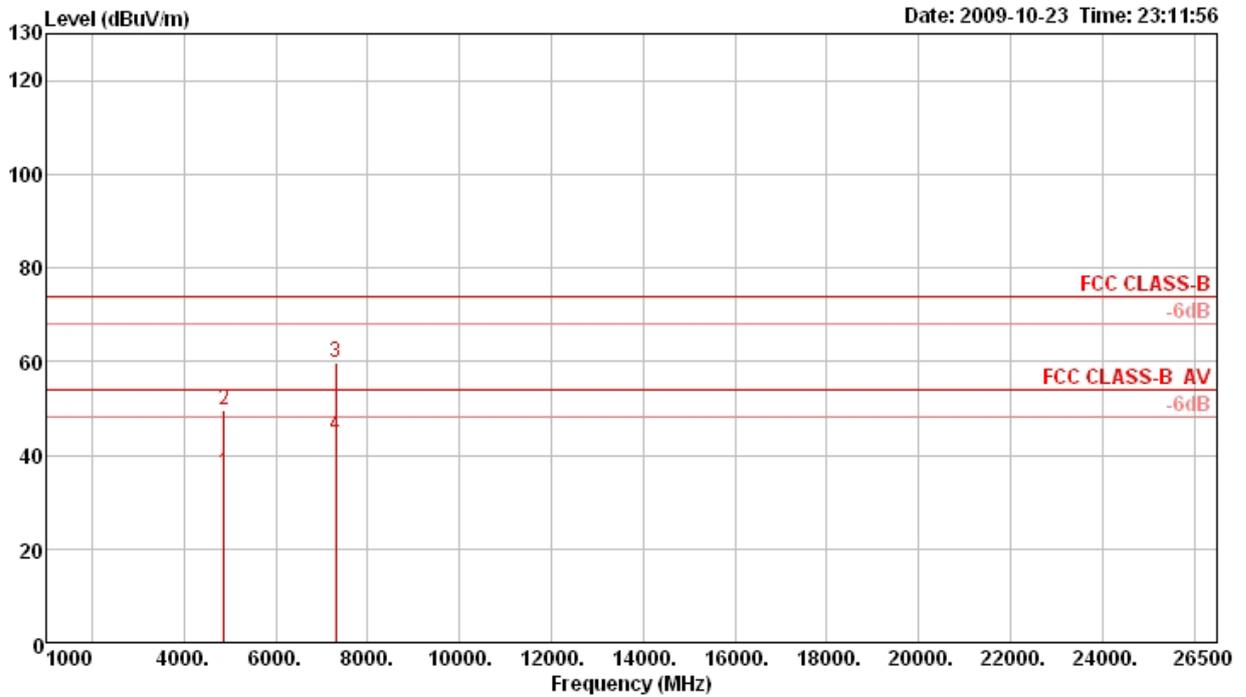

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4873.90	36.35	54.00	-17.65	35.93	3.01	35.15	32.56	163	100	Average	VERTICAL
2	4873.91	49.53	74.00	-24.47	49.11	3.01	35.15	32.56	163	100	Peak	VERTICAL
3 p	7310.92	59.64	74.00	-14.36	54.16	3.75	34.94	36.67	238	180	Peak	VERTICAL
4 a	7310.92	44.28	54.00	-9.72	38.80	3.75	34.94	36.67	238	180	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11g CH 11 / Ant. 1

**Horizontal**

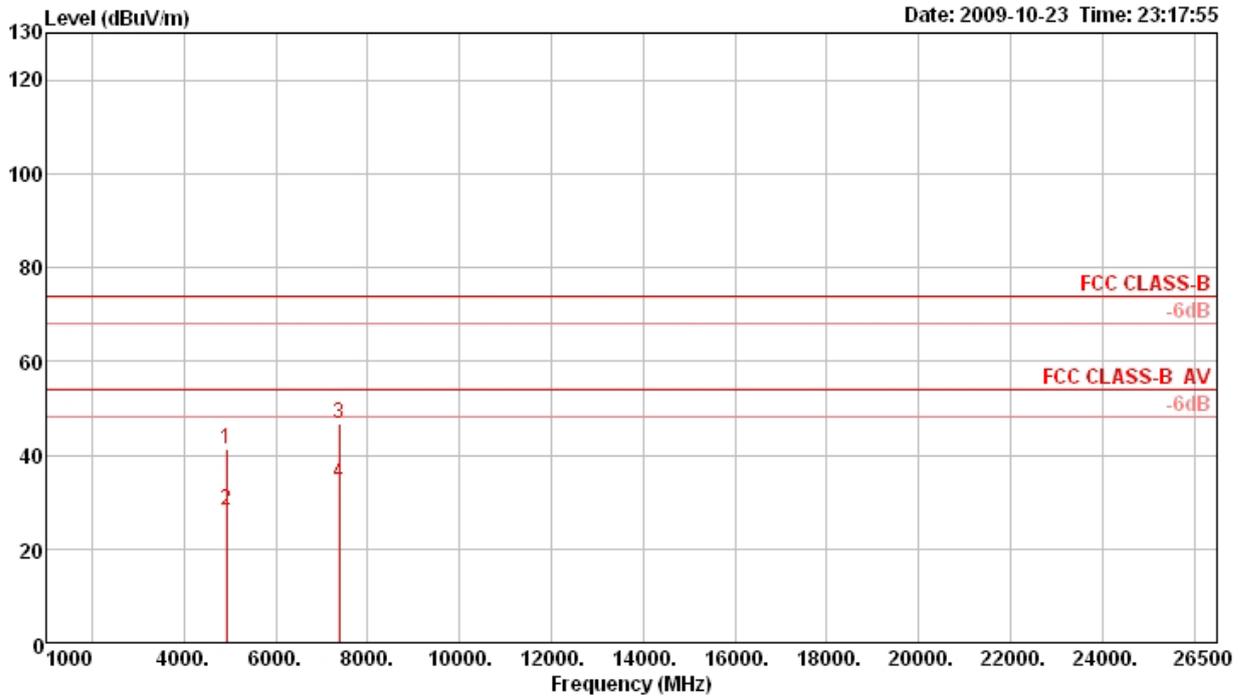

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.92	41.37	74.00	-32.63	40.72	3.02	35.03	32.66	26	186	Peak	HORIZONTAL
2	4924.03	28.37	54.00	-25.63	27.72	3.02	35.03	32.66	26	186	Average	HORIZONTAL
3 p	7385.98	46.63	74.00	-27.37	40.99	3.76	34.90	36.78	262	164	Peak	HORIZONTAL
4 a	7386.04	34.21	54.00	-19.79	28.57	3.76	34.90	36.78	262	164	Average	HORIZONTAL

**Vertical**

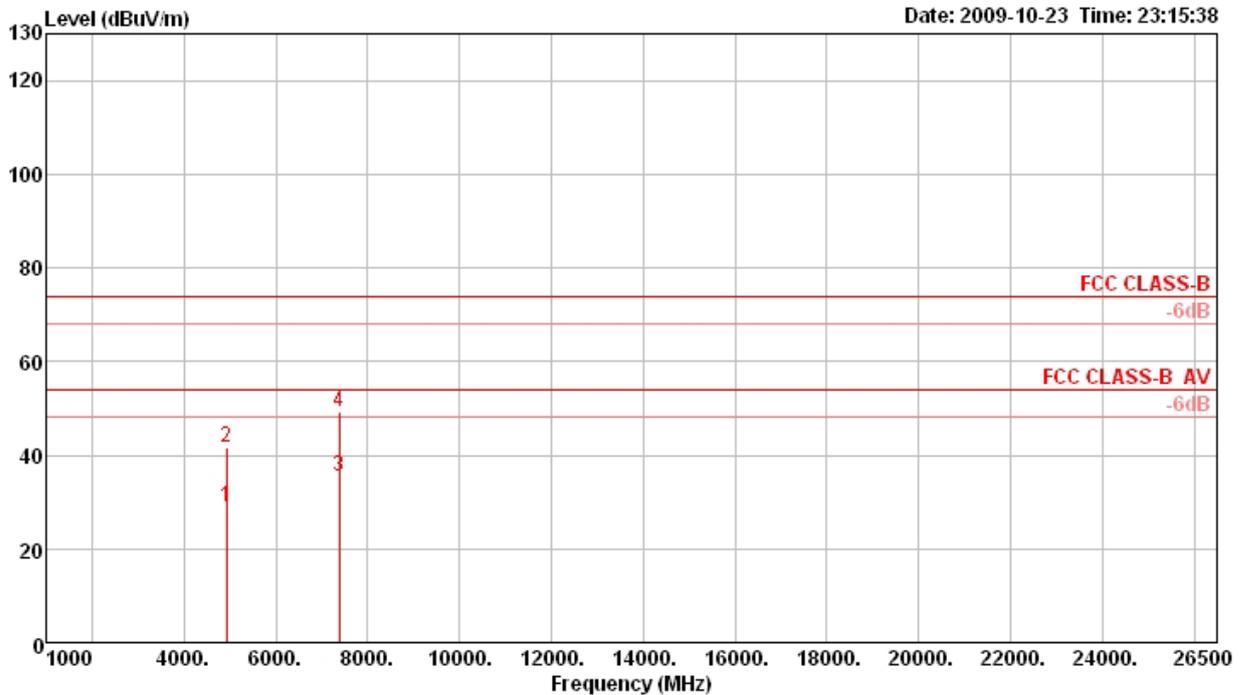

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.92	28.92	54.00	-25.08	28.27	3.02	35.03	32.66	109	110	Average	VERTICAL
2	4924.07	41.49	74.00	-32.51	40.84	3.02	35.03	32.66	109	110	Peak	VERTICAL
3 a	7385.99	35.59	54.00	-18.41	29.95	3.76	34.90	36.78	344	104	Average	VERTICAL
4 p	7385.99	49.18	74.00	-24.82	43.54	3.76	34.90	36.78	344	104	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 2>


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 20MHz Ch 1 / Ant. 2

Horizontal

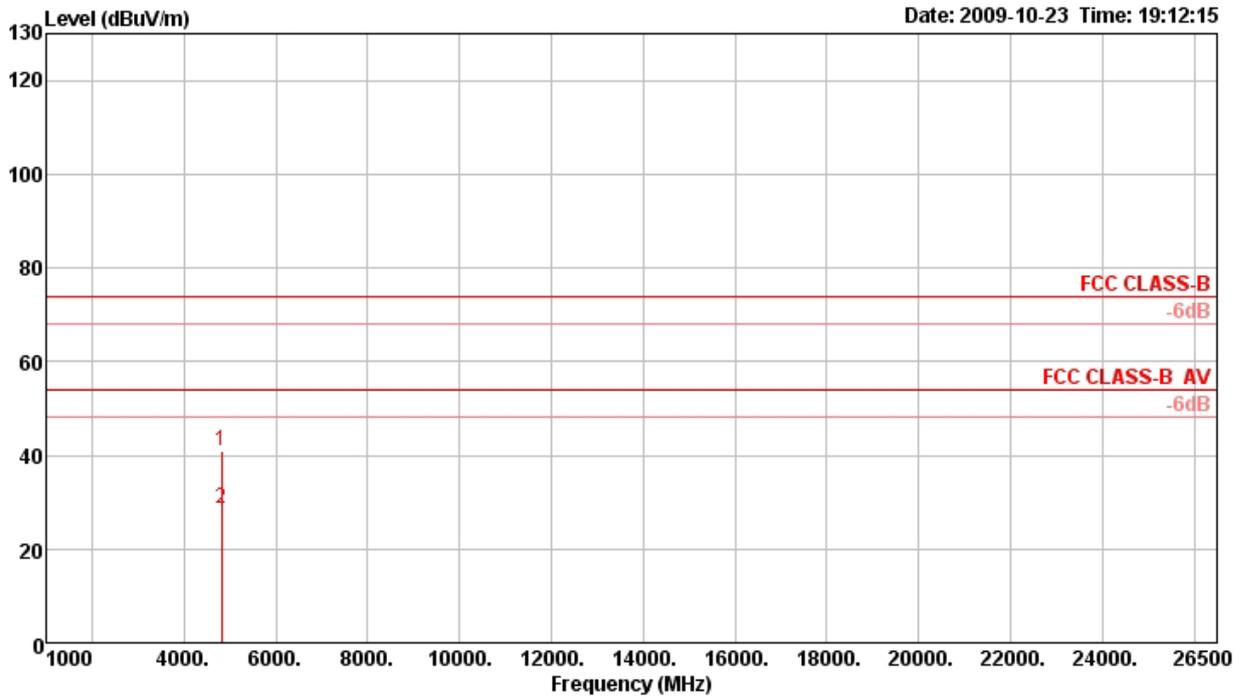

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.98	41.05	74.00	-32.95	40.85	3.00	35.26	32.46	187	100	Peak	HORIZONTAL
2 a	4824.07	28.57	54.00	-25.43	28.37	3.00	35.26	32.46	187	100	Average	HORIZONTAL


**Vertical**

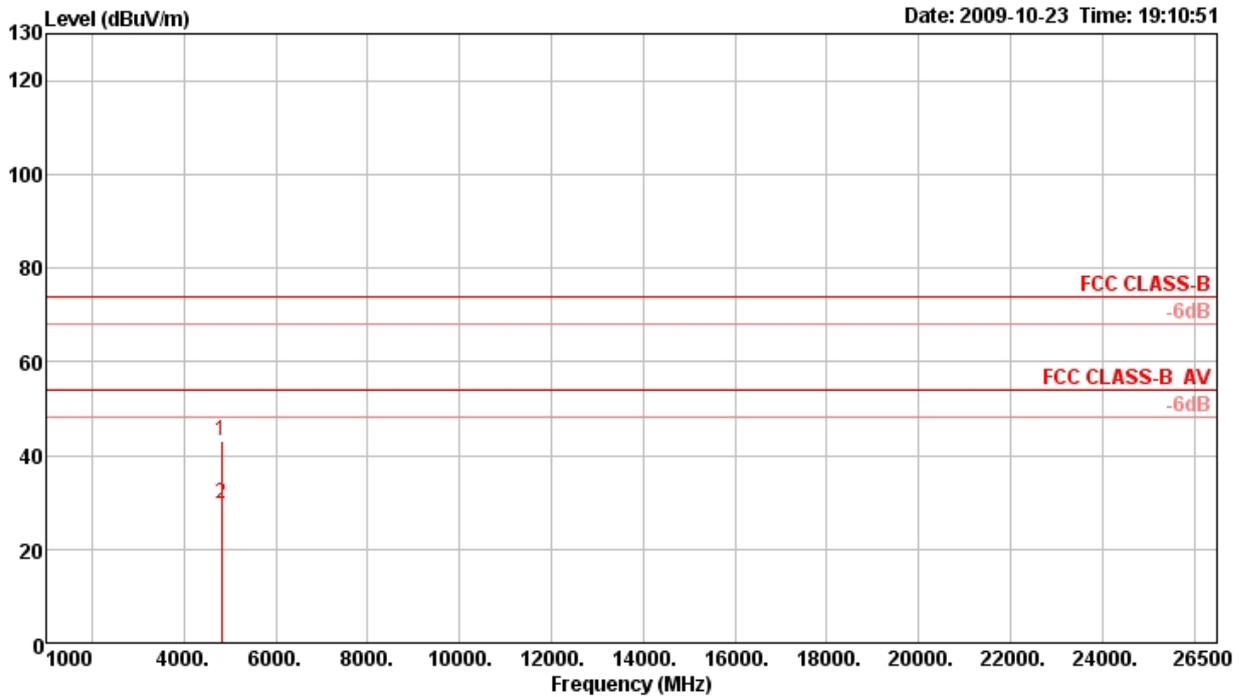

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.91	42.92	74.00	-31.08	42.72	3.00	35.26	32.46	214	100	Peak	VERTICAL
2 a	4823.92	29.72	54.00	-24.28	29.52	3.00	35.26	32.46	214	100	Average	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 20MHz Ch 6 / Ant. 2

**Horizontal**

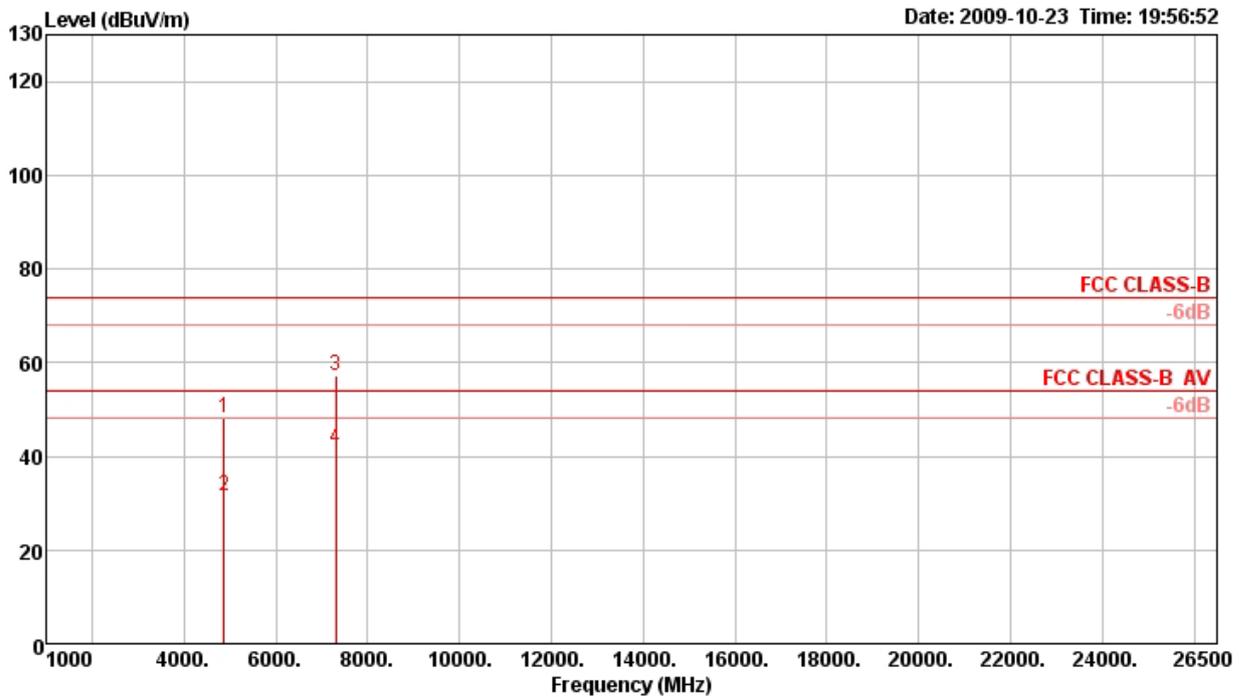

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4875.20	48.25	74.00	-25.75	47.83	3.01	35.15	32.56	152	137	Peak	HORIZONTAL
2	4875.92	31.35	54.00	-22.65	30.93	3.01	35.15	32.56	152	137	Average	HORIZONTAL
3 p	7309.32	57.06	74.00	-16.94	51.58	3.75	34.94	36.67	225	157	Peak	HORIZONTAL
4 a	7313.72	41.76	54.00	-12.24	36.27	3.75	34.93	36.67	225	157	Average	HORIZONTAL


**Vertical**

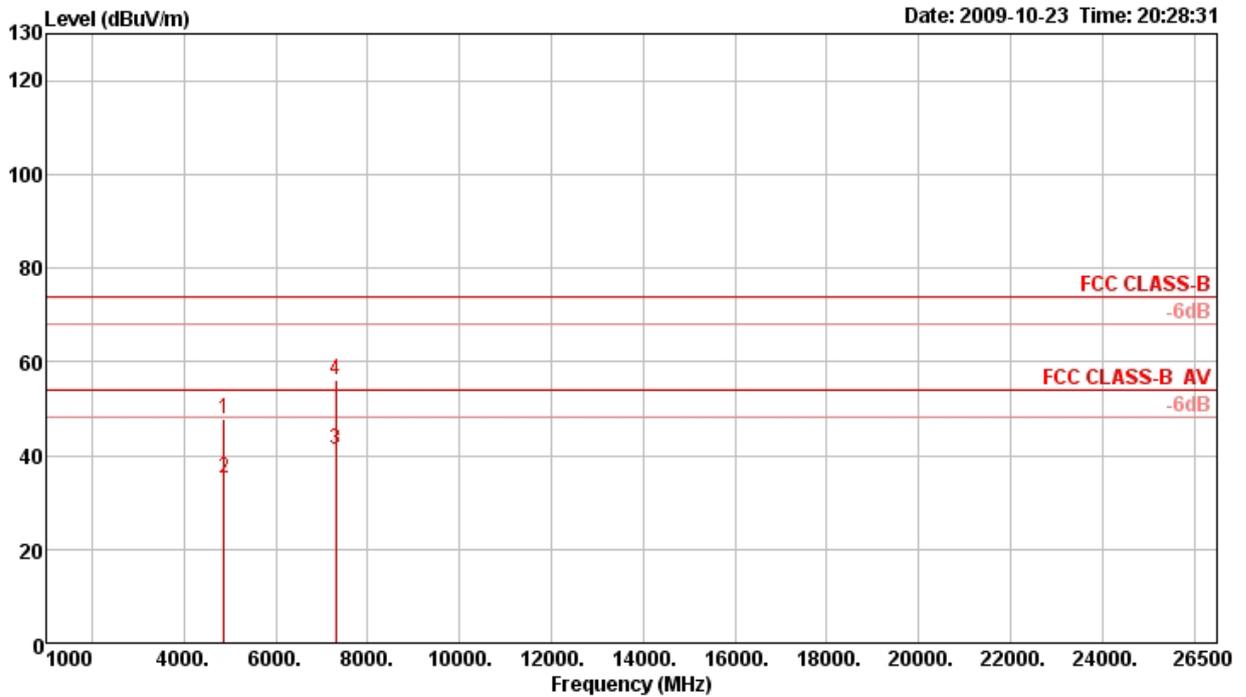

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4874.88	47.97	74.00	-26.03	47.55	3.01	35.15	32.56	163	100	Peak	VERTICAL
2	4876.97	35.08	54.00	-18.92	34.66	3.01	35.15	32.56	163	100	Average	VERTICAL
3 a	7312.52	41.12	54.00	-12.88	35.63	3.75	34.93	36.67	200	158	Average	VERTICAL
4 p	7315.01	56.20	74.00	-17.80	50.71	3.75	34.93	36.67	200	158	Peak	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 20MHz Ch11 / Ant. 2

**Horizontal**

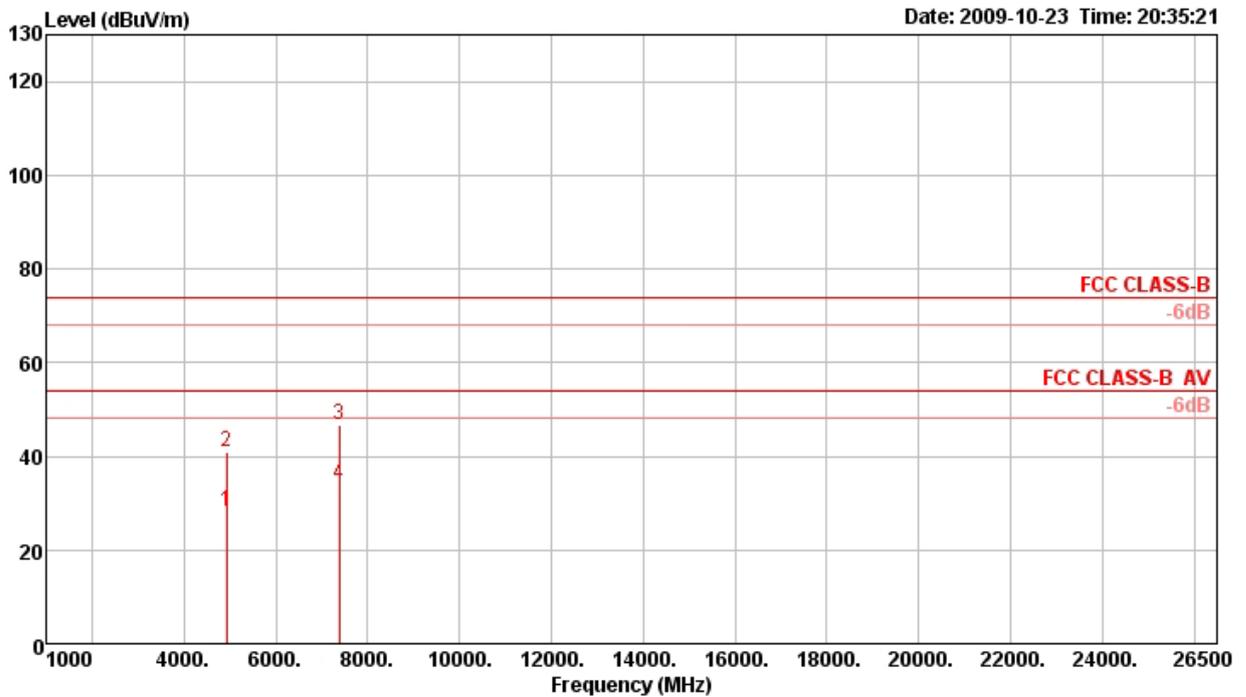

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4924.08	28.27	54.00	-25.73	27.62	3.02	35.03	32.66	171	128	Average	HORIZONTAL
2	4924.09	41.03	74.00	-32.97	40.38	3.02	35.03	32.66	171	128	Peak	HORIZONTAL
3 p	7386.11	46.58	74.00	-27.42	40.94	3.76	34.90	36.78	269	157	Peak	HORIZONTAL
4 a	7386.41	33.95	54.00	-20.05	28.31	3.76	34.90	36.78	269	157	Average	HORIZONTAL


**Vertical**

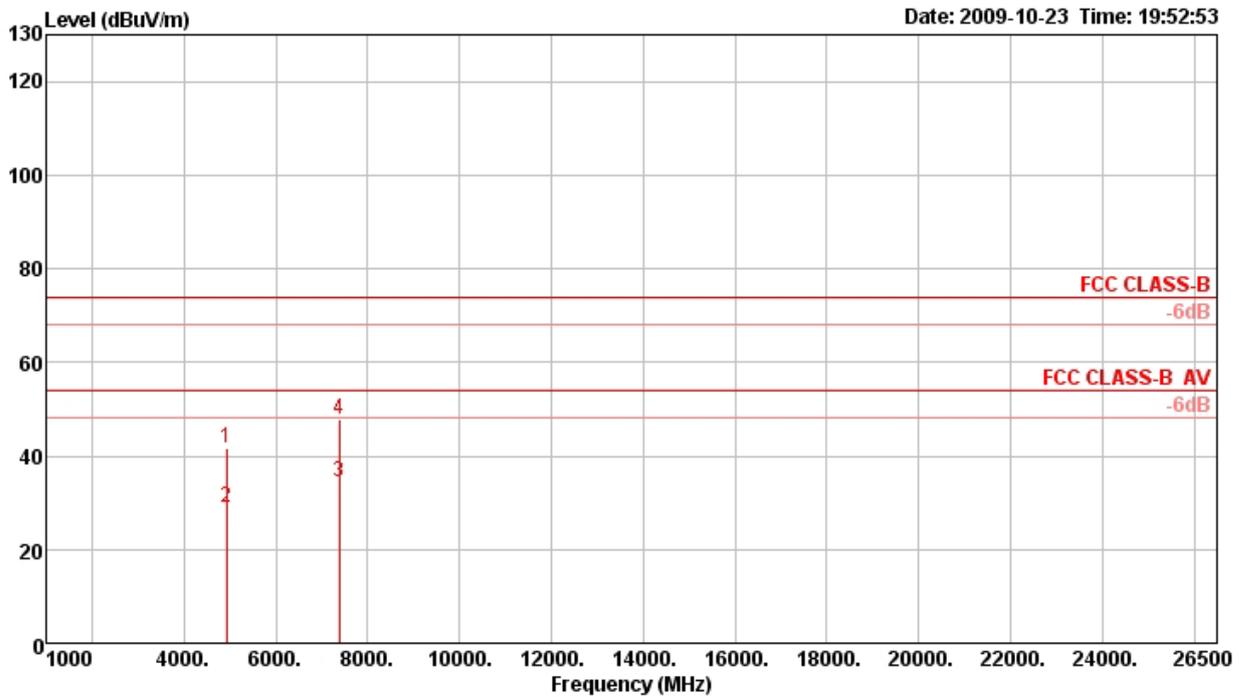

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.38	41.49	74.00	-32.51	40.84	3.02	35.03	32.66	152	100	Peak	VERTICAL
2	4923.75	28.93	54.00	-25.07	28.28	3.02	35.03	32.66	152	100	Average	VERTICAL
3 a	7385.01	34.50	54.00	-19.50	28.86	3.76	34.90	36.78	201	160	Average	VERTICAL
4 p	7385.14	47.70	74.00	-26.30	42.06	3.76	34.90	36.78	201	160	Peak	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 40MHz Ch 3 / Ant. 2

**Horizontal**

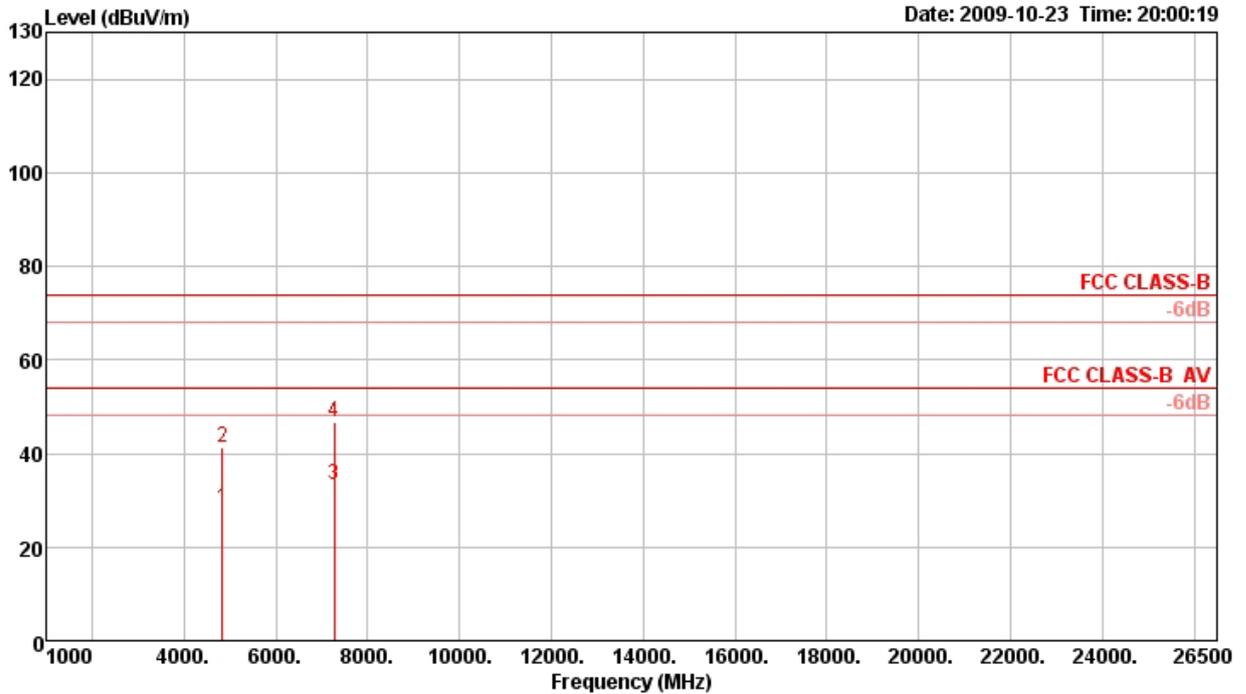

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4844.01	28.42	54.00	-25.58	28.12	3.01	35.20	32.49	134	112	Average	HORIZONTAL
2	4844.05	41.43	74.00	-32.57	41.13	3.01	35.20	32.49	134	112	Peak	HORIZONTAL
3 a	7265.27	33.38	54.00	-20.62	27.96	3.74	34.95	36.63	270	154	Average	HORIZONTAL
4 p	7265.73	46.85	74.00	-27.15	41.43	3.74	34.95	36.63	270	154	Peak	HORIZONTAL


**Vertical**

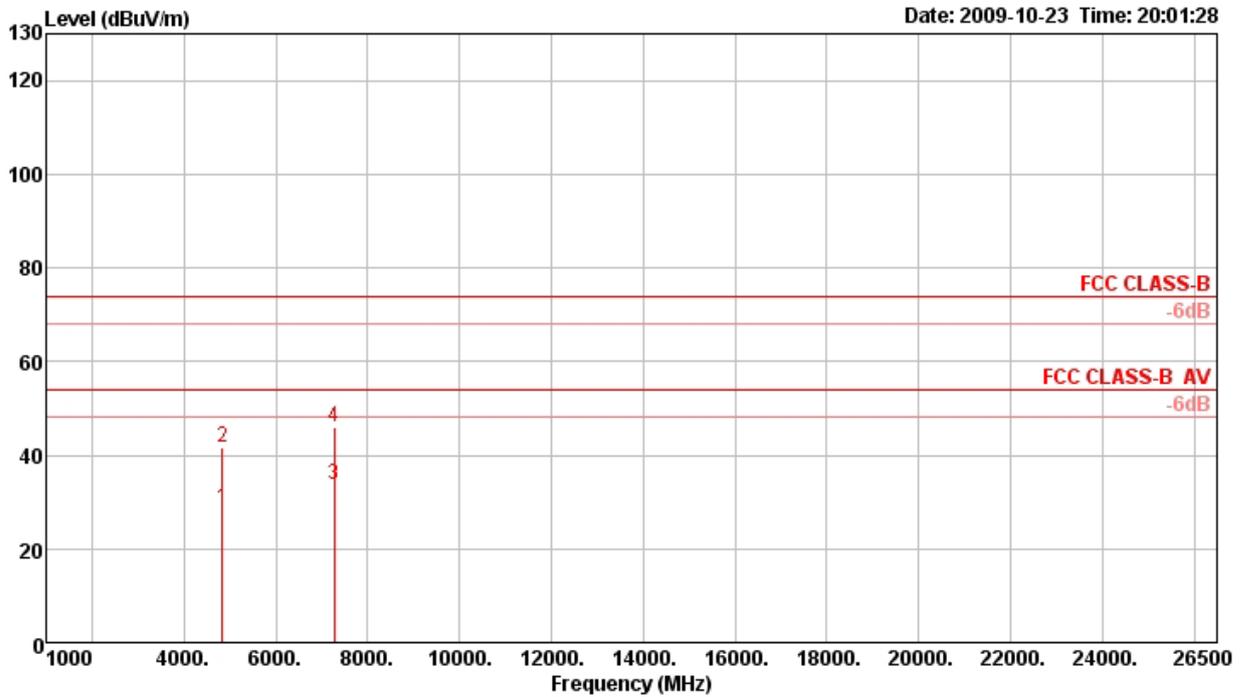

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4843.95	28.62	54.00	-25.38	28.32	3.01	35.20	32.49	268	100	Average	VERTICAL
2	4844.04	41.49	74.00	-32.51	41.19	3.01	35.20	32.49	268	100	Peak	VERTICAL
3 a	7265.83	33.64	54.00	-20.36	28.22	3.74	34.95	36.63	199	162	Average	VERTICAL
4 p	7266.62	46.10	74.00	-27.90	40.68	3.74	34.95	36.63	199	162	Peak	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 40MHz Ch 6 / Ant. 2

Horizontal

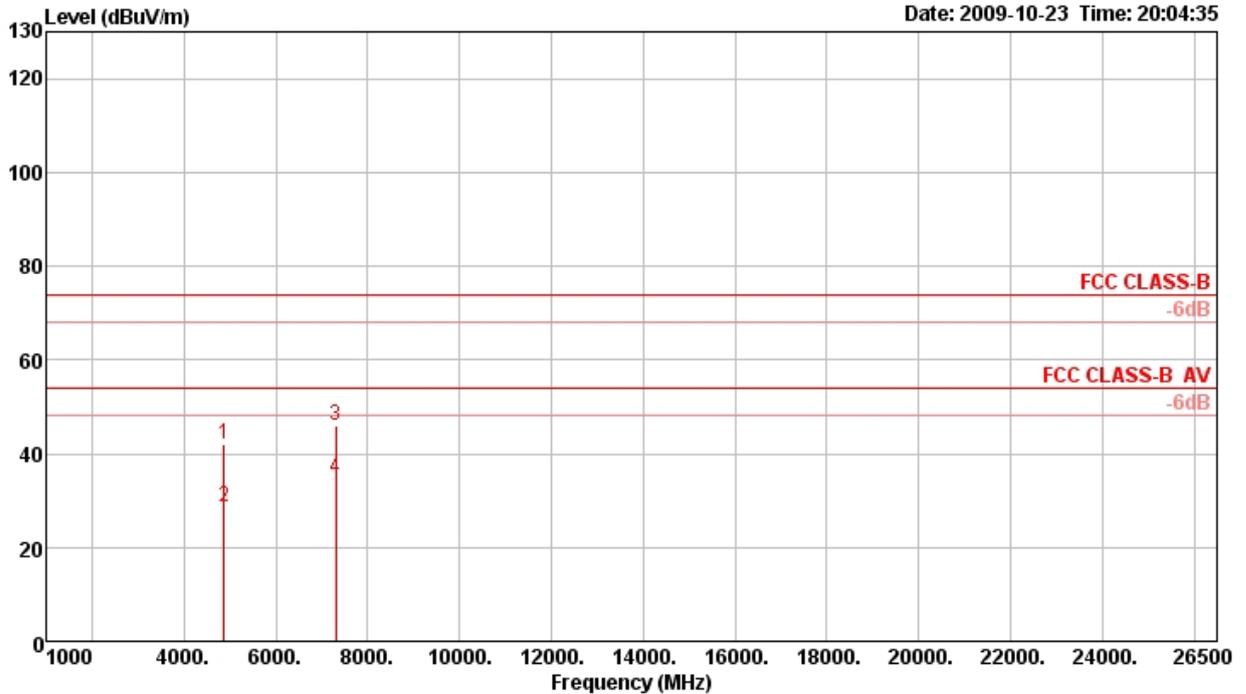

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4872.94	41.83	74.00	-32.17	41.41	3.01	35.15	32.56	115	115	Peak	HORIZONTAL
2	4874.02	28.44	54.00	-25.56	28.02	3.01	35.15	32.56	115	115	Average	HORIZONTAL
3 p	7311.64	46.07	74.00	-27.93	40.58	3.75	34.93	36.67	277	152	Peak	HORIZONTAL
4 a	7315.97	34.68	54.00	-19.32	29.17	3.75	34.93	36.69	277	152	Average	HORIZONTAL


**Vertical**

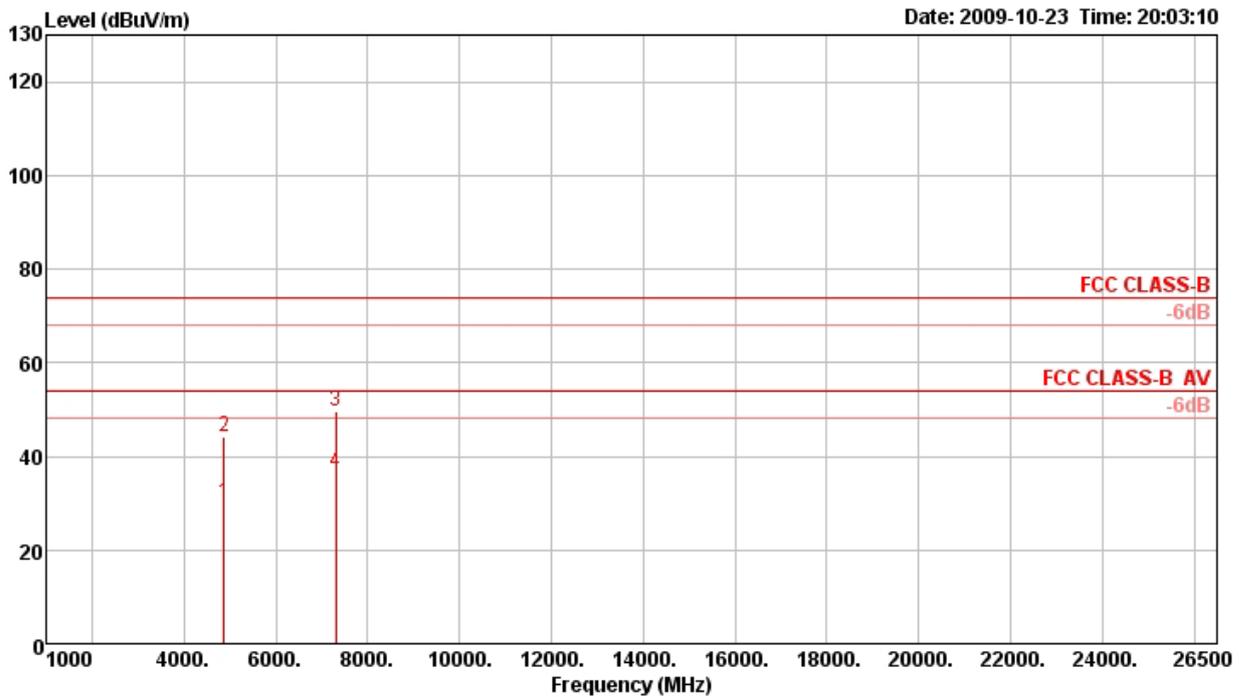

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4873.44	30.23	54.00	-23.77	29.81	3.01	35.15	32.56	203	100	Average	VERTICAL
2	4875.12	44.26	74.00	-29.74	43.84	3.01	35.15	32.56	203	100	Peak	VERTICAL
3 p	7311.06	49.72	74.00	-24.28	44.24	3.75	34.94	36.67	201	160	Peak	VERTICAL
4 a	7315.71	36.45	54.00	-17.55	30.97	3.75	34.94	36.67	201	160	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n MCS0 40MHz Ch 9 / Ant. 2

**Horizontal**

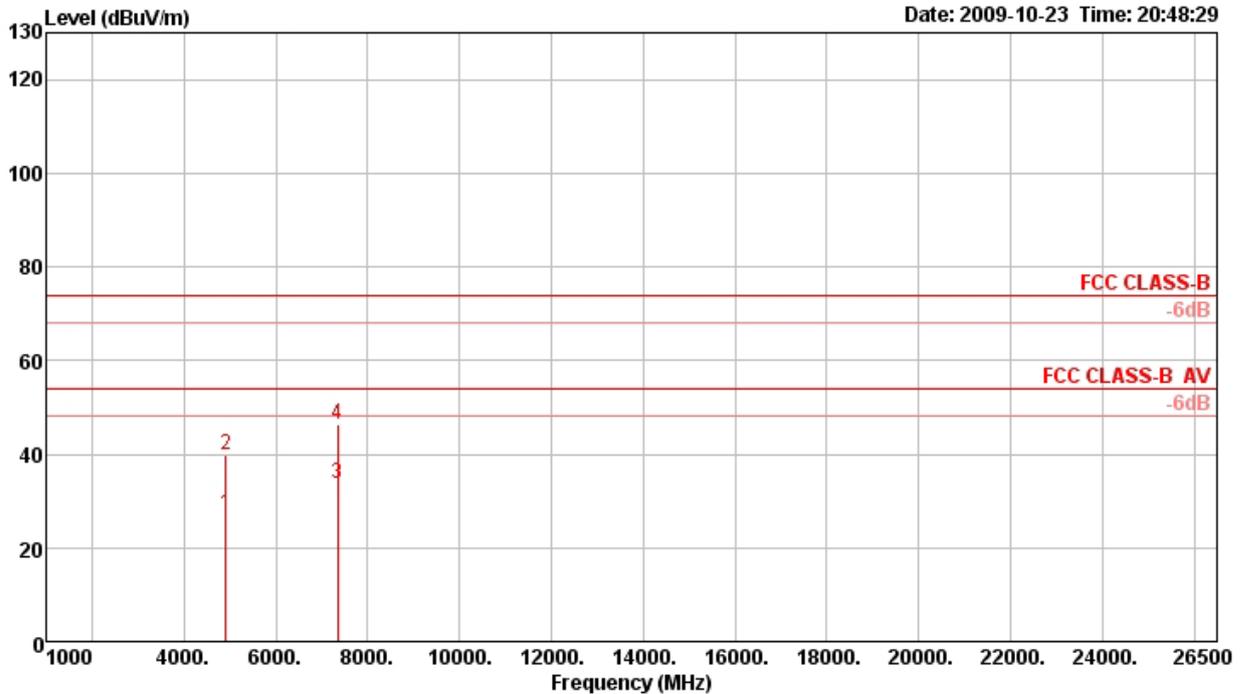

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4903.79	27.09	54.00	-26.91	26.53	3.02	35.09	32.63	9	194	Average	HORIZONTAL
2	4903.85	39.86	74.00	-34.14	39.30	3.02	35.09	32.63	9	194	Peak	HORIZONTAL
3 a	7355.75	33.72	54.00	-20.28	28.15	3.76	34.92	36.73	268	142	Average	HORIZONTAL
4 p	7356.20	46.30	74.00	-27.70	40.73	3.76	34.92	36.73	268	142	Peak	HORIZONTAL

**Vertical**

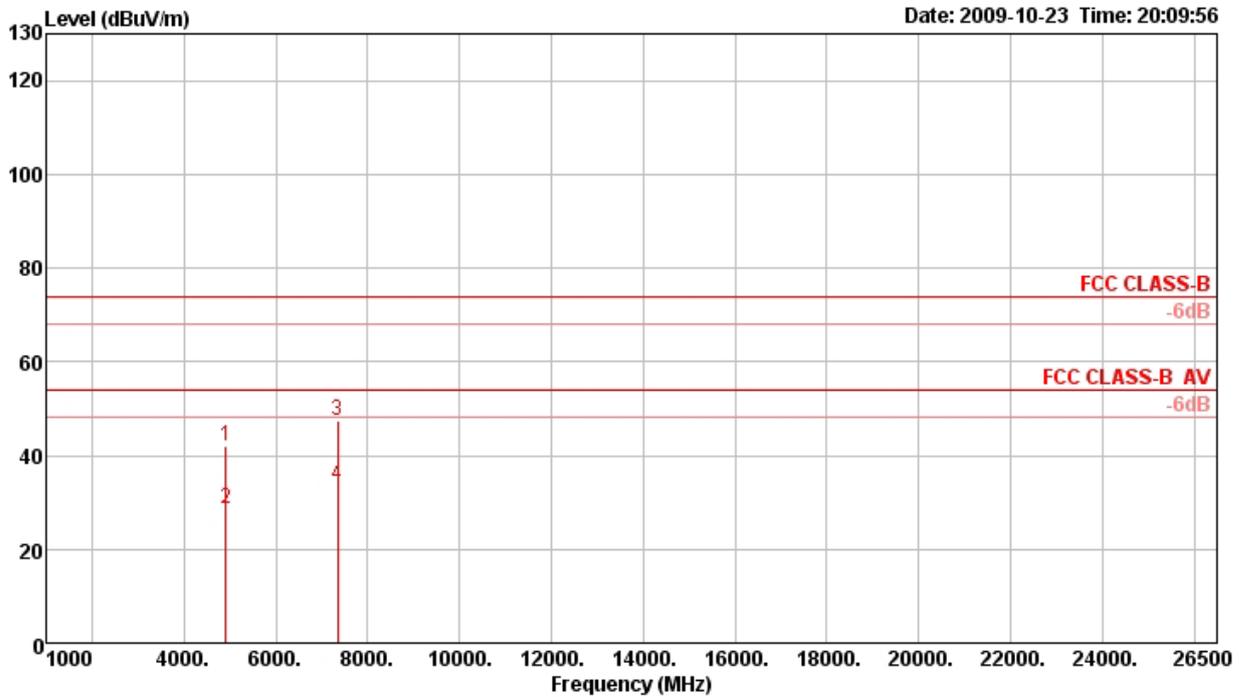

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4904.83	42.01	74.00	-31.99	41.45	3.02	35.09	32.63	165	100	Peak	VERTICAL
2	4904.97	28.61	54.00	-25.39	28.05	3.02	35.09	32.63	165	100	Average	VERTICAL
3 p	7355.76	47.27	74.00	-26.73	41.70	3.76	34.92	36.73	204	163	Peak	VERTICAL
4 a	7356.21	33.65	54.00	-20.35	28.08	3.76	34.92	36.73	204	163	Average	VERTICAL

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11b CH 1 / Ant. 2

**Horizontal**

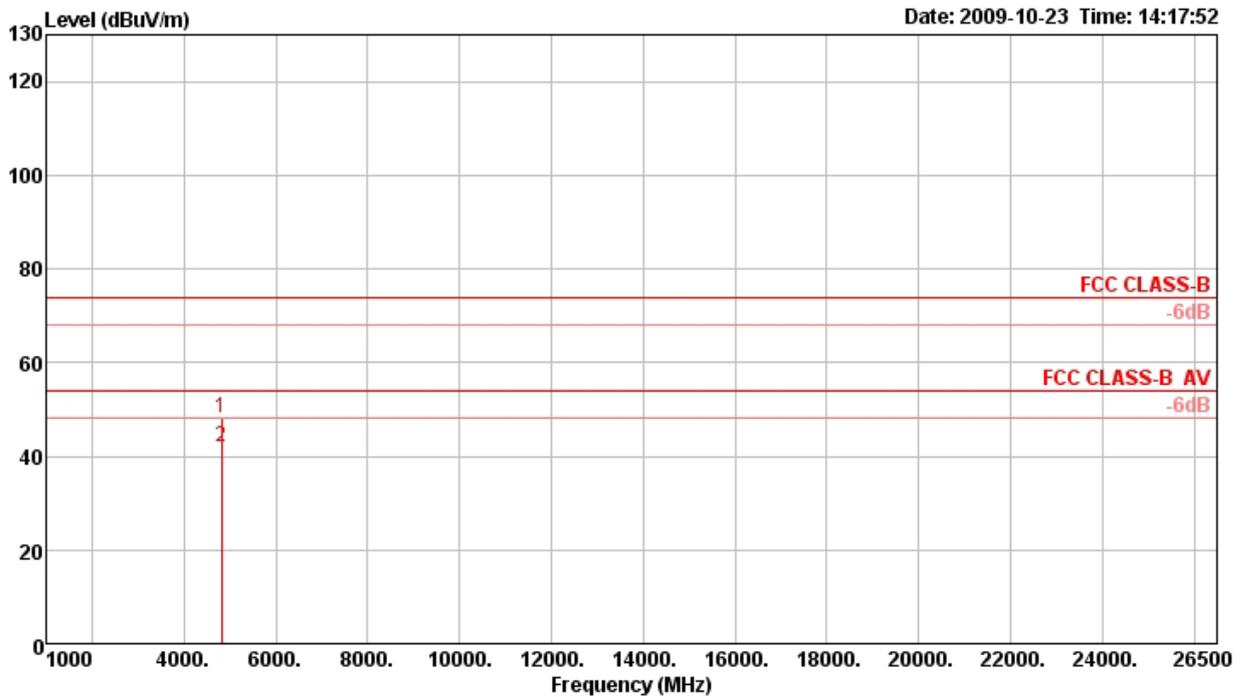

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.98	48.29	74.00	-25.71	48.09	3.00	35.26	32.46	151	143	Peak	HORIZONTAL
2 a	4824.05	42.18	54.00	-11.82	41.98	3.00	35.26	32.46	151	143	Average	HORIZONTAL


**Vertical**

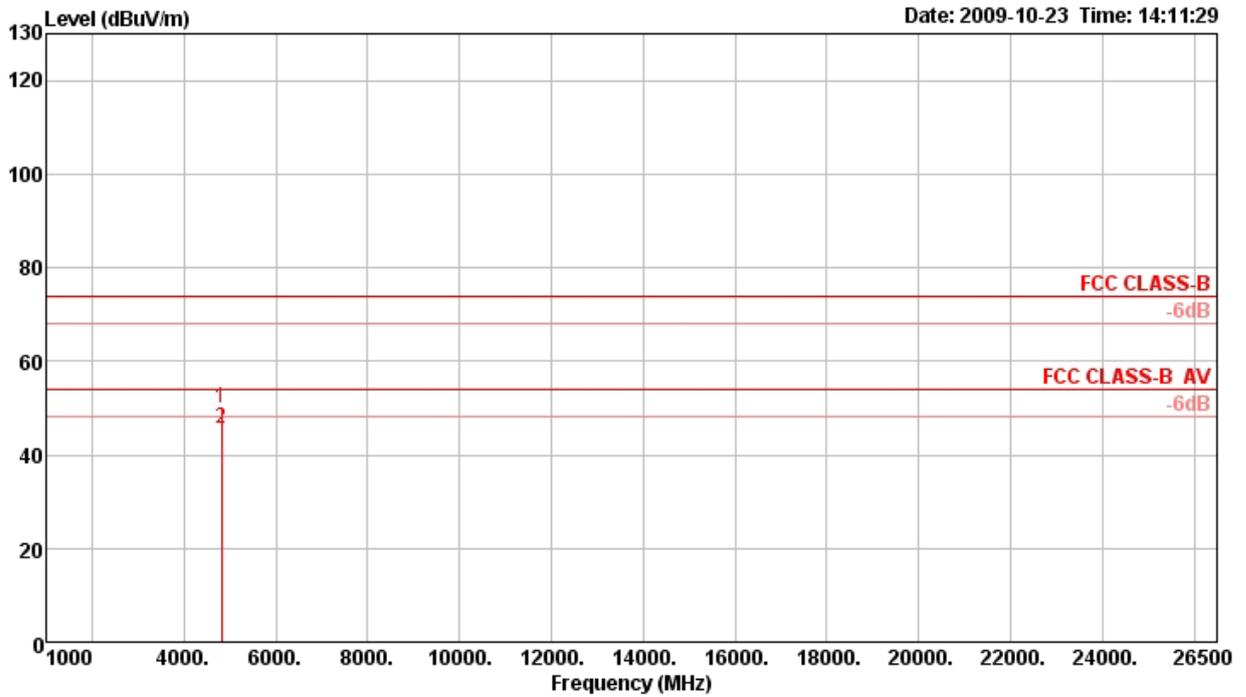

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.87	49.82	74.00	-24.18	49.62	3.00	35.26	32.46	217	100	Peak	VERTICAL
2 a	4824.07	45.69	54.00	-8.31	45.49	3.00	35.26	32.46	217	100	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11b CH 6 / Ant. 2

**Horizontal**

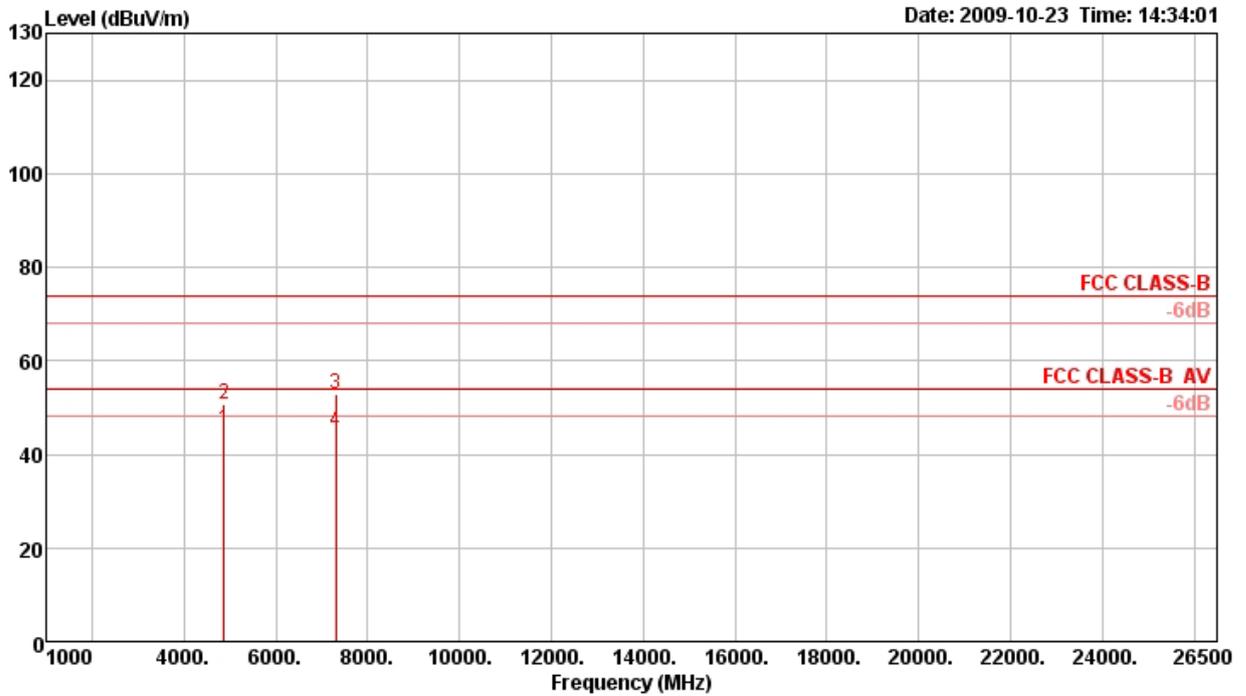

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4874.06	45.35	54.00	-8.65	44.93	3.01	35.15	32.56	14	200	Average	HORIZONTAL
2	4874.18	50.54	74.00	-23.46	50.12	3.01	35.15	32.56	14	200	Peak	HORIZONTAL
3 p	7313.30	52.89	74.00	-21.11	47.40	3.75	34.93	36.67	258	126	Peak	HORIZONTAL
4	7313.78	44.94	54.00	-9.06	39.45	3.75	34.93	36.67	258	126	Average	HORIZONTAL


**Vertical**

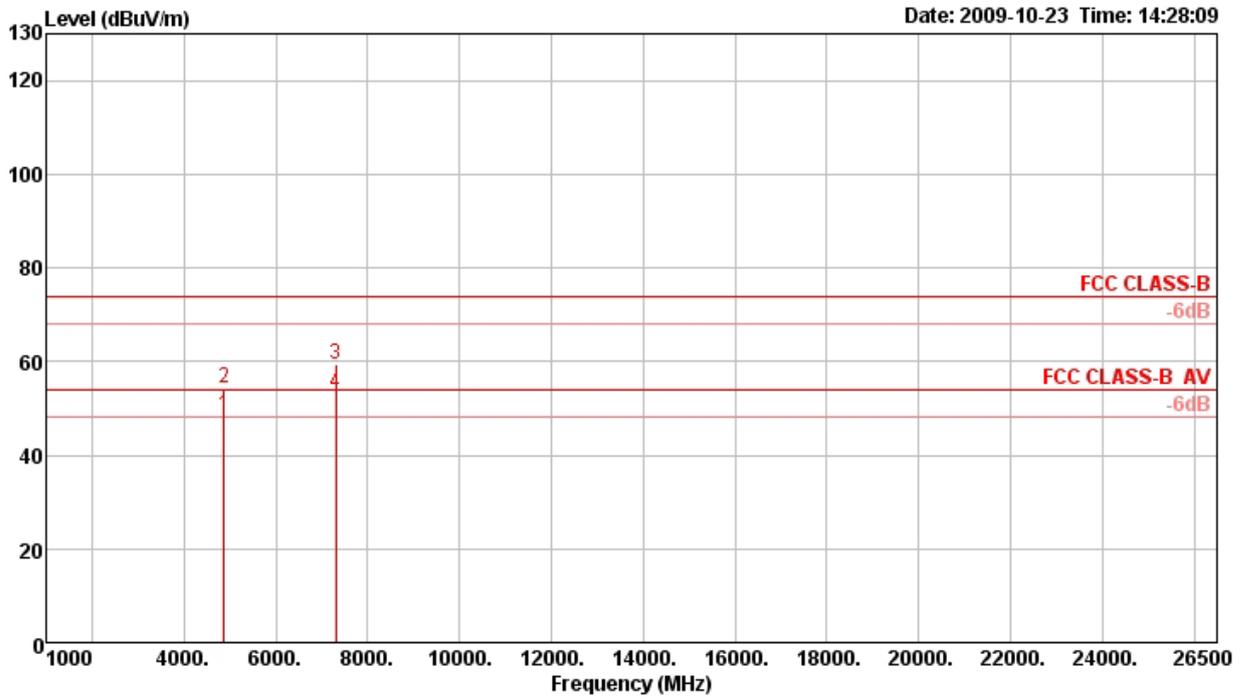

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	4874.06	48.61	54.00	-5.39	48.19	3.01	35.15	32.56	150	112	Average	VERTICAL
2	4874.22	54.26	74.00	-19.74	53.84	3.01	35.15	32.56	150	112	Peak	VERTICAL
3 p	7313.78	59.21	74.00	-14.79	53.72	3.75	34.93	36.67	331	161	Peak	VERTICAL
4 a	7313.82	53.20	54.00	-0.80	47.71	3.75	34.93	36.67	331	161	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11b CH 11 / Ant. 2

**Horizontal**

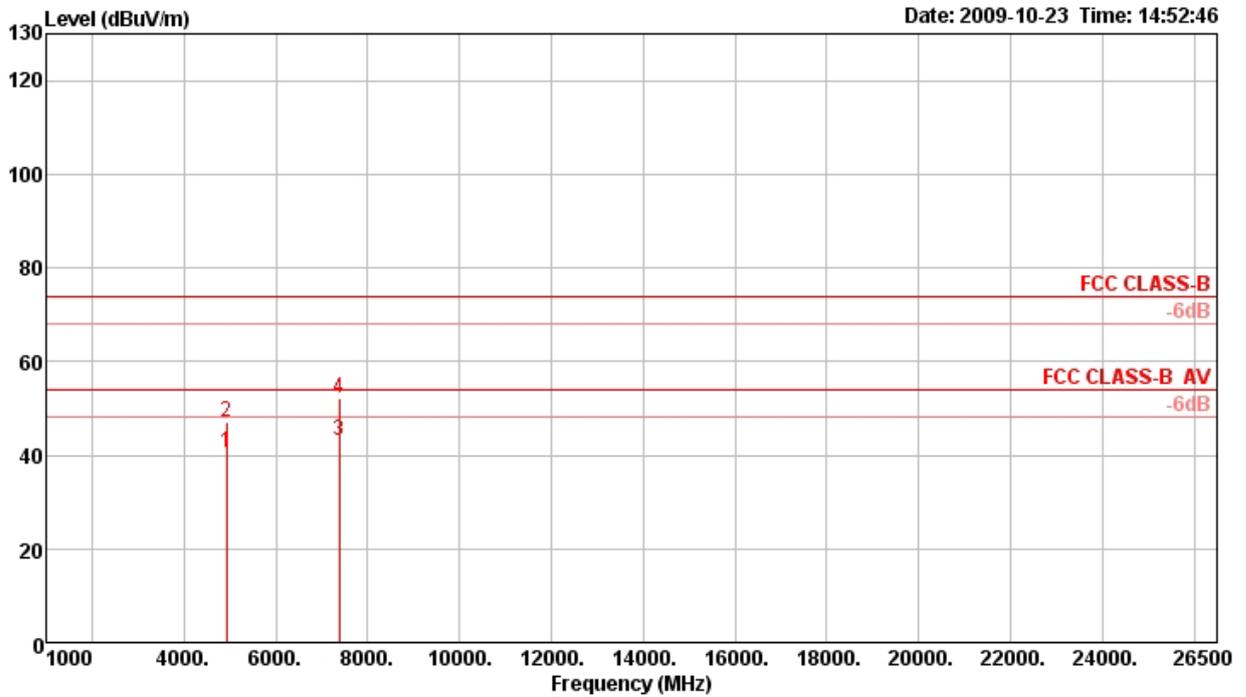

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4924.04	40.40	54.00	-13.60	39.75	3.02	35.03	32.66	7	193	Average	HORIZONTAL
2	4924.08	47.02	74.00	-26.98	46.37	3.02	35.03	32.66	7	193	Peak	HORIZONTAL
3 a	7388.60	43.23	54.00	-10.77	37.57	3.77	34.89	36.78	135	168	Average	HORIZONTAL
4 p	7388.64	52.30	74.00	-21.70	46.64	3.77	34.89	36.78	135	168	Peak	HORIZONTAL


**Vertical**

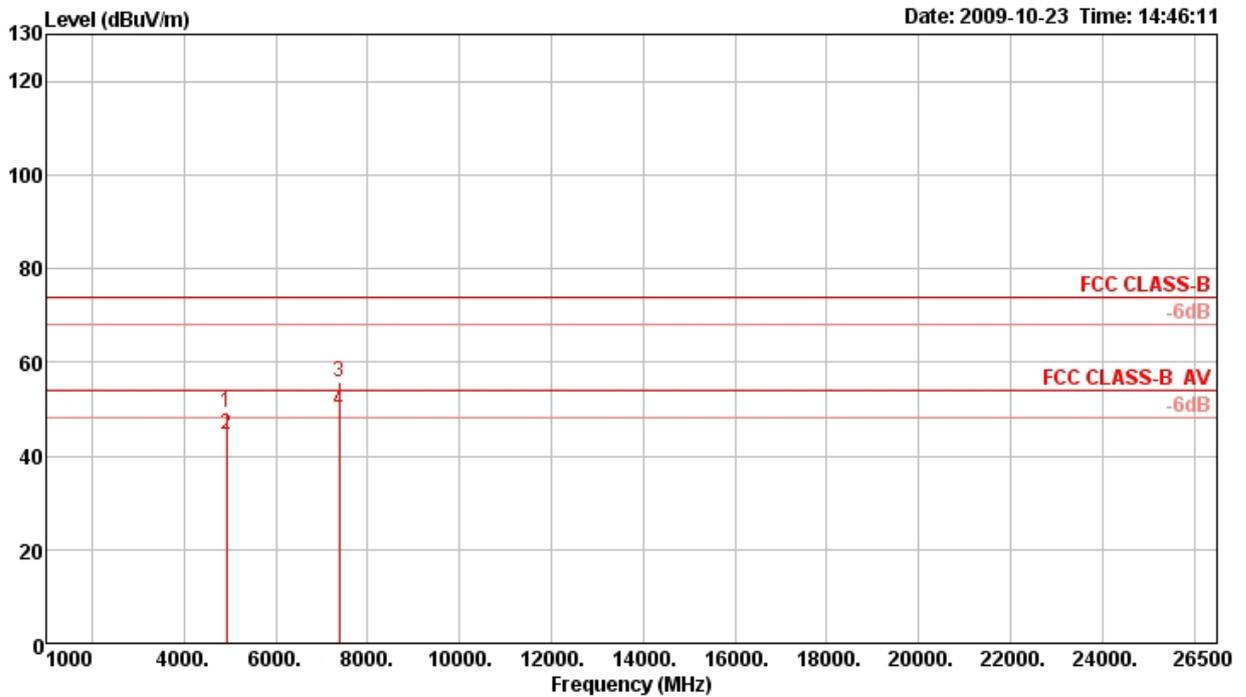

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4924.02	49.13	74.00	-24.87	48.48	3.02	35.03	32.66	151	112	Peak	VERTICAL
2	4924.08	44.60	54.00	-9.40	43.95	3.02	35.03	32.66	151	112	Average	VERTICAL
3 p	7388.58	55.82	74.00	-18.18	50.16	3.77	34.89	36.78	338	111	Peak	VERTICAL
4 a	7388.80	49.77	54.00	-4.23	44.11	3.77	34.89	36.78	338	111	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11g CH 1 / Ant. 2

**Horizontal**

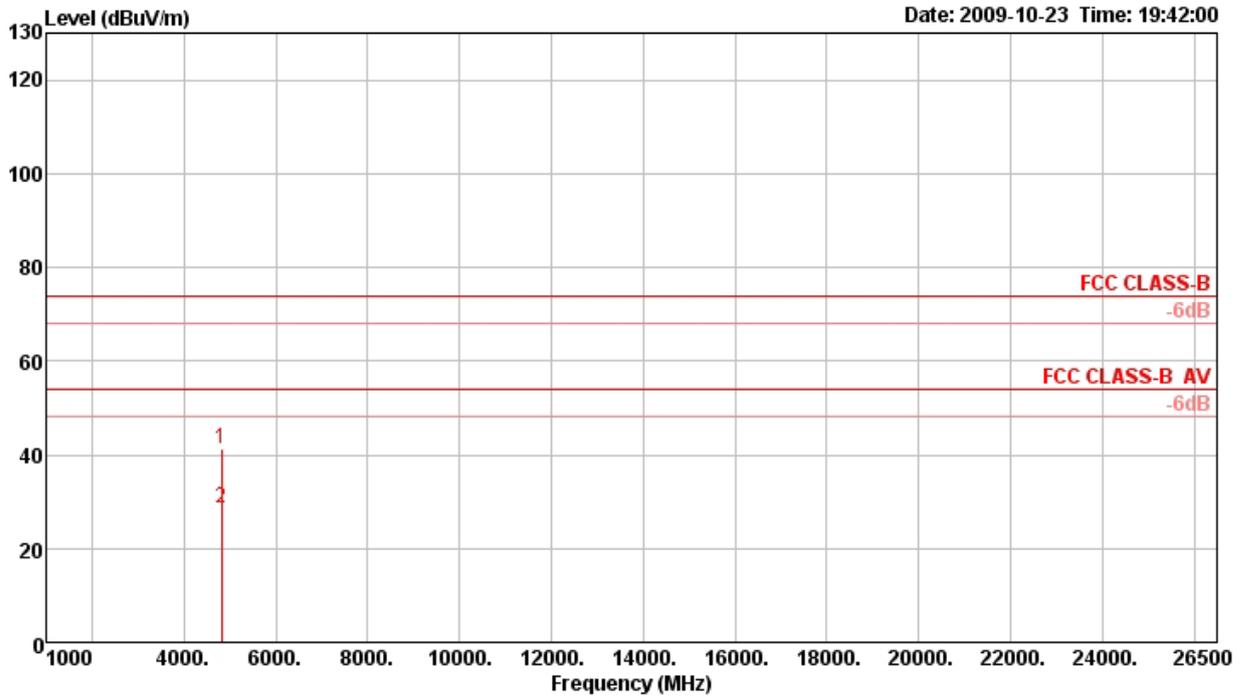

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4825.08	41.34	74.00	-32.66	41.14	3.00	35.26	32.46	30	171	Peak	HORIZONTAL
2 a	4826.33	28.43	54.00	-25.57	28.23	3.00	35.26	32.46	30	171	Average	HORIZONTAL


**Vertical**

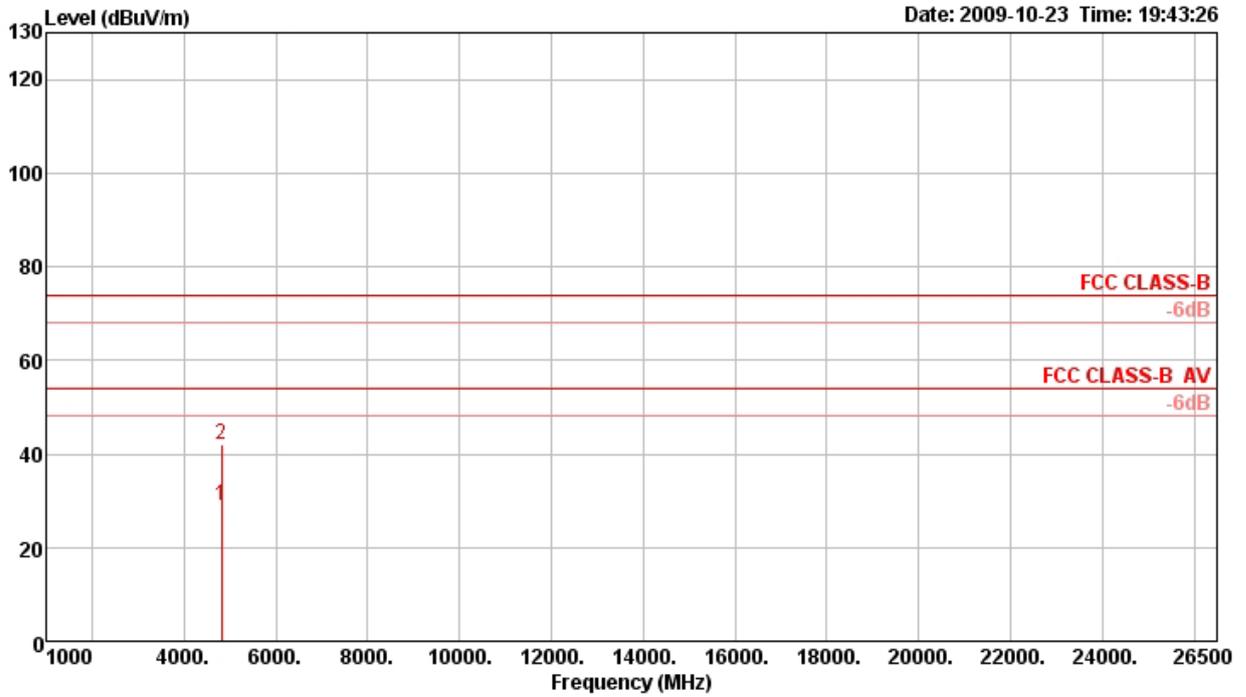

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4825.87	29.04	54.00	-24.96	28.84	3.00	35.26	32.46	164	100	Average	VERTICAL
2 p	4826.04	41.90	74.00	-32.10	41.70	3.00	35.26	32.46	164	100	Peak	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11g CH 6 / Ant. 2

**Horizontal**

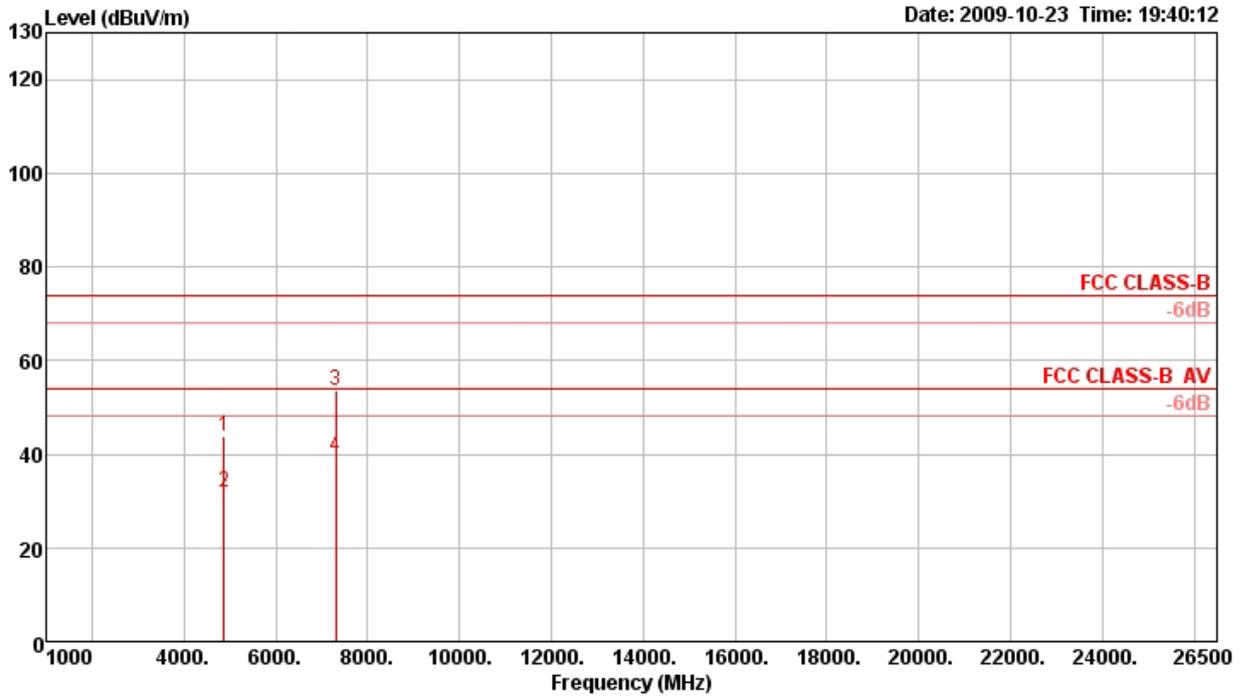

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4877.21	43.75	74.00	-30.25	43.33	3.01	35.15	32.56	31	179	Peak	HORIZONTAL
2	4877.29	31.75	54.00	-22.25	31.33	3.01	35.15	32.56	31	179	Average	HORIZONTAL
3 p	7312.20	53.45	74.00	-20.55	47.96	3.75	34.93	36.67	270	156	Peak	HORIZONTAL
4 a	7316.53	39.30	54.00	-14.70	33.79	3.75	34.93	36.69	270	156	Average	HORIZONTAL


**Vertical**

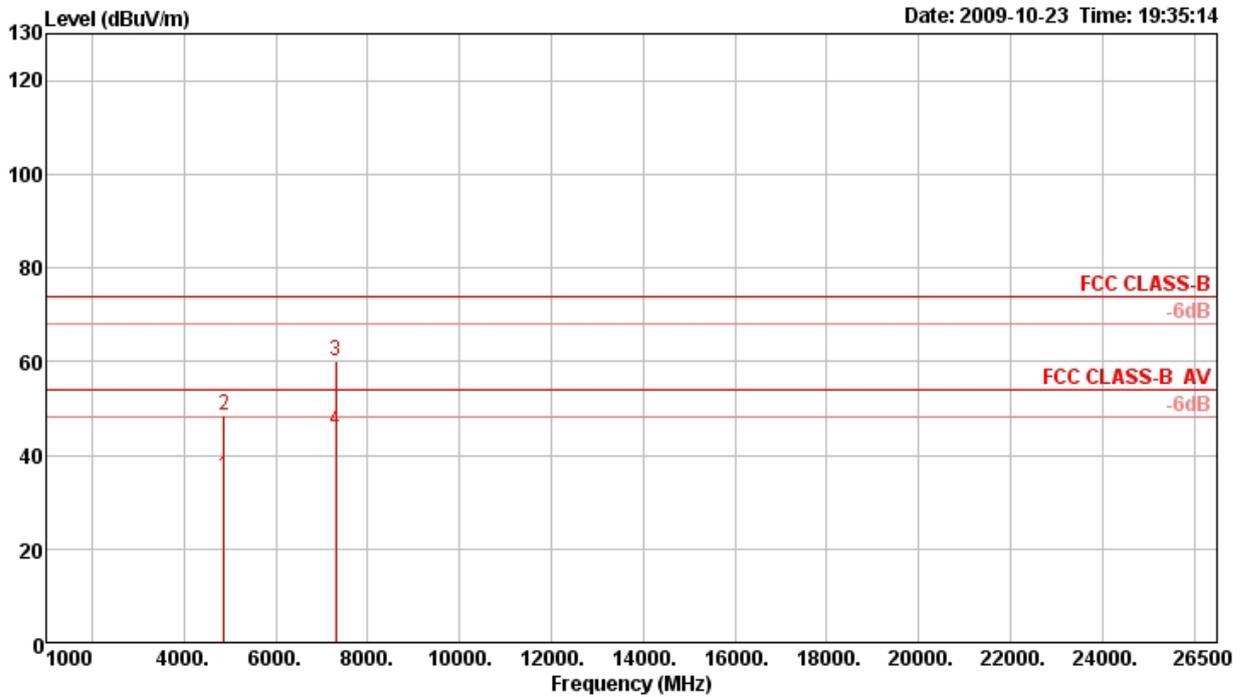

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4875.92	35.52	54.00	-18.48	35.10	3.01	35.15	32.56	162	100	Average	VERTICAL
2	4878.81	48.53	74.00	-25.47	48.11	3.01	35.15	32.56	162	100	Peak	VERTICAL
3 p	7312.20	60.26	74.00	-13.74	54.77	3.75	34.93	36.67	201	159	Peak	VERTICAL
4 a	7316.85	45.33	54.00	-8.67	39.82	3.75	34.93	36.69	201	159	Average	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11g CH 11 / Ant. 2

**Horizontal**

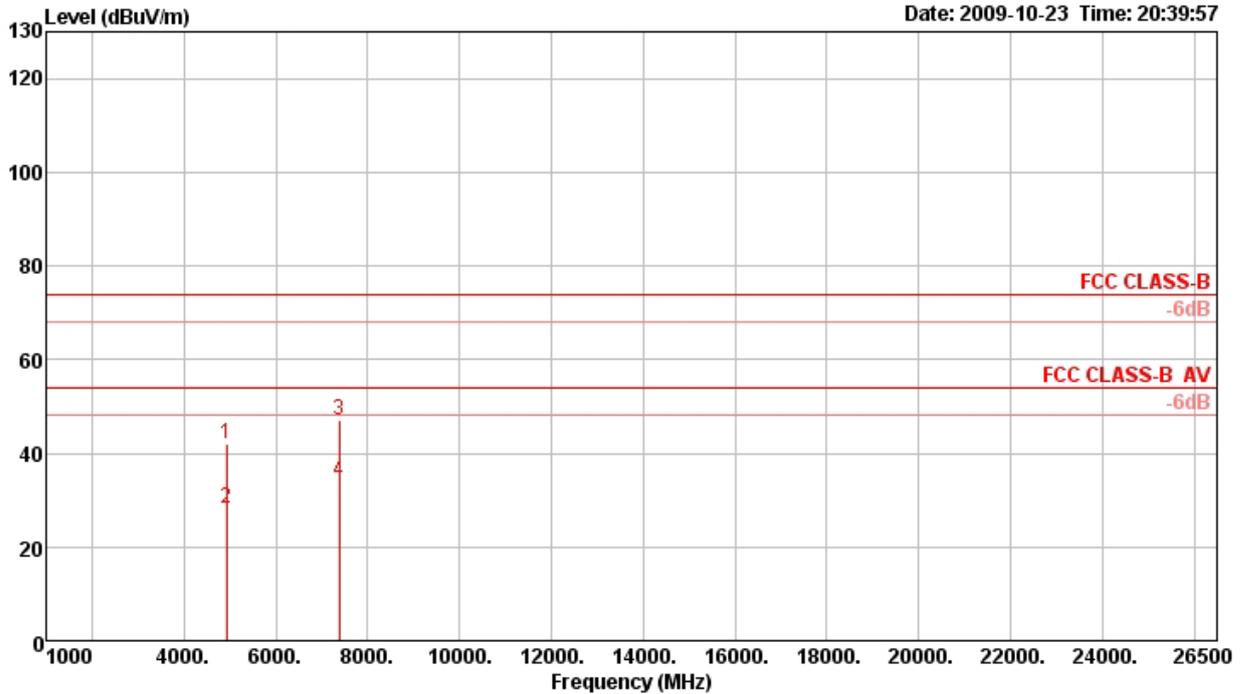

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.76	41.99	74.00	-32.01	41.34	3.02	35.03	32.66	32	176	Peak	HORIZONTAL
2	4923.91	28.07	54.00	-25.93	27.42	3.02	35.03	32.66	32	176	Average	HORIZONTAL
3 p	7385.06	46.94	74.00	-27.06	41.30	3.76	34.90	36.78	278	156	Peak	HORIZONTAL
4 a	7385.06	33.88	54.00	-20.12	28.24	3.76	34.90	36.78	278	156	Average	HORIZONTAL

**Vertical**

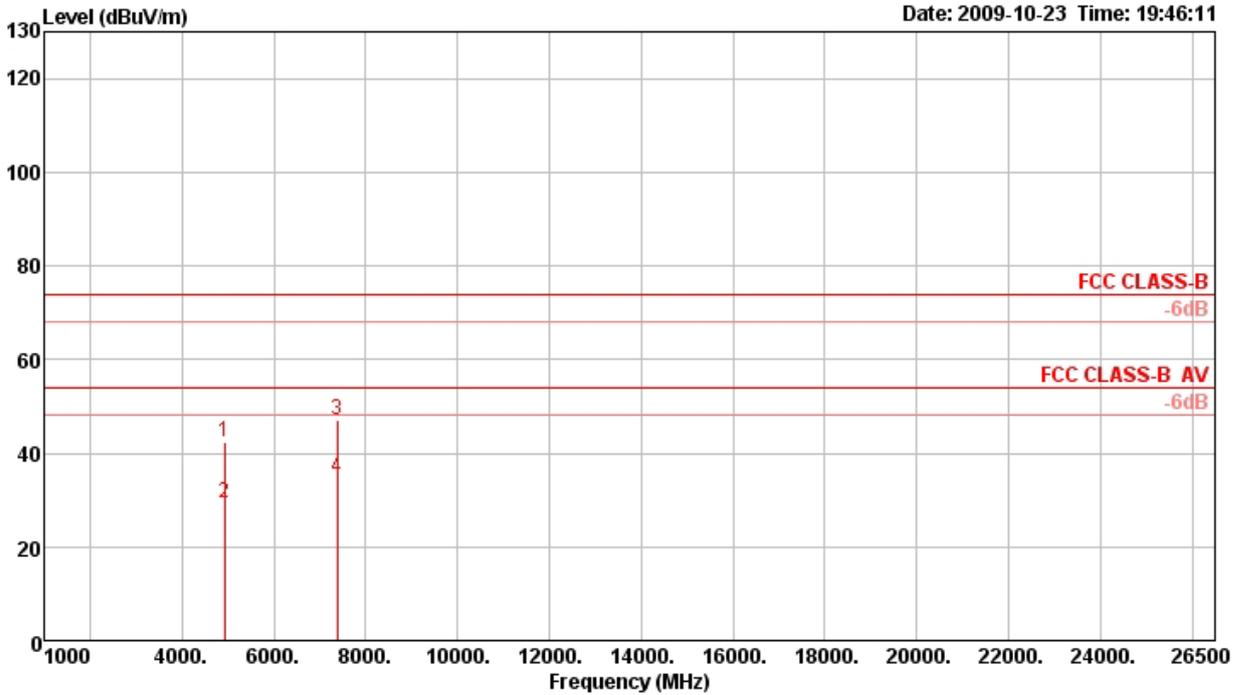

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.14	42.40	74.00	-31.60	41.75	3.02	35.03	32.66	169	100	Peak	VERTICAL
2	4923.82	29.27	54.00	-24.73	28.62	3.02	35.03	32.66	169	100	Average	VERTICAL
3 p	7385.70	47.14	74.00	-26.86	41.50	3.76	34.90	36.78	204	152	Peak	VERTICAL
4 a	7385.89	34.67	54.00	-19.33	29.03	3.76	34.90	36.78	204	152	Average	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Antenna 1 >

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 20MHz Ch 1, 6, 11 / Ant. 1
<b>Test Date</b>	Oct. 23, 2009		

##### Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	52.53	54.00	-1.47	22.61	2.05	0.00	27.87	150	100	Average	HORIZONTAL
2	2390.00	66.94	74.00	-7.06	37.02	2.05	0.00	27.87	150	100	Peak	HORIZONTAL
3 a	2411.04	98.42	54.00			2.05	0.00	27.84	150	100	Average	HORIZONTAL
4 p	2412.96	109.68	74.00			2.05	0.00	27.84	150	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz

##### Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.68	55.37	74.00	-18.63	25.46	2.04	0.00	27.87	359	100	Peak	HORIZONTAL
2	2390.00	43.86	54.00	-10.14	13.94	2.05	0.00	27.87	359	100	Average	HORIZONTAL
3 a	2435.72	104.01	54.00			2.07	0.00	27.81	359	100	Average	HORIZONTAL
4 p	2438.12	115.88	74.00			2.07	0.00	27.78	359	100	Peak	HORIZONTAL
5	2483.50	44.55	54.00	-9.45	14.72	2.10	0.00	27.73	359	100	Average	HORIZONTAL
6	2483.50	56.66	74.00	-17.34	26.83	2.10	0.00	27.73	359	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

##### Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2460.56	94.74	54.00			2.08	0.00	27.76	359	100	Average	HORIZONTAL
2 p	2461.36	109.26	74.00			2.08	0.00	27.76	359	100	Peak	HORIZONTAL
3 !	2483.50	53.66	54.00	-0.34	23.83	2.10	0.00	27.73	359	100	Average	HORIZONTAL
4 !	2483.66	69.14	74.00	-4.86	39.31	2.10	0.00	27.73	359	100	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 40MHz Ch 3, 6, 9 / Ant. 1
<b>Test Date</b>	Oct. 23, 2009		

**Channel 3**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2384.87	65.87	74.00	-8.13	35.94	2.04	0.00	27.89	150	100	Peak	HORIZONTAL
2 !	2390.00	52.57	54.00	-1.43	22.65	2.05	0.00	27.87	150	100	Average	HORIZONTAL
3 a	2417.19	91.99	54.00			2.07	0.00	27.84	150	100	Average	HORIZONTAL
4 p	2425.53	103.67	74.00			2.07	0.00	27.81	150	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	50.24	54.00	-3.76	20.32	2.05	0.00	27.87	357	100	Average	HORIZONTAL
2 !	2390.00	70.98	74.00	-3.02	41.06	2.05	0.00	27.87	357	100	Peak	HORIZONTAL
3 p	2432.19	108.13	74.00			2.07	0.00	27.81	357	100	Peak	HORIZONTAL
4 a	2442.13	82.25	54.00			2.08	0.00	27.78	357	100	Average	HORIZONTAL
5 !	2483.50	53.08	54.00	-0.92	23.25	2.10	0.00	27.73	357	100	Average	HORIZONTAL
6 !	2484.46	73.88	74.00	-0.12	44.05	2.10	0.00	27.73	357	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 9**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2457.13	87.34	54.00			2.08	0.00	27.76	358	100	Average	HORIZONTAL
2 p	2457.77	103.99	74.00			2.08	0.00	27.76	358	100	Peak	HORIZONTAL
3 !	2483.50	53.11	54.00	-0.89	23.28	2.10	0.00	27.73	358	100	Average	HORIZONTAL
4 !	2483.50	68.27	74.00	-5.73	38.44	2.10	0.00	27.73	358	100	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b CH 1, 6, 11 / Ant. 1
<b>Test Date</b>	Oct. 23, 2009		

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2390.00	47.13	54.00	-6.87	17.21	2.05	0.00	27.87	151	100	Average	HORIZONTAL
2	2390.00	58.44	74.00	-15.56	28.52	2.05	0.00	27.87	151	100	Peak	HORIZONTAL
3 a	2414.72	109.58	54.00			2.05	0.00	27.84	151	100	Average	HORIZONTAL
4 p	2414.72	113.19	74.00			2.05	0.00	27.84	151	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.52	49.65	74.00	-24.35	19.74	2.04	0.00	27.87	358	100	Peak	HORIZONTAL
2	2390.00	40.08	54.00	-13.92	10.16	2.05	0.00	27.87	358	100	Average	HORIZONTAL
3 a	2439.72	110.09	54.00			2.07	0.00	27.78	358	100	Average	HORIZONTAL
4 p	2439.72	113.72	74.00			2.07	0.00	27.78	358	100	Peak	HORIZONTAL
5	2483.50	41.13	54.00	-12.87	11.30	2.10	0.00	27.73	358	100	Average	HORIZONTAL
6	2483.50	51.61	74.00	-22.39	21.78	2.10	0.00	27.73	358	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2464.72	107.65	54.00			2.08	0.00	27.76	358	100	Average	HORIZONTAL
2 p	2464.72	111.22	74.00			2.08	0.00	27.76	358	100	Peak	HORIZONTAL
3 !	2483.50	51.48	54.00	-2.52	21.65	2.10	0.00	27.73	358	100	Average	HORIZONTAL
4	2483.50	61.38	74.00	-12.62	31.55	2.10	0.00	27.73	358	100	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11g CH 1, 6, 11 / Ant. 1
<b>Test Date</b>	Oct. 23, 2009		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	51.18	54.00	-2.82	21.26	2.05	0.00	27.87	151	100	Average	HORIZONTAL
2	2390.00	63.87	74.00	-10.13	33.95	2.05	0.00	27.87	151	100	Peak	HORIZONTAL
3 a	2411.20	98.62	54.00			2.05	0.00	27.84	151	100	Average	HORIZONTAL
4 p	2414.24	108.72	74.00			2.05	0.00	27.84	151	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.04	55.93	74.00	-18.07	26.02	2.04	0.00	27.87	358	100	Peak	HORIZONTAL
2	2390.00	43.60	54.00	-10.40	13.68	2.05	0.00	27.87	358	100	Average	HORIZONTAL
3 p	2436.20	115.28	74.00			2.07	0.00	27.81	358	100	Peak	HORIZONTAL
4 a	2438.12	104.42	54.00			2.07	0.00	27.78	358	100	Average	HORIZONTAL
5	2483.50	44.40	54.00	-9.60	14.57	2.10	0.00	27.73	358	100	Average	HORIZONTAL
6	2484.14	55.91	74.00	-18.09	26.08	2.10	0.00	27.73	358	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2460.88	97.99	54.00			2.08	0.00	27.76	359	100	Average	HORIZONTAL
2 p	2461.68	108.25	74.00			2.08	0.00	27.76	359	100	Peak	HORIZONTAL
3 !	2483.50	53.36	54.00	-0.64	23.53	2.10	0.00	27.73	359	100	Average	HORIZONTAL
4	2483.66	67.29	74.00	-6.71	37.46	2.10	0.00	27.73	359	100	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## &lt;For Antenna 2&gt;

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 20MHz Ch 1, 6, 11 / Ant. 2
<b>Test Date</b>	Oct. 23, 2009		

## Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.68	66.43	74.00	-7.57	36.52	2.04	0.00	27.87	280	100	Peak	VERTICAL
2 !	2390.00	52.42	54.00	-1.58	22.50	2.05	0.00	27.87	280	100	Average	VERTICAL
3 p	2410.40	108.21	74.00			2.05	0.00	27.84	280	100	Peak	VERTICAL
4 a	2413.12	97.43	54.00			2.05	0.00	27.84	280	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz

## Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.84	58.05	74.00	-15.95	28.13	2.05	0.00	27.87	279	100	Peak	VERTICAL
2	2390.00	44.92	54.00	-9.08	15.00	2.05	0.00	27.87	279	100	Average	VERTICAL
3 p	2436.04	115.70	74.00			2.07	0.00	27.81	279	100	Peak	VERTICAL
4 a	2438.12	103.91	54.00			2.07	0.00	27.78	279	100	Average	VERTICAL
5	2483.50	44.40	54.00	-9.60	14.57	2.10	0.00	27.73	279	100	Average	VERTICAL
6	2483.98	57.14	74.00	-16.86	27.31	2.10	0.00	27.73	279	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

## Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2461.52	91.60	54.00			2.08	0.00	27.76	146	100	Average	VERTICAL
2 p	2463.12	108.18	74.00			2.08	0.00	27.76	146	100	Peak	VERTICAL
3 !	2483.50	53.32	54.00	-0.68	23.49	2.10	0.00	27.73	146	100	Average	VERTICAL
4	2483.66	67.63	74.00	-6.37	37.80	2.10	0.00	27.73	146	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	Draft n MCS0 40MHz Ch 3, 6, 9 / Ant. 2
<b>Test Date</b>	Oct. 23, 2009		

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2384.55	65.34	74.00	-8.66	35.41	2.04	0.00	27.89	280	100	Peak	VERTICAL
2 !	2390.00	52.52	54.00	-1.48	22.60	2.05	0.00	27.87	280	100	Average	VERTICAL
3 a	2426.81	91.89	54.00			2.07	0.00	27.81	280	100	Average	VERTICAL
4 p	2426.81	103.53	74.00			2.07	0.00	27.81	280	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.36	64.96	74.00	-9.04	35.05	2.04	0.00	27.87	146	100	Peak	VERTICAL
2	2390.00	47.05	54.00	-6.95	17.13	2.05	0.00	27.87	146	100	Average	VERTICAL
3 a	2442.13	79.80	54.00			2.08	0.00	27.78	146	100	Average	VERTICAL
4 p	2443.41	106.20	74.00			2.08	0.00	27.78	146	100	Peak	VERTICAL
5 !	2483.50	53.27	54.00	-0.73	23.44	2.10	0.00	27.73	146	100	Average	VERTICAL
6 !	2484.46	73.53	74.00	-0.47	43.70	2.10	0.00	27.73	146	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2456.81	102.91	74.00			2.08	0.00	27.76	146	100	Peak	VERTICAL
2 a	2457.13	86.95	54.00			2.08	0.00	27.76	146	100	Average	VERTICAL
3 !	2483.82	53.76	54.00	-0.24	23.93	2.10	0.00	27.73	146	100	Average	VERTICAL
4 !	2489.91	68.56	74.00	-5.44	38.76	2.10	0.00	27.70	146	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11b CH 1, 6, 11 / Ant. 2
<b>Test Date</b>	Oct. 23, 2009		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2390.00	47.51	54.00	-6.49	17.59	2.05	0.00	27.87	280	100	Average	VERTICAL
2	2390.00	59.19	74.00	-14.81	29.27	2.05	0.00	27.87	280	100	Peak	VERTICAL
3 a	2414.72	108.76	54.00			2.05	0.00	27.84	280	100	Average	VERTICAL
4 p	2414.72	112.33	74.00			2.05	0.00	27.84	280	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.04	50.46	74.00	-23.54	20.55	2.04	0.00	27.87	280	100	Peak	VERTICAL
2	2390.00	40.55	54.00	-13.45	10.63	2.05	0.00	27.87	280	100	Average	VERTICAL
3 a	2439.72	110.10	54.00			2.07	0.00	27.78	280	100	Average	VERTICAL
4 p	2439.72	113.60	74.00			2.07	0.00	27.78	280	100	Peak	VERTICAL
5	2483.50	40.90	54.00	-13.10	11.07	2.10	0.00	27.73	280	100	Average	VERTICAL
6	2484.78	51.68	74.00	-22.32	21.85	2.10	0.00	27.73	280	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2464.72	106.75	54.00			2.08	0.00	27.76	146	100	Average	VERTICAL
2 p	2464.72	110.35	74.00			2.08	0.00	27.76	146	100	Peak	VERTICAL
3 !	2483.50	51.20	54.00	-2.80	21.37	2.10	0.00	27.73	146	100	Average	VERTICAL
4	2483.50	60.66	74.00	-13.34	30.83	2.10	0.00	27.73	146	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Jacky Ho	<b>Configurations</b>	802.11g CH 1, 6, 11 / Ant. 2
<b>Test Date</b>	Oct. 23, 2009		

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	51.48	54.00	-2.52	21.56	2.05	0.00	27.87	278	100	Average	VERTICAL
2	2390.00	65.72	74.00	-8.28	35.80	2.05	0.00	27.87	278	100	Peak	VERTICAL
3 p	2411.84	107.82	74.00			2.05	0.00	27.84	278	100	Peak	VERTICAL
4 a	2412.96	97.52	54.00			2.05	0.00	27.84	278	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2390.00	44.60	54.00	-9.40	14.68	2.05	0.00	27.87	280	100	Average	VERTICAL
2	2390.00	56.39	74.00	-17.61	26.47	2.05	0.00	27.87	280	100	Peak	VERTICAL
3 p	2434.76	115.70	74.00			2.07	0.00	27.81	280	100	Peak	VERTICAL
4 a	2436.20	104.45	54.00			2.07	0.00	27.81	280	100	Average	VERTICAL
5	2483.50	44.18	54.00	-9.82	14.35	2.10	0.00	27.73	280	100	Average	VERTICAL
6	2485.74	57.06	74.00	-16.94	27.23	2.10	0.00	27.73	280	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2462.96	97.70	54.00			2.08	0.00	27.76	146	100	Average	VERTICAL
2 p	2463.28	108.88	74.00			2.08	0.00	27.76	146	100	Peak	VERTICAL
3 !	2483.50	53.75	54.00	-0.25	23.92	2.10	0.00	27.73	146	100	Average	VERTICAL
4 !	2483.50	68.07	74.00	-5.93	38.24	2.10	0.00	27.73	146	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


<For Antenna 1>

Low Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. 1 / 2412 MHz

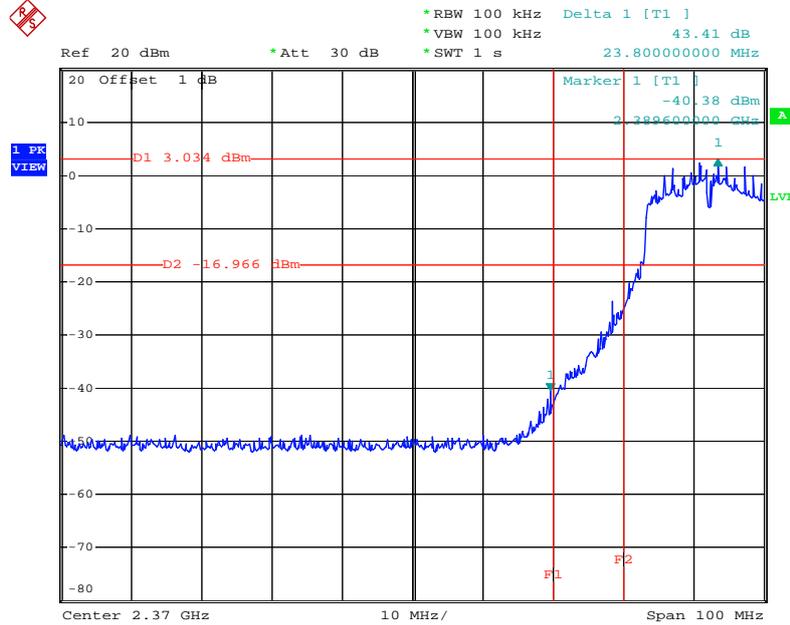


Date: 24.OCT.2009 15:48:16

High Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. 1 / 2462 MHz

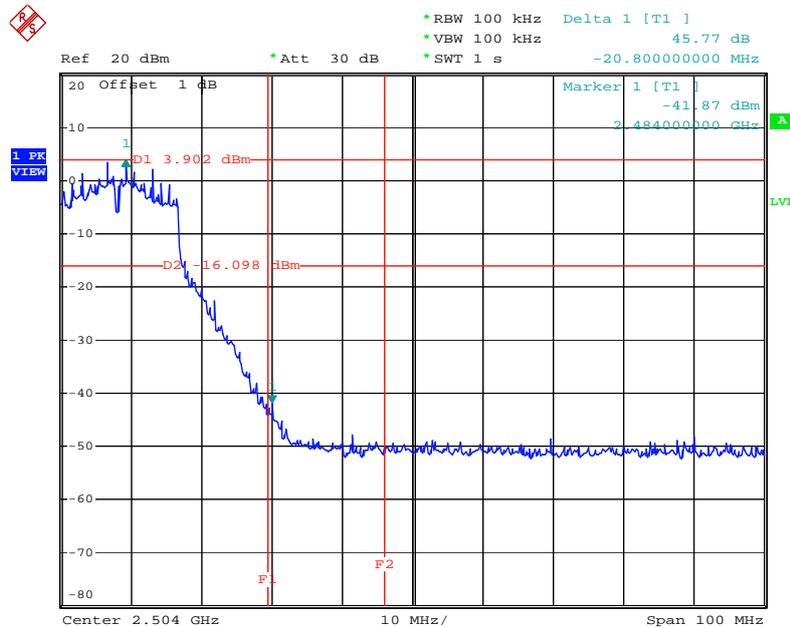


Date: 24.OCT.2009 15:49:40

### Low Band Edge Plot on Configuration Drafft n MCS0 40MHz Ant. 1 / 2422 MHz

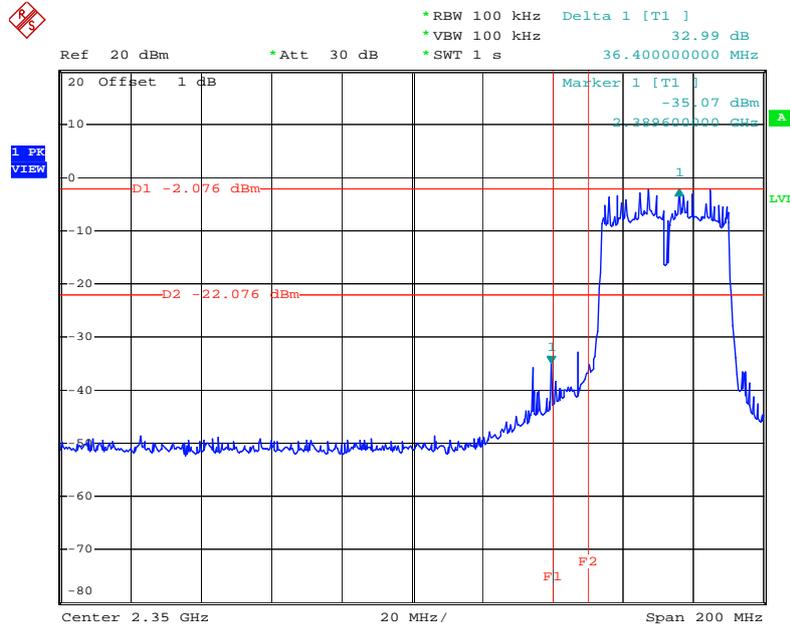


Date: 24.OCT.2009 15:44:22

### High Band Edge Plot on Configuration Drafft n MCS0 40MHz Ant. 1 / 2452 MHz

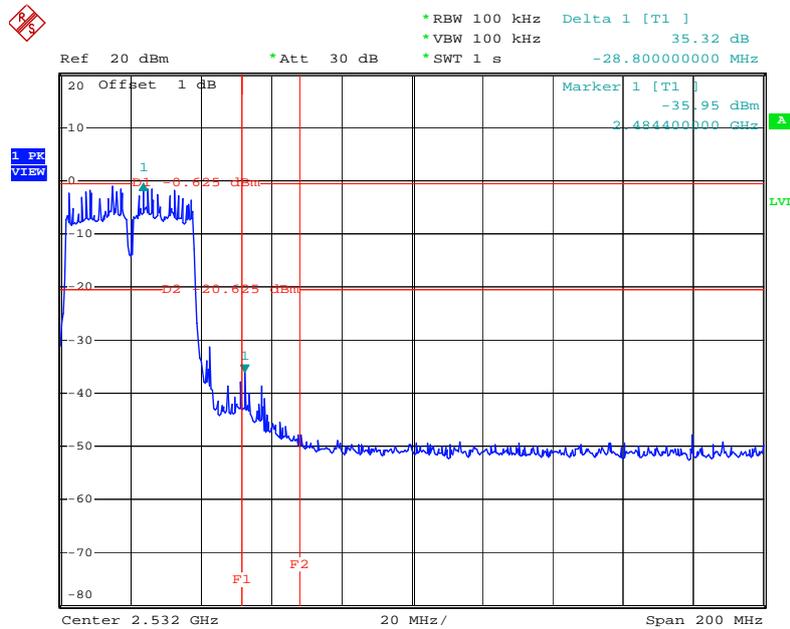


Date: 24.OCT.2009 15:45:34

### Low Band Edge Plot on Configuration IEEE 802.11b Ant. 1 / 2412 MHz

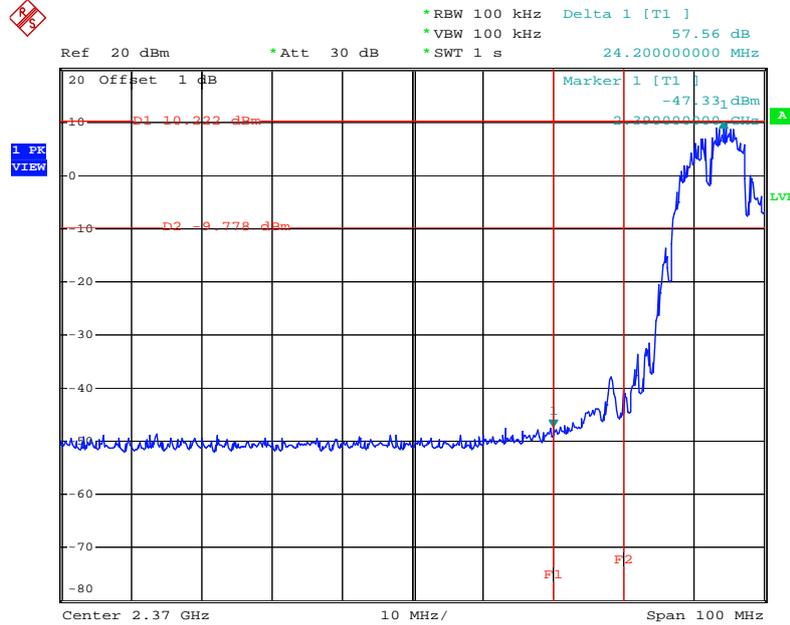


Date: 24.OCT.2009 15:54:50

### High Band Edge Plot on Configuration IEEE 802.11b Ant. 1 / 2462 MHz

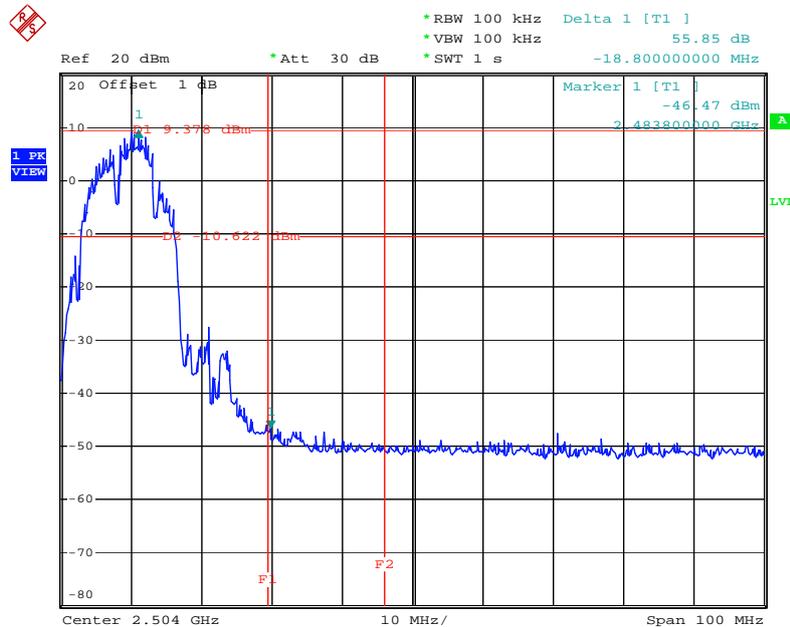


Date: 24.OCT.2009 15:52:15

### Low Band Edge Plot on Configuration IEEE 802.11g Ant. 1 / 2412 MHz

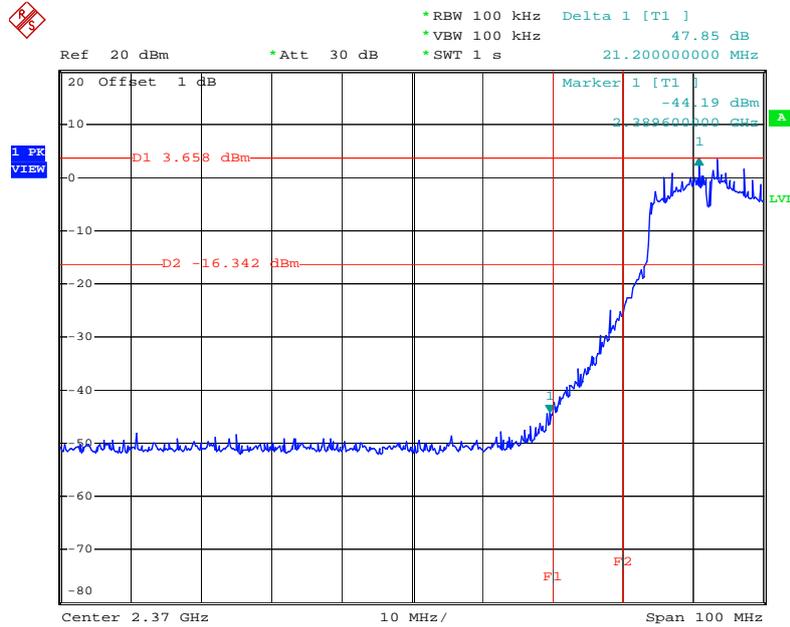

Date: 24.OCT.2009 15:58:08

### High Band Edge Plot on Configuration IEEE 802.11g Ant. 1 / 2462 MHz

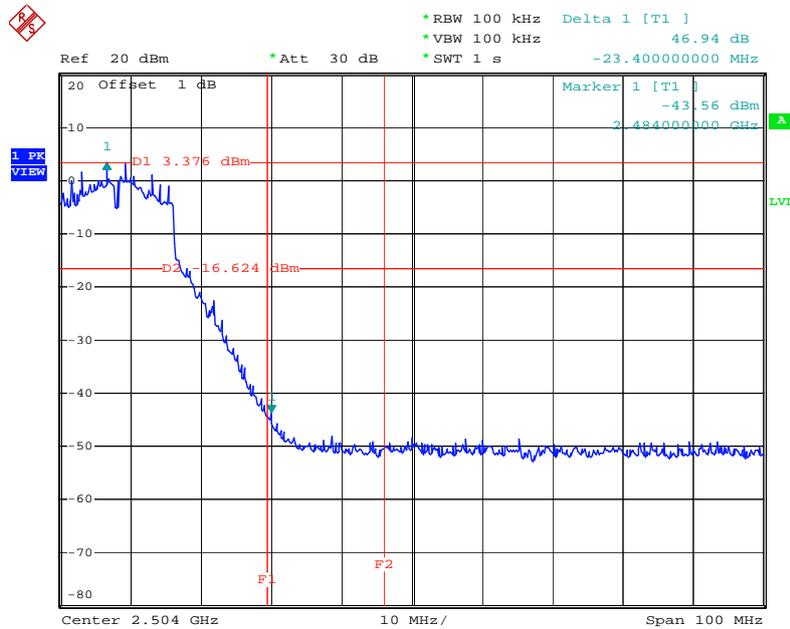


Date: 24.OCT.2009 15:56:49

For Emission not in Restricted Band


<For Antenna 2>

Low Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. 2 / 2412 MHz

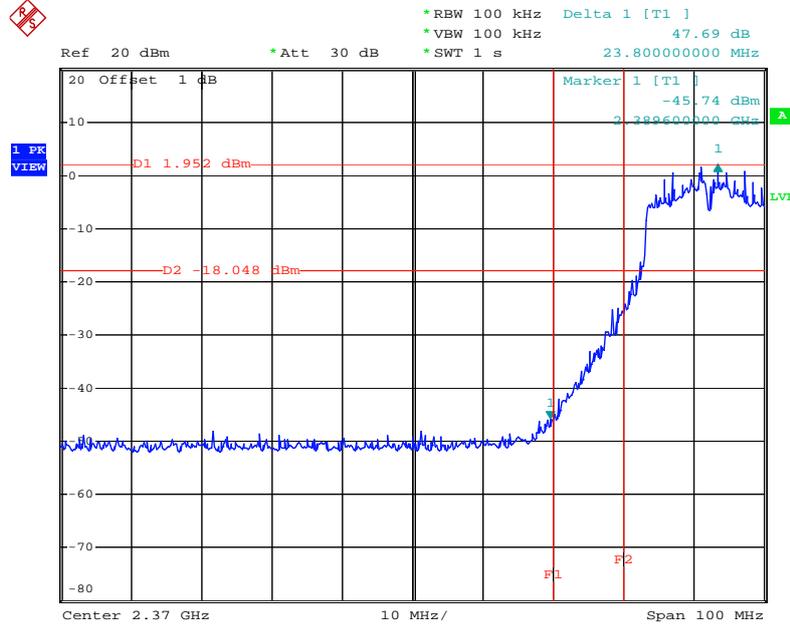


Date: 24.OCT.2009 13:14:12

High Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. 2 / 2462 MHz

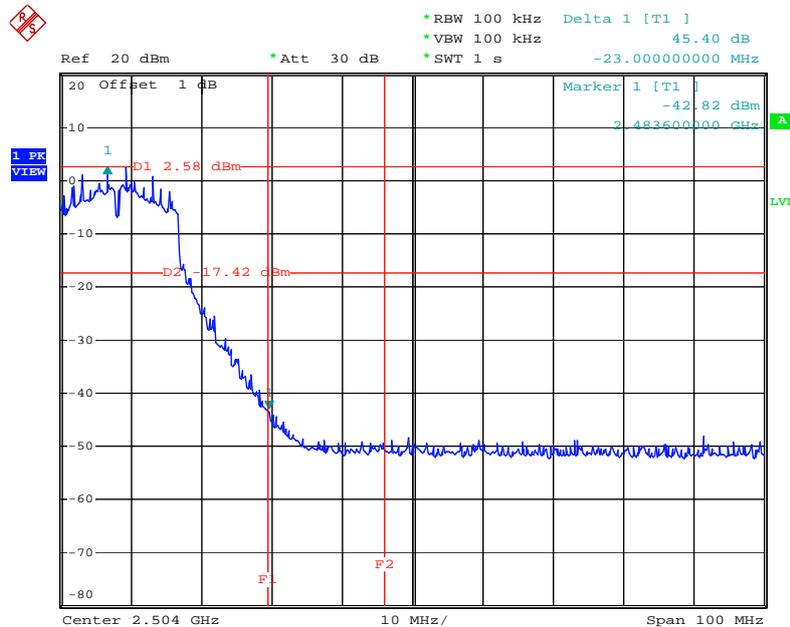


Date: 24.OCT.2009 13:13:16

### Low Band Edge Plot on Configuration Drafft n MCS0 40MHz Ant. 2 / 2422 MHz

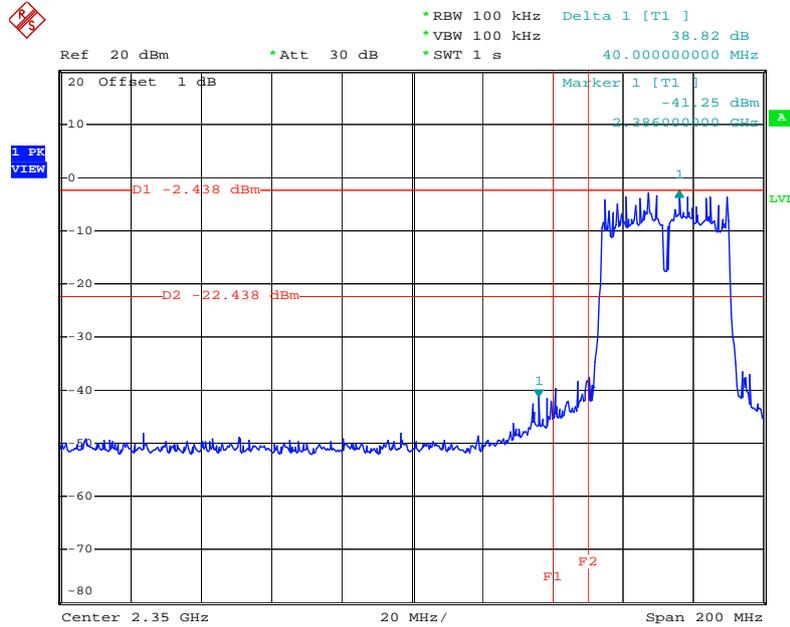


Date: 24.OCT.2009 13:09:55

### High Band Edge Plot on Configuration Drafft n MCS0 40MHz Ant. 2 / 2452 MHz

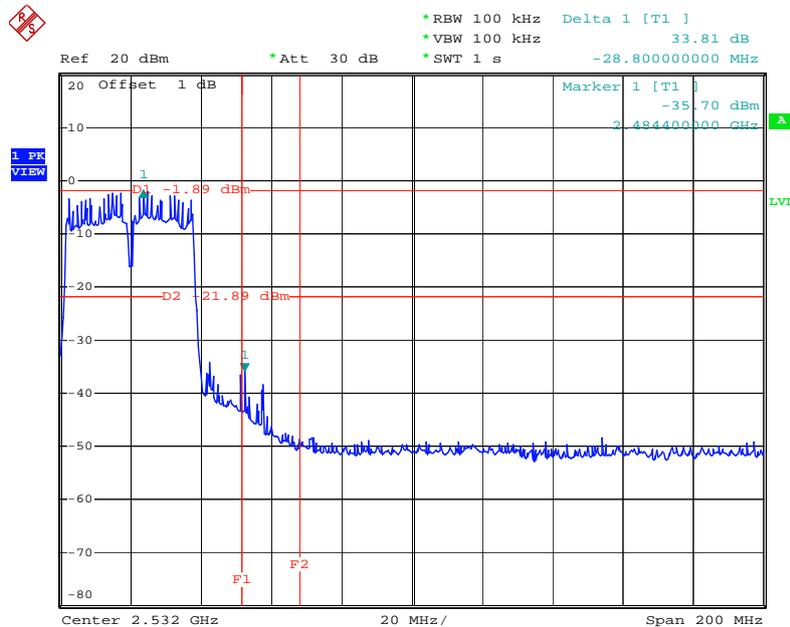


Date: 24.OCT.2009 13:09:00

### Low Band Edge Plot on Configuration IEEE 802.11b Ant. 2 / 2412 MHz

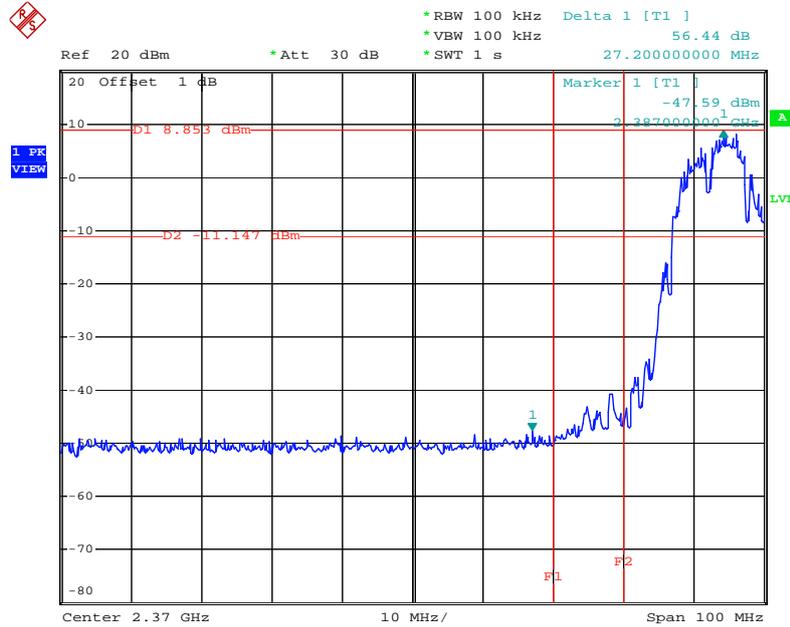


Date: 24.OCT.2009 13:17:15

### High Band Edge Plot on Configuration IEEE 802.11b Ant. 2 / 2462 MHz

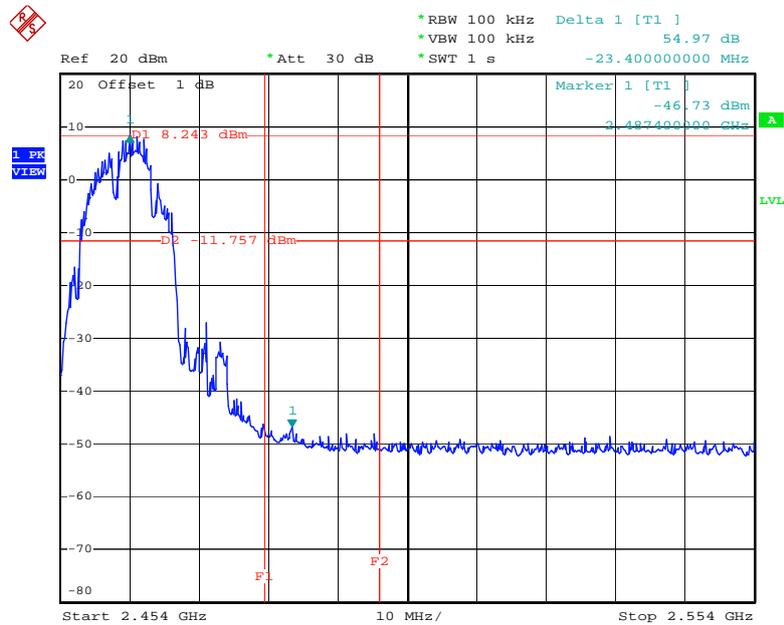


Date: 24.OCT.2009 11:53:15

### Low Band Edge Plot on Configuration IEEE 802.11g Ant. 2 / 2412 MHz

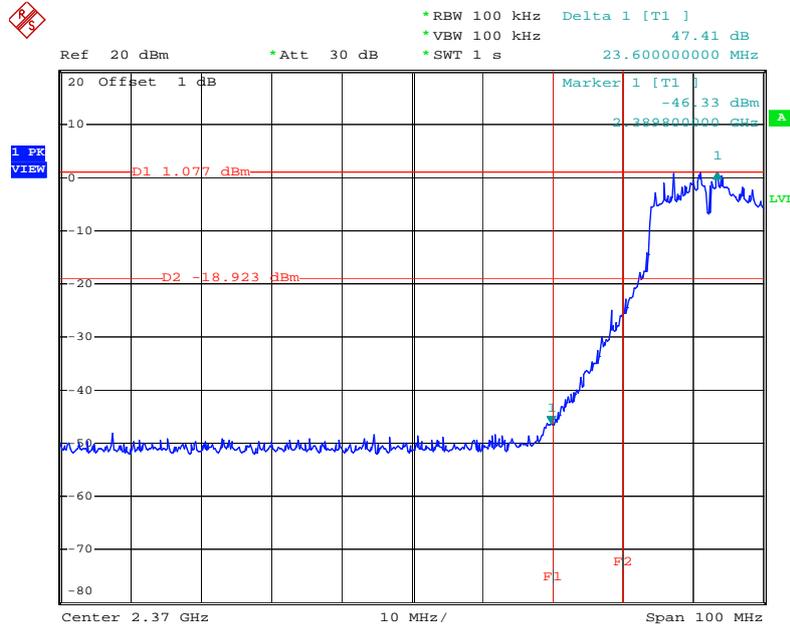

Date: 24.OCT.2009 13:16:00

### High Band Edge Plot on Configuration IEEE 802.11g Ant. 2 / 2462 MHz

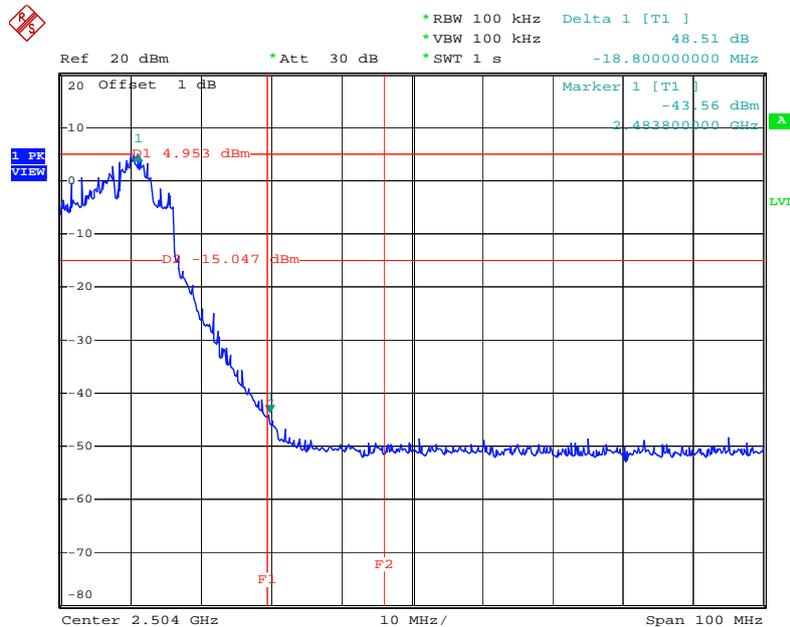

Date: 24.OCT.2009 13:15:26

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.16, 2009	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 28, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: \*Calibration Interval of instruments listed above is two year.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.