



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134-1911, USA
FCC ID	PY311100155
Manufacturer's company	Ambit Microsystems (Shanghai) Ltd.
Manufacturer Address	No. 1925, Nanle Road, Songjiang Export Processing Zone, Shanghai, China

Product Name	N600 Wireless Dual Band Router
Brand Name	NETGEAR
Model Name	WNDR3400v2
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Mar. 31, 2011
Final Test Date	May 21, 2011
Submission Type	Original Equipment

### Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009 and 47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	11
3.7. Table for Supporting Units .....	11
3.8. Table for Parameters of Test Software Setting .....	12
3.9. Test Configurations .....	14
<b>4. TEST RESULT .....</b>	<b>16</b>
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. Peak Output Power Measurement .....	20
4.3. Power Spectral Density Measurement .....	26
4.4. 6dB Spectrum Bandwidth Measurement .....	36
4.5. Radiated Emissions Measurement .....	43
4.6. Band Edge Emissions Measurement .....	77
4.7. Antenna Requirements .....	89
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>90</b>
<b>6. TEST LOCATION.....</b>	<b>92</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>93</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A5</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>
<b>APPENDIX C. CO-LOCATION REPORT.....</b>	<b>C1 ~ C3</b>





## 1. CERTIFICATE OF COMPLIANCE

Product Name : N600 Wireless Dual Band Router  
Brand Name : NETGEAR  
Model Name : WNDR3400v2  
Applicant : NETGEAR, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 31, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

*Jordan Hsiao 2011.7.4*

**Jordan Hsiao**  
**SPORTON INTERNATIONAL INC.**

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	16.04 dB
4.2	15.247(b)(3)	Peak Output Power	Complies	1.78 dB
4.3	15.247(e)	Power Spectral Density	Complies	9.08 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.06 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.02 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	For 2.4GHz Band: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth For 5GHz Band: 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	For 2.4GHz Band: MCS0 (20MHz): 17.44 MHz ; MCS0 (40MHz): 36.24 MHz For 5GHz Band: MCS0 (20MHz): 17.48 MHz ; MCS0 (40MHz): 36.08 MHz
Peak Output Power	For 2.4GHz Band: MCS0 (20MHz): 28.22 dBm ; MCS0 (40MHz): 26.92 dBm For 5GHz Band: MCS0 (20MHz): 26.93 dBm ; MCS0 (40MHz): 27.01 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**802.11a/b/g**

Items	Description
Product Type	IEEE 802.11b: WLAN (1TX, 1RX) IEEE 802.11g: WLAN (2TX, 2RX) IEEE 802.11a: WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	Power Adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 10.56 MHz ; 11g: 16.32 MHz ; 11a: 16.28 MHz
Peak Output Power	11b: 23.28 dBm ; 11g: 27.80 dBm ; 11a: 26.98 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
IEEE 802.11a	X	X	V	X
IEEE 802.11b	V	X	X	X
IEEE 802.11g	X	X	V	X
IEEE 802.11n	X	X	V	V

## IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

## 3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	PIE	AD817F10	Input: 100-120V, 50/60Hz, 0.56A Output: 12V, 1.5A
Adapter 2	LEI	MT18-9120150-A1	Input: 100-120V, 50/60Hz, 0.56A Output: 12V, 1.5A
<b>Others</b>			
RJ45 cable, Foot Holder			

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	-	-	PIFA Antenna	NA	3.2 (2.4G)	TX/RX
2	-	-	PIFA Antenna	NA	3.2 (2.4G)	TX/RX
3	-	-	PCB Antenna	NA	1.95 (5G)	TX/RX
4	-	-	PCB Antenna	NA	3.48 (5G)	TX/RX

**Note:**

There are four sets of antenna provided to this EUT and all of them can be used as transmitting and receiving antenna, two of them are used for 2.4GHz Band and the others are used for 5GHz Band.

**For IEEE 802.11g/n mode (2TX/2RX):**


Ant. 1 & Ant. 2 could both transmit/receive simultaneously.

**For IEEE 802.11a/n mode (2TX/2RX):**

Ant. 3 & Ant. 4 could transmit/receive simultaneously.

**For IEEE 802.11b mode (1TX/1RX):**

Only Ant. 1 can be used as transmitting/receiving antenna.

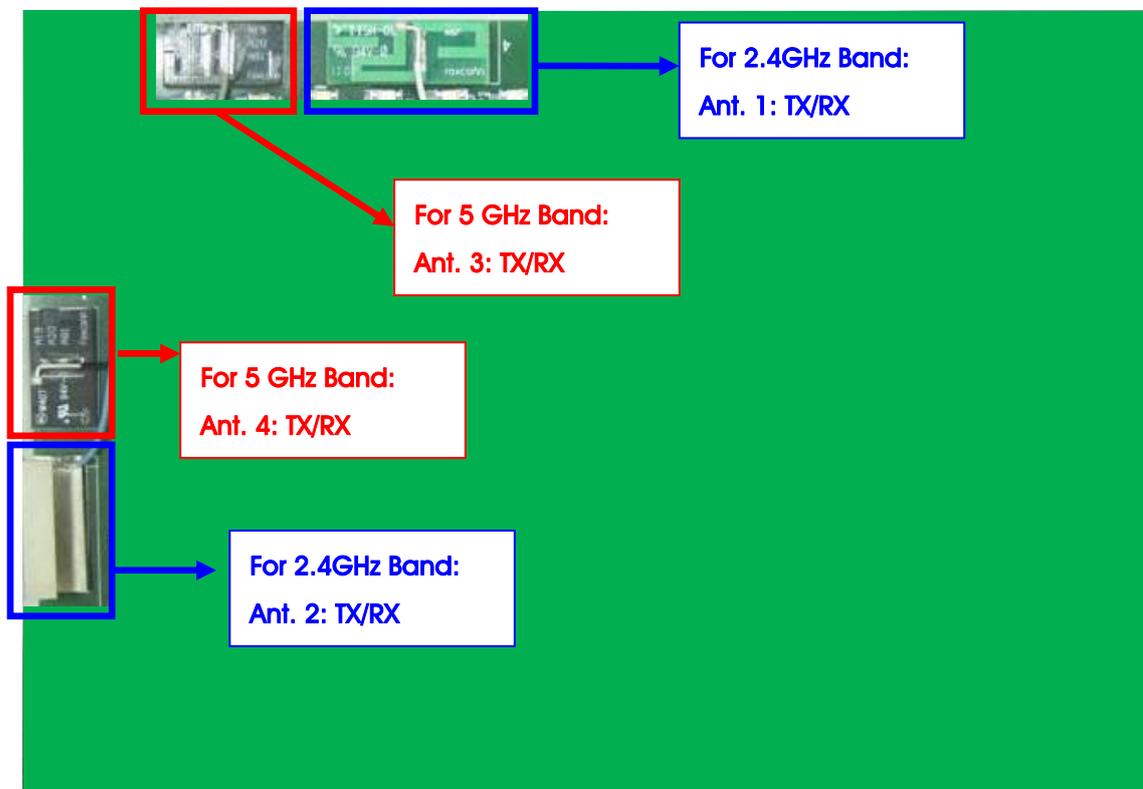

### 3.4. Table for Carrier Frequencies

#### For 2.4GHz Band

For IEEE 802.11b/g, use Channel 1~Channel 11.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

#### For 5GHz Band

For IEEE 802.11a, use Channel 149, 153, 157, 161, 165.

There are two bandwidth systems for IEEE 802.11n.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz		

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

#### For 2.4GHz Band

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Peak Output Power Power Spectral Density	MCS0/20MHz	7.2 Mbps	1/6/11	1/2/1+2
	MCS0/40MHz	15 Mbps	3/6/9	1/2/1+2
	11b/CCK	1 Mbps	1/6/11	1/2/1+2
	11g/BPSK	6 Mbps	1/6/11	1/2/1+2
6dB Spectrum Bandwidth	MCS0/20MHz	7.2 Mbps	1/6/11	1+2
	MCS0/40MHz	15 Mbps	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS0/20MHz	7.2 Mbps	1/6/11	1+2
	MCS0/40MHz	15 Mbps	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1/2/1+2
	11g/BPSK	6 Mbps	1/6/11	1/2/1+2
Band Edge Emissions	MCS0/20MHz	7.2 Mbps	1/11	1+2
	MCS0/40MHz	15 Mbps	3/9	1+2
	11b/CCK	1 Mbps	1/11	1/2/1+2
	11g/BPSK	6 Mbps	1/11	1/2/1+2

**For 5GHz Band**

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Peak Output Power	MCS0/20MHz	7.2 Mbps	149/157/165	3/4/3+4
	MCS0/40MHz	15 Mbps	151/159	3/4/3+4
	11a/BPSK	6 Mbps	149/157/165	3/4/3+4
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	7.2 Mbps	149/157/165	3+4
	MCS0/40MHz	15 Mbps	151/159	3+4
	11a/BPSK	6 Mbps	149/157/165	3+4
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS0/20MHz	7.2 Mbps	149/157/165	3+4
	MCS0/40MHz	15 Mbps	151/159	3+4
	11a/BPSK	6 Mbps	149/157/165	3+4
Band Edge Emissions	MCS0/20MHz	7.2 Mbps	149/157/165	3+4
	MCS0/40MHz	15 Mbps	151/159	3+4
	11a/BPSK	6 Mbps	149/157/165	3+4

Please refer to following list for test modes:

Description of Test Mode
<b>Conducted Emission test:</b>
Mode 1. EUT with adapter 1 Mode 2. EUT with adapter 2 Due to mode 2 generated the worst test result, so it was recorded in this report.
<b>Radiated Emission test below 1GHz:</b>
The EUT has three kinds of FRM for 5GHz Band. Mode 1. EUT with TDK + adapter 1 Mode 2. EUT with Skyworks + adapter 1 Mode 3. EUT with Sige + adapter 1 Mode 3 has been evaluated to be the worst case, thus measurement for adapter 2 will follow this same test mode. Mode 4. EUT with Sige + adapter 2 Due to mode 3 generated the worst test result, so it was recorded in this report.

**Radiated Emission test above 1GHz and Max. Conducted Output Power:**

**<For 2.4GHz Band:>**

Mode 1. EUT with TDK

**<For 5GHz Band:>**

The EUT has three kinds of FRM for 5GHz Band.

Mode 1. EUT with TDK

Mode 2. EUT with Skyworks

Mode 3. EUT with Sige

TDK and Skyworks have the same features, after pre-test, TDK was selected for final test.

Both Mode 1 and Mode 3 were recorded in the report.

**Other test items:**

**<For 2.4GHz Band:>**

Mode 1. EUT with TDK

**<For 5GHz Band:>**

The EUT has three kinds of FRM for 5GHz Band.

Mode 1. EUT with TDK

Mode 2. EUT with Skyworks

Mode 3. EUT with Sige

Due to Mode 1 generated the highest output power, so it was selected to test and record in the report.

**MPE and Co-location Test:**

The EUT could be applied with WLAN 2.4GHz and WLAN 5GHz functions; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between WLAN 2.4GHz and WLAN 5GHz functions.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	187376	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	187376	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	PP17S	-
Mouse	Logitech	M-U0026	-
Modem	ACEEX	DM1414	IFAXDM1414
USB 2.0 Flash	SILICON POWER	SP002GBUF2M01V	DoC
Notebook	DELL	D400	QDS-BRCM1005-D
Notebook	DELL	D400	QDS-BRCM1005-D
Notebook	DELL	D420	E2KWM3945ABG

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### For 2.4GHz Band

##### Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Telnet		
Frequency	2412 MHz	2437 MHz	2462 MHz
20MHz MCS0	54	79	60

##### Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Telnet		
Frequency	2422 MHz	2437 MHz	2452 MHz
40MHz MCS0	42	57	52

##### Power Parameters of IEEE 802.11b/g

Test Software Version	Telnet		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	76	77	77
IEEE 802.11g	58	78	64

**For 5GHz Band**

&lt;For mode 1&gt;

**Power Parameters of IEEE 802.11n**

Test Software Version	Telnet		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	80	80	80

**Power Parameters of IEEE 802.11n**

Test Software Version	Telnet	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	80	80

**Power Parameters of IEEE 802.11a**

Test Software Version	Telnet		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	80	80	80

&lt;For mode 3&gt;

**Power Parameters of IEEE 802.11n**

Test Software Version	Telnet		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	88	88	88

**Power Parameters of IEEE 802.11n**

Test Software Version	Telnet	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	88	88

**Power Parameters of IEEE 802.11a**


Test Software Version	Telnet		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	88	88	88

During the test, "Telnet" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

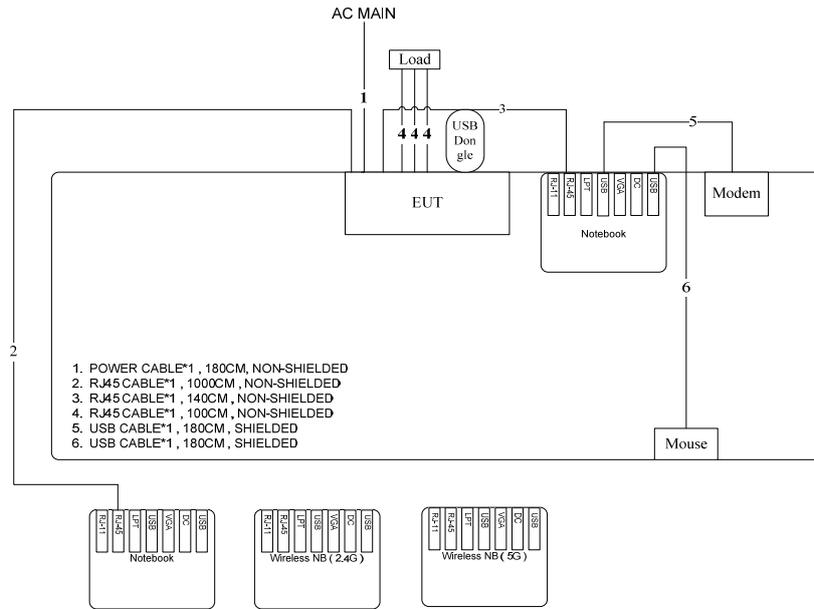

Test Configuration: above 1GHz

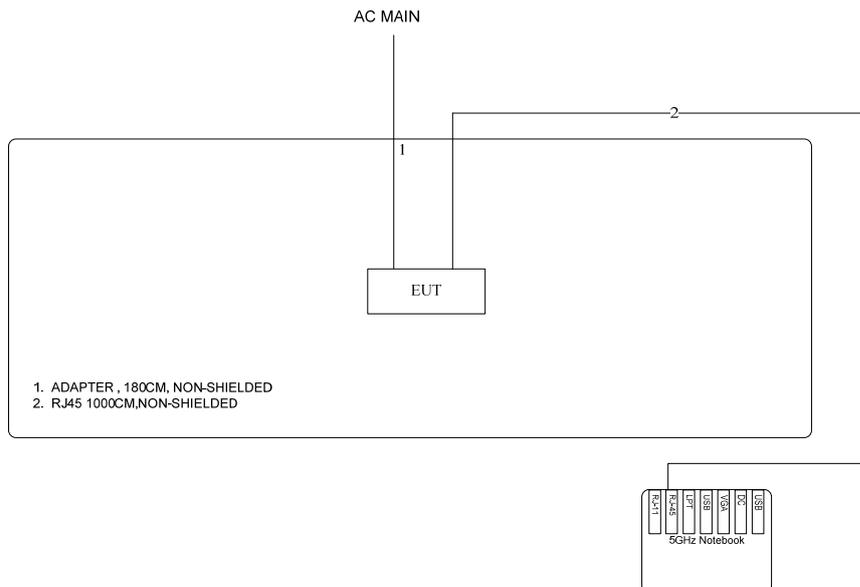

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

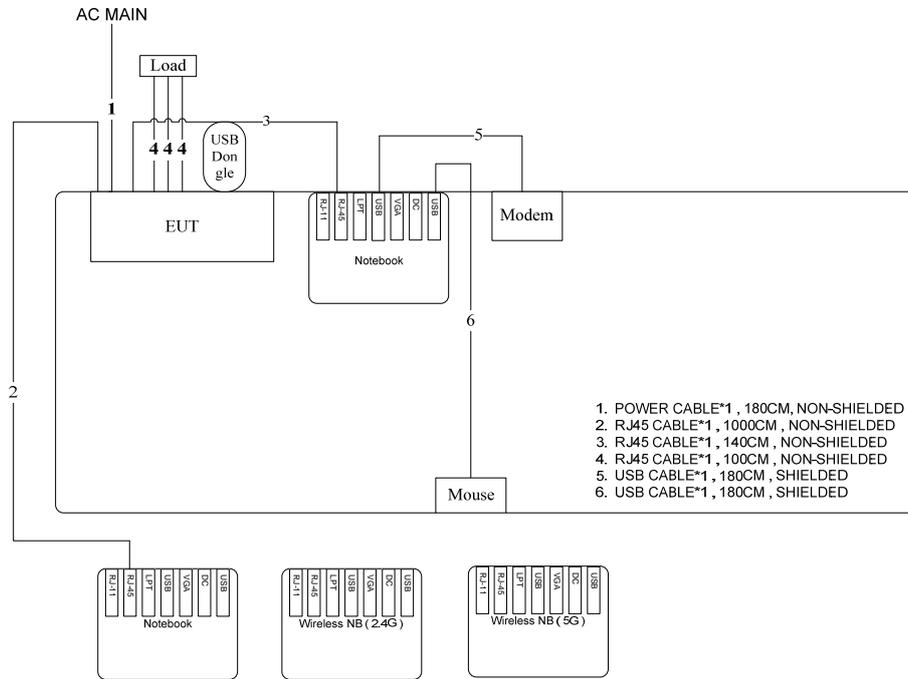

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	21°C	Humidity	61%
Test Engineer	Rayn	Phase	Line
Configuration	Normal Link	Test Mode	Mode2

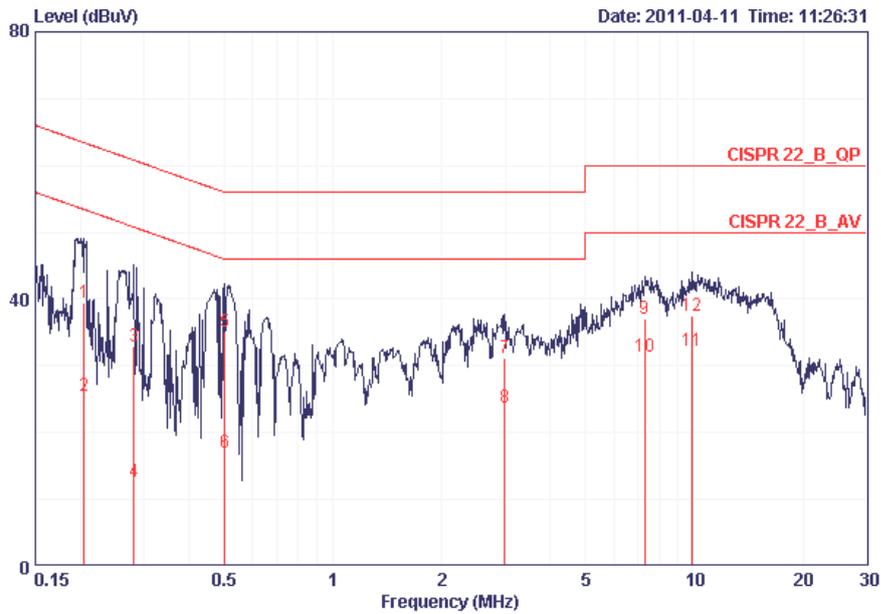

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.20505	39.53	-23.87	63.40	39.28	0.05	0.20	QP
2	0.20505	25.48	-27.92	53.40	25.23	0.05	0.20	AVERAGE
3	0.28178	32.82	-27.94	60.76	32.58	0.04	0.20	QP
4	0.28178	12.59	-38.17	50.76	12.35	0.04	0.20	AVERAGE
5	0.50203	35.01	-20.99	56.00	34.79	0.03	0.19	QP
6	0.50203	17.00	-29.00	46.00	16.78	0.03	0.19	AVERAGE
7	2.993	31.09	-24.91	56.00	30.81	0.08	0.20	QP
8	2.993	23.66	-22.34	46.00	23.38	0.08	0.20	AVERAGE
9	7.290	37.04	-22.96	60.00	36.42	0.26	0.36	QP
10	7.290	31.32	-18.68	50.00	30.70	0.26	0.36	AVERAGE
11	9.913	32.34	-17.66	50.00	31.69	0.35	0.30	AVERAGE
12	9.913	37.58	-22.42	60.00	36.93	0.35	0.30	QP

Temperature	21°C	Humidity	61%
Test Engineer	Rayn	Phase	Line
Configuration	Normal Link	Test Mode	Mode2

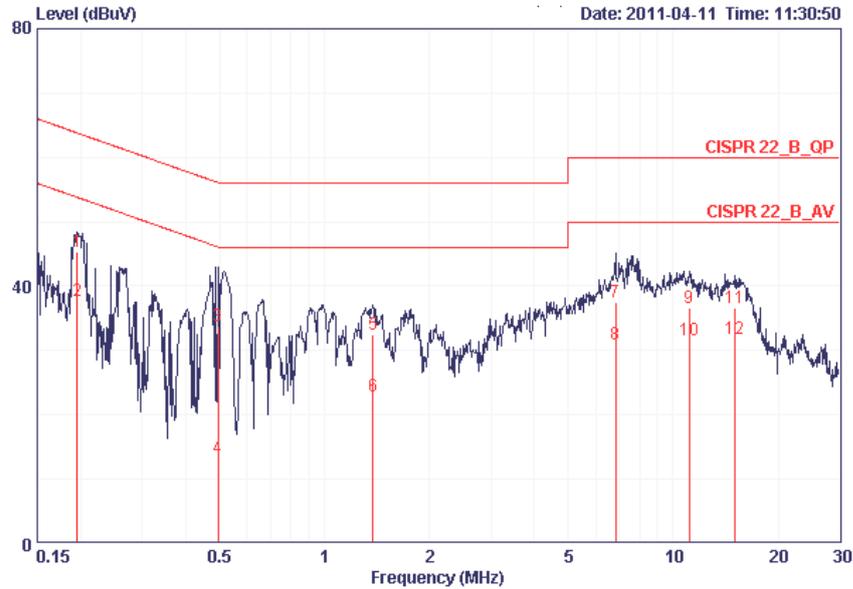

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19550	45.37	-18.43	63.80	45.09	0.08	0.20	QP
2	0.19550	37.76	-16.04	53.80	37.48	0.08	0.20	AVERAGE
3	0.49411	33.77	-22.33	56.10	33.52	0.07	0.18	QP
4	0.49411	13.34	-32.76	46.10	13.09	0.07	0.18	AVERAGE
5	1.374	32.48	-23.52	56.00	32.28	0.08	0.12	QP
6	1.374	22.94	-23.06	46.00	22.74	0.08	0.12	AVERAGE
7	6.841	37.46	-22.54	60.00	36.85	0.29	0.33	QP
8	6.841	30.97	-19.03	50.00	30.36	0.29	0.33	AVERAGE
9	11.139	36.61	-23.39	60.00	35.77	0.44	0.40	QP
10	11.139	31.61	-18.39	50.00	30.77	0.44	0.40	AVERAGE
11	15.066	36.65	-23.35	60.00	35.67	0.58	0.40	QP
12	15.066	31.86	-18.14	50.00	30.88	0.58	0.40	AVERAGE

Note:

$$\text{Level} = \text{Read Level} + \text{LISN Factor} + \text{Cable Loss}$$

## 4.2. Peak Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak

### 4.2.3. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	<input checked="" type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging

### 4.2.4. Test Setup Layout



### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Peak Output Power

Temperature	25°C	Humidity	63%
Test Engineer	Johnson	Configurations	IEEE 802.11n
Test Date	May 20, 2011		

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz /Ant. 1/ Ant. 2/Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	23.76	23.56	26.67	30.00	Complies
6	2437 MHz	25.53	24.87	28.22	30.00	Complies
11	2462 MHz	24.33	23.42	26.91	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 1	Ant. 2	
1	2412 MHz	14.08	14.02	17.06
6	2437 MHz	19.25	18.74	22.01
11	2462 MHz	14.61	14.15	17.40

Note: The AV power is only for MPE Calculation.

Configuration IEEE 802.11n MCS0 40MHz /Ant. 1/ Ant. 2/Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
3	2422 MHz	22.28	18.93	23.93	30.00	Complies
6	2437 MHz	24.05	23.76	26.92	30.00	Complies
9	2452 MHz	22.36	22.15	26.27	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 1	Ant. 2	
3	2422 MHz	11.88	11.75	14.83
6	2437 MHz	15.12	15.09	18.12
9	2452 MHz	12.48	12.17	15.34

Note: The AV power is only for MPE Calculation.

For 5GHz Band

<For mode 1>

Configuration IEEE 802.11n MCS0 20MHz /Ant. 3/ Ant. 4 /Ant. 3 + Ant. 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4			
149	5745 MHz	23.42	23.38	26.41	30.00	Complies
157	5785 MHz	23.31	23.27	26.30	30.00	Complies
165	5825 MHz	23.21	23.19	26.21	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 3	Ant. 4	
149	5745 MHz	19.45	19.55	22.51
157	5785 MHz	19.31	19.27	22.30
165	5825 MHz	19.22	19.4	22.32

Note: The AV power is only for MPE Calculation.

Configuration IEEE 802.11n MCS0 40MHz /Ant. 3/ Ant. 4 /Ant. 3 + Ant. 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4			
151	5755 MHz	23.37	23.37	26.38	30.00	Complies
159	5795 MHz	23.37	23.21	26.25	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 3	Ant. 4	
151	5755 MHz	19.29	19.54	22.43
159	5795 MHz	19.32	19.41	22.38

Note: The AV power is only for MPE Calculation.

<For mode 3>

Configuration IEEE 802.11n MCS0 20MHz /Ant. 3/ Ant. 4 /Ant. 3 + Ant. 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4			
149	5745 MHz	24	23.66	26.84	30.00	Complies
157	5785 MHz	24	23.81	26.92	30.00	Complies
165	5825 MHz	23.96	23.88	26.93	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 3	Ant. 4	
149	5745 MHz	18.86	18.29	21.59
157	5785 MHz	18.06	19	21.57
165	5825 MHz	19.15	19.22	22.20

Note: The AV power is only for MPE Calculation.

Configuration IEEE 802.11n MCS0 40MHz /Ant. 3/ Ant. 4 /Ant. 3 + Ant. 4

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4			
151	5755 MHz	24.13	23.86	27.01	30.00	Complies
159	5795 MHz	24	23.91	26.97	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 3	Ant. 4	
151	5755 MHz	18.1	18.89	21.52
159	5795 MHz	19.06	19.1	22.09

Note: The AV power is only for MPE Calculation.

Temperature	25°C	Humidity	63%
Test Engineer	Johnson	Configurations	IEEE 802.11a/b/g
Test Date	May 20, 2011		

**Configuration IEEE 802.11b / Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.92	30.00	Complies
6	2437 MHz	23.28	30.00	Complies
11	2462 MHz	23.22	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 1		
1	2412 MHz	19.02		19.02
6	2437 MHz	19.51		19.51
11	2462 MHz	19.38		19.38

Note: The AV power is only for MPE Calculation.

**Configuration IEEE 802.11g / Ant. 1/ Ant. 2/ Ant.1+ Ant. 2**

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	23.92	23.16	26.57	30.00	Complies
6	2437 MHz	24.61	24.96	27.80	30.00	Complies
11	2462 MHz	24.81	23.85	27.37	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 1	Ant. 2	
1	2412 MHz	14.26	13.65	16.98
6	2437 MHz	18.31	18.63	21.48
11	2462 MHz	15.58	15.13	18.37

Note: The AV power is only for MPE Calculation.

## Configuration IEEE 802.11a / Ant. 3/ Ant. 4/ Ant. 3+ Ant. 4

&lt;For mode 1&gt;

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4			
149	5745 MHz	23.16	23.39	26.29	30.00	Complies
157	5785 MHz	23.13	23.37	26.26	30.00	Complies
165	5825 MHz	23.16	23.23	26.21	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 3	Ant. 4	
149	5745 MHz	19.02	19.45	22.25
157	5785 MHz	18.95	19.21	22.09
165	5825 MHz	18.99	19.3	22.16

Note: The AV power is only for MPE Calculation.

&lt;For mode 3&gt;

Channel	Frequency	Conducted Power (dBm)		Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4			
149	5745 MHz	24.35	23.8	27.09	30.00	Complies
157	5785 MHz	24.19	23.74	26.98	30.00	Complies
165	5825 MHz	24.07	23.75	26.92	30.00	Complies

Channel	Frequency	AV Power (dBm)		Total AV Power (dBm)
		Ant. 3	Ant. 4	
149	5745 MHz	18.98	18.33	21.68
157	5785 MHz	18.14	19.02	21.61
165	5825 MHz	19.27	19.33	22.31

Note: The AV power is only for MPE Calculation.

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. When measuring power spectral density with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

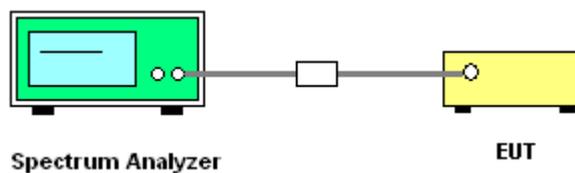

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	63%
Test Engineer	Johnson	Configurations	IEEE 802.11n
Test Date	May 18, 2011		

##### For 2.4GHz Band

##### Configuration IEEE 802.11n MCS0 20MHz/ Ant. 1/ Ant. 2/ Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	-12.13	-14.33	-10.08	8.00	Complies
6	2437 MHz	-7.41	-7.65	-4.52	8.00	Complies
11	2462 MHz	-9.51	-11.47	-7.37	8.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 1/ Ant. 2/ Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2			
3	2422 MHz	-18.98	-20.91	-16.83	8.00	Complies
6	2437 MHz	-14.08	-16.51	-12.12	8.00	Complies
9	2452 MHz	-14.77	-17.45	-12.90	8.00	Complies

##### For 5GHz Band

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 3/ Ant. 4/ Ant. 3+ Ant. 4

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 3	Ant. 4			
149	5745 MHz	-5.92	-3.49	-1.53	8.00	Complies
157	5785 MHz	-6.78	-4.31	-2.36	8.00	Complies
165	5825 MHz	-6.71	-5.30	-2.94	8.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 3/ Ant. 4/ Ant. 3+ Ant. 4

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 3	Ant. 4			
151	5755 MHz	-7.90	-6.80	-4.30	8.00	Complies
159	5795 MHz	-8.87	-8.16	-5.49	8.00	Complies

Temperature	25°C	Humidity	63%
Test Engineer	Johnson	Configurations	IEEE 802.11a/b/g
Test Date	May 18, 2011		

**Configuration IEEE 802.11b / Ant. 1**

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-6.19	8.00	Complies
6	2437 MHz	-5.90	8.00	Complies
11	2462 MHz	-3.97	8.00	Complies

**Configuration IEEE 802.11g / Ant. 1/ Ant. 2/ Ant. 1 + Ant. 2**

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	-10.53	-14.91	-9.18	8.00	Complies
6	2437 MHz	-7.24	-9.15	-5.08	8.00	Complies
11	2462 MHz	-9.78	-12.59	-7.95	8.00	Complies


**Configuration IEEE 802.11a / Ant. 3/ Ant. 4/ Ant. 3+ Ant. 4**

Channel	Frequency	Power Density (dBm/3kHz)		Total Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
		Ant. 3	Ant. 4			
149	5745 MHz	-5.32	-9.18	-1.08	8.00	Complies
157	5785 MHz	-6.43	-4.69	-2.46	8.00	Complies
165	5825 MHz	-6.34	-4.93	-2.57	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 2412 MHz**

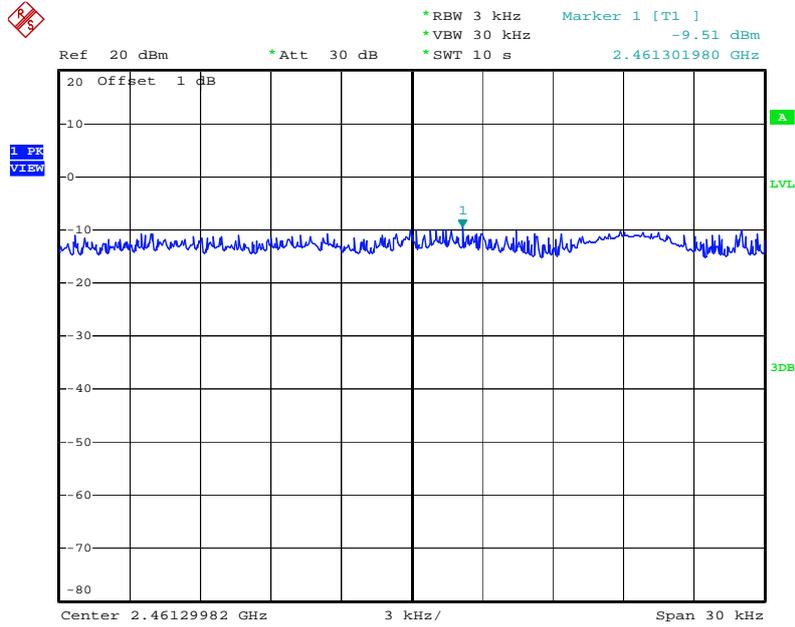


Date: 18.MAY.2011 15:52:58

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 2 / 2412 MHz**

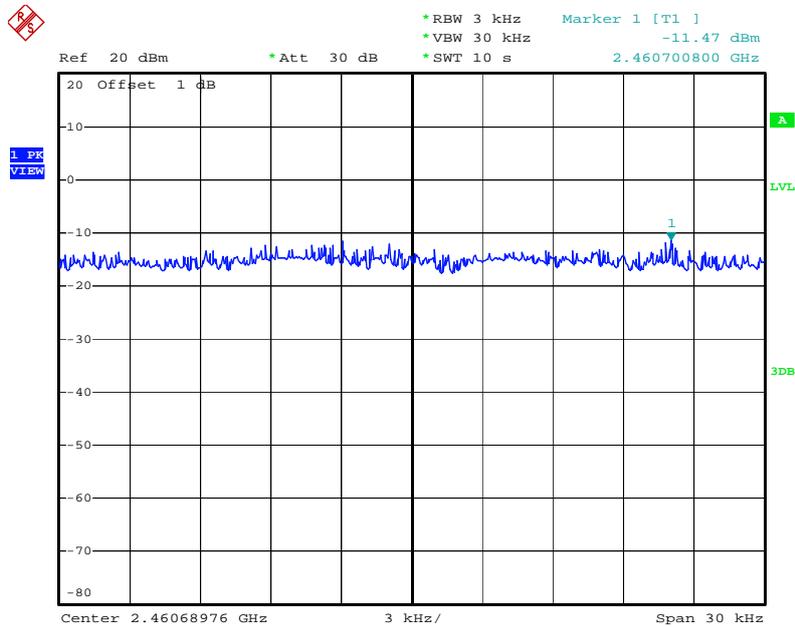


Date: 18.MAY.2011 16:08:56

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 2437 MHz**

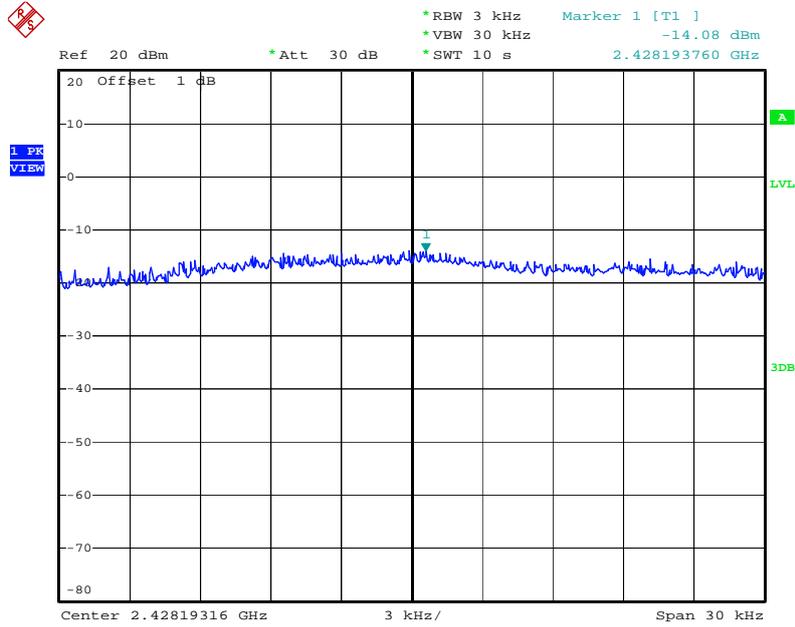


Date: 18.MAY.2011 16:15:52

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 2 / 2437 MHz**

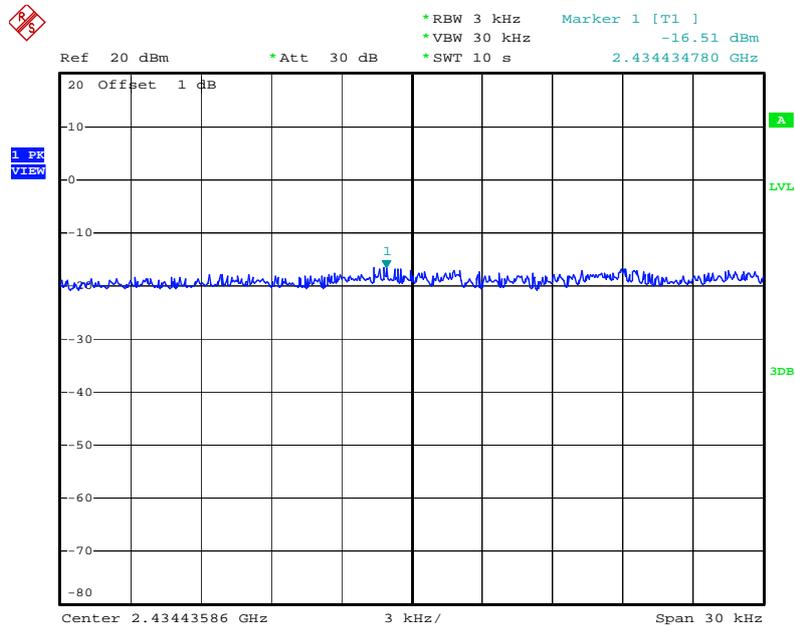


Date: 18.MAY.2011 16:18:01

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 / 5825 MHz**

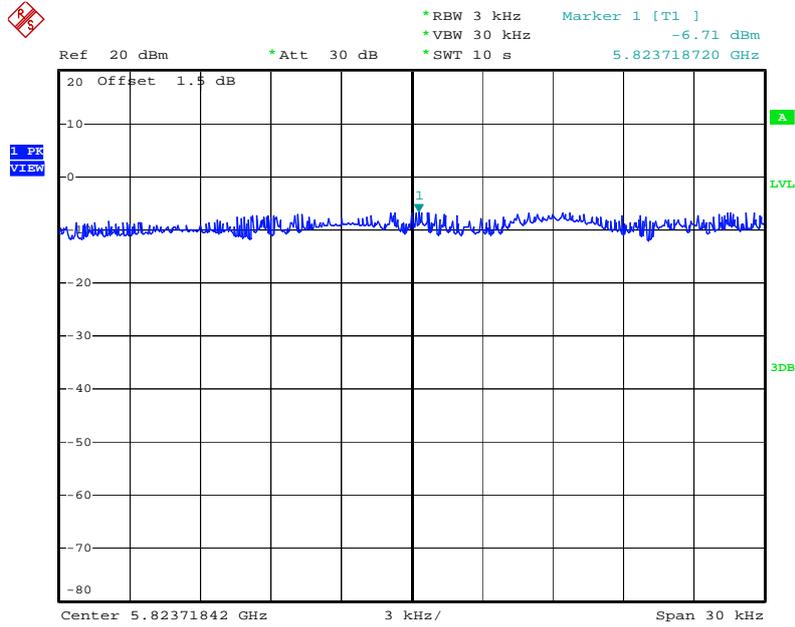


Date: 18.MAY.2011 15:05:23

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 4 / 5825 MHz**

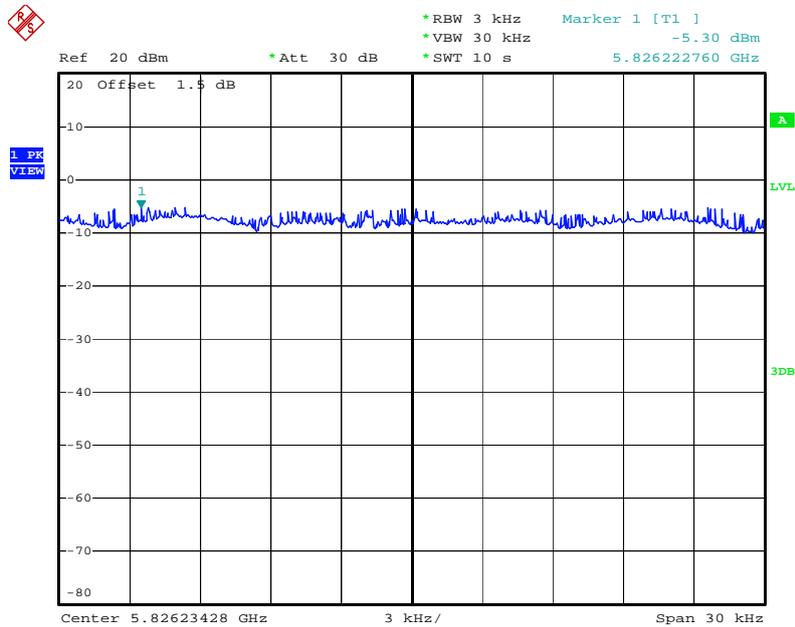


Date: 18.MAY.2011 15:03:12

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 / 5795 MHz**

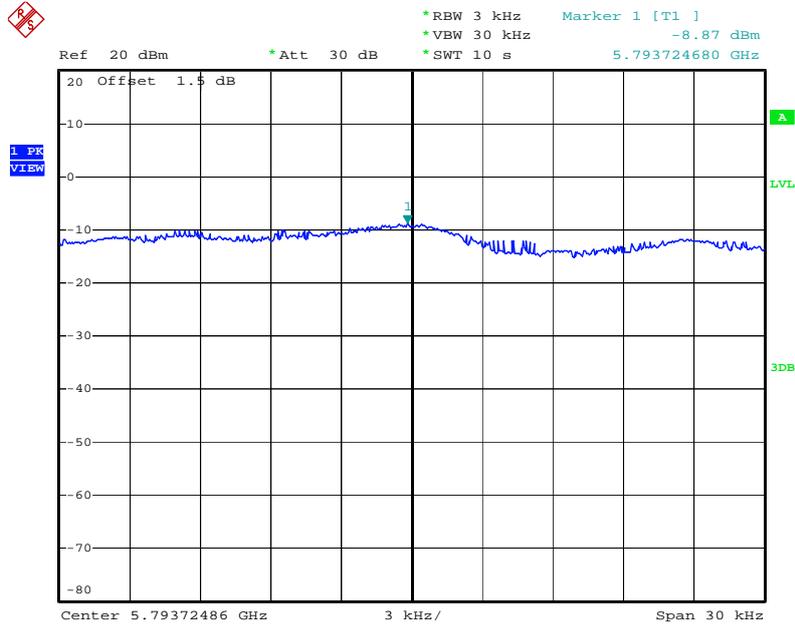


Date: 18.MAY.2011 14:57:38

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 4 / 5795 MHz**

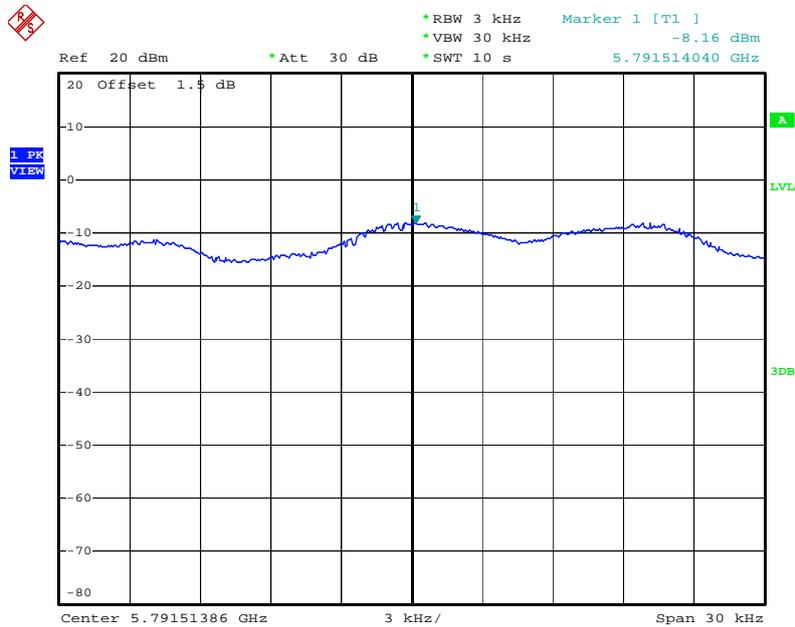


Date: 18.MAY.2011 14:59:51

### Power Density Plot on Configuration IEEE 802.11b / Ant. 1 / 2412 MHz

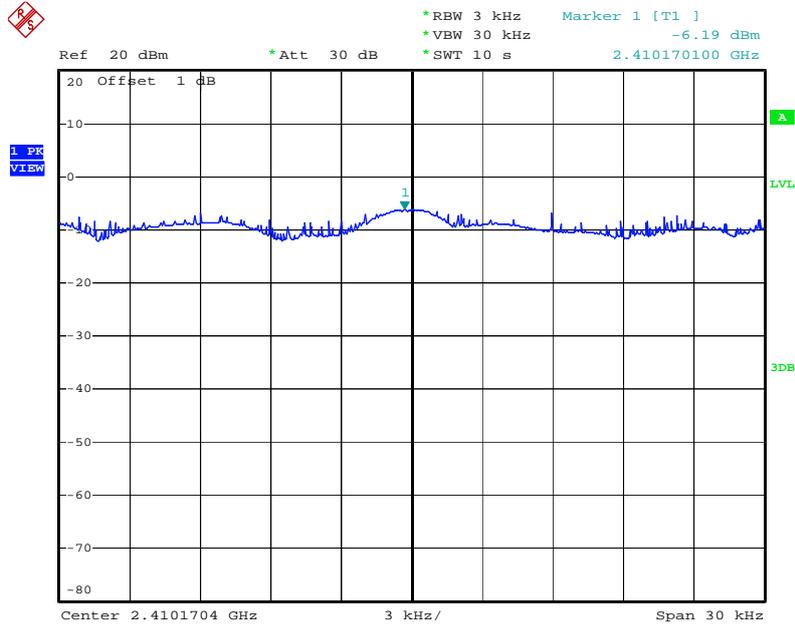

Date: 18.MAY.2011 09:40:18


### Power Density Plot on Configuration IEEE 802.11g / Ant. 1 / 2412 MHz

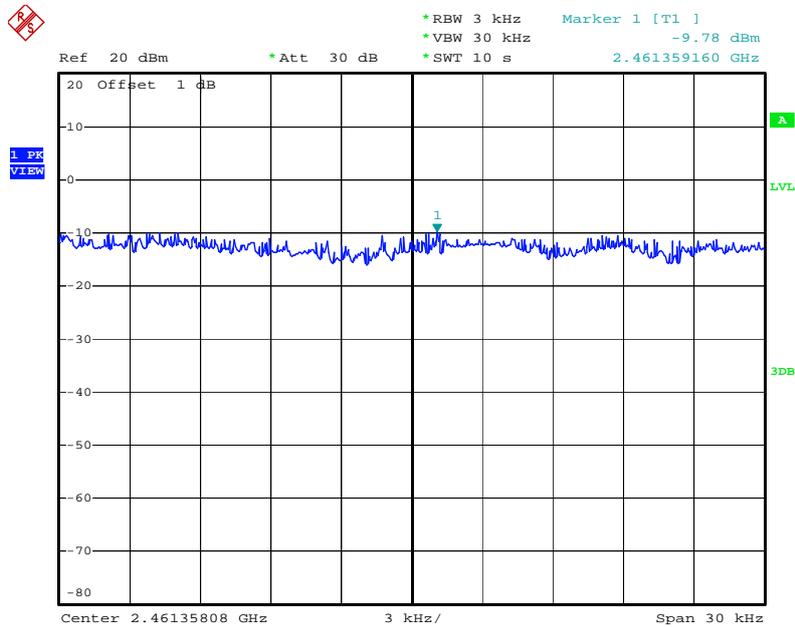

Date: 18.MAY.2011 16:35:53



### Power Density Plot on Configuration IEEE 802.11a / Ant. 4 / 5745 MHz

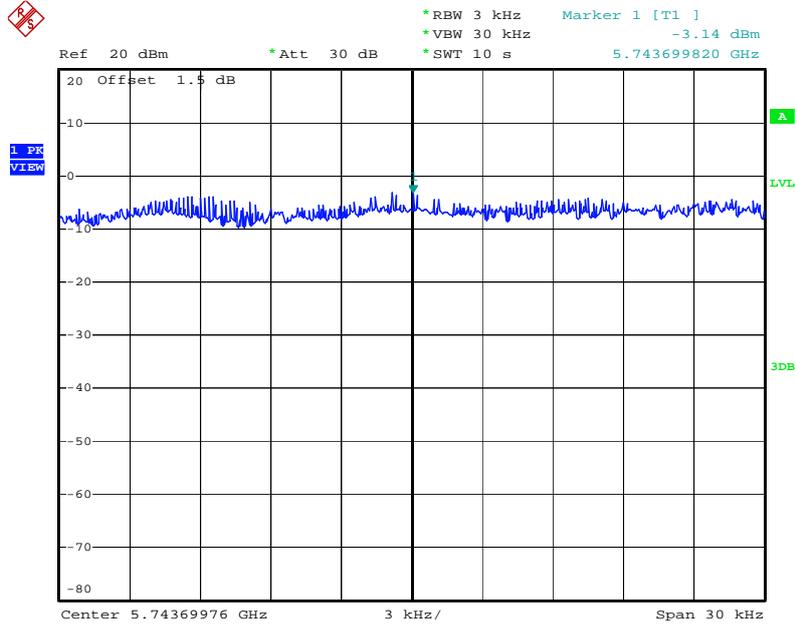

Date: 18.MAY.2011 15:19:55

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

##### 4.4.4. Test Setup Layout

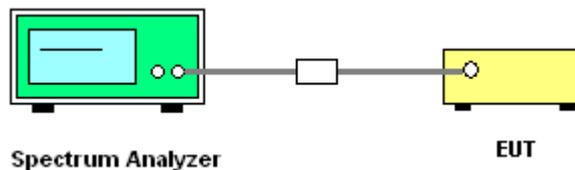

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	65%
Test Engineer	Johnson	Configurations	IEEE 802.11n
Test Date	May 18, 2011		

##### For 2.4GHz Band

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.12	17.40	500	Complies
6	2437 MHz	16.08	17.44	500	Complies
11	2462 MHz	16.08	17.40	500	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.84	35.76	500	Complies
6	2437 MHz	36.32	36.24	500	Complies
9	2452 MHz	34.48	35.68	500	Complies

##### For 5GHz Band

##### Configuration IEEE 802.11n MCS0 / 20MHz Ant. 3+ Ant. 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.84	17.48	500	Complies
157	5785 MHz	15.84	17.48	500	Complies
165	5825 MHz	15.72	17.48	500	Complies

##### Configuration IEEE 802.11n MCS0 / 40MHz Ant. 3+ Ant. 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.84	36.08	500	Complies
159	5795 MHz	35.76	36.08	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Johnson	<b>Configurations</b>	IEEE 802.11 a/b/g
<b>Test Date</b>	May 18, 2011		

**Configuration IEEE 802.11b / Ant. 1**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.56	10.56	500	Complies
6	2437 MHz	8.56	10.16	500	Complies
11	2462 MHz	8.04	10.16	500	Complies

**Configuration IEEE 802.11g / Ant. 1 + Ant. 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	11.96	16.24	500	Complies
6	2437 MHz	11.96	16.32	500	Complies
11	2462 MHz	11.92	16.32	500	Complies


**Configuration IEEE 802.11a / Ant. 3+ Ant. 4**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	11.92	16.12	500	Complies
157	5785 MHz	11.92	16.20	500	Complies
165	5825 MHz	11.96	16.28	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2 / 2412 MHz

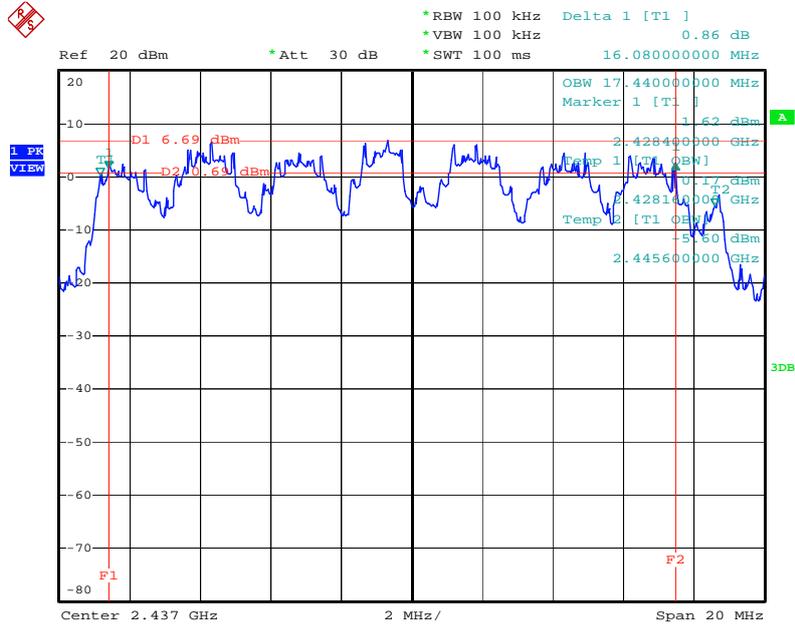


Date: 18.MAY.2011 09:55:43

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2 / 2437 MHz

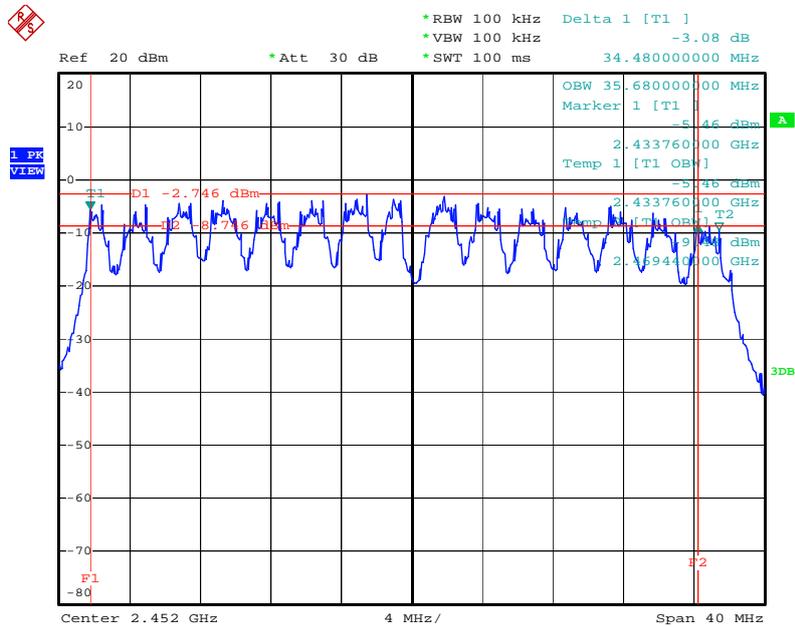


Date: 18.MAY.2011 09:57:26

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3+ Ant. 4 / 5825 MHz

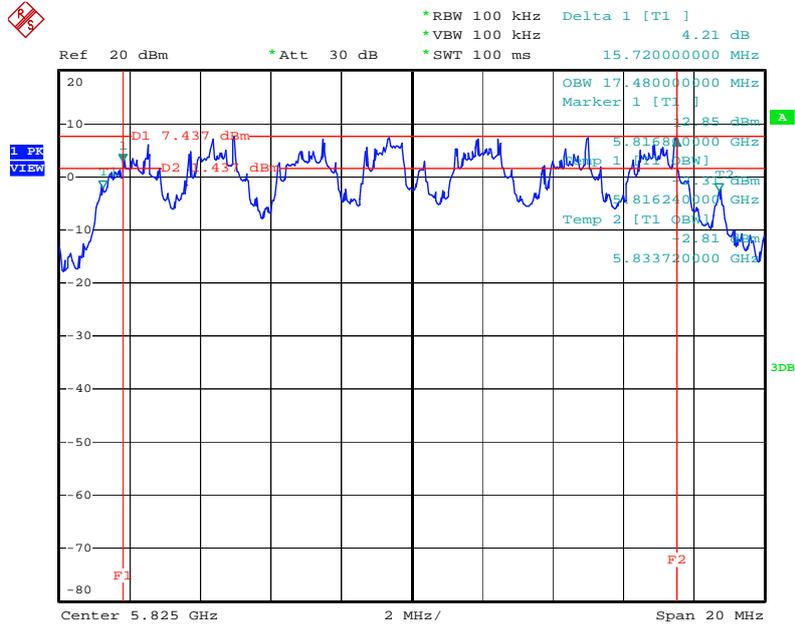


Date: 18.MAY.2011 13:27:19

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3+ Ant. 4 / 5795MHz

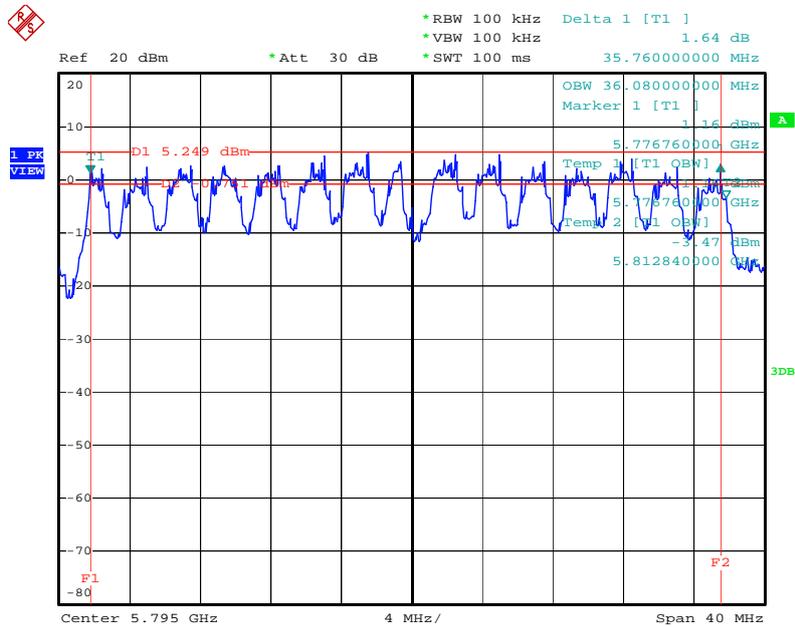


Date: 18.MAY.2011 13:29:59

6 dB Bandwidth Plot on Configuration IEEE 802.11b / Ant. 1 / 2412 MHz

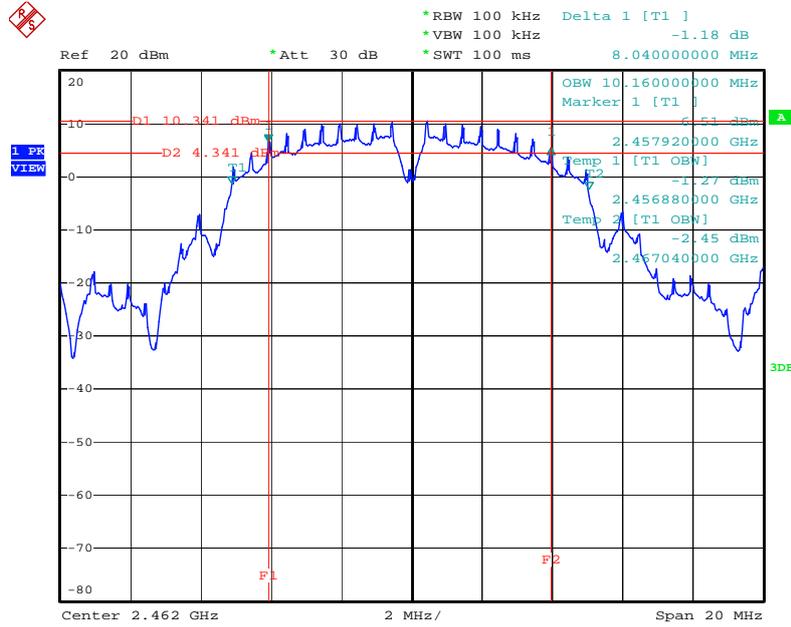


Date: 18.MAY.2011 09:36:32

6 dB Bandwidth Plot on Configuration IEEE 802.11g / Ant. 1+ Ant. 2 / 2412 MHz

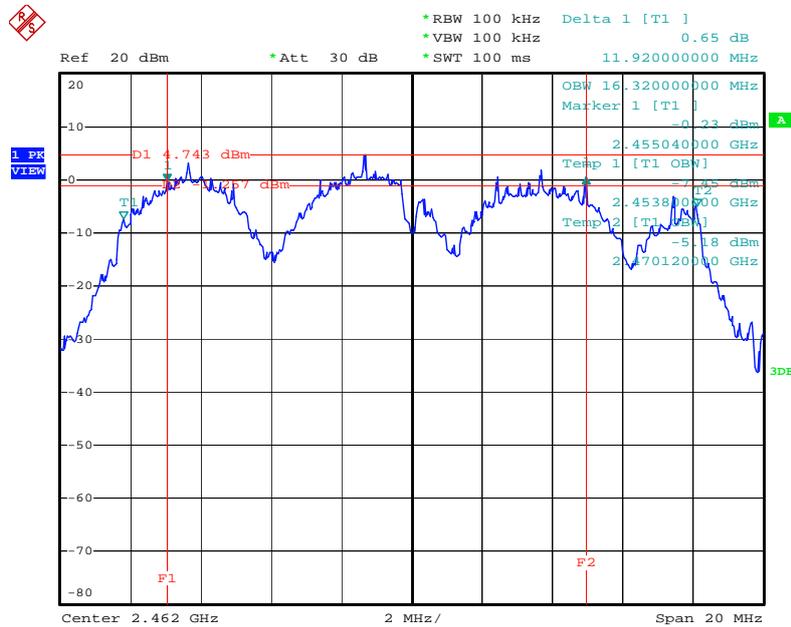

Date: 18.MAY.2011 09:54:17

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4 / 5745 MHz

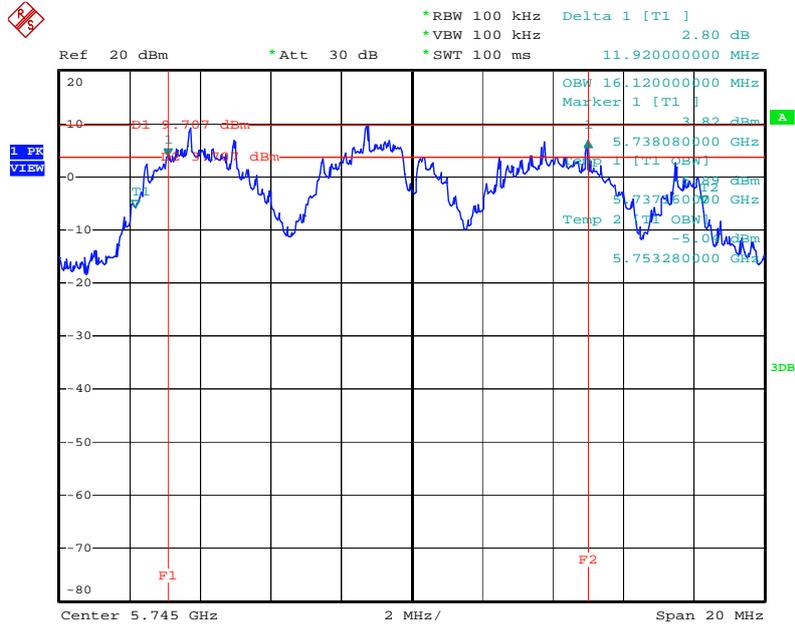

Date: 18.MAY.2011 13:23:05

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 1GHz

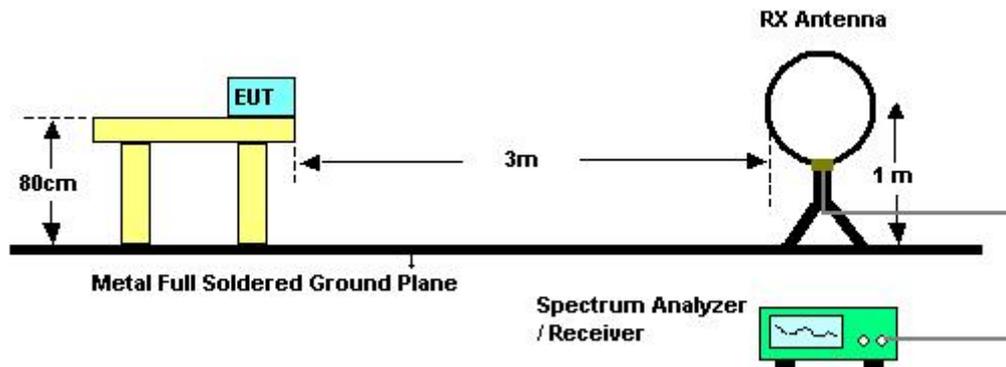

For radiated emissions above 1GHz

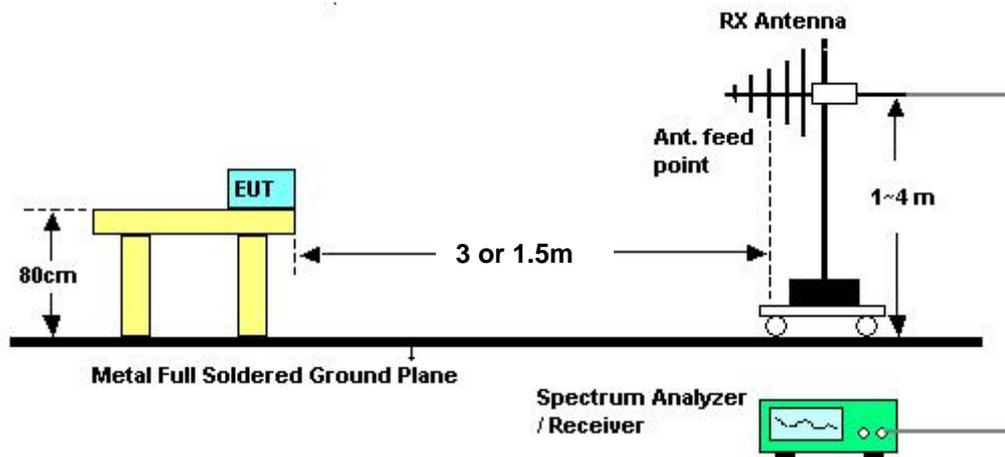

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	Normal Link
<b>Test Date</b>	May 21, 2011		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	Normal Link
Test Mode	Mode 3		

Horizontal

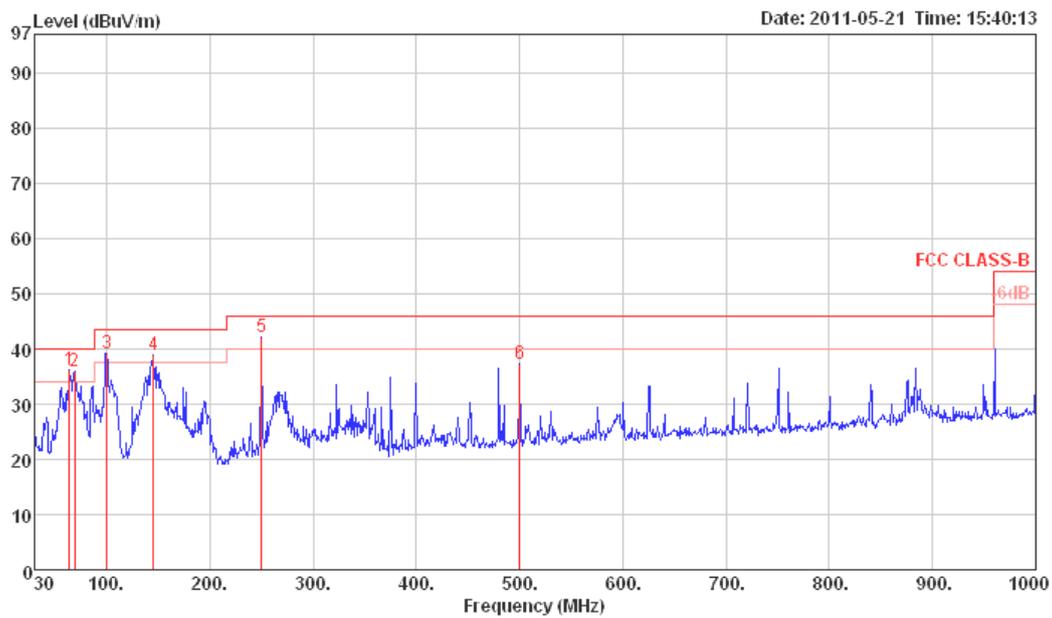

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	63.95	36.21	40.00	-3.79	56.35	0.88	6.72	27.74	Peak	HORIZONTAL
2	68.80	36.04	40.00	-3.96	56.30	0.82	6.65	27.73	Peak	HORIZONTAL
3	99.84	39.29	43.50	-4.21	54.70	1.20	10.99	27.60	Peak	HORIZONTAL
4	145.43	38.82	43.50	-4.68	52.69	1.43	12.08	27.38	Peak	HORIZONTAL
5	250.19	42.04	46.00	-3.96	54.37	1.90	12.77	27.00	Peak	HORIZONTAL
6	500.45	37.30	46.00	-8.70	45.07	2.70	17.63	28.10	Peak	HORIZONTAL

**Vertical**

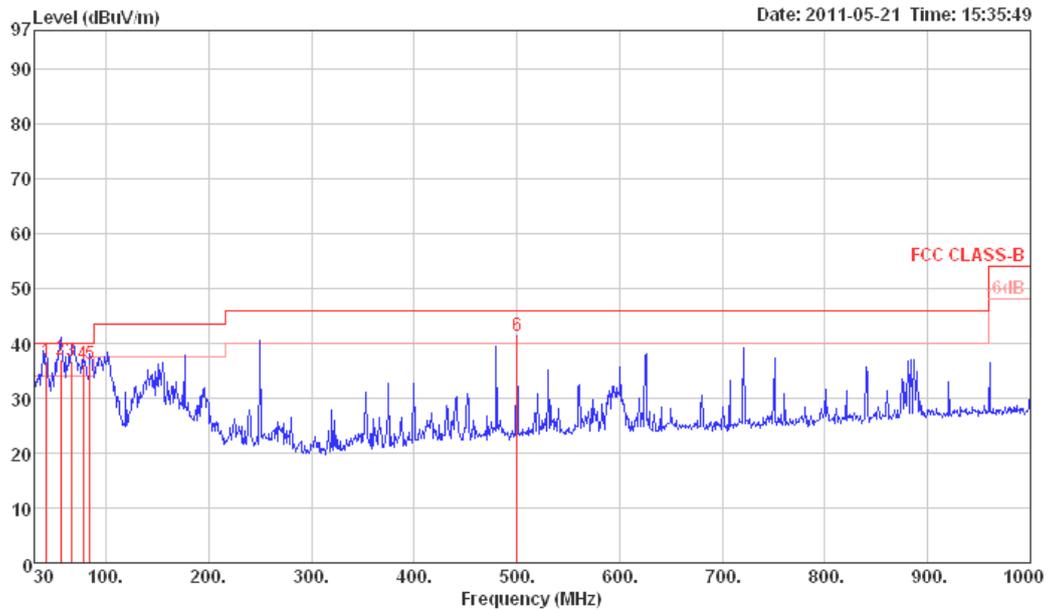

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	42.20	36.66	40.00	-3.34	52.32	0.70	11.44	27.80	QP	VERTICAL
2	56.00	36.99	40.00	-3.01	56.50	0.80	7.47	27.78	QP	VERTICAL
3	66.20	36.79	40.00	-3.21	56.96	0.88	6.69	27.74	QP	VERTICAL
4	77.46	36.26	40.00	-3.74	55.92	1.00	7.03	27.69	QP	VERTICAL
5	84.30	36.13	40.00	-3.87	54.80	1.10	7.89	27.66	QP	VERTICAL
6	500.45	41.33	46.00	-4.67	49.10	2.70	17.63	28.10	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)**

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1/ Ant. 1 + Ant. 2
<b>Test Date</b>	Apr. 14, 2011	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.90	28.77	54.00	-25.23	28.57	3.00	35.26	32.46	159	100	Average	HORIZONTAL
2 p	4824.06	41.07	74.00	-32.93	40.87	3.00	35.26	32.46	159	100	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.94	41.21	74.00	-32.79	41.01	3.00	35.26	32.46	236	100	Peak	VERTICAL
2 a	4823.98	28.00	54.00	-26.00	27.80	3.00	35.26	32.46	236	100	Average	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 6/ Ant. 1 + Ant. 2
<b>Test Date</b>	Apr. 14, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4874.10	37.94	54.00	-16.06	37.52	3.01	35.15	32.56	280	111	Average	HORIZONTAL
2	4876.30	51.05	74.00	-22.95	50.63	3.01	35.15	32.56	280	111	Peak	HORIZONTAL
3 a	7308.00	50.72	54.00	-3.28	45.24	3.75	34.94	36.67	268	121	Average	HORIZONTAL
4 p	7310.30	64.59	74.00	-9.41	59.11	3.75	34.94	36.67	268	121	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	7308.90	65.37	74.00	-8.63	59.89	3.75	34.94	36.67	249	141	Peak	VERTICAL
2 a	7310.90	50.67	54.00	-3.33	45.19	3.75	34.94	36.67	249	141	Average	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 11/ Ant. 1 + Ant. 2
<b>Test Date</b>	Apr. 14, 2011	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	7385.30	36.41	54.00	-17.59	30.77	3.76	34.90	36.78	265	139	Average	HORIZONTAL
2 p	7385.94	46.01	74.00	-27.99	40.37	3.76	34.90	36.78	265	139	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	7386.00	35.49	54.00	-18.51	29.85	3.76	34.90	36.78	116	100	Average	VERTICAL
2 p	7392.80	47.97	74.00	-26.03	42.31	3.77	34.89	36.78	116	100	Peak	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3/ Ant. 1 + Ant. 2
<b>Test Date</b>	Apr. 14, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4843.97	28.82	54.00	-25.18	28.52	3.01	35.20	32.49	236	100	Average	HORIZONTAL
2 p	4844.07	40.99	74.00	-33.01	40.69	3.01	35.20	32.49	236	100	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4843.68	40.85	74.00	-33.15	40.55	3.01	35.20	32.49	269	100	Peak	VERTICAL
2 a	4843.98	28.27	54.00	-25.73	27.97	3.01	35.20	32.49	269	100	Average	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 6/ Ant. 1 + Ant. 2
<b>Test Date</b>	Apr. 14, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4874.01	30.80	54.00	-23.20	30.38	3.01	35.15	32.56	180	100	Average	HORIZONTAL
2 p	4874.38	42.55	74.00	-31.45	42.13	3.01	35.15	32.56	180	100	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.95	29.74	54.00	-24.26	29.32	3.01	35.15	32.56	254	100	Average	VERTICAL
2 p	4874.47	41.22	74.00	-32.78	40.80	3.01	35.15	32.56	254	100	Peak	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 9/ Ant. 1 + Ant. 2
<b>Test Date</b>	Apr. 14, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4904.01	29.59	54.00	-24.41	29.03	3.02	35.09	32.63	340	100	Average	HORIZONTAL
2 p	4904.21	41.57	74.00	-32.43	41.01	3.02	35.09	32.63	340	100	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4904.21	30.86	54.00	-23.14	30.30	3.02	35.09	32.63	260	100	Average	VERTICAL
2 p	4904.25	41.49	74.00	-32.51	40.93	3.02	35.09	32.63	260	100	Peak	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 20MHz CH 149/ Ant. 3 + Ant. 4
<b>Test Date</b>	Apr. 15, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11488.80	49.09	60.00	-10.91	40.58	4.76	34.75	38.50	112	100	Average	HORIZONTAL
2 p	11488.88	66.11	80.00	-13.89	57.60	4.76	34.75	38.50	112	100	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11489.00	64.07	80.00	-15.93	55.56	4.76	34.75	38.50	107	100	Peak	VERTICAL
2 a	11491.52	47.78	60.00	-12.22	39.27	4.76	34.75	38.50	107	100	Average	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 20MHz CH 157/ Ant. 3 + Ant. 4
<b>Test Date</b>	Apr. 15, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11568.52	51.83	60.00	-8.17	43.26	4.86	34.80	38.51	89	100	Average	HORIZONTAL
2 p	11568.84	68.90	80.00	-11.10	60.33	4.86	34.80	38.51	89	100	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11568.84	65.81	80.00	-14.19	57.24	4.86	34.80	38.51	104	100	Peak	VERTICAL
2 a	11568.96	48.70	60.00	-11.30	40.13	4.86	34.80	38.51	104	100	Average	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 20MHz CH 165 / Ant. 3 + Ant. 4
<b>Test Date</b>	Apr. 15, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11648.80	69.98	80.00	-10.02	61.32	5.03	34.90	38.53	85	100	Peak	HORIZONTAL
2 a	11651.04	52.58	60.00	-7.42	43.92	5.03	34.90	38.53	85	100	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11648.92	66.56	80.00	-13.44	57.90	5.03	34.90	38.53	108	100	Peak	VERTICAL
2 a	11649.20	50.08	60.00	-9.92	41.42	5.03	34.90	38.53	108	100	Average	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 40MHz CH 151 / Ant. 3 + Ant. 4
<b>Test Date</b>	Apr. 15 2011	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11509.44	66.31	80.00	-13.69	57.78	4.78	34.75	38.50	113	100	Peak	HORIZONTAL
2 a	11509.80	51.75	60.00	-8.25	43.22	4.78	34.75	38.50	113	100	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11509.32	49.71	60.00	-10.29	41.18	4.78	34.75	38.50	110	100	Average	VERTICAL
2 p	11509.44	63.36	80.00	-16.64	54.83	4.78	34.75	38.50	110	100	Peak	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 40MHz CH 159 / Ant. 3 + Ant. 4
<b>Test Date</b>	Apr. 15 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	11589.48	66.05	80.00	-13.95	57.44	4.91	34.82	38.52	110	100	Peak	HORIZONTAL
2 a	11589.88	53.81	80.00	-6.19	45.20	4.91	34.82	38.52	110	100	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	11589.36	51.64	80.00	-8.36	43.03	4.91	34.82	38.52	104	100	Average	VERTICAL
2 p	11589.40	64.75	80.00	-15.25	56.14	4.91	34.82	38.52	104	100	Peak	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11b CH 1 / Ant. 1
<b>Test Date</b>	Apr. 14 2011	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.87	46.61	74.00	-27.39	46.41	3.00	35.26	32.46	176	113	Peak	HORIZONTAL
2 a	4823.96	42.45	54.00	-11.55	42.25	3.00	35.26	32.46	176	113	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.02	46.49	74.00	-27.51	46.29	3.00	35.26	32.46	279	149	Peak	VERTICAL
2 a	4824.03	42.24	54.00	-11.76	42.04	3.00	35.26	32.46	279	149	Average	VERTICAL

Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	IEEE 802.11b CH 6 / Ant. 1
Test Date	Apr. 14 2011	Test Mode	Mode 1

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	7310.08	57.45	74.00	-16.55	51.97	3.75	34.94	36.67	268	127	Peak	HORIZONTAL
2 a	7310.32	52.94	54.00	-1.06	47.46	3.75	34.94	36.67	268	127	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	7310.28	47.29	54.00	-6.71	41.81	3.75	34.94	36.67	271	131	Average	VERTICAL
2 p	7311.84	53.15	74.00	-20.85	47.66	3.75	34.93	36.67	271	131	Peak	VERTICAL

Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	IEEE 802.11b CH 11/ Ant. 1
Test Date	Apr. 14 2011	Test Mode	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4923.96	47.74	74.00	-26.26	47.09	3.02	35.03	32.66	170	110	Peak	HORIZONTAL
2	4924.00	43.88	54.00	-10.12	43.23	3.02	35.03	32.66	170	110	Average	HORIZONTAL
3 a	7385.28	51.13	54.00	-2.87	45.49	3.76	34.90	36.78	264	128	Average	HORIZONTAL
4 p	7387.00	56.27	74.00	-17.73	50.63	3.76	34.90	36.78	264	128	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	7385.08	52.37	74.00	-21.63	46.73	3.76	34.90	36.78	272	130	Peak	VERTICAL
2 a	7385.28	45.68	54.00	-8.32	40.04	3.76	34.90	36.78	272	130	Average	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11g CH 1 / Ant. 1 + Ant. 2
<b>Test Date</b>	May 18, 2011	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	4823.82	32.57	54.00	-21.43	30.99	4.38	35.26	32.46	360	141	Average	HORIZONTAL	0.00
2 p	4824.10	46.21	74.00	-27.79	44.63	4.38	35.26	32.46	360	141	Peak	HORIZONTAL	0.00

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	4823.67	30.74	54.00	-23.26	29.16	4.38	35.26	32.46	137	100	Average	VERTICAL	0.00
2 p	4824.16	42.46	74.00	-31.54	40.88	4.38	35.26	32.46	137	100	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11g CH 6 / Ant. 1 + Ant. 2
<b>Test Date</b>	May 18, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	4873.67	55.43	74.00	-18.57	53.62	4.40	35.15	32.56	342	111	Peak	HORIZONTAL	0.00
2 a	4874.00	41.35	54.00	-12.65	39.54	4.40	35.15	32.56	342	111	Average	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	4874.06	34.94	54.00	-19.06	33.13	4.40	35.15	32.56	269	100	Average	VERTICAL	0.00
2 p	4874.31	47.28	74.00	-26.72	45.47	4.40	35.15	32.56	269	100	Peak	VERTICAL	0.00

Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	IEEE 802.11g CH 11 / Ant. 1 + Ant. 2
Test Date	May 18, 2011	Test Mode	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	4924.18	35.46	54.00	-18.54	33.41	4.42	35.03	32.66	341	111	Average	HORIZONTAL	0.00
2 p	4924.35	49.09	74.00	-24.91	47.04	4.42	35.03	32.66	341	111	Peak	HORIZONTAL	0.00

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	4923.98	43.99	74.00	-30.01	41.94	4.42	35.03	32.66	100	100	Peak	VERTICAL	0.00
2 a	4924.03	32.95	54.00	-21.05	30.90	4.42	35.03	32.66	100	100	Average	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11a CH 149 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 17, 2011	<b>Test Mode</b>	Mode 1

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11489.58	59.79	80.00	-20.21	49.13	6.91	34.75	38.50	125	115	Peak	HORIZONTAL	0.00
2 a	11489.89	50.23	60.00	-9.77	39.57	6.91	34.75	38.50	125	115	Average	HORIZONTAL	0.00

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11488.72	63.59	80.00	-16.41	52.93	6.91	34.75	38.50	306	100	Peak	VERTICAL	0.00
2 a	11488.75	49.35	60.00	-10.65	38.69	6.91	34.75	38.50	306	100	Average	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11a CH 157 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 17, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11569.21	68.07	80.00	-11.93	57.36	7.00	34.80	38.51	114	100	Peak	HORIZONTAL	0.00
2 a	11569.69	51.70	60.00	-8.30	40.99	7.00	34.80	38.51	114	100	Average	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11568.38	49.65	60.00	-10.35	38.94	7.00	34.80	38.51	82	100	Average	VERTICAL	0.00
2 p	11568.85	63.81	80.00	-16.19	53.10	7.00	34.80	38.51	82	100	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11a CH 165 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 17, 2011	<b>Test Mode</b>	Mode 1

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11648.37	69.69	80.00	-10.31	58.93	7.13	34.90	38.53	93	100	Peak	HORIZONTAL	0.00
2 a	11648.58	53.52	60.00	-6.48	42.76	7.13	34.90	38.53	93	100	Average	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11649.16	52.70	60.00	-7.30	41.94	7.13	34.90	38.53	108	100	Average	VERTICAL	0.00
2 p	11649.75	67.93	80.00	-12.07	57.17	7.13	34.90	38.53	108	100	Peak	VERTICAL	0.00



<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 20MHz CH 149/ Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11489.70	70.52	80.00	-9.48	62.01	4.76	34.75	38.50	229	121	Peak	HORIZONTAL	0.00
2 a	11489.86	51.67	60.00	-8.33	43.16	4.76	34.75	38.50	229	121	Average	HORIZONTAL	0.00

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11489.49	51.69	60.00	-8.31	43.18	4.76	34.75	38.50	145	114	Average	VERTICAL	0.00
2 v	11489.85	69.12	80.00	-10.88	60.61	4.76	34.75	38.50	145	114	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 20MHz CH 157 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11569.66	51.16	60.00	-8.84	42.59	4.86	34.80	38.51	113	100	Average	HORIZONTAL	0.00
2 p	11569.74	69.16	80.00	-10.84	60.59	4.86	34.80	38.51	113	100	Peak	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11569.41	51.68	60.00	-8.32	43.11	4.86	34.80	38.51	146	116	Average	VERTICAL	0.00
2 p	11569.83	69.22	80.00	-10.78	60.62	4.91	34.82	38.51	146	116	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 20MHz CH 165 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11649.82	70.47	80.00	-9.53	61.81	5.03	34.90	38.53	226	120	Peak	HORIZONTAL	0.00
2 a	11650.00	53.19	60.00	-6.81	44.53	5.03	34.90	38.53	226	120	Average	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11649.31	52.51	60.00	-7.49	43.85	5.03	34.90	38.53	146	106	Average	VERTICAL	0.00
2 p	11649.66	69.17	80.00	-10.83	60.51	5.03	34.90	38.53	146	106	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 40MHz CH 151 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11509.71	66.68	80.00	-13.32	58.15	4.78	34.75	38.50	113	100	Peak	HORIZONTAL	0.00
2 a	11509.93	51.54	60.00	-8.46	43.01	4.78	34.75	38.50	113	100	Average	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11509.81	49.49	60.00	-10.51	40.96	4.78	34.75	38.50	143	124	Average	VERTICAL	0.00
2 p	11509.93	65.58	80.00	-14.42	57.05	4.78	34.75	38.50	143	124	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	11a IEEE 802.11n MCS0 40MHz CH 159 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11589.87	51.77	60.00	-8.23	43.16	4.91	34.82	38.52	226	120	Average	HORIZONTAL	0.00
2 p	11590.04	68.14	80.00	-11.86	59.53	4.91	34.82	38.52	226	120	Peak	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11589.70	66.76	80.00	-13.24	58.15	4.91	34.82	38.52	146	116	Peak	VERTICAL	0.00
2 a	11589.80	50.62	60.00	-9.38	42.01	4.91	34.82	38.52	146	116	Average	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11a CH 149 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11490.05	50.68	60.00	-9.32	42.17	4.76	34.75	38.50	226	120	Average	HORIZONTAL	0.00
2 p	11490.27	66.66	80.00	-13.34	58.15	4.76	34.75	38.50	226	120	Peak	HORIZONTAL	0.00

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11490.16	49.93	60.00	-10.07	41.42	4.76	34.75	38.50	146	129	Average	VERTICAL	0.00
2 p	11490.24	65.37	80.00	-14.63	56.86	4.76	34.75	38.50	146	129	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11a CH 157 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11570.04	51.60	60.00	-8.40	43.00	4.91	34.82	38.51	235	110	Average	HORIZONTAL	0.00
2 p	11570.46	67.50	80.00	-12.50	58.90	4.91	34.82	38.51	235	110	Peak	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11569.73	51.44	60.00	-8.56	42.87	4.86	34.80	38.51	147	108	Average	VERTICAL	0.00
2 p	11569.84	67.12	80.00	-12.88	58.52	4.91	34.82	38.51	147	108	Peak	VERTICAL	0.00

<b>Temperature</b>	21°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Serway Lee	<b>Configurations</b>	IEEE 802.11a CH 165 / Ant. 3 + Ant. 4
<b>Test Date</b>	May 24, 2011	<b>Test Mode</b>	Mode 3

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 p	11649.83	69.36	80.00	-10.64	60.70	5.03	34.90	38.53	227	120	Peak	HORIZONTAL	0.00
2 a	11649.94	54.15	60.00	-5.85	45.49	5.03	34.90	38.53	227	120	Average	HORIZONTAL	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			dB
1 a	11650.04	53.20	60.00	-6.80	44.54	5.03	34.90	38.53	144	116	Average	VERTICAL	0.00
2 p	11650.31	69.20	80.00	-10.80	60.54	5.03	34.90	38.53	144	116	Peak	VERTICAL	0.00

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Ant. 1 + Ant. 2
Test Date	May 14, 2011	Test Mode	Mode 1

Channel 1

	Freq	Read Level	Level	Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2388.800	18.25	53.40	54.00	-0.60	7.29	0.00	27.87	AVERAGE	334	100	VERTICAL
2	2389.000	37.32	72.47	74.00	-1.53	7.29	0.00	27.87	PEAK	334	100	VERTICAL
3	2411.400	73.43	108.55				0.00	27.84	PEAK	334	100	VERTICAL
4 ☺	2411.600	63.51	98.63				0.00	27.84	AVERAGE	334	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Read Level	Level	Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2388.400	36.86	72.01	74.00	-1.99	7.29	0.00	27.87	PEAK	335	100	VERTICAL
2	2388.600	18.04	53.19	54.00	-0.81	7.29	0.00	27.87	AVERAGE	335	100	VERTICAL
3 ☺	2431.600	76.68	111.84				0.00	27.81	PEAK	335	100	VERTICAL
4 ☺	2436.400	68.37	103.54				0.00	27.81	AVERAGE	335	100	VERTICAL
5	2484.400	34.19	69.34	74.00	-4.66	7.42	0.00	27.73	Peak	335	100	VERTICAL
6	2484.400	14.19	49.34	54.00	-4.66	7.42	0.00	27.73	Average	335	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Read Level	Level	Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1 ☺	2461.400	63.66	98.77				0.00	27.76	AVERAGE	331	100	VERTICAL
2 ☺	2461.400	73.85	108.95				0.00	27.76	PEAK	331	100	VERTICAL
3	2483.900	17.57	52.72	54.00	-1.28	7.42	0.00	27.73	AVERAGE	331	100	VERTICAL
4	2484.100	37.92	73.06	74.00	-0.94	7.42	0.00	27.73	PERK	331	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Ant. 1 + Ant. 2
Test Date	May 20, 2011	Test Mode	Mode 1

### Channel 3

	Freq	Read		Limit	Over	Cable	Preamp	Antenna	Remark	Table	Ant	Pol/Phase
		Level	Level									
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2389.600	18.26	53.41	54.00	-0.59	7.29	0.00	27.87	AVERAGE	332	100	VERTICAL
2	2390.000	34.79	69.94	74.00	-4.06	7.29	0.00	27.87	PEAK	332	100	VERTICAL
3	2424.000	67.03	102.20				0.00	27.81	PEAK	332	100	VERTICAL
4 ☺	2424.000	55.86	91.02				0.00	27.81	AVERAGE	332	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Read		Limit	Over	Cable	Preamp	Antenna	Remark	Table	Ant	Pol/Phase
		Level	Level									
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2389.200	18.54	53.69	54.00	-0.31	7.29	0.00	27.87	AVERAGE	334	100	VERTICAL
2	2389.200	35.06	70.21	74.00	-3.79	7.29	0.00	27.87	PEAK	334	100	VERTICAL
3	2439.000	70.26	105.40				0.00	27.78	PEAK	334	100	VERTICAL
4 ☺	2439.000	59.25	94.39				0.00	27.78	AVERAGE	334	100	VERTICAL
5	2483.500	13.01	48.16	54.00	-5.84	7.42	0.00	27.73	AVERAGE	334	100	VERTICAL
6	2483.900	31.57	66.72	74.00	-7.28	7.42	0.00	27.73	PEAK	334	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

	Freq	Read		Limit	Over	Cable	Preamp	Antenna	Remark	Table	Ant	Pol/Phase
		Level	Level									
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2454.000	69.17	104.28				0.00	27.76	PEAK	331	100	VERTICAL
2	2454.000	58.03	93.14				0.00	27.76	AVERAGE	331	100	VERTICAL
3	2483.500	18.76	53.91	54.00	-0.09	7.42	0.00	27.73	AVERAGE	331	100	VERTICAL
4	2489.100	38.13	73.25	74.00	-0.75	7.42	0.00	27.70	PEAK	331	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2452 MHz.

Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	IEEE 802.11b CH 1, 6, 11/ Ant. 1 + Ant. 2
Test Date	May 14, 2011	Test Mode	Mode 1

### Channel 1

	Freq	Read		Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant	
		Level	Level								Line	Limit
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2387.000	16.25	51.40	54.00	-2.60	7.29	0.00	27.87	AVERAGE	---	100	VERTICAL
2	2387.200	26.89	62.05	74.00	-11.95	7.29	0.00	27.87	PEAK	---	100	VERTICAL
3 ☺	2411.000	75.04	110.17				0.00	27.84	PEAK	---	100	VERTICAL
4 ☺	2411.200	71.31	106.43				0.00	27.84	AVERAGE	---	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Read		Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant	
		Level	Level								Line	Limit
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2390.000	10.74	45.89	54.00	-8.11	7.29	0.00	27.87	AVERAGE	---	100	VERTICAL
2	2390.000	24.13	59.28	74.00	-14.72	7.29	0.00	27.87	PEAK	---	100	VERTICAL
3 ☺	2436.200	69.40	104.56				0.00	27.81	AVERAGE	---	100	VERTICAL
4 ☺	2438.000	73.14	108.27				0.00	27.78	PEAK	---	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Read		Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant	
		Level	Level								Line	Limit
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1 ☺	2461.000	74.19	109.30				0.00	27.76	PEAK	---	100	VERTICAL
2 ☺	2461.200	70.77	105.88				0.00	27.76	AVERAGE	19	100	VERTICAL
3	2483.500	25.89	61.04	74.00	-12.96	7.42	0.00	27.73	PEAK	---	100	VERTICAL
4	2483.700	17.91	53.06	54.00	-0.94	7.42	0.00	27.73	AVERAGE	---	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	21°C	Humidity	61%
Test Engineer	Serway Lee	Configurations	IEEE 802.11g CH 1, 6, 11/ Ant. 1 + Ant. 2
Test Date	May 14, 2011	Test Mode	Mode 1

### Channel 1

	Freq	Read Level	Read Level	Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2390.000	18.81	53.96	54.00	-0.04	7.29	0.00	27.87	AVERAGE	56	100	VERTICAL
2	2390.000	37.97	73.12	74.00	-0.88	7.29	0.00	27.87	PEAK	56	100	VERTICAL
3 ☺	2411.400	73.98	109.10				0.00	27.84	PEAK	56	100	VERTICAL
4 ☺	2411.400	64.31	99.43				0.00	27.84	AVERAGE	56	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Read Level	Read Level	Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2462.800	67.90	103.08				0.00	27.76	PEAK	346	108	HORIZONTAL
2 ☺	2462.800	58.06	93.24				0.00	27.76	AVERAGE	346	108	HORIZONTAL
3	2483.500	18.83	53.98	54.00	-0.02	7.42	0.00	27.73	AVERAGE	346	108	HORIZONTAL
4	2483.500	38.64	73.79	74.00	-0.21	7.42	0.00	27.73	PEAK	346	108	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Read Level	Read Level	Limit Line	Over Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB/m		deg	cm	
1	2390.000	32.56	67.71	74.00	-6.29	7.29	0.00	27.87	PEAK	333	100	VERTICAL
2	2390.000	18.36	53.52	54.00	-0.48	7.29	0.00	27.87	AVERAGE	333	100	VERTICAL
3 ☺	2435.600	77.99	113.15				0.00	27.81	PEAK	333	100	VERTICAL
4 ☺	2435.800	68.91	104.07				0.00	27.81	AVERAGE	333	100	VERTICAL
5	2483.500	13.15	48.29	54.00	-5.71	7.42	0.00	27.73	AVERAGE	333	100	VERTICAL
6	2483.500	28.33	63.48	74.00	-10.52	7.42	0.00	27.73	PEAK	333	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2 / 2412 MHz

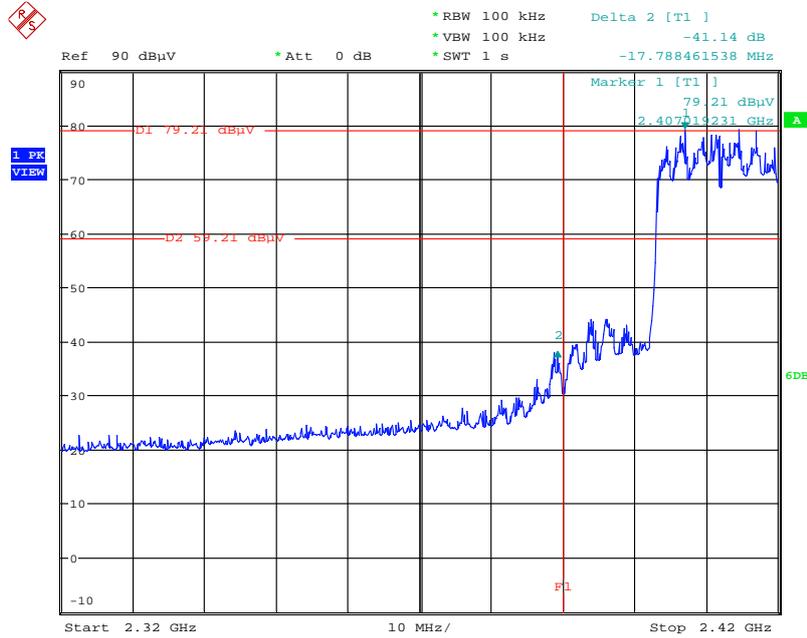


Date: 18.MAY.2011 17:16:38

High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2 / 2462 MHz

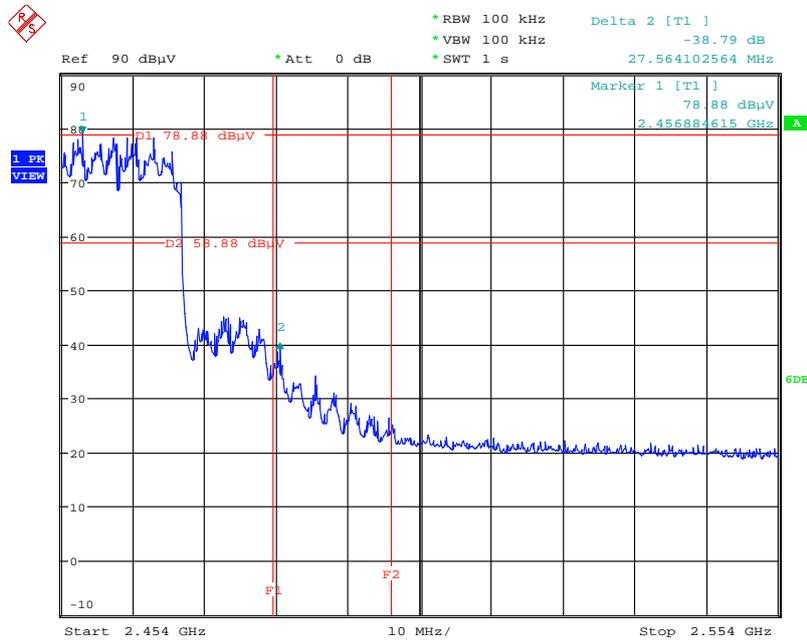


Date: 18.MAY.2011 17:24:55

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2 / 2422 MHz

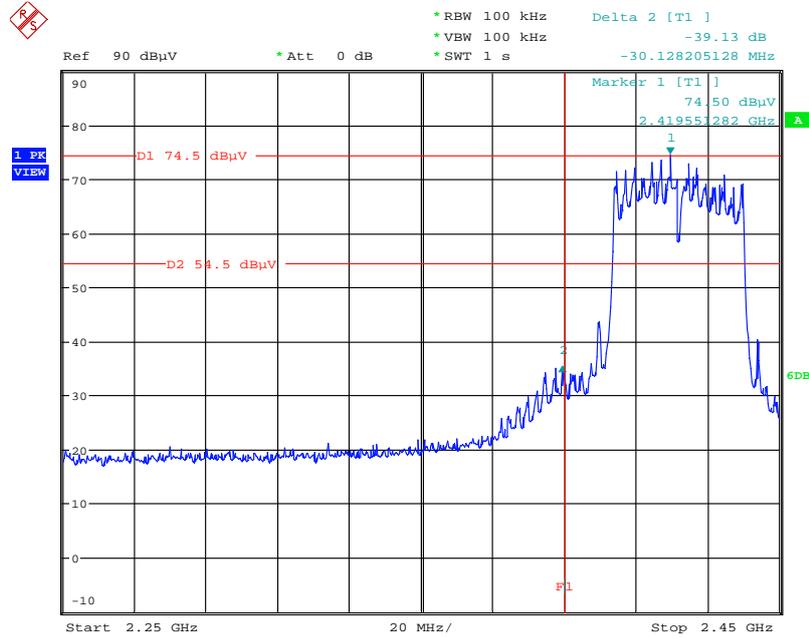


Date: 18.MAY.2011 17:19:39

High Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2 / 2452 MHz

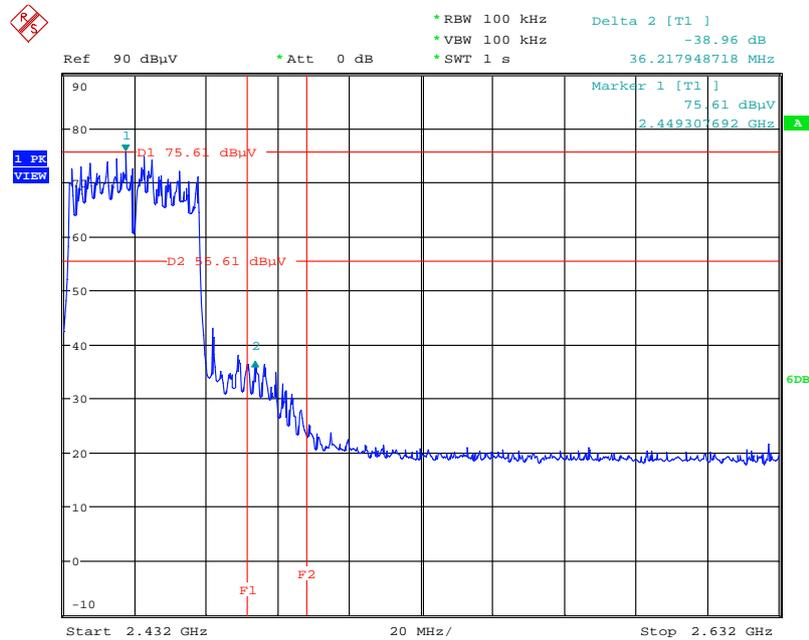


Date: 18.MAY.2011 17:22:13

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3+ Ant. 4 / 5745 MHz

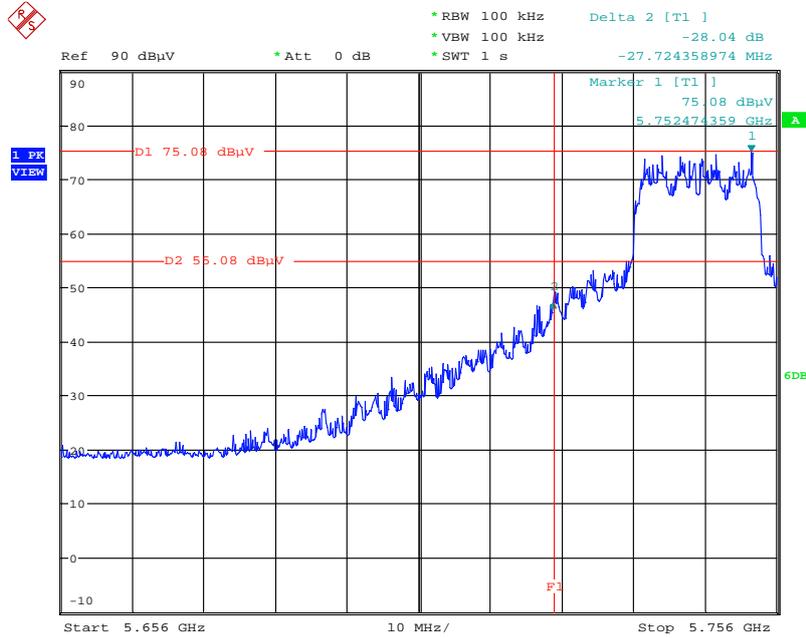

Date: 18.MAY.2011 17:03:18


High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3+ Ant. 4 / 5825 MHz

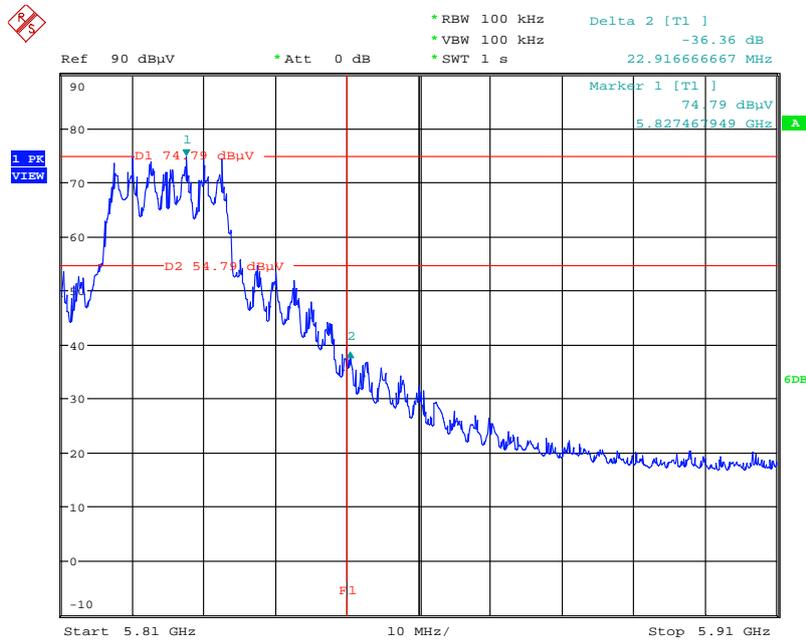

Date: 18.MAY.2011 16:41:46




Low Band Edge Plot on Configuration IEEE 802.11b / Ant. 1 / 2412 MHz

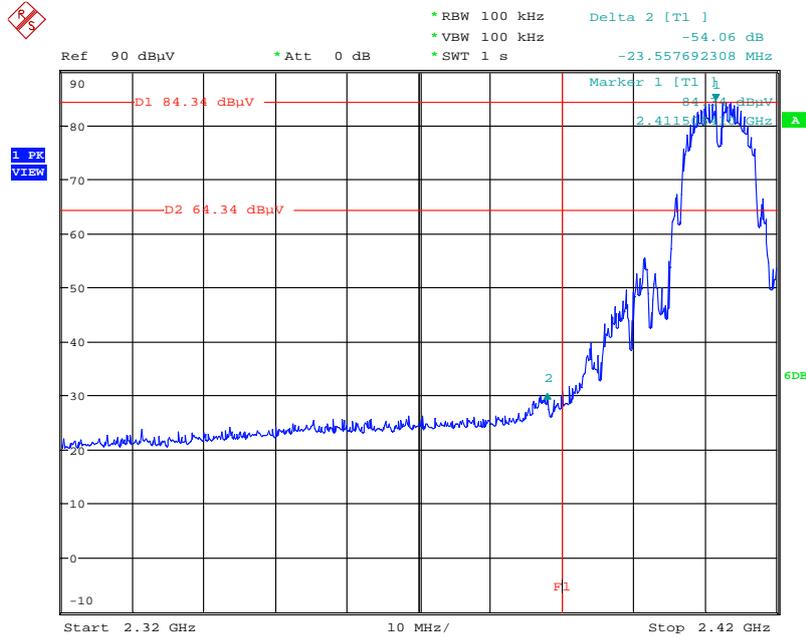


Date: 18.MAY.2011 17:10:59

High Band Edge Plot on Configuration IEEE 802.11b / Ant. 1 / 2462 MHz

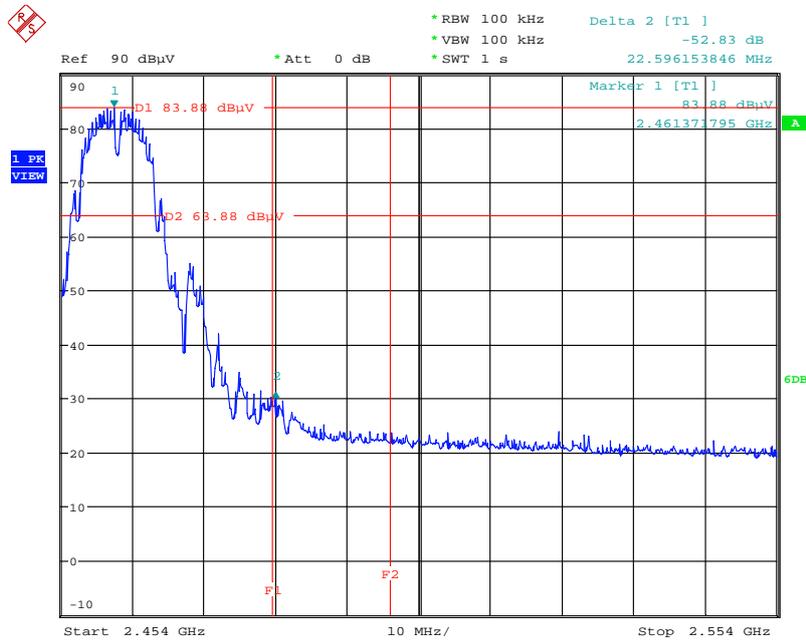


Date: 18.MAY.2011 17:28:43

Low Band Edge Plot on Configuration IEEE 802.11g / Ant. 1 + Ant. 2 / 2412 MHz

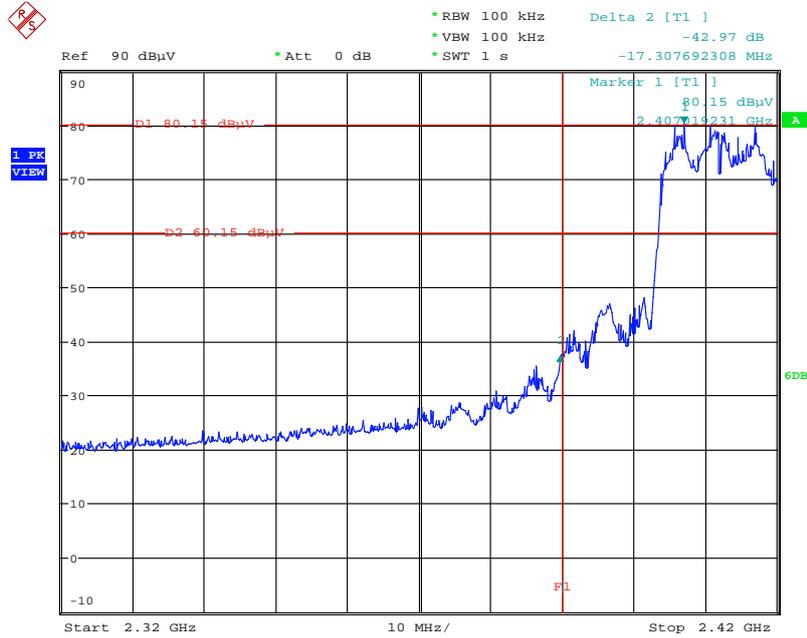


Date: 18.MAY.2011 17:14:28

High Band Edge Plot on Configuration IEEE 802.11g / Ant. 1 + Ant. 2 / 2462 MHz

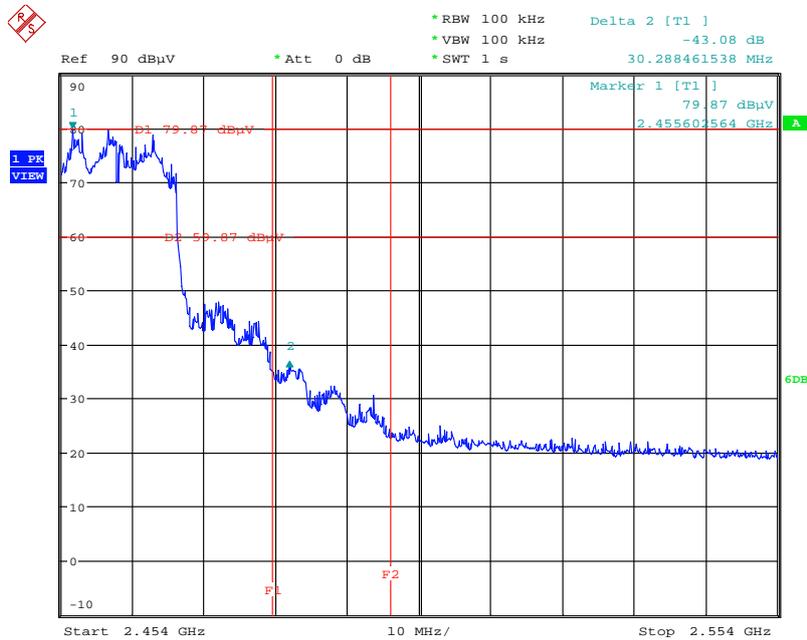


Date: 18.MAY.2011 17:27:06

Low Band Edge Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4 / 5745 MHz

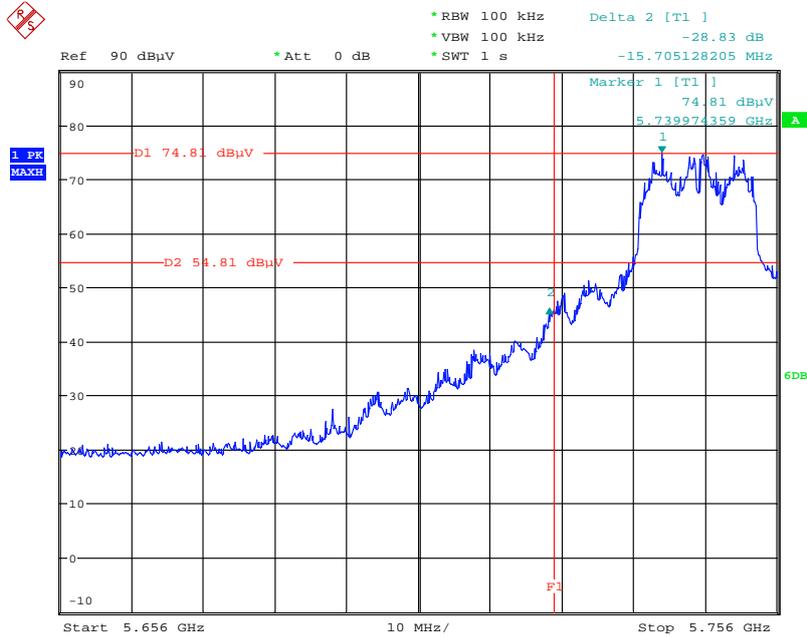

Date: 18.MAY.2011 17:06:02

High Band Edge Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4 / 5825 MHz

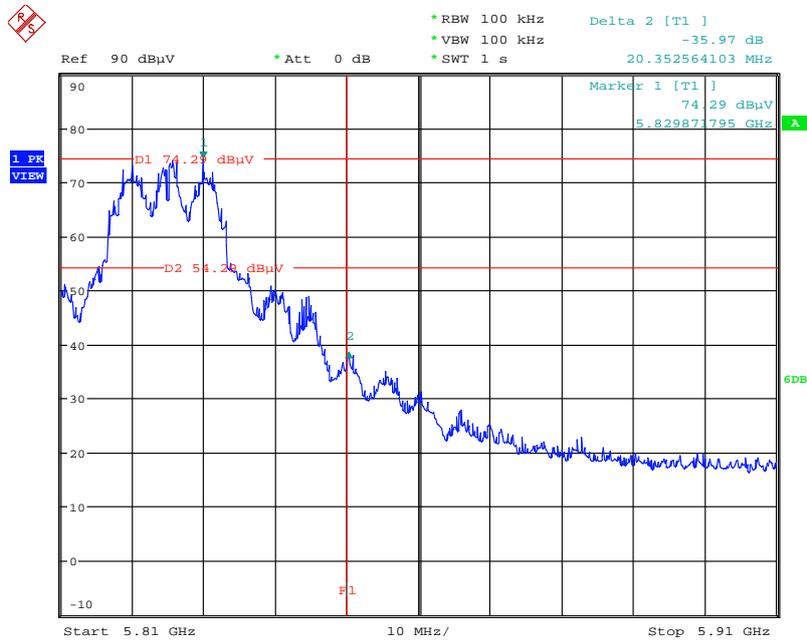

Date: 18.MAY.2011 16:39:02

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 01, 2010	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Apr. 24, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Oct. 30, 2010	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Jan. 04, 2011	Conduction (CO01-CB)
COND Cable	-	Cable	-	0.15MHz~30MHz	Dec. 01, 2010	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Oct. 17, 2010	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 13, 2010	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 08, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 06, 2010	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP	100304	9kHz ~ 40GHz	Nov. 06, 2010	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 06, 2011	Radiation (03CH01-CB)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Sep. 09, 2010	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast						
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP30	100023	9KHz~30GHz	Mar. 05, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	TEN BILLION	TTH-D3SP	TBN-931011	-30~100°C	May 21, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz-40GHz	Sep. 13, 2010	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz-40GHz	Sep. 08, 2010	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: \*Calibration Interval of instruments listed above is two year.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2010 to January 09, 2013
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

*Jay-san Chen*

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 30, 2009

Pl, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix