



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

|                     |  |
|---------------------|--|
| Applicant's company | NETGEAR, Inc.  |
| Applicant Address   | 350 East Plumeria Drive, San Jose, California 95134, USA |
| FCC ID              | PY313200230  |

|                   |                                       |
|-------------------|---------------------------------------|
| Product Name      | WiFi Range Extender                   |
| Brand Name        | NETGEAR                               |
| Model No.         | EX6200                                |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C § 15.247 |
| Test Freq. Range  | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz     |
| Received Date     | Oct. 25, 2013                         |
| Final Test Date   | Nov. 19, 2013                         |
| Submission Type   | Original Equipment                    |

### Statement

**Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a/ac (5725 ~ 5850MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01 and KDB 662911 D01 v02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|  |                |
|--|----------------|
| <b>1. CERTIFICATE OF COMPLIANCE .....</b>                | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>               | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                      | <b>3</b>       |
| 3.1. Product Details.....                                | 3              |
| 3.2. Accessories.....                                    | 6              |
| 3.3. Table for Filed Antenna.....                        | 7              |
| 3.4. Table for Carrier Frequencies .....                 | 9              |
| 3.5. Table for Product Information .....                 | 9              |
| 3.6. Table for Test Modes.....                           | 10             |
| 3.7. Table for Testing Locations.....                    | 12             |
| 3.8. Table for Supporting Units .....                    | 13             |
| 3.9. Table for Parameters of Test Software Setting ..... | 14             |
| 3.10. EUT Operation during Test .....                    | 15             |
| 3.11. Duty Cycle.....                                    | 16             |
| 3.12. Test Configurations .....                          | 22             |
| <b>4. TEST RESULT .....</b>                              | <b>26</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement.....  | 26             |
| 4.2. Maximum Conducted Output Power Measurement.....     | 30             |
| 4.3. Power Spectral Density Measurement .....            | 34             |
| 4.4. 6dB Spectrum Bandwidth Measurement .....            | 49             |
| 4.5. Radiated Emissions Measurement .....                | 59             |
| 4.6. Emissions Measurement .....                         | 92             |
| 4.7. Antenna Requirements .....                          | 127            |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>             | <b>128</b>     |
| <b>6. TEST LOCATION.....</b>                             | <b>130</b>     |
| <b>7. MEASUREMENT UNCERTAINTY.....</b>                   | <b>131</b>     |
| <b>APPENDIX A. TEST PHOTOS .....</b>                     | <b>A1 ~ A5</b> |
| <b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>    | <b>B1 ~ B3</b> |
| <b>APPENDIX C. CO-LOCATION REPORT.....</b>               | <b>C1 ~ C3</b> |





## 1. CERTIFICATE OF COMPLIANCE

Product Name : WIFI Range Extender  
Brand Name : NETGEAR  
Model No. : EX6200  
Applicant : NETGEAR, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 25, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                   |          |             |
|--|--------------|-----------------------------------|----------|-------------|
| Part   | Rule Section | Description of Test               | Result   | Under Limit |
| 4.1  | 15.207       | AC Power Line Conducted Emissions | Complies | 6.10 dB     |
| 4.2  | 15.247(b)(3) | Maximum Conducted Output Power    | Complies | 0.02 dB     |
| 4.3  | 15.247(e)    | Power Spectral Density            | Complies | 3.32 dB     |
| 4.4  | 15.247(a)(2) | 6dB Spectrum Bandwidth            | Complies | -           |
| 4.5  | 15.247(d)    | Radiated Emissions                | Complies | 0.07 dB     |
| 4.6  | 15.247(d)    | Band Edge Emissions               | Complies | 0.15 dB     |
| 4.7  | 15.203       | Antenna Requirements              | Complies | -           |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

| Items                    | Description  |
|--------------------------|--|
| Product Type             | WLAN (2TX, 2RX)  |
| Radio Type               | Intentional Transceiver  |
| Power Type               | From power adapter   |
| Modulation               | see the below table for IEEE 802.11n/ac  |
| Data Modulation          | For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)   |
| Data Rate (Mbps)         | see the below table for IEEE 802.11n/ac  |
| Frequency Range          | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz  |
| Channel Number           | <u>For 2.4GHz Band:</u><br>11 for 20MHz bandwidth ; 7 for 40MHz bandwidth<br><u>For 5GHz Band:</u><br>5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ;<br>1 for 80MHz bandwidth   |
| Channel Band Width (99%) | For non-beamforming mode:<br><u>For 2.4GHz Band:</u><br>MCS0 (20MHz): 17.92 MHz ;<br>MCS0 (40MHz): 36.16 MHz<br><u>For 5GHz Band:</u><br>802.11n MCS0 (20MHz): 17.76 MHz ;<br>802.11n MCS0 (40MHz): 36.32 MHz<br>For beamforming mode:<br><u>For 5GHz Band:</u><br>802.11ac MCS2/Nss1 (20MHz): 17.76 MHz ;<br>802.11ac MCS2/Nss1 (40MHz): 36.64 MHz ;<br>802.11ac MCS2/Nss1 (80MHz): 75.84 MHz |

|                                |   |
|--------------------------------|---|
| Maximum Conducted Output Power | <p>For non-beamforming mode:</p> <p><u>For 2.4GHz Band:</u></p> <p>MCS0 (20MHz): 27.41 dBm ;</p> <p>MCS0 (40MHz): 22.90 dBm</p> <p><u>For 5GHz Band:</u></p> <p>802.11n MCS0 (20MHz): 29.71 dBm ;</p> <p>802.11n MCS0 (40MHz): 29.91 dBm ;</p> <p>For beamforming mode:</p> <p><u>For 5GHz Band:</u></p> <p>802.11ac MCS2/Nss1 (20MHz): 28.76 dBm ;</p> <p>802.11ac MCS2/Nss1 (40MHz): 28.82 dBm ;</p> <p>802.11ac MCS2/Nss1 (80MHz): 26.29 dBm</p> |
| Carrier Frequencies            | Please refer to section 3.4   |
| Antenna                        | Please refer to section 3.3   |

Note: The EUT supports beamforming mode for 802.11ac 20/40/80MHz.

**802.11a/b/g**

| Items                          | Description   |
|--------------------------------|---|
| Product Type                   | 802.11a/g: WLAN (2TX, 2RX)<br>802.11b: WLAN (1TX, 1RX)                        |
| Radio Type                     | Intentional Transceiver   |
| Power Type                     | From power adapter  |
| Modulation                     | DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g                               |
| Data Modulation                | DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)                 |
| Data Rate (Mbps)               | DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)                            |
| Frequency Range                | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz   |
| Channel Number                 | 11b/g: 11 ; 11a: 5  |
| Channel Band Width (99%)       | For non-beamforming mode:<br>11b: 10.16 MHz ; 11g: 16.72 MHz ; 11a: 16.56 MHz |
| Maximum Conducted Output Power | For non-beamforming mode:<br>11b: 23.94 dBm ; 11g: 27.38 dBm ; 11a: 29.71 dBm |
| Carrier Frequencies            | Please refer to section 3.4   |
| Antenna                        | Please refer to section 3.3   |

**Antenna and Band width**

| Antenna       | Single (TX) |        | Two (TX) |        |        |
|---------------|-------------|--------|----------|--------|--------|
|               | 20 MHz      | 40 MHz | 20 MHz   | 40 MHz | 80 MHz |
| IEEE 802.11a  | X           | X      | V        | X      | X      |
| IEEE 802.11b  | V           | X      | X        | X      | X      |
| IEEE 802.11g  | X           | X      | V        | X      | X      |
| IEEE 802.11n  | X           | X      | V        | V      | X      |
| IEEE 802.11ac | X           | X      | V        | V      | V      |

Note: The EUT supports beamforming mode for 802.11ac 20/40/80MHz.

**IEEE 11n/ac Spec.**

| Protocol         | Number of Transmit Chains (NTX) | Data Rate / MCS |
|------------------|---------------------------------|-----------------|
| 802.11n (HT20)   | 2                               | MCS0-15         |
| 802.11n (HT40)   | 2                               | MCS0-15         |
| 802.11ac (VHT20) | 2                               | MCS 0-9/Nss1-2  |
| 802.11ac (VHT40) | 2                               | MCS 0-9/Nss1-2  |
| 802.11ac (VHT80) | 2                               | MCS 0-9/Nss1-2  |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: The test result of beam-forming mode is worse case than non beam-forming mode, so it is recorded in the test report for 802.11ac.

Note 4: Modulation modes consist of below configuration:  
11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

| Power                         | Brand   | Model                | P/N          | Rating  |
|-------------------------------|---------|----------------------|--------------|---|
| Adapter 1                     | NETGEAR | P030WF120B 11200-6LF | 332-10200-02 | Input: 100-240V~50/60Hz 1.0A<br>Output: 12.0V, 2.5A |
| Adapter 2                     | NETGEAR | MU30-5120250-A1      | 332-10234-01 | Input: 100-240V~50/60Hz 0.8A<br>Output: 12V, 2.5A   |
| Others                        |         |                      |              |   |
| RJ-45 Cable*1: Shielded, 1.5m |         |                      |              |   |
| Cradle*1                      |         |                      |              |   |

### 3.3. Table for Filed Antenna

| Ant. | Brand   | Model Name | Antenna Type   | Connector |
|------|---------|------------|----------------|-----------|
| 1    | NETGEAR | EX6200     | Dipole Antenna | I-PEX     |
| 2    | NETGEAR | EX6200     | Dipole Antenna | I-PEX     |

| Ant. | Frequency | Gain (dBi) |       | Cable loss |       | True Gain (dBi) |       |
|------|-----------|------------|-------|------------|-------|-----------------|-------|
|      |           | 2.4GHz     |       | 2.4GHz     |       | 2.4GHz          |       |
|      |           | 20MHz      | 40MHz | 20MHz      | 40MHz | 20MHz           | 40MHz |
| 1    | 2412MHz   | 2.4        | -     | 0.5        | -     | 1.9             | -     |
|      | 2422MHz   | -          | 2.4   | -          | 0.5   | -               | 1.9   |
|      | 2437MHz   | 2.5        | 2.5   | 0.5        | 0.5   | 2               | 2     |
|      | 2452MHz   | -          | 2.8   | -          | 0.5   | -               | 2.3   |
|      | 2462MHz   | 2.9        | -     | 0.5        | -     | 2.4             | -     |
| 2    | 2412MHz   | 2.4        | -     | 0.6        | -     | 1.8             | -     |
|      | 2422MHz   | -          | 2.4   | -          | 0.6   | -               | 1.8   |
|      | 2437MHz   | 2.5        | 2.5   | 0.6        | 0.6   | 1.9             | 1.9   |
|      | 2452MHz   | -          | 2.8   | -          | 0.6   | -               | 2.2   |
|      | 2462MHz   | 2.9        | -     | 0.6        | -     | 2.3             | -     |

| Ant. | Frequency | Gain (dBi) |       |       | Cable loss |       |       | True Gain (dBi) |       |       |
|------|-----------|------------|-------|-------|------------|-------|-------|-----------------|-------|-------|
|      |           | 5GHz       |       |       | 5GHz       |       |       | 5GHz            |       |       |
|      |           | 20MHz      | 40MHz | 80MHz | 20MHz      | 40MHz | 80MHz | 20MHz           | 40MHz | 80MHz |
| 1    | 5745MHz   | 5.1        | -     | -     | 1.1        | -     | -     | 4               | -     | -     |
|      | 5755MHz   | -          | 5.1   | -     | -          | 1.1   | -     | -               | 4     | -     |
|      | 5775MHz   | -          | -     | 5.5   | -          | -     | 1.1   | -               | -     | 4.4   |
|      | 5785MHz   | 5.5        | -     | -     | 1.1        | -     | -     | 4.4             | -     | -     |
|      | 5795MHz   | -          | 5.5   | -     | -          | 1.1   | -     | -               | 4.4   | -     |
|      | 5825MHz   | 5.5        | -     | -     | 1.1        | -     | -     | 4.4             | -     | -     |
| 2    | 5745MHz   | 5.1        | -     | -     | 0.8        | -     | -     | 4.3             | -     | -     |
|      | 5755MHz   | -          | 5.1   | -     | -          | 0.8   | -     | -               | 4.3   | -     |
|      | 5775MHz   | -          | -     | 5.5   | -          | -     | 0.8   | -               | -     | 4.7   |
|      | 5785MHz   | 5.5        | -     | -     | 0.8        | -     | -     | 4.7             | -     | -     |
|      | 5795MHz   | -          | 5.5   | -     | -          | 0.8   | -     | -               | 4.7   | -     |
|      | 5825MHz   | 5.5        | -     | -     | 0.8        | -     | -     | 4.7             | -     | -     |

Note: The EUT has two antennas

<For 2.4GHz Band:>

For IEEE 802.11b mode (1TX/1RX)

Only Ant. 1 could transmit/receive simultaneously.


For IEEE 802.11g/n mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

<For 5GHz Band:>

For IEEE 802.11a/n/ac mode (2TX/2RX):

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

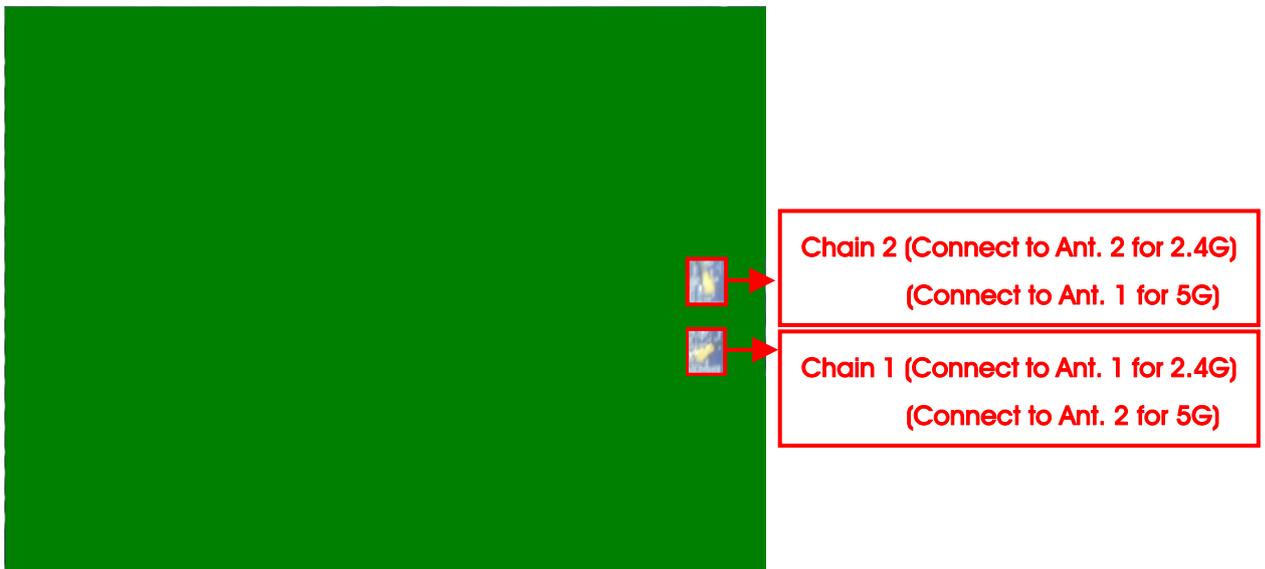

### 3.4. Table for Carrier Frequencies

#### For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1           | 2412 MHz  | 7           | 2442 MHz  |
|                | 2           | 2417 MHz  | 8           | 2447 MHz  |
|                | 3           | 2422 MHz  | 9           | 2452 MHz  |
|                | 4           | 2427 MHz  | 10          | 2457 MHz  |
|                | 5           | 2432 MHz  | 11          | 2462 MHz  |
|                | 6           | 2437 MHz  | -           | -         |

#### For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

| Frequency Band          | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5725~5850 MHz<br>Band 4 | 149         | 5745 MHz  | 157         | 5785 MHz  |
|                         | 151         | 5755 MHz  | 159         | 5795 MHz  |
|                         | 153         | 5765 MHz  | 161         | 5805 MHz  |
|                         | 155         | 5775 MHz  | 165         | 5825 MHz  |

### 3.5. Table for Product Information

| Items                | Description   |  |
|----------------------|---|--|
| Communication Mode   | <input checked="" type="checkbox"/> IP Based (Load Based)         | <input type="checkbox"/> Frame Based         |
| Beamforming Function | <input checked="" type="checkbox"/> With beamforming for 802.11ac | <input type="checkbox"/> Without beamforming |

### 3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

#### For 2.4GHz Band:

| Test Items                        | Mode        | Data Rate | Channel | Antenna |
|-----------------------------------|-------------|-----------|---------|---------|
| AC Power Line Conducted Emissions | Normal Link | -         | -       | -       |
| Maximum Conducted Output Power    | 11n 20MHz   | MCS0      | 1/6/11  | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 3/6/9   | 1+2     |
|                                   | 11b/CCK     | 1 Mbps    | 1/6/11  | 1       |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1+2     |
| Power Spectral Density            | 11n 20MHz   | MCS0      | 1/6/11  | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 3/6/9   | 1+2     |
|                                   | 11b/CCK     | 1 Mbps    | 1/6/11  | 1       |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1+2     |
| 6dB Spectrum Bandwidth            | 11n 20MHz   | MCS0      | 1/6/11  | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 3/6/9   | 1+2     |
|                                   | 11b/CCK     | 1 Mbps    | 1/6/11  | 1       |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1+2     |
| Radiated Emissions Below 1GHz     | Normal Link | -         | -       | -       |
| Radiated Emissions Above 1GHz     | 11n 20MHz   | MCS0      | 1/6/11  | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 3/6/9   | 1+2     |
|                                   | 11b/CCK     | 1 Mbps    | 1/6/11  | 1       |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1+2     |
| Band Edge Emissions               | 11n 20MHz   | MCS0      | 1/6/11  | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 3/6/9   | 1+2     |
|                                   | 11b/CCK     | 1 Mbps    | 1/6/11  | 1       |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11  | 1+2     |

## For 5GHz Band:

| Test Items                        | Mode        | Data Rate | Channel     | Antenna |
|-----------------------------------|-------------|-----------|-------------|---------|
| AC Power Line Conducted Emissions | Normal Link | -         | -           | -       |
| Maximum Conducted Output Power    | 11n 20MHz   | MCS0      | 149/157/165 | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 151/159     | 1+2     |
|                                   | 11ac 20MHz  | MCS2/Nss1 | 149/157/165 | 1+2     |
|                                   | 11ac 40MHz  | MCS2/Nss1 | 151/159     | 1+2     |
|                                   | 11ac 80MHz  | MCS2/Nss1 | 155         | 1+2     |
|                                   | 11a/BPSK    | 6 Mbps    | 149/157/165 | 1+2     |
| Power Spectral Density            | 11n 20MHz   | MCS0      | 149/157/165 | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 151/159     | 1+2     |
|                                   | 11ac 20MHz  | MCS2/Nss1 | 149/157/165 | 1+2     |
|                                   | 11ac 40MHz  | MCS2/Nss1 | 151/159     | 1+2     |
|                                   | 11ac 80MHz  | MCS2/Nss1 | 155         | 1+2     |
|                                   | 11a/BPSK    | 6 Mbps    | 149/157/165 | 1+2     |
| 6dB Spectrum Bandwidth            | 11n 20MHz   | MCS0      | 149/157/165 | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 151/159     | 1+2     |
|                                   | 11ac 20MHz  | MCS2/Nss1 | 149/157/165 | 1+2     |
|                                   | 11ac 40MHz  | MCS2/Nss1 | 151/159     | 1+2     |
|                                   | 11ac 80MHz  | MCS2/Nss1 | 155         | 1+2     |
|                                   | 11a/BPSK    | 6 Mbps    | 149/157/165 | 1+2     |
| Radiated Emissions Below 1GHz     | Normal Link | -         | -           | -       |
| Radiated Emissions Above 1GHz     | 11n 20MHz   | MCS0      | 149/157/165 | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 151/159     | 1+2     |
|                                   | 11ac 20MHz  | MCS2/Nss1 | 149/157/165 | 1+2     |
|                                   | 11ac 40MHz  | MCS2/Nss1 | 151/159     | 1+2     |
|                                   | 11ac 80MHz  | MCS2/Nss1 | 155         | 1+2     |
|                                   | 11a/BPSK    | 6 Mbps    | 149/157/165 | 1+2     |
| Band Edge Emissions               | 11n 20MHz   | MCS0      | 149/157/165 | 1+2     |
|                                   | 11n 40MHz   | MCS0      | 151/159     | 1+2     |
|                                   | 11ac 20MHz  | MCS2/Nss1 | 149/157/165 | 1+2     |
|                                   | 11ac 40MHz  | MCS2/Nss1 | 151/159     | 1+2     |
|                                   | 11ac 80MHz  | MCS2/Nss1 | 155         | 1+2     |
|                                   | 11a/BPSK    | 6 Mbps    | 149/157/165 | 1+2     |

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Normal Link - EUT with AC Adapter 1

Mode 2. Normal Link - EUT with AC Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission 30MHz~1GHz test :**

Mode 1. Normal Link - Stand of EUT with AC Adapter 1

Mode 2. Normal Link - Laying of EUT with AC Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Normal Link - Stand of EUT with AC Adapter 2

Mode 3 is the worst case, so it was selected to record in this test report.

**For Radiated Emission above 1GHz test:**

Mode 1. CTX - Stand of EUT

Mode 2. CTX - Laying of EUT

Mode 1 is the worst case, so it was selected to record in this test report.

**For MPE and Co-location Test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

Note1: The test result of beam-forming mode is worse case than non beam-forming mode, so it is recorded in the test report for 802.11ac.

### 3.7. Table for Testing Locations

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. |
|---------------|---------------|----------|--------------|-------------|
| 03CH01-CB     | SAC           | Hsin Chu | 262045       | IC 4086D    |
| CO01-CB       | Conduction    | Hsin Chu | 262045       | IC 4086D    |
| TH01-CB       | OVEN Room     | Hsin Chu | -            | -           |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC). Please refer section 6 for Test Site Address.

### 3.8. Table for Supporting Units

For Test Site No: CO01-CB

| Support Unit | Brand     | Model       | FCC ID           |
|--------------|-----------|-------------|------------------|
| Notebook     | DELL      | E6430       | QDS-BRCM1049LE   |
| Notebook     | DELL      | E6430       | QDS-BRCM1049LE   |
| Notebook     | DELL      | E6430       | QDS-BRCM1049LE   |
| AP Router    | Planex    | GW-AP54SGX  | KA220030603014-1 |
| Flash Disk   | Transcend | 604108 8255 | DoC              |

For Test Site No: 03CH01-CB

(Radiated Emission 30MHz~1GHz test)

| Support Unit   | Brand   | Model   | FCC ID         |
|----------------|---------|---------|----------------|
| Notebook       | DELL    | M1340   | E2K4965AGNM    |
| Notebook       | DELL    | E6430   | QDS-BRCM1049LE |
| Notebook       | DELL    | D420    | E2KWM3945ABG   |
| Wireless ac AP | Netgear | R6300V2 | PY31300227     |
| USB HDD        | CM      | 4911B   | N/A            |

For Test Site No: 03CH01-CB

(Radiated Emission above 1GHz test) (For Non-Beamforming Mode)

| Support Unit | Brand | Model | FCC ID      |
|--------------|-------|-------|-------------|
| Notebook     | DELL  | M1340 | E2K4965AGNM |

For Test Site No: 03CH01-CB

(Radiated Emission above 1GHz test) (For Beamforming Mode)

| Support Unit   | Brand   | Model   | FCC ID         |
|----------------|---------|---------|----------------|
| Notebook       | DELL    | E6430   | QDS-BRCM1049LE |
| Notebook       | DELL    | D420    | E2KWM3945ABG   |
| Wireless ac AP | Netgear | R6300V2 | PY31300227     |
| WLAN ac Dongle | Netgear | A6200   | PY31220200     |

For Test Site No: TH01-CB

| Support Unit | Brand | Model | FCC ID         |
|--------------|-------|-------|----------------|
| Notebook     | DELL  | E6430 | QDS-BRCM1049LE |

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For non-beamforming mode:

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |          |
|-----------------------|-------------------------------|----------|----------|
| Frequency             | 2412 MHz                      | 2437 MHz | 2462 MHz |
| MCS0 20MHz            | 75                            | 100      | 82       |

Power Parameters of IEEE 802.11n MCS0 40MHz

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |          |
|-----------------------|-------------------------------|----------|----------|
| Frequency             | 2422 MHz                      | 2437 MHz | 2452 MHz |
| MCS0 40MHz            | 69                            | 82       | 70       |

Power Parameters of IEEE 802.11b/g

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |          |
|-----------------------|-------------------------------|----------|----------|
| Frequency             | 2412 MHz                      | 2437 MHz | 2462 MHz |
| IEEE 802.11b          | 86                            | 97       | 90       |
| IEEE 802.11g          | 73                            | 100      | 82       |

For non-beamforming mode:

For 5GHz Band

Power Parameters of IEEE 802.11n MCS0 20MHz

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |          |
|-----------------------|-------------------------------|----------|----------|
| Frequency             | 5745 MHz                      | 5785 MHz | 5825 MHz |
| MCS0 20MHz            | 99                            | 99       | 99       |

Power Parameters of IEEE 802.11n MCS0 40MHz

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |
|-----------------------|-------------------------------|----------|
| Frequency             | 5755 MHz                      | 5795 MHz |
| MCS0 40MHz            | 95                            | 100      |

Power Parameters of IEEE 802.11a

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |          |
|-----------------------|-------------------------------|----------|----------|
| Frequency             | 5745 MHz                      | 5785 MHz | 5825 MHz |
| IEEE 802.11a          | 99                            | 99       | 94       |

For beamforming mode:

For 5GHz Band

Power Parameters of IEEE 802.11ac MCS2/Nss1 20MHz

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |          |
|-----------------------|-------------------------------|----------|----------|
| Frequency             | 5745 MHz                      | 5785 MHz | 5825 MHz |
| MCS2/Nss1 20MHz       | 96                            | 94       | 94       |

Power Parameters of IEEE 802.11ac MCS2/Nss1 40MHz

| Test Software Version | Manual Tool Version : 2.0.1.0 |          |
|-----------------------|-------------------------------|----------|
| Frequency             | 5755 MHz                      | 5795 MHz |
| MCS2/Nss1 40MHz       | 97                            | 95       |

Power Parameters of IEEE 802.11ac MCS2/Nss1 80MHz

| Test Software Version | Manual Tool Version : 2.0.1.0 |
|-----------------------|-------------------------------|
| Frequency             | 5775 MHz                      |
| MCS2/Nss1 80MHz       | 90                            |

### 3.10. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:


1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac dongle and transmit duty cycle no less 98%

### 3.11. Duty Cycle

For non-beamforming mode:


For 2.4GHz Band:

IEEE 802.11n MCS0 20MHz

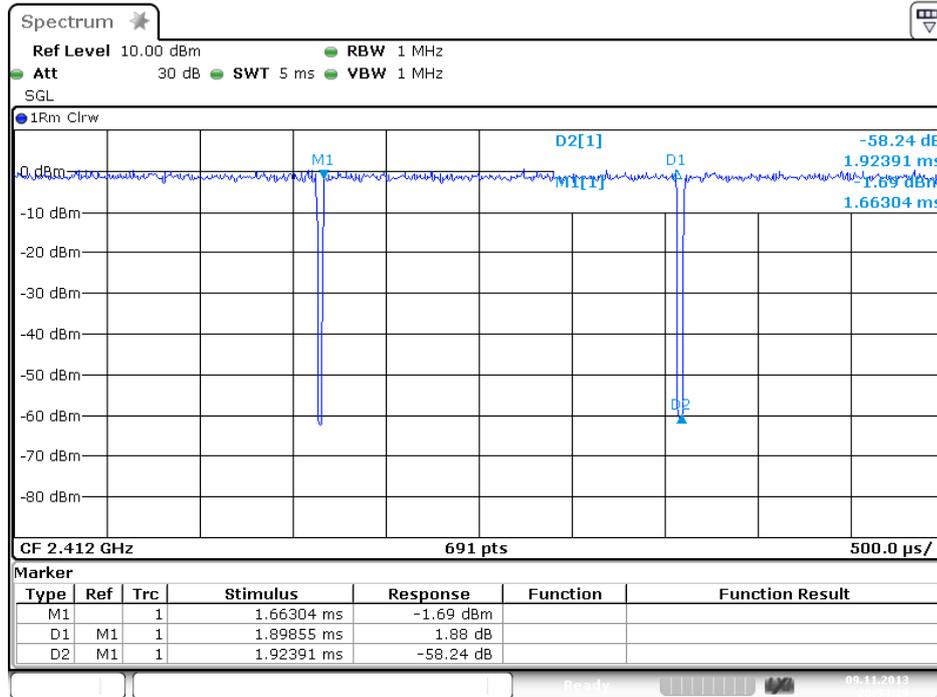


Date: 9.NOV.2013 20:34:29

IEEE 802.11n MCS0 40MHz

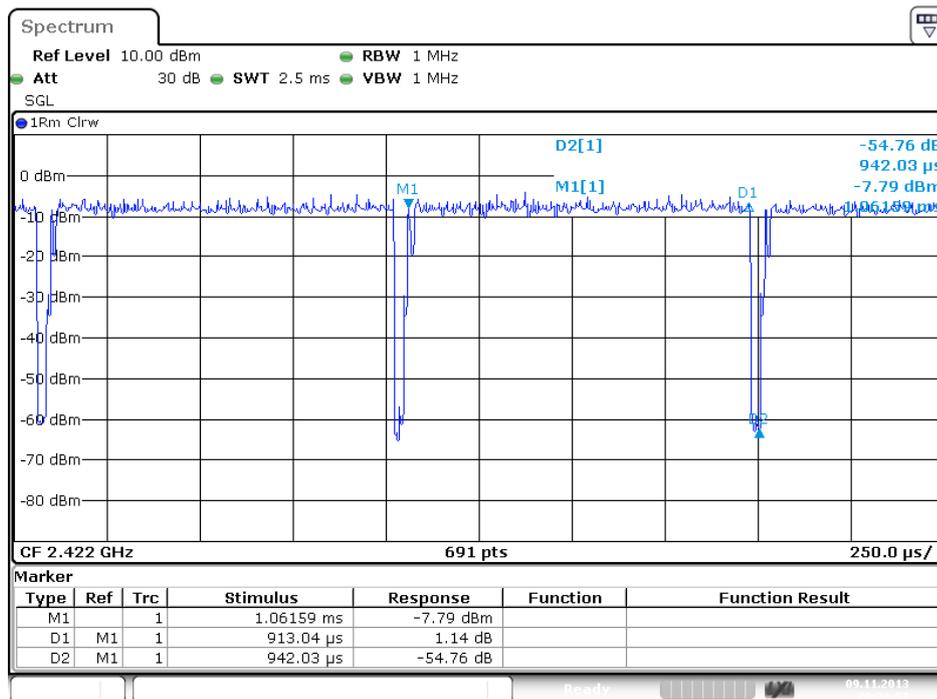


Date: 9.NOV.2013 20:32:57

IEEE 802.11b

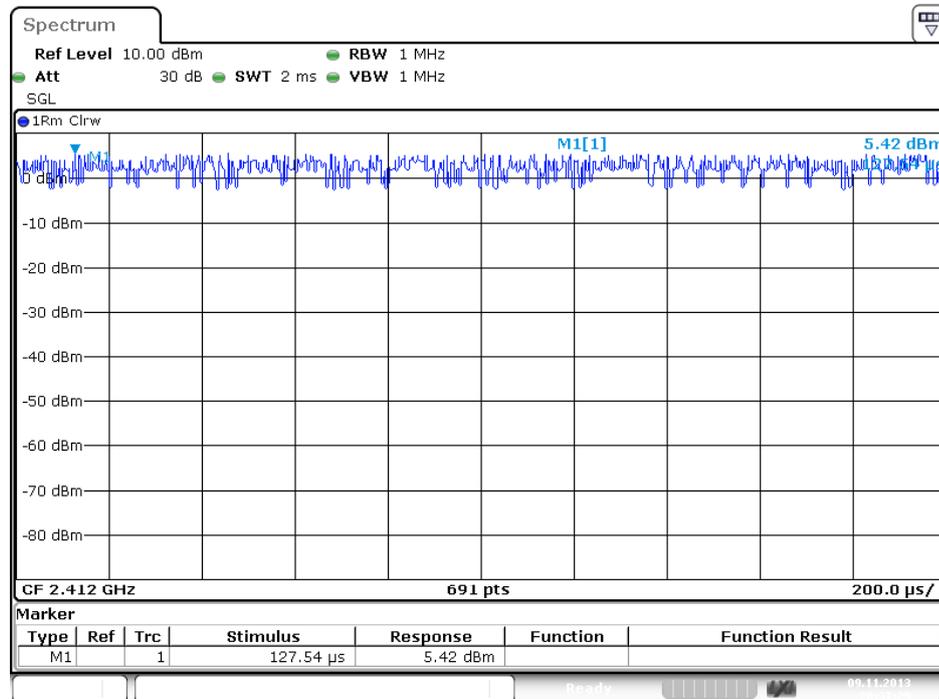

Date: 9.NOV.2013 20:37:30

IEEE 802.11g

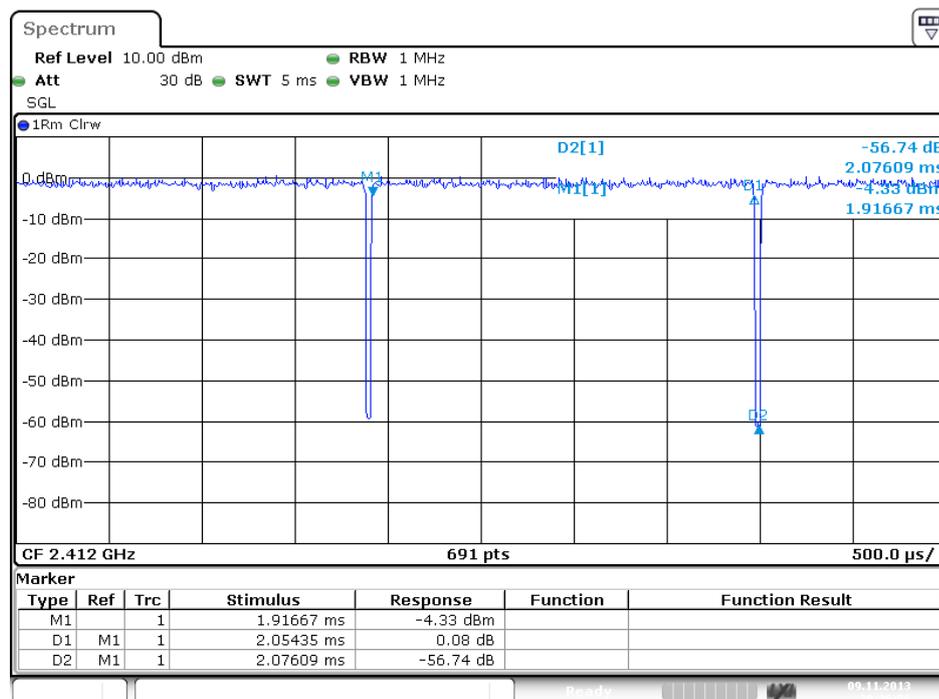


Date: 9.NOV.2013 20:36:07

For non-beamforming mode:


For 5GHz Band:

IEEE 802.11n MCS0 20MHz

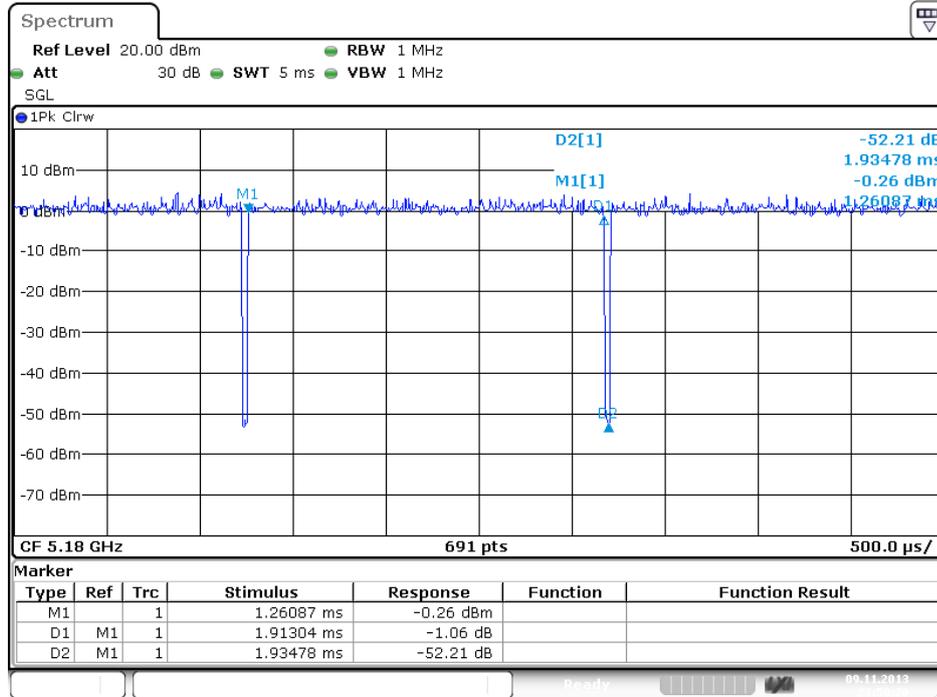


Date: 9.NOV.2013 23:50:20

IEEE 802.11n MCS0 40MHz

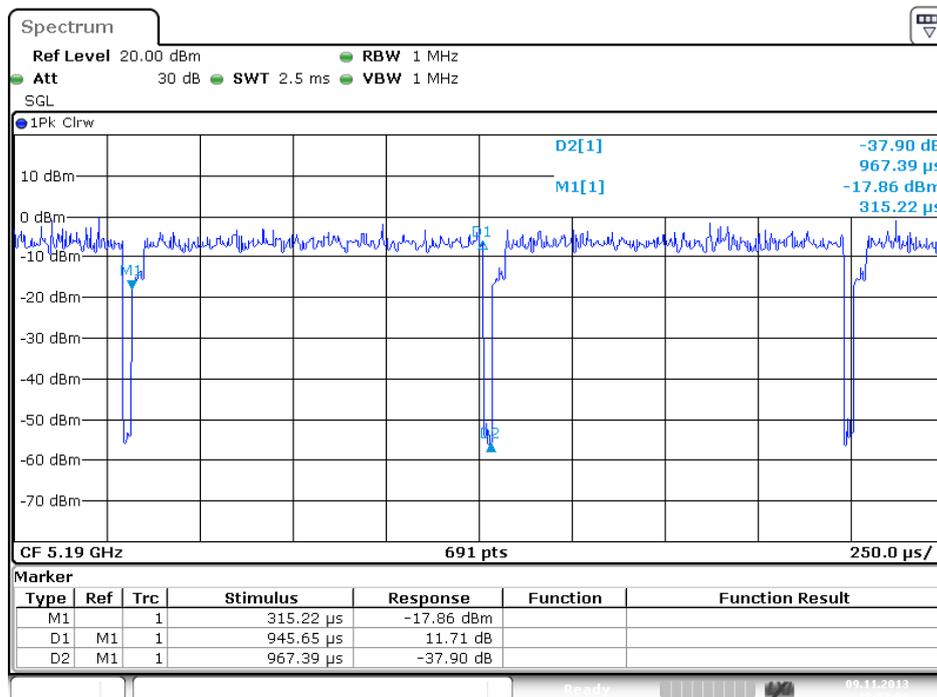

Date: 9.NOV.2013 23:53:08

IEEE 802.11a

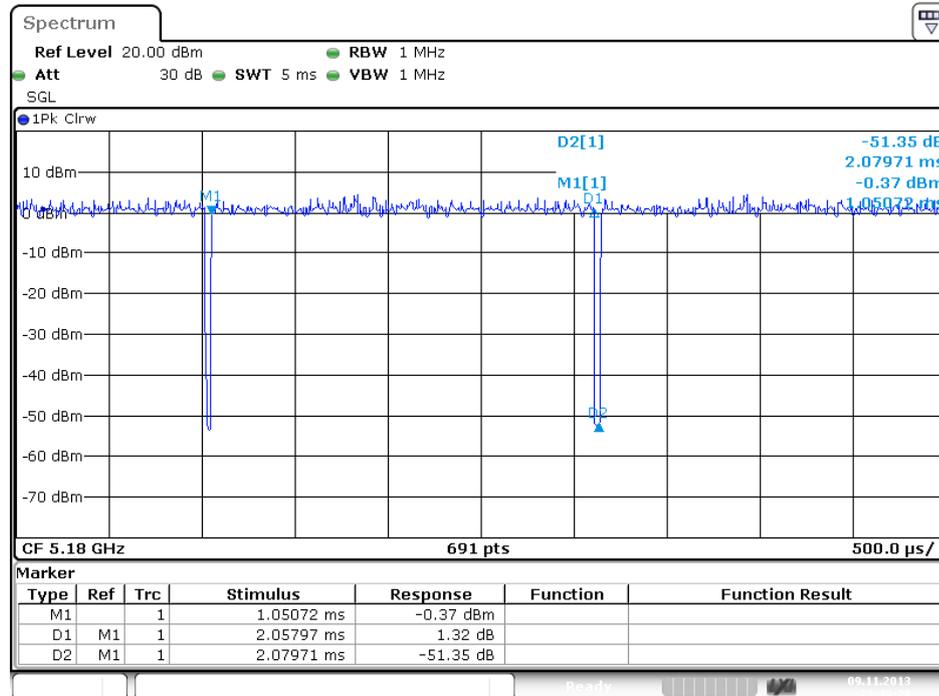


Date: 9.NOV.2013 23:49:28

For beamforming mode:


For 5GHz Band:

IEEE 802.11ac MCS2/Nss1 20MHz

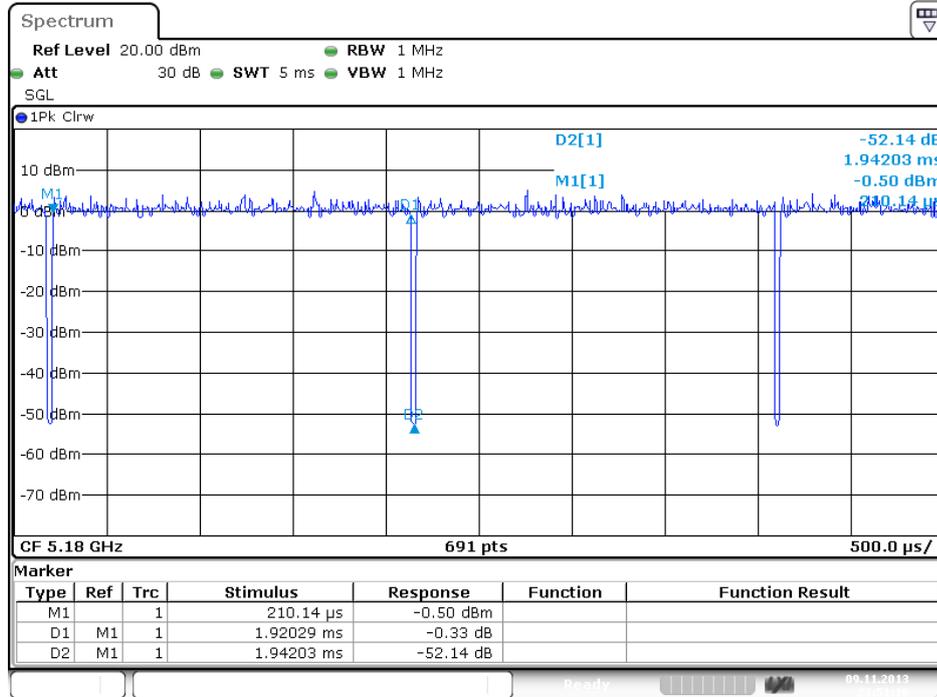


Date: 9.NOV.2013 23:51:16

IEEE 802.11ac MCS2/Nss1 40MHz

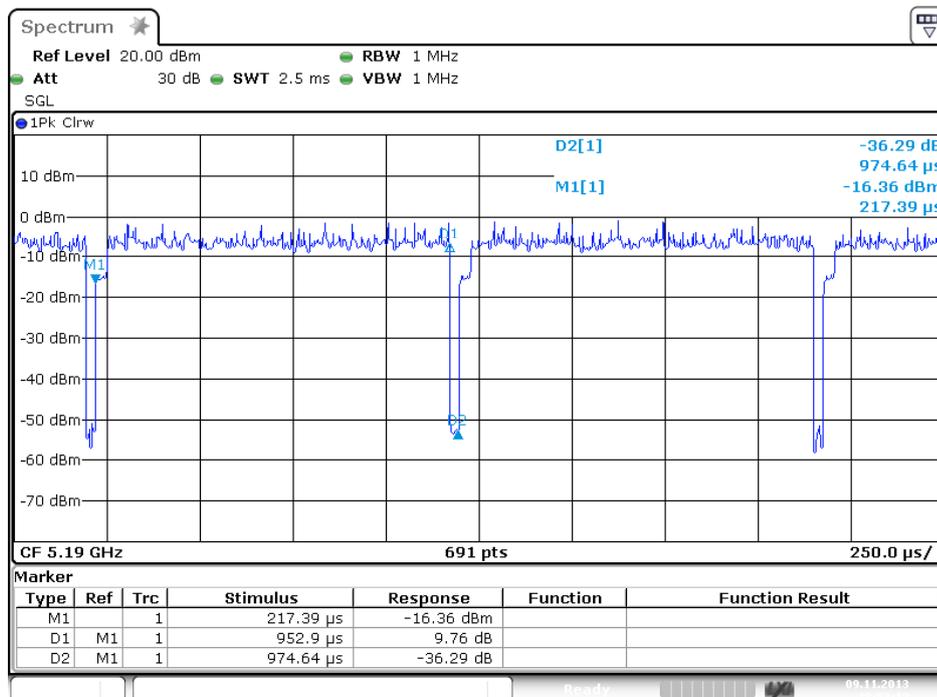

Date: 9.NOV.2013 23:52:12

IEEE 802.11ac MCS2/Nss1 80MHz

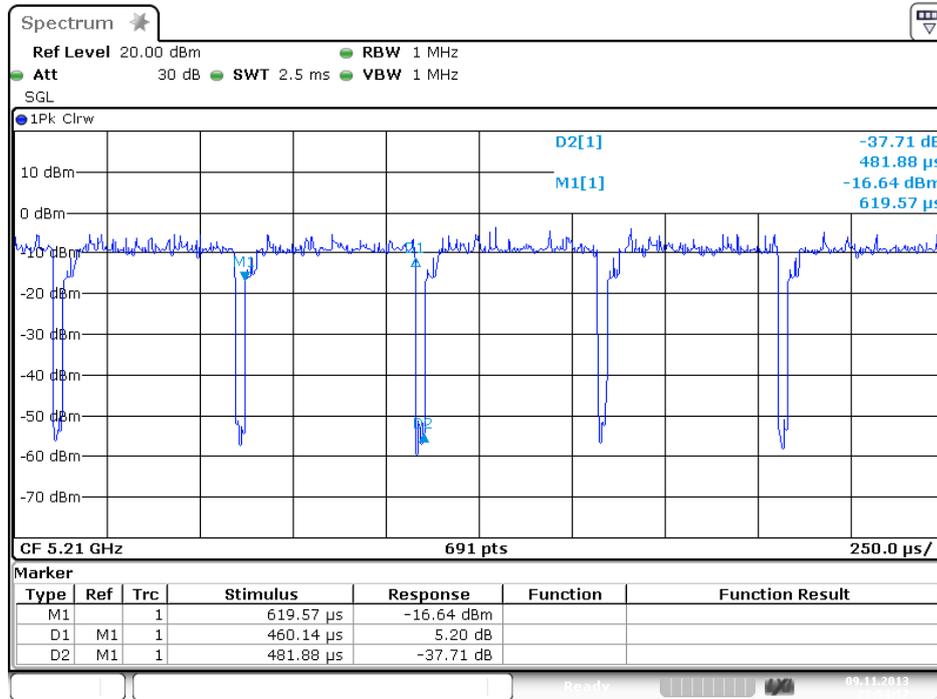


Date: 9.NOV.2013 23:54:18

### 3.12. Test Configurations

#### 3.12.1. AC Power Line Conduction Emissions Test Configuration


Test Mode: Mode 2

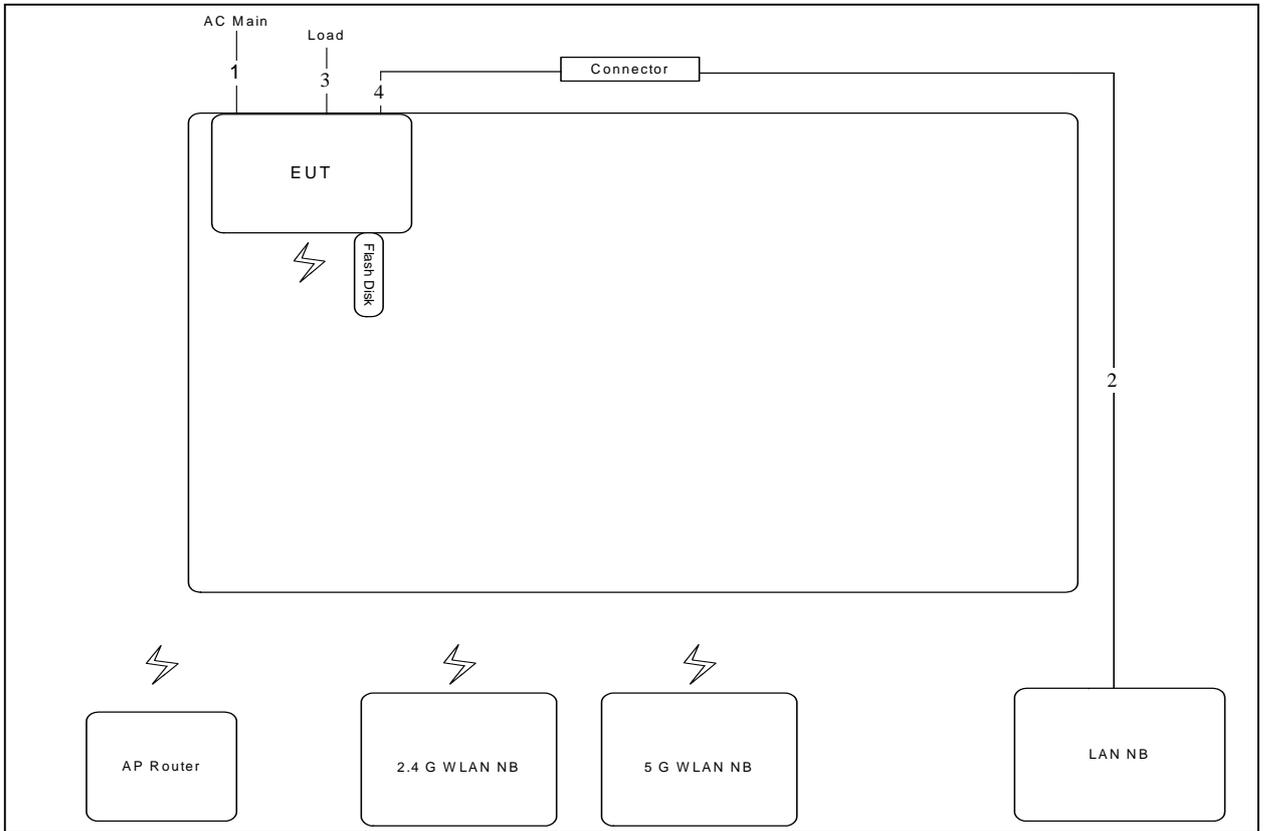

| Item | Connection    | Shielded | Length(m) |
|------|---------------|----------|-----------|
| 1    | Power cable   | No       | 1.8m      |
| 2    | RJ-45 cable   | Yes      | 10m       |
| 3    | RJ-45 cable*4 | No       | 3m        |
| 4    | RJ-45 cable   | Yes      | 1.5m      |

### 3.12.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz / Test Mode: Mode 3

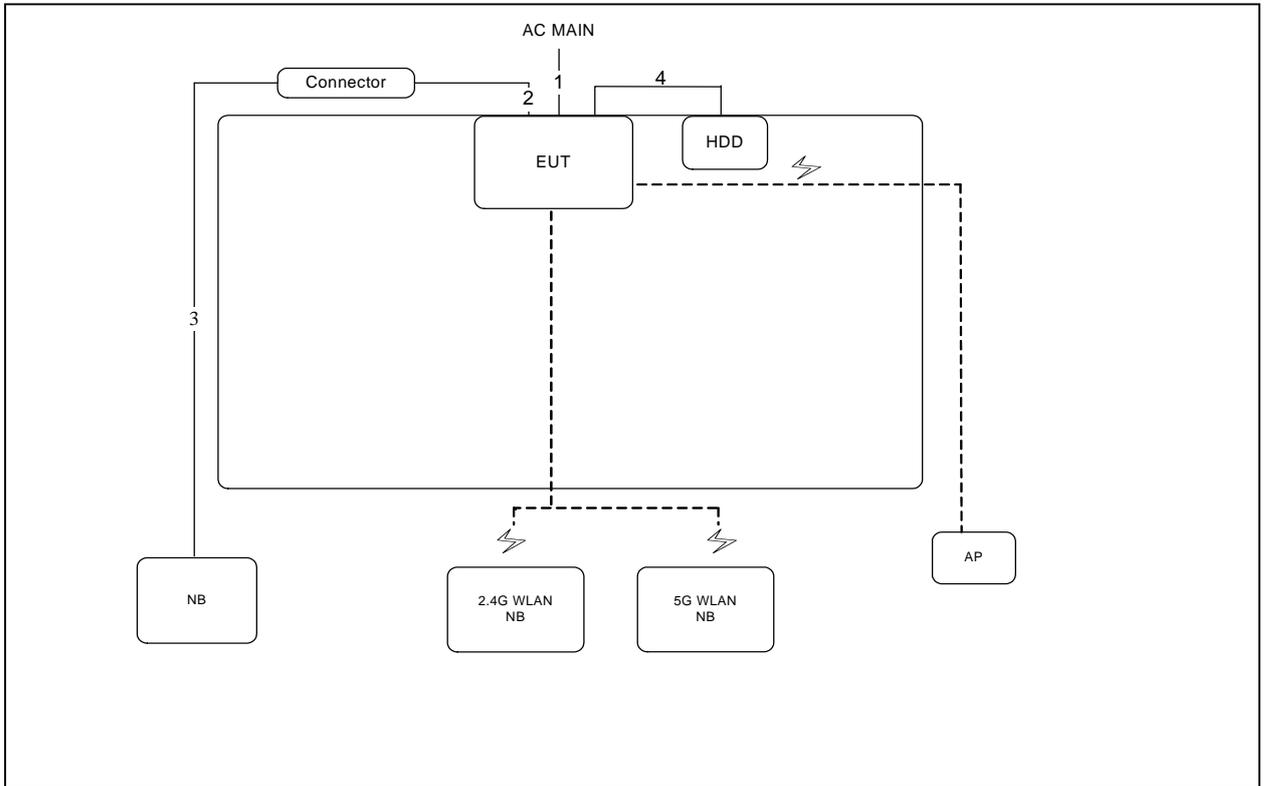

| Item | Connection  | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1    | Power cable | No       | 1.8m      |
| 2    | RJ-45 cable | Yes      | 1.5m      |
| 3    | RJ-45 cable | No       | 10m       |
| 4    | USB cable   | No       | 0.5m      |

For Non-Beamforming Mode


Test Configuration: above 1GHz / Test Mode: Mode 1

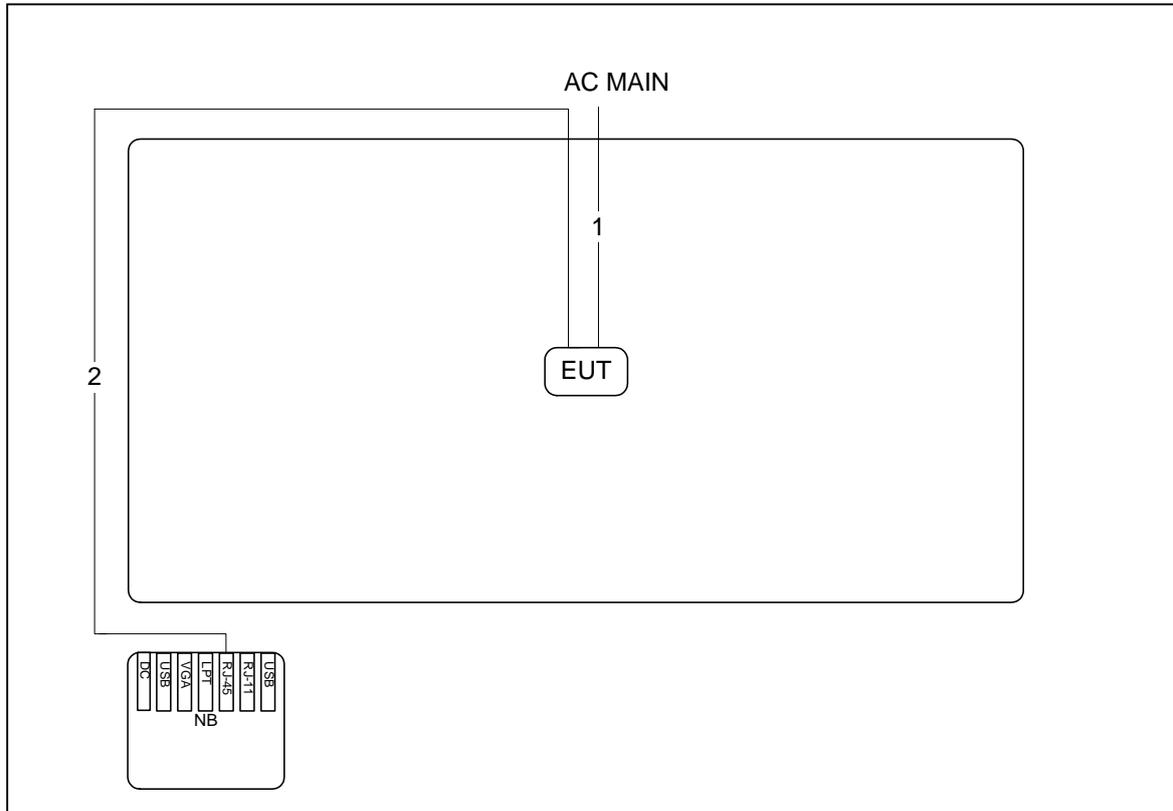

| Item | Connection  | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1    | Power cable | No       | 1.8m      |
| 2    | RJ-45 cable | No       | 10m       |

For Beamforming Mode

Test Configuration: above 1GHz / Test Mode: Mode 1

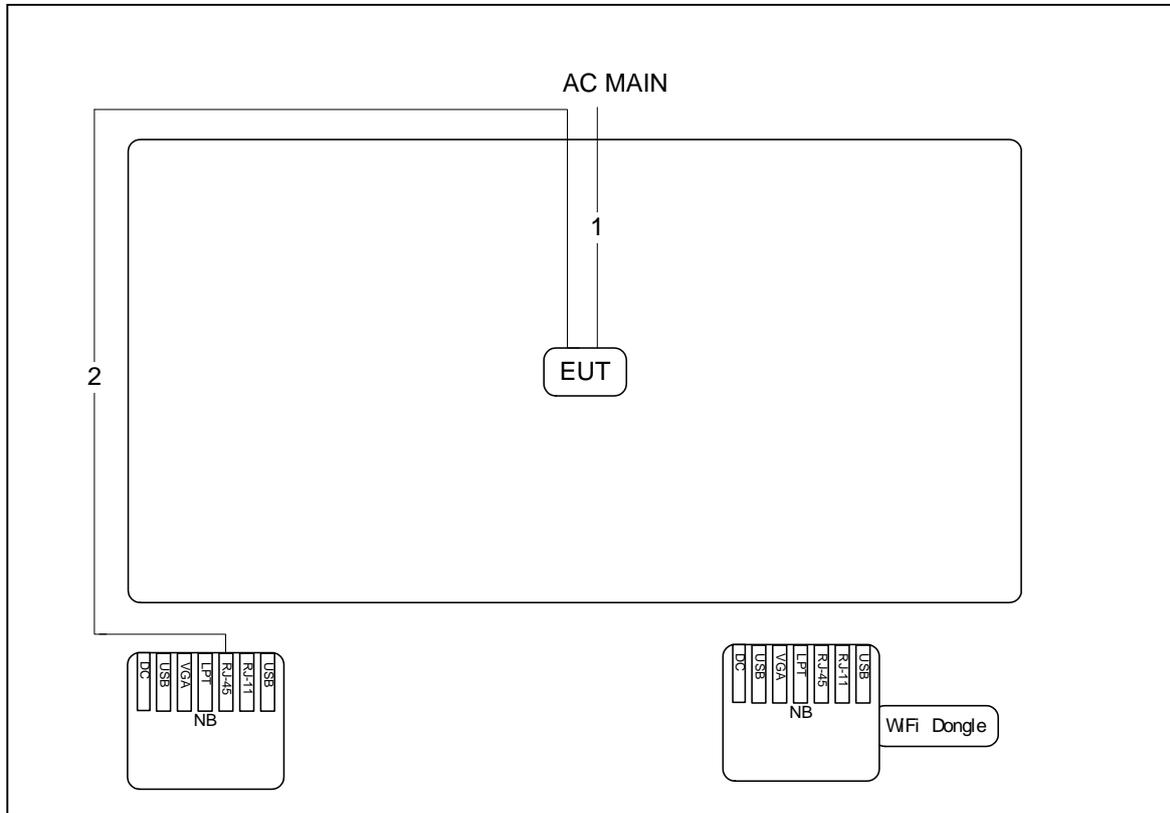

| Item | Connection  | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1    | Power cable | No       | 1.8m      |
| 2    | RJ-45 cable | No       | 10m       |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |             |           |        |
|---------------|-------------|-----------|--------|
| Temperature   | 24°C        | Humidity  | 53%    |
| Test Engineer | Parody Lin  | Phase     | Line   |
| Configuration | Normal Link | Test Mode | Mode 2 |

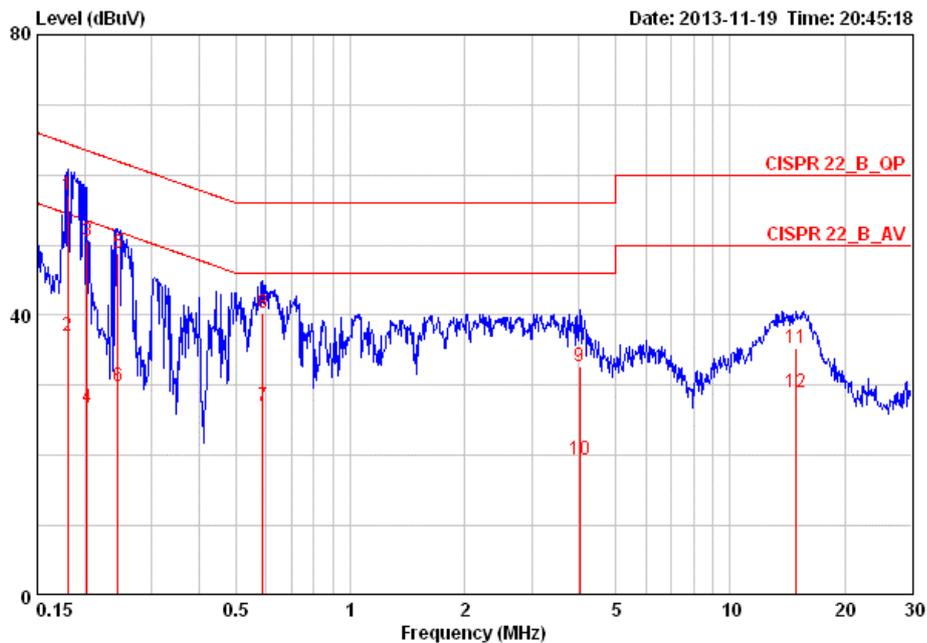

|     | Freq    | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|-----|---------|-------|------------|------------|------------|-------------|------------|---------|
|     | MHz     | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1 @ | 0.18056 | 57.17 | -7.29      | 64.46      | 56.83      | 0.15        | 0.19       | QP      |
| 2   | 0.18056 | 36.95 | -17.51     | 54.46      | 36.61      | 0.15        | 0.19       | AVERAGE |
| 3 @ | 0.20289 | 50.48 | -13.01     | 63.49      | 50.13      | 0.15        | 0.20       | QP      |
| 4   | 0.20289 | 26.92 | -26.57     | 53.49      | 26.57      | 0.15        | 0.20       | AVERAGE |
| 5 @ | 0.24422 | 48.92 | -13.03     | 61.95      | 48.57      | 0.15        | 0.20       | QP      |
| 6   | 0.24422 | 29.97 | -21.98     | 51.95      | 29.62      | 0.15        | 0.20       | AVERAGE |
| 7   | 0.58851 | 26.98 | -19.02     | 46.00      | 26.63      | 0.15        | 0.20       | AVERAGE |
| 8 @ | 0.58851 | 40.36 | -15.64     | 56.00      | 40.01      | 0.15        | 0.20       | QP      |
| 9   | 4.006   | 32.75 | -23.25     | 56.00      | 32.17      | 0.28        | 0.30       | QP      |
| 10  | 4.006   | 19.42 | -26.58     | 46.00      | 18.84      | 0.28        | 0.30       | AVERAGE |
| 11  | 14.907  | 35.33 | -24.67     | 60.00      | 34.44      | 0.48        | 0.41       | QP      |
| 12  | 14.907  | 29.06 | -20.94     | 50.00      | 28.17      | 0.48        | 0.41       | AVERAGE |

|               |             |           |         |
|---------------|-------------|-----------|---------|
| Temperature   | 24°C        | Humidity  | 53%     |
| Test Engineer | Parody Lin  | Phase     | Neutral |
| Configuration | Normal Link | Test Mode | Mode 2  |

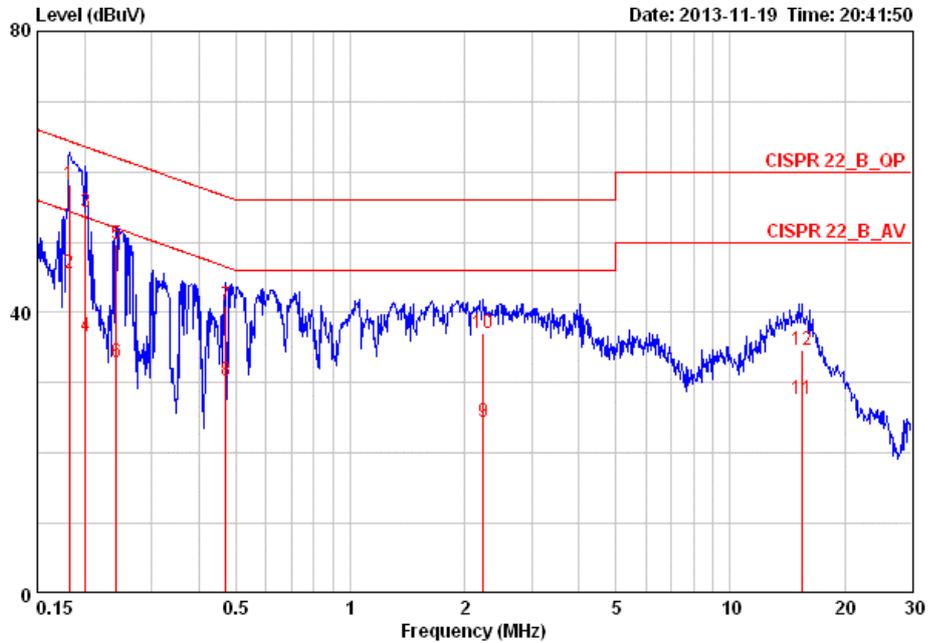

|    | Freq    | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|---------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz     | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.18249 | 58.27 | -6.10      | 64.37      | 58.01      | 0.07        | 0.19       | QP      |
| 2  | 0.18249 | 45.52 | -8.85      | 54.37      | 45.26      | 0.07        | 0.19       | AVERAGE |
| 3  | 0.20075 | 54.19 | -9.39      | 63.58      | 53.92      | 0.07        | 0.20       | QP      |
| 4  | 0.20075 | 36.63 | -16.95     | 53.58      | 36.36      | 0.07        | 0.20       | AVERAGE |
| 5  | 0.24165 | 49.68 | -12.36     | 62.04      | 49.41      | 0.07        | 0.20       | QP      |
| 6  | 0.24165 | 32.97 | -19.07     | 52.04      | 32.70      | 0.07        | 0.20       | AVERAGE |
| 7  | 0.47110 | 41.05 | -15.44     | 56.49      | 40.78      | 0.07        | 0.20       | QP      |
| 8  | 0.47110 | 30.36 | -16.13     | 46.49      | 30.09      | 0.07        | 0.20       | AVERAGE |
| 9  | 2.237   | 24.42 | -21.58     | 46.00      | 24.07      | 0.11        | 0.24       | AVERAGE |
| 10 | 2.237   | 37.02 | -18.98     | 56.00      | 36.67      | 0.11        | 0.24       | QP      |
| 11 | 15.388  | 27.68 | -22.32     | 50.00      | 26.91      | 0.37        | 0.41       | AVERAGE |
| 12 | 15.388  | 34.76 | -25.24     | 60.00      | 33.99      | 0.37        | 0.41       | QP      |

Note:

$$\text{Level} = \text{Read Level} + \text{LISN Factor} + \text{Cable Loss}$$

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|---------|
| Detector              | Average |

### 4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

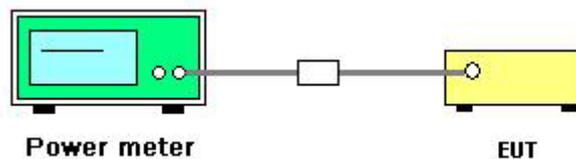

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

|               |               |                |                  |
|---------------|---------------|----------------|------------------|
| Temperature   | 20°C          | Humidity       | 63%              |
| Test Engineer | Benson Peng   | Configurations | IEEE 802.11b/g/n |
| Test Date     | Nov. 18, 2013 |                |                  |

For non-beamforming mode:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 1       | 2412 MHz  | 19.24                 | 19.92  | 22.60 | 30.00            | Complies |
| 6       | 2437 MHz  | 24.52                 | 24.27  | 27.41 | 30.00            | Complies |
| 11      | 2462 MHz  | 20.36                 | 20.23  | 23.31 | 30.00            | Complies |

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 3       | 2422 MHz  | 17.18                 | 17.01  | 20.11 | 30.00            | Complies |
| 6       | 2437 MHz  | 19.84                 | 19.93  | 22.90 | 30.00            | Complies |
| 9       | 2452 MHz  | 17.41                 | 17.04  | 20.24 | 30.00            | Complies |

Configuration IEEE 802.11b / Ant. 1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 21.68                 | 30.00            | Complies |
| 6       | 2437 MHz  | 23.94                 | 30.00            | Complies |
| 11      | 2462 MHz  | 22.38                 | 30.00            | Complies |

Configuration IEEE 802.11g / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 1       | 2412 MHz  | 18.76                 | 18.51  | 21.65 | 30.00            | Complies |
| 6       | 2437 MHz  | 24.54                 | 24.19  | 27.38 | 30.00            | Complies |
| 11      | 2462 MHz  | 20.41                 | 19.91  | 23.18 | 30.00            | Complies |

|               |               |                |                |
|---------------|---------------|----------------|----------------|
| Temperature   | 20°C          | Humidity       | 63%            |
| Test Engineer | Benson Peng   | Configurations | IEEE 802.11n/a |
| Test Date     | Nov. 18, 2013 |                |                |

For non-beamforming mode:

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 149     | 5745 MHz  | 26.99                 | 26.39  | 29.71 | 30.00            | Complies |
| 157     | 5785 MHz  | 26.98                 | 26.41  | 29.71 | 30.00            | Complies |
| 165     | 5825 MHz  | 27.01                 | 26.35  | 29.70 | 30.00            | Complies |

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 151     | 5755 MHz  | 25.68                 | 25.15  | 28.43 | 30.00            | Complies |
| 159     | 5795 MHz  | 27.25                 | 26.51  | 29.91 | 30.00            | Complies |

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 149     | 5745 MHz  | 26.98                 | 26.37  | 29.70 | 30.00            | Complies |
| 157     | 5785 MHz  | 26.99                 | 26.38  | 29.71 | 30.00            | Complies |
| 165     | 5825 MHz  | 25.61                 | 25.12  | 28.38 | 30.00            | Complies |

|               |               |                |               |
|---------------|---------------|----------------|---------------|
| Temperature   | 20°C          | Humidity       | 63%           |
| Test Engineer | Benson Peng   | Configurations | IEEE 802.11ac |
| Test Date     | Nov. 18, 2013 |                |               |

For beamforming mode:

For 5GHz Band

Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 149     | 5745 MHz  | 25.95                 | 25.53  | 28.76 | 28.84            | Complies |
| 157     | 5785 MHz  | 25.51                 | 25.12  | 28.33 | 28.44            | Complies |
| 165     | 5825 MHz  | 25.47                 | 25.08  | 28.29 | 28.44            | Complies |

Note: Directional gain:

$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.16\text{dBi} > 6\text{dBi}$ , So Conducted Output Power Limit =  $30 - (7.16 - 6) = 28.84\text{dBm}$

$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}$ , So Conducted Output Power Limit =  $30 - (7.56 - 6) = 28.44\text{dBm}$

$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}$ , So Conducted Output Power Limit =  $30 - (7.56 - 6) = 28.44\text{dBm}$

Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 151     | 5755 MHz  | 26.05                 | 25.55  | 28.82 | 28.84            | Complies |
| 159     | 5795 MHz  | 25.49                 | 25.01  | 28.27 | 28.44            | Complies |

Note: Directional gain:

$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.16\text{dBi} > 6\text{dBi}$ , So Conducted Output Power Limit =  $30 - (7.16 - 6) = 28.84\text{dBm}$

$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}$ , So Conducted Output Power Limit =  $30 - (7.56 - 6) = 28.44\text{dBm}$

Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|--------|-------|------------------|----------|
|         |           | Ant. 1                | Ant. 2 | Total |                  |          |
| 155     | 5775 MHz  | 23.61                 | 22.92  | 26.29 | 28.44            | Complies |

Note: Directional gain:

$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}$ , So Conducted Output Power Limit =  $30 - (7.56 - 6) = 28.44\text{dBm}$

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Set the span to 1.5 times the DTS channel bandwidth. |
| RBW                | $3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$   |
| VBW                | $\geq 3 \times \text{RBW}$                           |
| Detector           | Peak   |
| Trace              | Max Hold   |
| Sweep Time         | Auto couple  |

#### 4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

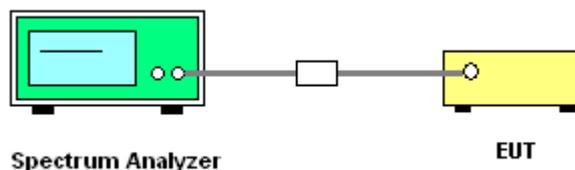

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

|               |             |                |                  |
|---------------|-------------|----------------|------------------|
| Temperature   | 20°C        | Humidity       | 63%              |
| Test Engineer | Benson Peng | Configurations | IEEE 802.11b/g/n |

For non-beamforming mode:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 1       | 2412 MHz  | -7.00                    | -7.45  | -4.21 | 8.00                           | Complies |
| 6       | 2437 MHz  | -1.82                    | -2.29  | 0.96  | 8.00                           | Complies |
| 11      | 2462 MHz  | -6.47                    | -6.35  | -3.40 | 8.00                           | Complies |

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 3       | 2422 MHz  | -11.53                   | -11.51 | -8.51 | 8.00                           | Complies |
| 6       | 2437 MHz  | -9.36                    | -9.29  | -6.31 | 8.00                           | Complies |
| 9       | 2452 MHz  | -11.32                   | -11.53 | -8.41 | 8.00                           | Complies |

Configuration IEEE 802.11b / Ant. 1

| Channel | Frequency | Power Density (dBm/3kHz) | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------------------------------|----------|
| 1       | 2412 MHz  | -1.05                    | 8.00                           | Complies |
| 6       | 2437 MHz  | 1.54                     | 8.00                           | Complies |
| 11      | 2462 MHz  | -0.36                    | 8.00                           | Complies |

Configuration IEEE 802.11g / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 1       | 2412 MHz  | -7.64                    | -7.79  | -4.70 | 8.00                           | Complies |
| 6       | 2437 MHz  | -1.86                    | -2.04  | 1.06  | 8.00                           | Complies |
| 11      | 2462 MHz  | -5.57                    | -5.70  | -2.62 | 8.00                           | Complies |

|               |             |                |                |
|---------------|-------------|----------------|----------------|
| Temperature   | 20°C        | Humidity       | 63%            |
| Test Engineer | Benson Peng | Configurations | IEEE 802.11n/a |

For non-beamforming mode:

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 149     | 5745 MHz  | 1.44                     | 0.87   | 4.17  | 8.00                           | Complies |
| 157     | 5785 MHz  | 1.47                     | 0.62   | 4.08  | 8.00                           | Complies |
| 165     | 5825 MHz  | 1.43                     | 0.98   | 4.22  | 8.00                           | Complies |

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 151     | 5755 MHz  | -2.43                    | -3.05  | 0.28  | 8.00                           | Complies |
| 159     | 5795 MHz  | -0.94                    | -1.18  | 1.95  | 8.00                           | Complies |

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 149     | 5745 MHz  | 1.95                     | 1.36   | 4.68  | 8.00                           | Complies |
| 157     | 5785 MHz  | 1.11                     | 0.72   | 3.93  | 8.00                           | Complies |
| 165     | 5825 MHz  | 0.66                     | -0.19  | 3.27  | 8.00                           | Complies |

|               |             |                |               |
|---------------|-------------|----------------|---------------|
| Temperature   | 20°C        | Humidity       | 63%           |
| Test Engineer | Benson Peng | Configurations | IEEE 802.11ac |

For beamforming mode:

For 5GHz Band

Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 149     | 5745 MHz  | -0.20                    | -0.69  | 2.57  | 6.84                           | Complies |
| 157     | 5785 MHz  | -0.79                    | -1.28  | 1.98  | 6.44                           | Complies |
| 165     | 5825 MHz  | -0.35                    | -0.86  | 2.41  | 6.44                           | Complies |

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.16\text{dBi} > 6\text{dBi}, \text{ So Power Density Limit} = 8 - (7.16 - 6) = 6.84\text{dBm}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}, \text{ So Power Density Limit} = 8 - (7.56 - 6) = 6.44\text{dBm}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}, \text{ So Power Density Limit} = 8 - (7.56 - 6) = 6.44\text{dBm}$$

Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 151     | 5755 MHz  | -2.00                    | -2.73  | 0.66  | 6.84                           | Complies |
| 159     | 5795 MHz  | -2.59                    | -3.22  | 0.12  | 6.44                           | Complies |

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.16\text{dBi} > 6\text{dBi}, \text{ So Power Density Limit} = 8 - (7.16 - 6) = 6.84\text{dBm}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}, \text{ So Power Density Limit} = 8 - (7.56 - 6) = 6.44\text{dBm}$$

Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant. 1 + Ant. 2

| Channel | Frequency | Power Density (dBm/3kHz) |        |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|-------|--------------------------------|----------|
|         |           | Ant. 1                   | Ant. 2 | Total |                                |          |
| 155     | 5775 MHz  | -6.52                    | -7.22  | -3.85 | 6.44                           | Complies |

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.56\text{dBi} > 6\text{dBi}, \text{ So Power Density Limit} = 8 - (7.56 - 6) = 6.44\text{dBm}$$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

For non-beamforming mode:


For 2.4GHz Band:

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Ant. 1

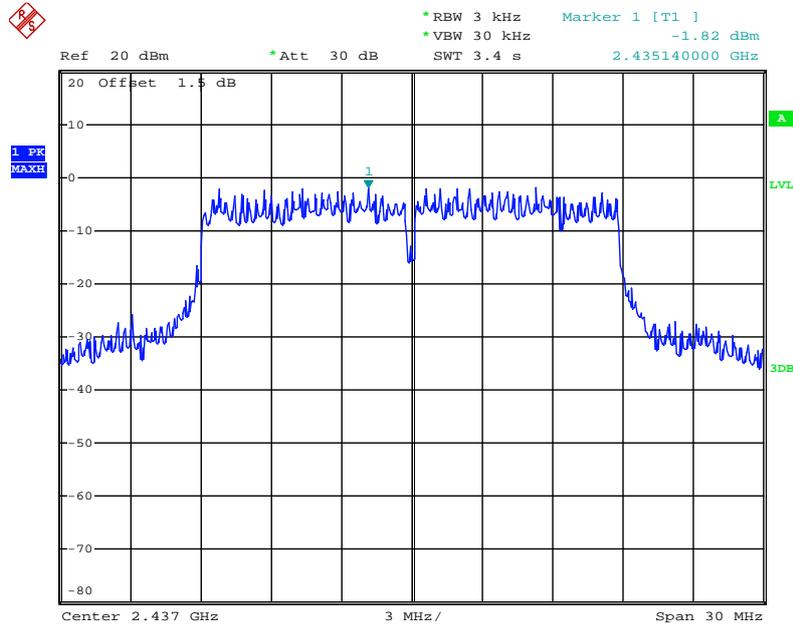


Date: 18.NOV.2013 18:45:28

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Ant. 2

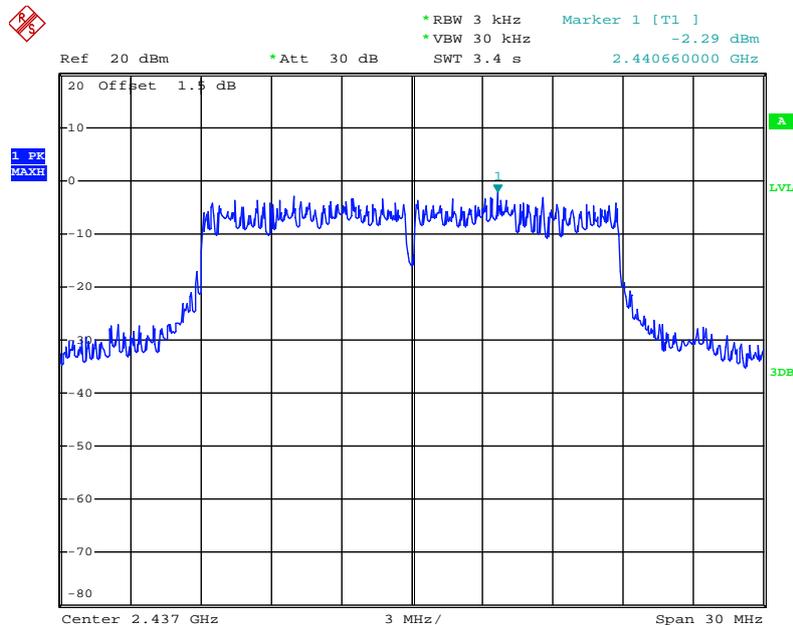


Date: 18.NOV.2013 18:46:28

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Ant. 1**

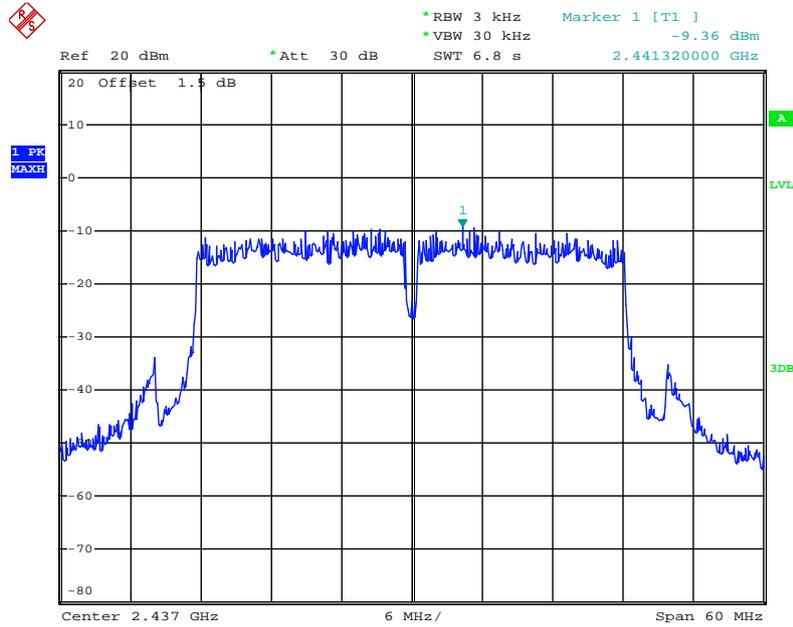


Date: 18.NOV.2013 18:51:17

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Ant. 2**

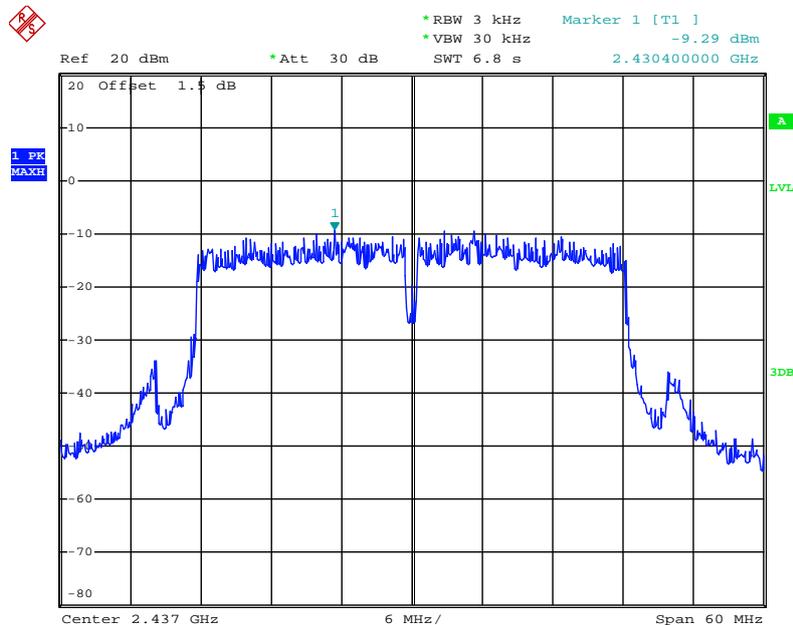


Date: 18.NOV.2013 18:51:59

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1**

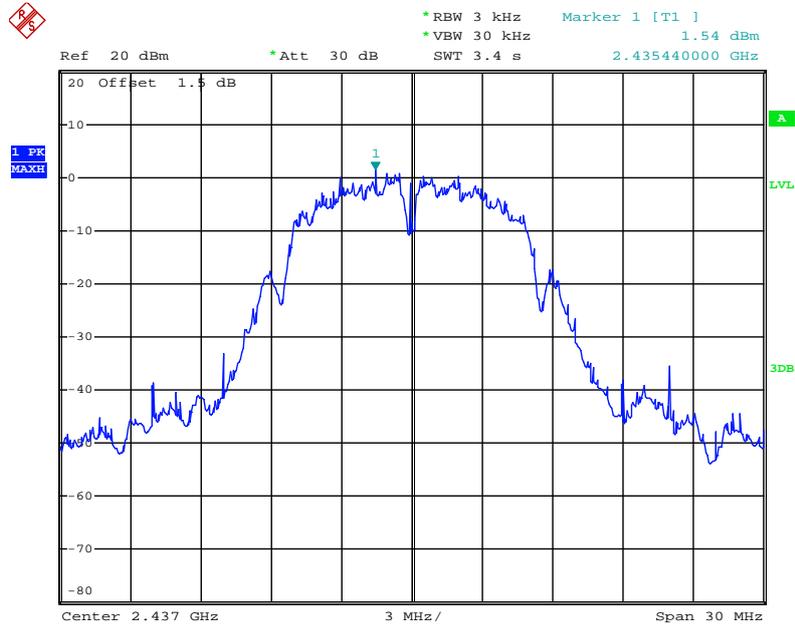


Date: 18.NOV.2013 18:38:14

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1**

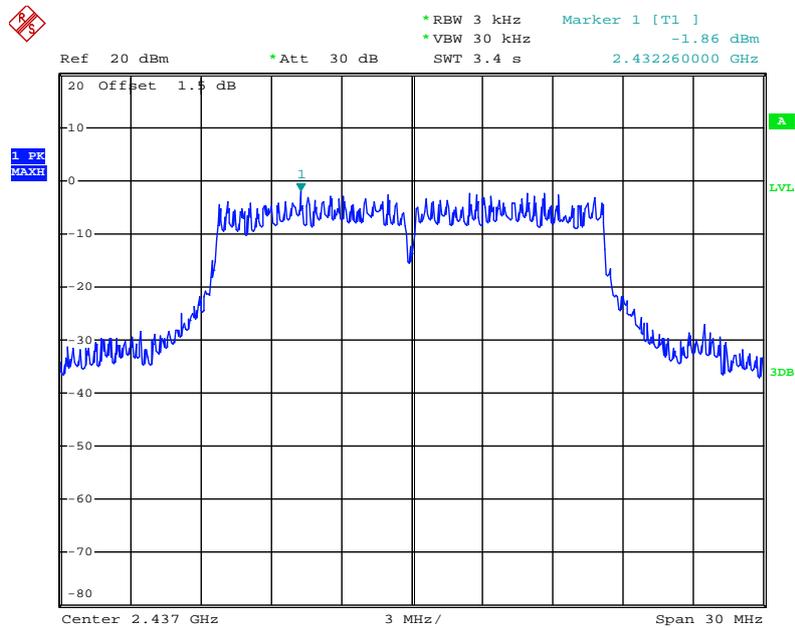

Date: 18.NOV.2013 18:41:23

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 2**

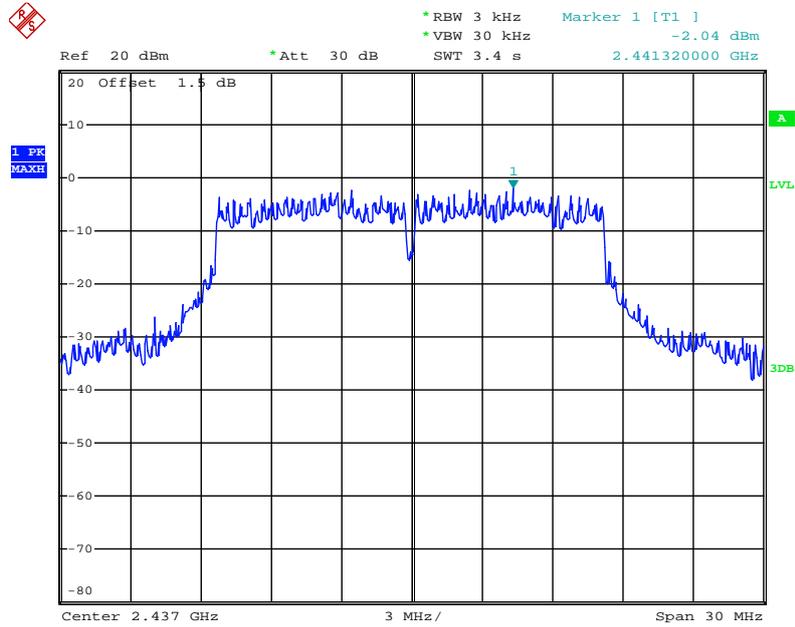


Date: 18.NOV.2013 18:40:57

For non-beamforming mode:


For 5GHz Band:

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5825 MHz / Ant. 1

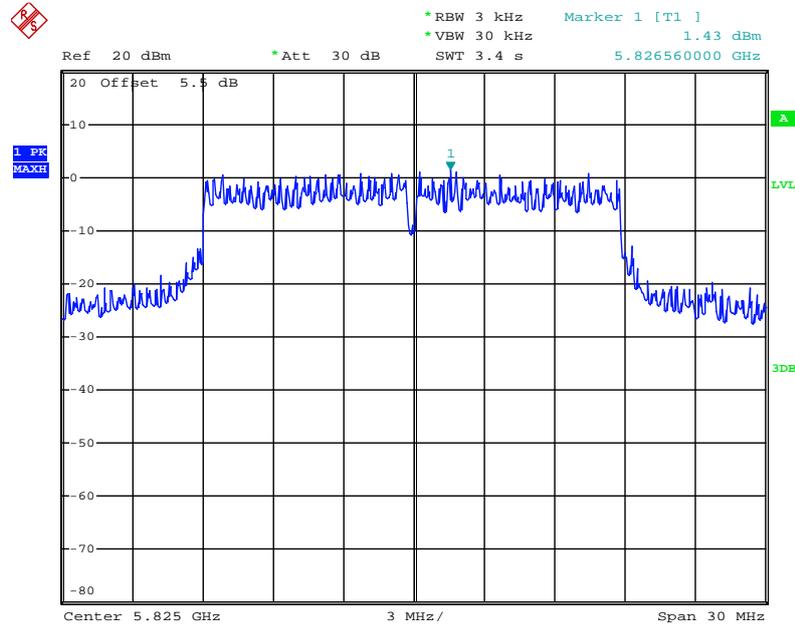


Date: 18.NOV.2013 20:50:25

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5825 MHz / Ant. 2

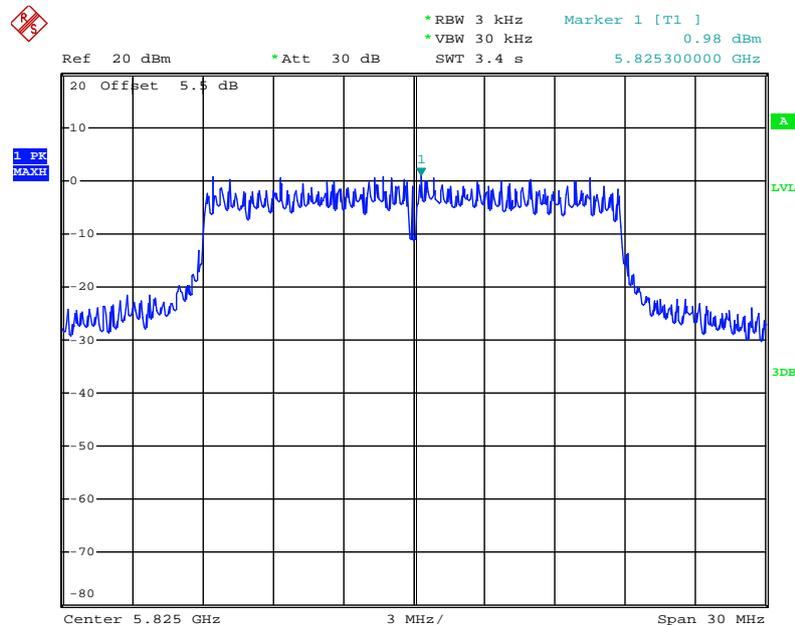


Date: 18.NOV.2013 20:50:01

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Ant. 1**

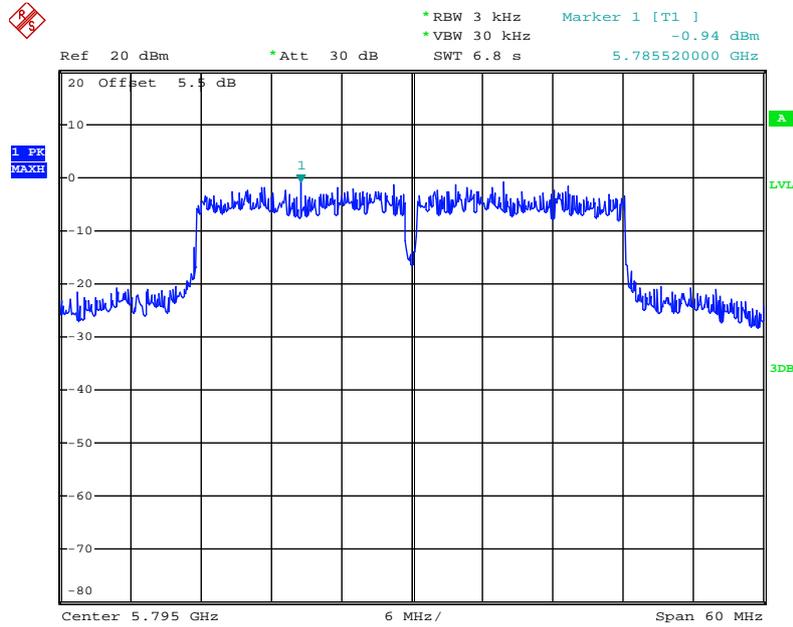


Date: 18.NOV.2013 20:57:08

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Ant. 2**

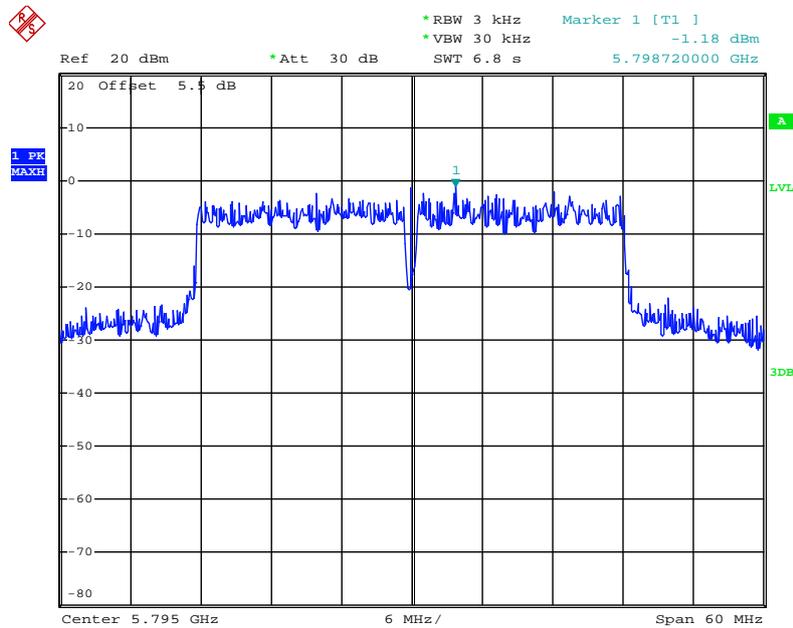


Date: 18.NOV.2013 20:56:20

## Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 1

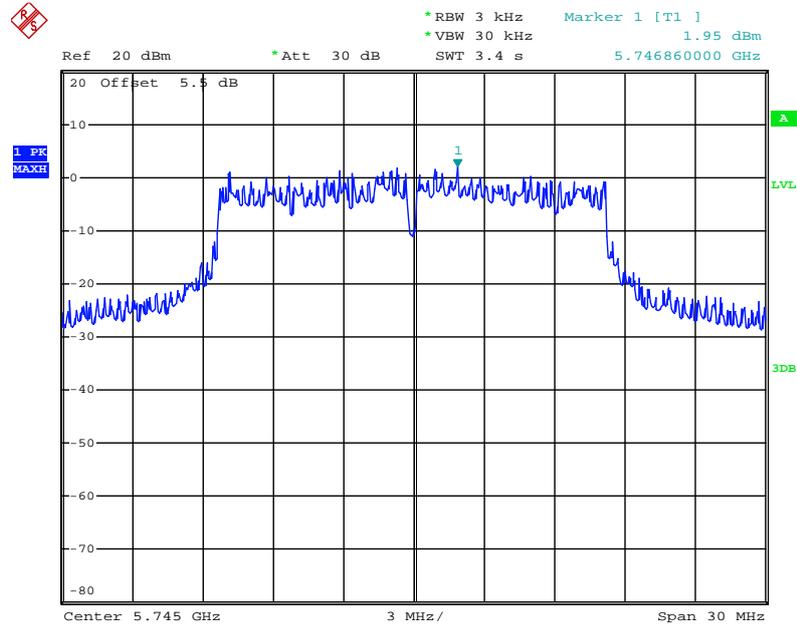

Date: 18.NOV.2013 20:36:02

## Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 2

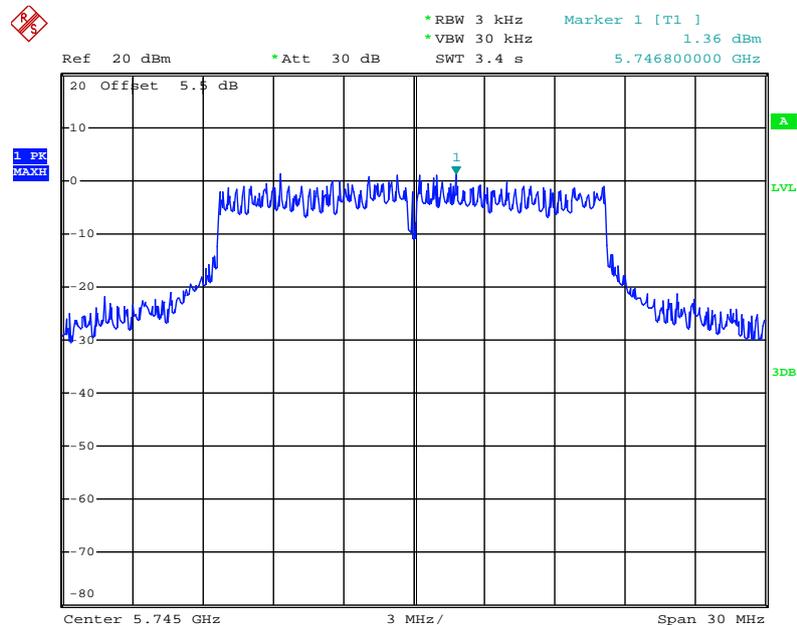


Date: 18.NOV.2013 20:37:37

For beamforming mode:


For 5GHz Band:

Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / 5745 MHz / Ant. 1

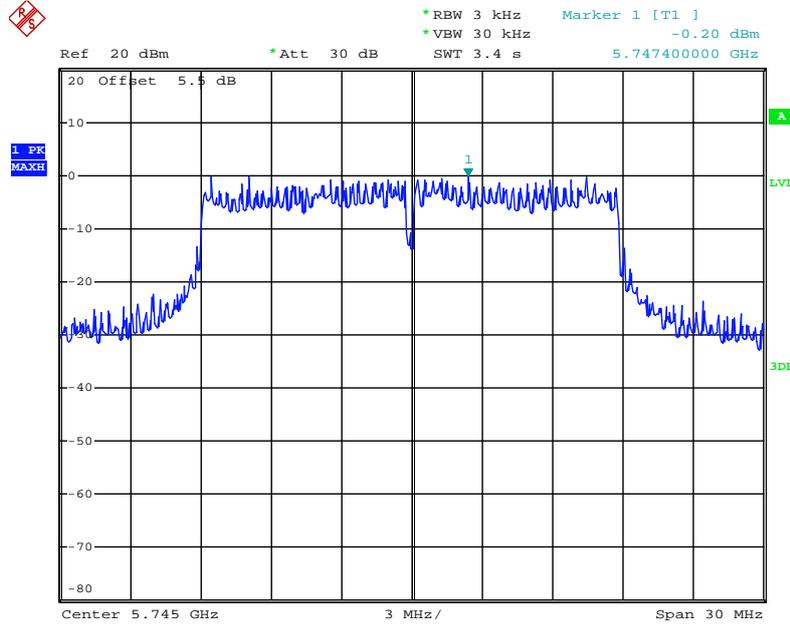


Date: 18.NOV.2013 20:58:54

Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / 5745 MHz / Ant. 2

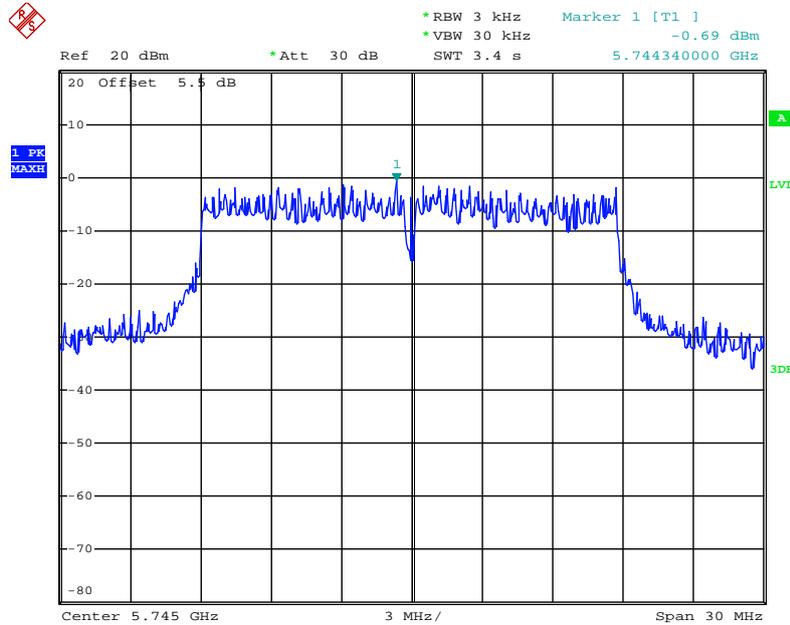


Date: 18.NOV.2013 20:59:36

**Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / 5755 MHz / Ant. 1**

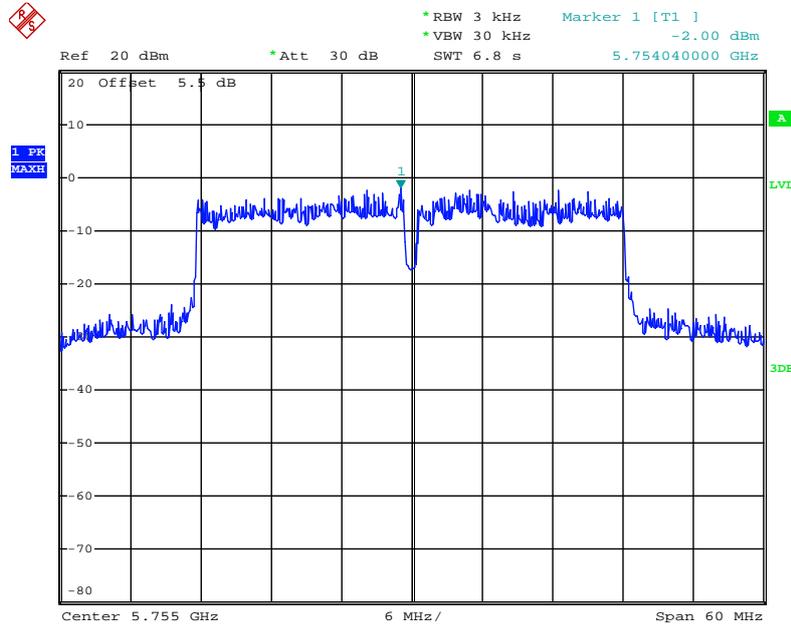


Date: 18.NOV.2013 21:03:58

**Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / 5755 MHz / Ant. 2**

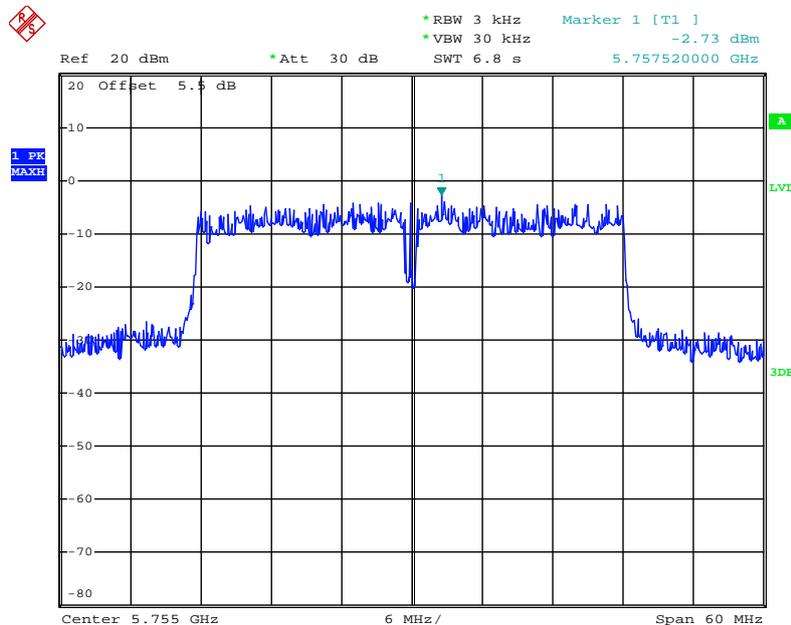


Date: 18.NOV.2013 21:03:28

## Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / 5775 MHz / Ant. 1

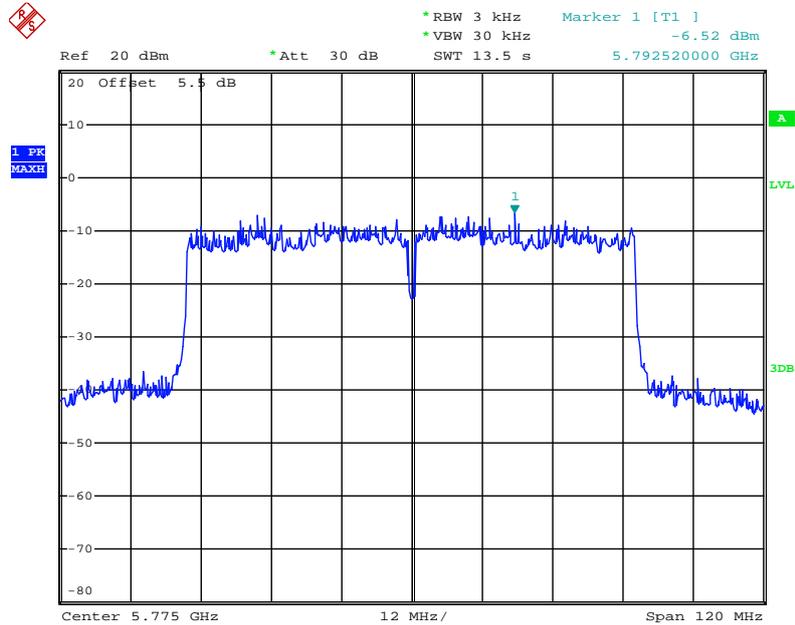

Date: 18.NOV.2013 21:07:50

## Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / 5775 MHz / Ant. 2

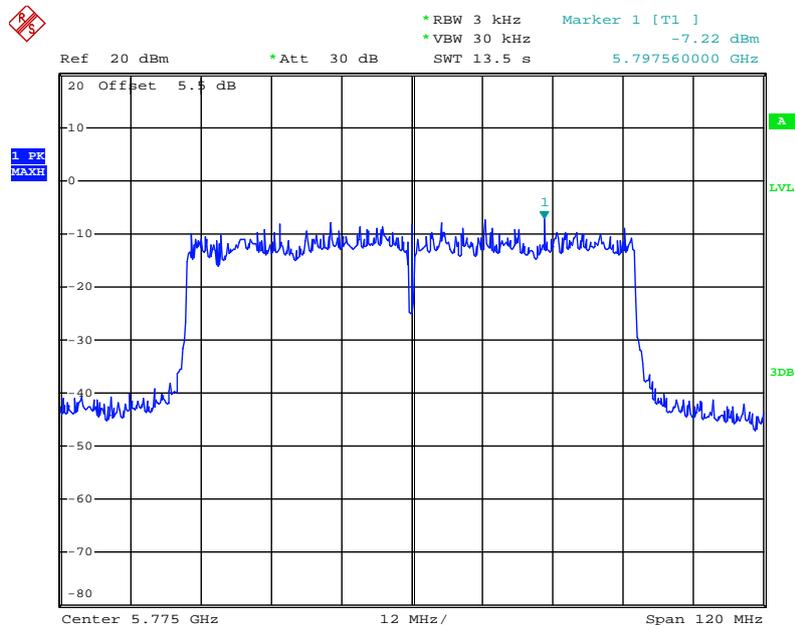

Date: 18.NOV.2013 21:06:43

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameters | Setting                    |
|---------------------|----------------------------|
| Attenuation         | Auto                       |
| Span Frequency      | > 6dB Bandwidth            |
| RBW                 | 100kHz                     |
| VBW                 | $\geq 3 \times \text{RBW}$ |
| Detector            | Peak                       |
| Trace               | Max Hold                   |
| Sweep Time          | Auto                       |

### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

7. The transmitter was radiated to the spectrum analyzer in peak hold mode.
8. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
9. Multiple antenna system was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
10. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

|               |             |                |                  |
|---------------|-------------|----------------|------------------|
| Temperature   | 20°C        | Humidity       | 63%              |
| Test Engineer | Benson Peng | Configurations | IEEE 802.11b/g/n |

For non-beamforming mode:

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1       | 2412 MHz  | 17.60               | 17.76                        | 500              | Complies    |
| 6       | 2437 MHz  | 17.36               | 17.92                        | 500              | Complies    |
| 11      | 2462 MHz  | 17.60               | 17.76                        | 500              | Complies    |

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 3       | 2422 MHz  | 33.28               | 36.00                        | 500              | Complies    |
| 6       | 2437 MHz  | 30.72               | 36.00                        | 500              | Complies    |
| 9       | 2452 MHz  | 32.80               | 36.16                        | 500              | Complies    |

Configuration IEEE 802.11b / Ant. 1

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1       | 2412 MHz  | 8.08                | 10.08                        | 500              | Complies    |
| 6       | 2437 MHz  | 8.08                | 10.16                        | 500              | Complies    |
| 11      | 2462 MHz  | 7.84                | 10.08                        | 500              | Complies    |

Configuration IEEE 802.11g / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1       | 2412 MHz  | 16.40               | 16.56                        | 500              | Complies    |
| 6       | 2437 MHz  | 15.68               | 16.72                        | 500              | Complies    |
| 11      | 2462 MHz  | 16.40               | 16.56                        | 500              | Complies    |

|                      |             |                       |                |
|----------------------|-------------|-----------------------|----------------|
| <b>Temperature</b>   | 20°C        | <b>Humidity</b>       | 63%            |
| <b>Test Engineer</b> | Benson Peng | <b>Configurations</b> | IEEE 802.11n/a |

For non-beamforming mode:

For 5GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149     | 5745 MHz  | 16.16               | 17.76                        | 500              | Complies    |
| 157     | 5785 MHz  | 16.72               | 17.60                        | 500              | Complies    |
| 165     | 5825 MHz  | 16.96               | 17.68                        | 500              | Complies    |

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151     | 5755 MHz  | 36.16               | 36.32                        | 500              | Complies    |
| 159     | 5795 MHz  | 36.16               | 36.32                        | 500              | Complies    |

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149     | 5745 MHz  | 15.44               | 16.56                        | 500              | Complies    |
| 157     | 5785 MHz  | 15.68               | 16.56                        | 500              | Complies    |
| 165     | 5825 MHz  | 15.04               | 16.48                        | 500              | Complies    |

|                      |             |                       |               |
|----------------------|-------------|-----------------------|---------------|
| <b>Temperature</b>   | 20°C        | <b>Humidity</b>       | 63%           |
| <b>Test Engineer</b> | Benson Peng | <b>Configurations</b> | IEEE 802.11ac |

For beamforming mode:

For 5GHz Band

Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149     | 5745 MHz  | 16.88               | 17.68                        | 500              | Complies    |
| 157     | 5785 MHz  | 17.52               | 17.76                        | 500              | Complies    |
| 165     | 5825 MHz  | 17.28               | 17.76                        | 500              | Complies    |

Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151     | 5755 MHz  | 35.68               | 36.64                        | 500              | Complies    |
| 159     | 5795 MHz  | 35.20               | 36.32                        | 500              | Complies    |

Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant. 1 + Ant. 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 155     | 5775 MHz  | 75.20               | 75.84                        | 500              | Complies    |


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

For non-beamforming mode:


For 2.4GHz Band:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Ant. 1 + Ant. 2

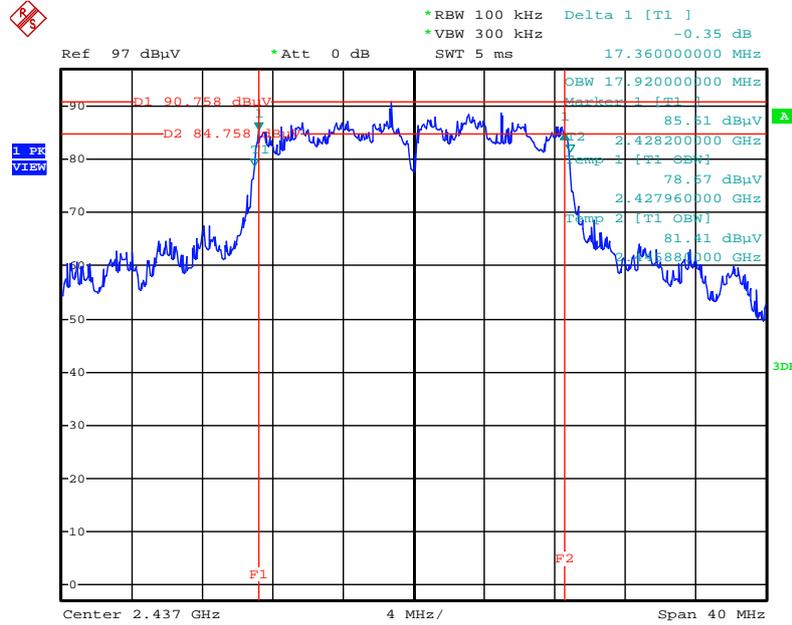


Date: 18.NOV.2013 19:24:42

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Ant. 1 + Ant. 2

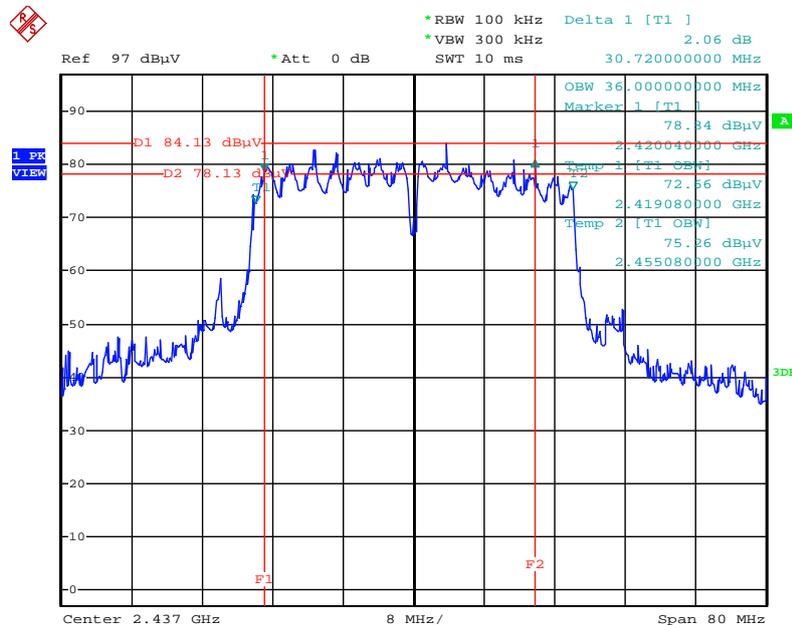


Date: 18.NOV.2013 19:26:11

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Ant. 1

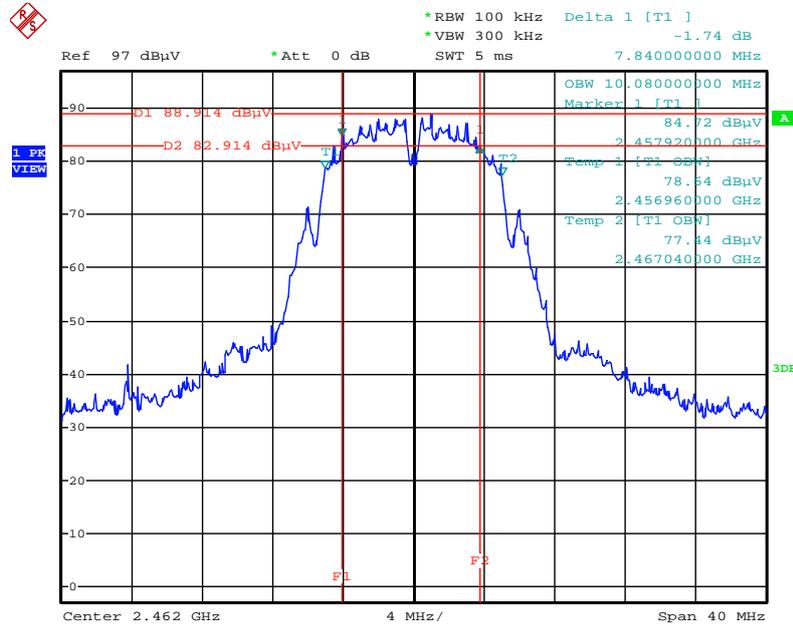

Date: 18.NOV.2013 19:21:23

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 + Ant. 2

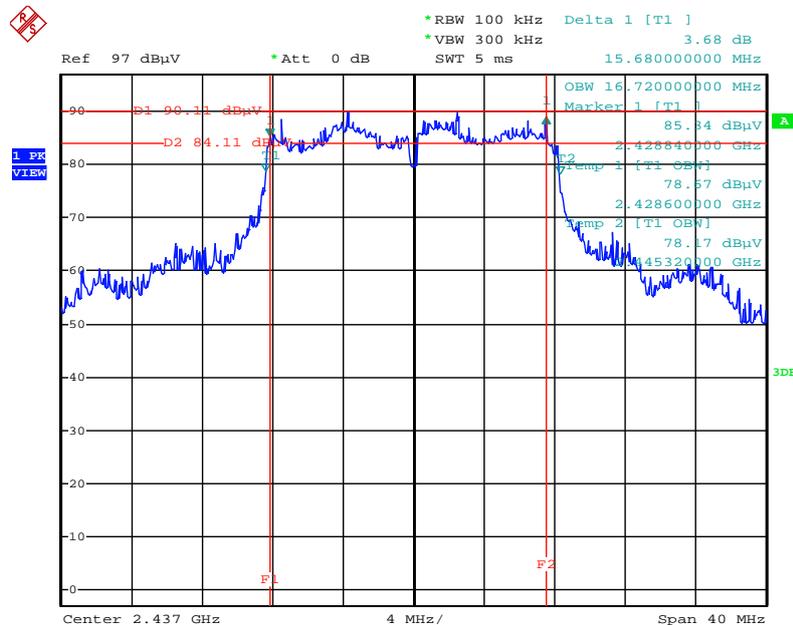


Date: 18.NOV.2013 19:22:27

For non-beamforming mode:


For 5GHz Band:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 5745 MHz / Ant. 1 + Ant. 2

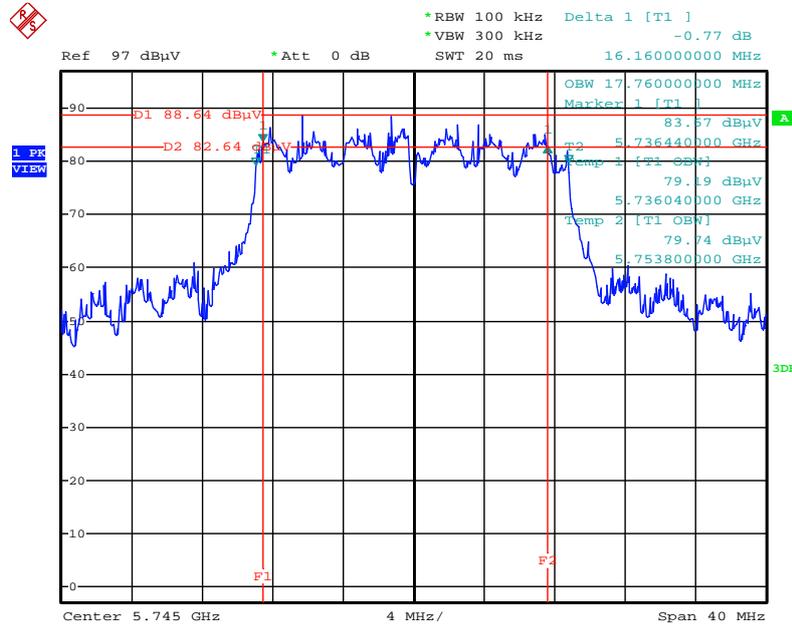


Date: 18.NOV.2013 19:54:52

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 5755 MHz / Ant. 1 + Ant. 2

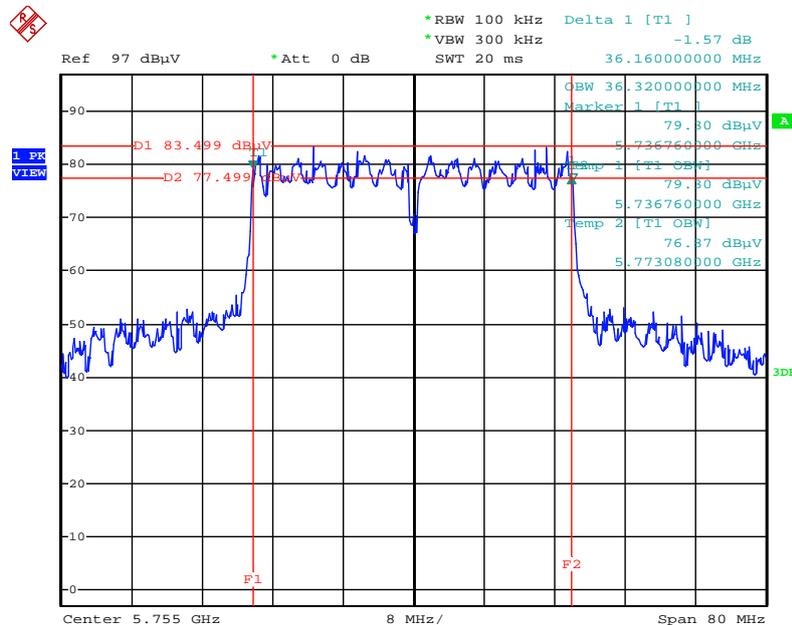

Date: 18.NOV.2013 19:56:15

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz / Ant. 1 + Ant. 2

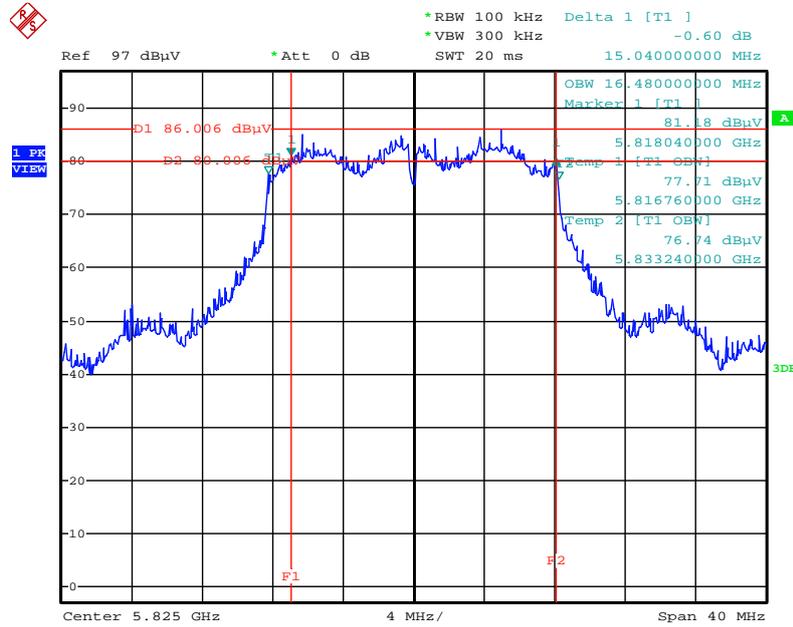


Date: 18.NOV.2013 19:53:32

For beamforming mode:


For 5GHz Band:

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / 5745 MHz / Ant. 1 + Ant. 2

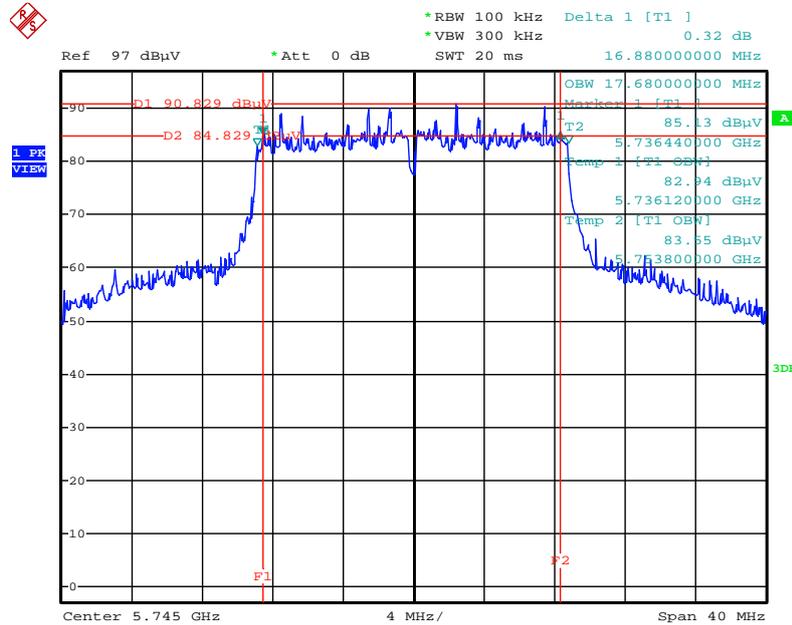


Date: 18.NOV.2013 20:19:44

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / 5795 MHz / Ant. 1 + Ant. 2

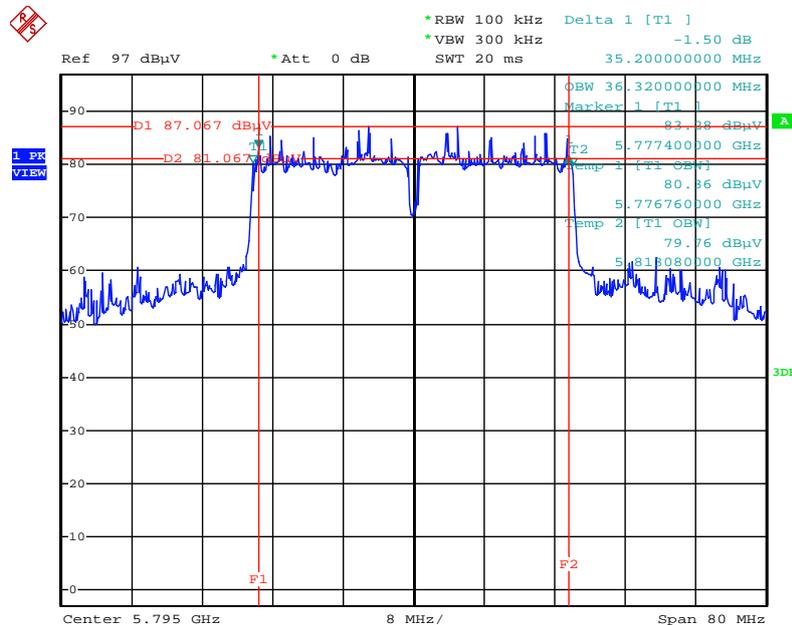

Date: 18.NOV.2013 20:17:55

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / 5775 MHz / Ant. 1 + Ant. 2

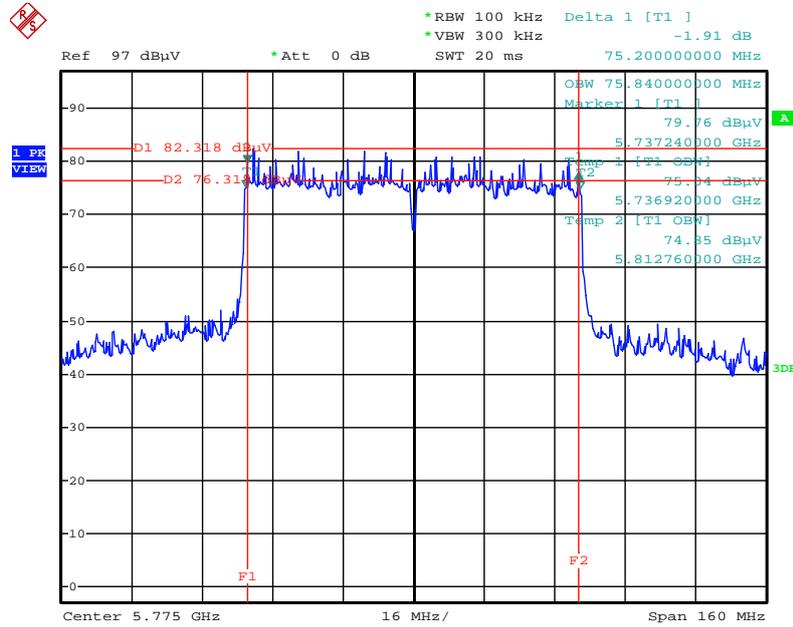

Date: 18.NOV.2013 20:15:51

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(kHz)                       | 300                           |
| 0.490~1.705       | 24000/F(kHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                       |
|---|---|
| Attenuation                                 | Auto  |
| Start Frequency                             | 1GHz  |
| Stop Frequency                              | 10th carrier harmonic                         |
| RBW / VBW (Emission in restricted band)     | 1MHz / 3MHz for Peak, 1MHz / 10Hz for Average |
| RBW / VBW (Emission in non-restricted band) | 100kHz / 300kHz for peak                      |


| Receiver Parameter     | Setting                        |
|------------------------|--------------------------------|
| Attenuation            | Auto                           |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1GHz / RBW 120kHz for QP |

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

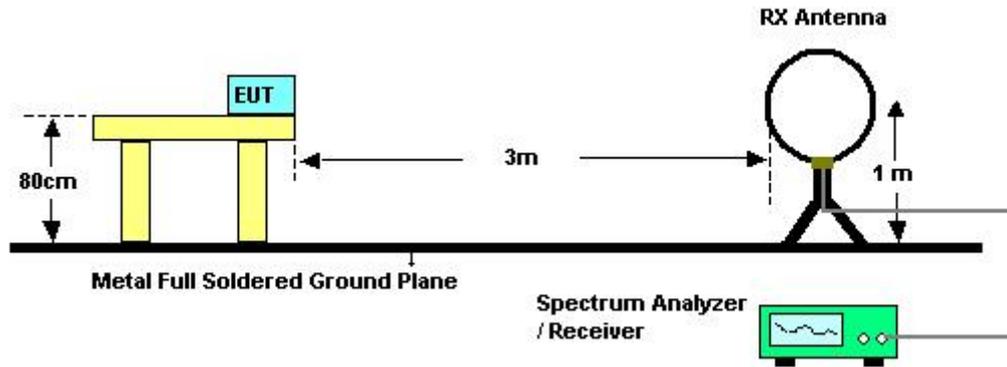

For Radiated Emissions: 30MHz~1GHz

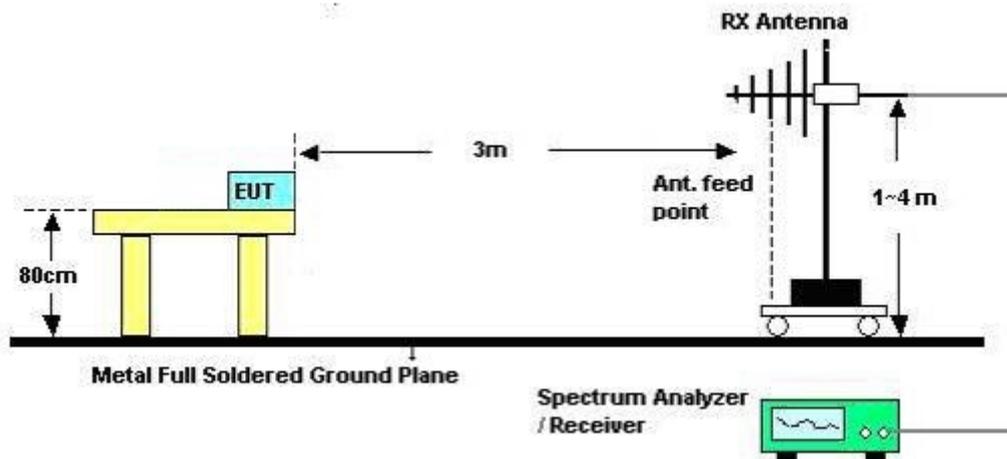

For Radiated Emissions: Above 1GHz

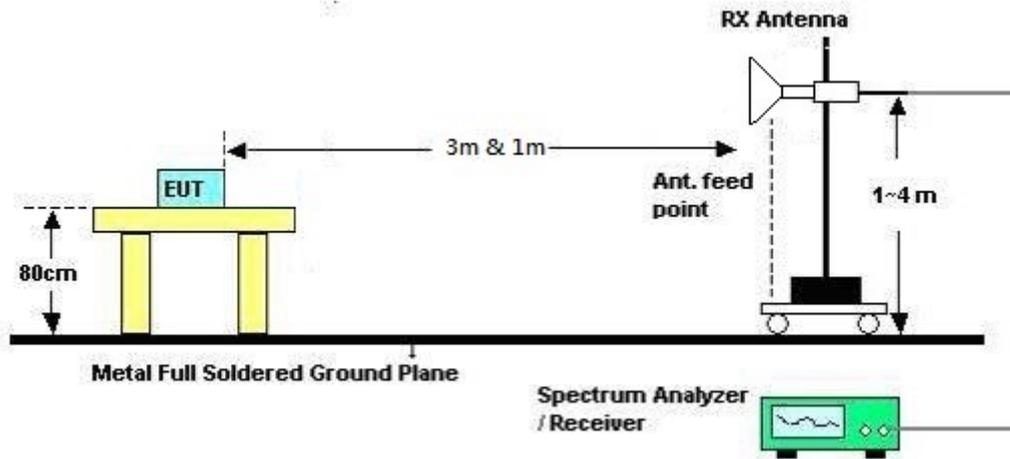

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

|                      |               |                       |             |
|----------------------|---------------|-----------------------|-------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%         |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | Normal Link |
| <b>Test Date</b>     | Nov. 15, 2013 |                       |             |

| <b>Freq. (MHz)</b> | <b>Level (dBuV)</b> | <b>Over Limit (dB)</b> | <b>Limit Line (dBuV)</b> | <b>Remark</b> |
|--------------------|---------------------|------------------------|--------------------------|---------------|
| -                  | -                   | -                      | -                        | See Note      |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


|               |            |                |                      |
|---------------|------------|----------------|----------------------|
| Temperature   | 25°C       | Humidity       | 54%                  |
| Test Engineer | James Chou | Configurations | Normal Link / Mode 3 |

Horizontal

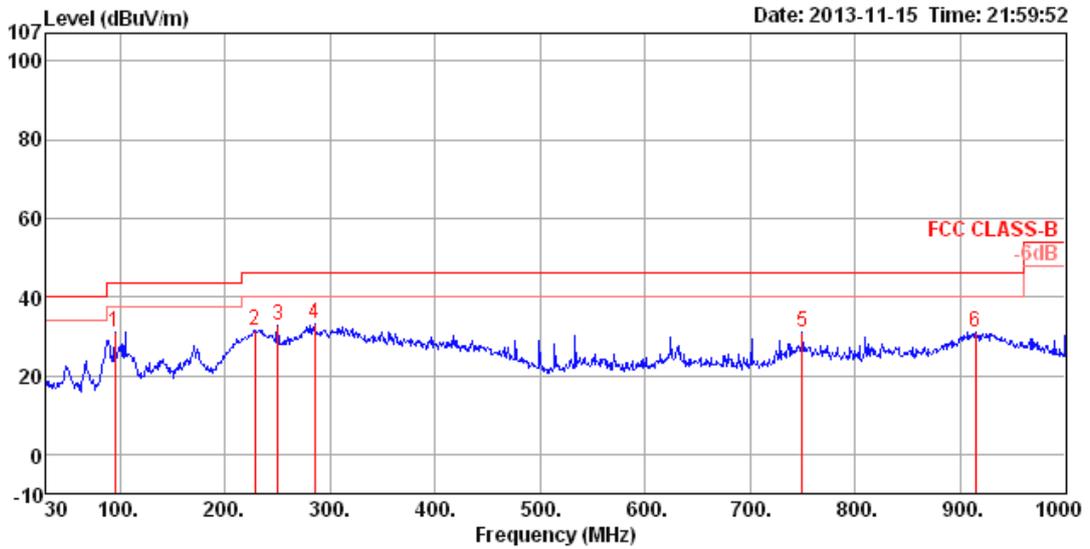

|   | Freq   | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | A/Pos | T/Pos | Pol/Phase  | Remark |
|---|--------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|------------|--------|
|   | MHz    | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | cm    | deg   |            |        |
| 1 | 94.99  | 31.15  | 43.50      | -12.35     | 51.98      | 1.16       | 9.58           | 31.57         | 100   | 341   | HORIZONTAL | Peak   |
| 2 | 228.85 | 31.65  | 46.00      | -14.35     | 51.70      | 1.83       | 9.57           | 31.45         | 150   | 265   | HORIZONTAL | Peak   |
| 3 | 250.19 | 32.92  | 46.00      | -13.08     | 50.60      | 1.90       | 11.91          | 31.49         | 125   | 269   | HORIZONTAL | Peak   |
| 4 | 285.11 | 33.09  | 46.00      | -12.91     | 50.00      | 2.05       | 12.58          | 31.54         | 100   | 258   | HORIZONTAL | Peak   |
| 5 | 749.74 | 31.02  | 46.00      | -14.98     | 39.17      | 3.53       | 19.69          | 31.37         | 125   | 136   | HORIZONTAL | Peak   |
| 6 | 914.64 | 31.21  | 46.00      | -14.79     | 37.72      | 3.99       | 20.68          | 31.18         | 100   | 136   | HORIZONTAL | Peak   |

**Vertical**

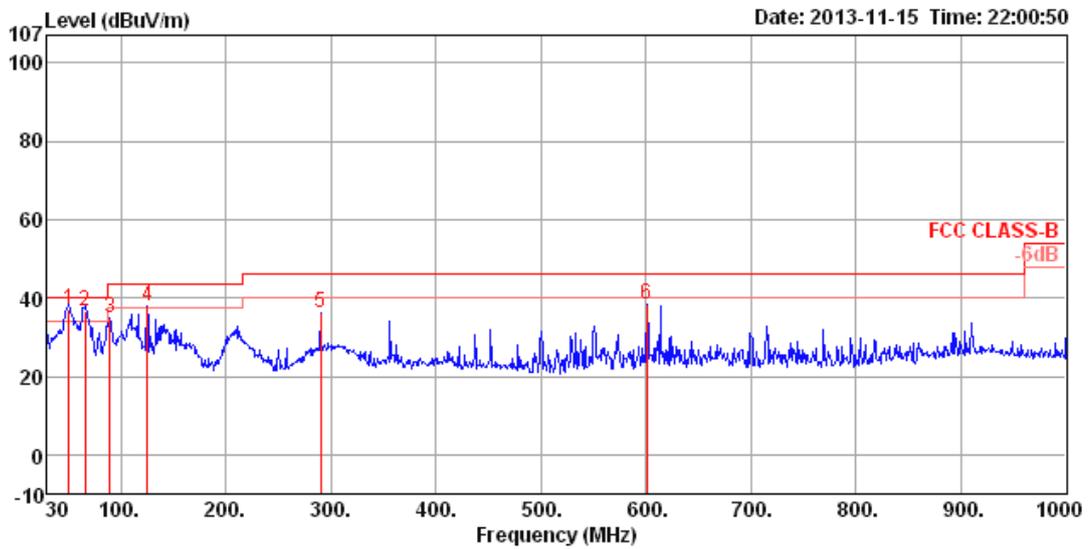

|   | Freq   | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Pol/Phase | Remark        |
|---|--------|--------|--------|-------|-------|--------------|--------|-------|-------|-----------|---------------|
|   | MHz    | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | cm    | deg       |               |
| 1 | 50.37  | 36.94  | 40.00  | -3.06 | 60.45 | 0.84         | 7.44   | 31.79 | 100   | 201       | VERTICAL QP   |
| 2 | 65.89  | 36.44  | 40.00  | -3.56 | 62.40 | 0.96         | 4.90   | 31.82 | 300   | 157       | VERTICAL QP   |
| 3 | 89.17  | 34.95  | 43.50  | -8.55 | 56.89 | 1.12         | 8.54   | 31.60 | 100   | 111       | VERTICAL Peak |
| 4 | 125.06 | 38.12  | 43.50  | -5.38 | 56.63 | 1.33         | 11.73  | 31.57 | 125   | 219       | VERTICAL Peak |
| 5 | 289.96 | 36.20  | 46.00  | -9.80 | 52.96 | 2.08         | 12.69  | 31.53 | 150   | 138       | VERTICAL Peak |
| 6 | 600.36 | 38.26  | 46.00  | -7.74 | 47.93 | 3.12         | 18.45  | 31.24 | 200   | 164       | VERTICAL Peak |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

For non-beamforming mode:

For 2.4GHz Band:

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n MCS0 20MHz CH 1 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |   |

##### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4822.04 | 35.16  | 54.00      | -18.84     | 33.82      | 3.31       | 33.06          | 35.03         | Average | 100   | 97    | HORIZONTAL |
| 2 | 4824.60 | 46.23  | 74.00      | -27.77     | 44.89      | 3.31       | 33.06          | 35.03         | Peak    | 100   | 97    | HORIZONTAL |

##### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4821.44 | 54.71  | 74.00      | -19.29     | 53.37      | 3.31       | 33.06          | 35.03         | Peak    | 112   | 253   | VERTICAL  |
| 2 | 4824.04 | 41.67  | 54.00      | -12.33     | 40.33      | 3.31       | 33.06          | 35.03         | Average | 112   | 253   | VERTICAL  |



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n MCS0 20MHz CH 6 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |   |

**Horizontal**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4874.96 | 40.51  | 54.00      | -13.49     | 39.05      | 3.33       | 33.16          | 35.03         | Average | 162   | 149   | HORIZONTAL |
| 2 | 4880.16 | 54.82  | 74.00      | -19.18     | 53.36      | 3.33       | 33.16          | 35.03         | Peak    | 162   | 149   | HORIZONTAL |
| 3 | 7309.48 | 45.38  | 54.00      | -8.62      | 40.76      | 4.06       | 35.96          | 35.40         | Average | 136   | 309   | HORIZONTAL |
| 4 | 7309.48 | 55.38  | 74.00      | -18.62     | 50.76      | 4.06       | 35.96          | 35.40         | Peak    | 136   | 309   | HORIZONTAL |

**Vertical**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4873.44 | 48.68  | 54.00      | -5.32      | 47.22      | 3.33       | 33.16          | 35.03         | Average | 112   | 246   | VERTICAL  |
| 2 | 4875.80 | 64.00  | 74.00      | -10.00     | 62.54      | 3.33       | 33.16          | 35.03         | Peak    | 112   | 246   | VERTICAL  |
| 3 | 7306.72 | 65.75  | 74.00      | -8.25      | 61.17      | 4.06       | 35.92          | 35.40         | Peak    | 112   | 274   | VERTICAL  |
| 4 | 7308.52 | 53.36  | 54.00      | -0.64      | 48.74      | 4.06       | 35.96          | 35.40         | Average | 112   | 274   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n MCS0 20MHz CH 11 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |  |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |            |
| 1 | 4923.52 | 33.69  | 54.00  | -20.31 | 32.09 | 3.35  | 33.26   | 35.01  | Average | 166   | 138   | HORIZONTAL |
| 2 | 4928.68 | 46.01  | 74.00  | -27.99 | 44.41 | 3.35  | 33.26   | 35.01  | Peak    | 166   | 138   | HORIZONTAL |
| 3 | 7384.48 | 48.38  | 74.00  | -25.62 | 43.63 | 4.06  | 36.09   | 35.40  | Peak    | 100   | 138   | HORIZONTAL |
| 4 | 7387.28 | 34.30  | 54.00  | -19.70 | 29.55 | 4.06  | 36.09   | 35.40  | Average | 100   | 138   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 4924.08 | 39.73  | 54.00  | -14.27 | 38.13 | 3.35  | 33.26   | 35.01  | Average | 145   | 243   | VERTICAL  |
| 2 | 4924.16 | 52.01  | 74.00  | -21.99 | 50.41 | 3.35  | 33.26   | 35.01  | Peak    | 145   | 243   | VERTICAL  |
| 3 | 7381.20 | 56.35  | 74.00  | -17.65 | 51.60 | 4.06  | 36.09   | 35.40  | Peak    | 145   | 245   | VERTICAL  |
| 4 | 7384.08 | 39.26  | 54.00  | -14.74 | 34.51 | 4.06  | 36.09   | 35.40  | Average | 145   | 245   | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n MCS0 40MHz CH 3 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |   |

**Horizontal**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4836.52 | 45.87  | 74.00      | -28.13     | 44.53      | 3.31       | 33.06          | 35.03         | Peak    | 100   | 73    | HORIZONTAL |
| 2 | 4844.36 | 33.03  | 54.00      | -20.97     | 31.65      | 3.32       | 33.09          | 35.03         | Average | 100   | 73    | HORIZONTAL |

**Vertical**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4844.16 | 50.87  | 74.00      | -23.13     | 49.49      | 3.32       | 33.09          | 35.03         | Peak    | 100   | 245   | VERTICAL  |
| 2 | 4846.24 | 37.50  | 54.00      | -16.50     | 36.12      | 3.32       | 33.09          | 35.03         | Average | 100   | 245   | VERTICAL  |



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n MCS0 40MHz CH 6 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |   |

**Horizontal**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4872.16 | 31.17  | 54.00      | -22.83     | 29.71      | 3.33       | 33.16          | 35.03         | Average | 100   | 122   | HORIZONTAL |
| 2 | 4881.40 | 48.50  | 74.00      | -25.50     | 47.04      | 3.33       | 33.16          | 35.03         | Peak    | 100   | 122   | HORIZONTAL |
| 3 | 7304.24 | 45.98  | 74.00      | -28.02     | 41.40      | 4.06       | 35.92          | 35.40         | Peak    | 100   | 194   | HORIZONTAL |
| 4 | 7305.12 | 35.71  | 54.00      | -18.29     | 31.13      | 4.06       | 35.92          | 35.40         | Average | 100   | 194   | HORIZONTAL |

**Vertical**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4874.00 | 50.87  | 74.00      | -23.13     | 49.41      | 3.33       | 33.16          | 35.03         | Peak    | 109   | 248   | VERTICAL  |
| 2 | 4874.16 | 39.21  | 54.00      | -14.79     | 37.75      | 3.33       | 33.16          | 35.03         | Average | 109   | 248   | VERTICAL  |
| 3 | 7301.52 | 35.04  | 54.00      | -18.96     | 30.46      | 4.06       | 35.92          | 35.40         | Average | 109   | 283   | VERTICAL  |
| 4 | 7310.84 | 47.61  | 74.00      | -26.39     | 42.99      | 4.06       | 35.96          | 35.40         | Peak    | 109   | 283   | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n MCS0 40MHz CH 9 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |   |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4904.76 | 30.57  | 54.00      | -23.43     | 29.02      | 3.34              | 33.23          | 35.02         | Average | 100   | 144   | HORIZONTAL |
| 2 | 4911.44 | 44.48  | 74.00      | -29.52     | 42.93      | 3.34              | 33.23          | 35.02         | Peak    | 100   | 144   | HORIZONTAL |
| 3 | 7361.60 | 33.59  | 54.00      | -20.41     | 28.87      | 4.06              | 36.06          | 35.40         | Average | 100   | 116   | HORIZONTAL |
| 4 | 7362.96 | 47.40  | 74.00      | -26.60     | 42.68      | 4.06              | 36.06          | 35.40         | Peak    | 100   | 116   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4904.24 | 32.63  | 54.00      | -21.37     | 31.12      | 3.34              | 33.19          | 35.02         | Average | 100   | 280   | VERTICAL  |
| 2 | 4911.52 | 52.07  | 74.00      | -21.93     | 50.52      | 3.34              | 33.23          | 35.02         | Peak    | 100   | 280   | VERTICAL  |
| 3 | 7362.76 | 33.54  | 54.00      | -20.46     | 28.82      | 4.06              | 36.06          | 35.40         | Average | 100   | 193   | VERTICAL  |
| 4 | 7365.84 | 45.60  | 74.00      | -28.40     | 40.88      | 4.06              | 36.06          | 35.40         | Peak    | 100   | 193   | VERTICAL  |

|                      |               |                       |                            |
|----------------------|---------------|-----------------------|----------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                        |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11b CH 1 / Ant. 1 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |                            |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4823.00 | 48.70  | 54.00      | -5.30      | 47.36      | 3.31       | 33.06          | 35.03         | Average | 100   | 250   | HORIZONTAL |
| 2 | 4823.00 | 48.24  | 74.00      | -25.76     | 46.90      | 3.31       | 33.06          | 35.03         | Peak    | 100   | 250   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4823.92 | 53.70  | 54.00      | -0.30      | 52.36      | 3.31       | 33.06          | 35.03         | Average | 110   | 252   | VERTICAL  |
| 2 | 4823.92 | 56.24  | 74.00      | -17.76     | 54.90      | 3.31       | 33.06          | 35.03         | Peak    | 110   | 252   | VERTICAL  |



|                      |               |                       |                            |
|----------------------|---------------|-----------------------|----------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                        |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11b CH 6 / Ant. 1 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |                            |

**Horizontal**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4873.00 | 47.87  | 54.00      | -6.13      | 46.41      | 3.33       | 33.16          | 35.03         | Average | 100   | 255   | HORIZONTAL |
| 2 | 4873.00 | 49.89  | 74.00      | -24.11     | 48.43      | 3.33       | 33.16          | 35.03         | Peak    | 100   | 255   | HORIZONTAL |
| 3 | 7311.12 | 43.87  | 54.00      | -10.13     | 39.25      | 4.06       | 35.96          | 35.40         | Average | 110   | 198   | HORIZONTAL |
| 4 | 7311.12 | 45.87  | 74.00      | -28.13     | 41.25      | 4.06       | 35.96          | 35.40         | Peak    | 110   | 198   | HORIZONTAL |

**Vertical**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4873.72 | 55.89  | 74.00      | -18.11     | 54.43      | 3.33       | 33.16          | 35.03         | Peak    | 120   | 285   | VERTICAL  |
| 2 | 4873.92 | 51.87  | 54.00      | -2.13      | 50.41      | 3.33       | 33.16          | 35.03         | Average | 120   | 285   | VERTICAL  |
| 3 | 7311.00 | 41.89  | 54.00      | -12.11     | 37.27      | 4.06       | 35.96          | 35.40         | Average | 111   | 250   | VERTICAL  |
| 4 | 7311.00 | 47.89  | 74.00      | -26.11     | 43.27      | 4.06       | 35.96          | 35.40         | Peak    | 111   | 250   | VERTICAL  |



|                      |               |                       |                             |
|----------------------|---------------|-----------------------|-----------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                         |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11b CH 11 / Ant. 1 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |                             |

**Horizontal**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4923.00 | 49.93  | 54.00      | -4.07      | 48.33      | 3.35       | 33.26          | 35.01         | Average | 100   | 222   | HORIZONTAL |
| 2 | 4923.88 | 52.41  | 74.00      | -21.59     | 50.81      | 3.35       | 33.26          | 35.01         | Peak    | 100   | 222   | HORIZONTAL |
| 3 | 7386.00 | 46.93  | 54.00      | -7.07      | 42.18      | 4.06       | 36.09          | 35.40         | Average | 105   | 254   | HORIZONTAL |
| 4 | 7386.00 | 46.93  | 74.00      | -27.07     | 42.18      | 4.06       | 36.09          | 35.40         | Peak    | 105   | 254   | HORIZONTAL |

**Vertical**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4923.88 | 53.93  | 54.00      | -0.07      | 52.33      | 3.35       | 33.26          | 35.01         | Average | 109   | 246   | VERTICAL  |
| 2 | 4923.88 | 56.41  | 74.00      | -17.59     | 54.81      | 3.35       | 33.26          | 35.01         | Peak    | 109   | 246   | VERTICAL  |
| 3 | 7386.00 | 46.93  | 54.00      | -7.07      | 42.18      | 4.06       | 36.09          | 35.40         | Average | 100   | 240   | VERTICAL  |
| 4 | 7386.00 | 50.93  | 74.00      | -23.07     | 46.18      | 4.06       | 36.09          | 35.40         | Peak    | 100   | 240   | VERTICAL  |

|                      |               |                       |                                     |
|----------------------|---------------|-----------------------|-------------------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                                 |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11g CH 1 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |                                     |

**Horizontal**

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |            |
| 1 | 4825.12 | 34.46  | 54.00  | -19.54 | 33.12 | 3.31  | 33.06   | 35.03  | Average | 165   | 84    | HORIZONTAL |
| 2 | 4825.36 | 48.13  | 74.00  | -25.87 | 46.79 | 3.31  | 33.06   | 35.03  | Peak    | 165   | 84    | HORIZONTAL |

**Vertical**

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 4823.60 | 53.69  | 74.00  | -20.31 | 52.35 | 3.31  | 33.06   | 35.03  | Peak    | 113   | 251   | VERTICAL  |
| 2 | 4824.04 | 40.09  | 54.00  | -13.91 | 38.75 | 3.31  | 33.06   | 35.03  | Average | 113   | 251   | VERTICAL  |

|                      |               |                       |                                     |
|----------------------|---------------|-----------------------|-------------------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                                 |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11g CH 6 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |                                     |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |            |
| 1 | 4874.80 | 38.05  | 54.00  | -15.95 | 36.59 | 3.33  | 33.16   | 35.03  | Average | 110   | 107   | HORIZONTAL |
| 2 | 4875.20 | 53.10  | 74.00  | -20.90 | 51.64 | 3.33  | 33.16   | 35.03  | Peak    | 110   | 107   | HORIZONTAL |
| 3 | 7311.32 | 43.89  | 54.00  | -10.11 | 39.27 | 4.06  | 35.96   | 35.40  | Average | 130   | 91    | HORIZONTAL |
| 4 | 7315.44 | 59.26  | 74.00  | -14.74 | 54.64 | 4.06  | 35.96   | 35.40  | Peak    | 130   | 91    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 4871.88 | 57.59  | 74.00  | -16.41 | 56.13 | 3.33  | 33.16   | 35.03  | Peak    | 159   | 260   | VERTICAL  |
| 2 | 4874.04 | 41.42  | 54.00  | -12.58 | 39.96 | 3.33  | 33.16   | 35.03  | Average | 159   | 260   | VERTICAL  |
| 3 | 7307.08 | 62.33  | 74.00  | -11.67 | 57.75 | 4.06  | 35.92   | 35.40  | Peak    | 159   | 275   | VERTICAL  |
| 4 | 7311.08 | 49.55  | 54.00  | -4.45  | 44.93 | 4.06  | 35.96   | 35.40  | Average | 159   | 275   | VERTICAL  |

|                      |               |                       |                                      |
|----------------------|---------------|-----------------------|--------------------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                                  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11g CH 11 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |                                      |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4925.48 | 48.28  | 74.00      | -25.72     | 46.68      | 3.35       | 33.26          | 35.01         | Peak    | 100   | 49    | HORIZONTAL |
| 2 | 4925.52 | 35.25  | 54.00      | -18.75     | 33.65      | 3.35       | 33.26          | 35.01         | Average | 100   | 49    | HORIZONTAL |
| 3 | 7382.48 | 35.10  | 54.00      | -18.90     | 30.35      | 4.06       | 36.09          | 35.40         | Average | 100   | 276   | HORIZONTAL |
| 4 | 7387.52 | 49.28  | 74.00      | -24.72     | 44.53      | 4.06       | 36.09          | 35.40         | Peak    | 100   | 276   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4924.60 | 41.29  | 54.00      | -12.71     | 39.69      | 3.35       | 33.26          | 35.01         | Average | 110   | 249   | VERTICAL  |
| 2 | 4925.08 | 53.98  | 74.00      | -20.02     | 52.38      | 3.35       | 33.26          | 35.01         | Peak    | 110   | 249   | VERTICAL  |
| 3 | 7382.36 | 35.23  | 54.00      | -18.77     | 30.48      | 4.06       | 36.09          | 35.40         | Average | 100   | 2     | VERTICAL  |
| 4 | 7387.40 | 48.96  | 74.00      | -25.04     | 44.21      | 4.06       | 36.09          | 35.40         | Peak    | 100   | 2     | VERTICAL  |

## For 5GHz Band:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n 20MHz CH 149 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |            |
| 1 | 11490.64 | 44.57  | 54.00  | -9.43  | 35.96 | 5.11  | 38.78   | 35.28  | Average | 100   | 319   | HORIZONTAL |
| 2 | 11495.77 | 59.01  | 74.00  | -14.99 | 50.39 | 5.12  | 38.78   | 35.28  | Peak    | 100   | 319   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |           |
| 1 | 11495.61 | 46.95  | 54.00  | -7.05  | 38.33 | 5.12  | 38.78   | 35.28  | Average | 100   | 254   | VERTICAL  |
| 2 | 11498.09 | 60.71  | 74.00  | -13.29 | 52.09 | 5.12  | 38.78   | 35.28  | Peak    | 100   | 254   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n 20MHz CH 157 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 11567.95 | 59.73  | 74.00      | -14.27     | 51.07      | 5.13       | 38.83          | 35.30         | Peak    | 100   | 226   | HORIZONTAL |
| 2 | 11570.51 | 44.86  | 54.00      | -9.14      | 36.19      | 5.14       | 38.83          | 35.30         | Average | 100   | 226   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 11568.17 | 65.09  | 74.00      | -8.91      | 56.43      | 5.13       | 38.83          | 35.30         | Peak    | 100   | 254   | VERTICAL  |
| 2 | 11568.24 | 50.06  | 54.00      | -3.94      | 41.40      | 5.13       | 38.83          | 35.30         | Average | 100   | 254   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n 20MHz CH 165 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |            |
| 1 | 11650.42 | 47.65  | 54.00  | -6.35  | 38.93 | 5.16  | 38.86   | 35.30  | Average | 100   | 319   | HORIZONTAL |
| 2 | 11655.67 | 62.81  | 74.00  | -11.19 | 54.09 | 5.16  | 38.86   | 35.30  | Peak    | 100   | 319   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over  | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|-------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB    | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |           |
| 1 | 11650.71 | 52.83  | 54.00  | -1.17 | 44.11 | 5.16  | 38.86   | 35.30  | Average | 100   | 250   | VERTICAL  |
| 2 | 11650.77 | 67.10  | 74.00  | -6.90 | 58.38 | 5.16  | 38.86   | 35.30  | Peak    | 100   | 250   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n 40MHz CH 151 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |            |
| 1 | 11511.20 | 55.04  | 74.00  | -18.96 | 46.41 | 5.12  | 38.79   | 35.28  | Peak    | 100   | 317   | HORIZONTAL |
| 2 | 11520.66 | 41.16  | 54.00  | -12.84 | 32.52 | 5.13  | 38.80   | 35.29  | Average | 100   | 317   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |           |
| 1 | 11511.12 | 59.11  | 74.00  | -14.89 | 50.48 | 5.12  | 38.79   | 35.28  | Peak    | 100   | 254   | VERTICAL  |
| 2 | 11515.69 | 44.85  | 54.00  | -9.15  | 36.23 | 5.12  | 38.79   | 35.29  | Average | 100   | 254   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n 40MHz CH 159 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |            |
| 1 | 11590.08 | 57.86  | 74.00  | -16.14 | 49.19 | 5.14  | 38.83   | 35.30  | Peak    | 100   | 323   | HORIZONTAL |
| 2 | 11590.64 | 43.24  | 54.00  | -10.76 | 34.57 | 5.14  | 38.83   | 35.30  | Average | 100   | 323   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |           |
| 1 | 11585.67 | 48.00  | 54.00  | -6.00  | 39.33 | 5.14  | 38.83   | 35.30  | Average | 100   | 249   | VERTICAL  |
| 2 | 11591.20 | 61.94  | 74.00  | -12.06 | 53.27 | 5.14  | 38.83   | 35.30  | Peak    | 100   | 249   | VERTICAL  |

|                      |               |                       |                                       |
|----------------------|---------------|-----------------------|---------------------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                                   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11a CH 149 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |                                       |

**Horizontal**

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | Remark | A/Pos   | T/Pos | Pol/Phase      |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|--------|---------|-------|----------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB     | cm      | deg   |                |
| 1 | 11490.32 | 59.67  | 74.00         | -14.33        | 51.06         | 5.11                        | 38.78            | 35.28  | Peak    | 102   | 322 HORIZONTAL |
| 2 | 11491.12 | 45.71  | 54.00         | -8.29         | 37.10         | 5.11                        | 38.78            | 35.28  | Average | 102   | 322 HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | Remark | A/Pos   | T/Pos | Pol/Phase    |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|--------|---------|-------|--------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB     | cm      | deg   |              |
| 1 | 11486.39 | 61.35  | 74.00         | -12.65        | 52.74         | 5.11                        | 38.78            | 35.28  | Peak    | 100   | 249 VERTICAL |
| 2 | 11491.28 | 48.00  | 54.00         | -6.00         | 39.39         | 5.11                        | 38.78            | 35.28  | Average | 100   | 249 VERTICAL |

|                      |               |                       |                                       |
|----------------------|---------------|-----------------------|---------------------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                                   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11a CH 157 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |                                       |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 11570.24 | 60.72  | 74.00      | -13.28     | 52.05      | 5.14              | 38.83          | 35.30         | Peak    | 99    | 318   | HORIZONTAL |
| 2 | 11571.28 | 46.36  | 54.00      | -7.64      | 37.69      | 5.14              | 38.83          | 35.30         | Average | 99    | 318   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 11570.32 | 64.25  | 74.00      | -9.75      | 55.58      | 5.14              | 38.83          | 35.30         | Peak    | 99    | 246   | VERTICAL  |
| 2 | 11571.28 | 50.14  | 54.00      | -3.86      | 41.47      | 5.14              | 38.83          | 35.30         | Average | 99    | 246   | VERTICAL  |

|                      |               |                       |                                       |
|----------------------|---------------|-----------------------|---------------------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                                   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11a CH 165 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 09, 2013 |                       |                                       |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 11650.40 | 61.66  | 74.00      | -12.34     | 52.94      | 5.16       | 38.86          | 35.30         | Peak    | 100   | 321   | HORIZONTAL |
| 2 | 11651.44 | 48.28  | 54.00      | -5.72      | 39.56      | 5.16       | 38.86          | 35.30         | Average | 100   | 321   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 11650.24 | 67.45  | 74.00      | -6.55      | 58.73      | 5.16       | 38.86          | 35.30         | Peak    | 100   | 250   | VERTICAL  |
| 2 | 11651.44 | 53.64  | 54.00      | -0.36      | 44.92      | 5.16       | 38.86          | 35.30         | Average | 100   | 250   | VERTICAL  |

For beamforming mode:

For 5GHz Band:

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11ac MCS2/Nss1 20MHz CH 149 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 12, 2013 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 11485.43 | 45.75  | 54.00      | -8.25      | 37.14      | 5.11       | 38.78          | 35.28         | Average | 100   | 305   | HORIZONTAL |
| 2 | 11491.12 | 57.25  | 74.00      | -16.75     | 48.64      | 5.11       | 38.78          | 35.28         | Peak    | 100   | 305   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 11489.13 | 45.46  | 54.00      | -8.54      | 36.85      | 5.11       | 38.78          | 35.28         | Average | 100   | 272   | VERTICAL  |
| 2 | 11491.12 | 58.23  | 74.00      | -15.77     | 49.62      | 5.11       | 38.78          | 35.28         | Peak    | 100   | 272   | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11ac MCS2/Nss1 20MHz CH 157 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 12, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |            |
| 1 | 11566.79 | 44.02  | 54.00  | -9.98  | 35.37 | 5.13  | 38.82   | 35.30  | Average | 100   | 230   | HORIZONTAL |
| 2 | 11569.36 | 55.34  | 74.00  | -18.66 | 46.68 | 5.13  | 38.83   | 35.30  | Peak    | 100   | 230   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |           |
| 1 | 11576.97 | 46.34  | 54.00  | -7.66  | 37.67 | 5.14  | 38.83   | 35.30  | Average | 100   | 308   | VERTICAL  |
| 2 | 11577.21 | 58.85  | 74.00  | -15.15 | 50.18 | 5.14  | 38.83   | 35.30  | Peak    | 100   | 308   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11ac MCS2/Nss1 20MHz CH 165 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 12, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |            |
| 1 | 11648.48 | 46.99  | 54.00  | -7.01  | 38.27 | 5.16  | 38.86   | 35.30  | Average | 100   | 247   | HORIZONTAL |
| 2 | 11650.96 | 59.79  | 74.00  | -14.21 | 51.07 | 5.16  | 38.86   | 35.30  | Peak    | 100   | 247   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |           |
| 1 | 11640.95 | 47.83  | 54.00  | -6.17  | 39.11 | 5.16  | 38.86   | 35.30  | Average | 100   | 298   | VERTICAL  |
| 2 | 11651.12 | 62.82  | 74.00  | -11.18 | 54.10 | 5.16  | 38.86   | 35.30  | Peak    | 100   | 298   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11ac MCS2/Nss1 40MHz CH 151 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 12, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | Remark | A/Pos   | T/Pos | Pol/Phase      |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|----------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     | cm      | deg   |                |
| 1 | 11510.08 | 58.52  | 74.00  | -15.48 | 49.89 | 5.12         | 38.79  | 35.28  | Peak    | 100   | 243 HORIZONTAL |
| 2 | 11514.17 | 43.45  | 54.00  | -10.55 | 34.82 | 5.12         | 38.79  | 35.28  | Average | 100   | 243 HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | Remark | A/Pos   | T/Pos | Pol/Phase    |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|--------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     | cm      | deg   |              |
| 1 | 11504.55 | 44.03  | 54.00  | -9.97  | 35.40 | 5.12         | 38.79  | 35.28  | Average | 100   | 274 VERTICAL |
| 2 | 11509.68 | 57.91  | 74.00  | -16.09 | 49.28 | 5.12         | 38.79  | 35.28  | Peak    | 100   | 274 VERTICAL |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11ac MCS2/Nss1 40MHz CH 159 / Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 12, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 11588.24 | 56.58  | 74.00      | -17.42     | 47.91      | 5.14       | 38.83          | 35.30         | Peak    | 100   | 236   | HORIZONTAL |
| 2 | 11590.08 | 44.27  | 54.00      | -9.73      | 35.60      | 5.14       | 38.83          | 35.30         | Average | 100   | 236   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 11588.64 | 45.30  | 54.00      | -8.70      | 36.63      | 5.14       | 38.83          | 35.30         | Average | 100   | 271   | VERTICAL  |
| 2 | 11589.92 | 62.26  | 74.00      | -11.74     | 53.59      | 5.14       | 38.83          | 35.30         | Peak    | 100   | 271   | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11ac MCS2/Nss1 80MHz CH 155 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Nov. 12, 2013 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | PoI/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4999.73  | 57.23  | 74.00      | -16.77     | 55.46      | 3.39              | 33.39          | 35.01         | Peak    | 100   | 161   | HORIZONTAL |
| 2 | 4999.96  | 49.84  | 54.00      | -4.16      | 48.07      | 3.39              | 33.39          | 35.01         | Average | 100   | 161   | HORIZONTAL |
| 3 | 11560.42 | 40.13  | 54.00      | -13.87     | 31.48      | 5.13              | 38.82          | 35.30         | Average | 100   | 312   | HORIZONTAL |
| 4 | 11571.07 | 51.67  | 74.00      | -22.33     | 43.00      | 5.14              | 38.83          | 35.30         | Peak    | 100   | 312   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | PoI/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4999.62  | 51.19  | 54.00      | -2.81      | 49.41      | 3.39              | 33.40          | 35.01         | Average | 100   | 52    | VERTICAL  |
| 2 | 5000.08  | 58.87  | 74.00      | -15.13     | 57.09      | 3.39              | 33.40          | 35.01         | Peak    | 100   | 52    | VERTICAL  |
| 3 | 11558.81 | 40.31  | 54.00      | -13.69     | 31.66      | 5.13              | 38.82          | 35.30         | Average | 100   | 255   | VERTICAL  |
| 4 | 11571.15 | 51.61  | 74.00      | -22.39     | 42.94      | 5.14              | 38.83          | 35.30         | Peak    | 100   | 255   | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                          | Setting  |
|---|--|
| Attenuation                                 | Auto   |
| Span Frequency                              | 100 MHz  |
| RBW / VBW (Emission in restricted band)     | 1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average |
| RBW / VBW (Emission in non-restricted band) | 100 kHz / 300 kHz for Peak                     |

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.  
Only worst data of each operating mode is presented.

#### 4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming mode:

For 2.4GHz Band:

|               |               |                |   |
|---------------|---------------|----------------|---|
| Temperature   | 25°C          | Humidity       | 54%   |
| Test Engineer | James Chou    | Configurations | IEEE 802.11n MCS0 20MHz CH 1, 6, 11 / Ant. 1 + Ant. 2 |
| Test date     | Oct. 29, 2013 |                |   |

##### Channel 1

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2387.80 | 70.72  | 74.00      | -3.28      | 40.34      | 2.21       | 28.17          | 0.00          | Peak    | 100   | 234   | VERTICAL  |
| 2 | 2390.00 | 53.65  | 54.00      | -0.35      | 23.26      | 2.22       | 28.17          | 0.00          | Average | 100   | 234   | VERTICAL  |
| 3 | 2408.00 | 103.53 |            |            | 73.10      | 2.22       | 28.21          | 0.00          | Average | 100   | 234   | VERTICAL  |
| 4 | 2408.20 | 114.13 |            |            | 83.70      | 2.22       | 28.21          | 0.00          | Peak    | 100   | 234   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2390.00 | 53.70  | 54.00      | -0.30      | 23.31      | 2.22       | 28.17          | 0.00          | Average | 101   | 204   | VERTICAL  |
| 2 | 2390.00 | 69.47  | 74.00      | -4.53      | 39.08      | 2.22       | 28.17          | 0.00          | Peak    | 101   | 204   | VERTICAL  |
| 3 | 2433.00 | 109.55 |            |            | 79.07      | 2.23       | 28.25          | 0.00          | Average | 101   | 204   | VERTICAL  |
| 4 | 2441.00 | 120.30 |            |            | 89.77      | 2.24       | 28.29          | 0.00          | Peak    | 101   | 204   | VERTICAL  |
| 5 | 2483.50 | 53.69  | 54.00      | -0.31      | 23.06      | 2.26       | 28.37          | 0.00          | Average | 101   | 204   | VERTICAL  |
| 6 | 2483.90 | 71.61  | 74.00      | -2.39      | 40.98      | 2.26       | 28.37          | 0.00          | Peak    | 101   | 204   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2465.40 | 105.47 |            |            | 74.90      | 2.24       | 28.33          | 0.00          | Average | 100   | 320   | VERTICAL  |
| 2 | 2467.80 | 116.02 |            |            | 85.43      | 2.26       | 28.33          | 0.00          | Peak    | 100   | 320   | VERTICAL  |
| 3 | 2483.50 | 73.72  | 74.00      | -0.28      | 43.09      | 2.26       | 28.37          | 0.00          | Peak    | 100   | 320   | VERTICAL  |
| 4 | 2483.54 | 53.35  | 54.00      | -0.65      | 22.72      | 2.26       | 28.37          | 0.00          | Average | 100   | 320   | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2462 MHz.

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11n MCS0 40MHz CH 3, 6, 9 /<br>Ant. 1 + Ant. 2 |
| <b>Test date</b>     | Oct. 29, 2013 |                       |   |

### Channel 3

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2383.60 | 67.02  | 74.00      | -6.98      | 36.64      | 2.21       | 28.17          | 0.00          | Peak    | 108   | 207   | VERTICAL  |
| 2 | 2388.80 | 53.85  | 54.00      | -0.15      | 23.47      | 2.21       | 28.17          | 0.00          | Average | 108   | 207   | VERTICAL  |
| 3 | 2426.00 | 100.31 |            |            | 69.83      | 2.23       | 28.25          | 0.00          | Average | 108   | 207   | VERTICAL  |
| 4 | 2426.00 | 111.58 |            |            | 81.10      | 2.23       | 28.25          | 0.00          | Peak    | 108   | 207   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2390.00 | 53.43  | 54.00      | -0.57      | 23.04      | 2.22       | 28.17          | 0.00          | Average | 100   | 208   | VERTICAL  |
| 2 | 2390.00 | 68.84  | 74.00      | -5.16      | 38.45      | 2.22       | 28.17          | 0.00          | Peak    | 100   | 208   | VERTICAL  |
| 3 | 2430.20 | 113.08 |            |            | 82.60      | 2.23       | 28.25          | 0.00          | Peak    | 100   | 208   | VERTICAL  |
| 4 | 2433.00 | 101.57 |            |            | 71.09      | 2.23       | 28.25          | 0.00          | Average | 100   | 208   | VERTICAL  |
| 5 | 2483.50 | 53.48  | 54.00      | -0.52      | 22.85      | 2.26       | 28.37          | 0.00          | Average | 100   | 208   | VERTICAL  |
| 6 | 2483.50 | 68.31  | 74.00      | -5.69      | 37.68      | 2.26       | 28.37          | 0.00          | Peak    | 100   | 208   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 9

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2446.00 | 98.88  |            |            | 68.35      | 2.24       | 28.29          | 0.00          | Average | 153   | 203   | VERTICAL  |
| 2 | 2446.40 | 110.69 |            |            | 80.16      | 2.24       | 28.29          | 0.00          | Peak    | 153   | 203   | VERTICAL  |
| 3 | 2483.50 | 53.65  | 54.00      | -0.35      | 23.02      | 2.26       | 28.37          | 0.00          | Average | 153   | 203   | VERTICAL  |
| 4 | 2485.90 | 68.09  | 74.00      | -5.91      | 37.42      | 2.26       | 28.41          | 0.00          | Peak    | 153   | 203   | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

|                      |               |                       |                                      |
|----------------------|---------------|-----------------------|--------------------------------------|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%                                  |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11b CH 1, 6, 11 /<br>Ant. 1 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |                                      |

**Channel 1**

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 2387.20 | 61.81  | 74.00  | -12.19 | 31.43 | 2.21  | 28.17   | 0.00   | Peak    | 100   | 290   | VERTICAL  |
| 2 | 2390.00 | 50.43  | 54.00  | -3.57  | 20.04 | 2.22  | 28.17   | 0.00   | Average | 100   | 290   | VERTICAL  |
| 3 | 2411.00 | 113.46 |        |        | 83.03 | 2.22  | 28.21   | 0.00   | Peak    | 100   | 290   | VERTICAL  |
| 4 | 2411.20 | 109.84 |        |        | 79.41 | 2.22  | 28.21   | 0.00   | Average | 100   | 290   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 2386.80 | 63.43  | 74.00  | -10.57 | 33.05 | 2.21  | 28.17   | 0.00   | Peak    | 123   | 69    | VERTICAL  |
| 2 | 2387.60 | 51.30  | 54.00  | -2.70  | 20.92 | 2.21  | 28.17   | 0.00   | Average | 123   | 69    | VERTICAL  |
| 3 | 2436.20 | 112.29 |        |        | 81.77 | 2.23  | 28.29   | 0.00   | Average | 123   | 69    | VERTICAL  |
| 4 | 2436.20 | 116.16 |        |        | 85.64 | 2.23  | 28.29   | 0.00   | Peak    | 123   | 69    | VERTICAL  |
| 5 | 2499.90 | 53.00  | 54.00  | -1.00  | 22.32 | 2.27  | 28.41   | 0.00   | Average | 123   | 69    | VERTICAL  |
| 6 | 2499.90 | 62.61  | 74.00  | -11.39 | 31.93 | 2.27  | 28.41   | 0.00   | Peak    | 123   | 69    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

|   | Freq    | Level  | Limit  | Over  | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 2461.00 | 114.19 |        |       | 83.62 | 2.24  | 28.33   | 0.00   | Peak    | 116   | 287   | VERTICAL  |
| 2 | 2461.20 | 110.36 |        |       | 79.79 | 2.24  | 28.33   | 0.00   | Average | 116   | 287   | VERTICAL  |
| 3 | 2485.70 | 64.80  | 74.00  | -9.20 | 34.13 | 2.26  | 28.41   | 0.00   | Peak    | 116   | 287   | VERTICAL  |
| 4 | 2487.70 | 52.47  | 54.00  | -1.53 | 21.80 | 2.26  | 28.41   | 0.00   | Average | 116   | 287   | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2462 MHz.

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 25°C          | <b>Humidity</b>       | 54%   |
| <b>Test Engineer</b> | James Chou    | <b>Configurations</b> | IEEE 802.11g CH 1, 6, 11 /<br>Ant. 1 + Ant. 2 |
| <b>Test Date</b>     | Oct. 29, 2013 |                       |   |

**Channel 1**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2388.20 | 71.48  | 74.00      | -2.52      | 41.10      | 2.21       | 28.17          | 0.00          | Peak    | 112   | 230   | VERTICAL  |
| 2 | 2390.00 | 53.85  | 54.00      | -0.15      | 23.46      | 2.22       | 28.17          | 0.00          | Average | 112   | 230   | VERTICAL  |
| 3 | 2409.00 | 106.07 |            |            | 75.64      | 2.22       | 28.21          | 0.00          | Average | 112   | 230   | VERTICAL  |
| 4 | 2409.40 | 116.44 |            |            | 86.01      | 2.22       | 28.21          | 0.00          | Peak    | 112   | 230   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2389.20 | 52.08  | 54.00      | -1.92      | 21.70      | 2.21       | 28.17          | 0.00          | Average | 152   | 202   | VERTICAL  |
| 2 | 2390.00 | 65.53  | 74.00      | -8.47      | 35.14      | 2.22       | 28.17          | 0.00          | Peak    | 152   | 202   | VERTICAL  |
| 3 | 2440.60 | 109.16 |            |            | 78.64      | 2.23       | 28.29          | 0.00          | Average | 152   | 202   | VERTICAL  |
| 4 | 2441.00 | 119.36 |            |            | 88.83      | 2.24       | 28.29          | 0.00          | Peak    | 152   | 202   | VERTICAL  |
| 5 | 2500.30 | 52.72  | 54.00      | -1.28      | 22.04      | 2.27       | 28.41          | 0.00          | Average | 152   | 202   | VERTICAL  |
| 6 | 2500.30 | 62.49  | 74.00      | -11.51     | 31.81      | 2.27       | 28.41          | 0.00          | Peak    | 152   | 202   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 2464.60 | 106.49 |            |            | 75.92      | 2.24       | 28.33          | 0.00          | Average | 107   | 288   | VERTICAL  |
| 2 | 2464.80 | 116.97 |            |            | 86.40      | 2.24       | 28.33          | 0.00          | Peak    | 107   | 288   | VERTICAL  |
| 3 | 2484.50 | 53.40  | 54.00      | -0.60      | 22.77      | 2.26       | 28.37          | 0.00          | Average | 107   | 288   | VERTICAL  |
| 4 | 2485.10 | 73.10  | 74.00      | -0.90      | 42.43      | 2.26       | 28.41          | 0.00          | Peak    | 107   | 288   | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band

For non-beamforming mode:


For 2.4GHz Band:

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

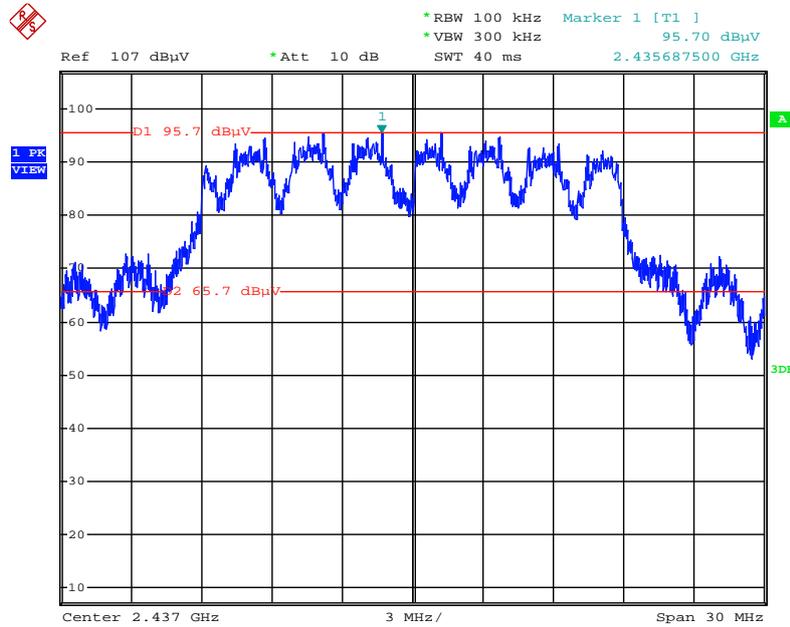


Date: 30.OCT.2013 01:22:07

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

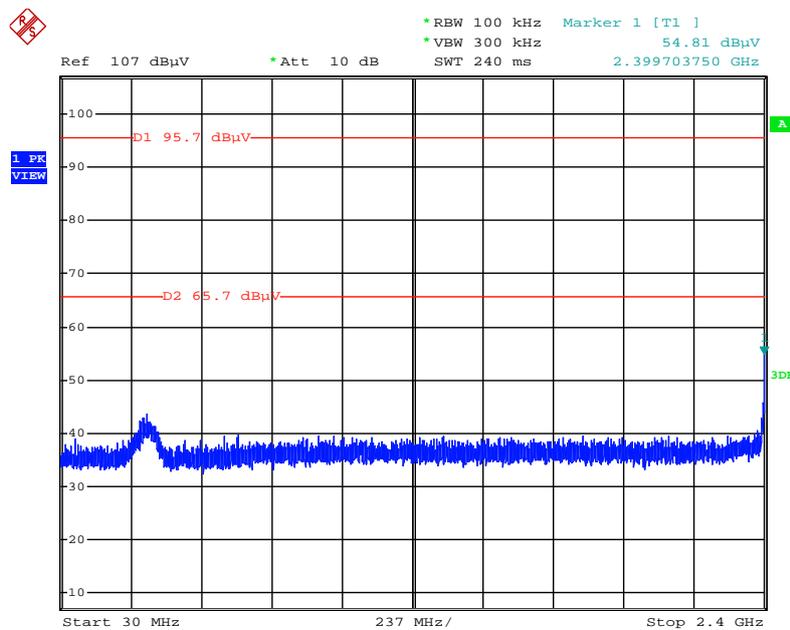


Date: 30.OCT.2013 01:23:20

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

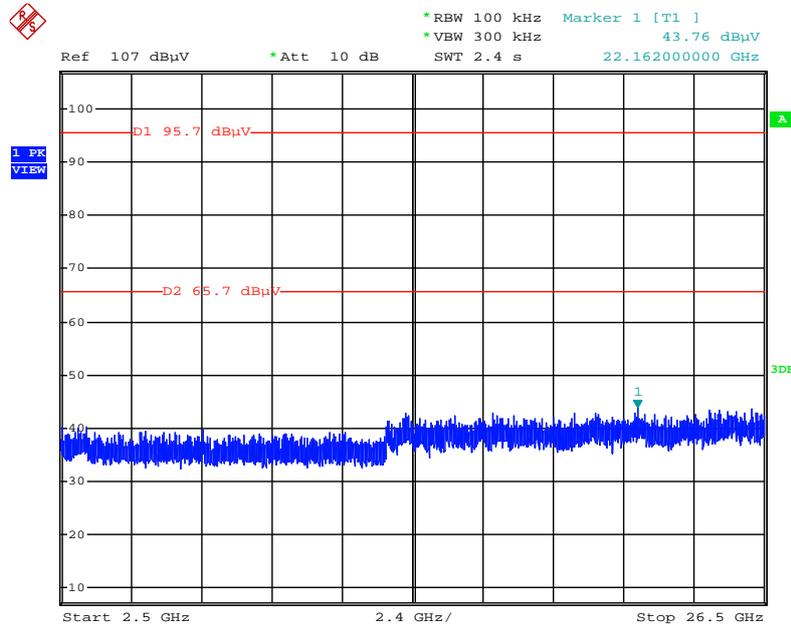


Date: 30.OCT.2013 01:23:50

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

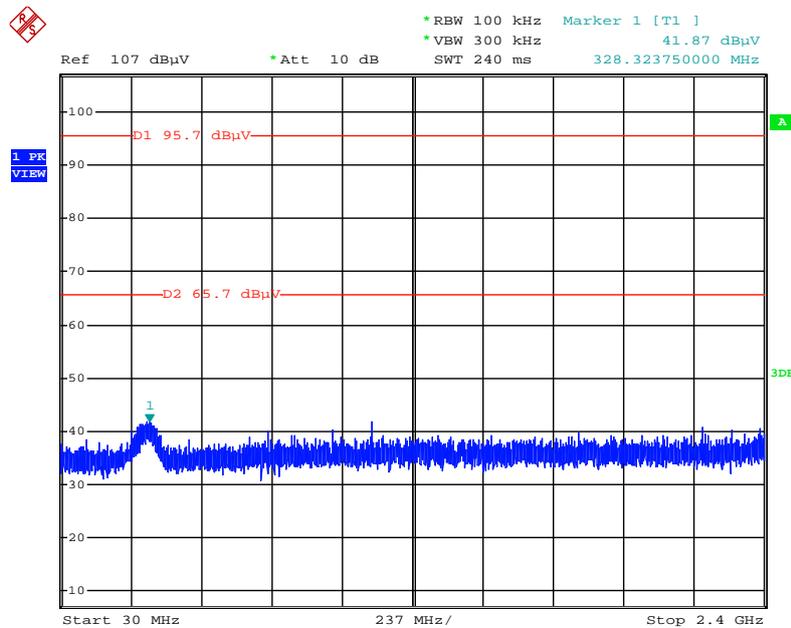


Date: 30.OCT.2013 01:25:38

## Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

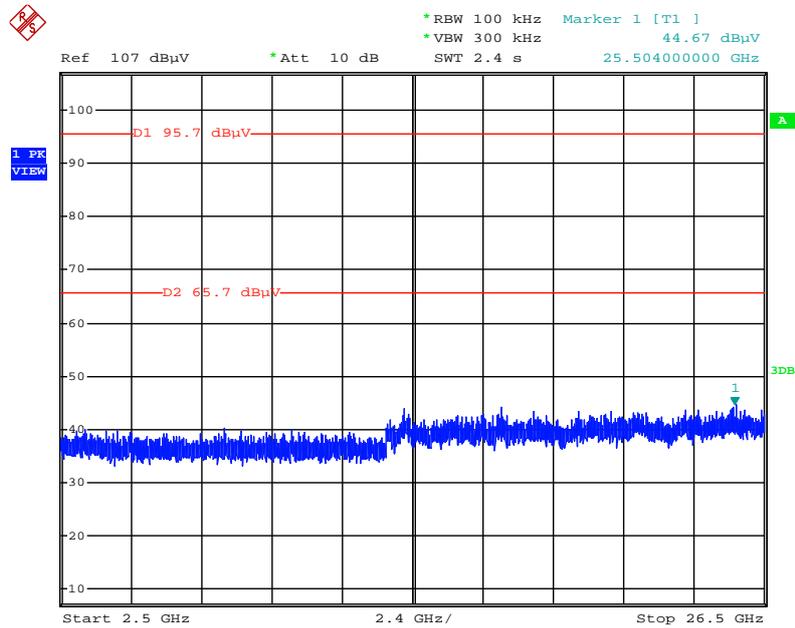


Date: 30.OCT.2013 01:24:49

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

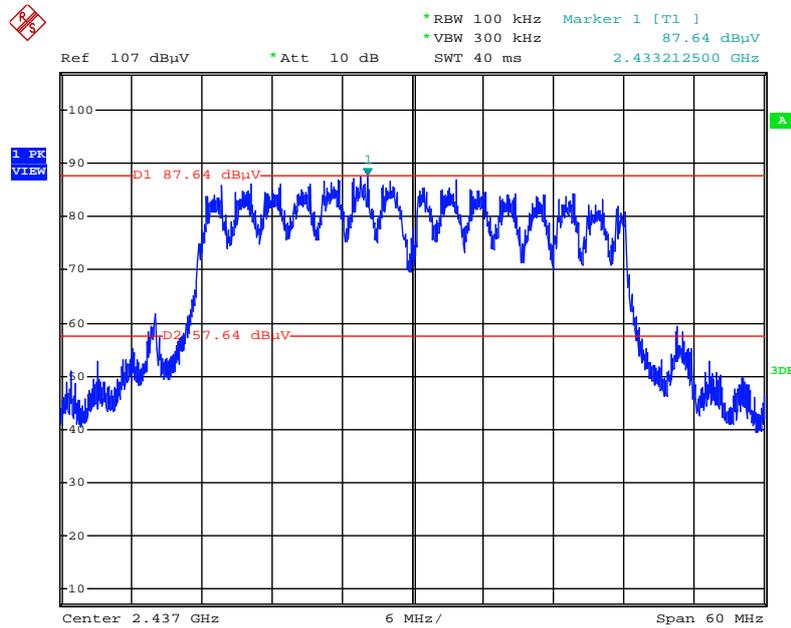


Date: 30.OCT.2013 01:29:50

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc)

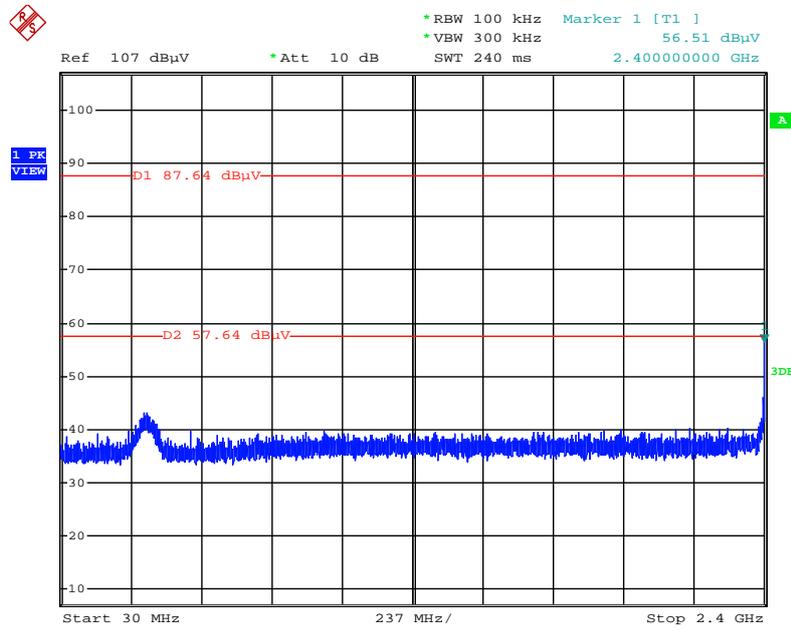


Date: 30.OCT.2013 01:31:36

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)

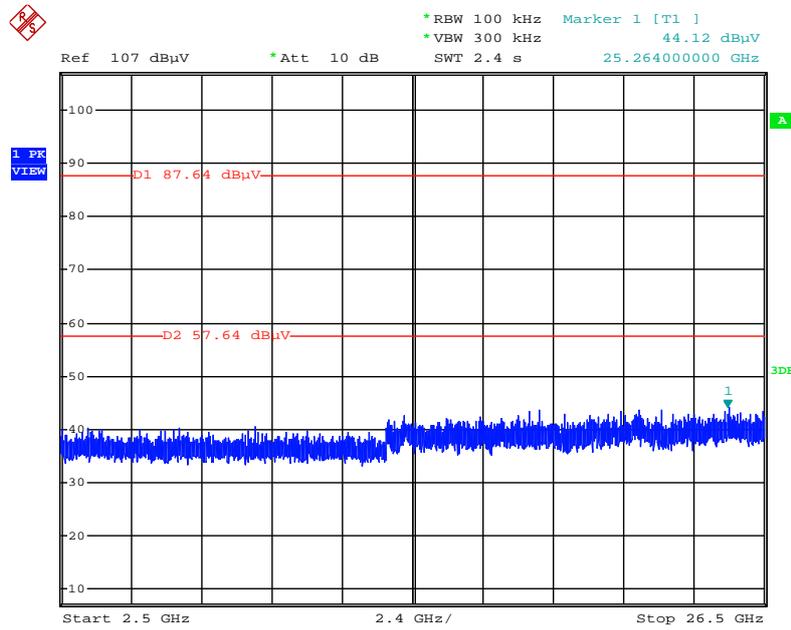


Date: 30.OCT.2013 01:32:14

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)

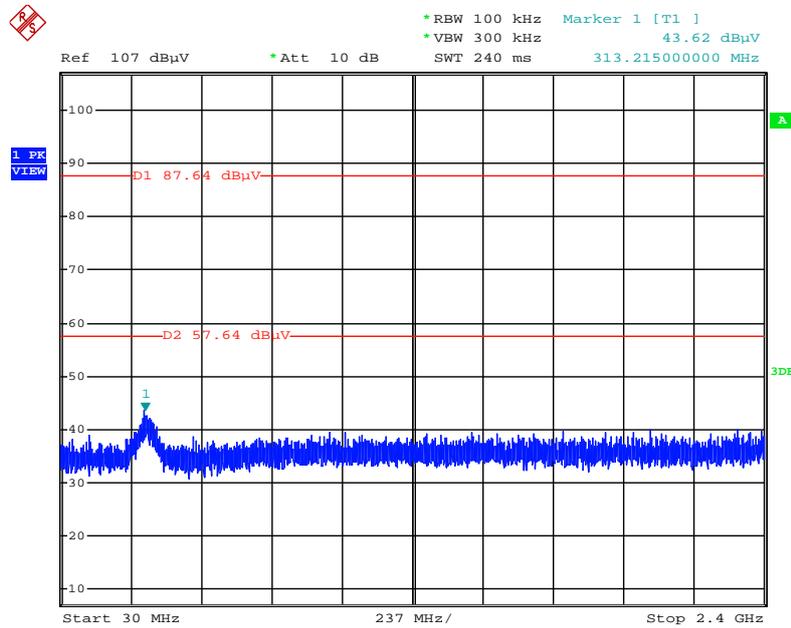


Date: 30.OCT.2013 01:33:45

## Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)

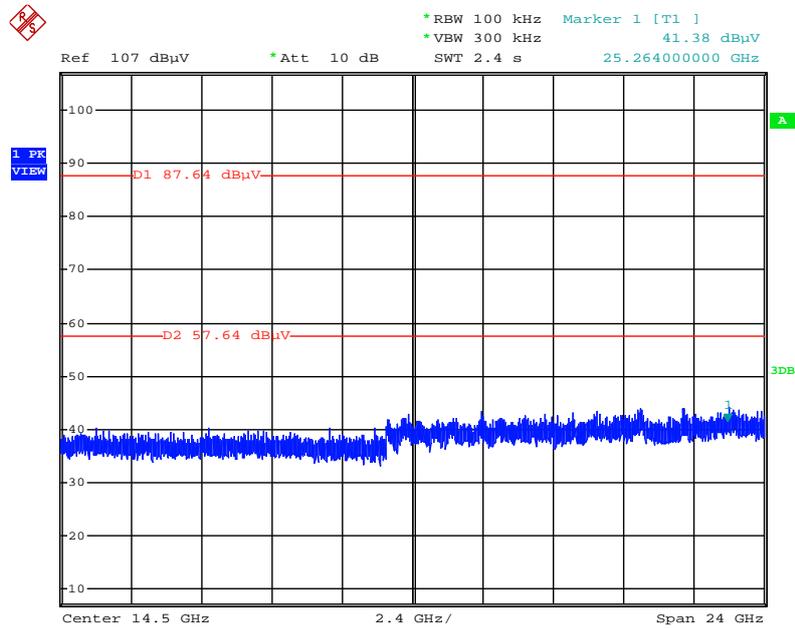


Date: 30.OCT.2013 01:33:07

Plot on Configuration IEEE 802.11b / Reference Level

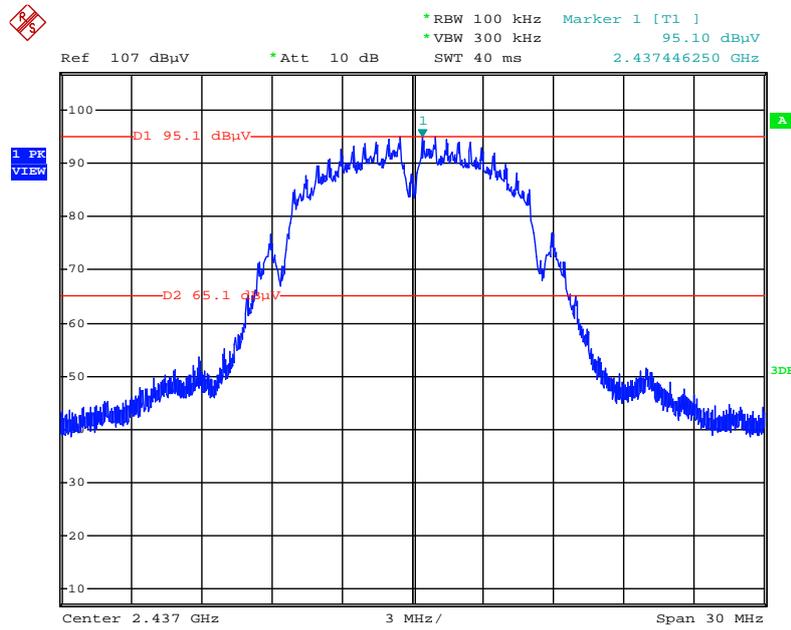


Date: 30.OCT.2013 01:07:05

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

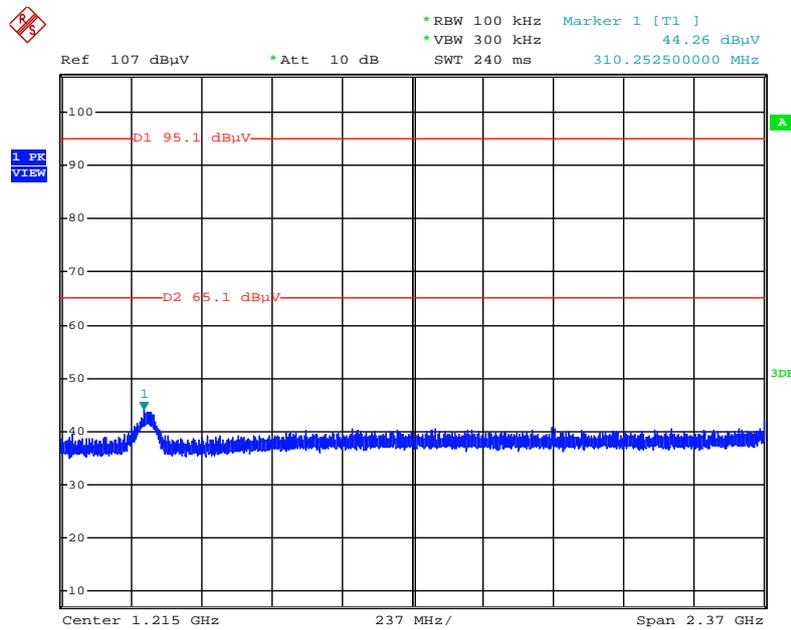


Date: 30.OCT.2013 01:10:53

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

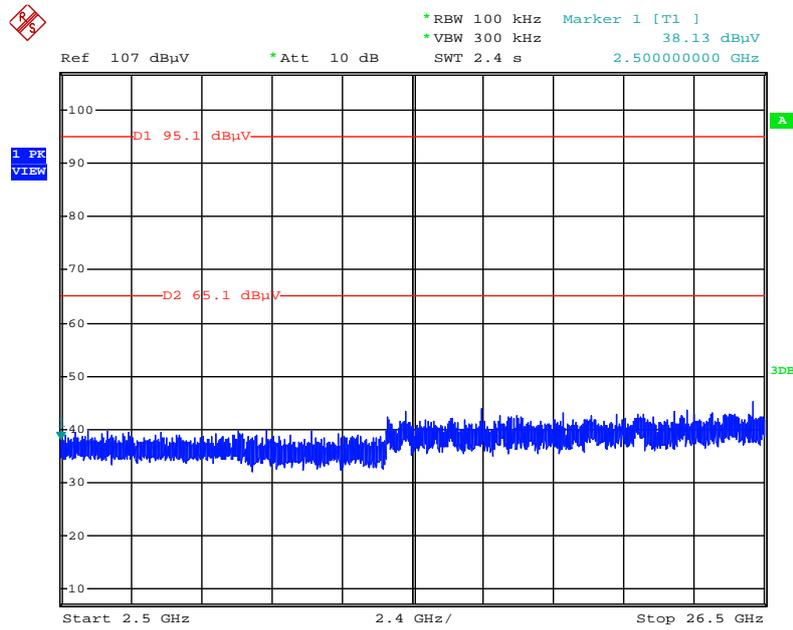


Date: 30.OCT.2013 01:11:38

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

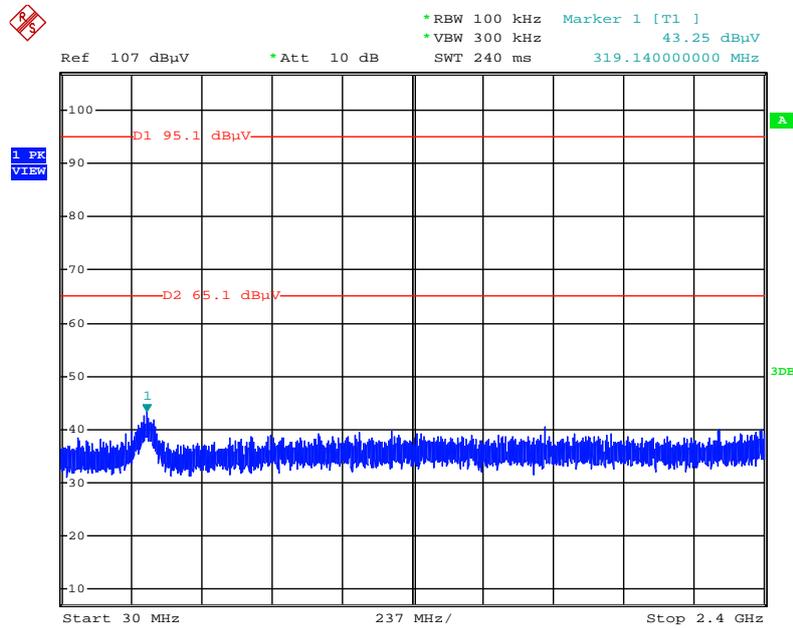


Date: 30.OCT.2013 01:12:37

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

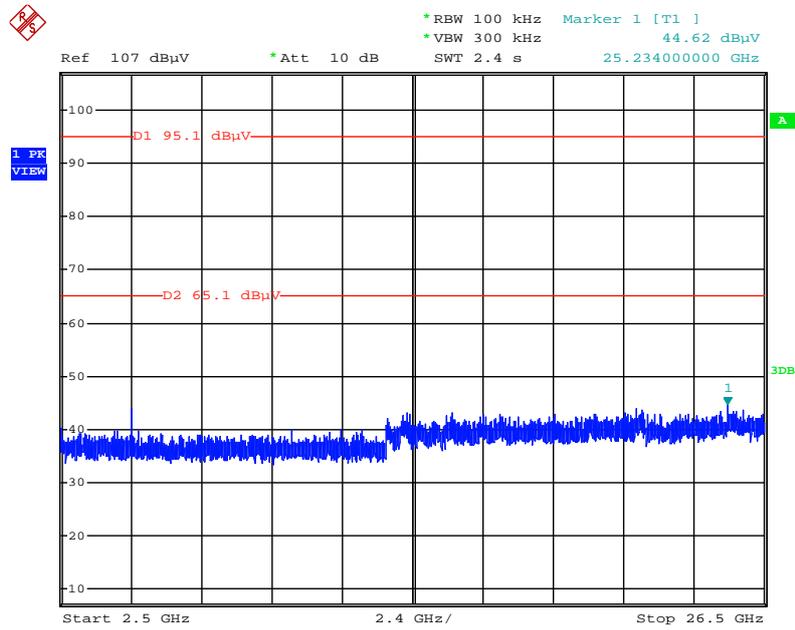


Date: 30.OCT.2013 01:12:15

Plot on Configuration IEEE 802.11g / Reference Level

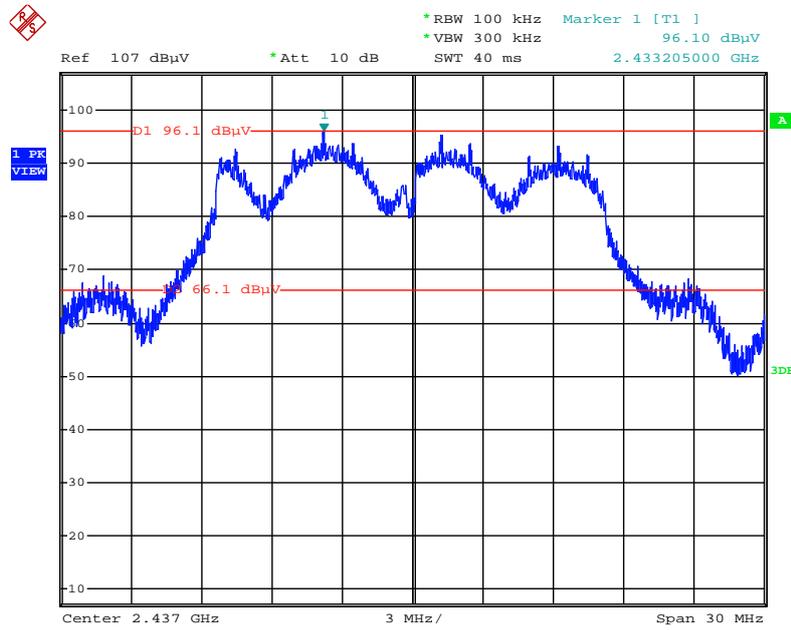


Date: 30.OCT.2013 01:15:56

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

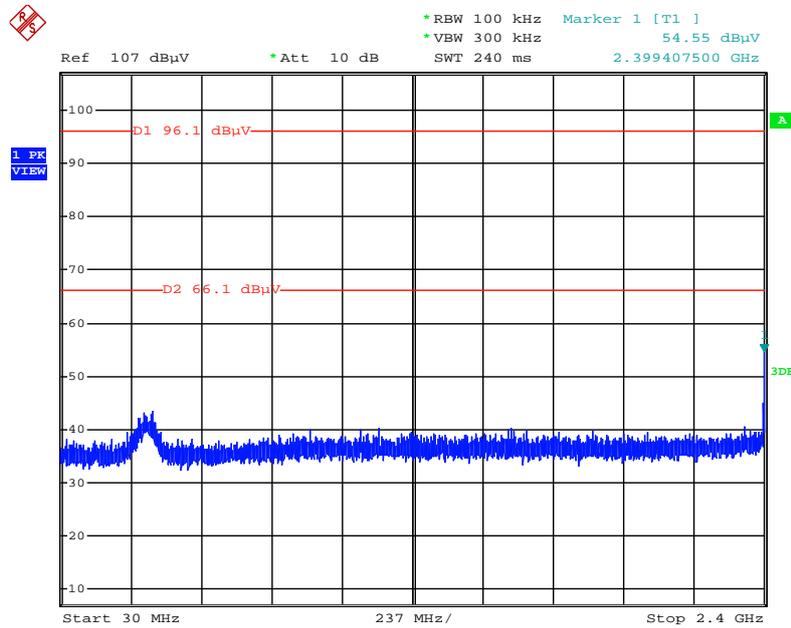


Date: 30.OCT.2013 01:17:22

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

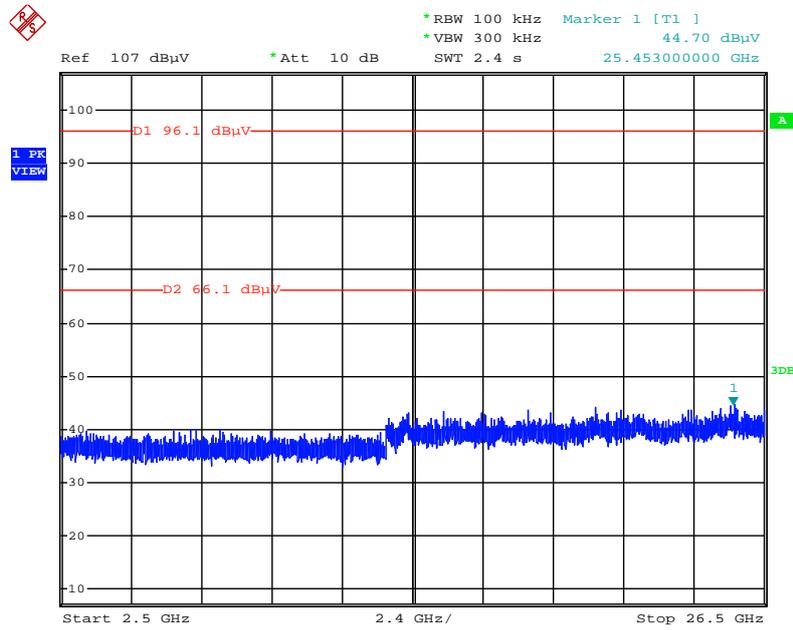


Date: 30.OCT.2013 01:17:48

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

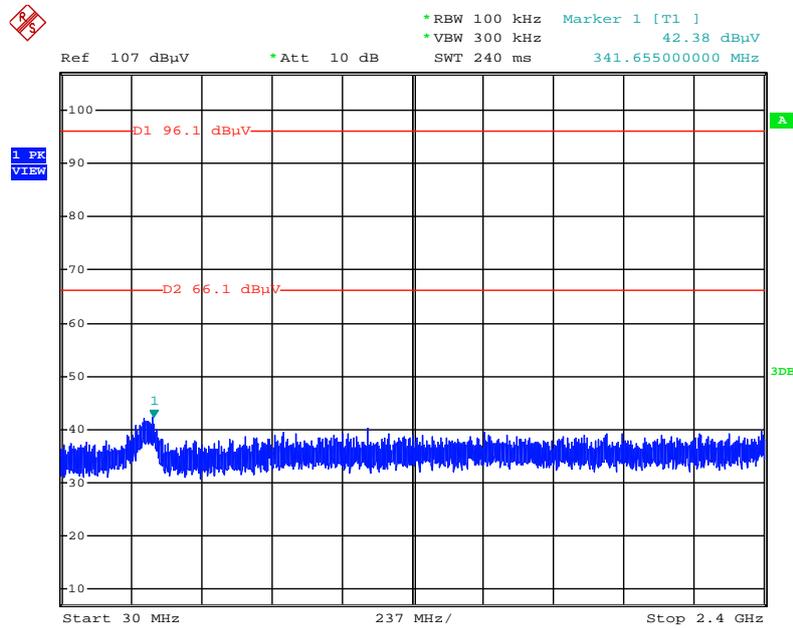

Date: 30.OCT.2013 01:19:16

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

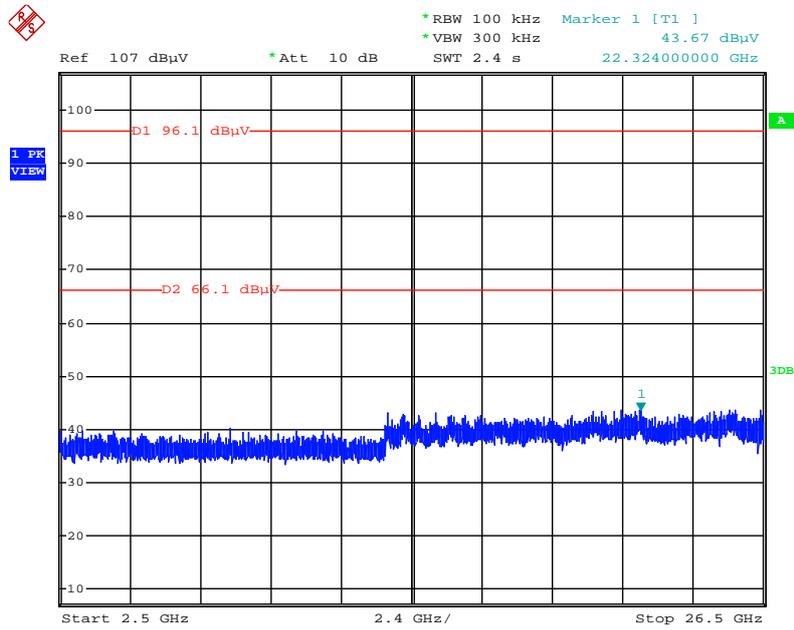


Date: 30.OCT.2013 01:18:51

For non-beamforming mode:


For 5GHz Band:

Plot on Configuration IEEE 802.11n 20MHz / Reference Level

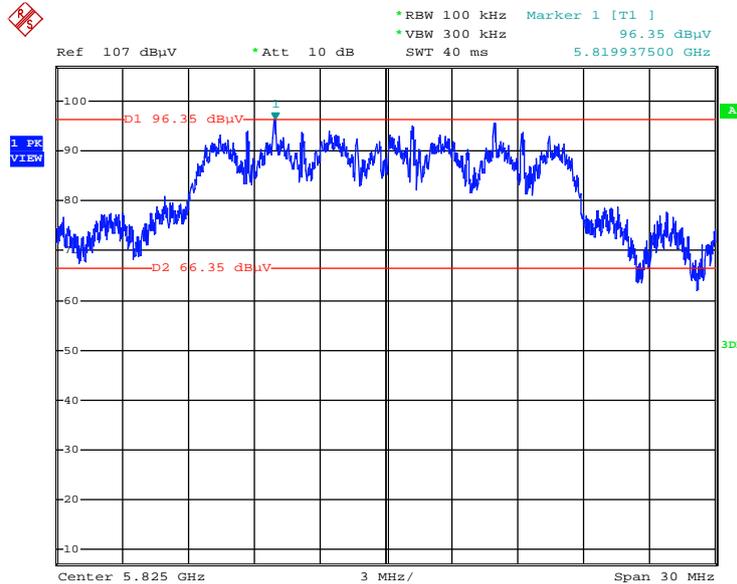


Date: 9.NOV.2013 18:24:10

Plot on Configuration IEEE 802.11n 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

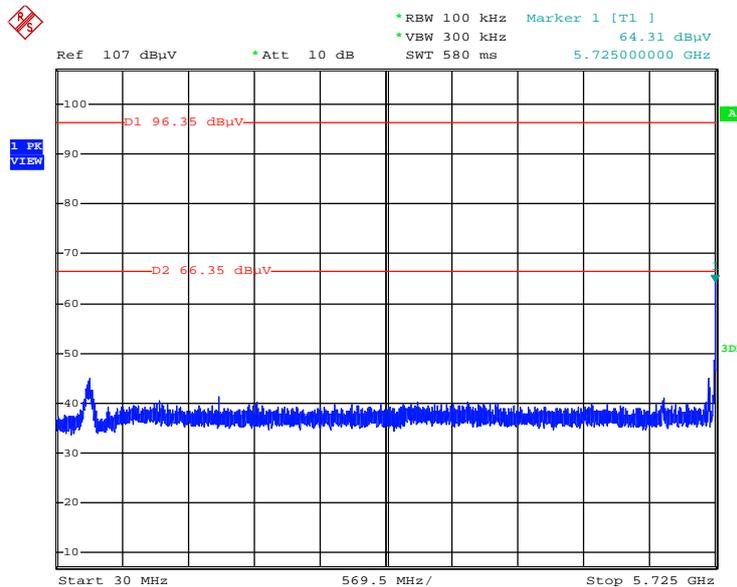


Date: 9.NOV.2013 18:29:17

Plot on Configuration IEEE 802.11n 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

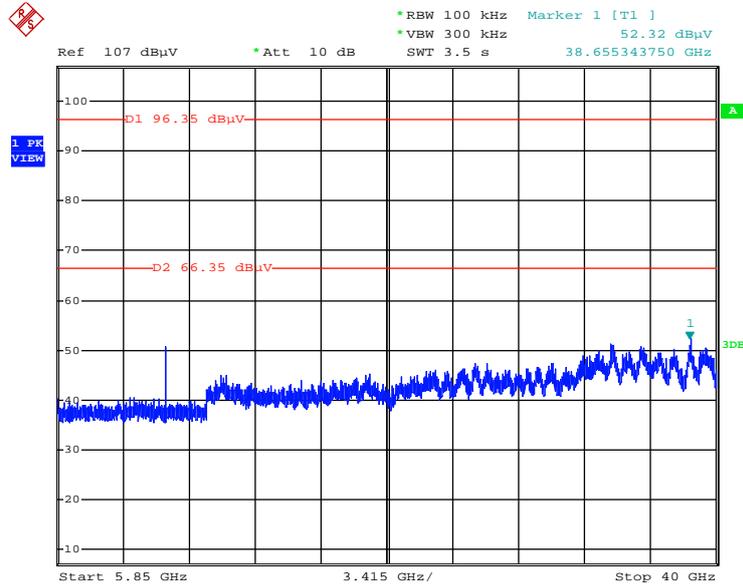


Date: 9.NOV.2013 18:30:06

Plot on Configuration IEEE 802.11n 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

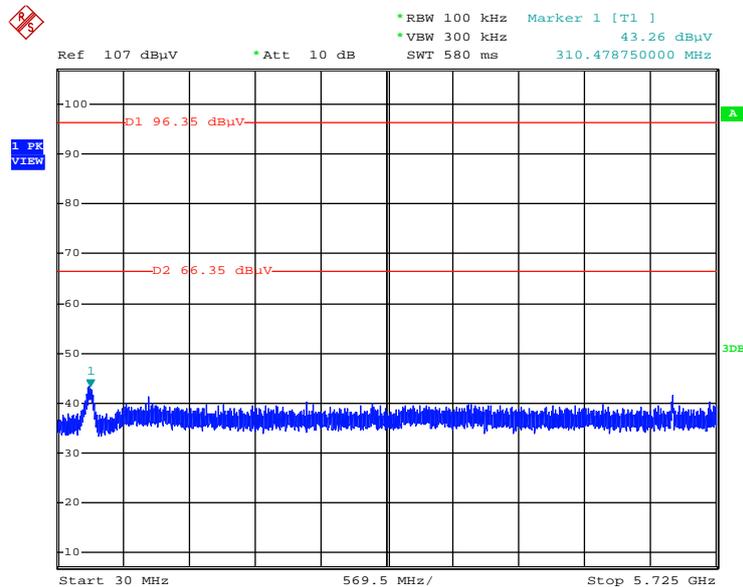


Date: 9.NOV.2013 18:24:46

Plot on Configuration IEEE 802.11n 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

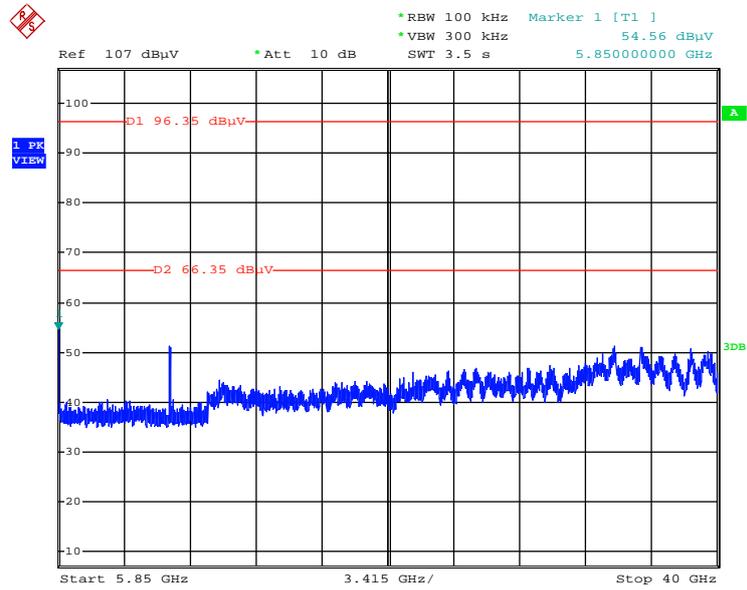


Date: 9.NOV.2013 18:25:23

Plot on Configuration IEEE 802.11n 40MHz / Reference Level

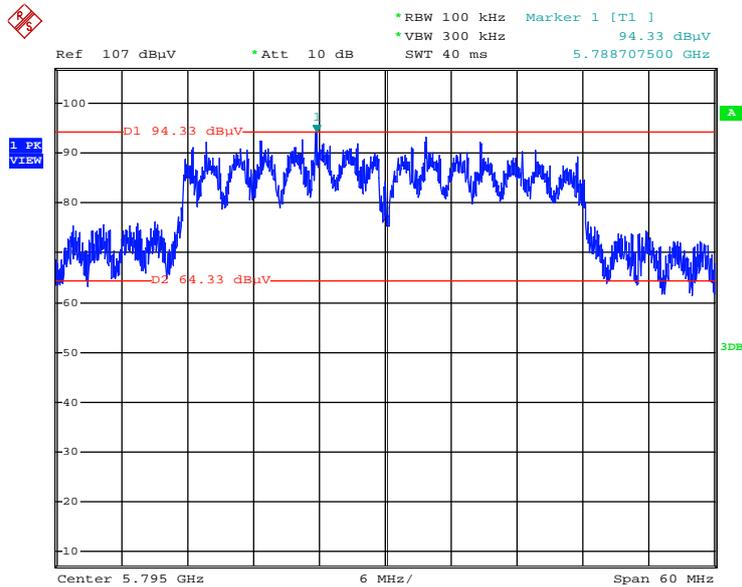


Date: 9.NOV.2013 18:12:44

Plot on Configuration IEEE 802.11n 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

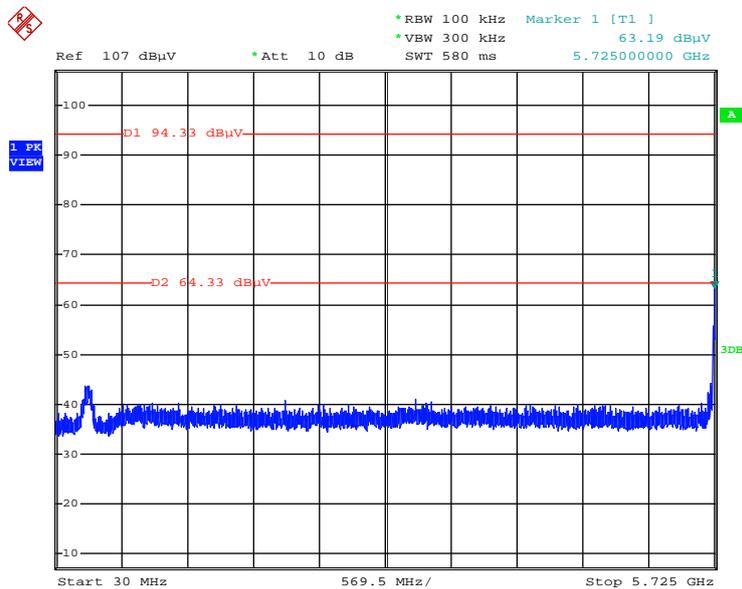


Date: 9.NOV.2013 18:16:24

Plot on Configuration IEEE 802.11n 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

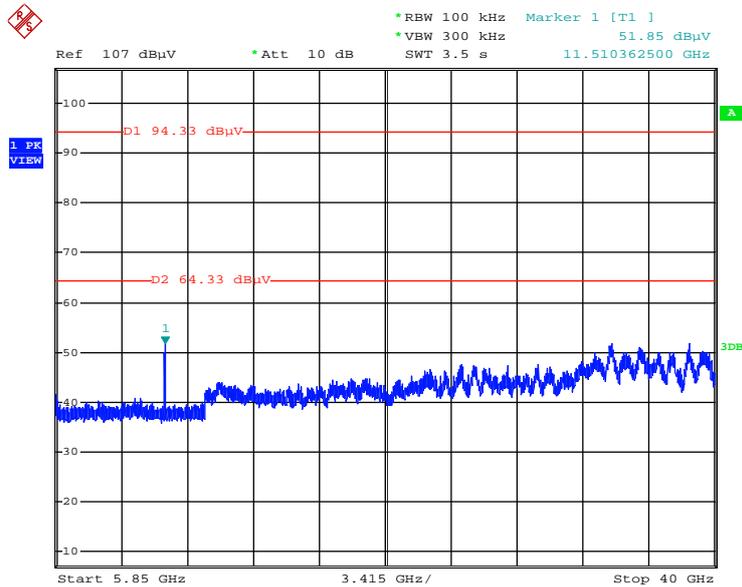


Date: 9.NOV.2013 18:17:39

Plot on Configuration IEEE 802.11n 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

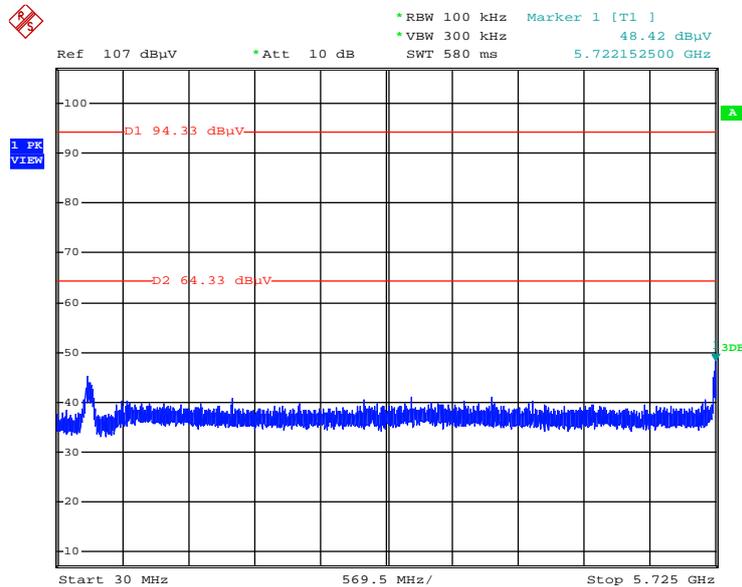


Date: 9.NOV.2013 18:13:26

Plot on Configuration IEEE 802.11n 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

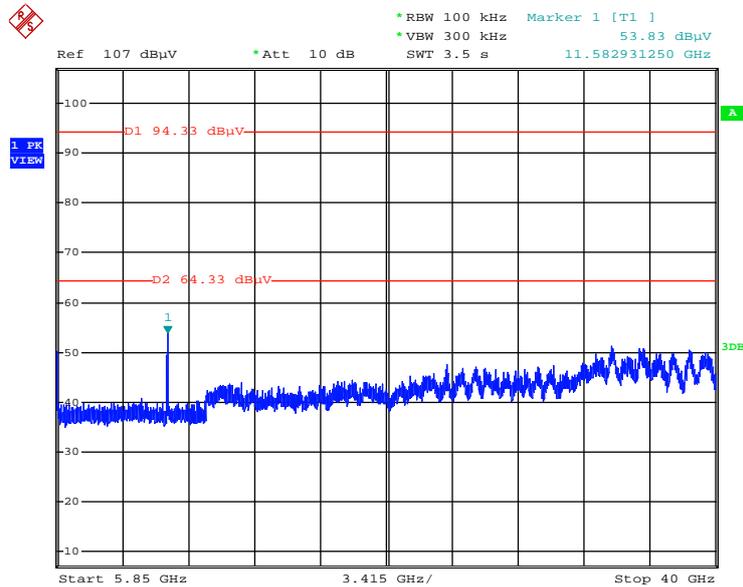


Date: 9.NOV.2013 18:14:05

Plot on Configuration IEEE 802.11a / Reference Level

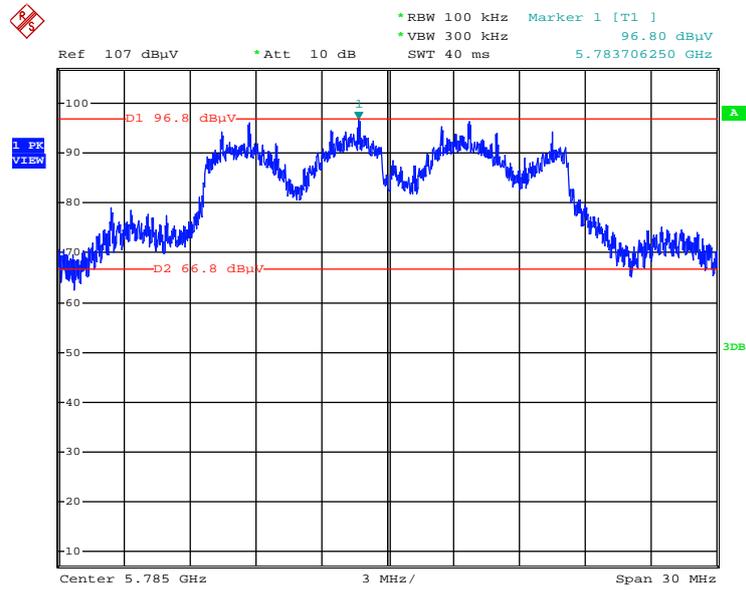


Date: 9.NOV.2013 18:41:34

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

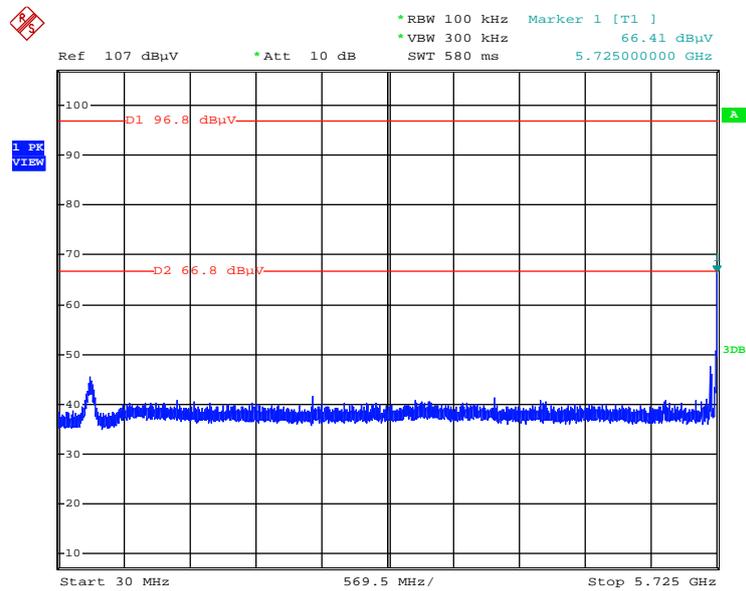


Date: 9.NOV.2013 18:44:04

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

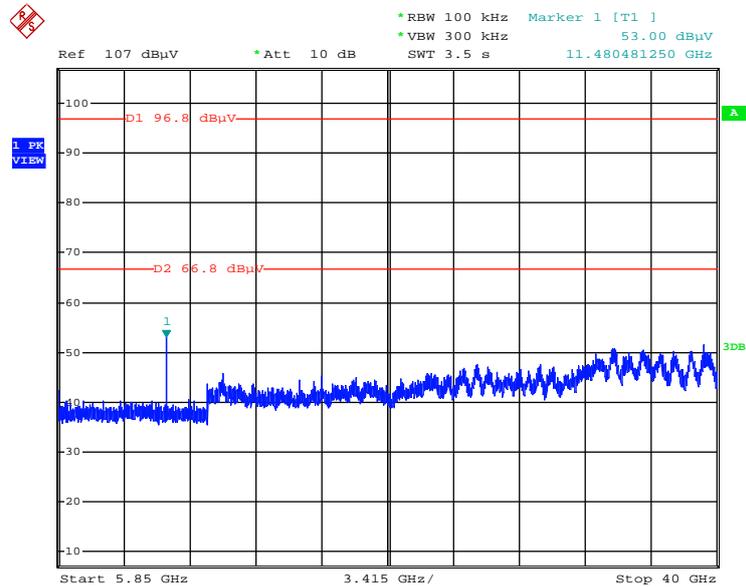


Date: 9.NOV.2013 18:45:05

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

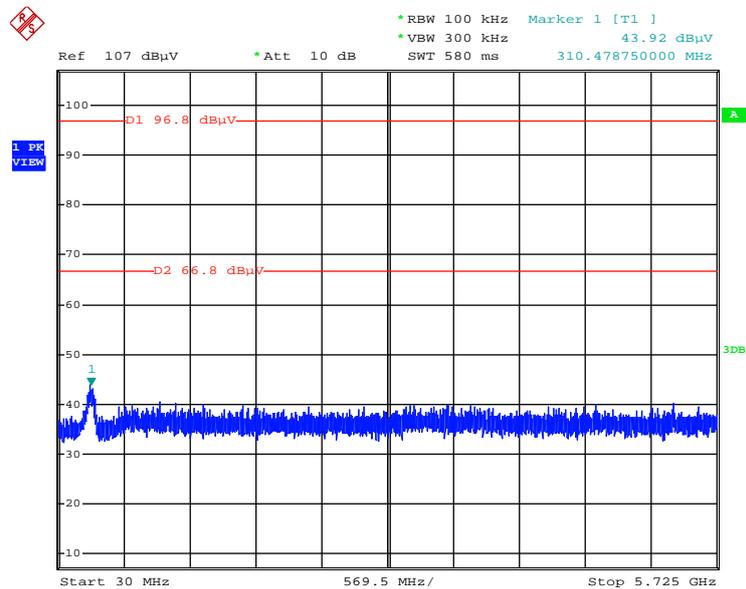

Date: 9.NOV.2013 18:52:57

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

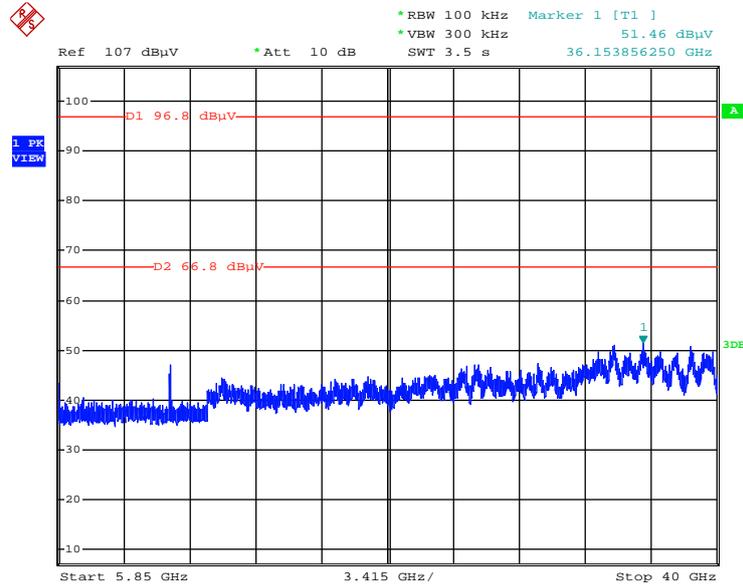


Date: 9.NOV.2013 18:53:31

For beamforming mode:


For 5GHz Band:

Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Reference Level

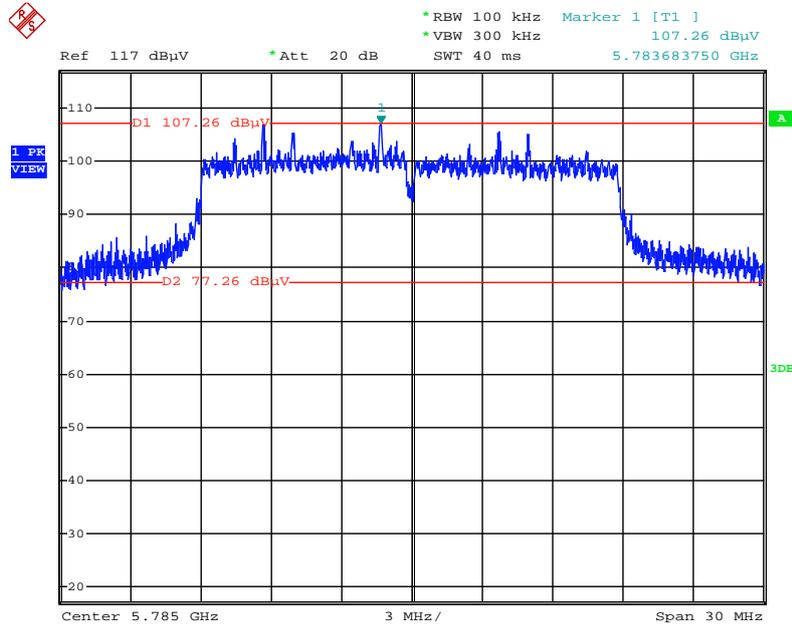


Date: 12.NOV.2013 19:32:39

Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

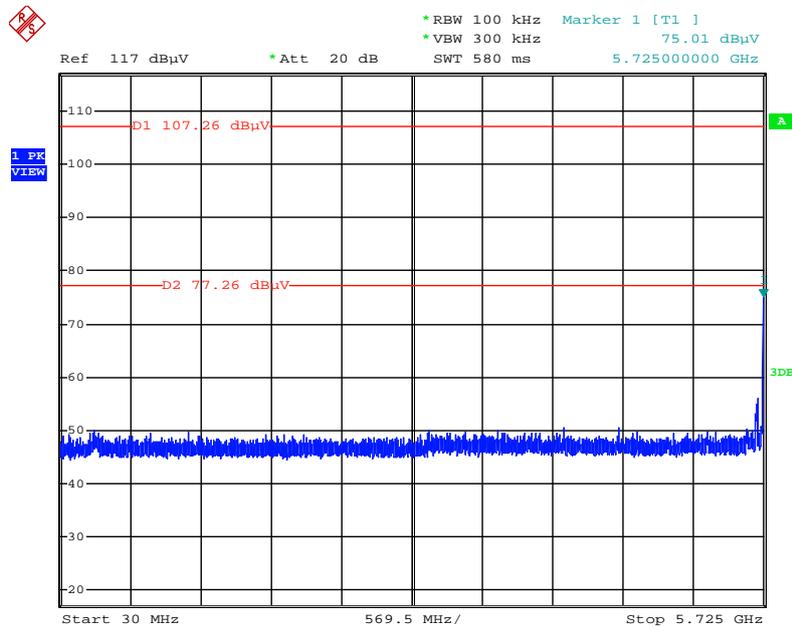


Date: 12.NOV.2013 19:35:59

Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

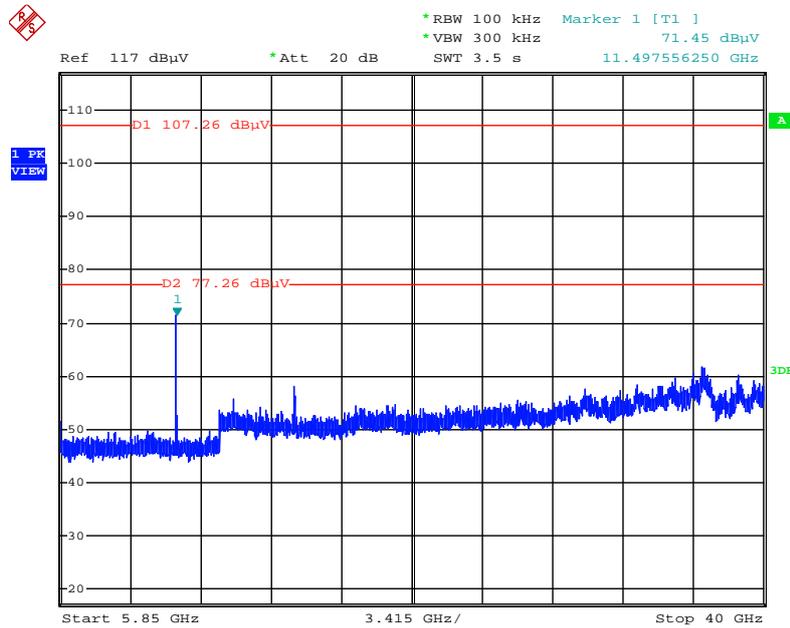

Date: 12.NOV.2013 19:36:45


Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

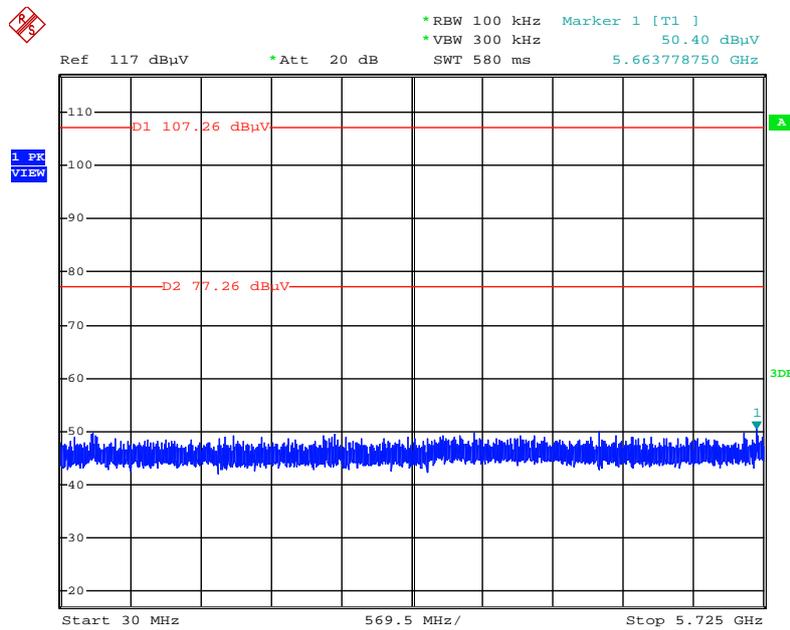

Date: 12.NOV.2013 19:38:02




Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Reference Level

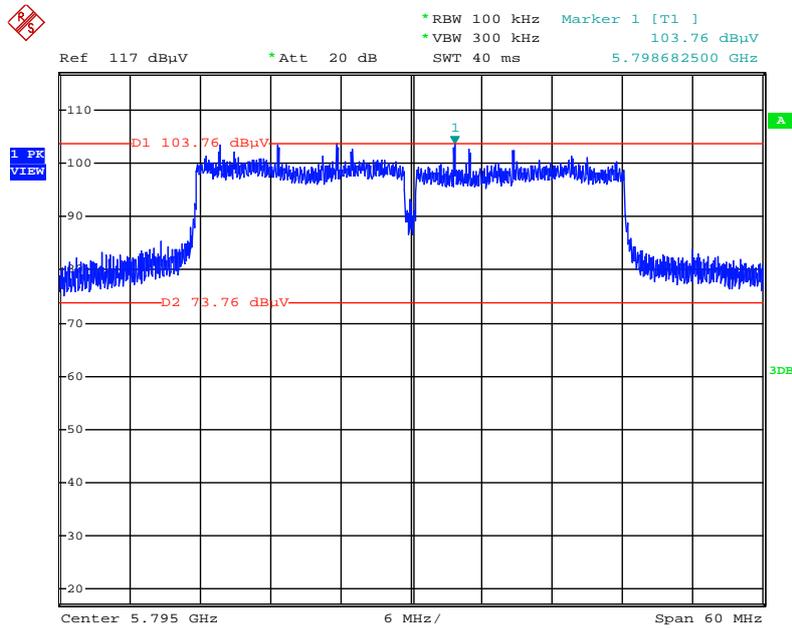


Date: 12.NOV.2013 19:25:13

Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

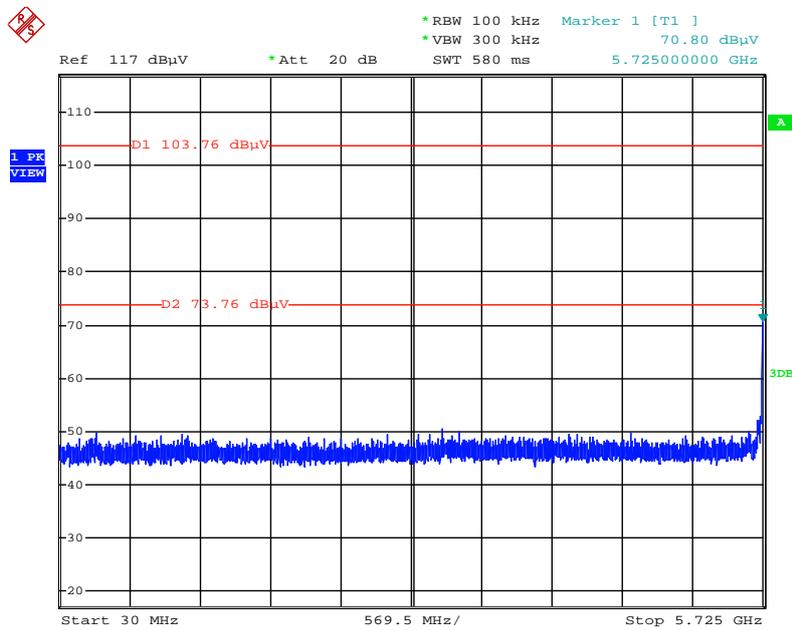


Date: 12.NOV.2013 19:28:04

Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

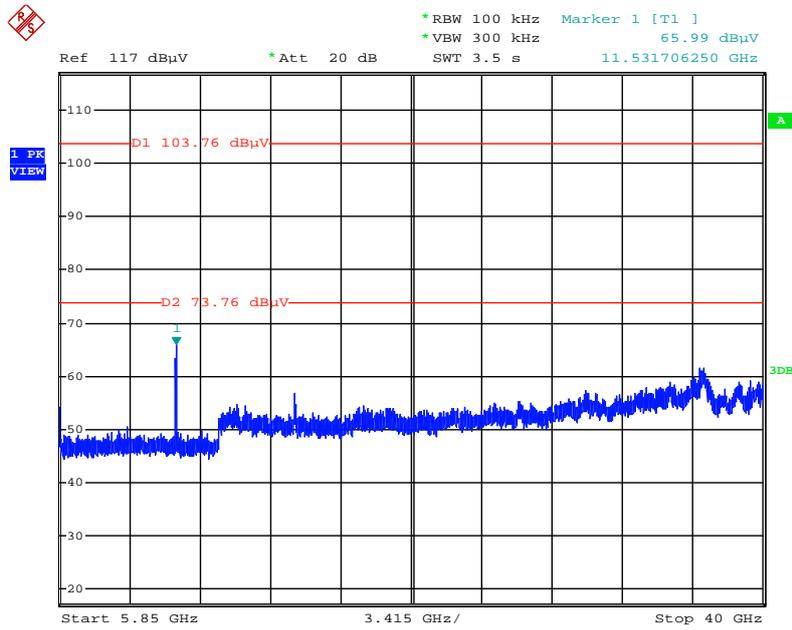


Date: 12.NOV.2013 19:28:51

Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

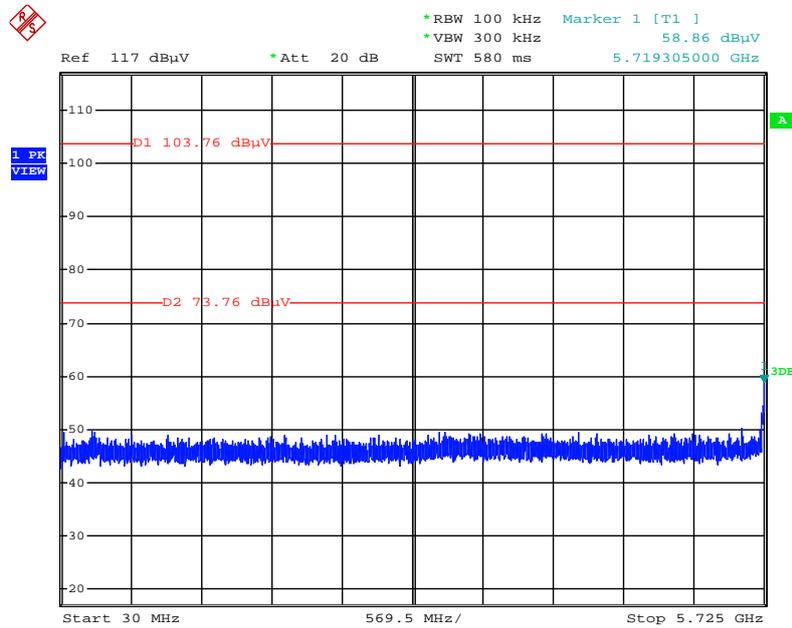


Date: 12.NOV.2013 19:25:45

## Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

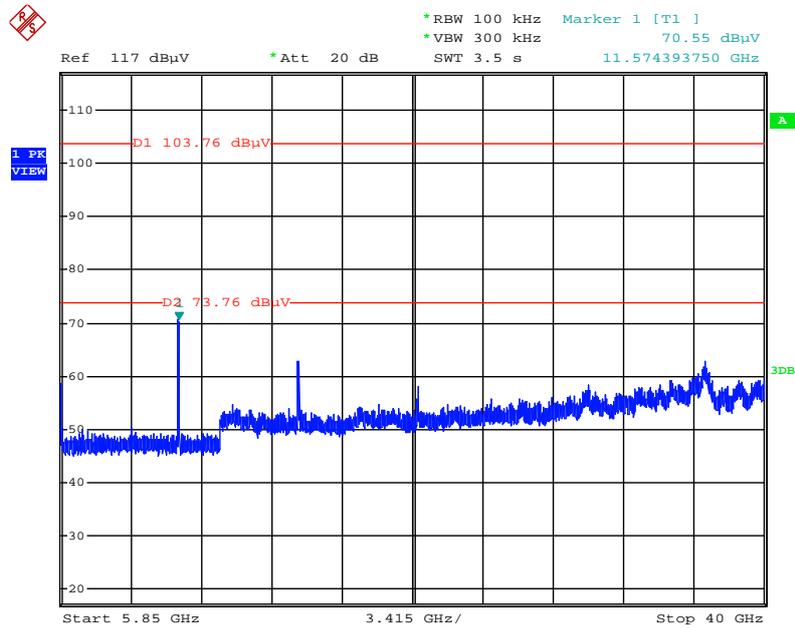


Date: 12.NOV.2013 19:26:33

Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Reference Level

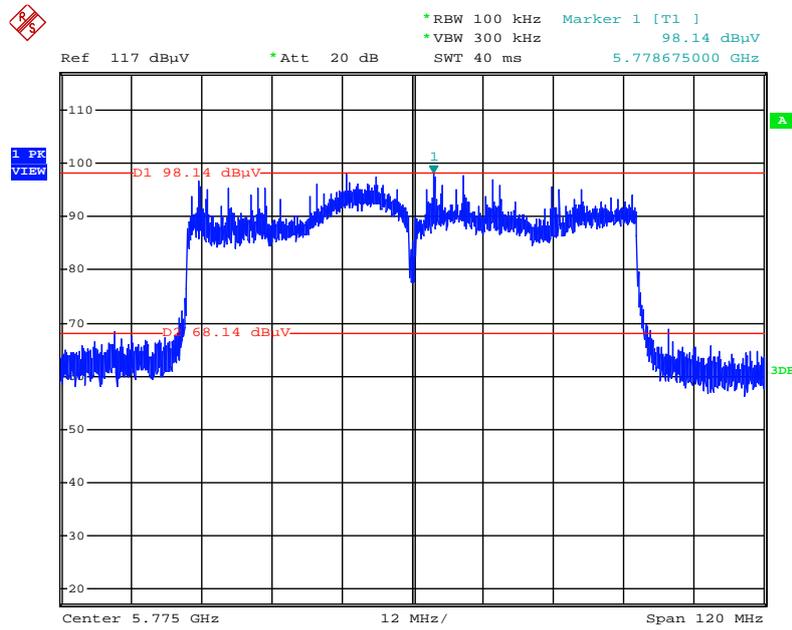


Date: 12.NOV.2013 19:07:07

Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / CH 155 / 30MHz~5725MHz (down 30dBc)

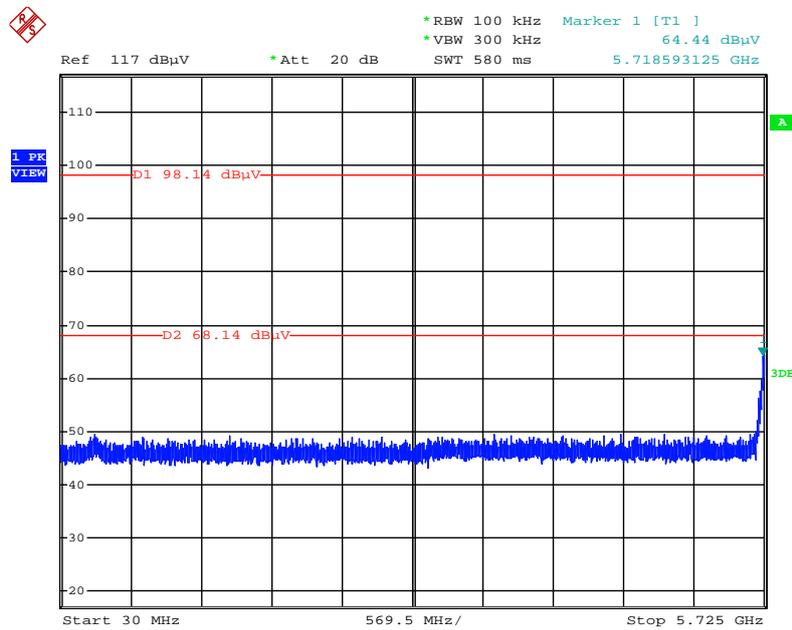

Date: 12.NOV.2013 19:08:26

## Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / CH 155 / 5850MHz~40000MHz (down 30dBc)

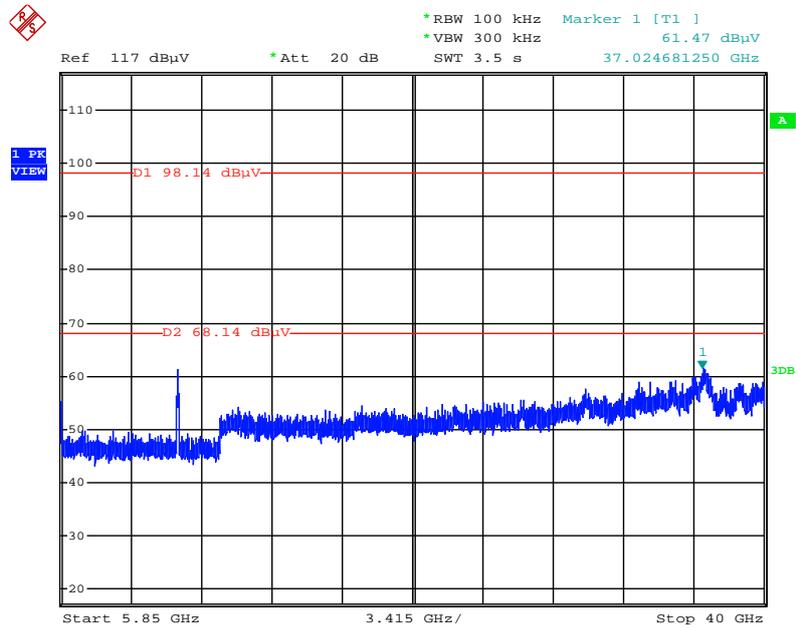

Date: 12.NOV.2013 19:09:12

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

| Instrument                 | Manufacturer | Model No.        | Serial No.  | Characteristics   | Calibration Date | Remark                |
|----------------------------|--------------|------------------|-------------|-------------------|------------------|-----------------------|
| EMI Test Receiver          | R&S          | ESCS 30          | 100355      | 9 kHz ~ 2.75 GHz  | Apr. 12, 2013    | Conduction (CO01-CB)  |
| LISN                       | F.C.C.       | FCC-LISN-50-16-2 | 04083       | 150 kHz ~ 100 MHz | Nov. 26, 2012    | Conduction (CO01-CB)  |
| V- LISN                    | Schwarzbeck  | NSLK 8127        | 8127478     | 9 kHz ~ 30 MHz    | Jul. 17, 2013    | Conduction (CO01-CB)  |
| COND Cable                 | Woken        | Cable            | 01          | 150 kHz ~ 30 MHz  | Dec. 04, 2012    | Conduction (CO01-CB)  |
| Software                   | Audix        | E3               | 5.410e      | -                 | -                | Conduction (CO01-CB)  |
| BILOG ANTENNA              | Schaffner    | CBL6112D         | 22021       | 20MHz ~ 2GHz      | Apr. 16, 2013    | Radiation (03CH01-CB) |
| Loop Antenna               | Teseq        | HLA 6120         | 24155       | 9 kHz - 30 MHz    | Nov. 05, 2012*   | Radiation (03CH01-CB) |
| Horn Antenna               | EMCO         | 3115             | 00075790    | 750MHz~18GHz      | Nov. 27, 2012    | Radiation (03CH01-CB) |
| Horn Antenna               | SCHWARZBEAK  | BBHA 9170        | BBHA9170252 | 15GHz ~ 40GHz     | Nov. 23, 2012    | Radiation (03CH01-CB) |
| Pre-Amplifier              | Agilent      | 8447D            | 2944A10991  | 0.1MHz ~ 1.3GHz   | Nov. 27, 2012    | Radiation (03CH01-CB) |
| Pre-Amplifier              | Agilent      | 8449B            | 3008A02310  | 1GHz ~ 26.5GHz    | Nov. 23, 2012    | Radiation (03CH01-CB) |
| Pre-Amplifier              | WM           | TF-130N-R1       | 923365      | 26.5GHz ~ 40GHz   | Oct. 23, 2013    | Radiation (03CH01-CB) |
| Spectrum analyzer          | R&S          | FSP40            | 100056      | 9kHz~40GHz        | Nov. 16, 2012    | Radiation (03CH01-CB) |
| EMI Test Receiver          | Agilent      | N9038A           | MY52260123  | 9kHz ~ 8GHz       | Nov. 26, 2012    | Radiation (03CH01-CB) |
| Turn Table                 | INN CO       | CO 2000          | N/A         | 0 ~ 360 degree    | N.C.R            | Radiation (03CH01-CB) |
| Antenna Mast               | INN CO       | CO2000           | N/A         | 1 m - 4 m         | N.C.R            | Radiation (03CH01-CB) |
| RF Cable-low               | Woken        | Low Cable-1      | N/A         | 30 MHz - 1 GHz    | Nov. 17, 2013    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken        | High Cable-1     | N/A         | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken        | High Cable-2     | N/A         | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken        | High Cable-3     | N/A         | 1 GHz - 40 GHz    | Nov. 17, 2013    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken        | High Cable-4     | N/A         | 1 GHz - 40 GHz    | Nov. 17, 2013    | Radiation (03CH01-CB) |
| Spectrum analyzer          | R&S          | FSP40            | 100304      | 9kHz ~ 40GHz      | Nov. 27, 2012    | Conducted (TH01-CB)   |
| Temp. and Humidity Chamber | Ten Billion  | TTH-D3SP         | TBN-931011  | -30~100 degree    | Jun. 04, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-7     | -           | 1 GHz - 26.5 GHz  | Nov. 19, 2012    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-8     | -           | 1 GHz - 26.5 GHz  | Nov. 19, 2012    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-9     | -           | 1 GHz - 26.5 GHz  | Nov. 19, 2012    | Conducted (TH01-CB)   |



| Instrument    | Manufacturer | Model No.     | Serial No. | Characteristics  | Calibration Date | Remark              |
|---------------|--------------|---------------|------------|------------------|------------------|---------------------|
| RF Cable-high | Woken        | High Cable-10 | -          | 1 GHz – 26.5 GHz | Nov. 19, 2012    | Conducted (TH01-CB) |
| RF Cable-high | Woken        | High Cable-11 | -          | 1 GHz – 26.5 GHz | Nov. 19, 2012    | Conducted (TH01-CB) |
| Power Sensor  | Anritsu      | MA2411B       | 0917223    | 300MHz~40GHz     | Sep. 18, 2013    | Conducted (TH01-CB) |
| Power Meter   | Anritsu      | ML2495A       | 1035008    | 300MHz~40GHz     | Sep. 18, 2013    | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. TEST LOCATION

|        |  |
|--------|--|
| SHIJR  | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.<br>TEL : 886-2-2696-2468<br>FAX : 886-2-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456<br>FAX : 886-3-318-0055         |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C<br>TEL : 886-2-2601-1640<br>FAX : 886-2-2601-1695               |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.<br>TEL : 886-2-2631-4739<br>FAX : 886-2-2631-9740            |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.<br>TEL : 886-2-8227-2020<br>FAX : 886-2-8227-2626           |
| NEIHU  | ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C.<br>TEL : 886-2-2794-8886<br>FAX : 886-2-2794-9777         |
| JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065<br>FAX : 886-3-656-9085       |

## 7. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Receiver reading   | 0.026                | dB   | normal(k=2)                   | 0.013    |
| Cable loss   | 0.002                | dB   | normal(k=2)                   | 0.001    |
| AMN/LISN specification   | 1.200                | dB   | normal(k=2)                   | 0.600    |
| Mismatch   |                      |      |                               |          |
| Receiver VSWR 1 =  | -0.080               | dB   | U-shaped                      | 0.060    |
| AMN/LISN VSWR 2 =  |                      |      |                               |          |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 1.2      |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 2.4      |

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Receiver reading   | $\pm 0.173$          | dB   | K=1                           | 0.086    |
| Cable loss   | $\pm 0.174$          | dB   | K=2                           | 0.087    |
| Antenna gain   | $\pm 0.169$          | dB   | K=2                           | 0.084    |
| Site imperfection  | $\pm 0.433$          | dB   | Triangular                    | 0.214    |
| Pre-amplifier gain   | $\pm 0.366$          | dB   | K=2                           | 0.183    |
| Transmitter antenna  | $\pm 1.200$          | dB   | Rectangular                   | 0.600    |
| Signal generator   | $\pm 0.461$          | dB   | Rectangular                   | 0.231    |
| Mismatch   | $\pm 0.080$          | dB   | U-shape                       | 0.040    |
| Spectrum analyzer  | $\pm 0.500$          | dB   | Rectangular                   | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 1.778    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 3.555    |

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

| Contribution   | Uncertainty of $x_i$ |      |                            | $u(x_i)$ |
|--|----------------------|------|----------------------------|----------|
|  | Value                | Unit | Probability Distribution k |          |
| Receiver reading   | ±0.191               | dB   | K=1                        | 0.095    |
| Cable loss   | ±0.169               | dB   | K=2                        | 0.084    |
| Antenna gain   | ±0.191               | dB   | K=2                        | 0.096    |
| Site imperfection  | ±0.582               | dB   | Triangular                 | 0.291    |
| Pre-amplifier gain   | ±0.304               | dB   | K=2                        | 0.152    |
| Transmitter antenna  | ±1.200               | dB   | Rectangular                | 0.600    |
| Signal generator   | ±0.461               | dB   | Rectangular                | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                    | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                            | 1.839    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                            | 3.678    |

**Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)**

| Contribution   | Uncertainty of $x_i$ |      |                            | $u(x_i)$ |
|--|----------------------|------|----------------------------|----------|
|  | Value                | Unit | Probability Distribution k |          |
| Receiver reading   | ±0.186               | dB   | K=1                        | 0.093    |
| Cable loss   | ±0.167               | dB   | K=2                        | 0.083    |
| Antenna gain   | ±0.190               | dB   | K=2                        | 0.095    |
| Site imperfection  | ±0.488               | dB   | Triangular                 | 0.244    |
| Pre-amplifier gain   | ±0.269               | dB   | K=2                        | 0.134    |
| Transmitter antenna  | ±1.200               | dB   | Rectangular                | 0.600    |
| Signal generator   | ±0.461               | dB   | Rectangular                | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                    | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                            | 1.771    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                            | 3.541    |

### Uncertainty of Conducted Emission Measurement

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Cable loss   | ±0.038               | dB   | K=2                           | 0.019    |
| Attenuator   | ±0.047               | dB   | K=2                           | 0.024    |
| Power Meter specification  | ±0.300               | dB   | Triangular                    | 0.150    |
| Power Sensor specification   | ±0.300               | dB   | Rectangular                   | 0.150    |
| Signal generator   | ±0.461               | dB   | Rectangular                   | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                       | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                   | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 0.863    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 1.726    |