



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

|                     |  |
|---------------------|--|
| Applicant's company | NETGEAR, Inc.  |
| Applicant Address   | 350 East Plumeria Drive, San Jose, California 95134, USA |
| FCC ID              | PY314100258  |

|                   |                                       |
|-------------------|---------------------------------------|
| Product Name      | AC2350 Smart WiFi Router              |
| Brand Name        | NETGEAR                               |
| Model No.         | R7500                                 |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart E § 15.407 |
| Test Freq. Range  | 5150 ~ 5250MHz                        |
| Received Date     | Mar. 30, 2014                         |
| Final Test Date   | May 27, 2014                          |
| Submission Type   | Original Equipment                    |

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 General UNII Test Procedures Effective 2014 DR02-41759, KDB 662911 D01 v02r01, KDB644545 D01v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|   |                |
|---|----------------|
| <b>1. CERTIFICATE OF COMPLIANCE .....</b>                       | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>                      | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                             | <b>3</b>       |
| 3.1. Product Details.....                                       | 3              |
| 3.2. Accessories.....   | 5              |
| 3.3. Table for Filed Antenna.....                               | 6              |
| 3.4. Table for Carrier Frequencies .....                        | 7              |
| 3.5. Table for Test Modes .....                                 | 8              |
| 3.6. Table for Testing Locations.....                           | 9              |
| 3.7. Table for Supporting Units .....                           | 10             |
| 3.8. Table for Parameters of Test Software Setting .....        | 11             |
| 3.9. EUT Operation during Test .....                            | 11             |
| 3.10. Duty Cycle.....   | 12             |
| 3.11. Test Configurations .....                                 | 14             |
| <b>4. TEST RESULT .....</b>                                     | <b>17</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement.....         | 17             |
| 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement..... | 21             |
| 4.3. Maximum Conducted Output Power Measurement.....            | 29             |
| 4.4. Power Spectral Density Measurement .....                   | 32             |
| 4.5. Radiated Emissions Measurement .....                       | 38             |
| 4.6. Band Edge Emissions Measurement .....                      | 53             |
| 4.7. Frequency Stability Measurement .....                      | 58             |
| 4.8. Antenna Requirements .....                                 | 60             |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>                    | <b>61</b>      |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                          | <b>62</b>      |
| <b>APPENDIX A. TEST PHOTOS .....</b>                            | <b>A1 ~ A5</b> |
| <b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>           | <b>B1 ~ B3</b> |
| <b>APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT .....</b>   | <b>C1 ~ C3</b> |



## History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR433001AB | Rev. 01 | Initial issue of report | Jun. 04, 2014 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



## 1. CERTIFICATE OF COMPLIANCE

Product Name : AC2350 Smart WIFI Router  
Brand Name : NETGEAR  
Model No. : R7500  
Applicant : NETGEAR, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 30, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart E |              |  |          |             |
|--|--------------|--|----------|-------------|
| Part   | Rule Section | Description of Test                                | Result   | Under Limit |
| 4.1  | 15.207       | AC Power Line Conducted Emissions                  | Complies | 15.04 dB    |
| 4.2  | 15.407(a)    | 26dB Spectrum Bandwidth and 99% Occupied Bandwidth | Complies | -           |
| 4.3  | 15.407(a)    | Maximum Conducted Output Power                     | Complies | 0.32 dB     |
| 4.4  | 15.407(a)    | Power Spectral Density                             | Complies | 0.29 dB     |
| 4.5  | 15.407(b)    | Radiated Emissions                                 | Complies | 0.51 dB     |
| 4.6  | 15.407(b)    | Band Edge Emissions                                | Complies | 0.11 dB     |
| 4.7  | 15.407(g)    | Frequency Stability                                | Complies | -           |
| 4.8  | 15.203       | Antenna Requirements                               | Complies | -           |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

| Items                          | Description   |
|--------------------------------|---|
| Product Type                   | WLAN (4TX, 4RX)   |
| Radio Type                     | Intentional Transceiver   |
| Power Type                     | From power adapter  |
| Modulation                     | see the below table for IEEE 802.11n/ac   |
| Data Modulation                | For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)                |
| Data Rate (Mbps)               | see the below table for IEEE 802.11n/ac   |
| Frequency Range                | 5150 ~ 5250MHz  |
| Channel Number                 | 4 for 20MHz bandwidth ; 2 for 40MHz bandwidth<br>1 for 80MHz bandwidth  |
| Channel Band Width (99%)       | 802.11ac MCS0/Nss1 (VHT20): 18.24 MHz ;<br>802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ;<br>802.11ac MCS0/Nss1 (VHT80): 75.52 MHz |
| Maximum Conducted Output Power | 802.11ac MCS0/Nss1 (VHT20): 27.39 dBm ;<br>802.11ac MCS0/Nss1 (VHT40): 27.35 dBm ;<br>802.11ac MCS0/Nss1 (VHT80): 20.51 dBm |
| Carrier Frequencies            | Please refer to section 3.4   |
| Antenna                        | Please refer to section 3.3   |

**IEEE 802.11a**

| Items                          | Description                        |
|--------------------------------|------------------------------------|
| Product Type                   | WLAN (4TX, 4RX)                    |
| Radio Type                     | Intentional Transceiver            |
| Power Type                     | From power adapter                 |
| Modulation                     | OFDM for IEEE 802.11a              |
| Data Modulation                | OFDM (BPSK / QPSK / 16QAM / 64QAM) |
| Data Rate (Mbps)               | OFDM (6/9/12/18/24/36/48/54)       |
| Frequency Range                | 5150 ~ 5250MHz                     |
| Channel Number                 | 4                                  |
| Channel Band Width (99%)       | 20.64 MHz                          |
| Maximum Conducted Output Power | 28.17 dBm                          |
| Carrier Frequencies            | Please refer to section 3.4        |
| Antenna                        | Please refer to section 3.3        |

| Items                                | Description   |   |
|--------------------------------------|---|---|
| Communication Mode                   | <input checked="" type="checkbox"/> IP Based (Load Based) | <input type="checkbox"/> Frame Based                    |
| Beamforming Function (IEEE 802.11a)  | <input type="checkbox"/> With beamforming                 | <input checked="" type="checkbox"/> Without beamforming |
| Beamforming Function (IEEE 802.11ac) | <input checked="" type="checkbox"/> With beamforming      | <input type="checkbox"/> Without beamforming            |

**Antenna and Band width**

| Antenna       | Four (TX) |        |        |
|---------------|-----------|--------|--------|
|               | 20 MHz    | 40 MHz | 80 MHz |
| IEEE 802.11a  | V         | X      | X      |
| IEEE 802.11n  | V         | V      | X      |
| IEEE 802.11ac | V         | V      | V      |

Note : The product has beamforming function for 802.11ac.

**IEEE 11n/ac Spec.**

| Protocol         | Number of Transmit Chains (NTX) | Data Rate / MCS |
|------------------|---------------------------------|-----------------|
| 802.11n (HT20)   | 4                               | MCS0-31         |
| 802.11n (HT40)   | 4                               | MCS0-31         |
| 802.11ac (VHT20) | 4                               | MCS 0-9/Nss1-4  |
| 802.11ac (VHT40) | 4                               | MCS 0-9/Nss1-4  |
| 802.11ac (VHT80) | 4                               | MCS 0-9/Nss1-4  |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

| Power     | Brand   | Model No.       | P/N          | Rating  |
|-----------|---------|-----------------|--------------|---|
| Adapter 1 | NETGEAR | AD898F20        | 332-10613-01 | Input: 100-240Vac, 50/60Hz, 1.0A<br>Output: 12Vdc, 3.5A |
| Adapter 2 | LEI     | MU42-1120350-A1 | 332-10728-01 | Input: 100-240Vac, 50/60Hz, 1.5A<br>Output: 12Vdc, 3.5A |

### 3.3. Table for Filed Antenna

| Ant. | Brand   | Model No. | Antenna Type   | Connector    |
|------|---------|-----------|----------------|--------------|
| 1    | NETGEAR | R7500     | Dipole Antenna | Reversed-SMA |

Note: The EUT has four external antennas.

| 2.4GHz Band |            |           |            |
|-------------|------------|-----------|------------|
| Frequency   | Gain (dBi) | Frequency | Gain (dBi) |
| 2412 MHz    | 0.9        | 2452 MHz  | 0.9        |
| 2422 MHz    | 1.1        | 2462 MHz  | 0.8        |
| 2437 MHz    | 1.1        | -         | -          |

| 5GHz Band 1 |            | 5GHz Band 4 |            |
|-------------|------------|-------------|------------|
| Frequency   | Gain (dBi) | Frequency   | Gain (dBi) |
| 5180 MHz    | 2.0        | 5745 MHz    | 3.0        |
| 5190 MHz    | 2.1        | 5755 MHz    | 3.0        |
| 5200 MHz    | 2.1        | 5775 MHz    | 2.9        |
| 5210 MHz    | 2.2        | 5785 MHz    | 2.9        |
| 5230 MHz    | 2.3        | 5795 MHz    | 3.0        |
| 5240 MHz    | 2.3        | 5825 MHz    | 3.0        |


Note: There is one set of antenna provided to this EUT and them can be used as transmitting and receiving antenna.

**For 2.4GHz Band (3TX/3RX)**

Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

**For 5GHz Band (4TX/4RX)**

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

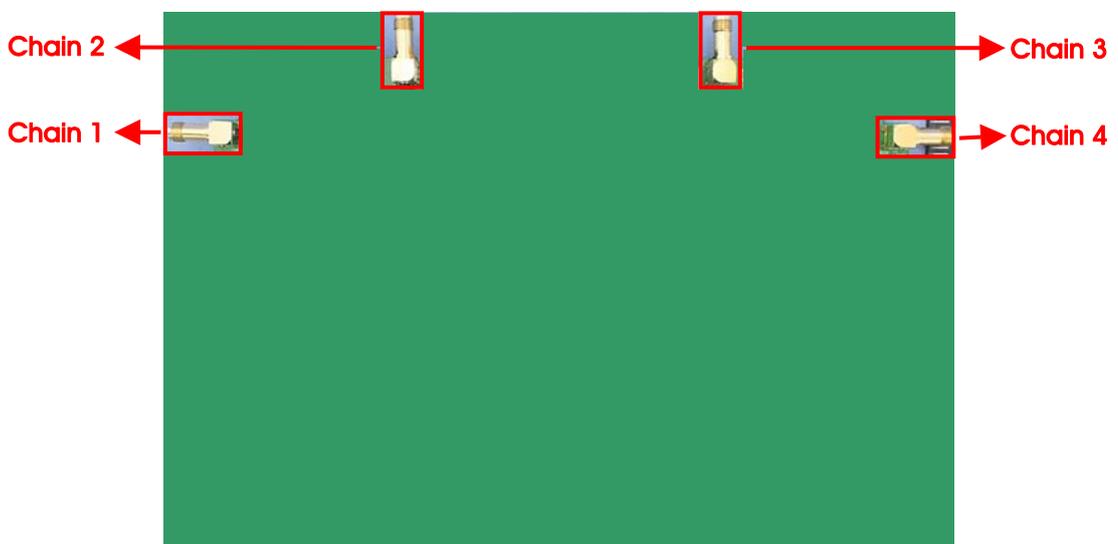

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

| Frequency Band          | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5150~5250 MHz<br>Band 1 | 36          | 5180 MHz  | 44          | 5220 MHz  |
|                         | 38          | 5190 MHz  | 46          | 5230 MHz  |
|                         | 40          | 5200 MHz  | 48          | 5240 MHz  |
|                         | 42          | 5210 MHz  | -           | -         |

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items   | Mode          |        | Data Rate | Channel  | Chain   |
|--|---------------|--------|-----------|----------|---------|
| AC Power Conducted Emission                                      | CTX           |        | -         | -        | -       |
| Max. Conducted Output Power                                      | 11ac VHT20    | Band 1 | MCS0/Nss1 | 36/40/48 | 1+2+3+4 |
|  | 11ac VHT40    | Band 1 | MCS0/Nss1 | 38/46    | 1+2+3+4 |
|  | 11ac VHT80    | Band 1 | MCS0/Nss1 | 42       | 1+2+3+4 |
|  | 11a/BPSK      | Band 1 | 6Mbps     | 36/40/48 | 1+2+3+4 |
| Power Spectral Density   | 11ac VHT20    | Band 1 | MCS0/Nss1 | 36/40/48 | 1+2+3+4 |
|  | 11ac VHT40    | Band 1 | MCS0/Nss1 | 38/46    | 1+2+3+4 |
|  | 11ac VHT80    | Band 1 | MCS0/Nss1 | 42       | 1+2+3+4 |
|  | 11a/BPSK      | Band 1 | 6Mbps     | 36/40/48 | 1+2+3+4 |
| 26dB Spectrum Bandwidth<br>99% Occupied Bandwidth<br>Measurement | 11ac VHT20    | Band 1 | MCS0/Nss1 | 36/40/48 | 1+2+3+4 |
|  | 11ac VHT40    | Band 1 | MCS0/Nss1 | 38/46    | 1+2+3+4 |
|  | 11ac VHT80    | Band 1 | MCS0/Nss1 | 42       | 1+2+3+4 |
|  | 11a/BPSK      | Band 1 | 6Mbps     | 36/40/48 | 1+2+3+4 |
| Radiated Emission Below 1GHz                                     | CTX           |        | -         | -        | -       |
| Radiated Emission Above 1GHz                                     | 11ac VHT20    | Band 1 | MCS0/Nss1 | 36/40/48 | 1+2+3+4 |
|  | 11ac VHT40    | Band 1 | MCS0/Nss1 | 38/46    | 1+2+3+4 |
|  | 11ac VHT80    | Band 1 | MCS0/Nss1 | 42       | 1+2+3+4 |
|  | 11a/BPSK      | Band 1 | 6Mbps     | 36/40/48 | 1+2+3+4 |
| Band Edge Emission   | 11ac VHT20    | Band 1 | MCS0/Nss1 | 36/40/48 | 1+2+3+4 |
|  | 11ac VHT40    | Band 1 | MCS0/Nss1 | 38/46    | 1+2+3+4 |
|  | 11ac VHT80    | Band 1 | MCS0/Nss1 | 42       | 1+2+3+4 |
|  | 11a/BPSK      | Band 1 | 6Mbps     | 36/40/48 | 1+2+3+4 |
| Frequency Stability  | Un-modulation |        | -         | 40       | 1+2+3+4 |

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11ac 20/40/80, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.

The following test modes were performed for all tests:

**For AC Power Line Conducted Emissions test:**

Mode 1. EUT + Adapter 1

Mode 2. EUT + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission below 1GHz test:**

Mode 1. Laying of EUT+ Adapter 1

Mode 2. Stand of EUT+ Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Laying of EUT+ Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission above 1GHz and Radiated Emission Co-location tests:**

There are two modes of EUT, one is Laying of EUT, and the other is Stand of EUT.

After evaluating, Laying of EUT has been evaluated to be the worst case.

Consequently, measurement for Radiated Emission above 1GHz and Radiated Emission Co-location tests will follow this same test mode.

**For Co-location MPE and Radiated Emission Co-location tests:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

| Test Site Location |  |          |              |             |              |
|--------------------|--|----------|--------------|-------------|--------------|
| Address:           | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. |          |              |             |              |
| TEL:               | 886-3-656-9065   |          |              |             |              |
| FAX:               | 886-3-656-9085   |          |              |             |              |
| Test Site No.      | Site Category  | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
| 03CH01-CB          | SAC  | Hsin Chu | 262045       | IC 4086D    | -            |
| CO01-CB            | Conduction   | Hsin Chu | 262045       | IC 4086D    | -            |
| TH01-CB            | OVEN Room  | Hsin Chu | -            | -           | -            |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

**Test Site No: CO01-CB**

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6430 | DoC    |

**Test Site No: 03CH01-CB (below 1GHz)**

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6430 | DoC    |

**Test Site No: 03CH01-CB (above 1GHz)**

For IEEE 802.11a mode (non-beamforming function):

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6430 | DoC    |

For IEEE 802.11ac mode (beamforming function):

| Support Unit     | Brand   | Model | FCC ID      |
|------------------|---------|-------|-------------|
| NB               | DELL    | E6430 | DoC         |
| NB               | DELL    | M1330 | DoC         |
| WiFi USB Adapter | NETGEAR | A6200 | PY312200200 |

**Test Site No: TH01-CB**

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6220 | DoC    |

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

| Test Software Version | DOS      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5180 MHz | 5200 MHz | 5240 MHz |
| MCS0/Nss1 VHT20       | 20       | 20       | 20       |

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

| Test Software Version | DOS      |          |
|-----------------------|----------|----------|
| Frequency             | 5190 MHz | 5230 MHz |
| MCS0/Nss1 VHT40       | 14       | 20       |

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

| Test Software Version | DOS      |
|-----------------------|----------|
| Frequency             | 5210 MHz |
| MCS0/Nss1 VHT80       | 13       |

#### Power Parameters of IEEE 802.11a

| Test Software Version | DOS      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5180 MHz | 5200 MHz | 5240 MHz |
| 802.11a               | 21       | 21       | 21       |

### 3.9. EUT Operation during Test

For IEEE 802.11a mode (non-beamforming function):

The EUT was programmed to be in continuously transmitting mode.

For IEEE 802.11ac mode (beamforming function):

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:


During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by WiFi USB Adapter and transmit duty cycle no less 98%


### 3.10. Duty Cycle

#### IEEE 802.11ac MCS0/Nss1 VHT20

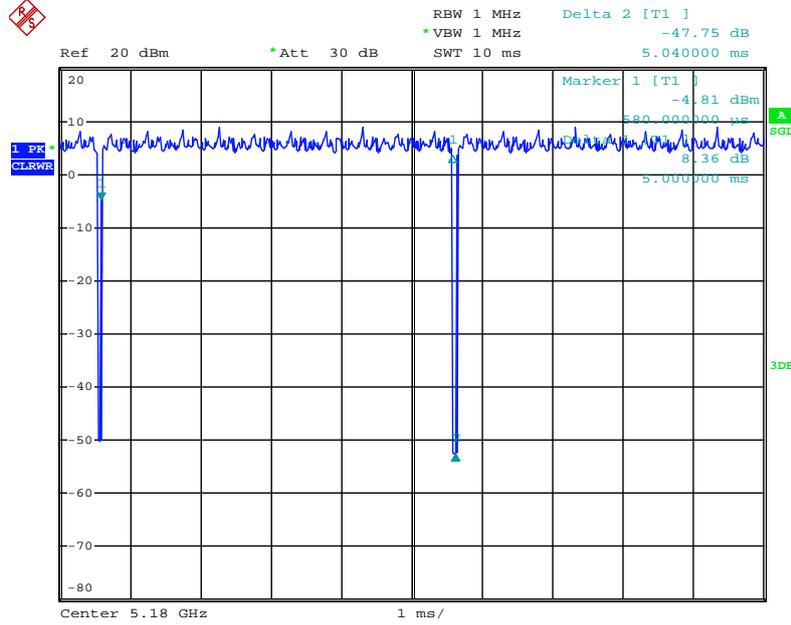


Date: 9.MAY.2014 23:28:23

#### IEEE 802.11ac MCS0/Nss1 VHT40

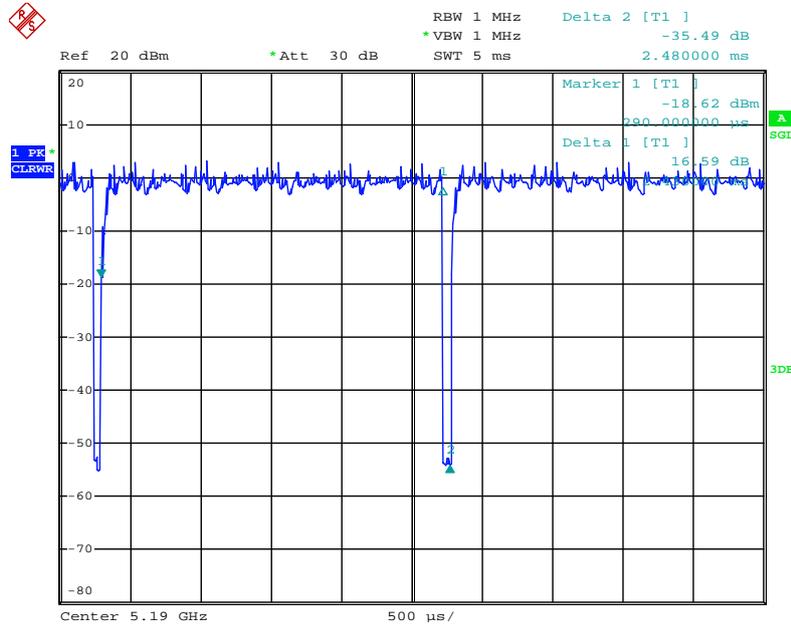


Date: 9.MAY.2014 23:29:46

IEEE 802.11ac MCS0/Nss1 VHT80

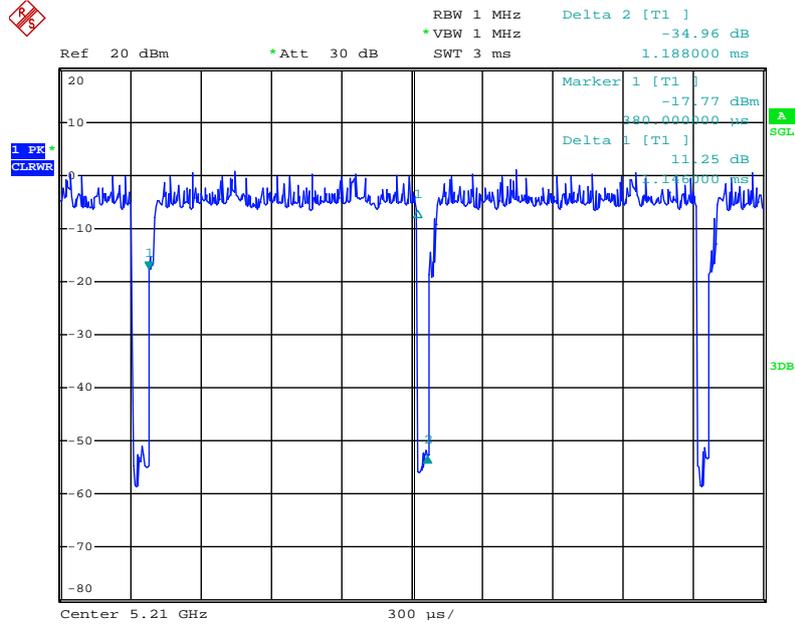

Date: 9.MAY.2014 23:34:29


IEEE 802.11a

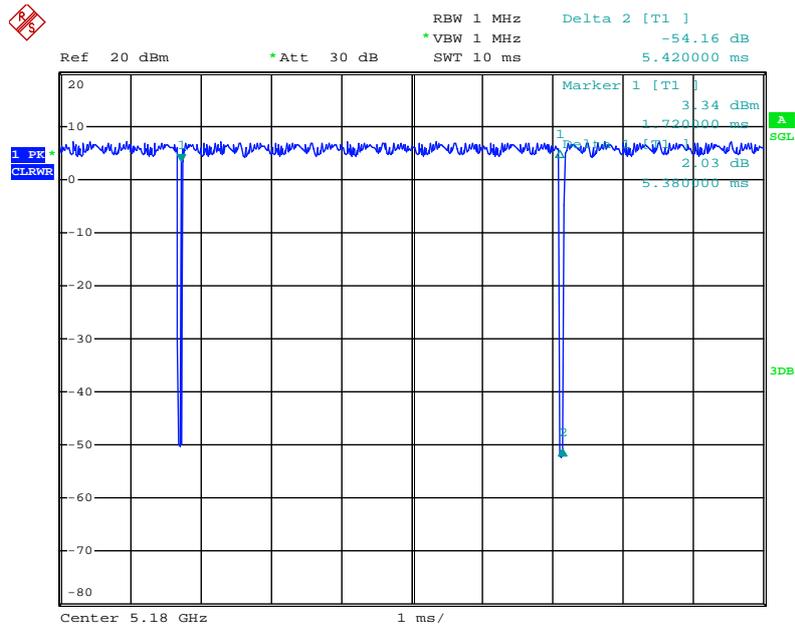

Date: 9.MAY.2014 23:23:31

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions and Radiation Emissions Below 1GHz Test Configuration

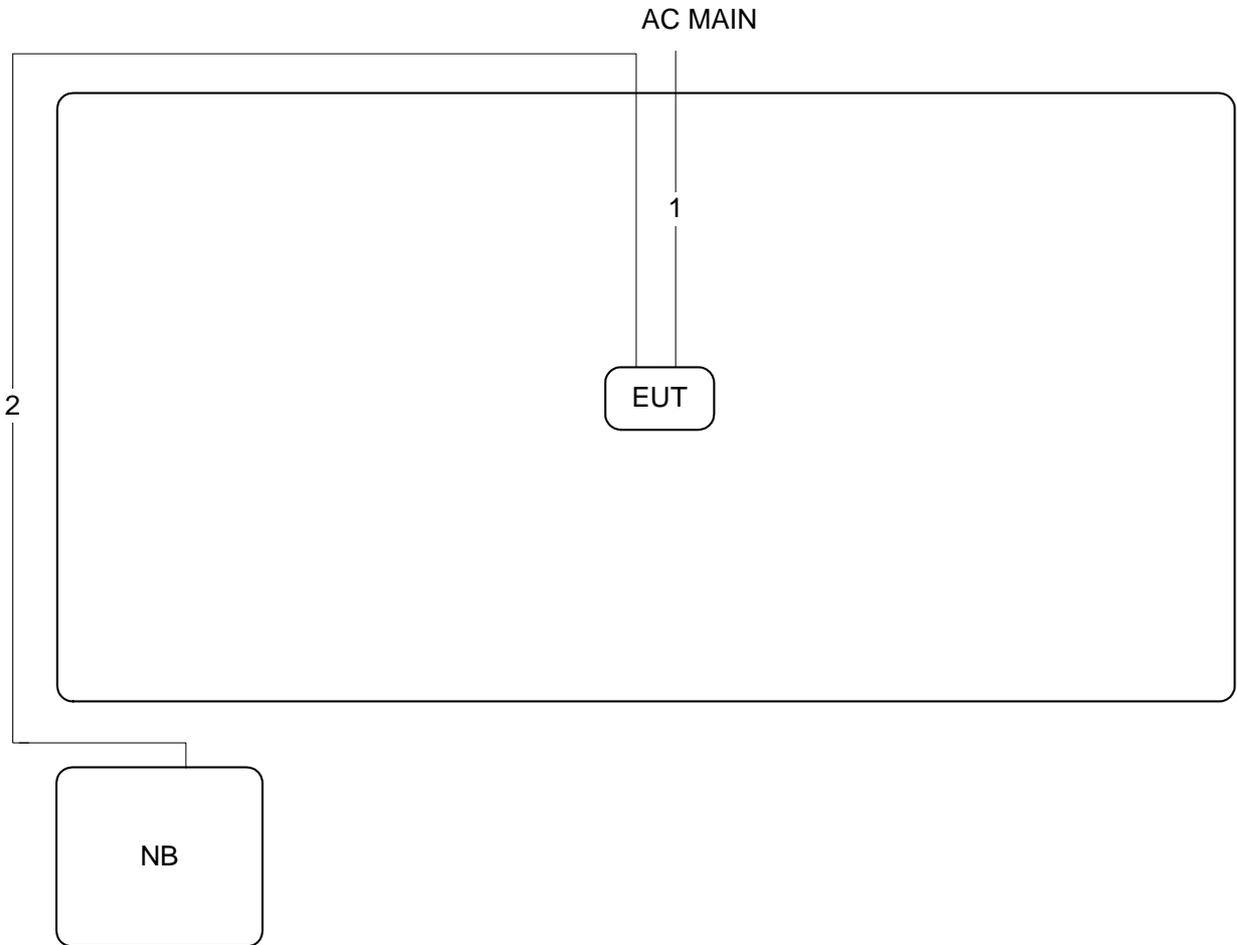

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 1.8m   |
| 2    | RJ-45 cable | No       | 10m    |


### 3.11.2. Radiation Emissions Above 1GHz Test Configuration

For IEEE 802.11a mode (non-beamforming function):

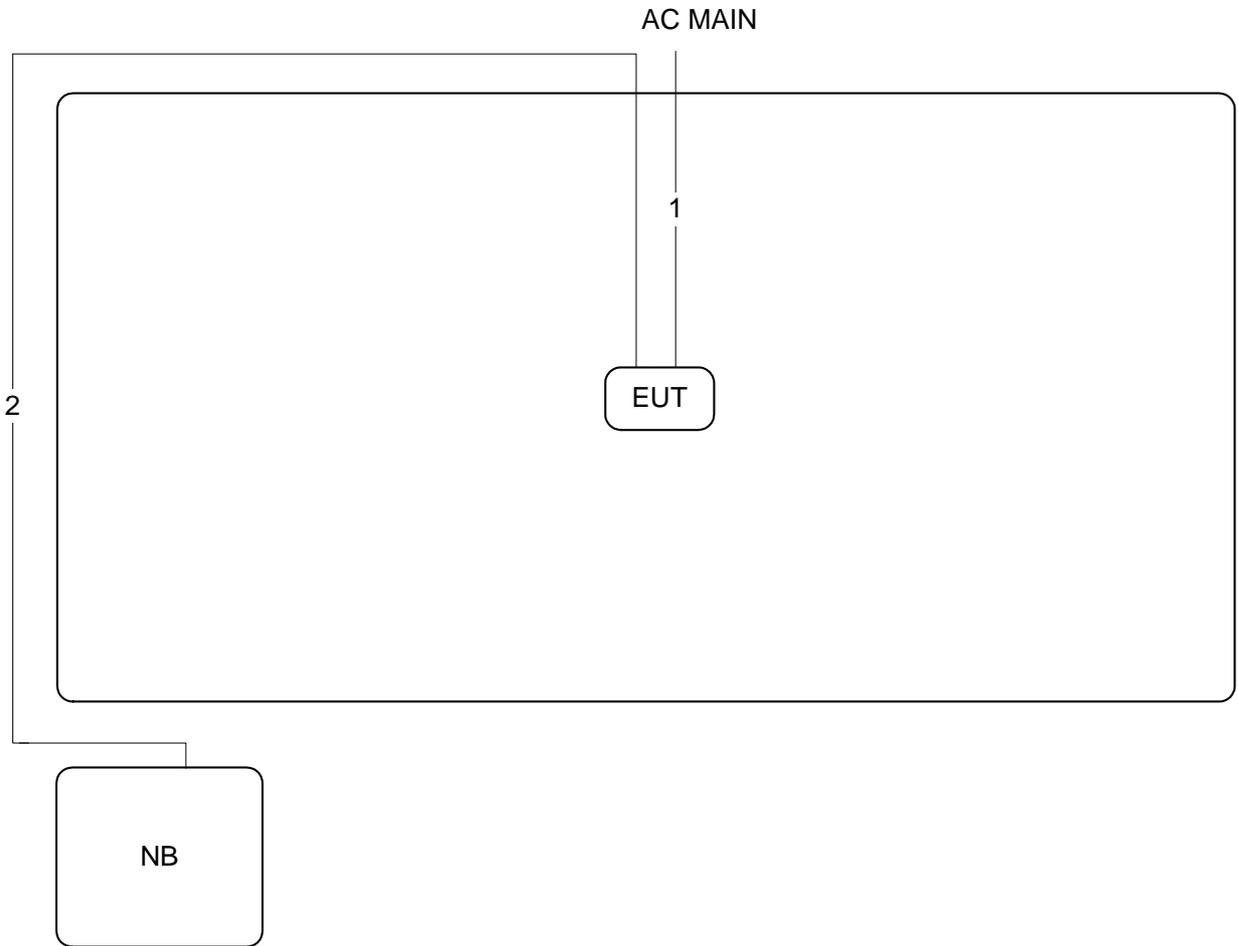

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 1.8m   |
| 2    | RJ-45 cable | No       | 10m    |

For IEEE 802.11ac mode (beamforming function):

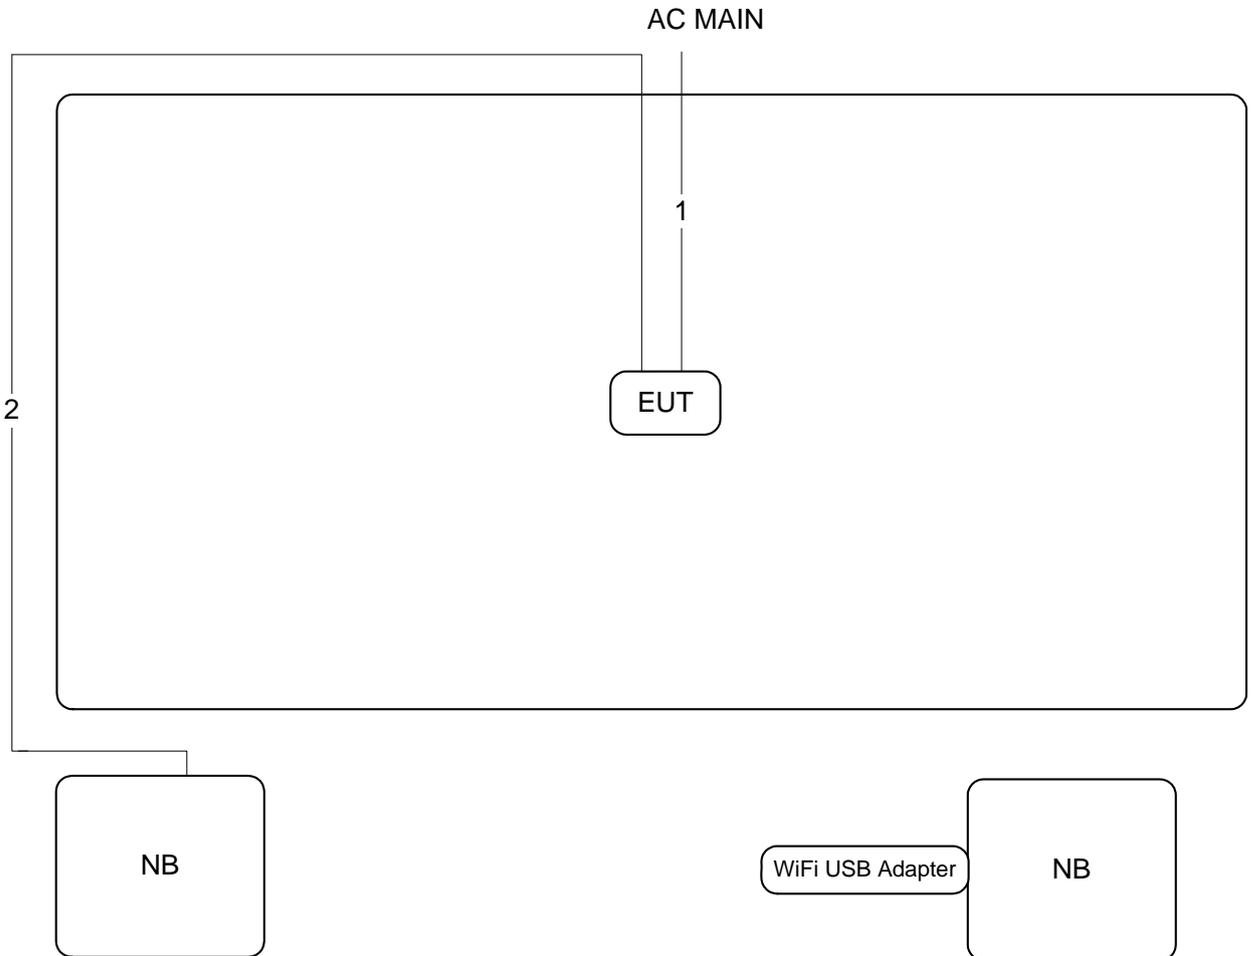

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 1.8m   |
| 2    | RJ-45 cable | No       | 10m    |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

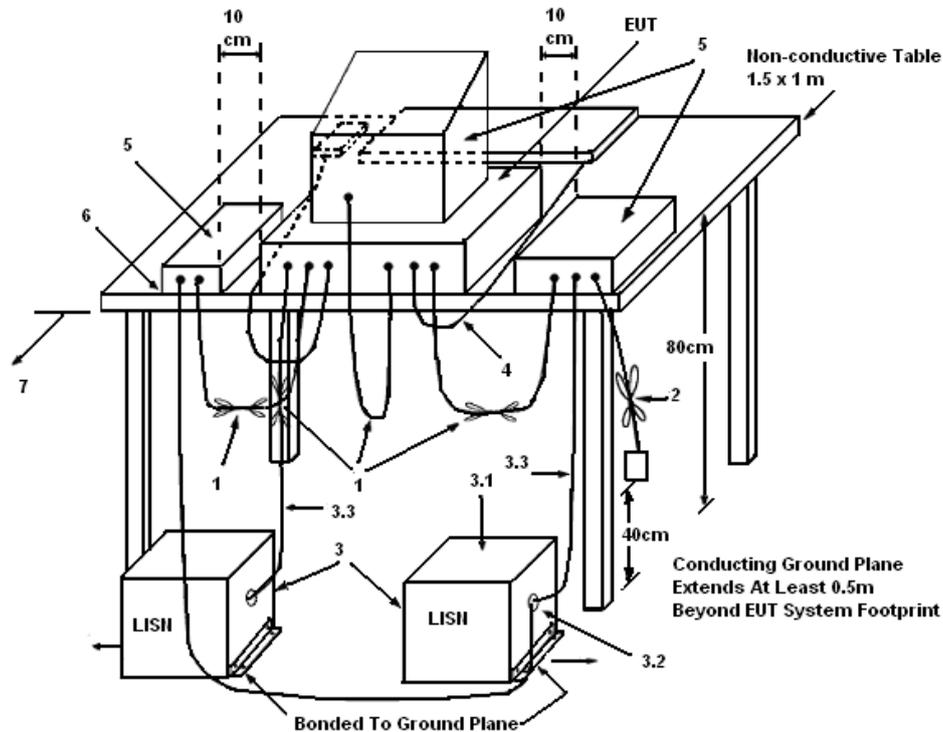

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |            |           |        |
|---------------|------------|-----------|--------|
| Temperature   | 24°C       | Humidity  | 51%    |
| Test Engineer | Parody Lin | Phase     | Line   |
| Configuration | CTX        | Test Mode | Mode 1 |

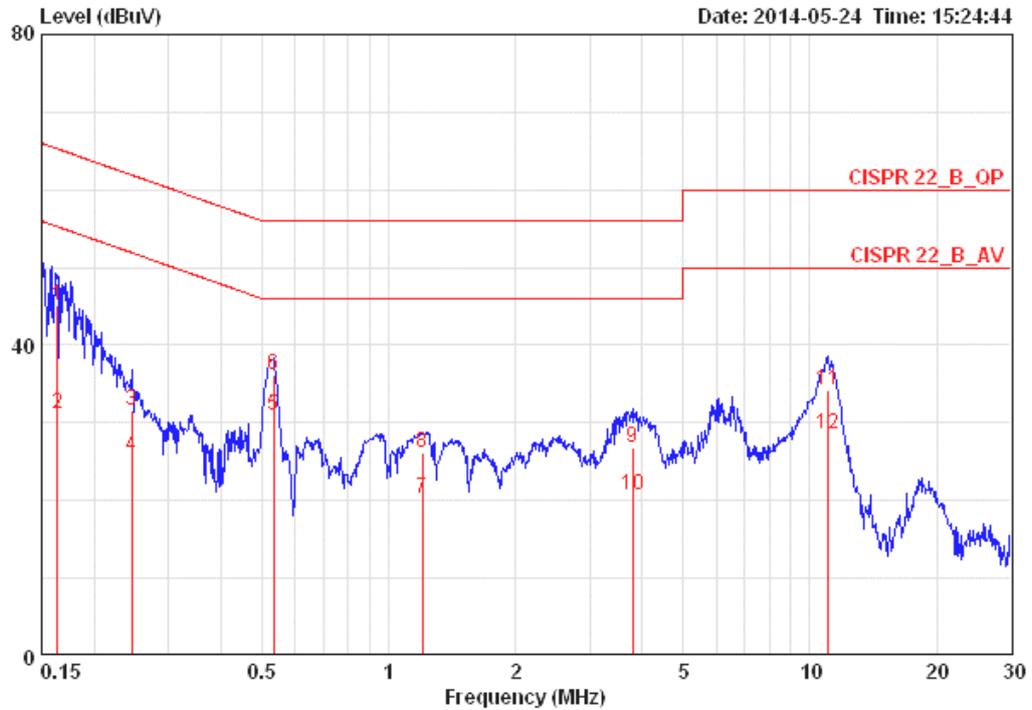

|    | Freq    | Level | Over Limit | Limit Line | LISN Factor | Read Level | Cable Loss | Pol/Phase | Remark  |
|----|---------|-------|------------|------------|-------------|------------|------------|-----------|---------|
|    | MHz     | dBuV  | dB         | dBuV       | dB          | dBuV       | dB         |           |         |
| 1  | 0.16327 | 45.15 | -20.15     | 65.30      | 0.08        | 44.91      | 0.16       | LINE      | QP      |
| 2  | 0.16327 | 31.28 | -24.02     | 55.30      | 0.08        | 31.04      | 0.16       | LINE      | AVERAGE |
| 3  | 0.24552 | 31.50 | -30.41     | 61.91      | 0.08        | 31.25      | 0.17       | LINE      | QP      |
| 4  | 0.24552 | 25.71 | -26.20     | 51.91      | 0.08        | 25.46      | 0.17       | LINE      | AVERAGE |
| 5  | 0.53215 | 30.96 | -15.04     | 46.00      | 0.08        | 30.69      | 0.19       | LINE      | AVERAGE |
| 6  | 0.53215 | 36.21 | -19.79     | 56.00      | 0.08        | 35.94      | 0.19       | LINE      | QP      |
| 7  | 1.203   | 20.27 | -25.73     | 46.00      | 0.10        | 19.96      | 0.21       | LINE      | AVERAGE |
| 8  | 1.203   | 26.24 | -29.76     | 56.00      | 0.10        | 25.93      | 0.21       | LINE      | QP      |
| 9  | 3.799   | 26.78 | -29.22     | 56.00      | 0.15        | 26.34      | 0.30       | LINE      | QP      |
| 10 | 3.799   | 20.63 | -25.37     | 46.00      | 0.15        | 20.19      | 0.30       | LINE      | AVERAGE |
| 11 | 11.080  | 34.23 | -25.77     | 60.00      | 0.27        | 33.57      | 0.39       | LINE      | QP      |
| 12 | 11.080  | 28.61 | -21.39     | 50.00      | 0.27        | 27.95      | 0.39       | LINE      | AVERAGE |

|               |            |           |         |
|---------------|------------|-----------|---------|
| Temperature   | 24°C       | Humidity  | 51%     |
| Test Engineer | Parody Lin | Phase     | Neutral |
| Configuration | CTX        | Test Mode | Mode 1  |

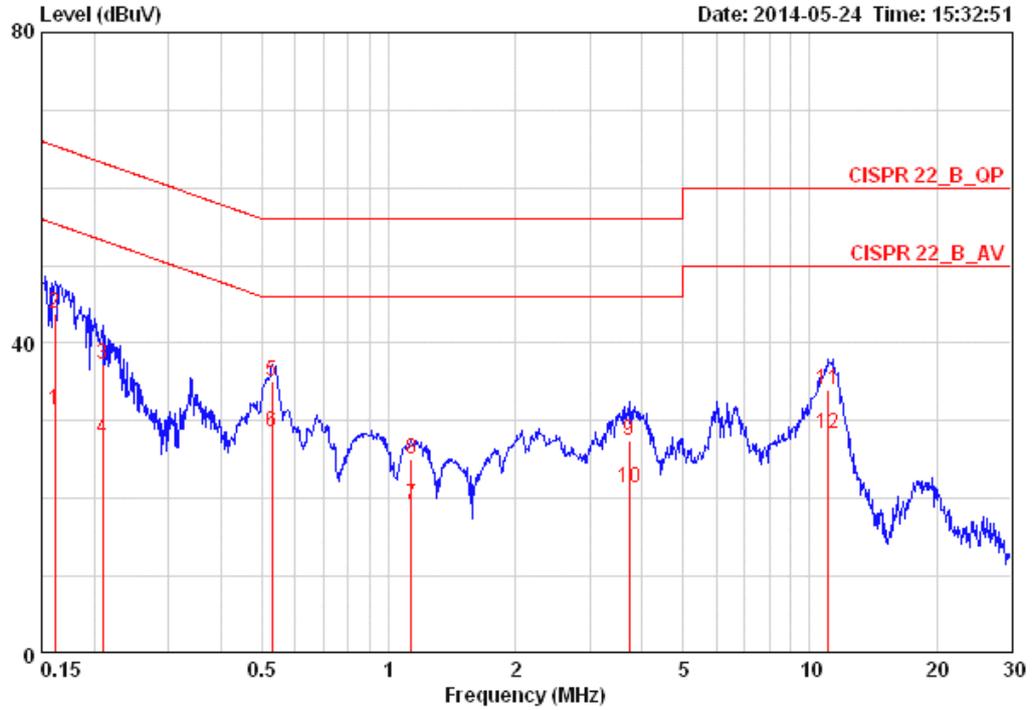

|    | Freq    | Level | Over Limit | Limit Line | LISN Factor | Read Level | Cable Loss | Pol/Phase | Remark  |
|----|---------|-------|------------|------------|-------------|------------|------------|-----------|---------|
|    | MHz     | dBuV  | dB         | dBuV       | dB          | dBuV       | dB         |           |         |
| 1  | 0.16155 | 31.34 | -24.04     | 55.38      | 0.08        | 31.10      | 0.16       | NEUTRAL   | AVERAGE |
| 2  | 0.16155 | 43.91 | -21.47     | 65.38      | 0.08        | 43.67      | 0.16       | NEUTRAL   | QP      |
| 3  | 0.20944 | 37.27 | -25.96     | 63.23      | 0.08        | 37.02      | 0.17       | NEUTRAL   | QP      |
| 4  | 0.20944 | 27.72 | -25.51     | 53.23      | 0.08        | 27.47      | 0.17       | NEUTRAL   | AVERAGE |
| 5  | 0.52934 | 35.12 | -20.88     | 56.00      | 0.09        | 34.84      | 0.19       | NEUTRAL   | QP      |
| 6  | 0.52934 | 28.59 | -17.41     | 46.00      | 0.09        | 28.31      | 0.19       | NEUTRAL   | AVERAGE |
| 7  | 1.129   | 19.26 | -26.74     | 46.00      | 0.09        | 18.96      | 0.21       | NEUTRAL   | AVERAGE |
| 8  | 1.129   | 25.04 | -30.96     | 56.00      | 0.09        | 24.74      | 0.21       | NEUTRAL   | QP      |
| 9  | 3.720   | 27.54 | -28.46     | 56.00      | 0.15        | 27.09      | 0.29       | NEUTRAL   | QP      |
| 10 | 3.720   | 21.32 | -24.68     | 46.00      | 0.15        | 20.87      | 0.29       | NEUTRAL   | AVERAGE |
| 11 | 11.080  | 34.03 | -25.97     | 60.00      | 0.27        | 33.37      | 0.39       | NEUTRAL   | QP      |
| 12 | 11.080  | 28.42 | -21.58     | 50.00      | 0.27        | 27.76      | 0.39       | NEUTRAL   | AVERAGE |

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| 26dB Bandwidth         |  |
|------------------------|--|
| Spectrum Parameters    | Setting                                    |
| Attenuation            | Auto                                       |
| Span Frequency         | > 26dB Bandwidth                           |
| RBW                    | Approximately 1% of the emission bandwidth |
| VBW                    | VBW > RBW                                  |
| Detector               | Peak                                       |
| Trace                  | Max Hold                                   |
| Sweep Time             | Auto                                       |
| 99% Occupied Bandwidth |  |
| Spectrum Parameters    | Setting                                    |
| Span                   | 1.5 times to 5.0 times the OBW             |
| RBW                    | 1 % to 5 % of the OBW                      |
| VBW                    | $\geq 3 \times \text{RBW}$                 |
| Detector               | Peak                                       |
| Trace                  | Max Hold                                   |

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Deviation

There is no deviation with the original standard.

### 4.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.6. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

|               |              |                |               |
|---------------|--------------|----------------|---------------|
| Temperature   | 20°C         | Humidity       | 53%           |
| Test Engineer | Robert Chang | Configurations | IEEE 802.11ac |

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 36      | 5180 MHz  | 24.48                | 18.24                        |
| 40      | 5200 MHz  | 24.32                | 18.24                        |
| 48      | 5240 MHz  | 23.84                | 18.08                        |

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 38      | 5190 MHz  | 40.00                | 36.48                        |
| 46      | 5230 MHz  | 40.32                | 36.48                        |

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 42      | 5210 MHz  | 80.64                | 75.52                        |




|                      |              |                       |              |
|----------------------|--------------|-----------------------|--------------|
| <b>Temperature</b>   | 20°C         | <b>Humidity</b>       | 53%          |
| <b>Test Engineer</b> | Robert Chang | <b>Configurations</b> | IEEE 802.11a |

**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4**


| <b>Channel</b> | <b>Frequency</b> | <b>26dB Bandwidth (MHz)</b> | <b>99% Occupied Bandwidth (MHz)</b> |
|----------------|------------------|-----------------------------|-------------------------------------|
| 36             | 5180 MHz         | 25.76                       | 20.64                               |
| 40             | 5200 MHz         | 25.44                       | 19.84                               |
| 48             | 5240 MHz         | 24.80                       | 19.68                               |

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz**

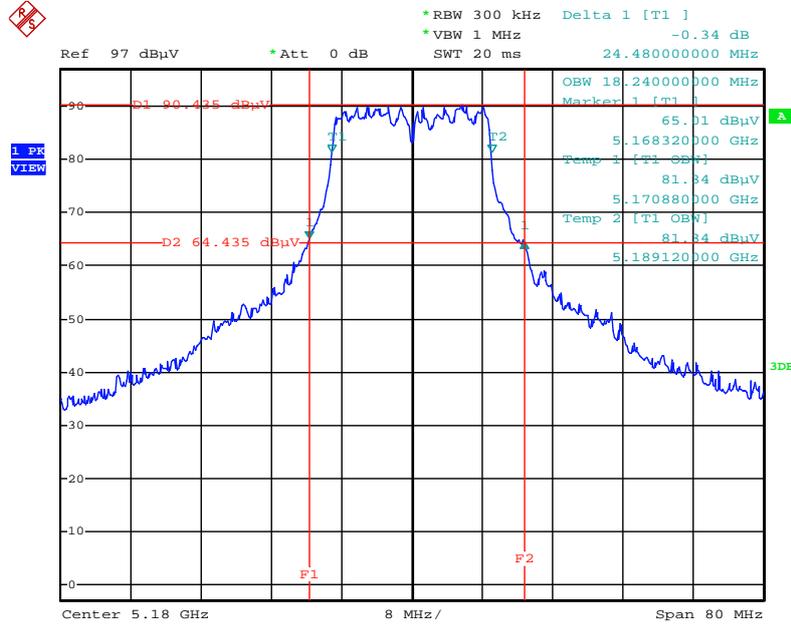


Date: 24.MAY.2014 01:55:26

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz**

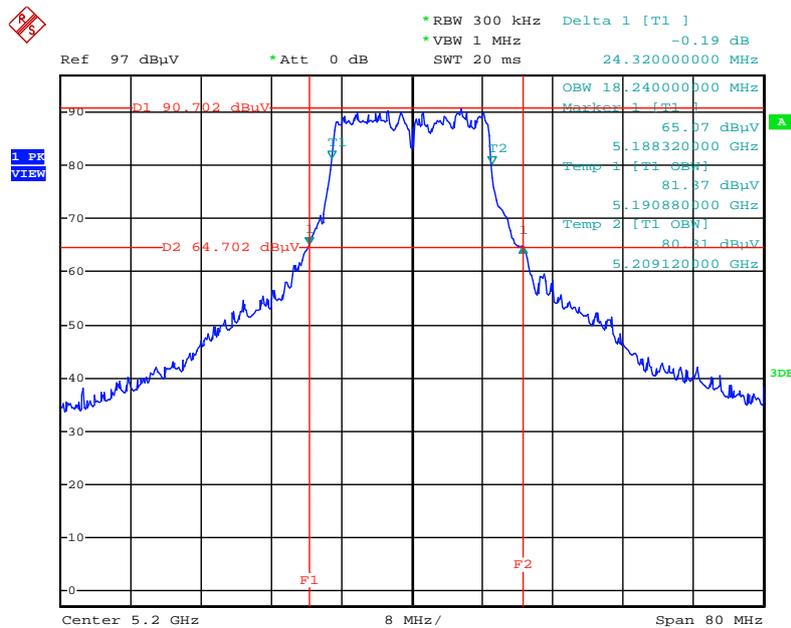


Date: 24.MAY.2014 01:54:49

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz**

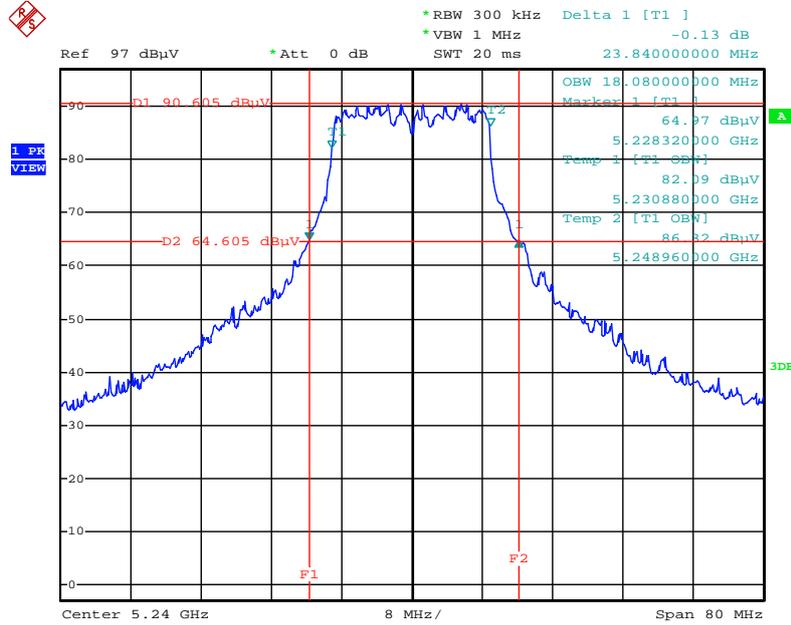


Date: 24.MAY.2014 01:54:09

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz**

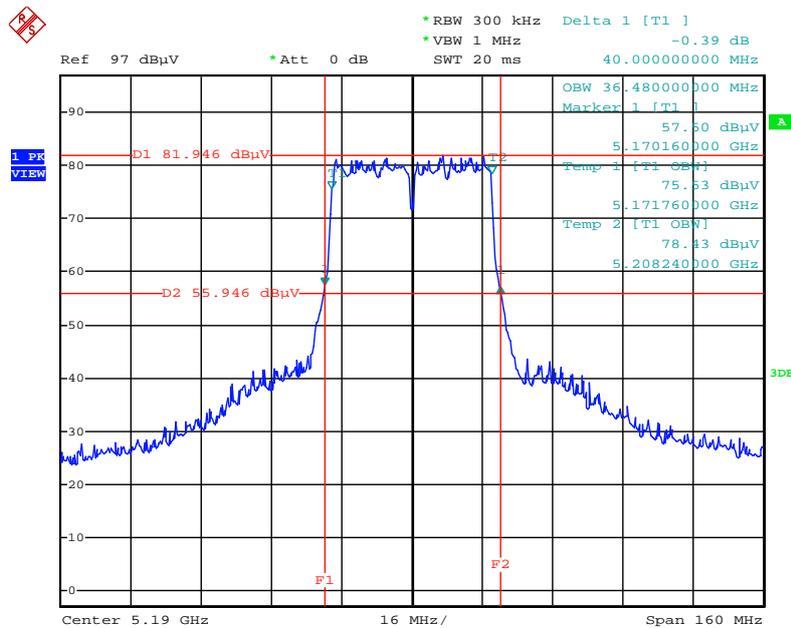


Date: 24.MAY.2014 01:56:17

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz**

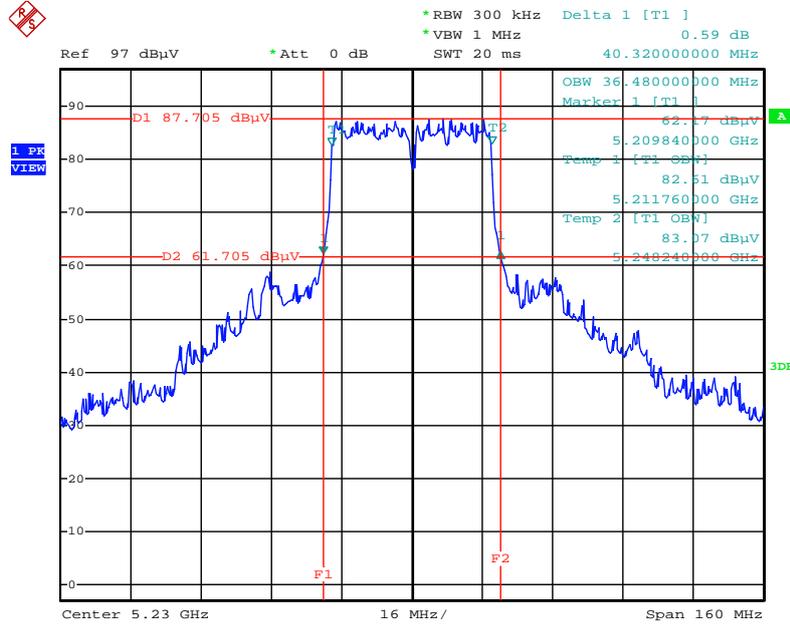


Date: 24.MAY.2014 01:56:54

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz**

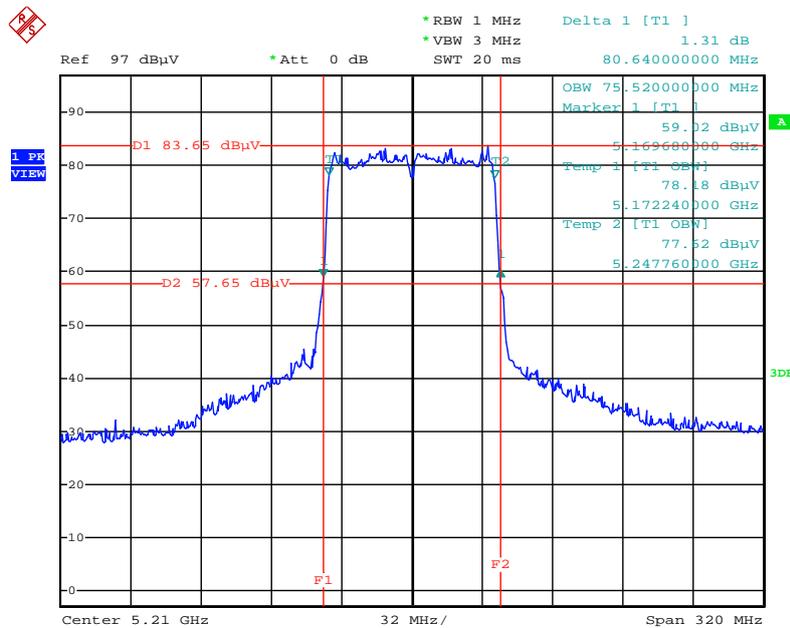


Date: 24.MAY.2014 01:57:39

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz**

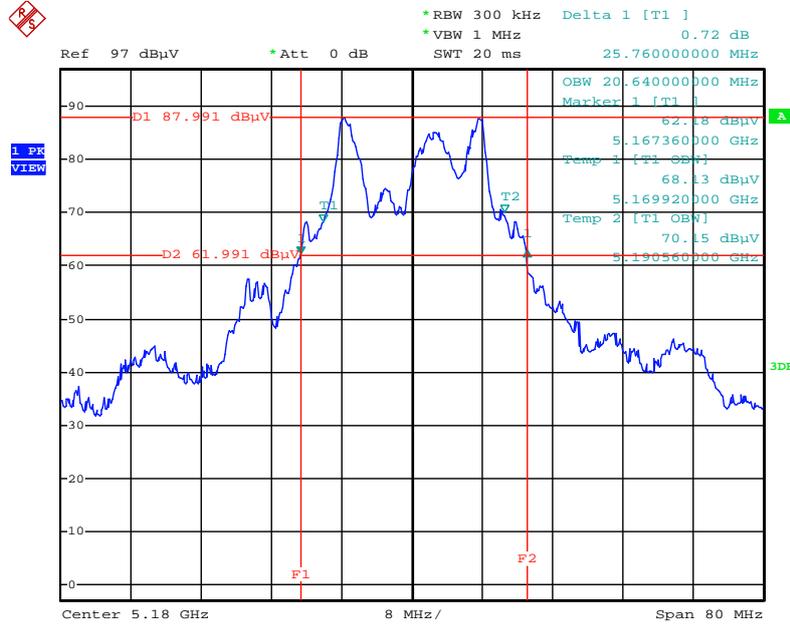


Date: 23.MAY.2014 23:10:29

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz**

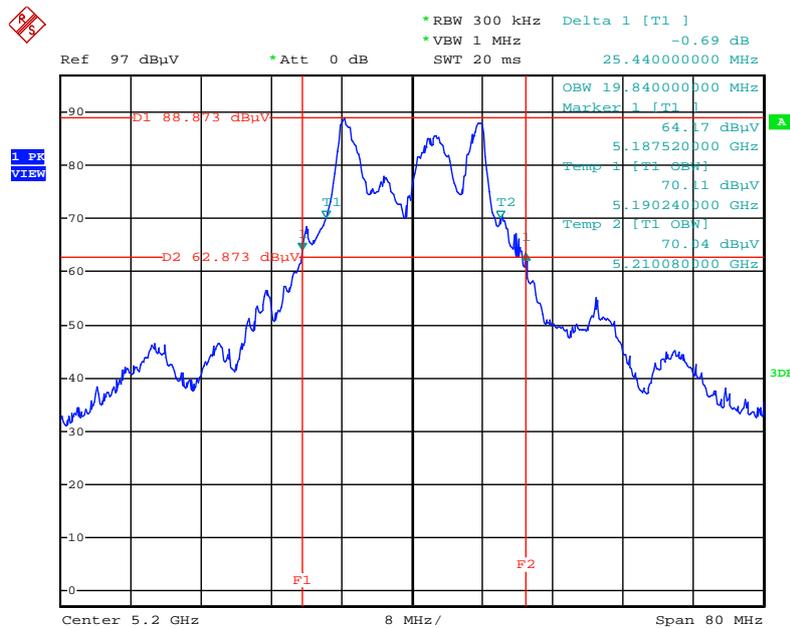

Date: 23.MAY.2014 23:11:02

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz**

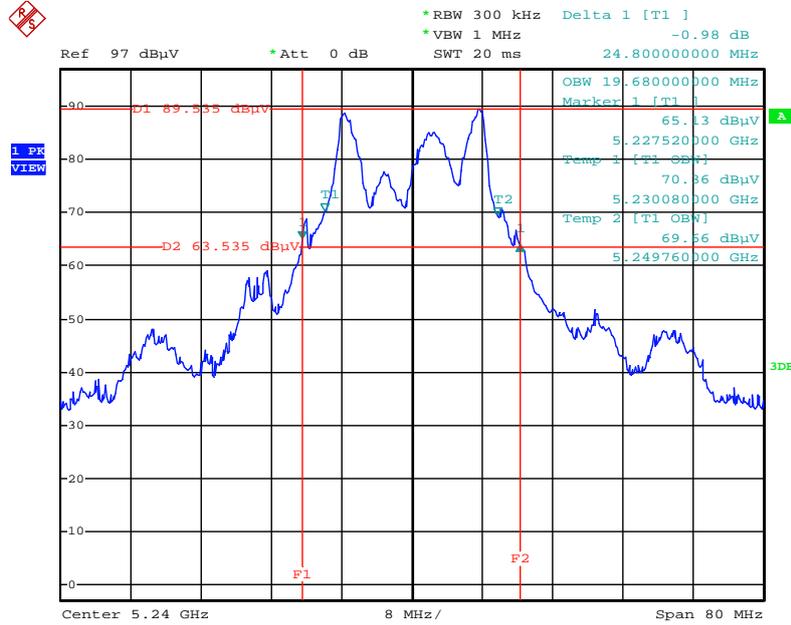

Date: 24.MAY.2014 01:51:45

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|---------|
| Detector              | AVERAGE |

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 General UNII Test Procedures Effective 2014 DR02-41759 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3.Measurement using a Power Meter (PM) =>(b).
3. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems,add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

|               |              |                |               |
|---------------|--------------|----------------|---------------|
| Temperature   | 20°C         | Humidity       | 53%           |
| Test Engineer | Robert Chang | Configurations | IEEE 802.11ac |
| Test Date     | May 23, 2014 |                |               |

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20

| Channel | Frequency | Conducted Power (dBm) |         |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Chain 4 | Total |                  |          |
| 36      | 5180 MHz  | 21.12                 | 21.23   | 21.35   | 21.68   | 27.37 | 27.98            | Complies |
| 40      | 5200 MHz  | 21.44                 | 21.03   | 21.64   | 21.36   | 27.39 | 27.88            | Complies |
| 48      | 5240 MHz  | 21.56                 | 21.06   | 21.42   | 21.31   | 27.36 | 27.68            | Complies |

Note: CH36 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.02\text{dBi} > 6\text{dBi}$ , so limit= $30 - (8.02 - 6) = 27.98\text{dBm}$ .

CH40 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.12\text{dBi} > 6\text{dBi}$ , so limit= $30 - (8.12 - 6) = 27.88\text{dBm}$ .

CH48 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.32\text{dBi} > 6\text{dBi}$ , so limit= $30 - (8.32 - 6) = 27.68\text{dBm}$ .

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40

| Channel | Frequency | Conducted Power (dBm) |         |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Chain 4 | Total |                  |          |
| 38      | 5190 MHz  | 15.41                 | 15.38   | 16.24   | 15.62   | 21.70 | 27.88            | Complies |
| 46      | 5230 MHz  | 21.65                 | 21.12   | 21.46   | 21.04   | 27.35 | 27.68            | Complies |

Note: CH38 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.12\text{dBi} > 6\text{dBi}$ , so limit= $30 - (8.12 - 6) = 27.88\text{dBm}$ .

CH46 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.32\text{dBi} > 6\text{dBi}$ , so limit= $30 - (8.32 - 6) = 27.68\text{dBm}$ .

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80

| Channel | Frequency | Conducted Power (dBm) |         |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Chain 4 | Total |                  |          |
| 42      | 5210 MHz  | 14.46                 | 14.24   | 14.81   | 14.43   | 20.51 | 27.78            | Complies |

Note: CH42 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.22\text{dBi} > 6\text{dBi}$ , so limit= $30 - (8.22 - 6) = 27.78\text{dBm}$ .

|                      |              |                       |              |
|----------------------|--------------|-----------------------|--------------|
| <b>Temperature</b>   | 20°C         | <b>Humidity</b>       | 53%          |
| <b>Test Engineer</b> | Robert Chang | <b>Configurations</b> | IEEE 802.11a |
| <b>Test Date</b>     | May 23, 2014 |                       |              |

**Configuration IEEE 802.11a**

| Channel | Frequency | Conducted Power (dBm) |         |         |         |       | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|---------|---------|---------|-------|------------------|-----------------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Chain 4 | Total |                  |                 |
| 36      | 5180 MHz  | 19.74                 | 19.61   | 20.86   | 20.53   | 26.24 | 30.00            | <b>Complies</b> |
| 40      | 5200 MHz  | 22.31                 | 22.06   | 21.95   | 22.28   | 28.17 | 30.00            | <b>Complies</b> |
| 48      | 5240 MHz  | 21.87                 | 21.95   | 22.12   | 21.96   | 28.00 | 30.00            | <b>Complies</b> |

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

| Frequency Range | Power Spectral Density limit (dBm/MHz) |
|-----------------|--|
| 5.15~5.25 GHz   | 17                                     |

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW                | 1000 kHz   |
| VBW                | 3000 kHz   |
| Detector           | RMS  |
| Trace              | AVERAGE  |
| Sweep Time         | Auto   |
| Trace Average      | 100 times  |

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 General UNII Test Procedures Effective 2014 DR02-41759 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

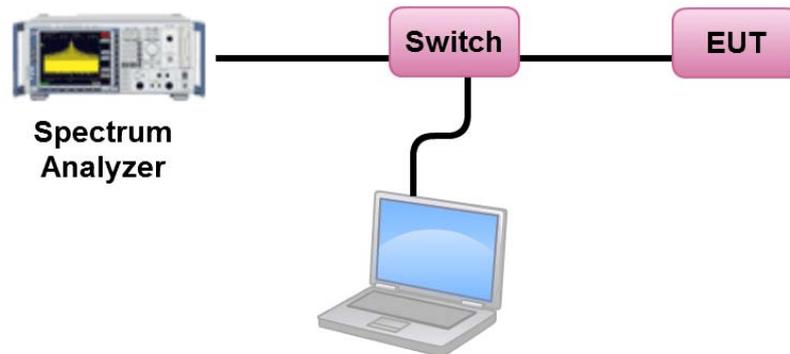

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

|               |              |                |               |
|---------------|--------------|----------------|---------------|
| Temperature   | 20°C         | Humidity       | 53%           |
| Test Engineer | Robert Chang | Configurations | IEEE 802.11ac |
| Test Date     | May 23, 2014 |                |               |

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 36      | 5180 MHz  | 13.61                         | 14.98                | Complies |
| 40      | 5200 MHz  | 13.79                         | 14.88                | Complies |
| 48      | 5240 MHz  | 13.80                         | 14.68                | Complies |

Note: CH36 directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.02\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.02 - 6) = 14.98\text{dBm/MHz}$ .

CH40 directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.12\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.12 - 6) = 14.88\text{dBm/MHz}$ .

CH48 directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.32\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.32 - 6) = 14.68\text{dBm/MHz}$ .

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 38      | 5190 MHz  | 5.26                          | 14.88                | Complies |
| 46      | 5230 MHz  | 10.78                         | 14.68                | Complies |

Note: CH38 directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.12\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.12 - 6) = 14.88\text{dBm/MHz}$ .

CH46 directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.32\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.32 - 6) = 14.68\text{dBm/MHz}$ .

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 42      | 5210 MHz  | 0.84                          | 14.78                | Complies |

Note: CH42 directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.22\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.22 - 6) = 14.78\text{dBm/MHz}$ .

|                      |              |                       |              |
|----------------------|--------------|-----------------------|--------------|
| <b>Temperature</b>   | 20°C         | <b>Humidity</b>       | 53%          |
| <b>Test Engineer</b> | Robert Chang | <b>Configurations</b> | IEEE 802.11a |
| <b>Test Date</b>     | May 23, 2014 |                       |              |

**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4**

| Channel | Frequency | Total Power Density<br>(dBm/MHz) | Max. Limit<br>(dBm/MHz) | Result          |
|---------|-----------|----------------------------------|-------------------------|-----------------|
| 36      | 5180 MHz  | 14.23                            | 14.98                   | <b>Complies</b> |
| 40      | 5200 MHz  | 14.28                            | 14.88                   | <b>Complies</b> |
| 48      | 5240 MHz  | 14.39                            | 14.68                   | <b>Complies</b> |

Note: CH36 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.02\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.02 - 6) = 14.98\text{dBm/MHz}$ .


CH40 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.12\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.12 - 6) = 14.88\text{dBm/MHz}$ .

CH48 directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 8.32\text{dBi} > 6\text{dBi}$ , so limit= $17 - (8.32 - 6) = 14.68\text{dBm/MHz}$ .


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

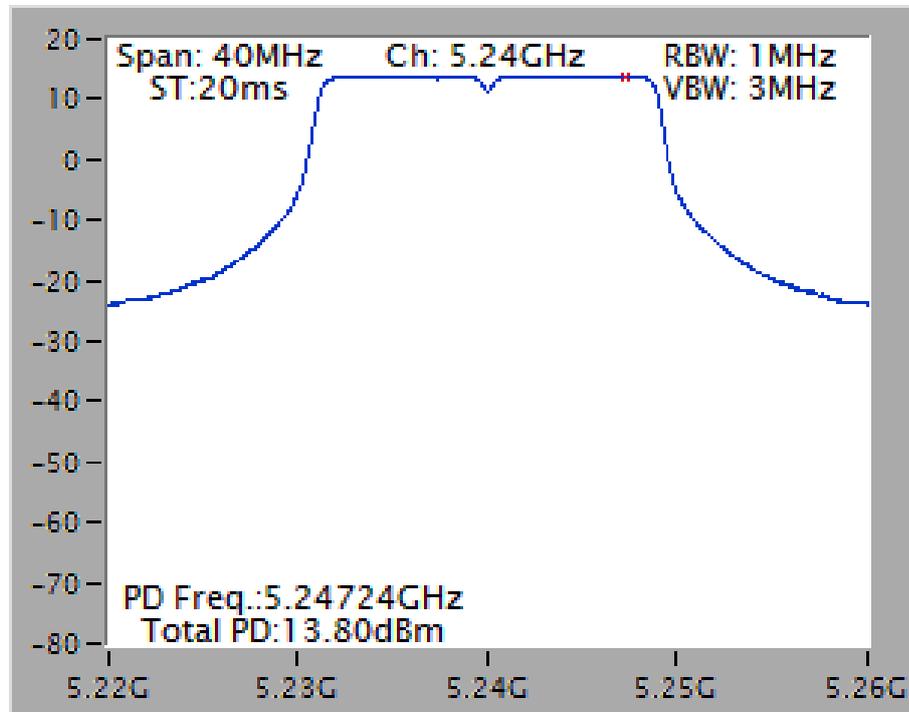


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

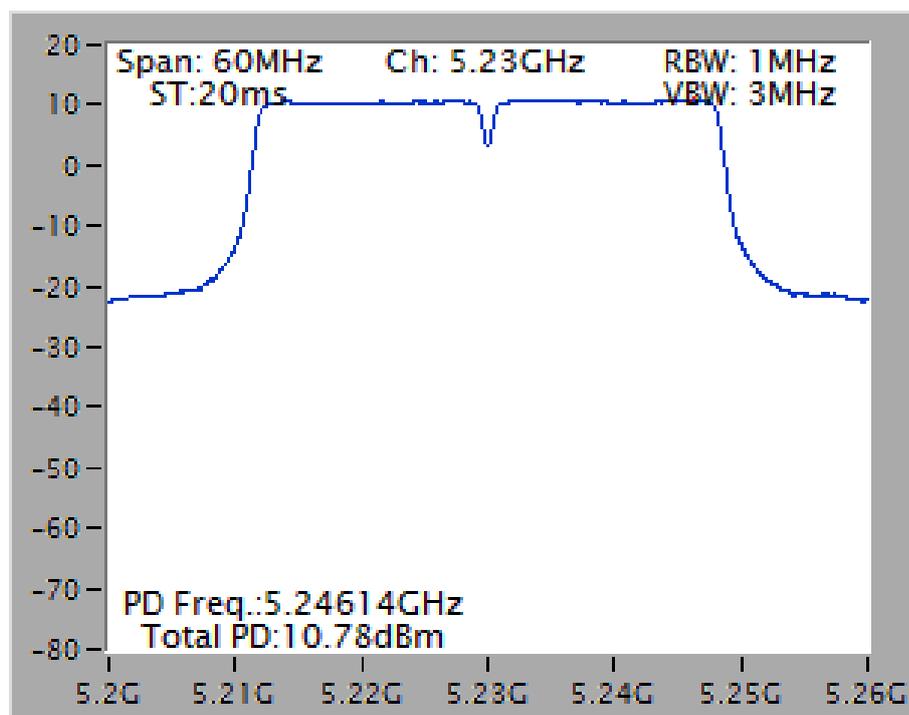

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

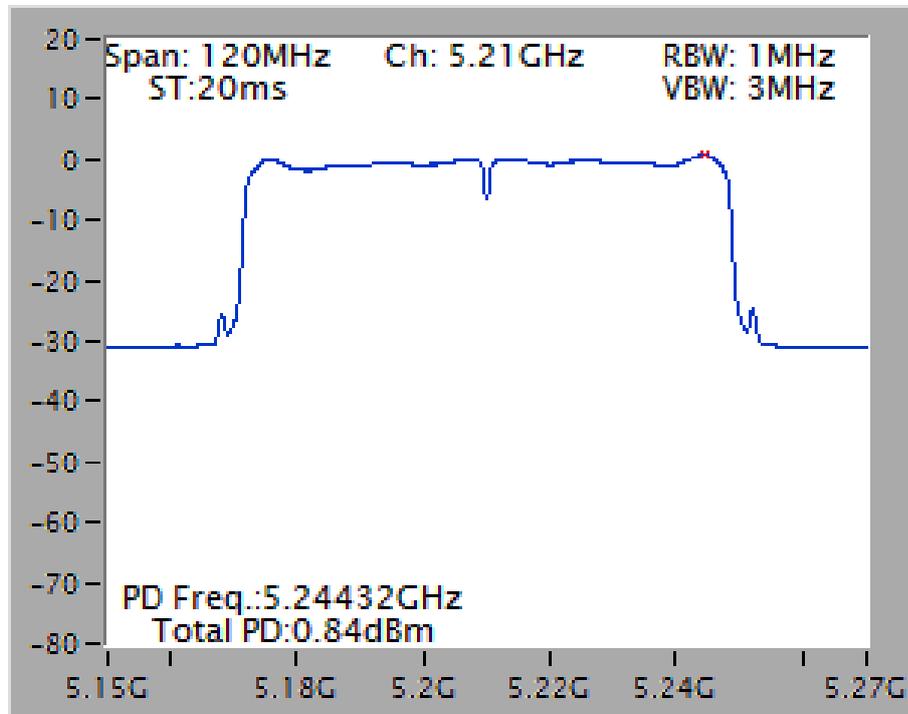

Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

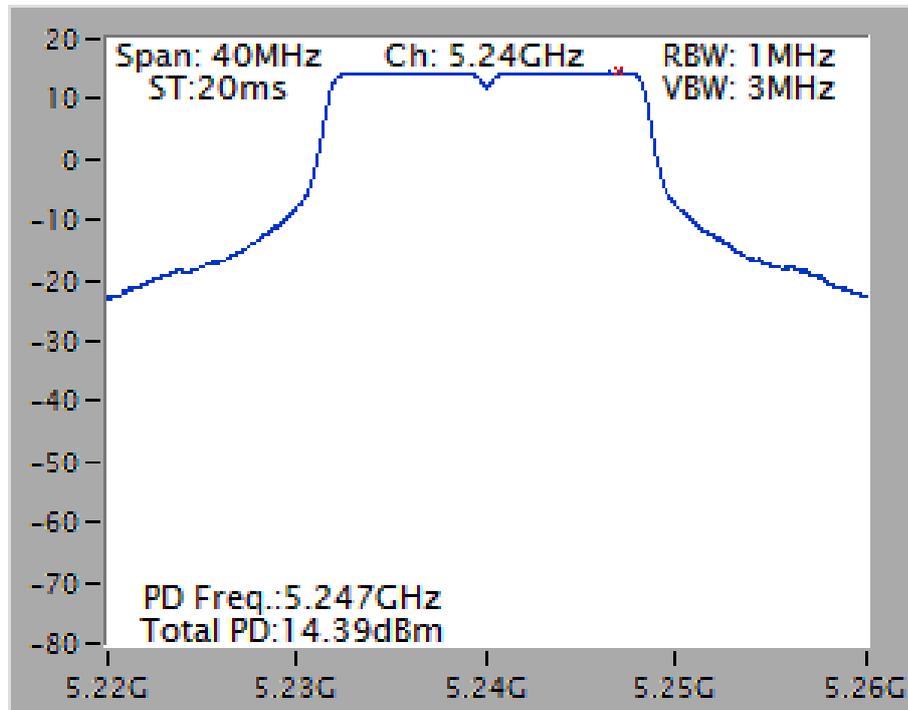

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(kHz)                       | 300                           |
| 0.490~1.705       | 24000/F(kHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                       |
|---|---|
| Attenuation                                 | Auto  |
| Start Frequency                             | 1000 MHz                                      |
| Stop Frequency                              | 40 GHz  |
| RBW / VBW (Emission in restricted band)     | 1MHz / 3MHz for Peak, 1MHz / 10Hz for Average |
| RBW / VBW (Emission in non-restricted band) | 1MHz / 3MHz for peak                          |

| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RBW 120kHz for QP |

#### 4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Deviation

There is no deviation with the original standard.

#### 4.5.5. EUT Operation during Test

##### **Radiated Emissions below 1GHz:**

The EUT was programmed to be in continuously transmitting mode.

##### **Radiated Emissions above 1GHz:**

##### For IEEE 802.11a mode (non-beamforming function):

The EUT was programmed to be in continuously transmitting mode.

##### For IEEE 802.11ac mode (beamforming function):

The EUT was programmed to be in beamforming transmitting mode.

#### 4.5.6. Results of Radiated Emissions (9kHz~30MHz)

|                      |              |                       |     |
|----------------------|--------------|-----------------------|-----|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57% |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | CTX |
| <b>Test Date</b>     | May 27, 2014 |                       |     |

| <b>Freq. (MHz)</b> | <b>Level (dBuV)</b> | <b>Over Limit (dB)</b> | <b>Limit Line (dBuV)</b> | <b>Remark</b> |
|--------------------|---------------------|------------------------|--------------------------|---------------|
| -                  | -                   | -                      | -                        | See Note      |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.7. Results of Radiated Emissions (30MHz~1GHz)


|               |            |                |     |
|---------------|------------|----------------|-----|
| Temperature   | 24°C       | Humidity       | 57% |
| Test Engineer | James Chou | Configurations | CTX |

Horizontal

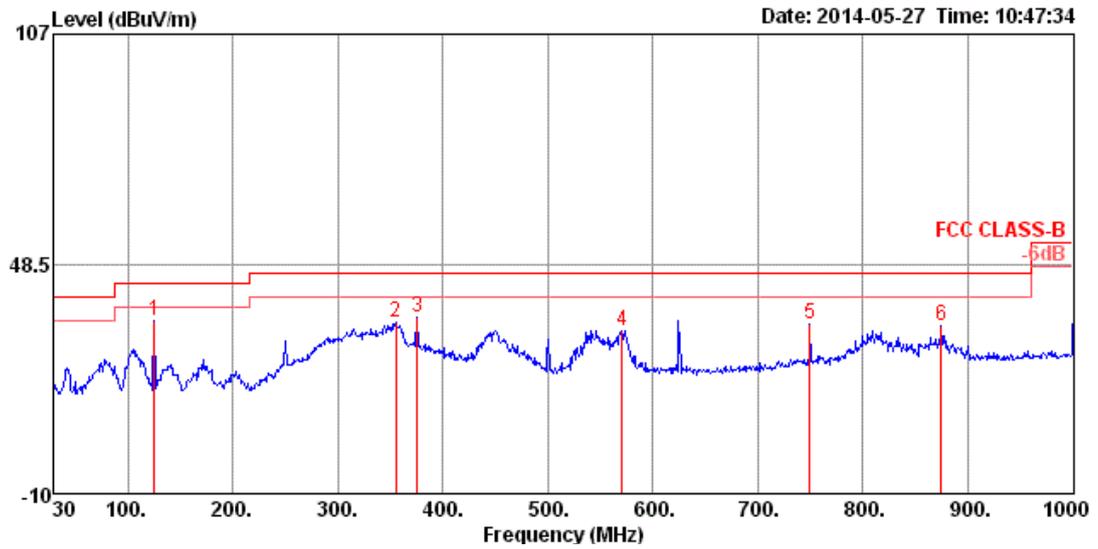

|   | Freq   | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | A/Pos | T/Pos | Pol/Phase  | Remark |
|---|--------|--------|--------|--------|-------|-------|---------|--------|-------|-------|------------|--------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | cm    | deg   |            |        |
| 1 | 125.06 | 33.91  | 43.50  | -9.59  | 52.42 | 1.33  | 11.73   | 31.57  | 300   | 268   | HORIZONTAL | Peak   |
| 2 | 354.95 | 33.62  | 46.00  | -12.38 | 48.14 | 2.33  | 14.49   | 31.34  | 100   | 327   | HORIZONTAL | Peak   |
| 3 | 375.32 | 34.78  | 46.00  | -11.22 | 48.84 | 2.44  | 14.93   | 31.43  | 100   | 122   | HORIZONTAL | Peak   |
| 4 | 570.29 | 31.57  | 46.00  | -14.43 | 41.41 | 3.00  | 18.37   | 31.21  | 150   | 140   | HORIZONTAL | Peak   |
| 5 | 749.74 | 33.02  | 46.00  | -12.98 | 41.17 | 3.53  | 19.69   | 31.37  | 100   | 215   | HORIZONTAL | Peak   |
| 6 | 874.87 | 32.60  | 46.00  | -13.40 | 39.62 | 3.89  | 20.24   | 31.15  | 100   | 110   | HORIZONTAL | Peak   |

**Vertical**

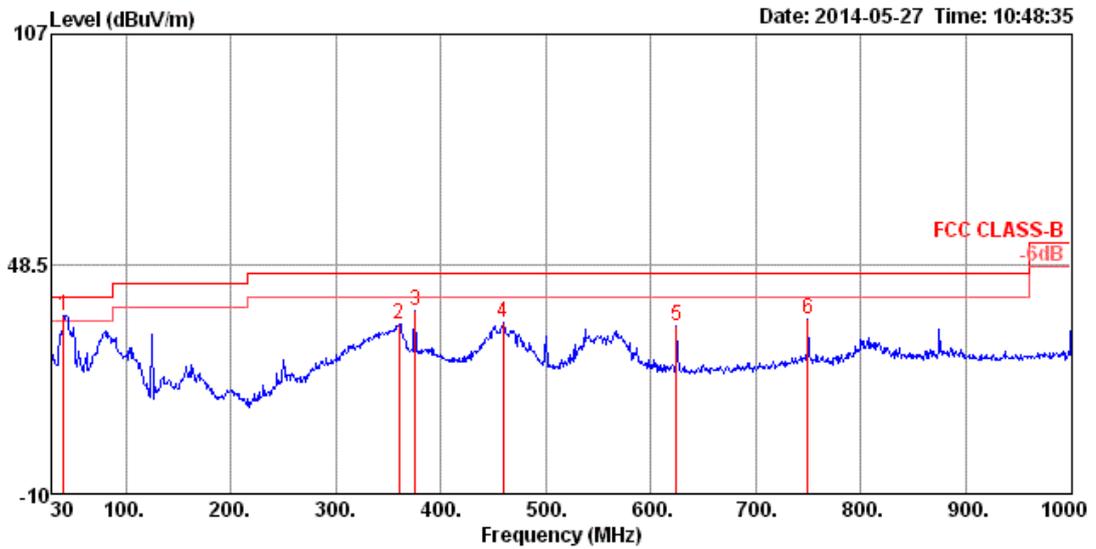

|   | Freq   | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | A/Pos | T/Pos | Pol/Phase    | Remark |
|---|--------|--------|------------|------------|------------|-------------------|---------------|-------|-------|--------------|--------|
|   | MHz    | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | cm    | deg   |              |        |
| 1 | 40.67  | 35.51  | 40.00      | -4.49      | 54.78      | 0.75              | 11.85         | 31.87 | 100   | 89 VERTICAL  | Peak   |
| 2 | 359.80 | 33.17  | 46.00      | -12.83     | 47.49      | 2.35              | 14.66         | 31.33 | 100   | 185 VERTICAL | Peak   |
| 3 | 375.32 | 36.80  | 46.00      | -9.20      | 50.86      | 2.44              | 14.93         | 31.43 | 125   | 205 VERTICAL | Peak   |
| 4 | 459.71 | 33.48  | 46.00      | -12.52     | 45.66      | 2.68              | 16.33         | 31.19 | 125   | 97 VERTICAL  | Peak   |
| 5 | 624.61 | 32.56  | 46.00      | -13.44     | 42.17      | 3.18              | 18.61         | 31.40 | 100   | 5 VERTICAL   | Peak   |
| 6 | 749.74 | 34.56  | 46.00      | -11.44     | 42.71      | 3.53              | 19.69         | 31.37 | 150   | 18 VERTICAL  | Peak   |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.8. Results for Radiated Emissions (1GHz~40GHz)

|                      |              |                       |  |
|----------------------|--------------|-----------------------|--|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%  |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 /<br>Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |  |

##### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | deg   | cm    |            |
| 1 | 15539.62 | 46.31  | 54.00  | -7.69  | 34.51 | 7.85  | 38.67   | 34.72  | Average | 44    | 107   | HORIZONTAL |
| 2 | 15539.97 | 60.66  | 74.00  | -13.34 | 48.86 | 7.85  | 38.67   | 34.72  | Peak    | 44    | 107   | HORIZONTAL |

##### Vertical

|   | Freq     | Level  | Limit  | Over  | Read  | Cable | Antenna | Preamp | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|--------|-------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB    | dBuV  | dB    | dB/m    | dB     |         | deg   | cm    |           |
| 1 | 15539.62 | 65.68  | 74.00  | -8.32 | 53.88 | 7.85  | 38.67   | 34.72  | Peak    | 44    | 103   | VERTICAL  |
| 2 | 15539.70 | 51.15  | 54.00  | -2.85 | 39.35 | 7.85  | 38.67   | 34.72  | Average | 44    | 103   | VERTICAL  |



|                      |              |                       |   |
|----------------------|--------------|-----------------------|---|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%   |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | Remark | T/Pos   | A/Pos | Pol/Phase      |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|----------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     | deg     | cm    |                |
| 1 | 15599.56 | 62.72  | 74.00  | -11.28 | 51.01 | 7.88         | 38.62  | 34.79  | Peak    | 44    | 100 HORIZONTAL |
| 2 | 15599.85 | 49.38  | 54.00  | -4.62  | 37.67 | 7.88         | 38.62  | 34.79  | Average | 44    | 100 HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | Remark | T/Pos   | A/Pos | Pol/Phase    |
|---|----------|--------|--------|-------|-------|--------------|--------|--------|---------|-------|--------------|
|   | MHz      | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB     | deg     | cm    |              |
| 1 | 15599.68 | 69.18  | 74.00  | -4.82 | 57.47 | 7.88         | 38.62  | 34.79  | Peak    | 38    | 177 VERTICAL |
| 2 | 15599.96 | 53.49  | 54.00  | -0.51 | 41.78 | 7.88         | 38.62  | 34.79  | Average | 38    | 177 VERTICAL |



|                      |              |                       |   |
|----------------------|--------------|-----------------------|---|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%   |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |            |
| 1 | 15719.68 | 48.18  | 54.00      | -5.82      | 36.62      | 7.92              | 38.52          | 34.88         | Average | 133   | 100   | HORIZONTAL |
| 2 | 15720.35 | 62.34  | 74.00      | -11.66     | 50.78      | 7.92              | 38.52          | 34.88         | Peak    | 133   | 100   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 15719.57 | 51.54  | 54.00      | -2.46      | 39.98      | 7.92              | 38.52          | 34.88         | Average | 36    | 176   | VERTICAL  |
| 2 | 15719.70 | 67.00  | 74.00      | -7.00      | 55.44      | 7.92              | 38.52          | 34.88         | Peak    | 36    | 176   | VERTICAL  |

|                      |              |                       |  |
|----------------------|--------------|-----------------------|--|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%  |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 /<br>Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |       | T/Pos   | A/Pos | Pol/Phase      |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|---------|-------|----------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg     | cm    |                |
| 1 | 15570.25 | 46.59  | 54.00  | -7.41  | 34.83 | 7.86         | 38.64  | 34.74 | Average | 38    | 100 HORIZONTAL |
| 2 | 15570.25 | 59.49  | 74.00  | -14.51 | 47.73 | 7.86         | 38.64  | 34.74 | Peak    | 38    | 100 HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |       | T/Pos   | A/Pos | Pol/Phase    |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|---------|-------|--------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg     | cm    |              |
| 1 | 15569.84 | 62.63  | 74.00  | -11.37 | 50.87 | 7.86         | 38.64  | 34.74 | Peak    | 43    | 100 VERTICAL |
| 2 | 15570.36 | 49.27  | 54.00  | -4.73  | 37.51 | 7.86         | 38.64  | 34.74 | Average | 43    | 100 VERTICAL |



|                      |              |                       |   |
|----------------------|--------------|-----------------------|---|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%   |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |            |
| 1 | 15689.80 | 46.78  | 54.00      | -7.22      | 35.18      | 7.90              | 38.55          | 34.85         | Average | 180   | 100   | HORIZONTAL |
| 2 | 15690.28 | 58.84  | 74.00      | -15.16     | 47.24      | 7.90              | 38.55          | 34.85         | Peak    | 180   | 100   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 15689.52 | 49.31  | 54.00      | -4.69      | 37.71      | 7.90              | 38.55          | 34.85         | Average | 42    | 174   | VERTICAL  |
| 2 | 15689.96 | 63.16  | 74.00      | -10.84     | 51.56      | 7.90              | 38.55          | 34.85         | Peak    | 42    | 174   | VERTICAL  |



|                      |              |                       |   |
|----------------------|--------------|-----------------------|---|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%   |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | Remark | T/Pos   | A/Pos | Pol/Phase      |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|----------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     | deg     | cm    |                |
| 1 | 15629.66 | 54.45  | 74.00  | -19.55 | 42.78 | 7.89         | 38.59  | 34.81  | Peak    | 210   | 100 HORIZONTAL |
| 2 | 15630.00 | 41.62  | 54.00  | -12.38 | 29.95 | 7.89         | 38.59  | 34.81  | Average | 210   | 100 HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | Remark | T/Pos   | A/Pos | Pol/Phase    |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|--------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     | deg     | cm    |              |
| 1 | 15629.88 | 55.13  | 74.00  | -18.87 | 43.46 | 7.89         | 38.59  | 34.81  | Peak    | 58    | 100 VERTICAL |
| 2 | 15629.88 | 41.75  | 54.00  | -12.25 | 30.08 | 7.89         | 38.59  | 34.81  | Average | 50    | 100 VERTICAL |



|                      |              |                       |  |
|----------------------|--------------|-----------------------|--|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%  |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |            |
| 1 | 15550.43 | 46.65  | 54.00      | -7.35      | 34.94      | 7.86              | 38.66          | 34.81         | Average | 110   | 100   | HORIZONTAL |
| 2 | 15550.87 | 58.93  | 74.00      | -15.07     | 47.22      | 7.86              | 38.66          | 34.81         | Peak    | 110   | 100   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 15553.65 | 60.26  | 74.00      | -13.74     | 48.55      | 7.86              | 38.66          | 34.81         | Peak    | 303   | 131   | VERTICAL  |
| 2 | 15553.80 | 48.36  | 54.00      | -5.64      | 36.65      | 7.86              | 38.66          | 34.81         | Average | 303   | 131   | VERTICAL  |



|                      |              |                       |  |
|----------------------|--------------|-----------------------|--|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%  |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 16, 2014 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |            |
| 1 | 10407.60 | 44.32  | 54.00      | -9.68      | 34.56      | 6.56              | 38.34          | 35.14         | Average | 81    | 100   | HORIZONTAL |
| 2 | 10421.00 | 51.98  | 74.00      | -22.02     | 42.20      | 6.57              | 38.35          | 35.14         | Peak    | 81    | 100   | HORIZONTAL |
| 3 | 15600.20 | 48.38  | 54.00      | -5.62      | 36.67      | 7.88              | 38.62          | 34.79         | Average | 305   | 100   | HORIZONTAL |
| 4 | 15638.60 | 56.26  | 74.00      | -17.74     | 44.59      | 7.89              | 38.59          | 34.81         | Peak    | 305   | 100   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 10410.20 | 49.93  | 54.00      | -4.07      | 40.15      | 6.57              | 38.35          | 35.14         | Average | 295   | 116   | VERTICAL  |
| 2 | 10410.50 | 63.33  | 74.00      | -10.67     | 53.55      | 6.57              | 38.35          | 35.14         | Peak    | 295   | 116   | VERTICAL  |
| 3 | 15595.80 | 51.09  | 54.00      | -2.91      | 39.36      | 7.88              | 38.62          | 34.77         | Average | 131   | 186   | VERTICAL  |
| 4 | 15596.60 | 64.43  | 74.00      | -9.57      | 52.70      | 7.88              | 38.62          | 34.77         | Peak    | 131   | 186   | VERTICAL  |



|                      |              |                       |  |
|----------------------|--------------|-----------------------|--|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%  |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 16, 2014 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | deg   | cm    |            |
| 1 | 10486.10 | 56.47  | 74.00      | -17.53     | 46.53      | 6.63       | 38.39          | 35.08         | Peak    | 346   | 100   | HORIZONTAL |
| 2 | 10487.60 | 44.08  | 54.00      | -9.92      | 34.14      | 6.63       | 38.39          | 35.08         | Average | 346   | 100   | HORIZONTAL |
| 3 | 15720.30 | 46.78  | 54.00      | -7.22      | 35.22      | 7.92       | 38.52          | 34.88         | Average | 167   | 100   | HORIZONTAL |
| 4 | 15722.40 | 60.18  | 74.00      | -13.82     | 48.62      | 7.92       | 38.52          | 34.88         | Peak    | 167   | 100   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 10486.40 | 48.96  | 54.00      | -5.04      | 39.02      | 6.63       | 38.39          | 35.08         | Average | 24    | 100   | VERTICAL  |
| 2 | 10487.20 | 61.70  | 74.00      | -12.30     | 51.76      | 6.63       | 38.39          | 35.08         | Peak    | 24    | 100   | VERTICAL  |
| 3 | 15721.80 | 65.68  | 74.00      | -8.32      | 54.12      | 7.92       | 38.52          | 34.88         | Peak    | 136   | 207   | VERTICAL  |
| 4 | 15722.50 | 51.51  | 54.00      | -2.49      | 39.95      | 7.92       | 38.52          | 34.88         | Average | 136   | 207   | VERTICAL  |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                          | Setting   |
|---|---|
| Attenuation                                 | Auto  |
| Span Frequency                              | 100 MHz   |
| RBW / VBW (Emission in restricted band)     | 1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average |
| RBW / VBW (Emission in non-restricted band) | 1 MHz / 3MHz for Peak                           |

### 4.6.3. Test Procedures

The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.6.4. Test Deviation

There is no deviation with the original standard.

### 4.6.5. EUT Operation during Test

For IEEE 802.11a mode (non-beamforming function):

The EUT was programmed to be in continuously transmitting mode.

For IEEE 802.11ac mode (beamforming function):

The EUT was programmed to be in beamforming transmitting mode.

#### 4.6.6. Test Result of Band Edge and Fundamental Emissions

|                      |              |                       |   |
|----------------------|--------------|-----------------------|---|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%   |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 14, 2014 |                       |   |

##### Channel 36

|   | Freq    | Level  | Limit  | Over  | Read   | Cable | Antenna | Preamp | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|--------|-------|--------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV   | Loss  | Factor  | Factor |         | deg   | cm    |           |
| 1 | 5143.59 | 53.51  | 54.00  | -0.49 | 50.56  | 4.34  | 33.14   | 34.53  | Average | 218   | 212   | VERTICAL  |
| 2 | 5145.51 | 69.14  | 74.00  | -4.86 | 66.19  | 4.34  | 33.14   | 34.53  | Peak    | 218   | 212   | VERTICAL  |
| 3 | 5186.89 | 122.98 |        |       | 119.96 | 4.36  | 33.19   | 34.53  | Peak    | 218   | 212   | VERTICAL  |
| 4 | 5186.89 | 110.64 |        |       | 107.62 | 4.36  | 33.19   | 34.53  | Average | 218   | 212   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

|   | Freq    | Level  | Limit  | Over  | Read   | Cable | Antenna | Preamp | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|--------|-------|--------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV   | Loss  | Factor  | Factor |         | deg   | cm    |           |
| 1 | 5149.36 | 64.96  | 74.00  | -9.04 | 62.01  | 4.34  | 33.14   | 34.53  | Peak    | 219   | 222   | VERTICAL  |
| 2 | 5150.00 | 51.68  | 54.00  | -2.32 | 48.73  | 4.34  | 33.14   | 34.53  | Average | 219   | 222   | VERTICAL  |
| 3 | 5195.83 | 125.04 |        |       | 121.98 | 4.37  | 33.22   | 34.53  | Peak    | 219   | 222   | VERTICAL  |
| 4 | 5198.72 | 112.91 |        |       | 109.85 | 4.37  | 33.22   | 34.53  | Average | 219   | 222   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

|   | Freq    | Level  | Limit  | Over   | Read   | Cable | Antenna | Preamp | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|--------|--------|--------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV   | Loss  | Factor  | Factor |         | deg   | cm    |           |
| 1 | 5132.21 | 61.96  | 74.00  | -12.04 | 59.05  | 4.33  | 33.11   | 34.53  | Peak    | 182   | 224   | VERTICAL  |
| 2 | 5150.00 | 49.33  | 54.00  | -4.67  | 46.38  | 4.34  | 33.14   | 34.53  | Average | 182   | 224   | VERTICAL  |
| 3 | 5241.92 | 124.68 |        |        | 121.51 | 4.40  | 33.30   | 34.53  | Peak    | 182   | 224   | VERTICAL  |
| 4 | 5243.85 | 113.15 |        |        | 109.98 | 4.40  | 33.30   | 34.53  | Average | 182   | 224   | VERTICAL  |
| 5 | 5353.37 | 63.77  | 74.00  | -10.23 | 60.37  | 4.47  | 33.46   | 34.53  | Peak    | 182   | 224   | VERTICAL  |
| 6 | 5360.10 | 51.21  | 54.00  | -2.79  | 47.81  | 4.47  | 33.46   | 34.53  | Average | 182   | 224   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5240 MHz.



|                      |              |                       |   |
|----------------------|--------------|-----------------------|---|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%   |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 14, 2014 |                       |   |

**Channel 38**

|   | Freq    | Level  | Limit  | Over  | Read   | CableAntenna | Preamp | Remark | T/Pos   | A/Pos | Pol/Phase    |
|---|---------|--------|--------|-------|--------|--------------|--------|--------|---------|-------|--------------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV   | dB           | dB/m   | dB     | deg     | cm    |              |
| 1 | 5150.00 | 67.81  | 74.00  | -6.19 | 64.86  | 4.34         | 33.14  | 34.53  | Peak    | 219   | 212 VERTICAL |
| 2 | 5150.00 | 53.89  | 54.00  | -0.11 | 50.94  | 4.34         | 33.14  | 34.53  | Average | 219   | 212 VERTICAL |
| 3 | 5187.12 | 99.99  |        |       | 96.97  | 4.36         | 33.19  | 34.53  | Average | 219   | 212 VERTICAL |
| 4 | 5187.76 | 115.07 |        |       | 112.05 | 4.36         | 33.19  | 34.53  | Peak    | 219   | 212 VERTICAL |

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

|   | Freq    | Level  | Limit  | Over  | Read   | CableAntenna | Preamp | Remark | T/Pos   | A/Pos | Pol/Phase    |
|---|---------|--------|--------|-------|--------|--------------|--------|--------|---------|-------|--------------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV   | dB           | dB/m   | dB     | deg     | cm    |              |
| 1 | 5150.00 | 67.81  | 74.00  | -6.19 | 64.86  | 4.34         | 33.14  | 34.53  | Peak    | 218   | 221 VERTICAL |
| 2 | 5150.00 | 53.60  | 54.00  | -0.40 | 50.65  | 4.34         | 33.14  | 34.53  | Average | 218   | 221 VERTICAL |
| 3 | 5227.44 | 123.52 |        |       | 120.39 | 4.39         | 33.27  | 34.53  | Peak    | 218   | 221 VERTICAL |
| 4 | 5227.76 | 108.16 |        |       | 105.03 | 4.39         | 33.27  | 34.53  | Average | 218   | 221 VERTICAL |

Item 3, 4 are the fundamental frequency at 5230 MHz.



|                      |              |                       |  |
|----------------------|--------------|-----------------------|--|
| <b>Temperature</b>   | 24°C         | <b>Humidity</b>       | 57%  |
| <b>Test Engineer</b> | James Chou   | <b>Configurations</b> | IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 /<br>Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | May 15, 2014 |                       |  |

**Channel 42**

|   | Freq    | Level  | Limit  | Over  | Read   | CableAntenna | Preamp | Remark | T/Pos   | A/Pos | Pol/Phase    |
|---|---------|--------|--------|-------|--------|--------------|--------|--------|---------|-------|--------------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV   | dB           | dB/m   | dB     | deg     | cm    |              |
| 1 | 5148.40 | 67.24  | 74.00  | -6.76 | 64.29  | 4.34         | 33.14  | 34.53  | Peak    | 218   | 212 VERTICAL |
| 2 | 5150.00 | 53.37  | 54.00  | -0.63 | 50.42  | 4.34         | 33.14  | 34.53  | Average | 218   | 212 VERTICAL |
| 3 | 5225.22 | 110.84 |        |       | 107.71 | 4.39         | 33.27  | 34.53  | Peak    | 218   | 212 VERTICAL |
| 4 | 5226.03 | 98.33  |        |       | 95.20  | 4.39         | 33.27  | 34.53  | Average | 218   | 212 VERTICAL |

Item 3, 4 are the fundamental frequency at 5210 MHz.

|                      |  |                       |  |
|----------------------|--|-----------------------|--|
| <b>Temperature</b>   | 24°C   | <b>Humidity</b>       | 57%  |
| <b>Test Engineer</b> | James Chou                                     | <b>Configurations</b> | IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4 |
| <b>Test Date</b>     | CH 36: Apr. 04, 2014 / CH 40, 48: May 16, 2014 |                       |  |

### Channel 36

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 5150.00 | 67.75  | 74.00      | -6.25      | 64.80      | 4.34       | 33.14          | 34.53         | Peak    | 260   | 233   | VERTICAL  |
| 2 | 5150.00 | 53.64  | 54.00      | -0.36      | 50.69      | 4.34       | 33.14          | 34.53         | Average | 260   | 233   | VERTICAL  |
| 3 | 5187.20 | 101.12 |            |            | 98.10      | 4.36       | 33.19          | 34.53         | Average | 260   | 233   | VERTICAL  |
| 4 | 5187.60 | 116.35 |            |            | 113.33     | 4.36       | 33.19          | 34.53         | Peak    | 260   | 233   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 5148.00 | 62.76  | 74.00      | -11.24     | 59.81      | 4.34       | 33.14          | 34.53         | Peak    | 179   | 242   | VERTICAL  |
| 2 | 5148.00 | 51.76  | 54.00      | -2.24      | 48.81      | 4.34       | 33.14          | 34.53         | Average | 179   | 242   | VERTICAL  |
| 3 | 5207.00 | 121.79 |            |            | 118.73     | 4.37       | 33.22          | 34.53         | Peak    | 179   | 242   | VERTICAL  |
| 4 | 5207.00 | 111.79 |            |            | 108.73     | 4.37       | 33.22          | 34.53         | Average | 179   | 242   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | deg   | cm    |           |
| 1 | 5060.00 | 61.62  | 74.00      | -12.38     | 58.86      | 4.28       | 33.01          | 34.53         | Peak    | 315   | 245   | VERTICAL  |
| 2 | 5150.00 | 49.08  | 54.00      | -4.92      | 46.13      | 4.34       | 33.14          | 34.53         | Average | 315   | 245   | VERTICAL  |
| 3 | 5234.00 | 122.34 |            |            | 119.21     | 4.39       | 33.27          | 34.53         | Peak    | 315   | 245   | VERTICAL  |
| 4 | 5235.00 | 112.17 |            |            | 109.04     | 4.39       | 33.27          | 34.53         | Average | 315   | 245   | VERTICAL  |
| 5 | 5354.00 | 51.49  | 54.00      | -2.51      | 48.09      | 4.47       | 33.46          | 34.53         | Average | 315   | 245   | VERTICAL  |
| 6 | 5376.00 | 63.81  | 74.00      | -10.19     | 60.37      | 4.48       | 33.49          | 34.53         | Peak    | 315   | 245   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.7. Frequency Stability Measurement

### 4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Entire absence of modulation emissions bandwidth |
| RBW                | 10 kHz   |
| VBW                | 10 kHz   |
| Sweep Time         | Auto   |

### 4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.7.4. Test Setup Layout

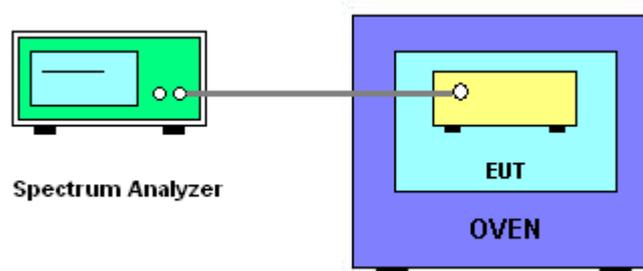

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.7.7. Test Result of Frequency Stability

|                      |              |                  |              |
|----------------------|--------------|------------------|--------------|
| <b>Temperature</b>   | 20°C         | <b>Humidity</b>  | 53%          |
| <b>Test Engineer</b> | Robert Chang | <b>Test Date</b> | May 23, 2014 |

#### Voltage vs. Frequency Stability

| Voltage              | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (V)                  | 5200 MHz                    |
| 126.50               | 5199.9946                   |
| 110.00               | 5199.9946                   |
| 93.50                | 5199.9942                   |
| Max. Deviation (MHz) | 0.0058                      |
| Max. Deviation (ppm) | 1.12                        |

#### Temperature vs. Frequency Stability

| Temperature          | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (°C)                 | 5200 MHz                    |
| -30                  | 5199.9862                   |
| -20                  | 5199.9878                   |
| -10                  | 5199.9900                   |
| 0                    | 5199.9918                   |
| 10                   | 5199.9936                   |
| 20                   | 5199.9946                   |
| 30                   | 5199.9964                   |
| 40                   | 5199.9982                   |
| 50                   | 5199.9998                   |
| Max. Deviation (MHz) | 0.0138                      |
| Max. Deviation (ppm) | 2.65                        |

## **4.8. Antenna Requirements**

### **4.8.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **4.8.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

| Instrument                 | Manufacturer | Model No.        | Serial No.  | Characteristics   | Calibration Date | Remark                |
|----------------------------|--------------|------------------|-------------|-------------------|------------------|-----------------------|
| MXE EMI Receiver           | Agilent      | N9038A           | MY52260140  | 9kHz ~ 8 GHz      | Dec. 25, 2013    | Conduction (CO01-CB)  |
| LISN                       | F.C.C.       | FCC-LISN-50-16-2 | 04083       | 150 kHz ~ 100 MHz | Nov. 23, 2013    | Conduction (CO01-CB)  |
| LISN                       | Schwarzbeck  | NSLK 8127        | 8127478     | 9kHz ~ 30MHz      | Nov. 11, 2013    | Conduction (CO01-CB)  |
| COND Cable                 | Woken        | Cable            | 01          | 150 kHz ~ 30 MHz  | Dec. 04, 2013    | Conduction (CO01-CB)  |
| Software                   | Audix        | E3               | 5.410e      | -                 | N.C.R.           | Conduction (CO01-CB)  |
| BILOG ANTENNA              | Teseq GmbH   | CBL 6112D        | 35236       | 30MHz ~ 2GHz      | Nov. 29, 2013    | Radiation (O3CH01-CB) |
| Loop Antenna               | Teseq        | HLA 6120         | 24155       | 9 kHz - 30 MHz    | Nov. 05, 2012*   | Radiation (O3CH01-CB) |
| Horn Antenna               | EMCO         | 3115             | 00075790    | 750MHz~18GHz      | Nov. 01, 2013    | Radiation (O3CH01-CB) |
| Horn Antenna               | SCHWARZBEAK  | BBHA 9170        | BBHA9170252 | 15GHz ~ 40GHz     | Dec. 17, 2013    | Radiation (O3CH01-CB) |
| Pre-Amplifier              | Agilent      | 8447D            | 2944A10991  | 0.1MHz ~ 1.3GHz   | Nov. 12, 2013    | Radiation (O3CH01-CB) |
| Pre-Amplifier              | Agilent      | 8449B            | 3008A02310  | 1GHz ~ 26.5GHz    | Dec. 16, 2013    | Radiation (O3CH01-CB) |
| Pre-Amplifier              | WM           | TF-130N-R1       | 923365      | 26GHz ~ 40GHz     | Oct. 23, 2013    | Radiation (O3CH01-CB) |
| Spectrum analyzer          | R&S          | FSP40            | 100019      | 9kHz~40GHz        | Dec. 02, 2013    | Radiation (O3CH01-CB) |
| EMI Test Receiver          | Agilent      | N9038A           | MY52260123  | 9kHz ~ 8GHz       | Dec. 12, 2013    | Radiation (O3CH01-CB) |
| Turn Table                 | INN CO       | CO 2000          | N/A         | 0 ~ 360 degree    | N.C.R.           | Radiation (O3CH01-CB) |
| Antenna Mast               | INN CO       | CO2000           | N/A         | 1 m - 4 m         | N.C.R.           | Radiation (O3CH01-CB) |
| RF Cable-low               | Woken        | Low Cable-1      | N/A         | 30 MHz - 1 GHz    | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken        | High Cable-1     | N/A         | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken        | High Cable-2     | N/A         | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken        | High Cable-3     | N/A         | 1 GHz - 40 GHz    | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken        | High Cable-4     | N/A         | 1 GHz - 40 GHz    | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| Signal analyzer            | R&S          | FSV40            | 100979      | 9kHz~40GHz        | Nov. 29, 2013    | Conducted (TH01-CB)   |
| Temp. and Humidity Chamber | Ten Billion  | TTH-D3SP         | TBN-931011  | -30~100 degree    | Jun. 04, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-7     | -           | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-8     | -           | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-9     | -           | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-10    | -           | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken        | High Cable-11    | -           | 1 GHz - 26.5 GHz  | Nov. 17, 2013    | Conducted (TH01-CB)   |
| Power Sensor               | Anritsu      | MA2411B          | 0917223     | 300MHz~40GHz      | Sep. 18, 2013    | Conducted (TH01-CB)   |
| Power Meter                | Anritsu      | ML2495A          | 1035008     | 300MHz~40GHz      | Sep. 18, 2013    | Conducted (TH01-CB)   |

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Receiver reading   | 0.026                | dB   | normal(k=2)                   | 0.013    |
| Cable loss   | 0.002                | dB   | normal(k=2)                   | 0.001    |
| AMN/LISN specification   | 1.200                | dB   | normal(k=2)                   | 0.600    |
| Mismatch<br>Receiver VSWR 1=<br>AMN/LISN VSWR 2=                   | -0.080               | dB   | U-shaped                      | 0.060    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 1.2      |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 2.4      |

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Receiver reading   | $\pm 0.173$          | dB   | k=1                           | 0.086    |
| Cable loss   | $\pm 0.174$          | dB   | k=2                           | 0.087    |
| Antenna gain   | $\pm 0.169$          | dB   | k=2                           | 0.084    |
| Site imperfection  | $\pm 0.433$          | dB   | Triangular                    | 0.214    |
| Pre-amplifier gain   | $\pm 0.366$          | dB   | k=2                           | 0.183    |
| Transmitter antenna  | $\pm 1.200$          | dB   | Rectangular                   | 0.600    |
| Signal generator   | $\pm 0.461$          | dB   | Rectangular                   | 0.231    |
| Mismatch   | $\pm 0.080$          | dB   | U-shape                       | 0.040    |
| Spectrum analyzer  | $\pm 0.500$          | dB   | Rectangular                   | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 1.778    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 3.555    |

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

| Contribution   | Uncertainty of $x_i$ |      |                            | $u(x_i)$ |
|--|----------------------|------|----------------------------|----------|
|  | Value                | Unit | Probability Distribution k |          |
| Receiver reading   | ±0.191               | dB   | k=1                        | 0.095    |
| Cable loss   | ±0.169               | dB   | k=2                        | 0.084    |
| Antenna gain   | ±0.191               | dB   | k=2                        | 0.096    |
| Site imperfection  | ±0.582               | dB   | Triangular                 | 0.291    |
| Pre-amplifier gain   | ±0.304               | dB   | k=2                        | 0.152    |
| Transmitter antenna  | ±1.200               | dB   | Rectangular                | 0.600    |
| Signal generator   | ±0.461               | dB   | Rectangular                | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                    | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                            | 1.839    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                            | 3.678    |

**Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)**

| Contribution   | Uncertainty of $x_i$ |      |                            | $u(x_i)$ |
|--|----------------------|------|----------------------------|----------|
|  | Value                | Unit | Probability Distribution k |          |
| Receiver reading   | ±0.186               | dB   | k=1                        | 0.093    |
| Cable loss   | ±0.167               | dB   | k=2                        | 0.083    |
| Antenna gain   | ±0.190               | dB   | k=2                        | 0.095    |
| Site imperfection  | ±0.488               | dB   | Triangular                 | 0.244    |
| Pre-amplifier gain   | ±0.269               | dB   | k=2                        | 0.134    |
| Transmitter antenna  | ±1.200               | dB   | Rectangular                | 0.600    |
| Signal generator   | ±0.461               | dB   | Rectangular                | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                    | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                            | 1.771    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                            | 3.541    |

### Uncertainty of Conducted Emission Measurement

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Cable loss   | ±0.038               | dB   | k=2                           | 0.019    |
| Attenuator   | ±0.047               | dB   | k=2                           | 0.024    |
| Power Meter specification  | ±0.300               | dB   | Triangular                    | 0.150    |
| Power Sensor specification   | ±0.300               | dB   | Rectangular                   | 0.150    |
| Signal generator   | ±0.461               | dB   | Rectangular                   | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                       | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                   | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 0.863    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 1.726    |