

FCC Test Report

Report No.: RF141008E07D

FCC ID: PY3DC112A

Test Model: DC112A

Received Date: Oct. 19, 2016

Test Date: Nov. 22 to 24, 2016

Issued Date: Dec. 02, 2016

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup	20
4.1.6 EUT Operating Conditions	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	35
4.2.1 Limits of Conducted Emission Measurement	35
4.2.2 Test Instruments	35
4.2.3 Test Procedures	36
4.2.4 Deviation from Test Standard	36
4.2.5 Test Setup	36
4.2.6 EUT Operating Conditions	36
4.2.7 Test Results (Mode 1)	37
4.2.8 Test Results (Mode 2)	39
4.3 6dB Bandwidth Measurement	41
4.3.1 Limits of 6dB Bandwidth Measurement	41
4.3.2 Test Setup	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions	41
4.3.7 Test Result	42
4.4 Conducted Output Power Measurement	44
4.4.1 Limits of Conducted Output Power Measurement	44
4.4.2 Test Setup	44
4.4.3 Test Instruments	44
4.4.4 Test Procedures	44
4.4.5 Deviation from Test Standard	44
4.4.6 EUT Operating Conditions	44
4.4.7 Test Results	45
4.5 Power Spectral Density Measurement	46
4.5.1 Limits of Power Spectral Density Measurement	46
4.5.2 Test Setup	46
4.5.3 Test Instruments	46
4.5.4 Test Procedure	46
4.5.5 Deviation from Test Standard	46

4.5.6 EUT Operating Condition	46
4.5.7 Test Results	47
4.6 Conducted Out of Band Emission Measurement	49
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	49
4.6.2 Test Setup.....	49
4.6.3 Test Instruments	49
4.6.4 Test Procedure	49
4.6.5 Deviation from Test Standard	49
4.6.6 EUT Operating Condition	49
4.6.7 Test Result.....	49
5 Pictures of Test Arrangements.....	57
Appendix – Information on the Testing Laboratories	58

Release Control Record

Issue No.	Description	Date Issued
RF141008E07D	Original release.	Dec. 02, 2016

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.99 dB at 0.48594 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz & 2390.00MHz & 7311.00MHz
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AirCard Smart Cradle
Brand	NETGEAR
Test Model	DC112A
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz and 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: 996.75mW 5GHz: 5.18GHz ~ 5.24GHz: CDD Mode: 457.13mW Beamforming Mode: 498.389mW 5.745GHz ~ 5.825GHz: CDD Mode: 786.257mW Beamforming Mode: 791.595mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied with a power adapter as following table:

Adapter	Brand	Model No.	Spec.	P/N
1	NETGEAR	2ABL030F 1 NA	Input: 100-120V, 1.0A, 50/60Hz Output: 12.0V, 2.5A DC output cable(1.8m, unshielded)	332-10758-01
2		AD2067F10	Input: 100-120V, 1.0A, 50/60Hz Output: 12.0V, 2.5mA DC output cable(1.8m, unshielded)	332-10797-01

From above adapters, the radiated emission worst case was found in **Adapter 2**. Therefore only the test data of the modes were recorded in this report individually.

3. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	PCB Chain NO.	Brand	Model No.	Ant. Gain(dBi) <Excluding cable loss>	Frequency range (MHz to MHz)	Ant. Type	Connector Type	Cable Loss(dB)		
1	Chain 0	Master Wave	98619PRSX006	2.48	2400~2500	Dipole	R-SMA	1		
				2.96	5150~5850			1.9		
2	Chain 1	Master Wave	98619PRSX006	2.48	2400~2500			PCB	i-px	0.7
				2.96	5150~5850					1.5
3	WWAN_chain_0	Master Wav	9 8P2RZIPF000	2.5	703~960	PCB	i-px	NA		
				4.4	1700~ 2170					
				4.5	2300~ 2700					
4	WWAN_chain_1	Master Wav	9 8P2RZIPF000	2.5	703~960	PCB	i-px	NA		
				4.4	1700~ 2170					
				4.5	2300~ 2700					

4. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX diversity	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (VHT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (VHT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a modulation mode and 2.4GHz band.
2. For 802.11b mode will select ant_2 for the final test.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
1	-	-	√	-	With adapter 1
2	√	√	√	√	With adapter 2

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 75%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	25deg. C, 75%RH	120Vac, 60Hz	Jyunchun Lin
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = $12.469/12.519 = 0.996$

802.11g: Duty cycle = $2.059/2.085 = 0.987$

802.11n (HT20): Duty cycle = $1.903/1.93 = 0.986$

802.11n (HT40): Duty cycle = $0.933/0.952 = 0.980$

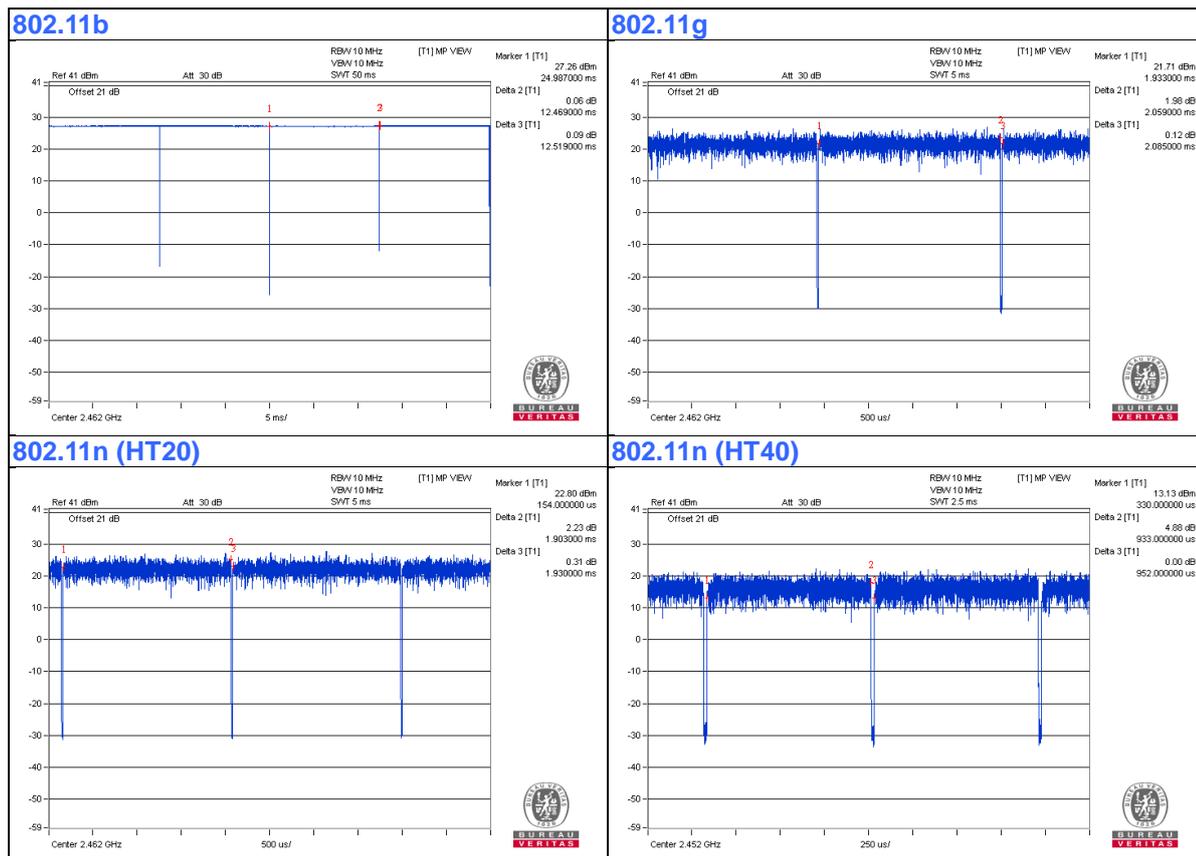

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL Notebook	DELL	E5430	4YV4VY1	Provided by Lab
B.	Laptop	DELL Notebook	E5430	HYV4VY1	NA	Provided by Lab
C.	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab
D.	Dongole	Transcend	NA	NA	NA	Provided by Lab
E.	Mobile Hotspot	NETGEAR	Aircard 779S	NA	PY3AC779S	Supplied by client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	3	10	No	0	Provided by Lab
4.	DC Cable	1	1.8	No	0	Supplied by client

3.4.1 Configuration of System under Test

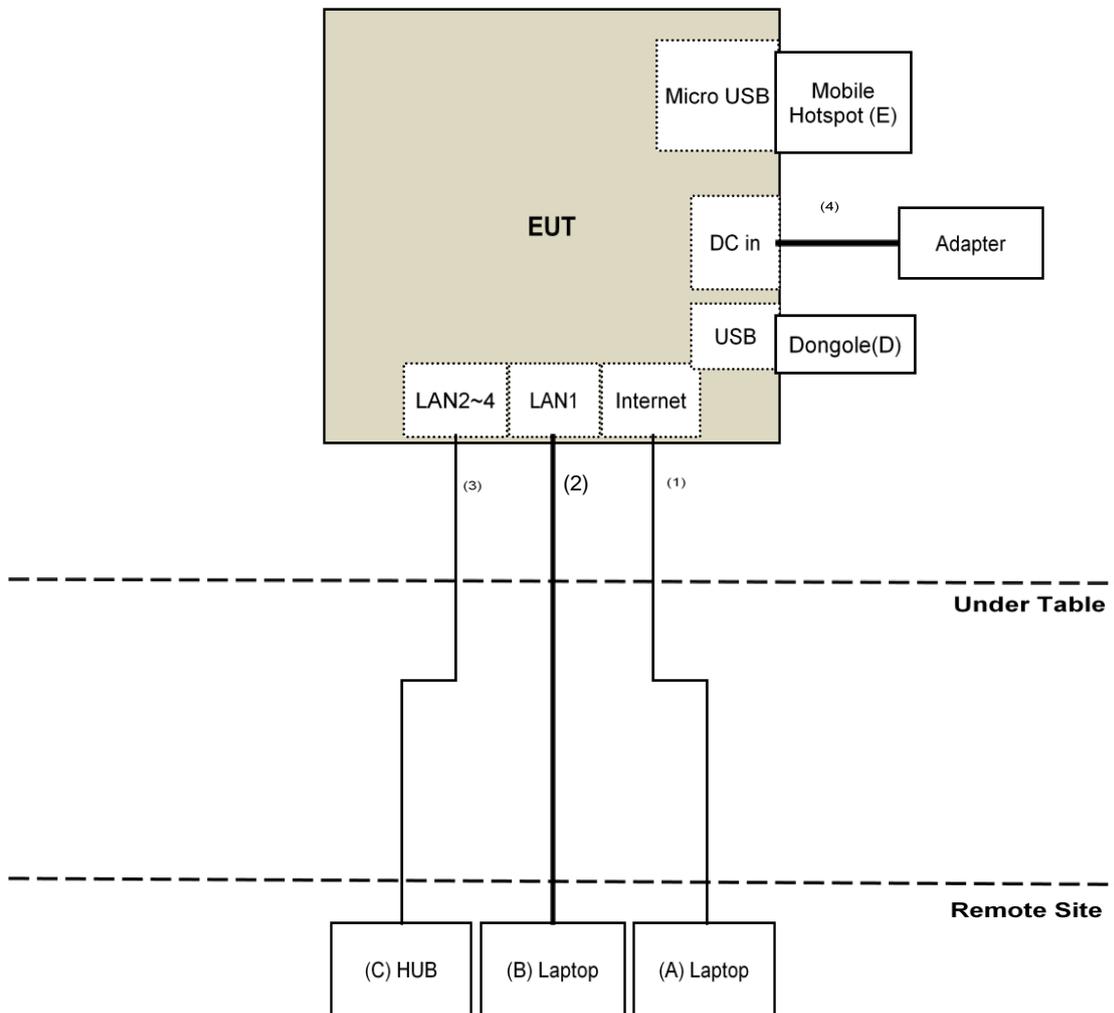

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v03r05
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	Aug. 18, 2016	Aug. 17, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 07, 2016	May 06, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-156	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-3-1 966-3-2 966-3-3	Apr. 02, 2016	Apr. 01, 2017
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Oct. 05, 2016	Oct. 04, 2017
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Jan. 20, 2016	Jan. 19, 2017
Pre-Amplifier Agilent	8449B	3008A02465	Apr. 05, 2016	Apr. 04, 2017
RF Cable	EMC104-SM-SM-2000 EMC104-SM-SM-5000 EMC104-SM-SM-5000	150317 150321 150322	Mar. 30, 2016	Mar. 29, 2017
Spectrum Analyzer Keysight	N9030A	MY54490520	July 29, 2016	July 28, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSv40	100964	June 28, 2016	June 27, 2017
Power meter Anritsu	ML2495A	1014008	May 5, 2016	May 4, 2017
Power sensor Anritsu	MA2411B	0917122	May 5, 2016	May 4, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The FCC Site Registration No. is 147459
- 5 Loop antenna was used for all emissions below 30 MHz.
6. The CANADA Site Registration No. is 20331-1
8. Tested Date: Nov. 22 to 23, 2016

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

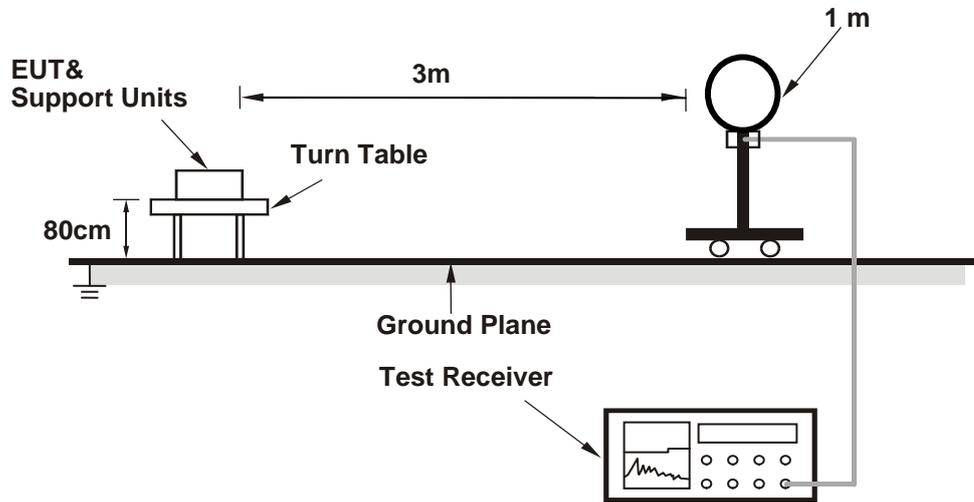

For Radiated emission 30MHz to 1GHz

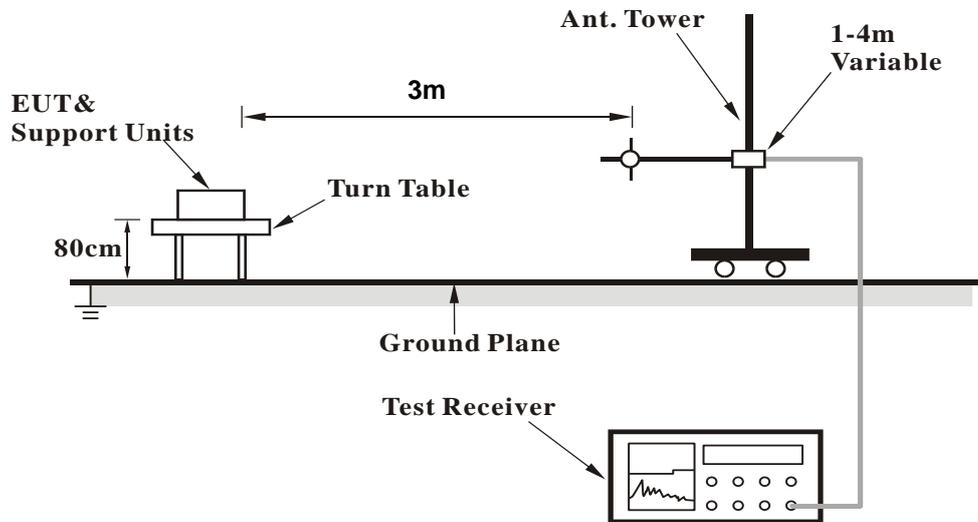

For Radiated emission above 1GHz

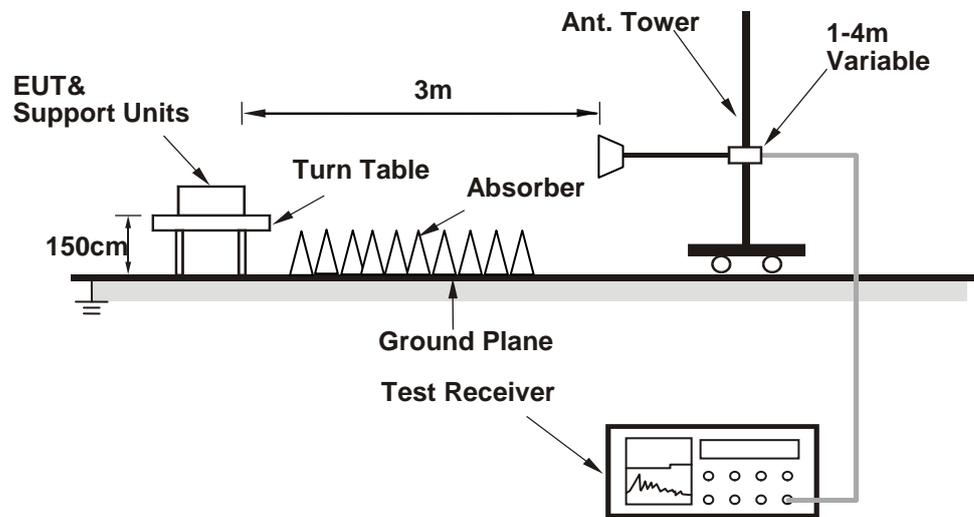

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the laptop which is placed on remote site.
- Controlling software (Mtool 2.0.1.0.exe) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.0 PK	74.0	-22.0	1.63 H	39	56.2	-4.2
2	2390.00	42.0 AV	54.0	-12.0	1.63 H	39	46.2	-4.2
3	*2412.00	100.8 PK			1.63 H	39	105.0	-4.2
4	*2412.00	98.3 AV			1.63 H	39	102.5	-4.2
5	4824.00	44.9 PK	74.0	-29.1	1.50 H	258	42.6	2.3
6	4824.00	38.0 AV	54.0	-16.0	1.50 H	258	35.7	2.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.68 V	30	64.8	-4.2
2	2390.00	53.8 AV	54.0	-0.2	1.68 V	30	58.0	-4.2
3	*2412.00	113.2 PK			1.68 V	30	117.4	-4.2
4	*2412.00	110.6 AV			1.68 V	30	114.8	-4.2
5	4824.00	48.5 PK	74.0	-25.5	1.66 V	200	46.2	2.3
6	4824.00	44.4 AV	54.0	-9.6	1.66 V	200	42.1	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.1 PK	74.0	-22.9	1.59 H	32	55.3	-4.2
2	2390.00	37.3 AV	54.0	-16.7	1.59 H	32	41.5	-4.2
3	*2437.00	102.3 PK			1.59 H	32	106.4	-4.1
4	*2437.00	99.9 AV			1.59 H	32	104.0	-4.1
5	2483.50	51.4 PK	74.0	-22.6	1.59 H	32	55.4	-4.0
6	2483.50	37.6 AV	54.0	-16.4	1.59 H	32	41.6	-4.0
7	4874.00	45.2 PK	74.0	-28.8	1.16 H	239	42.8	2.4
8	4874.00	38.4 AV	54.0	-15.6	1.16 H	239	36.0	2.4
9	7311.00	55.0 PK	74.0	-19.0	1.30 H	255	46.1	8.9
10	7311.00	49.5 AV	54.0	-4.5	1.30 H	255	40.6	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	2.22 V	15	60.4	-4.2
2	2390.00	43.0 AV	54.0	-11.0	2.22 V	15	47.2	-4.2
3	*2437.00	114.5 PK			2.22 V	15	118.6	-4.1
4	*2437.00	112.1 AV			2.22 V	15	116.2	-4.1
5	2483.50	60.2 PK	74.0	-13.8	2.22 V	15	64.2	-4.0
6	2483.50	47.7 AV	54.0	-6.3	2.22 V	15	51.7	-4.0
7	4874.00	48.8 PK	74.0	-25.2	1.64 V	204	46.4	2.4
8	4874.00	44.8 AV	54.0	-9.2	1.64 V	204	42.4	2.4
9	7311.00	57.6 PK	74.0	-16.4	1.50 V	197	48.7	8.9
10	7311.00	53.9 AV	54.0	-0.1	1.50 V	197	45.0	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.5 PK			1.61 H	27	105.5	-4.0
2	*2462.00	99.0 AV			1.61 H	27	103.0	-4.0
3	2483.50	55.4 PK	74.0	-18.6	1.61 H	27	59.4	-4.0
4	2483.50	42.3 AV	54.0	-11.7	1.61 H	27	46.3	-4.0
5	4924.00	45.5 PK	74.0	-28.5	1.15 H	243	43.0	2.5
6	4924.00	38.5 AV	54.0	-15.5	1.15 H	243	36.0	2.5
7	7386.00	54.6 PK	74.0	-19.4	1.30 H	265	45.3	9.3
8	7386.00	49.4 AV	54.0	-4.6	1.30 H	265	40.1	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.7 PK			1.97 V	19	117.7	-4.0
2	*2462.00	111.2 AV			1.97 V	19	115.2	-4.0
3	2483.50	63.6 PK	74.0	-10.4	1.97 V	19	67.6	-4.0
4	2483.50	53.9 AV	54.0	-0.1	1.97 V	19	57.9	-4.0
5	4924.00	48.5 PK	74.0	-25.5	1.70 V	215	46.0	2.5
6	4924.00	44.7 AV	54.0	-9.3	1.70 V	215	42.2	2.5
7	7386.00	57.2 PK	74.0	-16.8	1.31 V	195	47.9	9.3
8	7386.00	53.5 AV	54.0	-0.5	1.31 V	195	44.2	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.3 PK	74.0	-11.7	1.67 H	42	66.5	-4.2
2	2390.00	42.6 AV	54.0	-11.4	1.67 H	42	46.8	-4.2
3	*2412.00	105.3 PK			1.67 H	42	109.5	-4.2
4	*2412.00	94.2 AV			1.67 H	42	98.4	-4.2
5	4824.00	42.2 PK	74.0	-31.8	1.17 H	231	39.9	2.3
6	4824.00	30.1 AV	54.0	-23.9	1.17 H	231	27.8	2.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	1.68 V	22	77.4	-4.2
2	2390.00	53.7 AV	54.0	-0.3	1.68 V	22	57.9	-4.2
3	*2412.00	117.5 PK			1.68 V	22	121.7	-4.2
4	*2412.00	106.2 AV			1.68 V	22	110.4	-4.2
5	4824.00	44.5 PK	74.0	-29.5	1.72 V	163	42.2	2.3
6	4824.00	31.6 AV	54.0	-22.4	1.72 V	163	29.3	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.8 PK	74.0	-22.2	1.66 H	34	56.0	-4.2
2	2390.00	38.3 AV	54.0	-15.7	1.66 H	34	42.5	-4.2
3	*2437.00	109.5 PK			1.66 H	34	113.6	-4.1
4	*2437.00	99.0 AV			1.66 H	34	103.1	-4.1
5	2483.50	60.9 PK	74.0	-13.1	1.66 H	34	64.9	-4.0
6	2483.50	41.9 AV	54.0	-12.1	1.66 H	34	45.9	-4.0
7	4874.00	42.5 PK	74.0	-31.5	1.14 H	229	40.1	2.4
8	4874.00	30.2 AV	54.0	-23.8	1.14 H	229	27.8	2.4
9	7311.00	60.5 PK	74.0	-13.5	1.35 H	260	51.6	8.9
10	7311.00	46.6 AV	54.0	-7.4	1.35 H	260	37.7	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.1 PK	74.0	-2.9	1.68 V	59	75.3	-4.2
2	2390.00	48.7 AV	54.0	-5.3	1.68 V	59	52.9	-4.2
3	*2437.00	121.7 PK			1.68 V	59	125.8	-4.1
4	*2437.00	110.9 AV			1.68 V	59	115.0	-4.1
5	2483.50	70.8 PK	74.0	-3.2	1.68 V	59	74.8	-4.0
6	2483.50	52.7 AV	54.0	-1.3	1.68 V	59	56.7	-4.0
7	4874.00	46.6 PK	74.0	-27.4	1.70 V	166	44.2	2.4
8	4874.00	33.8 AV	54.0	-20.2	1.70 V	166	31.4	2.4
9	7311.00	65.0 PK	74.0	-9.0	1.52 V	197	56.1	8.9
10	7311.00	51.0 AV	54.0	-3.0	1.52 V	197	42.1	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.6 PK			1.62 H	26	106.6	-4.0
2	*2462.00	92.2 AV			1.62 H	26	96.2	-4.0
3	2483.50	62.5 PK	74.0	-11.5	1.62 H	26	66.5	-4.0
4	2483.50	42.8 AV	54.0	-11.2	1.62 H	26	46.8	-4.0
5	4924.00	42.9 PK	74.0	-31.1	1.10 H	231	40.4	2.5
6	4924.00	30.5 AV	54.0	-23.5	1.10 H	231	28.0	2.5
7	7386.00	57.1 PK	74.0	-16.9	1.31 H	254	47.8	9.3
8	7386.00	43.0 AV	54.0	-11.0	1.31 H	254	33.7	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.8 PK			1.68 V	28	118.8	-4.0
2	*2462.00	104.1 AV			1.68 V	28	108.1	-4.0
3	2483.50	73.2 PK	74.0	-0.8	1.68 V	28	77.2	-4.0
4	2483.50	53.8 AV	54.0	-0.2	1.68 V	28	57.8	-4.0
5	4924.00	43.8 PK	74.0	-30.2	1.64 V	180	41.3	2.5
6	4924.00	31.0 AV	54.0	-23.0	1.64 V	180	28.5	2.5
7	7386.00	62.2 PK	74.0	-11.8	1.56 V	195	52.9	9.3
8	7386.00	47.2 AV	54.0	-6.8	1.56 V	195	37.9	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	1.62 H	36	66.3	-4.2
2	2390.00	42.9 AV	54.0	-11.1	1.62 H	36	47.1	-4.2
3	*2412.00	102.8 PK			1.62 H	36	107.0	-4.2
4	*2412.00	92.4 AV			1.62 H	36	96.6	-4.2
5	4824.00	42.3 PK	74.0	-31.7	1.20 H	241	40.0	2.3
6	4824.00	30.0 AV	54.0	-24.0	1.20 H	241	27.7	2.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	1.72 V	23	77.0	-4.2
2	2390.00	53.9 AV	54.0	-0.1	1.72 V	23	58.1	-4.2
3	*2412.00	115.0 PK			1.72 V	23	119.2	-4.2
4	*2412.00	104.2 AV			1.72 V	23	108.4	-4.2
5	4824.00	46.0 PK	74.0	-28.0	1.65 V	168	43.7	2.3
6	4824.00	33.3 AV	54.0	-20.7	1.65 V	168	31.0	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	1.57 H	48	57.8	-4.2
2	2390.00	39.1 AV	54.0	-14.9	1.57 H	48	43.3	-4.2
3	*2437.00	108.8 PK			1.57 H	48	112.9	-4.1
4	*2437.00	99.1 AV			1.57 H	48	103.2	-4.1
5	2483.50	61.2 PK	74.0	-12.8	1.57 H	48	65.2	-4.0
6	2483.50	42.2 AV	54.0	-11.8	1.57 H	48	46.2	-4.0
7	4874.00	42.3 PK	74.0	-31.7	1.15 H	222	39.9	2.4
8	4874.00	29.8 AV	54.0	-24.2	1.15 H	222	27.4	2.4
9	7311.00	60.8 PK	74.0	-13.2	1.35 H	264	51.9	8.9
10	7311.00	46.8 AV	54.0	-7.2	1.35 H	264	37.9	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.68 V	20	72.8	-4.2
2	2390.00	49.6 AV	54.0	-4.4	1.68 V	20	53.8	-4.2
3	*2437.00	121.0 PK			1.68 V	20	125.1	-4.1
4	*2437.00	110.7 AV			1.68 V	20	114.8	-4.1
5	2483.50	70.5 PK	74.0	-3.5	1.68 V	20	74.5	-4.0
6	2483.50	53.0 AV	54.0	-1.0	1.68 V	20	57.0	-4.0
7	4874.00	46.5 PK	74.0	-27.5	1.75 V	160	44.1	2.4
8	4874.00	33.9 AV	54.0	-20.1	1.75 V	160	31.5	2.4
9	7311.00	65.1 PK	74.0	-8.9	1.47 V	207	56.2	8.9
10	7311.00	50.9 AV	54.0	-3.1	1.47 V	207	42.0	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.0 PK			1.53 H	41	107.0	-4.0
2	*2462.00	93.3 AV			1.53 H	41	97.3	-4.0
3	2483.50	62.8 PK	74.0	-11.2	1.53 H	41	66.8	-4.0
4	2483.50	43.1 AV	54.0	-10.9	1.53 H	41	47.1	-4.0
5	4924.00	42.9 PK	74.0	-31.1	1.12 H	220	40.4	2.5
6	4924.00	30.6 AV	54.0	-23.4	1.12 H	220	28.1	2.5
7	7386.00	56.8 PK	74.0	-17.2	1.36 H	264	47.5	9.3
8	7386.00	42.8 AV	54.0	-11.2	1.36 H	264	33.5	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.1 PK			1.72 V	26	119.1	-4.0
2	*2462.00	105.1 AV			1.72 V	26	109.1	-4.0
3	2483.50	73.9 PK	74.0	-0.1	1.72 V	26	77.9	-4.0
4	2483.50	53.9 AV	54.0	-0.1	1.72 V	26	57.9	-4.0
5	4924.00	44.2 PK	74.0	-29.8	1.65 V	193	41.7	2.5
6	4924.00	31.4 AV	54.0	-22.6	1.65 V	193	28.9	2.5
7	7386.00	63.0 PK	74.0	-11.0	1.59 V	195	53.7	9.3
8	7386.00	47.7 AV	54.0	-6.3	1.59 V	195	38.4	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.49 H	56	64.8	-4.2
2	2390.00	42.8 AV	54.0	-11.2	1.49 H	56	47.0	-4.2
3	*2422.00	99.2 PK			1.49 H	56	103.3	-4.1
4	*2422.00	88.3 AV			1.49 H	56	92.4	-4.1
5	4844.00	42.5 PK	74.0	-31.5	1.11 H	222	40.1	2.4
6	4844.00	30.2 AV	54.0	-23.8	1.11 H	222	27.8	2.4
7	7266.00	52.6 PK	74.0	-21.4	1.35 H	250	43.8	8.8
8	7266.00	38.3 AV	54.0	-15.7	1.35 H	250	29.5	8.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	1.88 V	22	76.0	-4.2
2	2390.00	53.4 AV	54.0	-0.6	1.88 V	22	57.6	-4.2
3	*2422.00	111.3 PK			1.88 V	22	115.4	-4.1
4	*2422.00	100.1 AV			1.88 V	22	104.2	-4.1
5	4844.00	44.5 PK	74.0	-29.5	1.59 V	200	42.1	2.4
6	4844.00	31.7 AV	54.0	-22.3	1.59 V	200	29.3	2.4
7	7266.00	58.6 PK	74.0	-15.4	1.50 V	197	49.8	8.8
8	7266.00	43.4 AV	54.0	-10.6	1.50 V	197	34.6	8.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.46 H	71	62.6	-4.2
2	2390.00	41.5 AV	54.0	-12.5	1.46 H	71	45.7	-4.2
3	*2437.00	100.4 PK			1.46 H	71	104.5	-4.1
4	*2437.00	89.8 AV			1.46 H	71	93.9	-4.1
5	2483.50	60.2 PK	74.0	-13.8	1.46 H	71	64.2	-4.0
6	2483.50	43.4 AV	54.0	-10.6	1.46 H	71	47.4	-4.0
7	4874.00	42.3 PK	74.0	-31.7	1.16 H	210	39.9	2.4
8	4874.00	30.2 AV	54.0	-23.8	1.16 H	210	27.8	2.4
9	7311.00	53.7 PK	74.0	-20.3	1.38 H	245	44.8	8.9
10	7311.00	38.9 AV	54.0	-15.1	1.38 H	245	30.0	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	1.66 V	32	73.7	-4.2
2	2390.00	52.6 AV	54.0	-1.4	1.66 V	32	56.8	-4.2
3	*2437.00	112.5 PK			1.66 V	32	116.6	-4.1
4	*2437.00	101.6 AV			1.66 V	32	105.7	-4.1
5	2483.50	70.8 PK	74.0	-3.2	1.66 V	32	74.8	-4.0
6	2483.50	53.9 AV	54.0	-0.1	1.66 V	32	57.9	-4.0
7	4874.00	44.5 PK	74.0	-29.5	1.67 V	202	42.1	2.4
8	4874.00	31.7 AV	54.0	-22.3	1.67 V	202	29.3	2.4
9	7311.00	59.1 PK	74.0	-14.9	1.55 V	208	50.2	8.9
10	7311.00	44.2 AV	54.0	-9.8	1.55 V	208	35.3	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	98.9 PK			1.44 H	72	103.0	-4.1
2	*2452.00	88.1 AV			1.44 H	72	92.2	-4.1
3	2483.50	63.4 PK	74.0	-10.6	1.44 H	72	67.4	-4.0
4	2483.50	41.7 AV	54.0	-12.3	1.44 H	72	45.7	-4.0
5	4904.00	42.4 PK	74.0	-31.6	1.07 H	223	39.9	2.5
6	4904.00	30.4 AV	54.0	-23.6	1.07 H	223	27.9	2.5
7	7356.00	52.1 PK	74.0	-21.9	1.36 H	260	42.9	9.2
8	7356.00	38.0 AV	54.0	-16.0	1.36 H	260	28.8	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	111.0 PK			1.88 V	20	115.1	-4.1
2	*2452.00	99.9 AV			1.88 V	20	104.0	-4.1
3	2483.50	73.8 PK	74.0	-0.2	1.88 V	20	77.8	-4.0
4	2483.50	52.5 AV	54.0	-1.5	1.88 V	20	56.5	-4.0
5	4904.00	44.8 PK	74.0	-29.2	1.62 V	207	42.3	2.5
6	4904.00	31.8 AV	54.0	-22.2	1.62 V	207	29.3	2.5
7	7356.00	59.2 PK	74.0	-14.8	1.51 V	196	50.0	9.2
8	7356.00	43.9 AV	54.0	-10.1	1.51 V	196	34.7	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.47	26.7 QP	40.0	-13.3	2.00 H	83	36.0	-9.3
2	82.57	31.0 QP	40.0	-9.0	2.00 H	68	44.4	-13.4
3	105.15	31.3 QP	43.5	-12.2	2.00 H	269	43.5	-12.2
4	159.66	32.5 QP	43.5	-11.0	1.50 H	329	40.8	-8.3
5	177.76	30.1 QP	43.5	-13.4	2.00 H	336	39.5	-9.4
6	221.50	28.9 QP	46.0	-17.1	1.50 H	70	40.2	-11.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.74	30.0 QP	40.0	-10.0	1.00 V	110	39.8	-9.8
2	41.49	32.5 QP	40.0	-7.5	1.00 V	117	41.4	-8.9
3	67.18	31.2 QP	40.0	-8.8	1.00 V	304	41.1	-9.9
4	96.93	30.9 QP	43.5	-12.6	1.50 V	36	44.3	-13.4
5	156.95	29.7 QP	43.5	-13.8	1.00 V	360	38.0	-8.3
6	243.86	28.7 QP	46.0	-17.3	1.00 V	349	38.3	-9.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
RF Cable	5D-FB	COACAB-002	Mar. 04, 2016	Mar. 03, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	Jun. 20, 2016	Jun. 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: Nov. 23, 2016

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

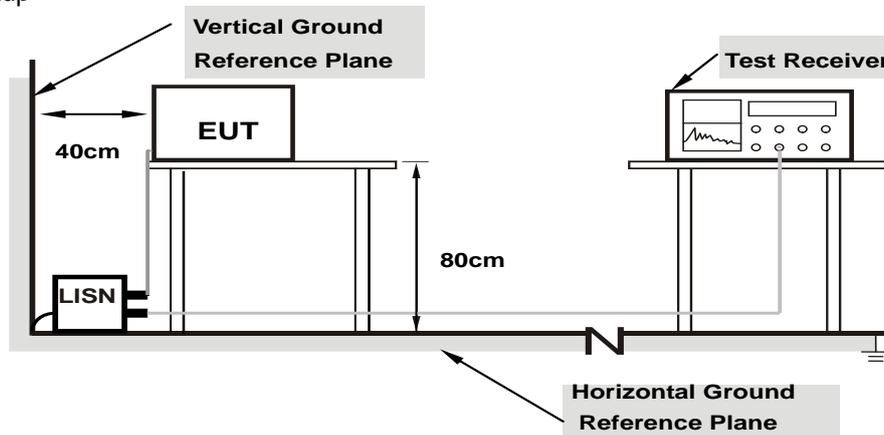

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	10.20	33.88	22.07	44.08	32.27	64.98	54.98	-20.90	-22.71
2	0.22031	10.20	27.01	15.03	37.21	25.23	62.81	52.81	-25.60	-27.58
3	0.29453	10.22	30.59	23.31	40.81	33.53	60.40	50.40	-19.59	-16.87
4	0.92734	10.29	5.09	0.39	15.38	10.68	56.00	46.00	-40.62	-35.32
5	10.13672	10.75	7.94	4.93	18.69	15.68	60.00	50.00	-41.31	-34.32
6	29.68359	11.85	1.70	-2.74	13.55	9.11	60.00	50.00	-46.45	-40.89

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	36.47	23.45	46.66	33.64	66.00	56.00	-19.34	-22.36
2	0.16953	10.18	32.98	20.89	43.16	31.07	64.98	54.98	-21.82	-23.91
3	0.19297	10.17	30.38	19.08	40.55	29.25	63.91	53.91	-23.36	-24.66
4	0.29453	10.20	27.59	19.69	37.79	29.89	60.40	50.40	-22.61	-20.51
5	0.41953	10.24	11.39	4.40	21.63	14.64	57.46	47.46	-35.83	-32.82
6	10.66016	10.69	8.26	5.42	18.95	16.11	60.00	50.00	-41.05	-33.89

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

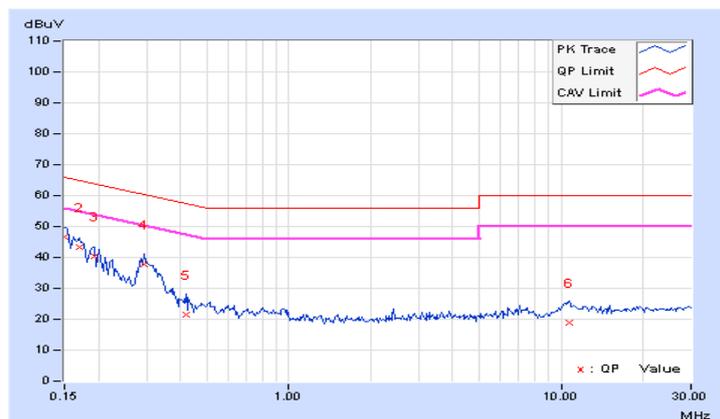


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.20	37.76	19.77	47.96	29.97	66.00	56.00	-18.04	-26.03
2	0.22031	10.20	23.98	12.95	34.18	23.15	62.81	52.81	-28.63	-29.66
3	0.29063	10.22	26.39	23.05	36.61	33.27	60.51	50.51	-23.90	-17.24
4	0.48203	10.25	30.32	26.03	40.57	36.28	56.30	46.30	-15.73	-10.02
5	9.46875	10.69	28.19	22.73	38.88	33.42	60.00	50.00	-21.12	-16.58
6	14.25781	11.22	23.36	17.96	34.58	29.18	60.00	50.00	-25.42	-20.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

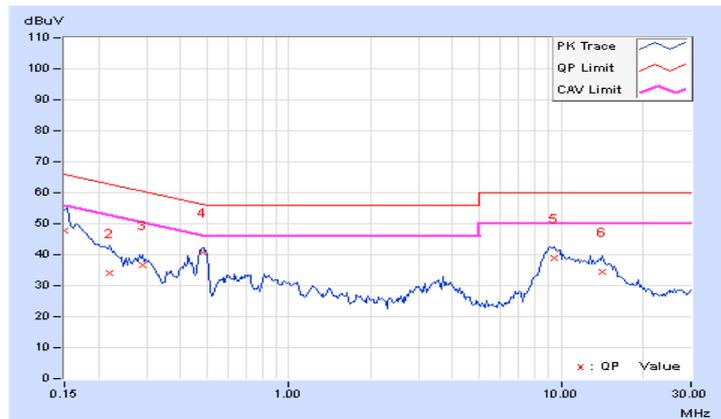

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	38.93	24.91	49.12	35.10	66.00	56.00	-16.88	-20.90
2	0.17344	10.18	35.70	25.57	45.88	35.75	64.79	54.79	-18.91	-19.04
3	0.28672	10.20	27.26	22.51	37.46	32.71	60.62	50.62	-23.16	-17.91
4	0.48594	10.24	30.20	27.01	40.44	37.25	56.24	46.24	-15.80	-8.99
5	9.01172	10.56	27.36	22.16	37.92	32.72	60.00	50.00	-22.08	-17.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value




4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.57	0.5	PASS
6	2437	8.13	0.5	PASS
11	2462	8.15	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.41	16.45	0.5	PASS
6	2437	16.40	16.39	0.5	PASS
11	2462	16.45	16.49	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.69	17.68	0.5	Pass
6	2437	17.67	17.60	0.5	Pass
11	2462	17.69	17.69	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.40	35.50	0.5	Pass
6	2437	35.55	35.68	0.5	Pass
9	2452	35.92	35.43	0.5	Pass

Spectrum Plot of Worst Value


802.11b / CH6

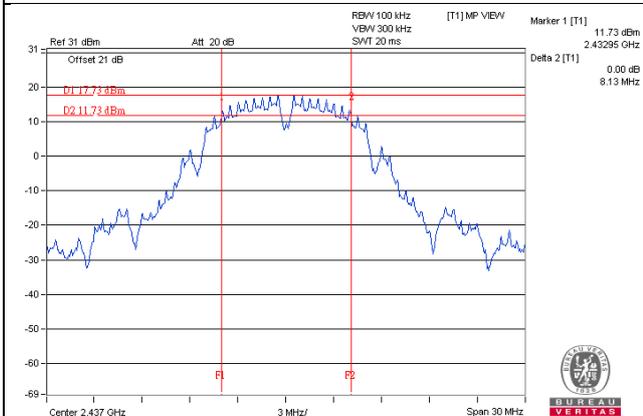


802.11g / Chain 1 : CH6

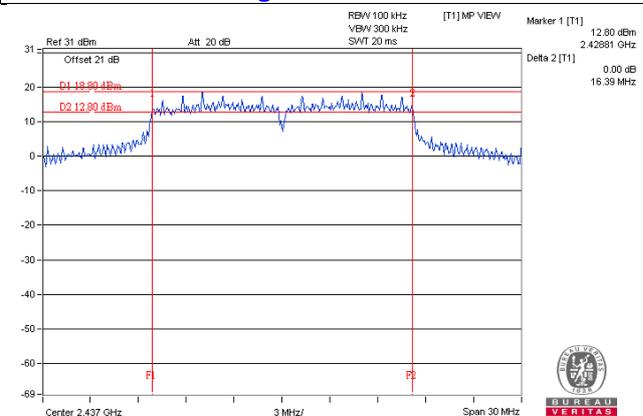

802.11n (HT20) / Chain 1 : CH6

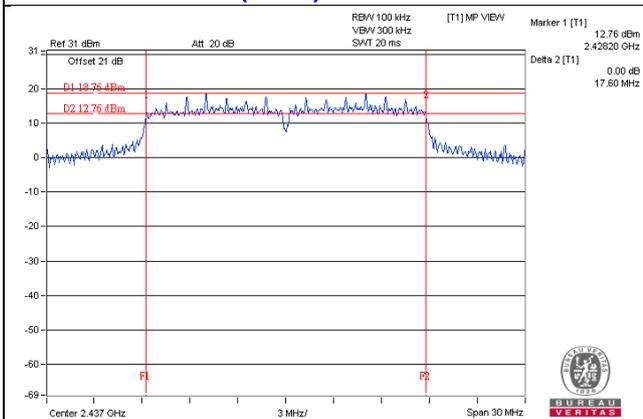

802.11n (HT40) / Chain 0 : CH3

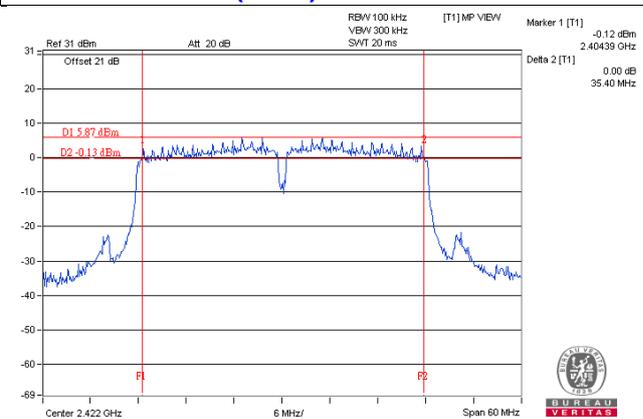

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR AVERAGE POWER

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	276.694	24.42	30	Pass
6	2437	338.065	25.29	30	Pass
11	2462	217.27	23.37	30	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.71	21.76	298.22	24.75	30	Pass
6	2437	27.56	26.10	977.544	29.90	30	Pass
11	2462	20.11	20.05	203.723	23.09	30	Pass

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.24	20.22	210.878	23.24	30	Pass
6	2437	27.69	26.12	996.75	29.99	30	Pass
11	2462	20.67	20.74	235.258	23.72	30	Pass

802.11n (HT40)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.16	19.03	162.397	22.11	30	Pass
6	2437	20.78	21.53	261.907	24.18	30	Pass
9	2452	18.41	18.51	140.301	21.47	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-2.82	8	Pass
6	2437	-1.33	8	Pass
11	2462	-4.00	8	Pass

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-10.27	3.01	-7.26	8.00	Pass
	6	2437	-6.82	3.01	-3.81	8.00	Pass
	11	2462	-12.16	3.01	-9.15	8.00	Pass
1	1	2412	-10.45	3.01	-7.44	8.00	Pass
	6	2437	-4.47	3.01	-1.46	8.00	Pass
	11	2462	-12.19	3.01	-9.18	8.00	Pass

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.64\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11n (HT20)


TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-12.43	3.01	-9.42	8.00	Pass
	6	2437	-6.80	3.01	-3.79	8.00	Pass
	11	2462	-11.15	3.01	-8.14	8.00	Pass
1	1	2412	-11.72	3.01	-8.71	8.00	Pass
	6	2437	-4.34	3.01	-1.33	8.00	Pass
	11	2462	-12.43	3.01	-9.42	8.00	Pass

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.64\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-14.42	3.01	-11.41	8.00	Pass
	6	2437	-13.18	3.01	-10.17	8.00	Pass
	9	2452	-14.85	3.01	-11.84	8.00	Pass
1	3	2422	-13.82	3.01	-10.81	8.00	Pass
	6	2437	-13.52	3.01	-10.51	8.00	Pass
	9	2452	-15.42	3.01	-12.41	8.00	Pass

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.64\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

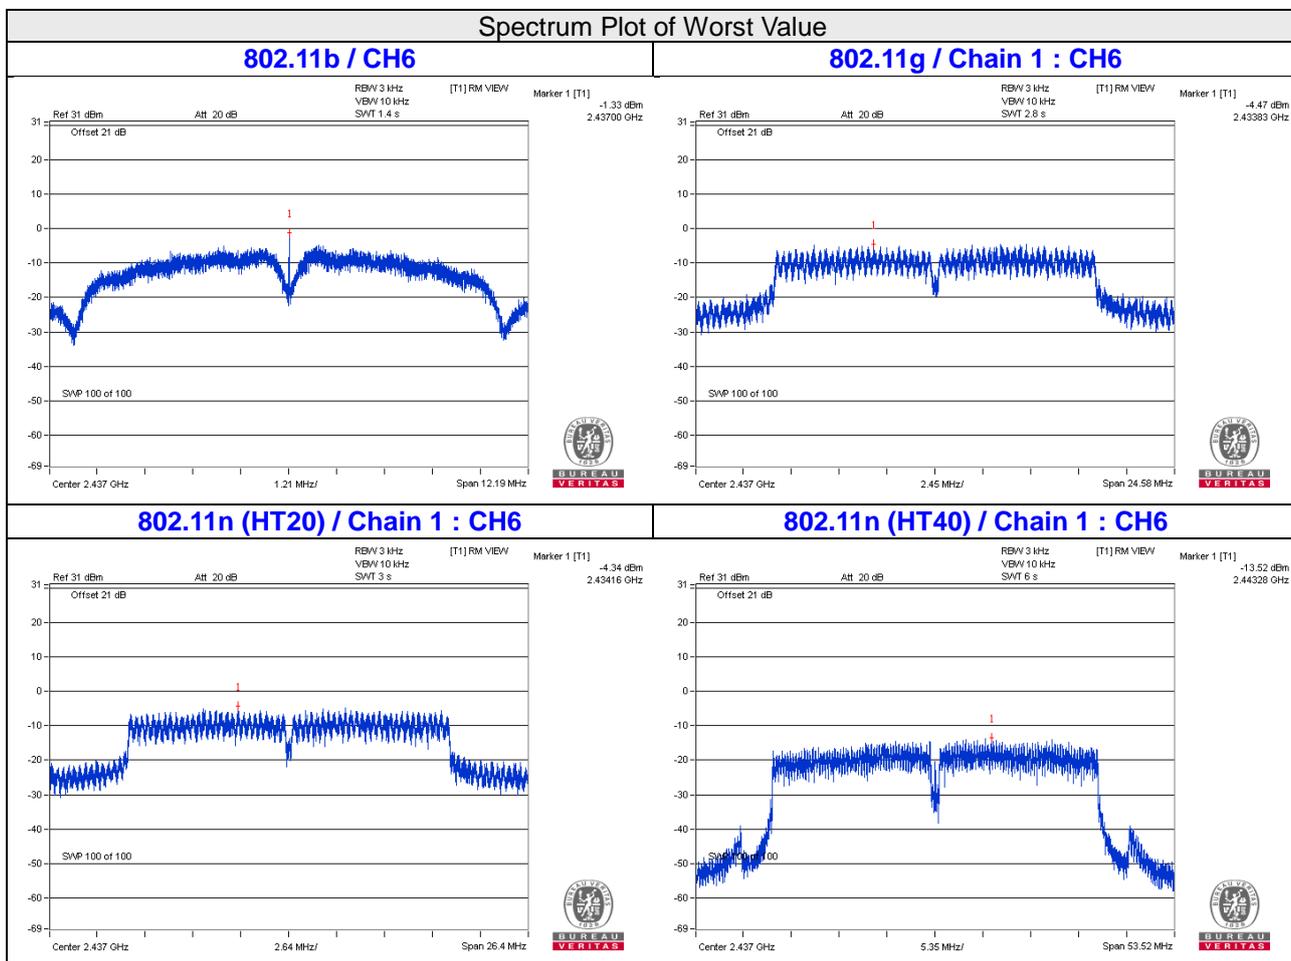


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6







4.6.7 Test Result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

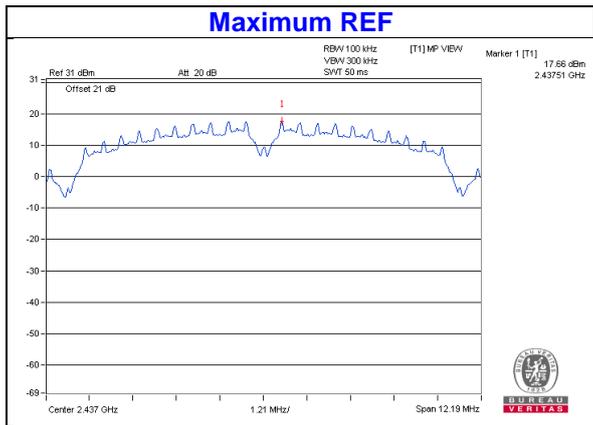


CHAIN 0

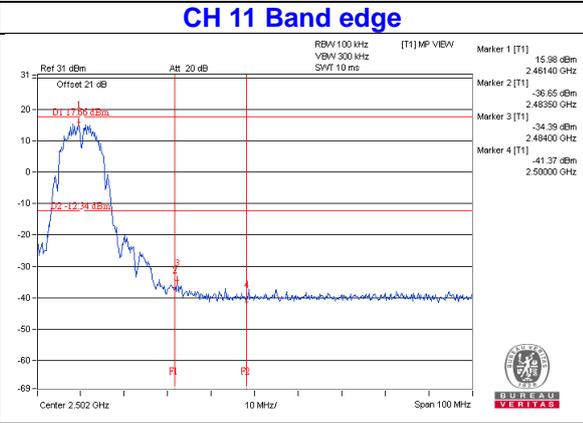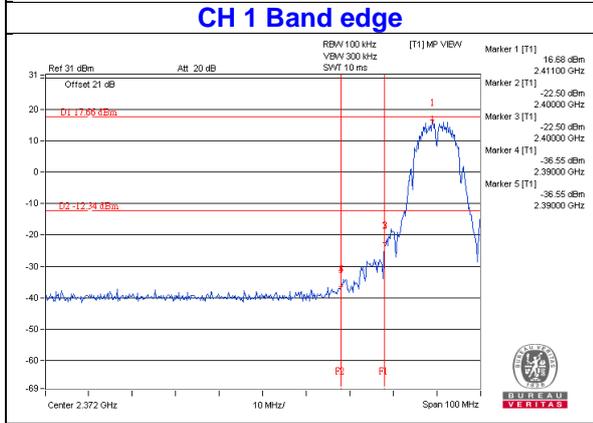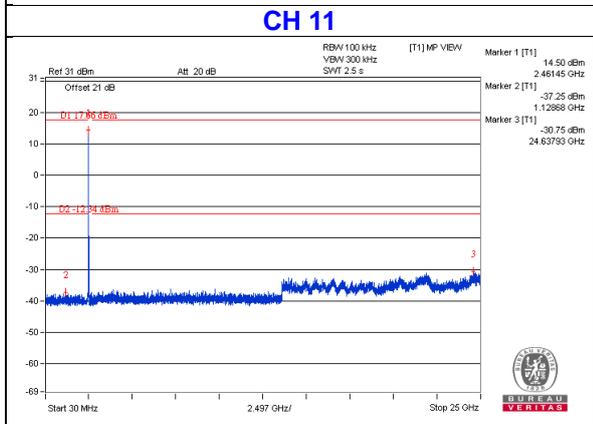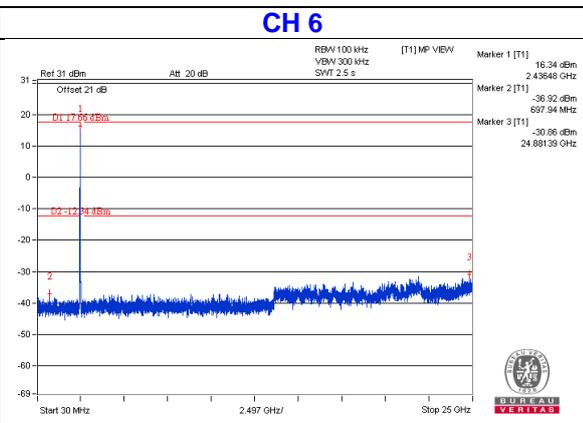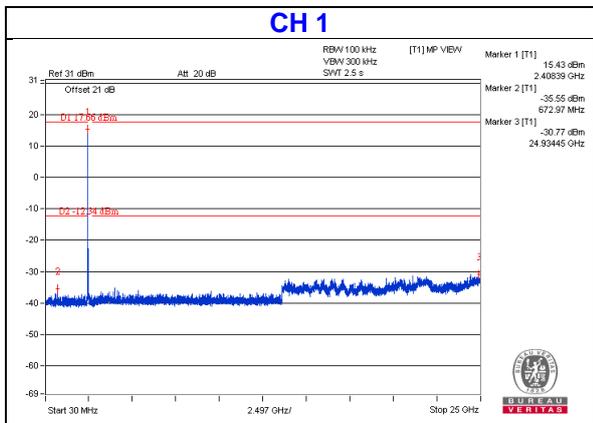


802.11g

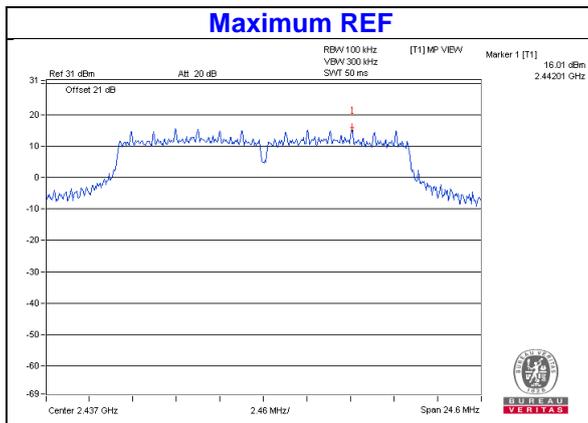


CHAIN 0

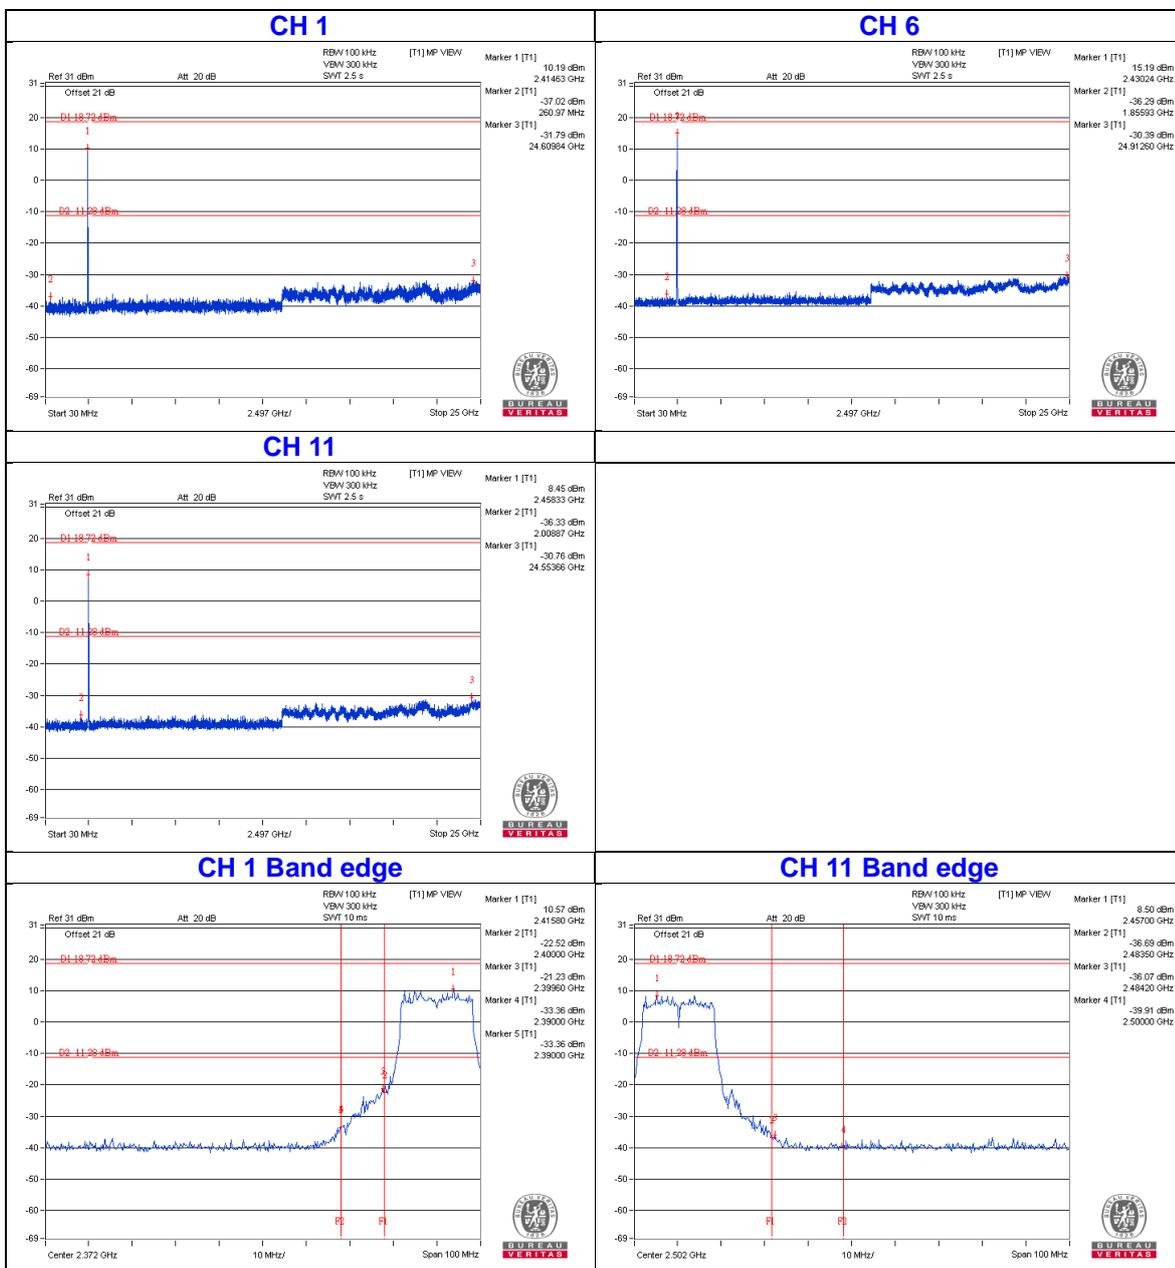


CHAIN 1

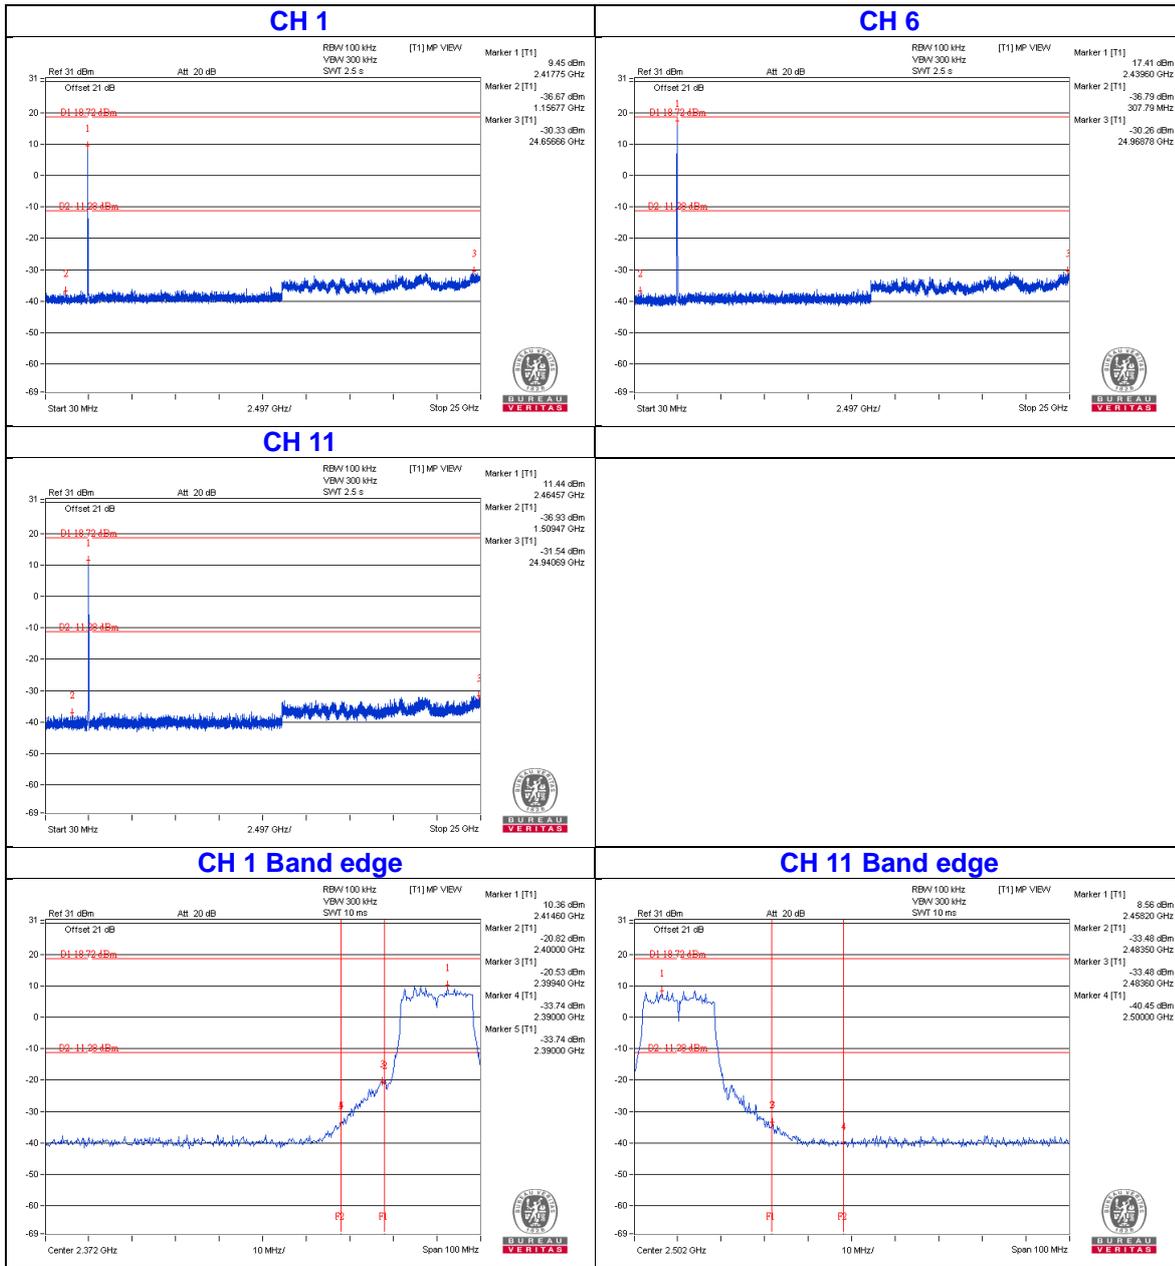


802.11n (HT20)

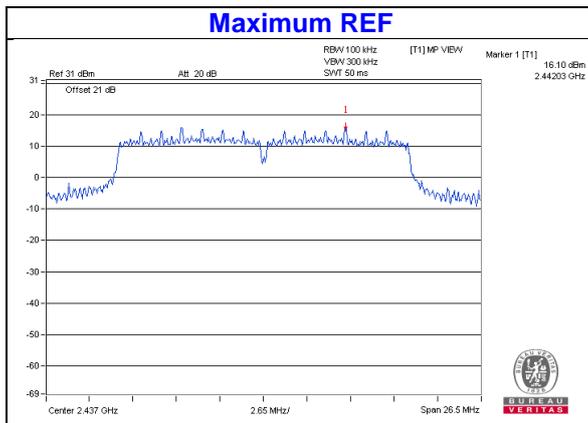


CHAIN 0

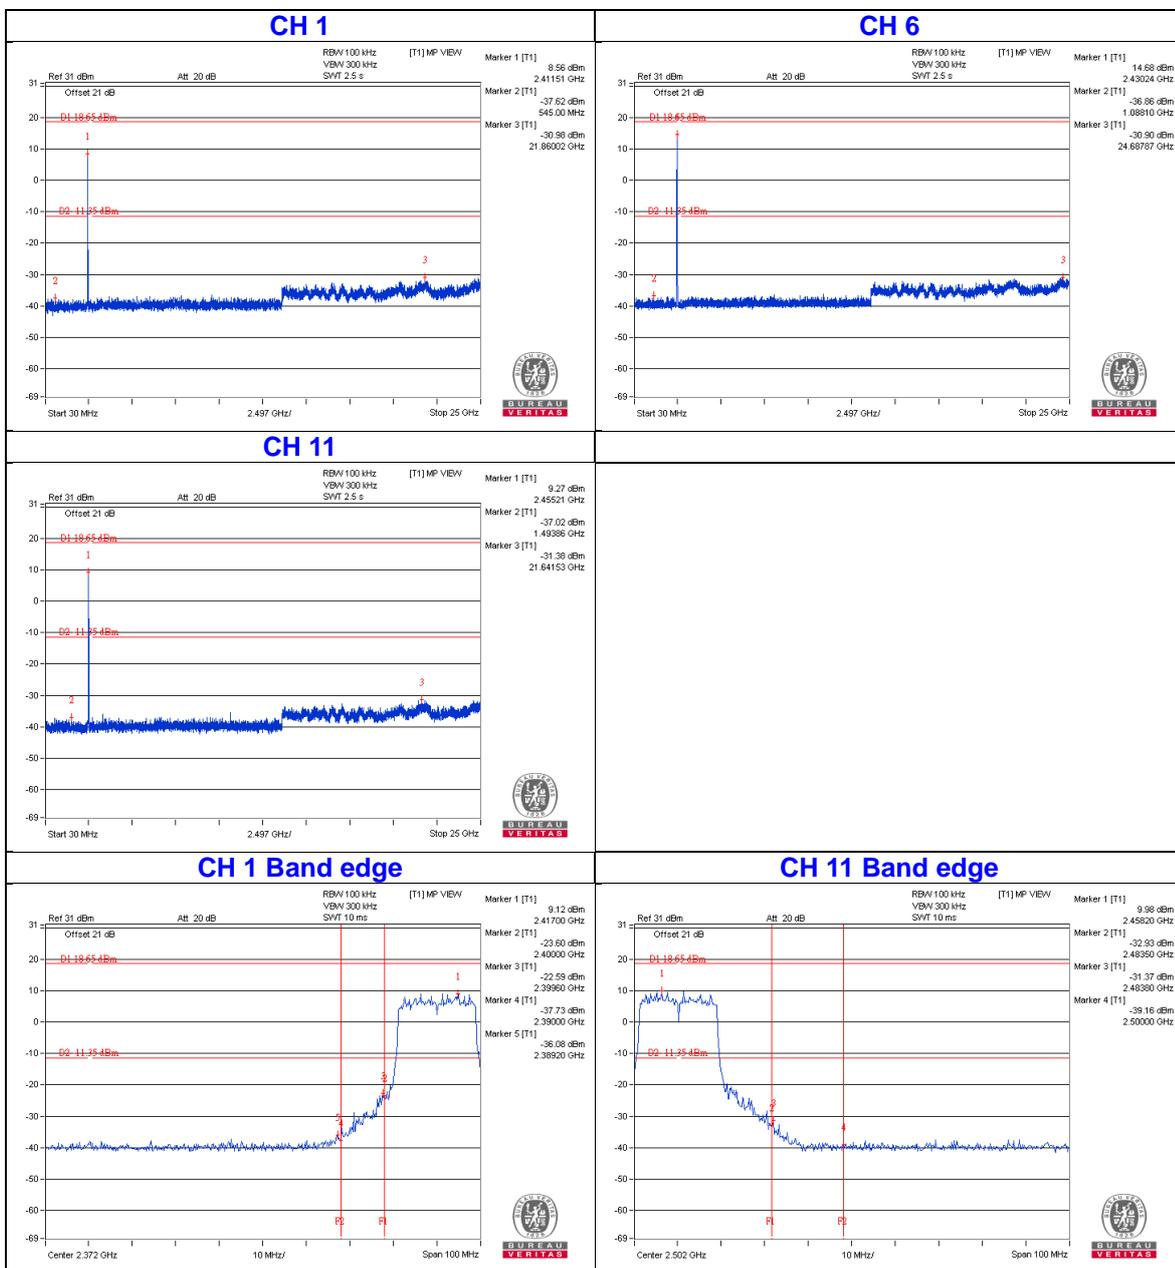


CHAIN 1

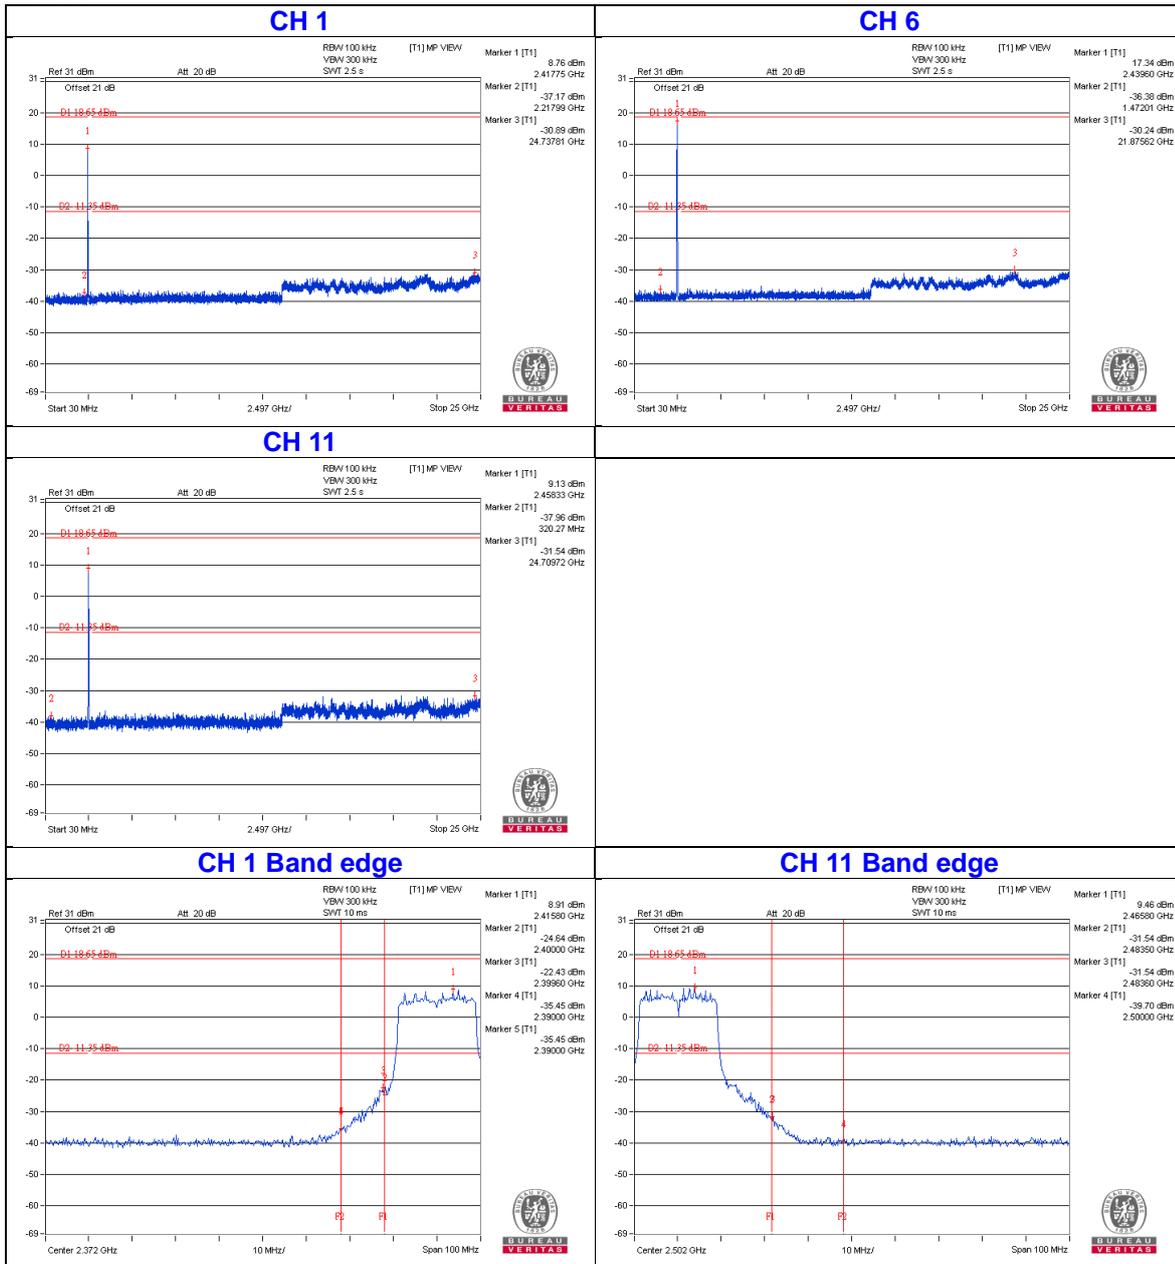


802.11n (HT40)

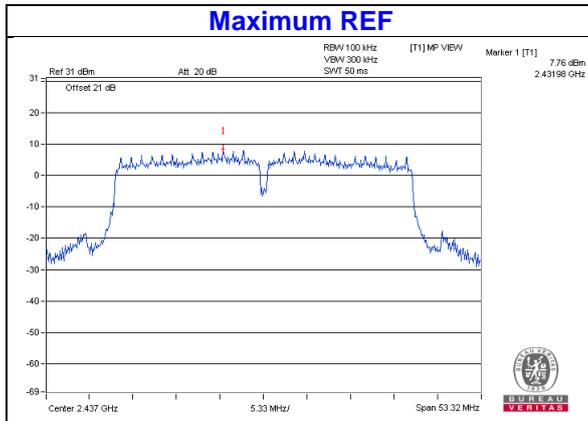

CHAIN 0

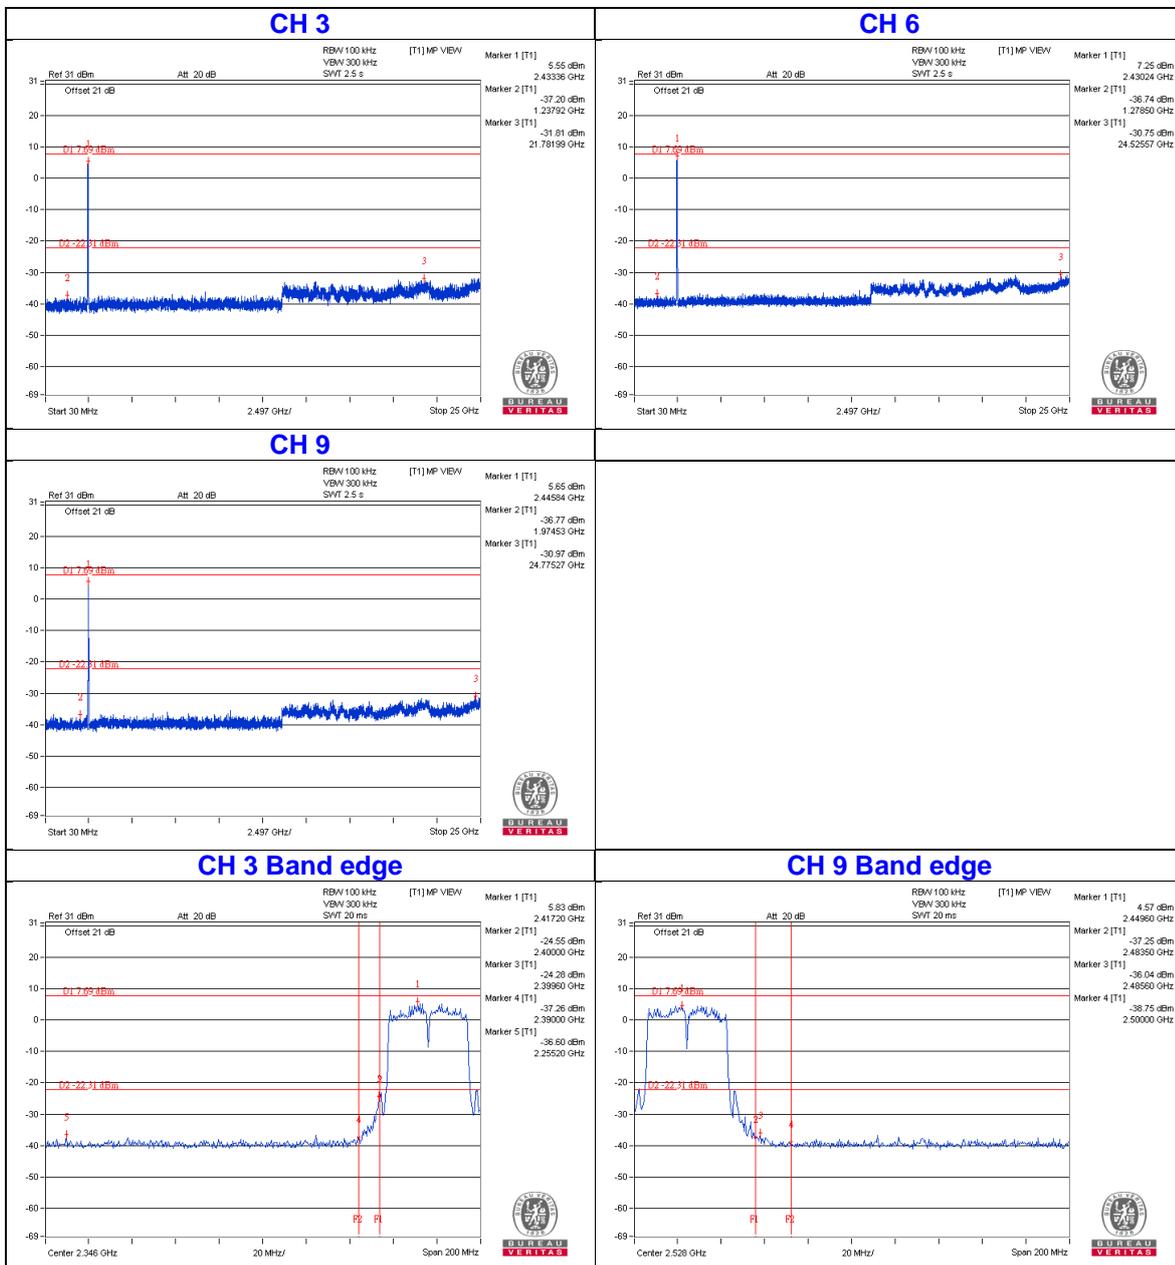

CHAIN 1

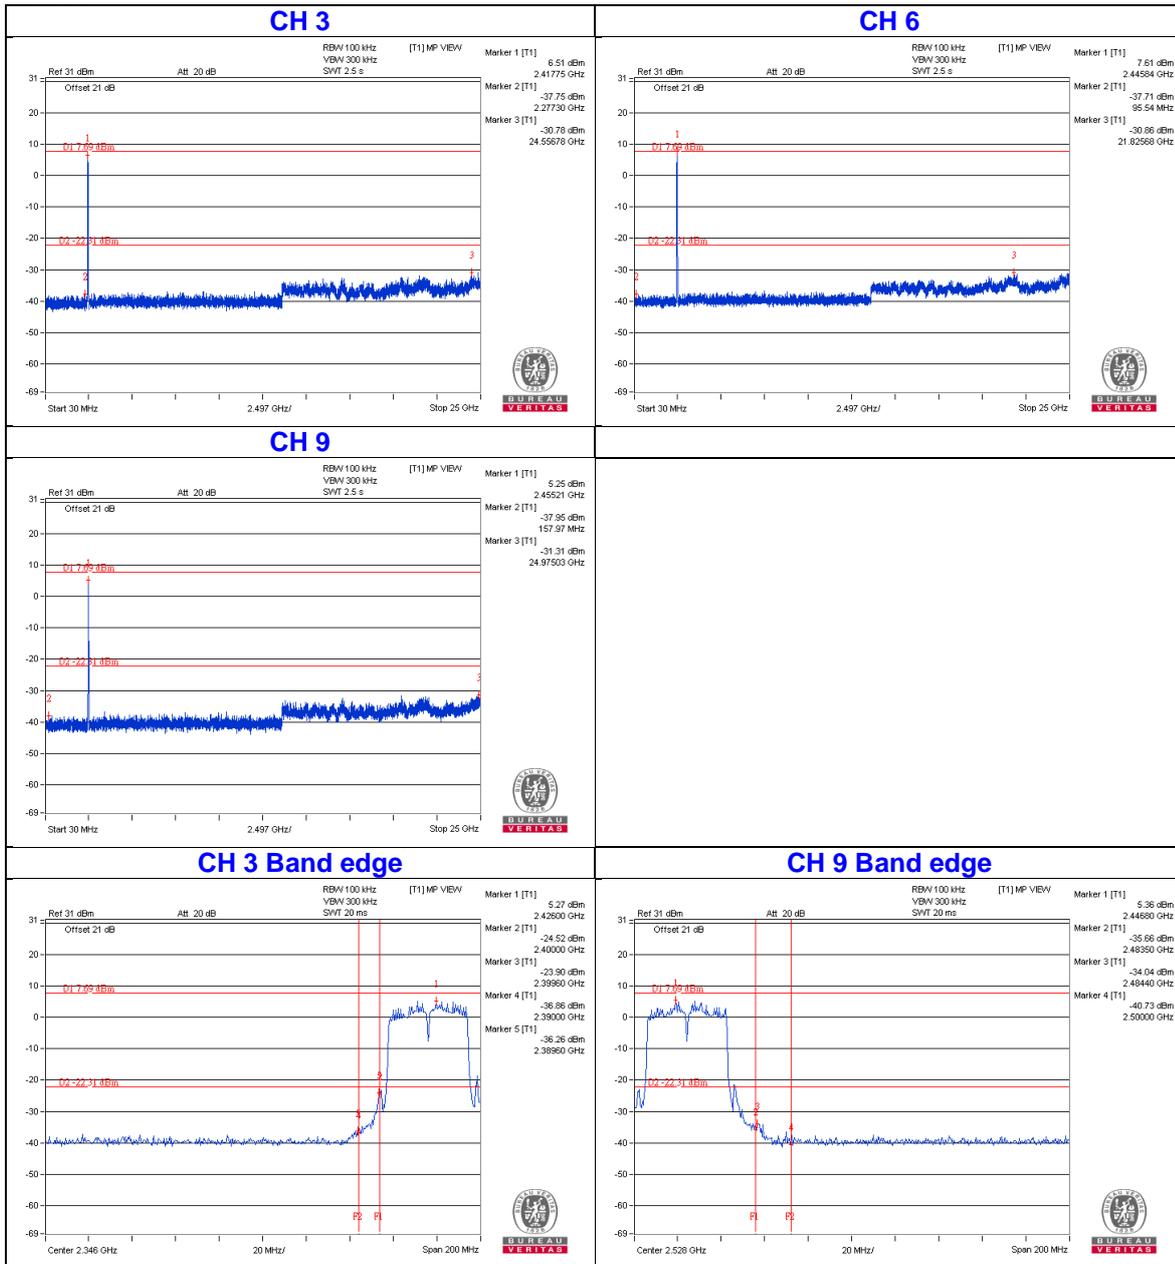

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---