

HAC_E_Dipole_835**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2018/5/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 124.2 V/m; Power Drift = -0.05 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 109.3 V/m

Average value of Total=(109.3+106.2) / 2 = 107.75 V/m

PMF scaled E-field



Grid 1 M4 108.2 V/m	Grid 2 M4 109.3 V/m	Grid 3 M4 105.0 V/m
Grid 4 M4 59.82 V/m	Grid 5 M4 59.99 V/m	Grid 6 M4 57.67 V/m
Grid 7 M4 105.6 V/m	Grid 8 M4 106.2 V/m	Grid 9 M4 101.8 V/m

Cursor:

Total = 109.3 V/m

E Category: M4

Location: 1, -73, 9.7 mm

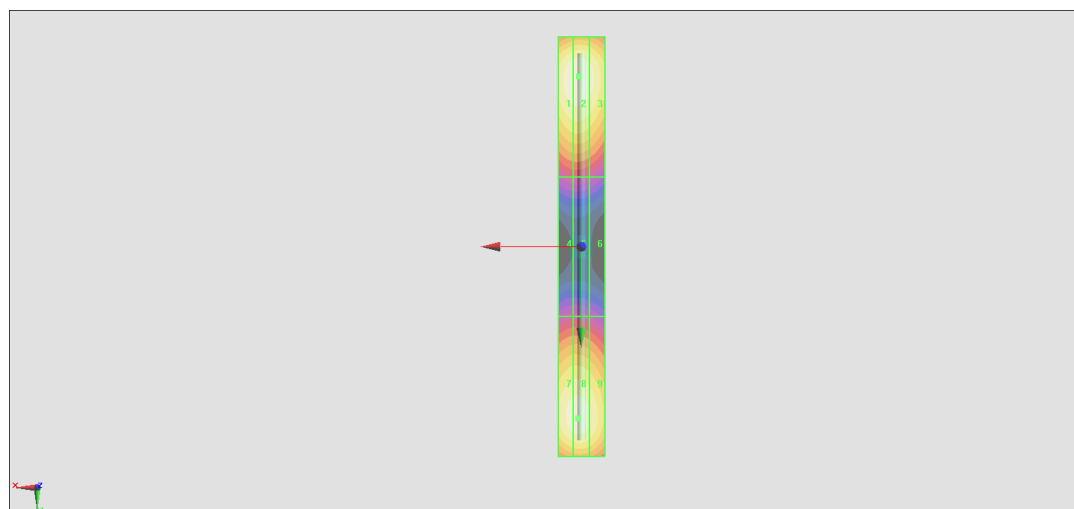

0 dB = 109.3 V/m = 40.77 dBV/m

HAC_E_Dipole_1880**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019/1/30

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2018/5/25

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 158.1 V/m; Power Drift = 0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 87.36 V/m

Average value of Total=(86.88+87.36) / 2 = 87.12 V/m

PMF scaled E-field



Grid 1 M3 86.26 V/m	Grid 2 M3 86.88 V/m	Grid 3 M3 83.75 V/m
Grid 4 M3 64.77 V/m	Grid 5 M3 64.82 V/m	Grid 6 M3 63.27 V/m
Grid 7 M3 86.67 V/m	Grid 8 M3 87.36 V/m	Grid 9 M3 84.12 V/m

Cursor:

Total = 87.36 V/m

E Category: M3

Location: 1, 34, 9.7 mm

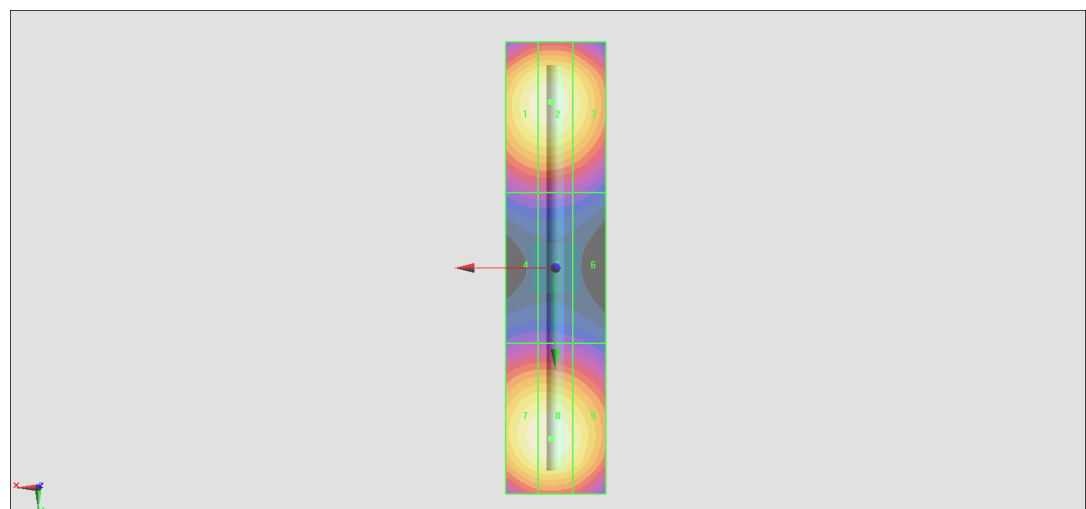

0 dB = 87.36 V/m = 38.83 dBV/m

HAC_E_Dipole_2600**DUT: HAC Dipole 2600 MHz**

Communication System: CW ; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2018/5/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

E Scan - measurement distance from the probe sensor center to CD2600 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 73.65 V/m; Power Drift = 0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 88.50 V/m

Average value of Total=(87.14+88.5) / 2 = 87.82 V/m

PMF scaled E-field



Grid 1 M3 86.10 V/m	Grid 2 M3 87.14 V/m	Grid 3 M3 84.83 V/m
Grid 4 M3 80.81 V/m	Grid 5 M3 81.41 V/m	Grid 6 M3 79.73 V/m
Grid 7 M3 87.71 V/m	Grid 8 M3 88.50 V/m	Grid 9 M3 85.67 V/m

Cursor:

Total = 88.50 V/m

E Category: M3

Location: 1, 23.5, 9.7 mm

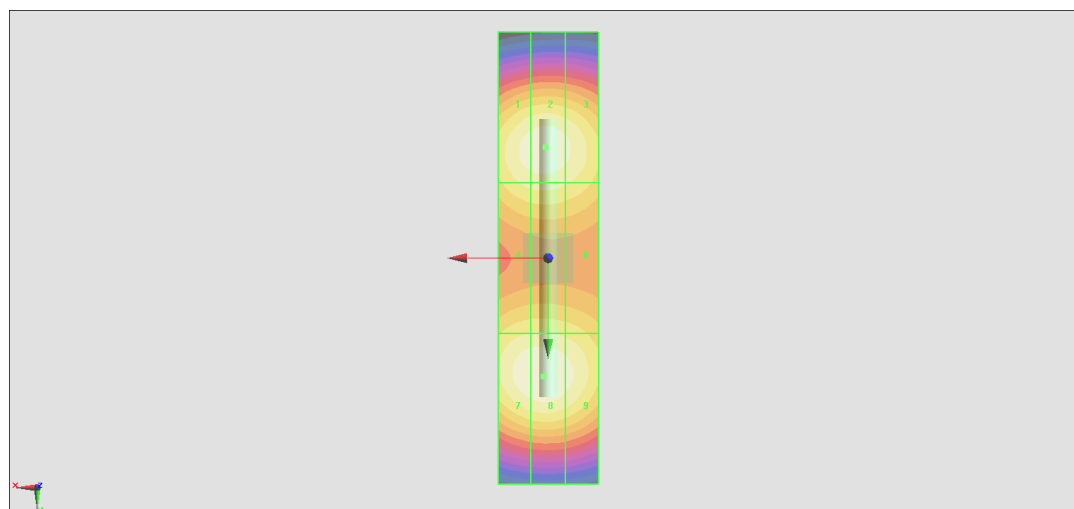

0 dB = 88.50 V/m = 38.94 dBV/m