

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

Company Internal
REPORT

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

Report issued by Accredited SAR Laboratory**for****PY7A1032021 (Z310a)****Date of test:** 2 - 13 of April, 2007**Laboratory:** Sony Ericsson SAR Test Laboratory
Sonyericsson Mobile Communications AB
Nya Vattentornet
SE-221 82 LUND, Sweden**Testing Engineer:** Magnus Söderman
Magnus1.soderman@sonyericsson.com
+46-46-2127229**Testing Approval** Peter Lindeborg
Peter.Lindeborg@sonyericsson.com
+46-46-2126180**Statement of Compliance**

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

Sony Ericsson Type AAB-1032021-BV; FCC ID: PY7A1032021 ; IC: 4170B-A1032021

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

This laboratory is accredited to ISO/IEC 17025 (SWEDAC accreditation no. 1847).



Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2005). This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.

© Sony Ericsson Mobile Communication AB, 2007



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

1 Table of contents

1	TABLE OF CONTENTS.....	2
2	INTRODUCTION.....	3
3	DEVICE UNDER TEST.....	3
3.1	ANTENNA DESCRIPTION.....	4
3.2	DEVICE DESCRIPTION.....	3
4	TEST EQUIPMENT.....	5
4.1	DOSIMETRIC SYSTEM.....	5
4.2	ADDITIONAL EQUIPMENT.....	5
5	ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID.....	6
6	SYSTEM ACCURACY VERIFICATION.....	6
7	SAR MEASUREMENT UNCERTAINTY.....	7
8	TEST RESULTS.....	8
9	REFERENCES.....	9
10	APPENDIX.....	10
10.1	PHOTOGRAPHS OF THE DEVICE UNDER TEST.....	10
10.2	DEVICE POSITION AT SAM TWIN PHANTOM.....	11
10.3	ATTACHMENTS.....	12

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

2 Introduction

In this test report, compliance of the Sony Ericsson AAB-1032021-BV (Z310a) portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

3 Device Under Test

3.1 Device description

Device model	PY7A1032021					
Market name	Z310a					
Serial numbers	CB510J0MAU (#7225)					
Mode	GSM850			GSM1900		
Crest factor	8.3			8.3		
Multiple Access Scheme	TDMA			TDMA		
Maximum Output Power Setting [dBm]	Ch.128	Ch.189	Ch.251	Ch.512	Ch.661	Ch.810
	32.5	32.5	32.5	29.0	29.0	29.0
Factory Tolerance in Power Setting	±0.5dB			±0.5dB		
Maximum Peak Output Power	33.0	33.0	33.0	29.5	29.5	29.5
Mode	GSM850-GPRS1TX			GSM1900-GPRS1TX		
Crest factor	8.3			8.3		
Multiple Access Scheme	TDMA			TDMA		
Maximum Output Power Setting [dBm]	Ch.128	Ch.189	Ch.251	Ch.512	Ch.661	Ch.810
	32.5	32.5	32.5	29.0	29.0	29.0
Factory Tolerance in Power Setting	±0.5dB			±0.5dB		
Maximum Peak Output Power	30.5	30.5	30.5	29.5	29.5	29.5
Mode	GSM850-EDGE			GSM1900-EDGE		
Crest factor	8.3			8.3		
Multiple Access Scheme	TDMA			TDMA		
Maximum Output Power Setting [dBm]	Ch.128	Ch.189	Ch.251	Ch.512	Ch.661	Ch.810
	28.5	28.5	28.5	27.0	27.0	27.0
Factory Tolerance in Power Setting	±0.5dB			±0.5dB		
Maximum Peak Output Power	29.0	29.0	29.0	27.5	27.5	27.5
Transmitting Frequency Range [MHz]	824 – 849			1850 – 1910		
GPRS Multislot Class	8					
GPRS Capability Class	B					
EDGE Class	2					
BlueTooth Class	1					
Prototype or Production Unit	Preproduction (HW:TP4)					
Device Category	Portable					
RF exposure environment	General population / uncontrolled					



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

3.2 Antenna Description

Type	Internal antenna	
Location	Inside at top of backside	
Dimensions	Max length	18 mm
	Max width	40 mm
Configuration	Planar Inverted F-Antenna (PIFA)	

**Company Internal
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

4 Test equipment

4.1 Dosimetric system

SAR measurements were made using the DASY4 professional system (software version 4.7, Build 53) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

Description	Serial Number	Due Date
DASY4 DAE V1	433	2008-01
E-field probe ET3DV6	1569	2008-01
Dipole Validation Kit, D835V2	484	2009-01
Dipole Validation Kit, D1900V2	5d002	2009-01

4.2 Additional equipment

Description	Inventory Number	Due Date
Signal generator	INV 20007666	2008-12
Directional coupler	M-941548-0102	2008-03
Power meter R&S NRVD	INV 483920	2008-03
Power sensor R&S NRV-Z5	INV 2333	2008-03
Power sensor R&S NRV-Z5	INV 2334	2008-03
Network analyzer HP8753C	INV 421671	2008-03
S-parameter test set HP85047A	INV 421670	2008-03
Dielectric probe kit HP8507D	INV 20000053	N/A
Base station simulator CMU	SER.833870/062	2008-03
Thermometer Fluke 51	INV 2071	2008-03

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY4 software is also given. Recommended limits for permittivity ϵ_r , conductivity σ and mass density ρ are also shown.

f [MHz]	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ [S/m]	ρ [g/cm ³]
835	Head	Measured, 12/04/07	39.7	0.86	1.00
		Recommended	41.5	0.90	1.00
835	Body	Measured, 13/04/07	52.5	0.98	1.00
		Recommended	55.2	0.97	1.00
1900	Head	Measured, 04/04/07	38.6	1.46	1.00
		Recommended	40.0	1.40	1.00
1900	Body	Measured, 05/04/07	50.9	1.56	1.00
		Measured, 13/04/07	51.6	1.54	1.00
		Recommended	53.3	1.52	1.00

6 System accuracy verification

A system accuracy verification of the DASY4 was performed using the dipole validation kit listed in section 4.1. The system verification test was conducted on the same day as the measurement of the DUT. Measurement made in ambient temperature 21-23 °C and humidity 23-34%. The obtained results are displayed in the table below.

RF noise had been measured in liquid when all RF equipment in lab was set off. Measured value was 0.0002 mW/g in 1g mass.

f [MHz]	Tissue type	Measured / Reference	SAR [W/kg] 1g/10g	Dielectric Parameters			Liquid T[°C]
				ϵ_r	σ [S/m]	ρ [g/cm ³]	
835	Head	Measured, 12/04/07	9.49 / 6.21	39.7	0.86	1.00	21.3
		Reference	9.20 / 6.00	40.2	0.88	1.00	22.0
	Body	Measured, 13/04/07	9.55 / 6.23	52.5	0.98	1.00	21.9
		Reference	9.48 / 6.29	54.1	1.01	1.00	22.0
1900	Head	Measured, 04/04/07	37.2 / 19.7	38.6	1.46	1.00	21.7
		Reference	37.4 / 19.8	38.8	1.43	1.00	22.0
	Body	Measured, 05/04/07	36.0 / 19.1	50.9	1.56	1.00	21.6
		Measured, 13/04/07	36.0 / 19.1	51.6	1.54	1.00	22.2
		Reference	38.6 / 20.6	51.9	1.55	1.00	22.0

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

7 SAR measurement uncertainty

SAR measurement uncertainty evaluation for Sonyericsson PY7A1032021 (Z310a) phone

Uncertainty Component	Uncer. (%)	Prob Dist.	Div.	C _i	GSM 850 Head	GSM 850 Body	GSM 1900 Head	GSM 1900 Body
Measurement System								
Probe Calibration	±5.9	N	1	1	±5.9	±5.9	±5.9	±5.9
Axial Isotropy	±4.7	R	√3	0.7	±1.9	±1.9	±1.9	±1.9
Spherical Isotropy	±9.6	R	√3	0.7	±3.9	±3.9	±3.9	±3.9
Boundary effect	±1.0	R	√3	1	±0.6	±0.6	±0.6	±0.6
Probe linearity	±4.7	R	√3	1	±2.7	±2.7	±2.7	±2.7
Detection limit	±1.0	R	√3	1	±0.6	±0.6	±0.6	±0.6
Readout electronics	±0.3	N	1	1	±0.3	±0.3	±0.3	±0.3
Response time	±0.8	R	√3	1	±0.5	±0.5	±0.5	±0.5
Integration time	±2.6	R	√3	1	±1.5	±1.5	±1.5	±1.5
RF Ambient Conditions	±3.0	R	√3	1	±1.7	±1.7	±1.7	±1.7
Mech. Constraints of robot	±0.4	R	√3	1	±0.2	±0.2	±0.2	±0.2
Probe positioning	±2.9	R	√3	1	±1.7	±1.7	±1.7	±1.7
Extrap. interpolation and integration	±1.0	R	√3	1	±0.6	±0.6	±0.6	±0.6
Measurement System Uncertainty					±8.4	±8.4	±8.4	±8.4
Test Sample Related								
Device positioning	±2.9	N	1	1	±2.9	±2.9	±2.9	±2.9
Device holder uncertainty	±3.6	N	1	1	±3.6	±3.6	±3.6	±3.6
Power drift	(-3.7 / -2.1 / -2.9 / -3.3)	R	√3	1	-2.1	-1.2	-1.7	-1.9
Test Sample Related Uncertainty					±5.1	±4.8	±4.9	±5.0
Phantom and Tissue Parameters								
Phantom uncertainty	±4.0	R	√3	1	±2.3	±2.3	±2.3	±2.3
Liquid conductivity (meas)	(-4.4 / +1.5 / +4.3 / +3.0)	R	√3	0.64	-2.8	+1.0	+2.8	+1.9
Liquid conductivity (target)	±5.0	R	√3	0.64	±1.8	±1.8	±1.8	±1.8
Liquid Permittivity (meas)	(-4.3 / -5.0 / -3.5 / -4.5)	R	√3	0.6	-2.6	-3.0	-2.1	-2.7
Liquid Permittivity (target)	±5.0	R	√3	0.6	±1.7	±1.7	±1.7	±1.7
Phantom and Tissue Parameters Uncertainty					±5.1	±4.7	±4.9	±4.8
Combined standard uncertainty					±11.1	±10.7	±10.9	±10.9
Extended standard uncertainty (k=2)					±22.2	±21.5	±21.8	±21.8

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

8 Test results

The measured 1-gram averaged SAR values of the DUT against the head are provided in Table 1. The ambient humidity and temperature of test facility were 23-35% and 21-23°C respectively. A base station simulator was used to control the device during the SAR measurement. The DUT was supplied with a fully charged battery for each measurement.

For head measurement, the DUT was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two phone positions, cheek (touch) and tilt (cheek + 15deg). For all modes, the DUT was tested at the lowest, middle and highest frequencies in the transmission band. The measured 1-gram averaged SAR values of the DUT against the head are provided in Table 1.

For body measurements was the DUT tested with the back(antenna) and front towards the phantom flat section with 15 mm distance both in speech and data mode. DUT was tested in both modes at the low, middle and high frequency in the transmission band. The SonyEricsson handsfree set (HPB-60) and Bluetooth set (HBH-PV705) was used for measurement at the worst case SAR for body in speech mode. The measured 1-gram averaged SAR values of the DUT against the body are provided in Table 2.

Mode	Chanel	Power [dBm]	Phone Position	Liquid T [°C]	SAR [W/kg]	
					Right-hand 1g mass	Left-hand 1g mass
					Measured	Measured
GSM 850	128	32.9	Cheek	21.3	0.80	0.97
			Tilt	21.3	-	-
	189	33.0	Cheek	21.3	1.09	1.12
			Tilt	21.3	0.26	-
	251	33.0	Cheek	21.3	1.04	1.13
			Tilt	21.3	-	0.24
GSM 1900	512	29.4	Cheek	21.7	0.47	0.45
			Tilt	21.7	-	-
	661	29.5	Cheek	21.7	0.47	0.50
			Tilt	21.7	-	0.12
	810	29.4	Cheek	21.7	0.50	0.48
			Tilt	21.7	0.12	-

Table1: SAR measurement result for Sony Ericsson PY7A1032021 telephone at highest possible output power. Measured against the head.

Mode	Channel	Power [dBm]	Phone Position	Mode	Liquid T [°C]	SAR [W/kg] in 1 g mass
GSM 850	128	32.9	Antenna to phantom	GPRS1TX	21.9	0.51
	189	33.0	Antenna to phantom	GPRS1TX	21.9	0.80
	251	33.0	Antenna to phantom	GPRS1TX	21.9	0.88
		33.0	Antenna to phantom	Handsfree	21.9	0.75
		28.9	Antenna to phantom	EDGE	21.9	0.39
		33.0	Antenna to phantom	Bluetooth	21.9	0.93
		33.0	Front to phantom	Bluetooth	21.9	0.21
GSM 1900	512	29.4	Antenna to phantom	GPRS1TX	21.6	0.27
	661	29.5	Antenna to phantom	GPRS1TX	21.6	0.32
	810	29.4	Antenna to phantom	GPRS1TX	21.6	0.33
		27.3	Antenna to phantom	EDGE	21.6	0.17
		29.4	Antenna to phantom	Bluetooth	21.6	0.34
		29.4	Antenna to phantom	Handsfree	21.6	0.37
		29.4	Front to phantom	Handsfree	22.2	0.06

Table2: SAR measurement result for Sony Ericsson PY7A1032021 telephone at highest possible output power. Measured against the body.

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

9

References

[1] R.Plicanic, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson SAR Test Laboratory internal document GUG/N 03:141

[2] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).

[3] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," Std 1528-2003, June, 2003.

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

Company Internal
REPORT

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

10 Appendix

10.1 Photographs of the device under test



Front- and back side



Back side with battery and cover removed



Left- and right side



Bottom- and top side

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Magnus Söderman

Approved

LD/SEMC/BGLIM/C Peter Lindeborg

Checked

070419

Company Internal
REPORT

No.

BGLI07:142

Date

070416

Rev

A


Reference

File

10.2 Device position at SAM Twin Phantom



Device position towards the head: Cheek (touch) phone position

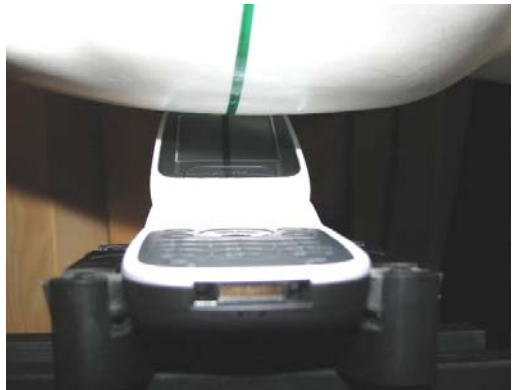

Device position towards the head: Tilt (cheek+15 deg.) phone position



DUT position towards the body: 15 mm distance between SAM and DUT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Magnus Söderman*

Approved

LD/SEMC/BGLIM/C *Peter Lindeborg*

Checked

070419

Company Internal
REPORT

No.

BGLI07:142

Date

070416

Rev

A

Reference

File

10.3 Attachments

- Measurement plots and system validation
- Probe and dipole calibration

Date/Time: 2007-04-12 09:20:47

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemPerformanceCheck-D835.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484****Program Name: System Performance Check at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.86$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.89, 6.89, 6.89); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 1; Type: Twin SAM; Serial: TP-1144
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=100mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.03 mW/g


d=15mm, Pin=100mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.3 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.949 mW/g; SAR(10 g) = 0.621 mW/g


Maximum value of SAR (measured) = 1.02 mW/g

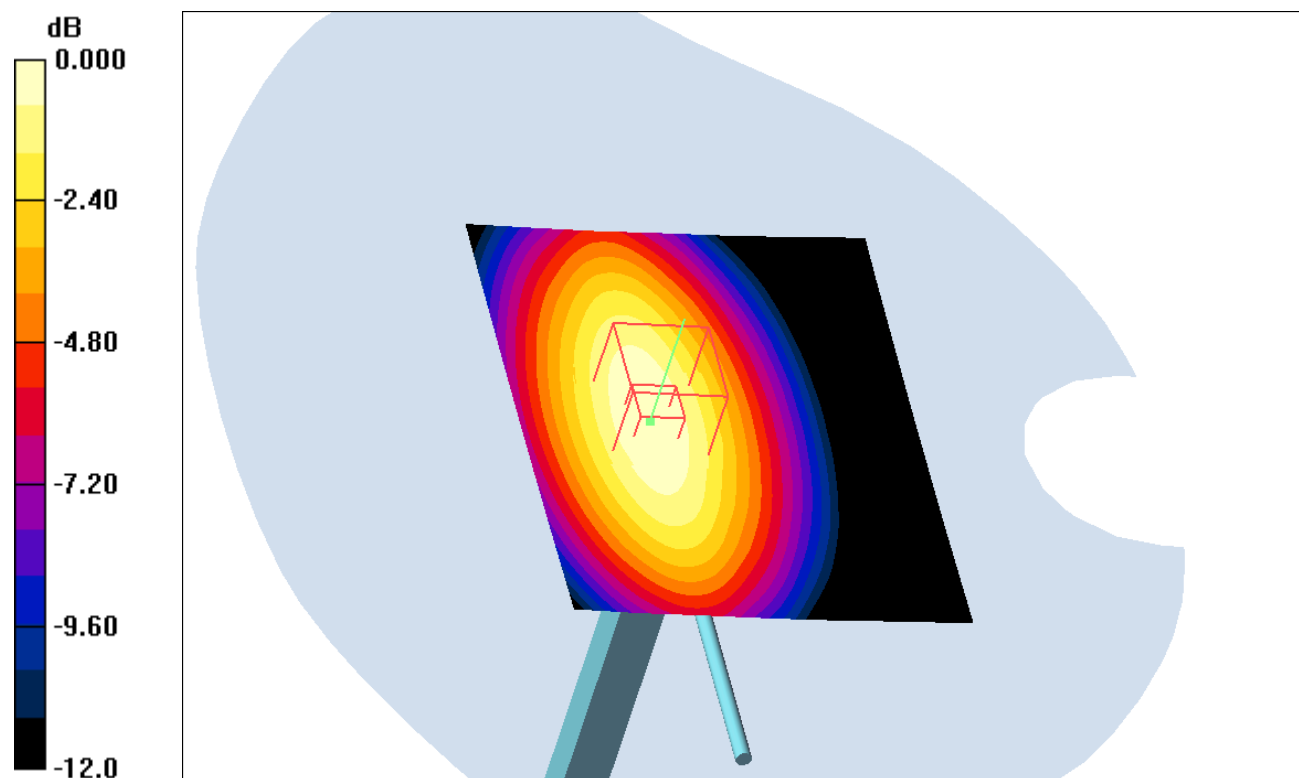

0 dB = 1.02mW/g

$SAR(x,y,z,f_0)$

SAR; Z Scan: Value Along Z, X=0, Y=0

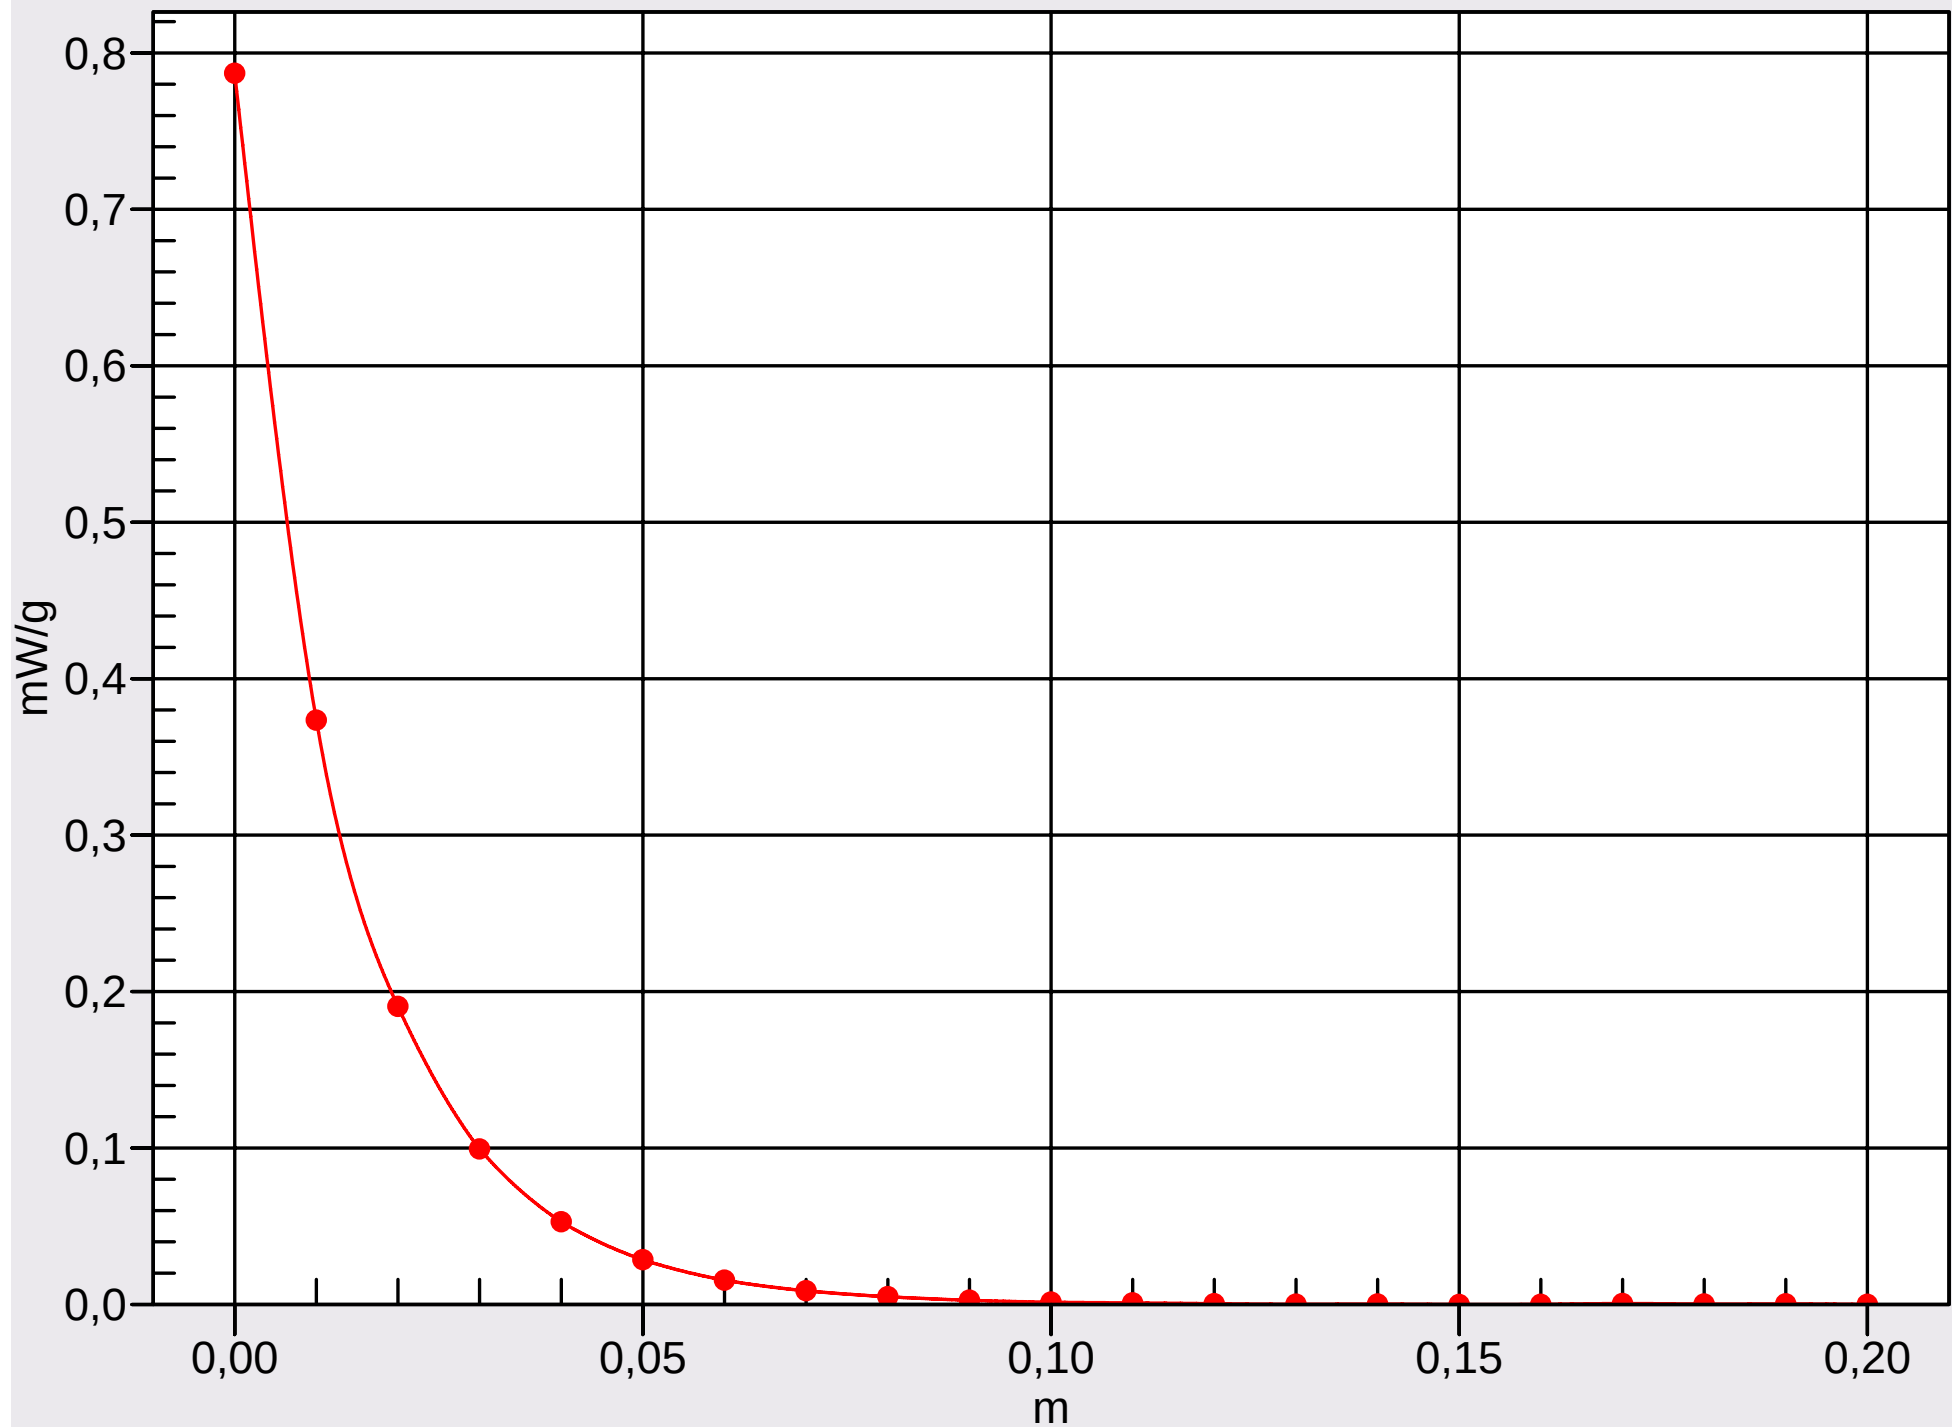

Date/Time: 2007-04-12 11:23:04

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [LeftHandSide-GSM835.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: GSM835MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.874$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.89, 6.89, 6.89); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 1; Type: Twin SAM; Serial: TP-1144
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - High/Area Scan (51x171x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.22 mW/g


Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.61 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.768 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

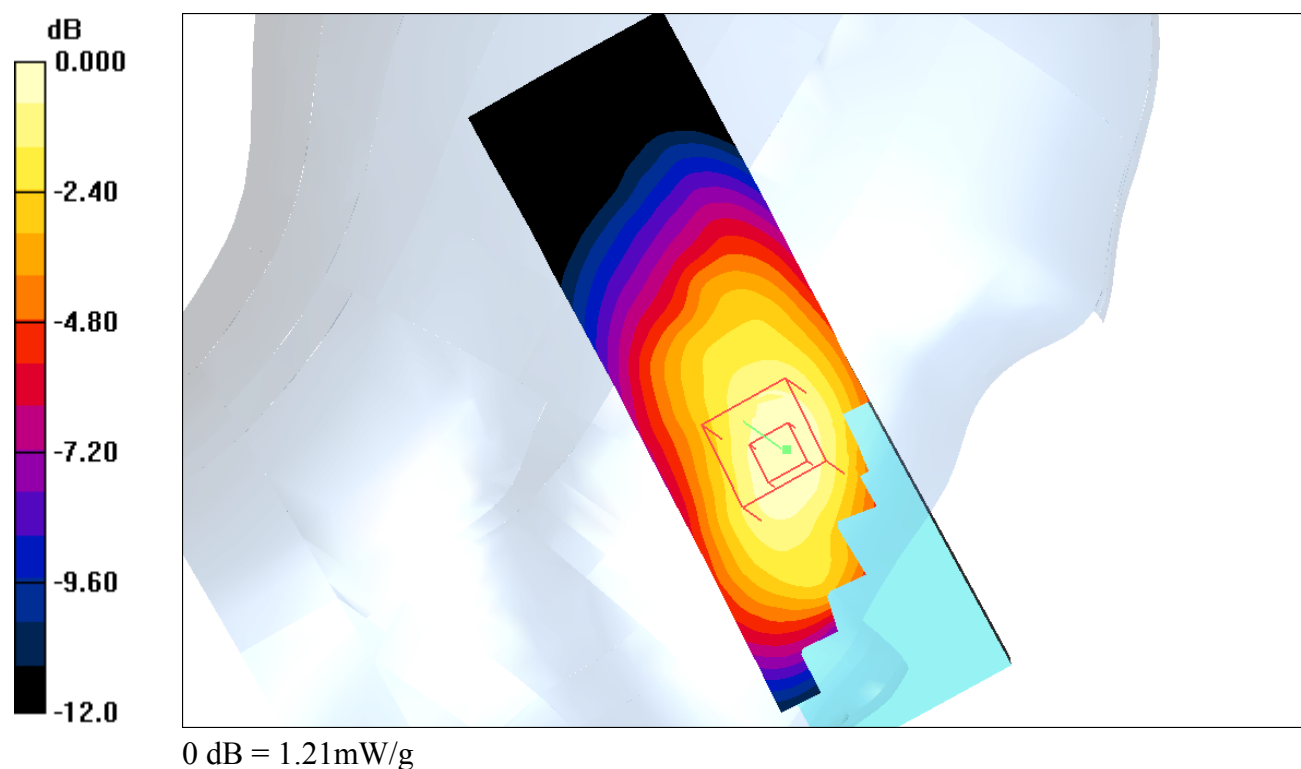

Date/Time: 2007-04-12 11:44:40

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [LeftHandSide-GSM835.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Compliance Testing: (Left-Hand Side)


Communication System: GSM835MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.874 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m^3

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.89, 6.89, 6.89); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 1; Type: Twin SAM; Serial: TP-1144
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

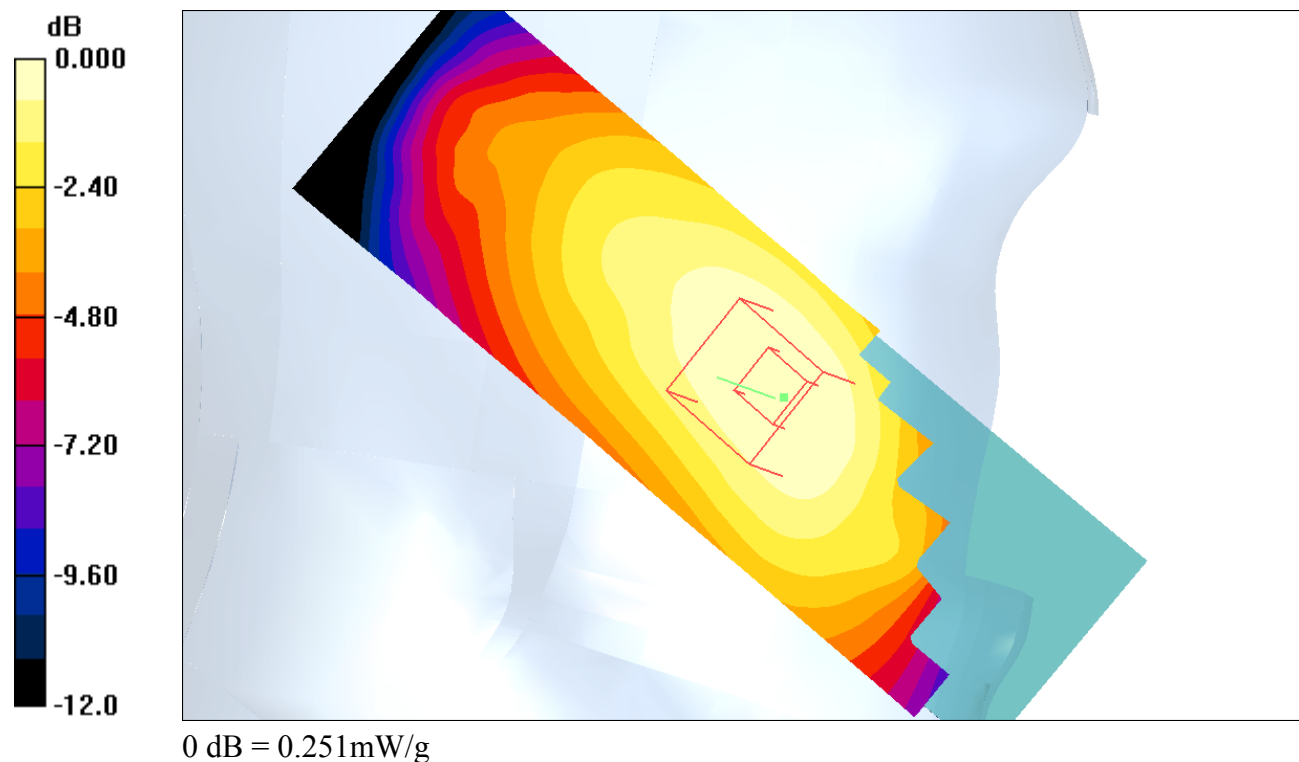Tilt position - High/Area Scan (51x171x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (interpolated) = 0.254 mW/g **Tilt position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.85 V/m ; Power Drift = -0.125 dB Peak SAR (extrapolated) = 0.295 W/kg **SAR(1 g) = 0.237 mW/g ; SAR(10 g) = 0.177 mW/g** Maximum value of SAR (measured) = 0.251 mW/g 

Date/Time: 2007-04-12 14:51:17

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [RightHandSide-GSM835.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Compliance Testing: (Right-Hand Side)

Communication System: GSM835MHz; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.89, 6.89, 6.89); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn433; Calibrated: 2007-01-18

- Phantom: SAM 1; Type: Twin SAM; Serial: TP-1144

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Middle/Area Scan (51x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.17 mW/g


Touch position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.42 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.750 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

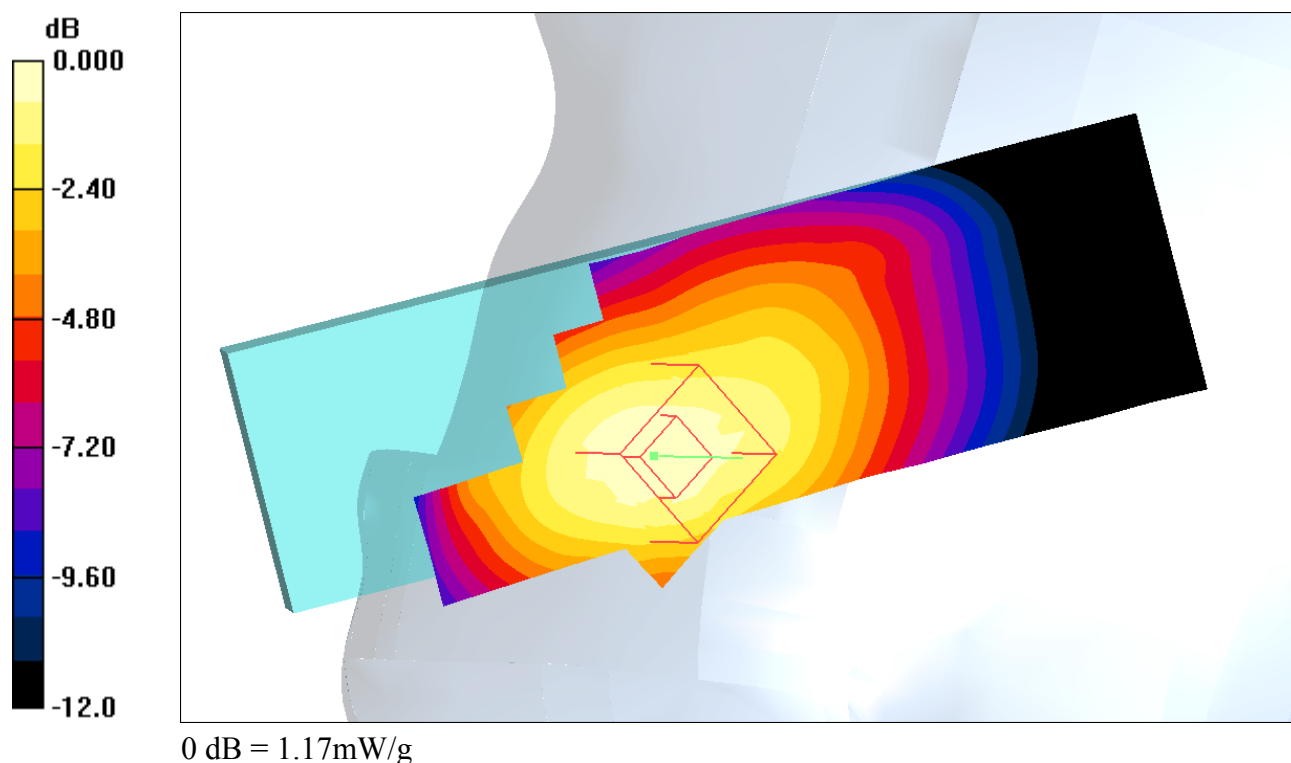

Date/Time: 2007-04-12 15:33:34

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [RightHandSide-GSM835.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Compliance Testing: (Right-Hand Side)

Communication System: GSM835MHz; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.89, 6.89, 6.89); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 1; Type: Twin SAM; Serial: TP-1144
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle/Area Scan (51x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.270 mW/g


Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.84 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

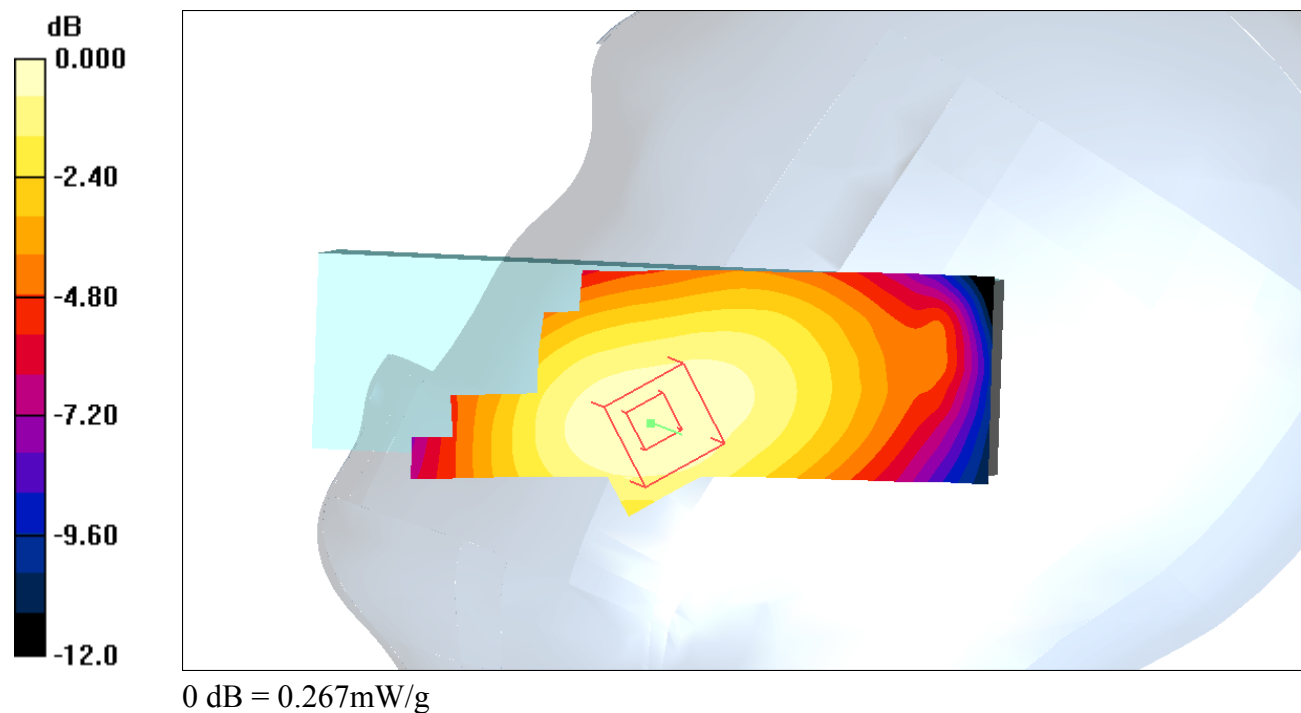

Date/Time: 2007-04-13 09:01:32

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemPerformanceCheck-D835_Body.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484****Program Name: System Performance Check at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.983$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.94, 6.94, 6.94); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=100mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g


d=15mm, Pin=100mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.4 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.42 W/kg


SAR(1 g) = 0.955 mW/g; SAR(10 g) = 0.623 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

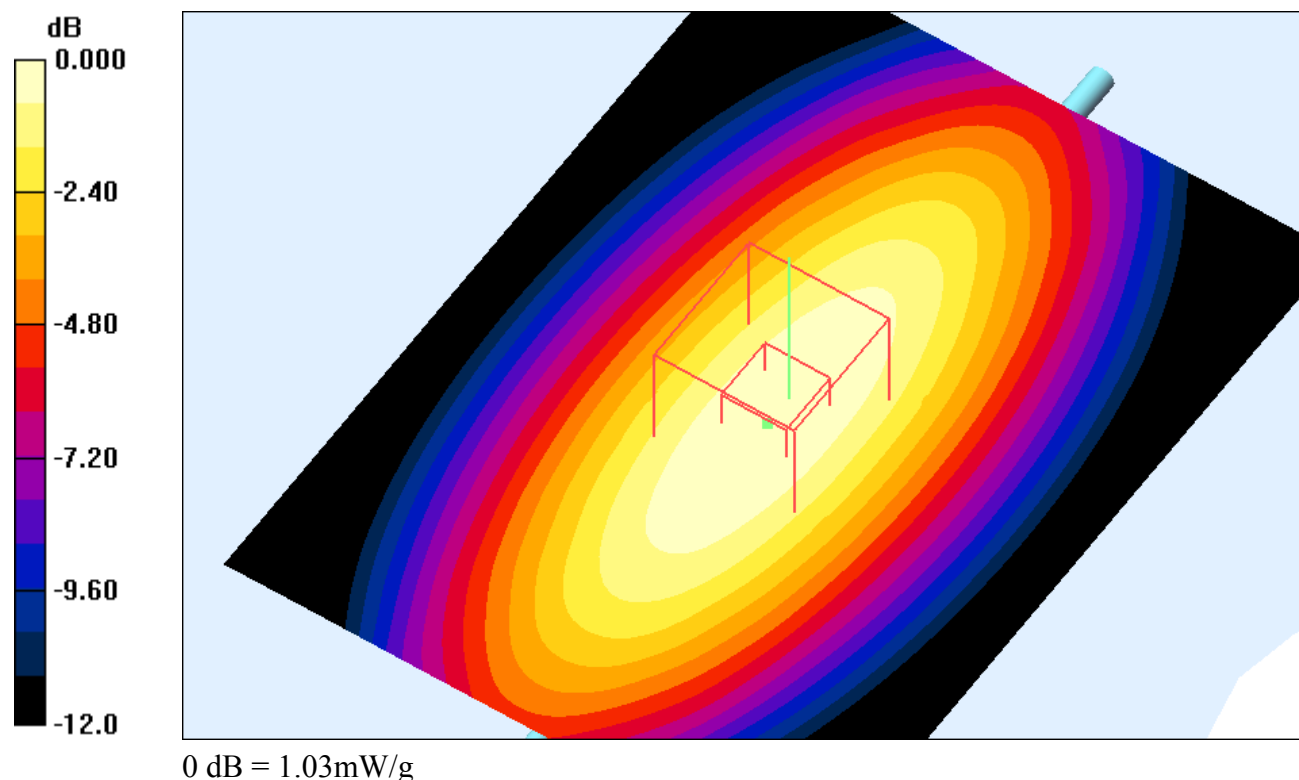

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

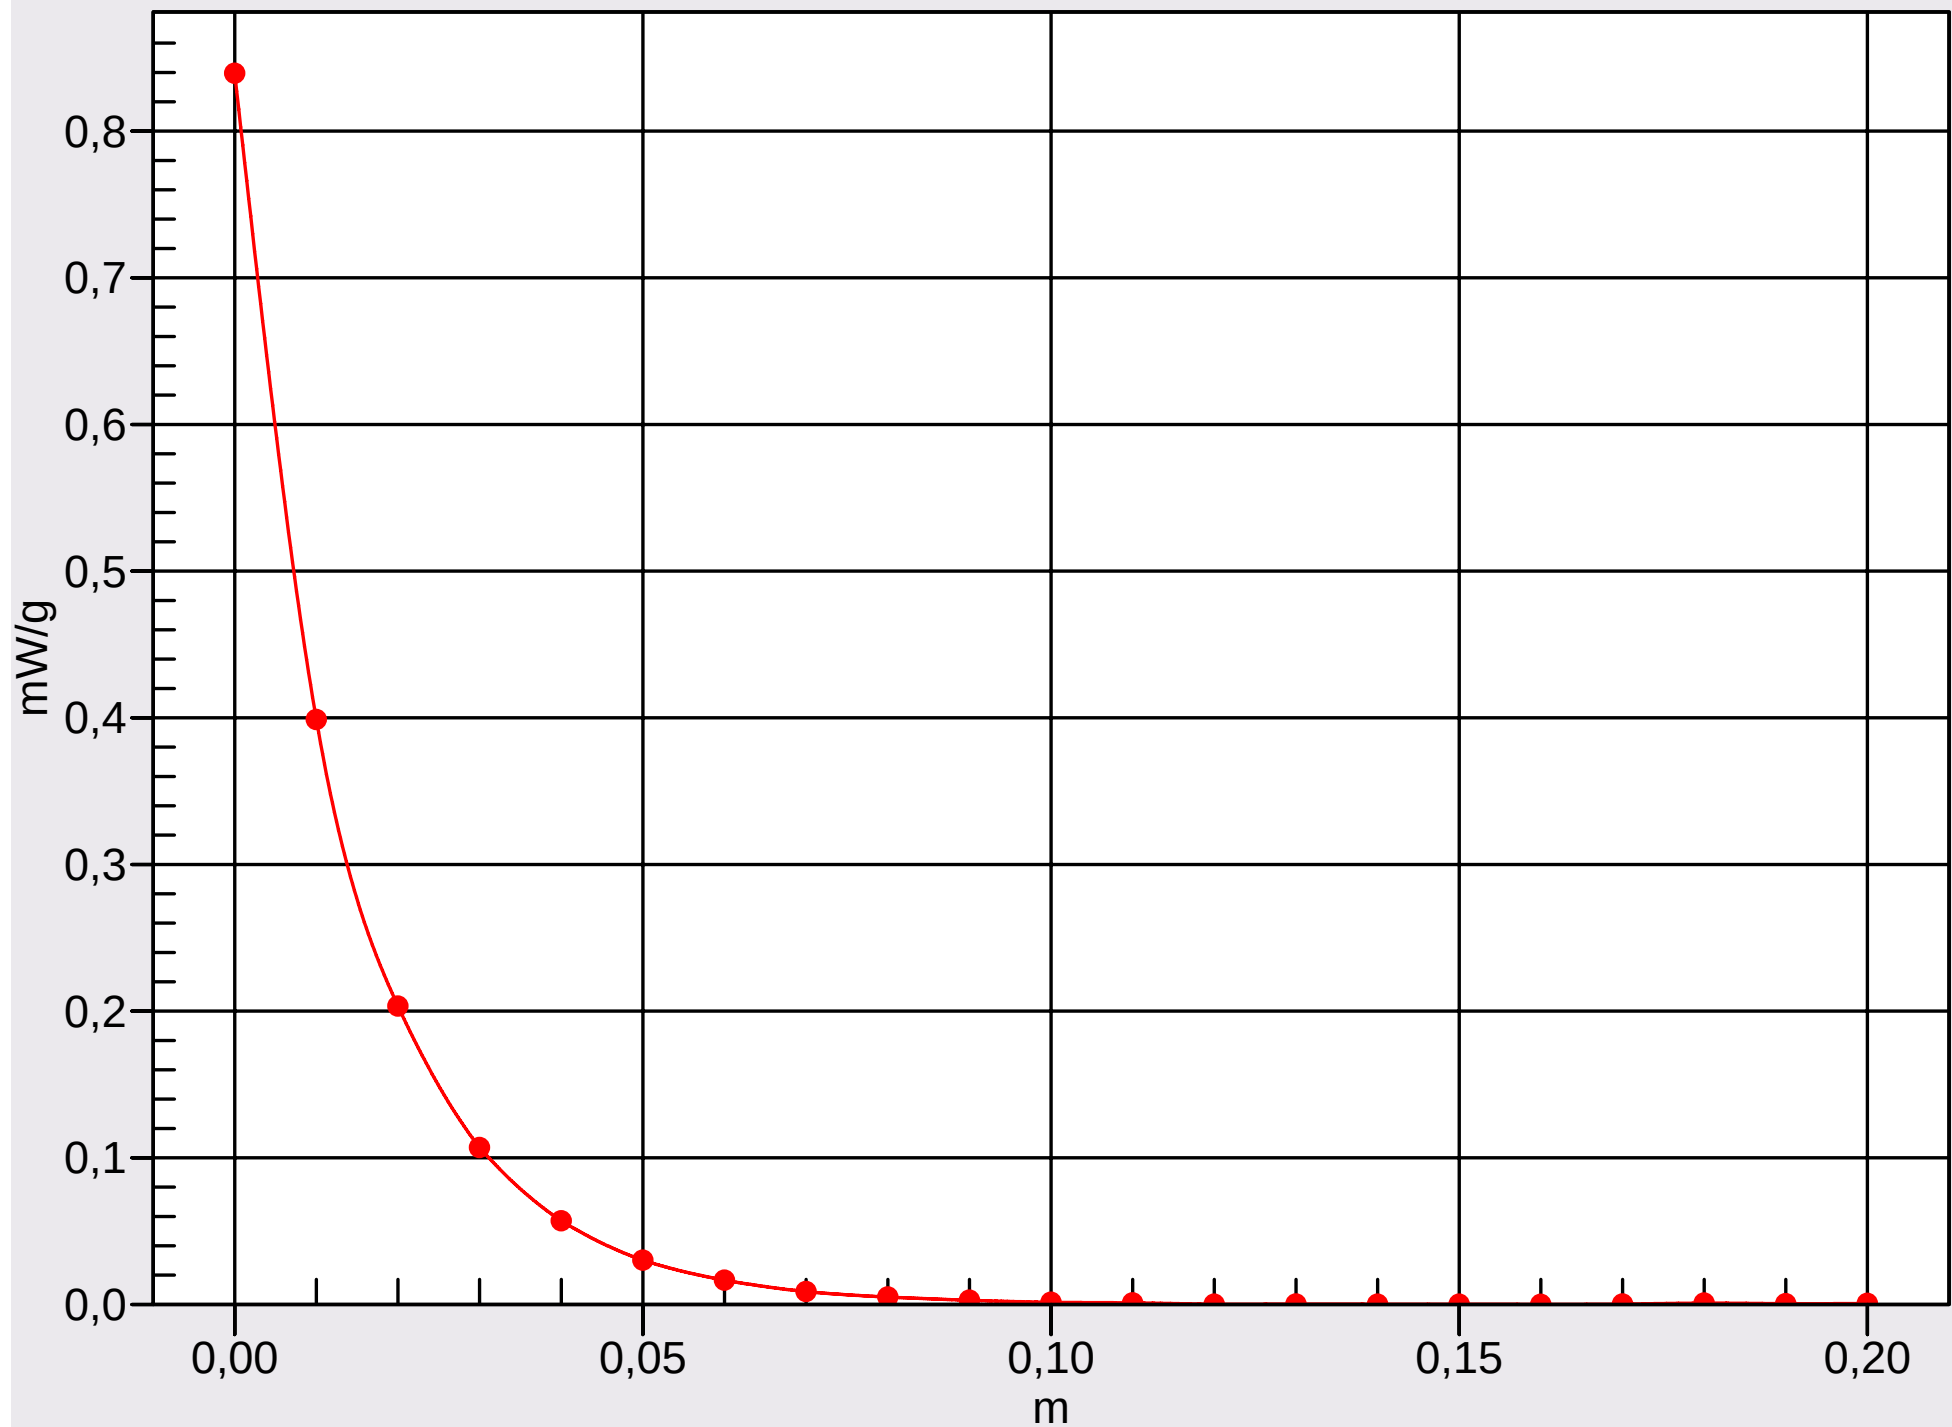

Date/Time: 2007-04-13 10:50:27

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body GSM-850.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Body GSM-850(GPRS1TX)

Communication System: GSM835MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.94, 6.94, 6.94); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High/Area Scan GPRS (51x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.936 mW/g

High/Zoom Scan GPRS (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.883 mW/g; SAR(10 g) = 0.591 mW/g

Maximum value of SAR (measured) = 0.947 mW/g

High/Zoom Scan GPRS (5x5x7) (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 28.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.840 mW/g; SAR(10 g) = 0.536 mW/g

Maximum value of SAR (measured) = 0.900 mW/g

0 dB = 0.900mW/g

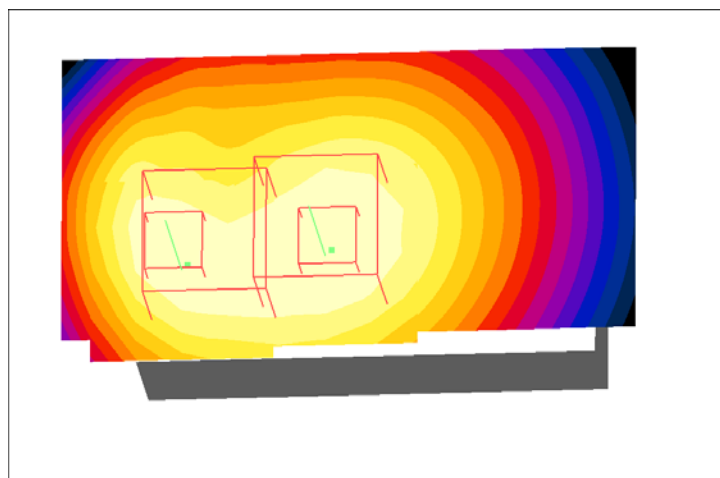

Date/Time: 2007-04-13 11:16:43

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body GSM-850.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Body GSM-850

Communication System: GSM835MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.94, 6.94, 6.94); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High 2 BT/Area Scan (51x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.990 mW/g

High 2 BT/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.4 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.624 mW/g

Maximum value of SAR (measured) = 1.01 mW/g


High 2 BT/Zoom Scan (5x5x7) (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.4 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.879 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 0.937 mW/g

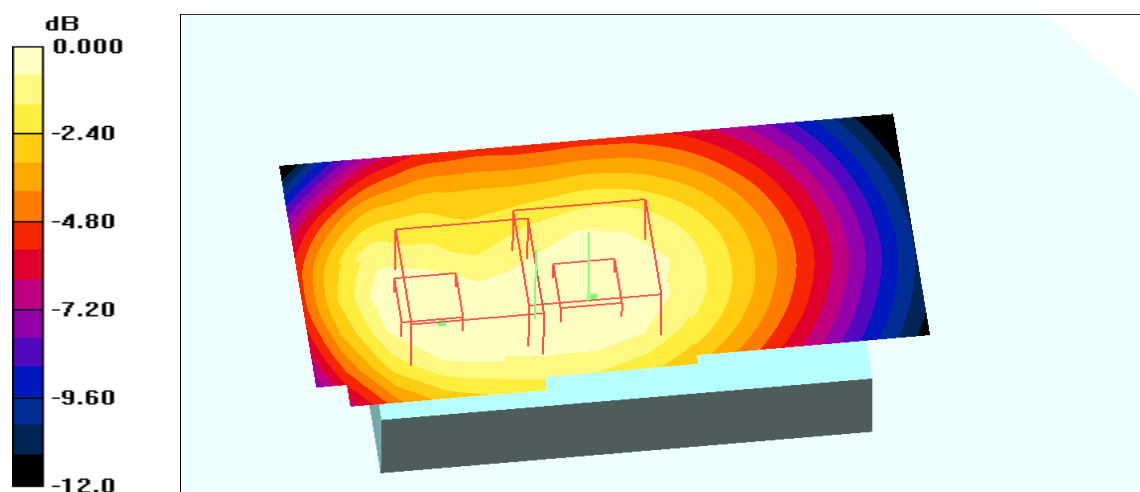

0 dB = 0.937mW/g

Date/Time: 2007-04-13 13:21:50

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body GSM-850.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Body GSM-850

Communication System: GSM835MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(6.94, 6.94, 6.94); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High 5 Front+BT/Area Scan (51x101x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.221 mW/g


High 5 Front+BT/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

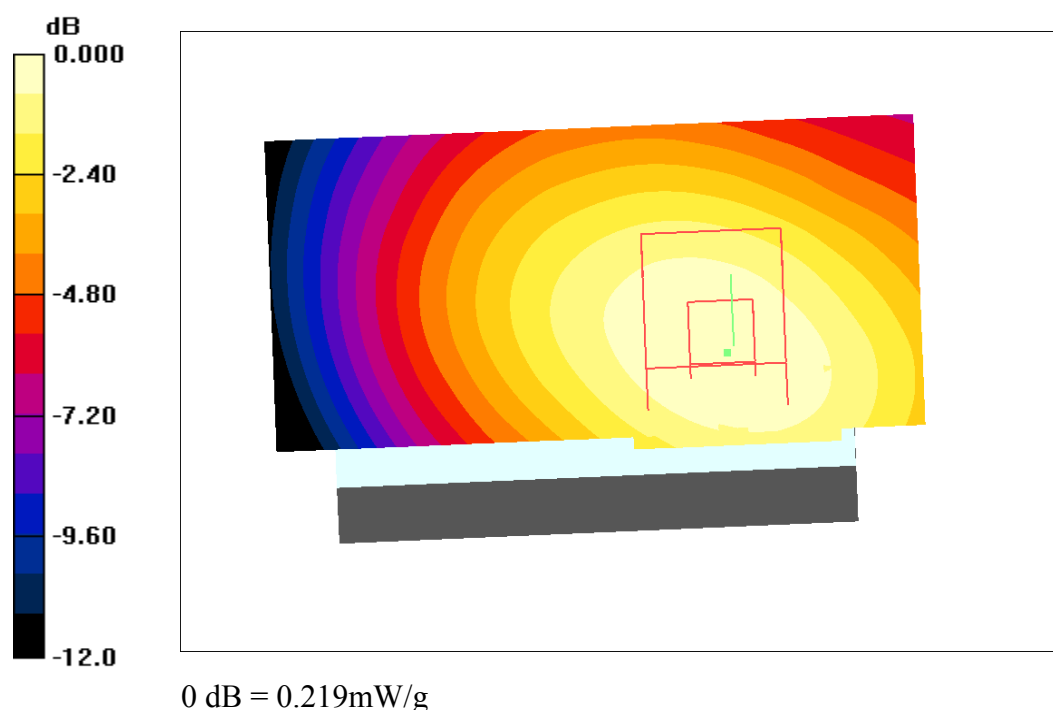

Date/Time: 2007-04-04 09:58:15

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemPerformanceCheck-D1900.da4](#)**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002****Program Name: System Performance Check at 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(5.33, 5.33, 5.33); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=100mW/Area Scan (51x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.68 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.9 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 6.36 W/kg


SAR(1 g) = 3.72 mW/g; SAR(10 g) = 1.97 mW/g

Maximum value of SAR (measured) = 4.17 mW/g

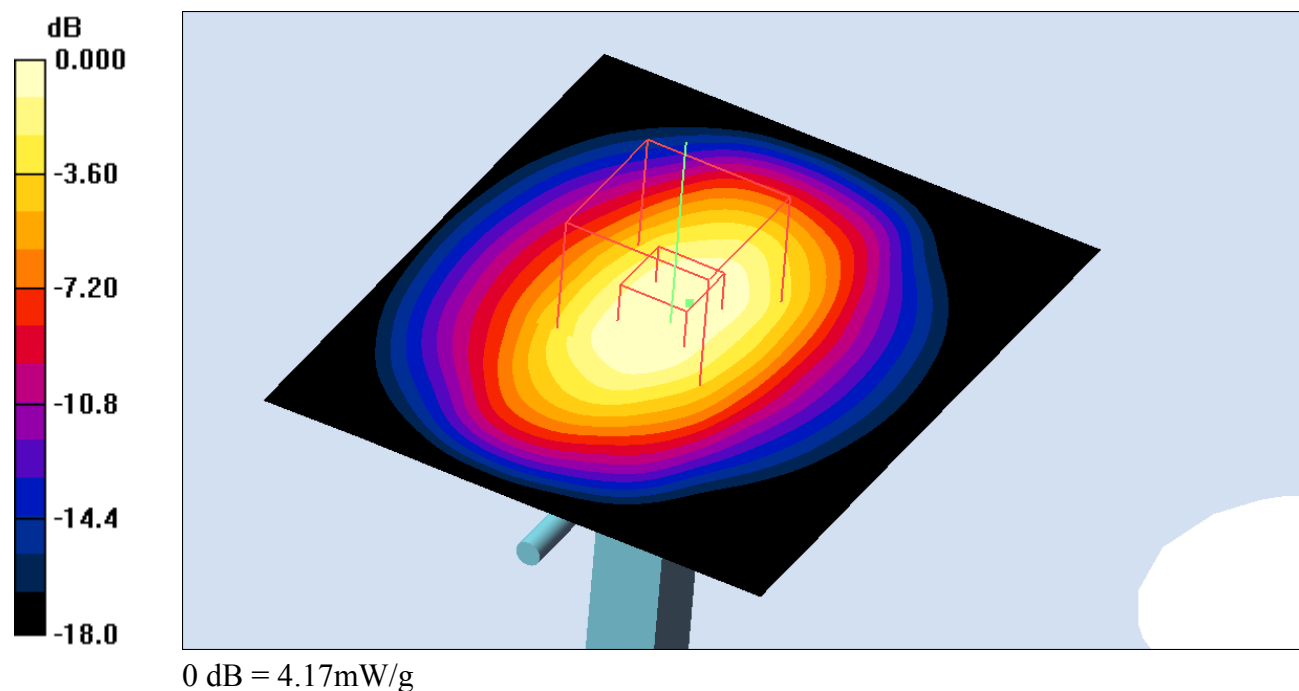

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

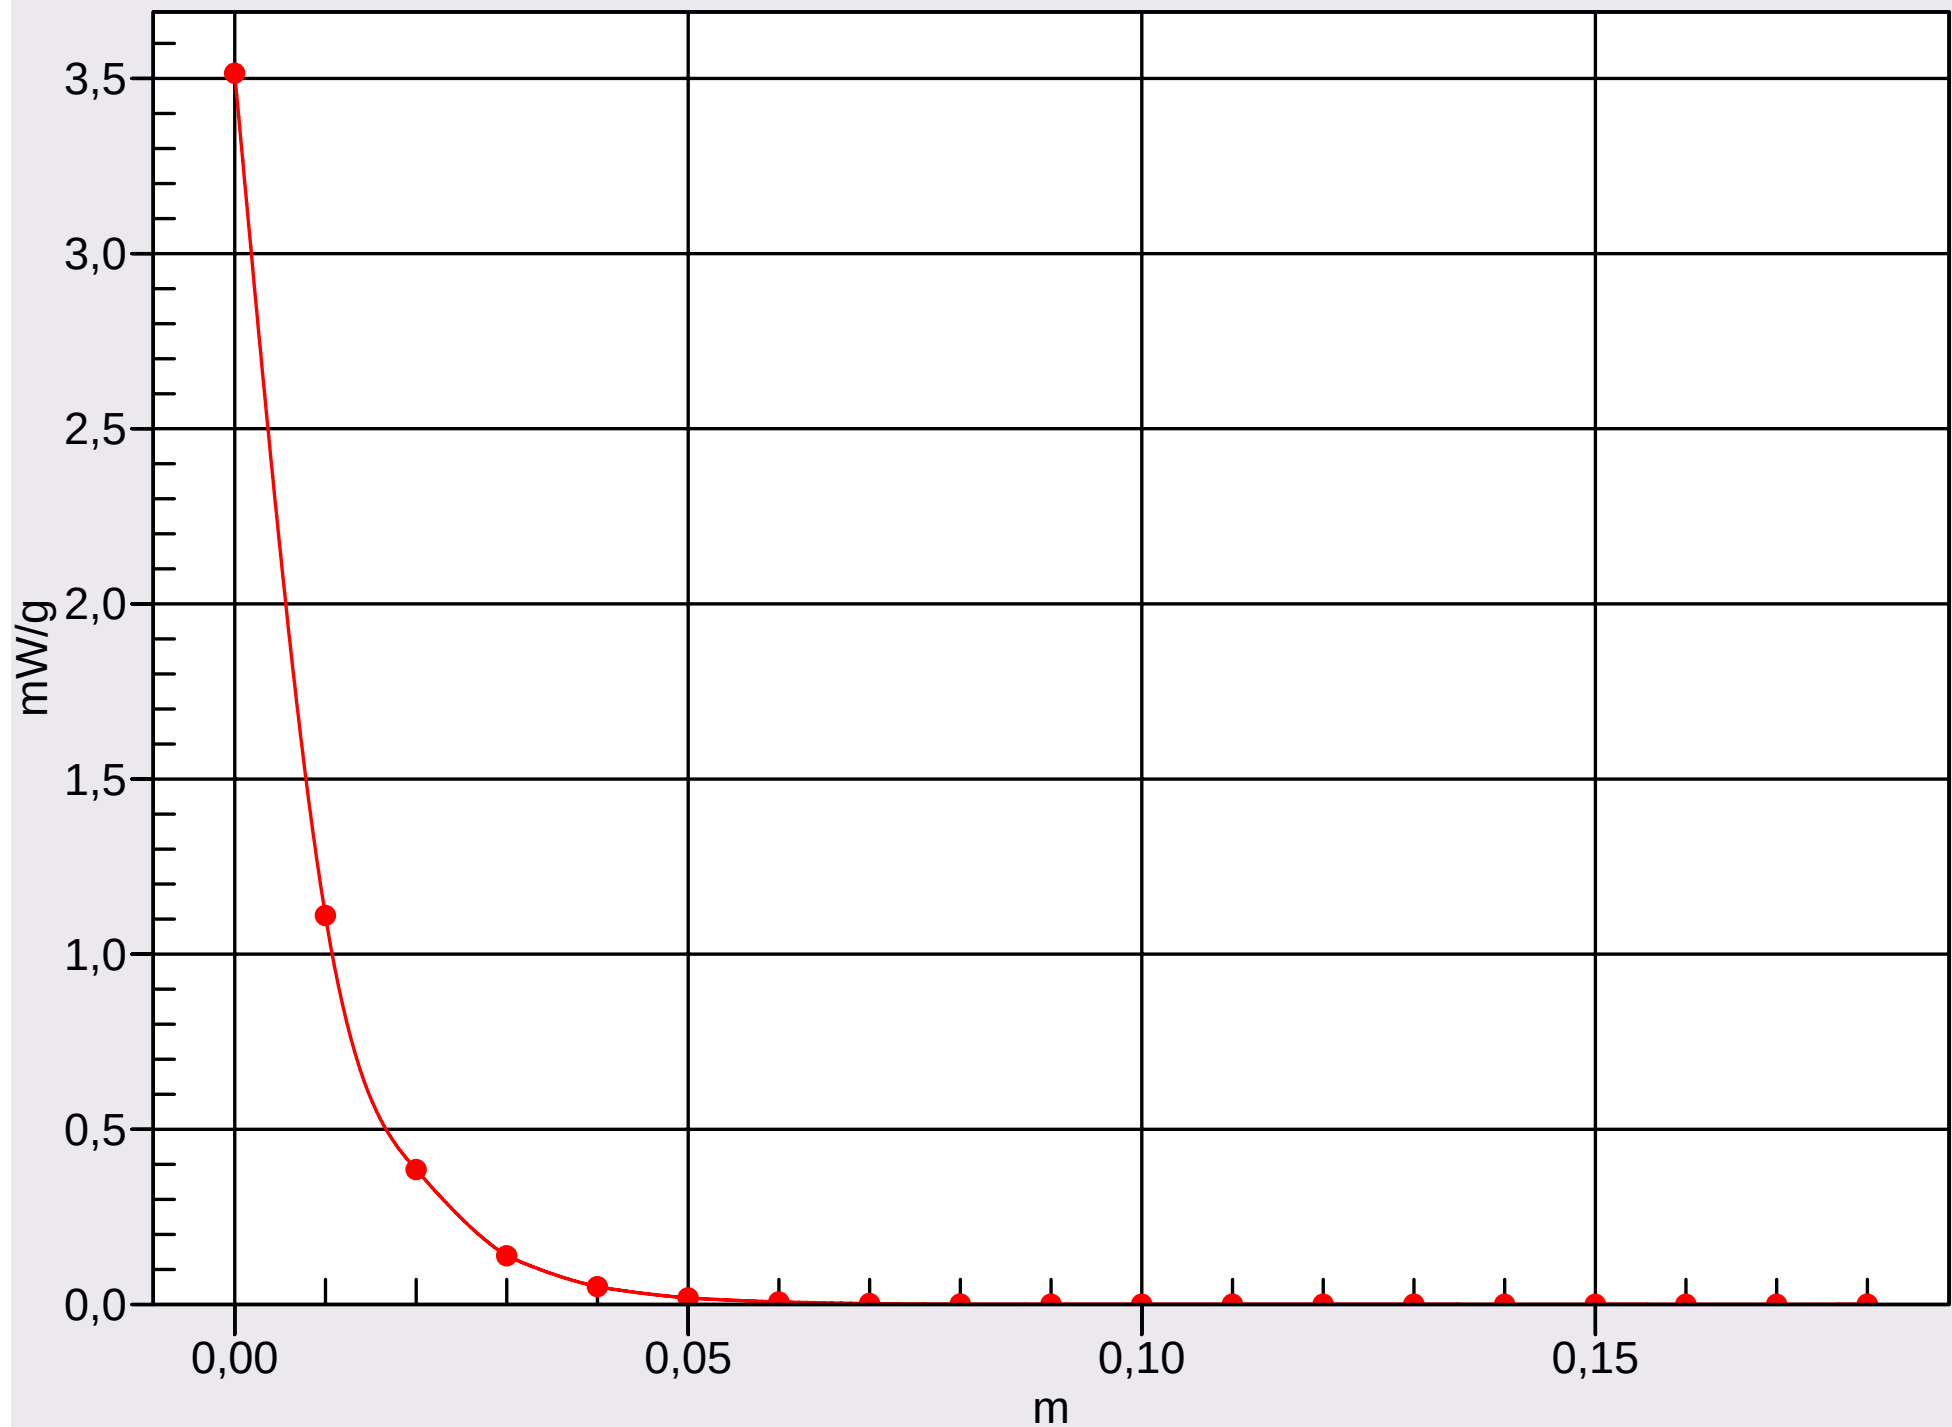

Date/Time: 2007-04-04 11:22:22

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [LeftHandSide-GSM1900.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(5.33, 5.33, 5.33); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Middle/Area Scan (51x171x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.550 mW/g


Touch position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.24 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 0.748 W/kg

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.549 mW/g

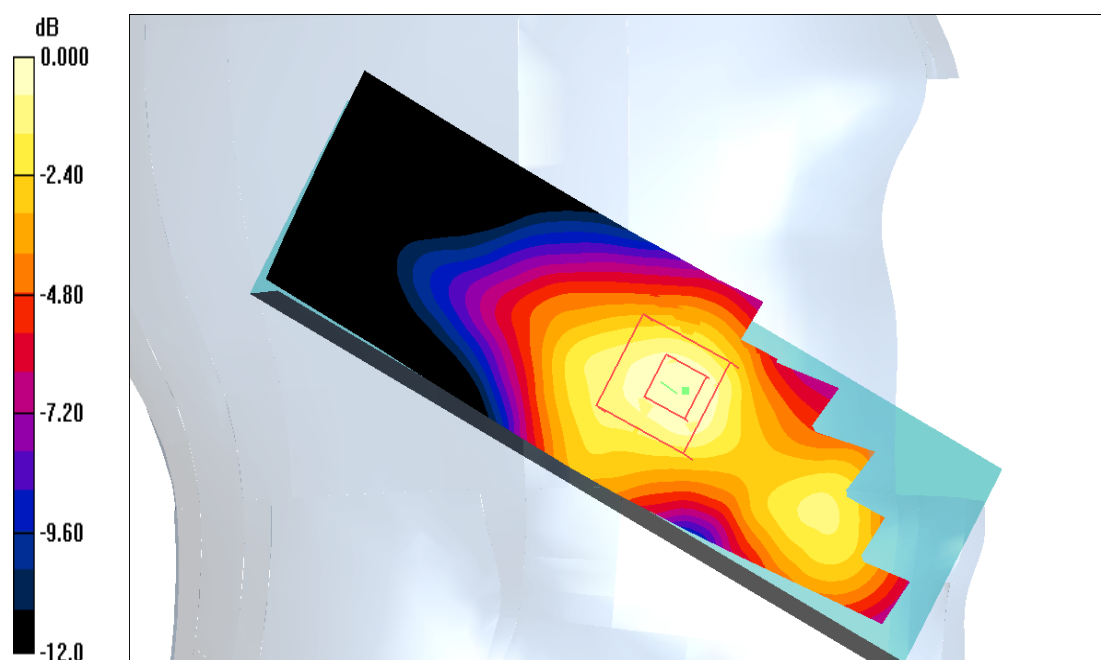

0 dB = 0.549mW/g

Date/Time: 2007-04-04 12:36:56

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [LeftHandSide-GSM1900.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Compliance Testing: (Left-Hand Side)

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(5.33, 5.33, 5.33); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle/Area Scan (51x171x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.136 mW/g


Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.64 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

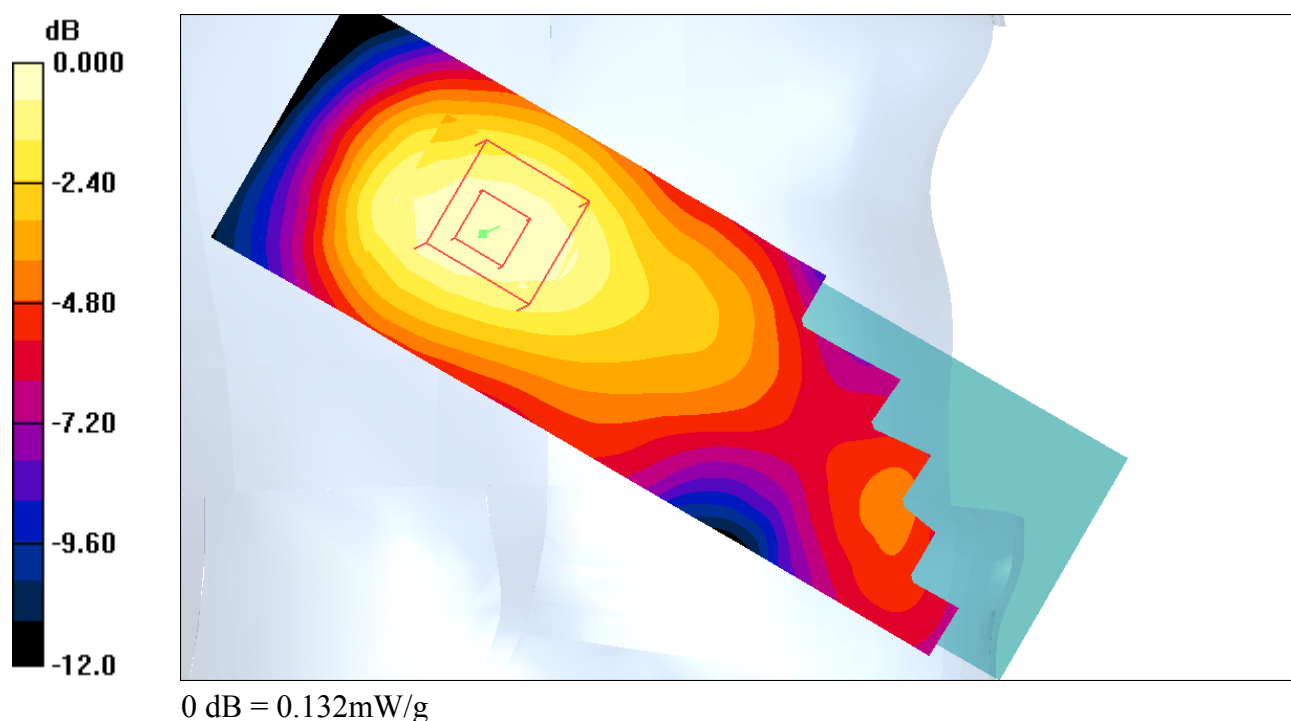

Date/Time: 2007-04-04 13:52:26

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [RightHandSide-GSM1900.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: GSM-1900 (Right-Hand Side)

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(5.33, 5.33, 5.33); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - High/Area Scan (51x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.552 mW/g


Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.90 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.552 mW/g

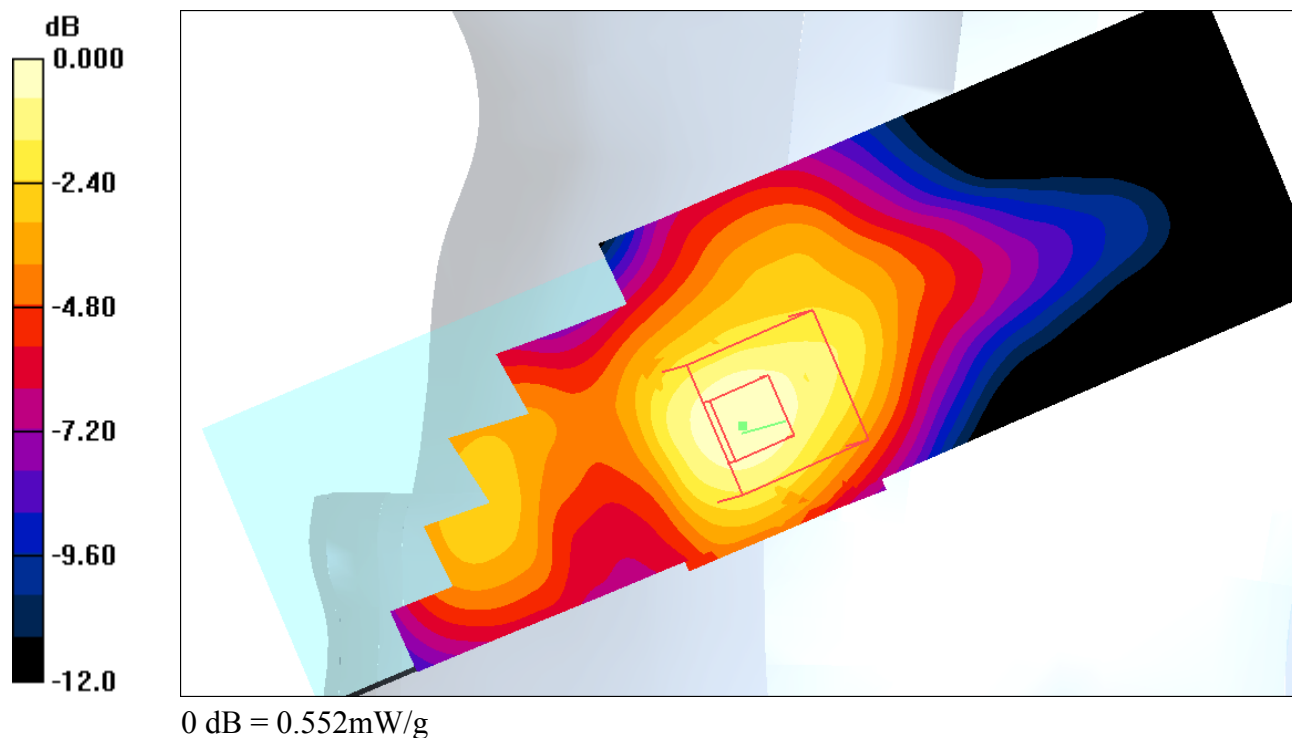

Date/Time: 2007-04-04 14:38:15

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [RightHandSide-GSM1900.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: GSM-1900 (Right-Hand Side)

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(5.33, 5.33, 5.33); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - High/Area Scan (51x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.134 mW/g


Tilt position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.45 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.136 mW/g

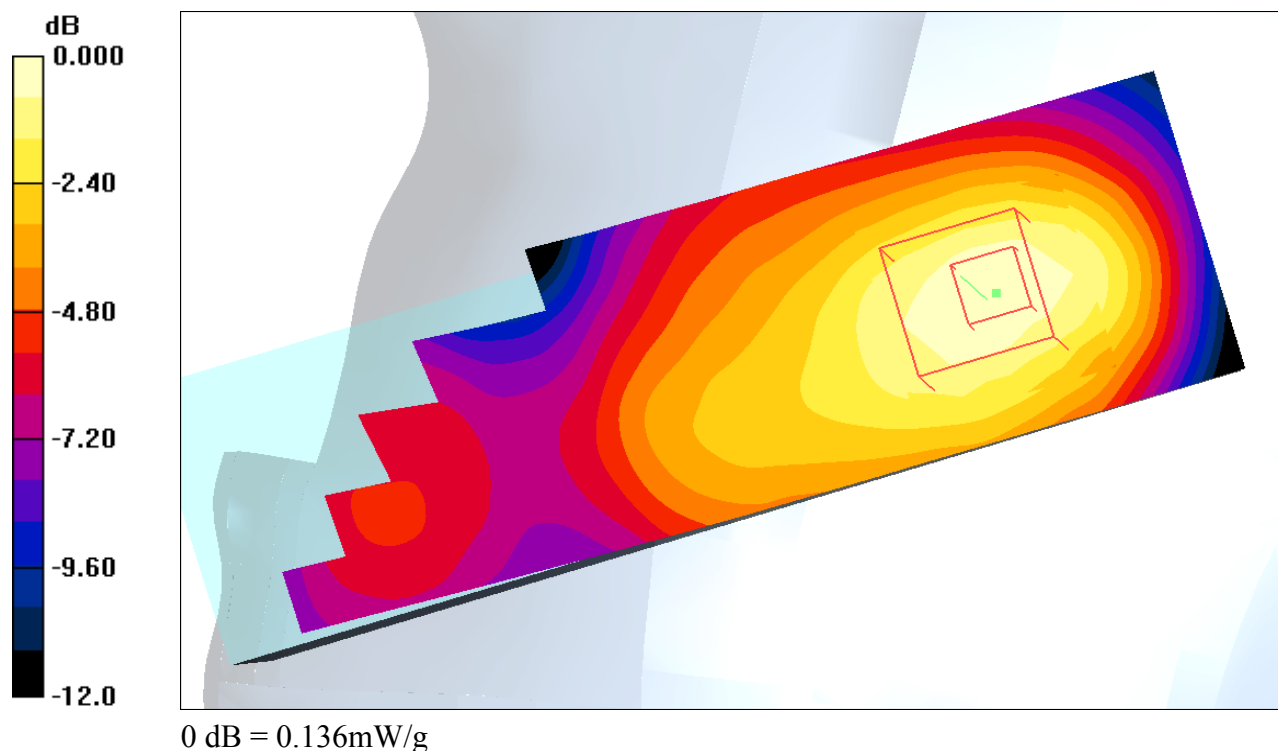

Date/Time: 2007-04-05 08:50:36

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemPerformanceCheck-D1900B.da4](#)**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002****Program Name: System Performance Check at 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(4.79, 4.79, 4.79); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=100mW/Area Scan (51x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.51 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.0 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 6.03 W/kg


SAR(1 g) = 3.6 mW/g; SAR(10 g) = 1.91 mW/g

Maximum value of SAR (measured) = 4.10 mW/g

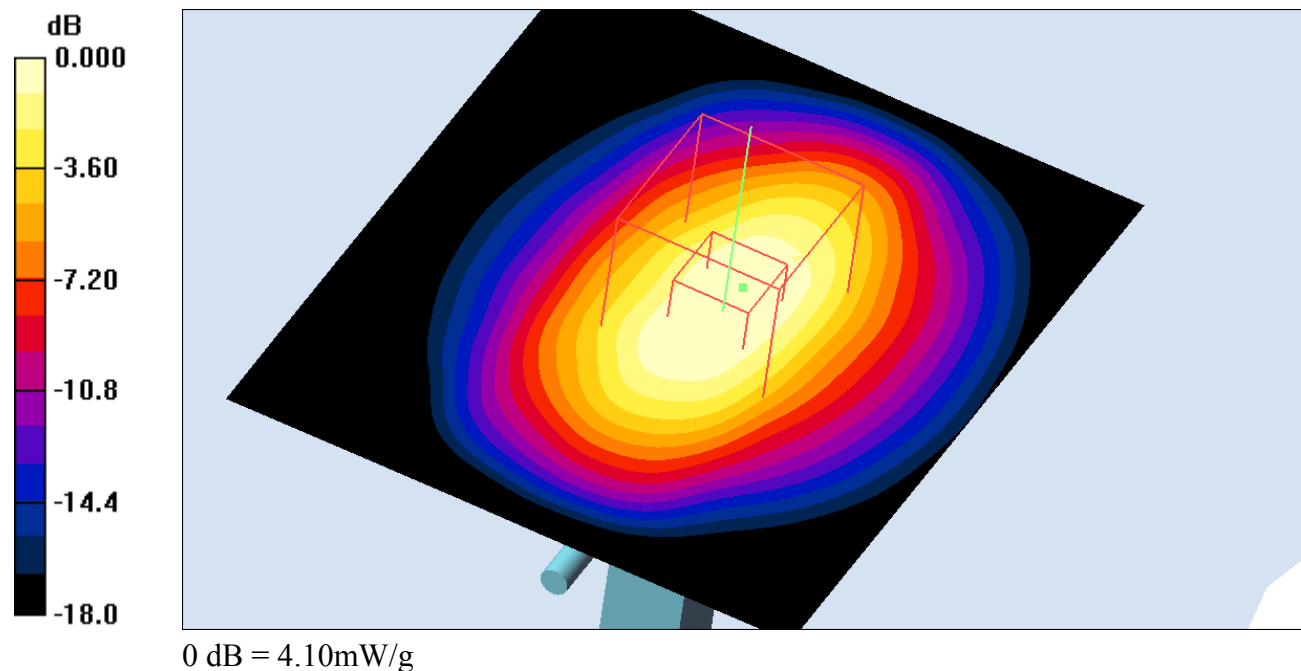

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

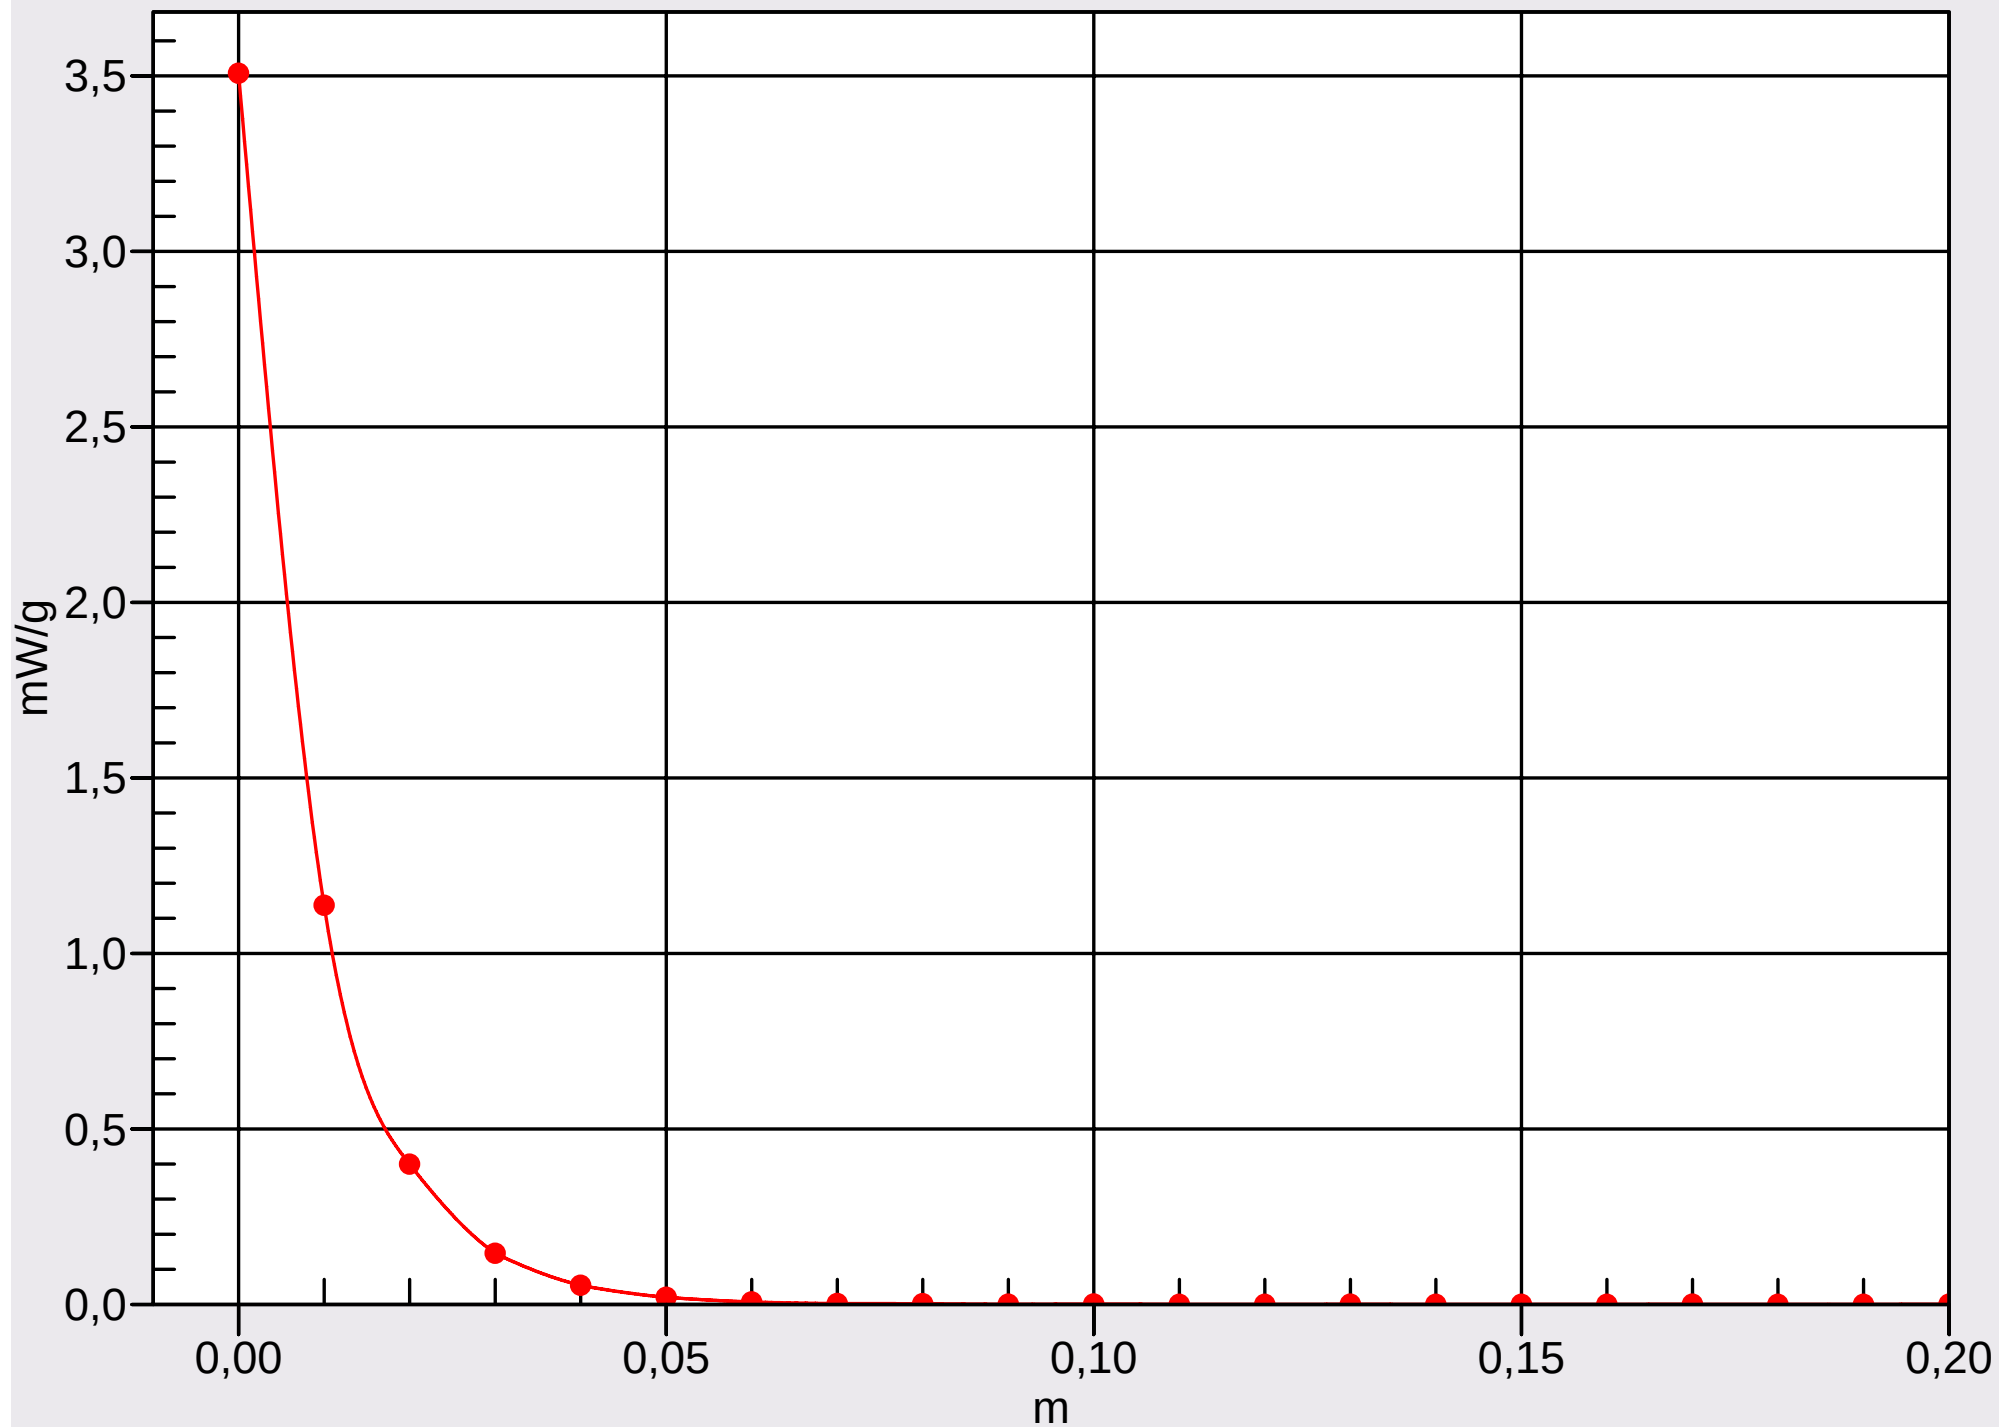

Date/Time: 2007-04-05 10:03:25

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body GSM-1900.da4](#)

DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)
Program Name: Body GSM-1900(GPRS)

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(4.79, 4.79, 4.79); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High/Area Scan GPRS(51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.365 mW/g


High/Zoom Scan GPRS(5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.377 mW/g

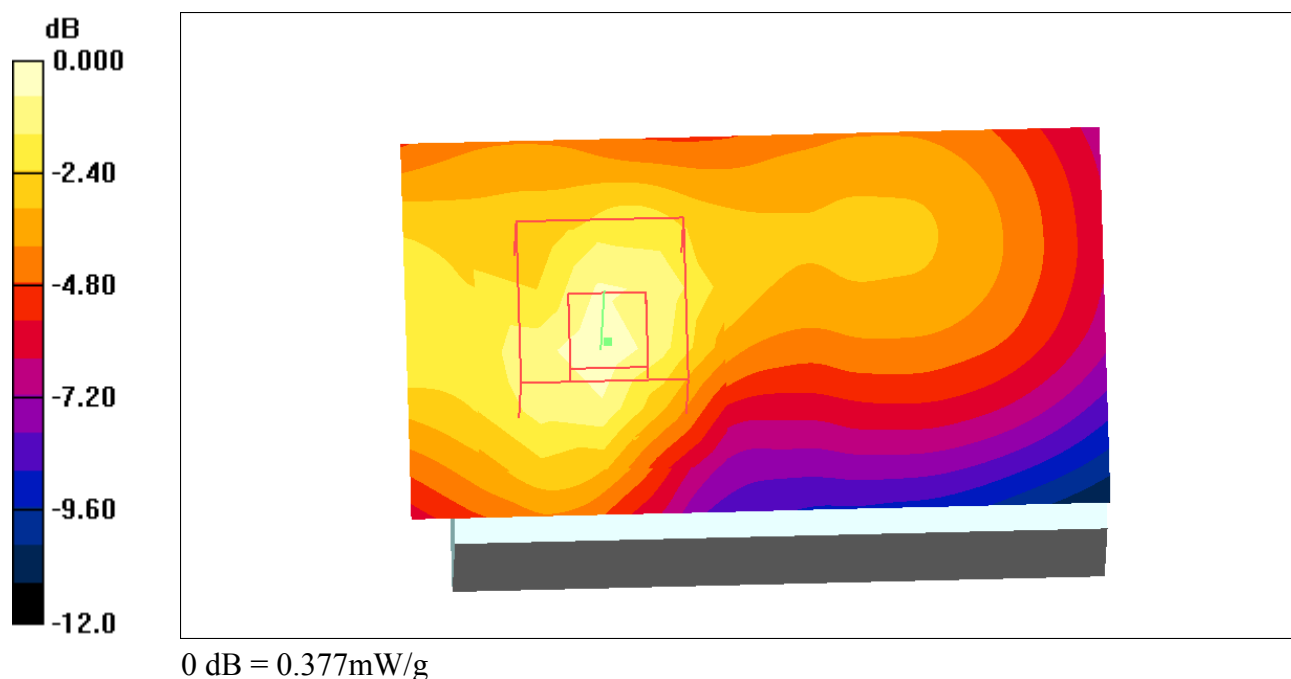

Date/Time: 2007-04-05 10:58:11

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body GSM-1900.da4](#)**DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)****Program Name: Body GSM-1900**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(4.79, 4.79, 4.79); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High PHF/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.411 mW/g


High PHF/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.422 mW/g

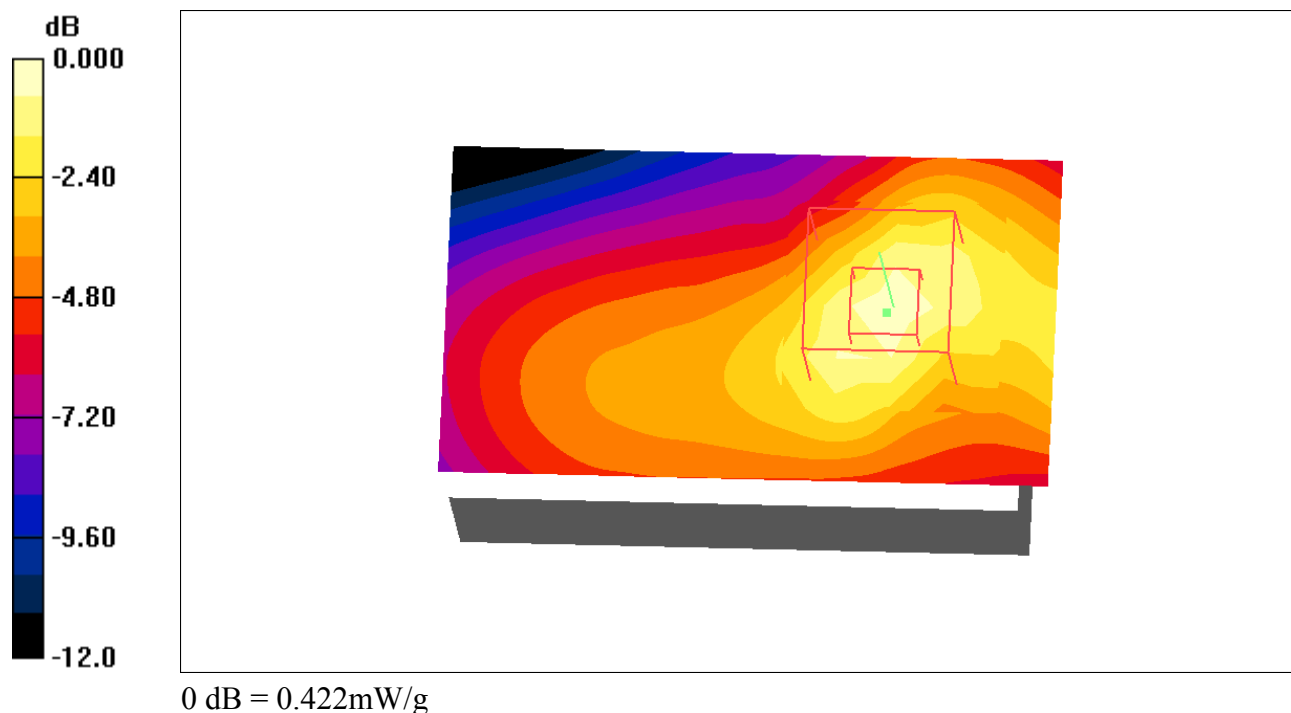

Date/Time: 2007-04-13 16:31:02

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body GSM-1900_2.da4](#)**DUT: AAB-1032021-BV (Alva850); Type: GSM Triple Band; Serial: CB510J0MAU (#7225)****Program Name: Body GSM-1900**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1569; ConvF(4.79, 4.79, 4.79); Calibrated: 2007-01-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn433; Calibrated: 2007-01-18
- Phantom: SAM 2; Type: SAM QD 000 P40 CB; Serial: TP-1396
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High PHF Front/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.064 mW/g


High PHF Front/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.53 V/m; Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.087 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.062 mW/g

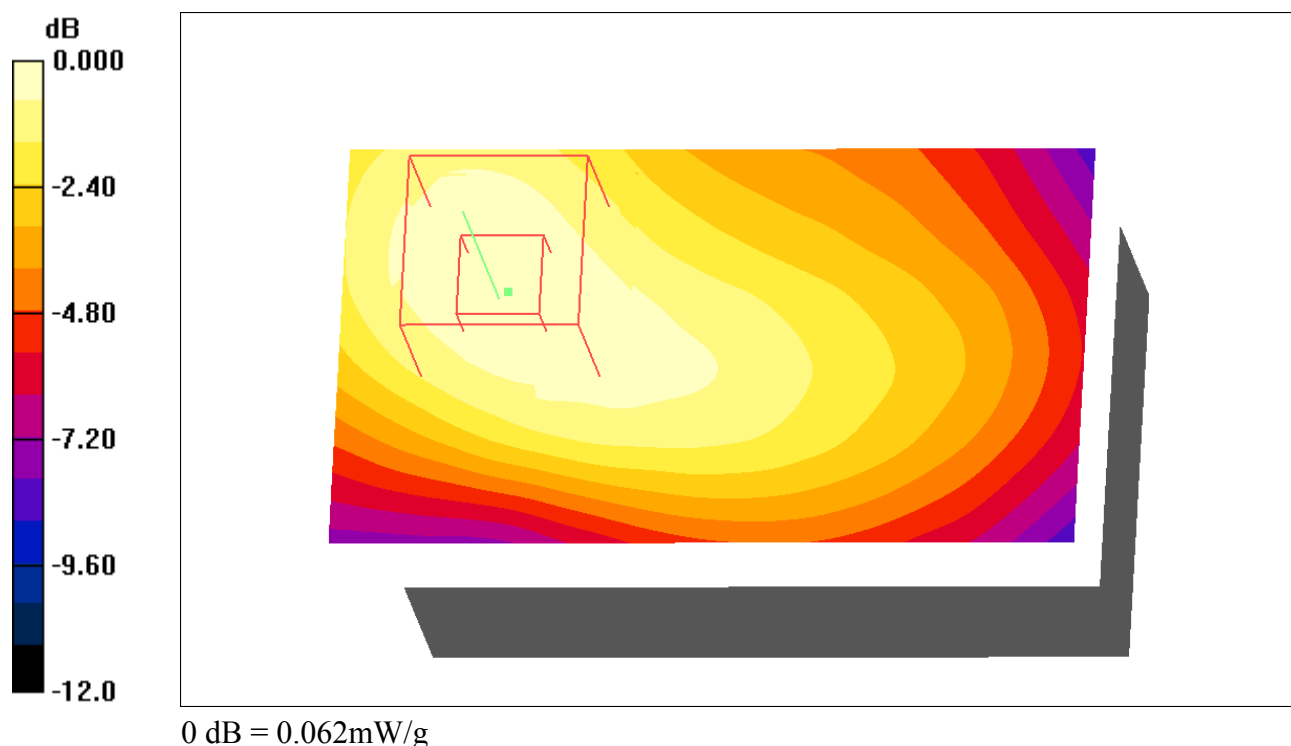



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson Ltd**

Certificate No: **ET3-1569_Jan07**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN: 1569**

Calibration procedure(s) **QA-CAL-01-V5
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 16, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Nils Kuster	Quality Manager	

Issued: January 16, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1569

Manufactured:	May 19, 2001
Last calibrated:	March 16, 2006
Recalibrated:	January 16, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1569

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.79 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	95 mV
NormY	2.08 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95 mV
NormZ	1.91 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **900 MHz** **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	7.2	3.9
SAR _{be} [%]	With Correction Algorithm	0.1	0.1

TSL **1750 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	6.2	3.7
SAR _{be} [%]	With Correction Algorithm	0.1	0.3

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

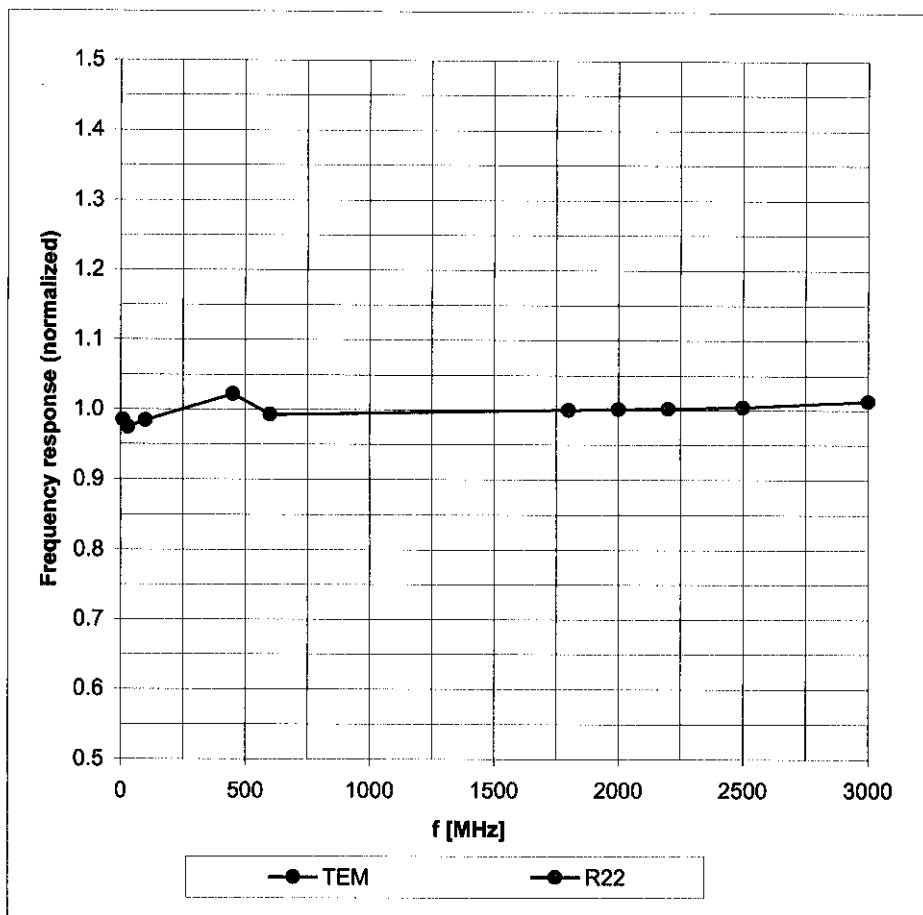


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

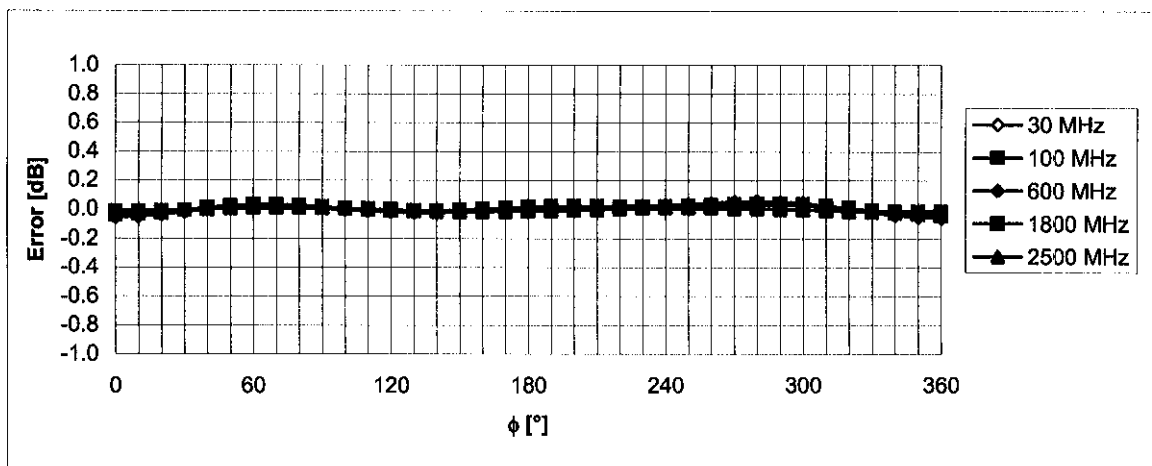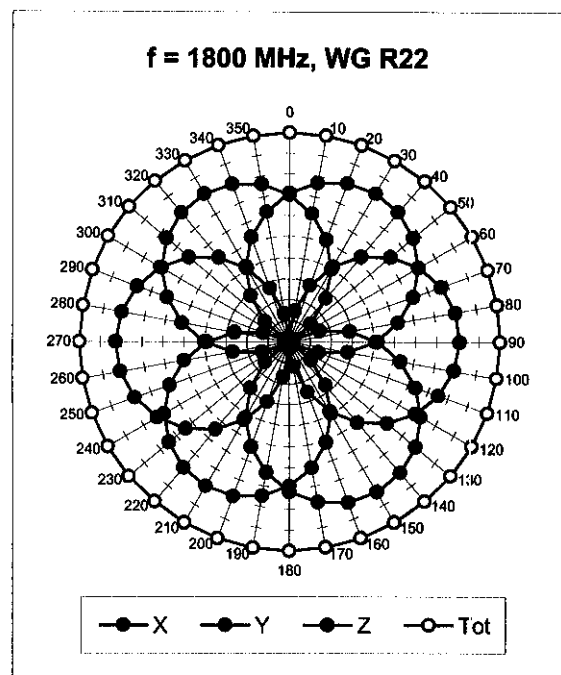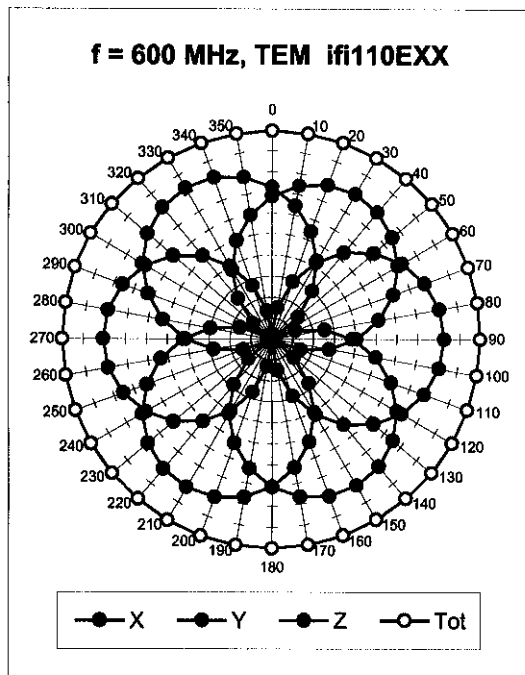



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

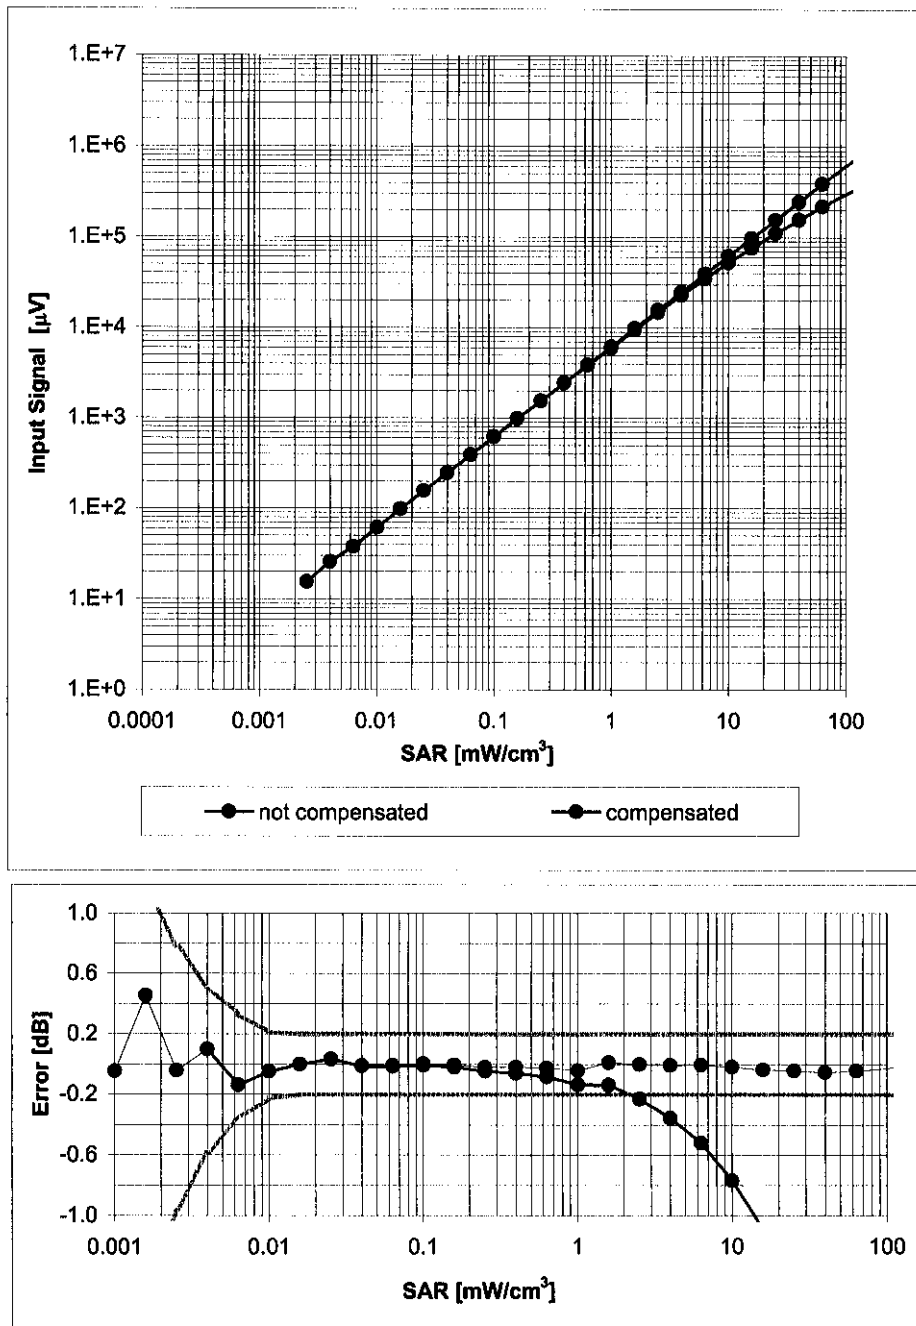

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

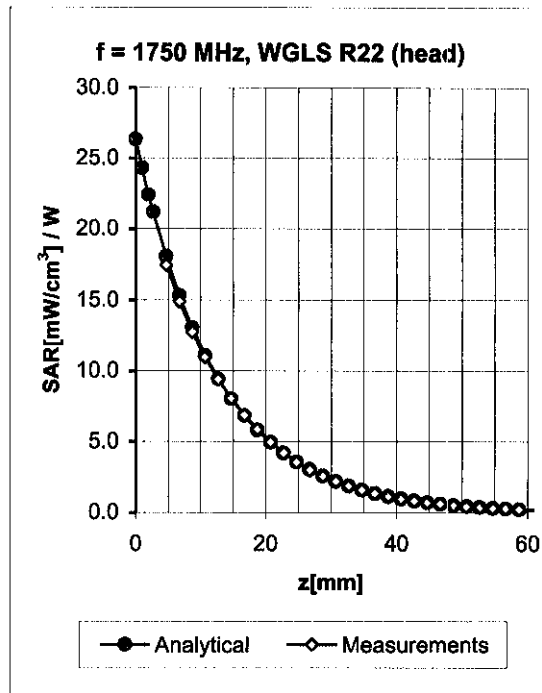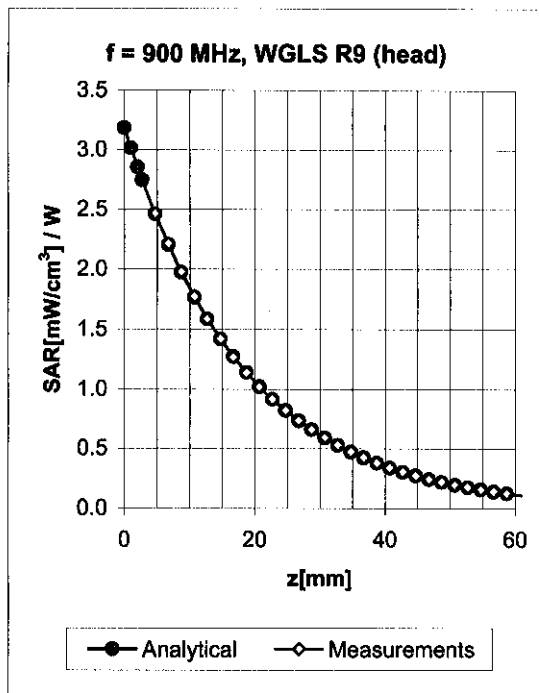


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.27	2.56	6.89	± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.28	2.66	6.85	± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.44	2.88	5.47	± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.48	2.69	5.33	± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.51	2.39	4.72	± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.25	2.73	6.94	± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.28	2.77	6.57	± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.52	2.90	4.96	± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.62	2.56	4.79	± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.52	1.97	4.17	± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

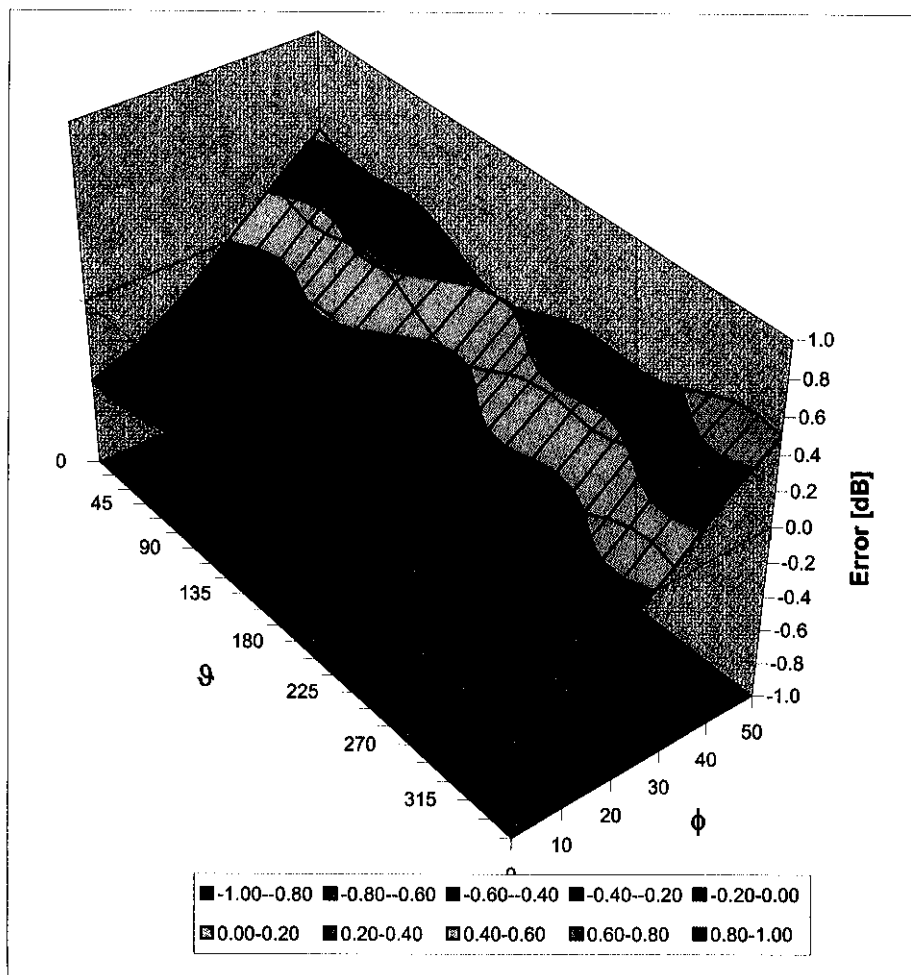

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson Lund**

Certificate No: **D835V2-484_Jan07**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 484**

Calibration procedure(s) **QA CAL-05 v6
 Calibration procedure for dipole validation kits**

Calibration date: **January 15, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Power sensor HP 8481A	US37292783	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ET3DV6 (HF)	SN 1507	19-Oct-06 (SPEAG, No. ET3-1507_Oct06)	Oct-07
DAE4	SN 907	20-Jul-06 (SPEAG, No. DAE4-907_Jul06)	Jul-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Polovic	Technical Manager	

Issued: January 16, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 %	0.88 mho/m ± 6 %
Head TSL temperature during test	(22.1 ± 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.31 mW / g
SAR normalized	normalized to 1W	9.24 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.20 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.51 mW / g
SAR normalized	normalized to 1W	6.04 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.00 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	1.01 mho/m ± 6 %
Body TSL temperature during test	(21.9 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	250 mW input power	2.47 mW / g
SAR normalized	normalized to 1W	9.88 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	9.48 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 mW / g
SAR normalized	normalized to 1W	6.48 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	6.29 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.4 Ω - 3.2 j Ω
Return Loss	- 28.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.2 Ω - 4.8 j Ω
Return Loss	- 25.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.395 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 23, 2003

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 484

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(6.09, 6.09, 6.09); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 20.07.2006
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.47 mW/g

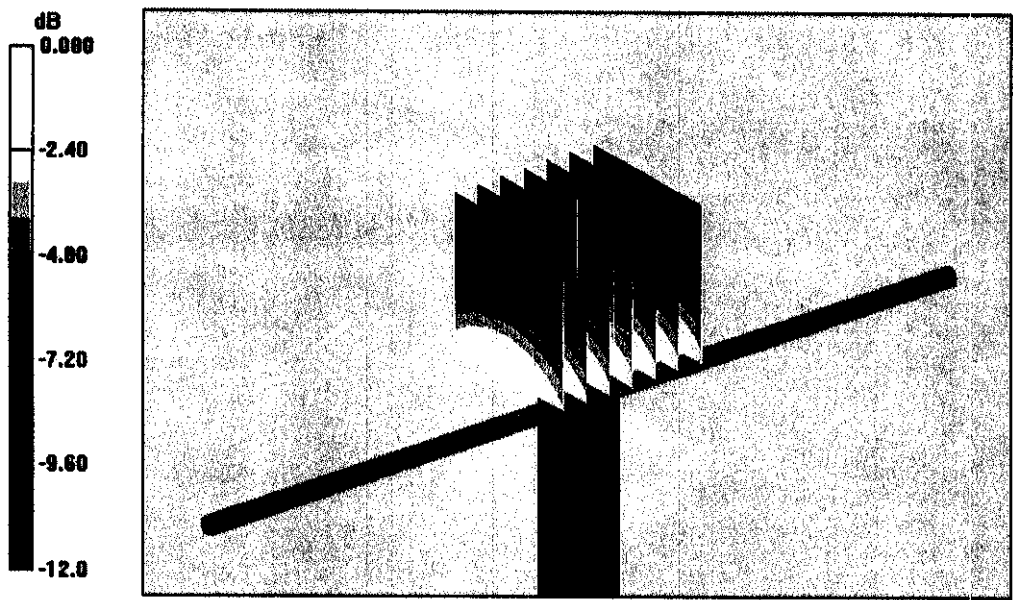


Impedance Measurement Plot for Head TSL

8 Jan 2007 11:17:02

CH1 S11 1 U FS 1i 52.436 Ω -3.2129 Ω 59.325 pF 835.000 000 MHz

*
Del
Cor

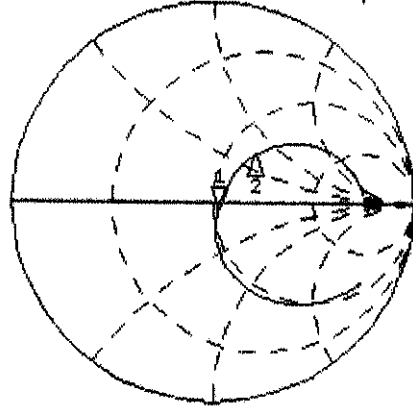

CH1 Markers
2i 65.203 Ω
33.645 Ω
900.000 MHz

Avg
16


↑

CH2 S11 L00 5 dB/REF -20 dB 1i-28.095 dB 835.000 000 MHz

Cor

Avg
16

↑

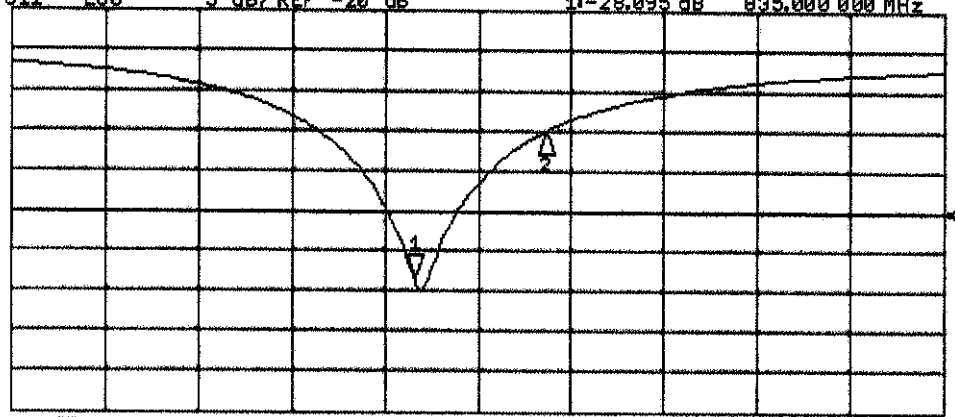

CH2 Markers
2i-10.240 dB
900.000 MHz

START 635.000 000 MHz STOP 1 1000.000 000 MHz

Test Laboratory: SPEAG, Zurich, Switzerland


DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium: MSL900;
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(5.75, 5.75, 5.75); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 20.07.2006
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 53.8 V/m; Power Drift = 0.018 dB
Peak SAR (extrapolated) = 3.55 W/kg
SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g
Maximum value of SAR (measured) = 2.66 mW/g

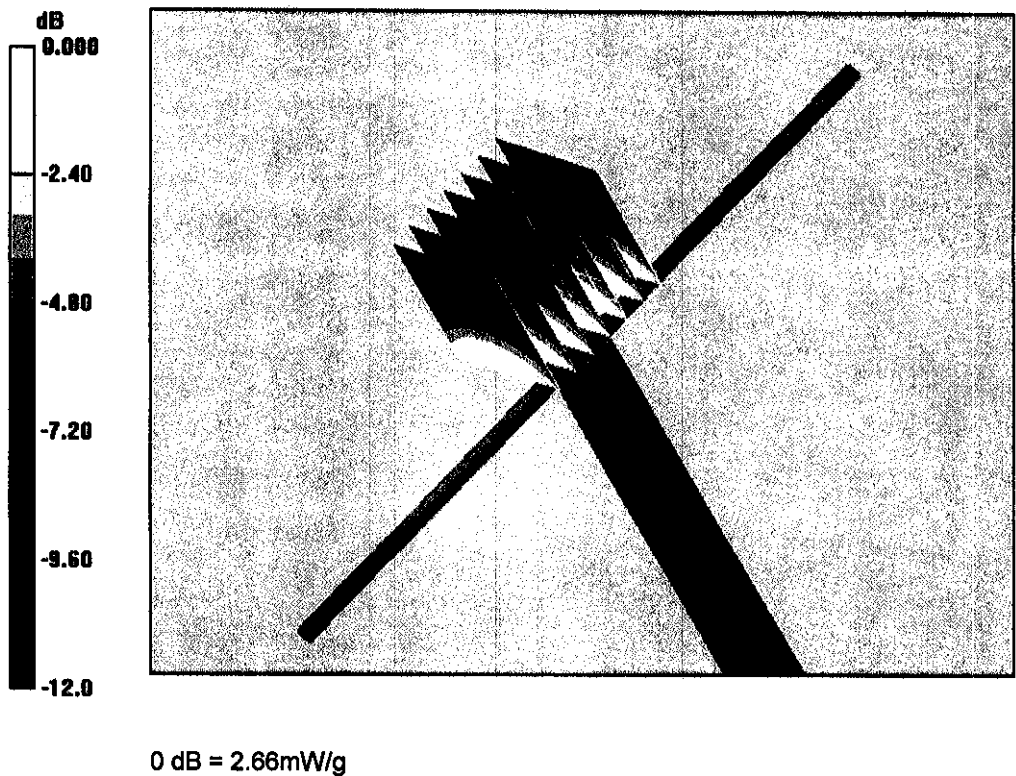


Impedance Measurement Plot for Body TSL

15 Jan 2007 13:01:41

CH1 S11 1 U FS 1: 48.154 Ω -4.8301 Ω 39.462 pF 835.000 000 MHz

*
De1
Cor

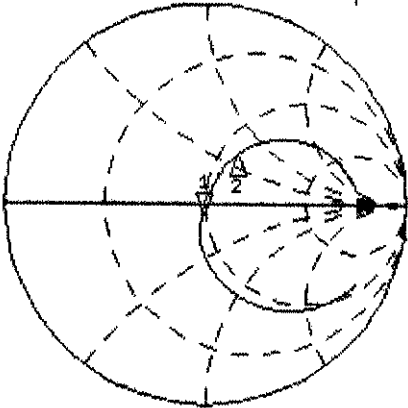


CH1 Markers
2: 58.496 Ω
31.262 Ω
900.000 MHz

Avg
16

CH2 S11 L00 5 dB/REF -20 dB 1: -25.586 dB 835.000 000 MHz

Cor
Avg
16

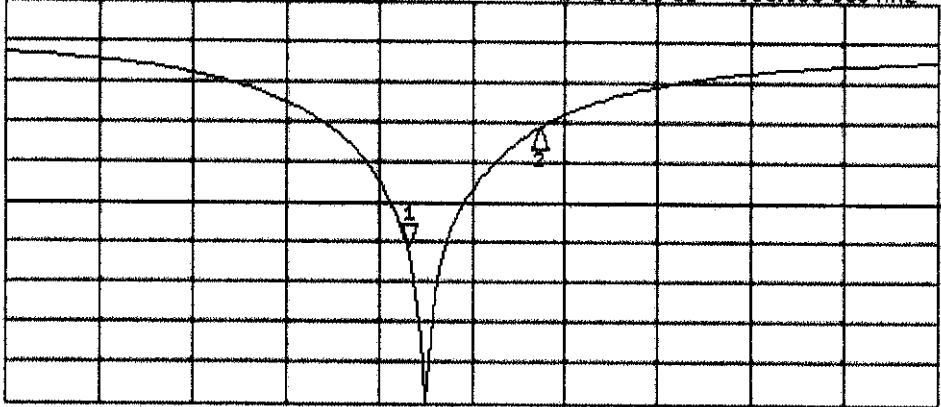

CH2 Markers
2: -10.845 dB
900.000 MHz

START 635.000 000 MHz STOP 1 100.000 000 MHz



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson Lund**

Certificate No. **D1900V2-5d002_Jan07**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d002**

Calibration procedure(s) **QA CAL-05.v6
Calibration procedure for dipole validation kits**

Calibration date: **January 16, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Power sensor HP 8481A	US37292783	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00591)	Aug-07
Reference Probe ET3DV6	SN: 1507	19-Oct-06 (SPEAG, No. ET3-1507_Oct06)	Oct-07
Reference Probe ES3DV3	SN: 3025	19-Oct-06 (SPEAG, No. ES3-3025_Oct06)	Oct-07
DAE4	SN 907	20-Jul-06 (SPEAG, No. DAE4-907_Jul06)	Jul-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by: **Name: Marcel Fahr, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Katja Pokovic, Function: Technical Manager, Signature: [Signature]**

Issued: January 17, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.8 $\pm$ 6 %	1.43 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.0 $\pm$ 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	9.61 mW / g
SAR normalized	normalized to 1W	38.4 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	37.4 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.04 mW / g
SAR normalized	normalized to 1W	20.2 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	19.8 mW / g $\pm$ 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.9 ± 6 %	1.55 mho/m ± 6 %
Body TSL temperature during test	(21.1 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.94 mW / g
SAR normalized	normalized to 1W	39.8 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	38.6 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.24 mW / g
SAR normalized	normalized to 1W	21.0 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	20.6 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$51.8 \Omega - 0.3 j\Omega$
Return Loss	- 34.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.2 \Omega + 2.3 j\Omega$
Return Loss	- 30.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.177 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 14, 2002

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;


Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.97, 4.97, 4.97); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 20.07.2006
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

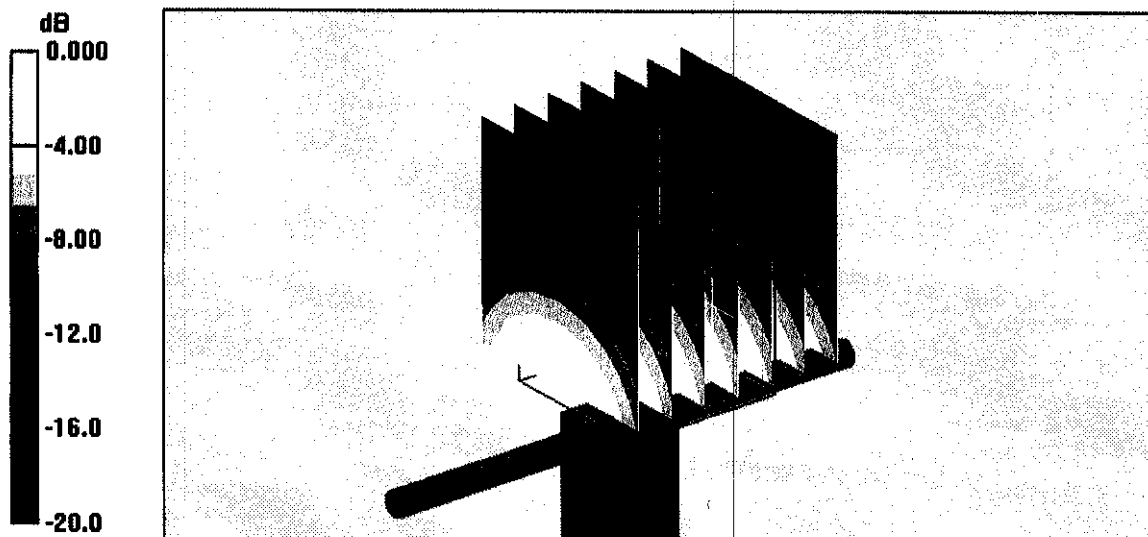Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 91.7 V/m ; Power Drift = 0.033 dB Peak SAR (extrapolated) = 17.0 W/kg **SAR(1 g) = 9.61 mW/g ; SAR(10 g) = 5.04 mW/g** Maximum value of SAR (measured) = 11.0 mW/g 0 dB = 11.0 mW/g

Impedance Measurement Plot for Head TSL


9 Jan 2007 11:53:45
CH1 S11 1 U FS 1: 51.803 Ω -298.83 m Ω 280.31 pF 1 900.000 000 MHz

*
De1

CA

Avg
16

↑

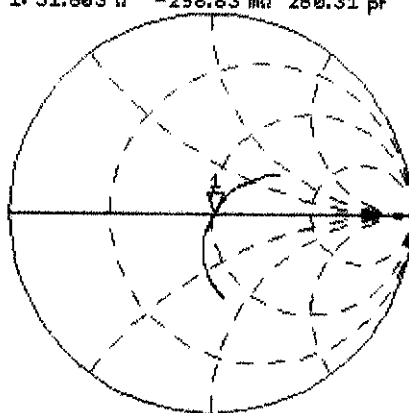


CH2 S11 LOG 4 dB/REF -20 dB 11-34.919 dB 1 900.000 000 MHz

CA

Avg
16

↑

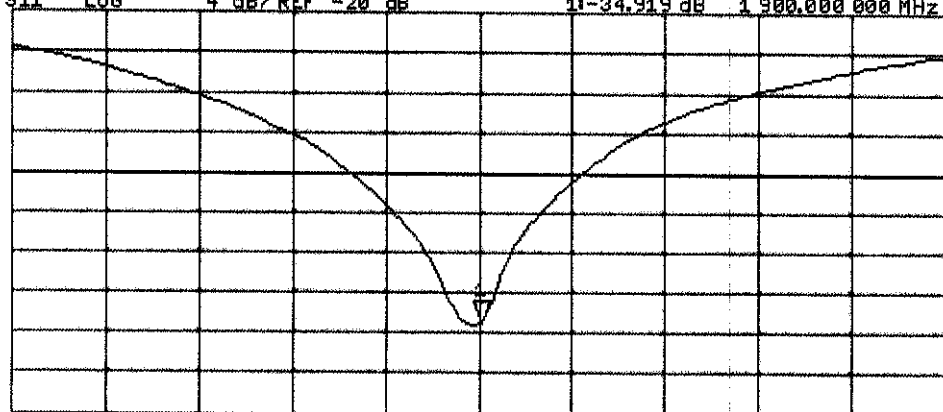

CENTER 1 900.000 000 MHz

SPAN 400.000 000 MHz

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.43, 4.43, 4.43); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 20.07.2006
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172


Pin = 250 mW; d = 10 mm 2/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 85.8 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.94 mW/g; SAR(10 g) = 5.24 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

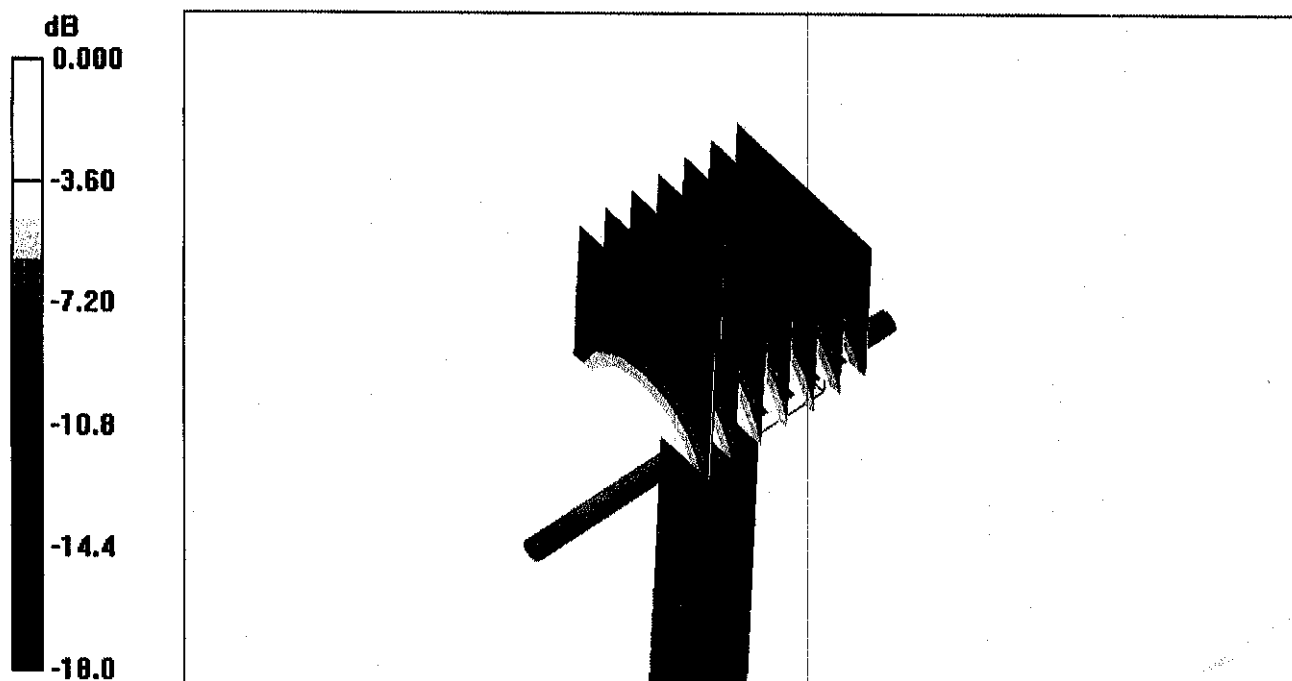

0 dB = 11.3mW/g

Impedance Measurement Plot for Body TSL

16 Jan 2007 12:04:42
 CH1 S11 1 U FS 2: 48.154 Ω 2.2793 Ω 190.93 pF 1 900.000 000 MHz

