



Prepared (also subject responsible if other)

Johanna Lassvik (23051153)

Approved

Johanna Lassvik (23051153)

Checked

Company Internal

MARKING DRAWING LABEL CONTENT

No.

1203-7925

Date

2008-01-22

Rev

4

Reference

2State: Released

Approved according to 000 21–LXE 107 42/1

Label Content Specification Sofia K850a AT&T

1 General information

Mobile Phone label part no	1200-2834
Bar code	• Standard: according to Ericsson corporate standard 102 01–109 Uen • Print quality: C, according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01–1003 Uen • Quiet zone: No bar codes are allowed to be closer to a label edge than 2 mm!
Text	If applicable, or nothing else specified, Zebra printer Scaleable Smooth Font CG Triumvirate Bold Condensed is imposed. When needed, the text is adjusted to fit the label.
Coordinates	“(x/y)” under each line number specifies the bottom / left alignment for text, graphics and bar codes, x is measured vertically, and y horizontally from the upper left corner of the label (landscape format), both in mm. When needed, the alignment is adjusted to fit the label.



Prepared (also subject responsible if other)

Johanna Lassvik (23051153)

Approved

Johanna Lassvik (23051153)

Checked

Company Internal

MARKING DRAWING LABEL CONTENT

No.

1203-7925

Date

2008-01-22

Rev

4

Reference

2State: Released

2 Printing information

	Content	Format
Line 1 (7,5/1,0)	"FCC ID: PY7A3252012 "	Text, height 1,2 mm
Line 2 (10,0/1,7)	Line 2a in bar code. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
Line 3a (11,3/1,0)	Supplier's identification for trace-ability of the telephone, as desired by supplier (e.g. "S/N: nnn...." for serial number).	Text, height 1,2 mm. Defined by supplier.
Line 3b (11,3/14,0)	Actual electronic serial number (IMEI) of the Mobile Phone, "00000000-000000-0"	Text, height 1,2 mm. In the format TAC-SNR-CD. TAC and SNR derived from pos 500 in BOM. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16.
Line 4 (13,9/2,5)	Line 2b in bar code (only actual number, without data identifier).	Bar code, height 2,0 mm. Code 128 symbology, code C subset. If uneven number of digits, code B subset shall be used for the last digit.
Line 5a (15,4/1,0)	"TYPE: AAD-3252012-BV"	Text, height 1,2 mm.
Line 5b (15,4/20,5)	HW & SW identification field, if applicable; "FG"	Text, height 1,2 mm. According to Type-testing report in BOM pos 1C.
Line 6a (17,2/1,0)	Repair week, if applicable. "Ry"W'ww" (y = year, ww = week)	Text, height 1,2 mm.
Line 6b (17,8/11,0)	Line 6b in barcode.	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
Line 7a (19,0/1,0)	Product number without revision of the Sales Item in which the phone is packed, if applicable. "SI XXXX-XXXX"	Text, height 1,2 mm.
Line 7b (19,0/11,0)	Production week (flash), "yy"W'ww" (yy = year, ww = week)	Text, height 1,2 mm.
Line 7c (19,0/19,2)	"SKU: 64762"	Text, height 1,2 mm.
Line 8a (21,5/1,0)	Location code of where the phone is flashed, if applicable, "FFF"	Text, height 1,2 mm.
Line 8b (21,6/11,0)	Line 6c in barcode (only actual number, without data identifier "SKU:")	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
Line 9a (23,4/1,0)	Model Name "K850a"	Text, height 1,2 mm.
Line 9b (23,4/19,0)	Marking of origin: "Xxx"= actual country of production of the included telephone, in English.	Text, height 1,2 mm.

Prepared (also subject responsible if other)

Johanna Lassvik (23051153)

Approved

Johanna Lassvik (23051153)

Checked

Company Internal

MARKING DRAWING LABEL CONTENT

No.

1203-7925

Date

2008-01-22

Rev

4

Reference

2State: Released

3 Layout

The conceptual picture (for Zebra 90XiII printer, or equivalent) should not be considered as specifications, but as an additional help for setting up the label.

3.1 Conceptual picture

No information is allowed to be printed here.	
FCC ID: PY7A3252012	
	
S/N: XXXABC1234	00000000- 000000- 0
	
TYPE: AAD - 3252012 - BV	FG
Rywwrr	
SI XXXX-XXXX	yyWwww SKU: 00000
FFF	
K850a	Made in Xxx

double underlined = major changes since last revision.

Prepared by
23051153 Johanna Lassvik
Contents responsible if other than preparer

Document number
1204-9508
Date
2008-01-24
Remarks

Revision
2
State
Preliminary



This document is managed in Space

Approved by
23051153 (Johanna lassvik)

This is The Label Tray for K850a with printed generic information

K850a
Typenumber: AAD-3252012-BV
FCC ID: PY7A3252012
IC: 4170B-A3252012

Sofia K850a generic information

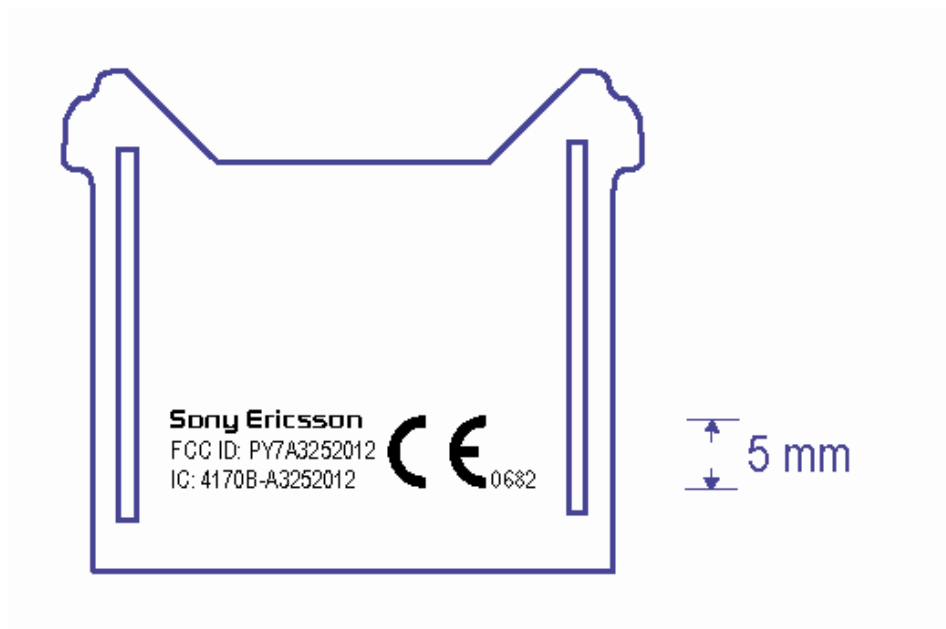

Conceptual image:
Shows what is up and down on the labeltray.

Instructions:

The blue lines are for reference only and not to be printed (it is the outer shape of the label tray)

The information must be positioned on the bottom part of the labeltray. It is recommended to position the information as on the image.

The reason that the information must be positioned on the bottom part of the labeltray is that it must be easy to read it when the labeltray is mounted into the phone.