

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-530_01.doc	Date of Report:	17-Mar-2010
Number of pages:	38	Customer's Contact person:	Jari Ojala
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-530 / Battery BP-4L, AC charger AC-8E, Headset WH-601		
FCC ID:	PYARM-530X	IC:	661V-RM530
Supplement reports:	The results in this report are based on results from report FCC15C_RM-529_03.doc		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Christian Andersen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	03-Feb-2010
Testing completed	17-Feb-2010
The customer's contact person	Jari Ojala
Test Plan referred to	T:\Projects\RM-529\TestPlan_RS\RS_testplan_RM-529_CR_HW0896.xls
Notes	-
Document name	FCC15C_RM-529_03.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-529	004401107741981	0896	-	021.024	42170
Phone	RM-529	004401107742070	0896	-	021.024	42167
Battery	BP-4L	3932139463B61034472;0670519	-	-	-	42168
AC charger	AC-8E	110333830410030833;0675387	-	-	-	41842
Headset	WH-601	069478293551A600247	-	-	-	42169

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.

The test results of PYARM-529X are re-used for certification of the PYARM-530X. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	10
4.1. Test method and limit	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	15
5.1. Test method and limit	15
5.2. Bluetooth Test results	16
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	19
6.1. Test method and limit	19
6.2. Bluetooth Test results	20
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	22
7.1. Test method and limit	22
7.2. Bluetooth Test results	23
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	24
8.1. Test method and limit	24
8.2. Bluetooth Test results	25
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b)).....	28
9.1. Test method and limit	28
9.2. Bluetooth Test results	29
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d)).....	31
10.1. Test method and limit	31
10.2. Bluetooth Test results	32
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	34
11.1. Test method and limit	34
11.2. Bluetooth test results	35


12.	Test Equipment	37
12.1.	Conducted measurements	37
12.2.	Radiated measurements	37

2. Test setups


2.1. Conducted RF test setup

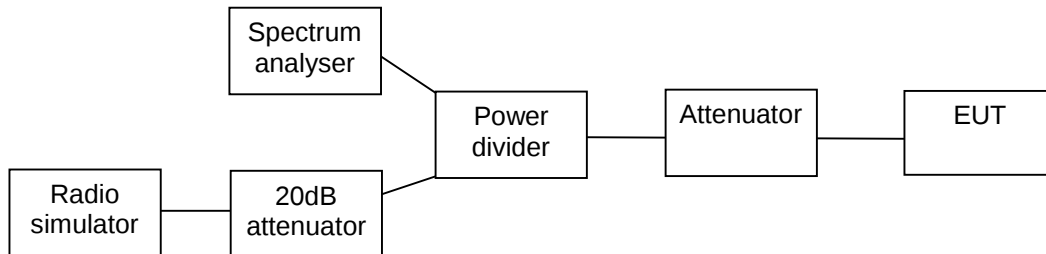

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

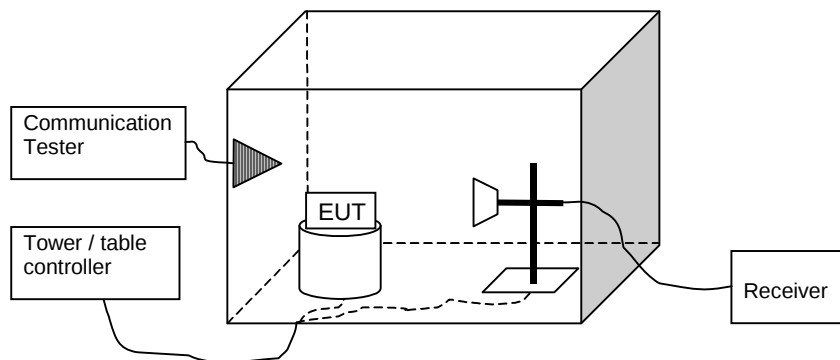

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-529 DUT 42170
Accessories with DUT numbers	BP-4L DUT 42168
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 99.2
Date of measurements	05-Feb-2010
Measured by	Jari Jantunen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-2.30	0.589	PASSED
40 / 2442	-2.10	0.617	PASSED
78 / 2480	-2.70	0.537	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

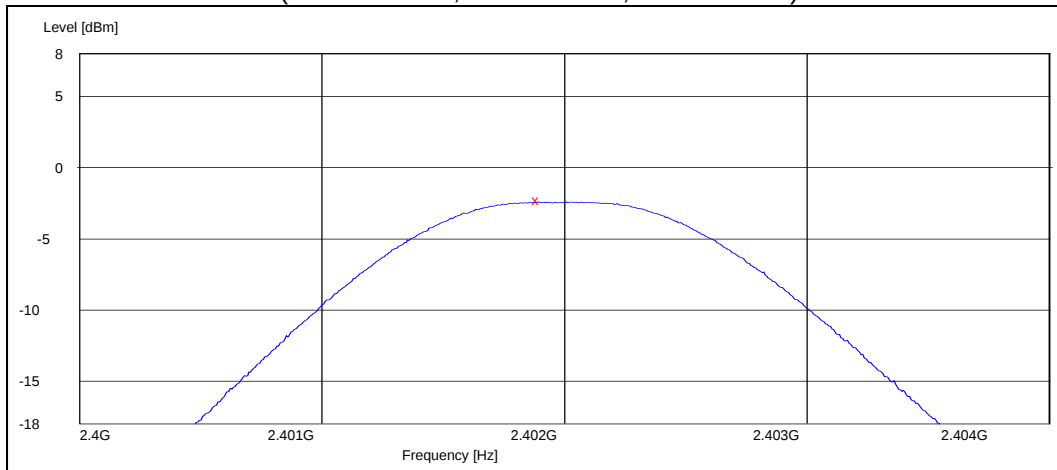

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

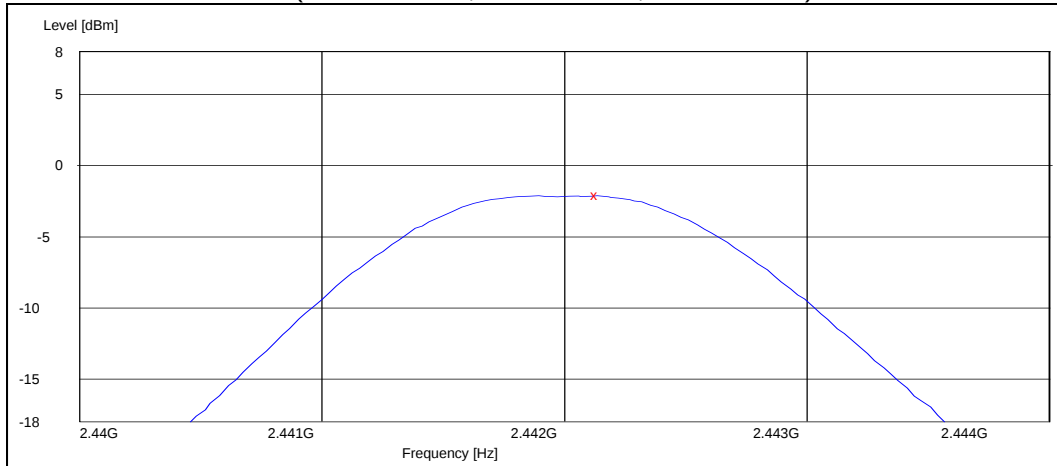


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

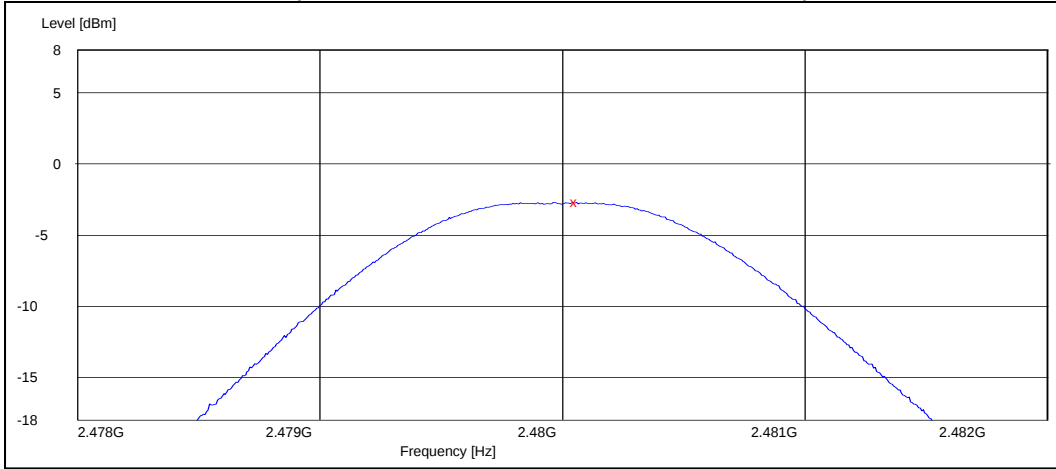


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-1.10	0.776	PASSED
40 / 2442	-0.40	0.912	PASSED
78 / 2480	-0.70	0.851	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

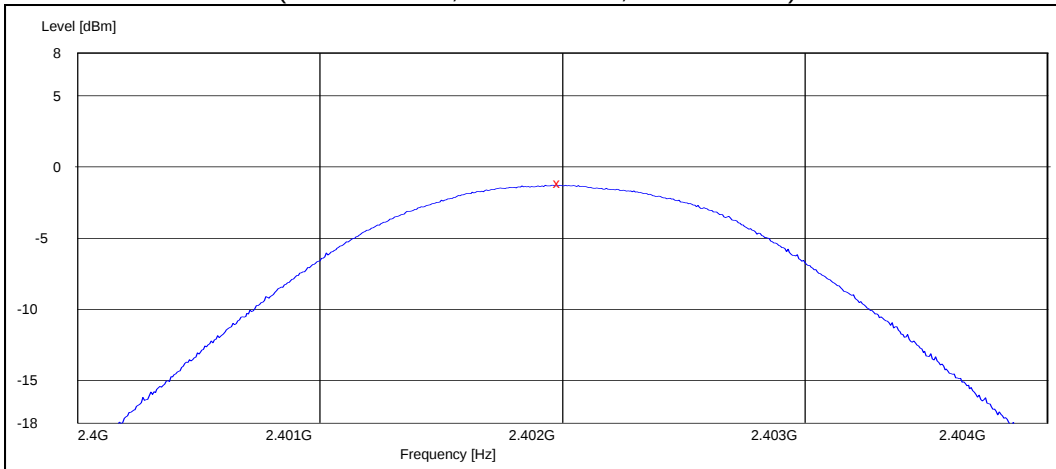

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

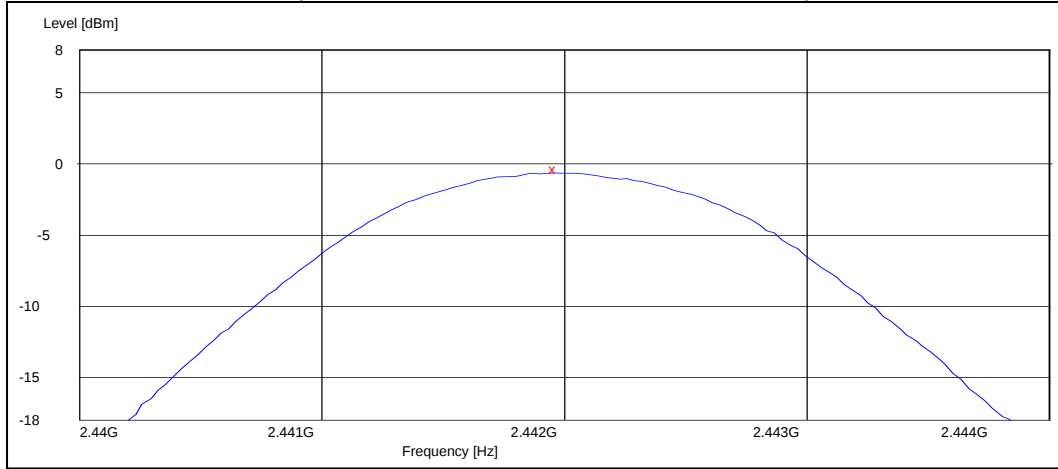

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

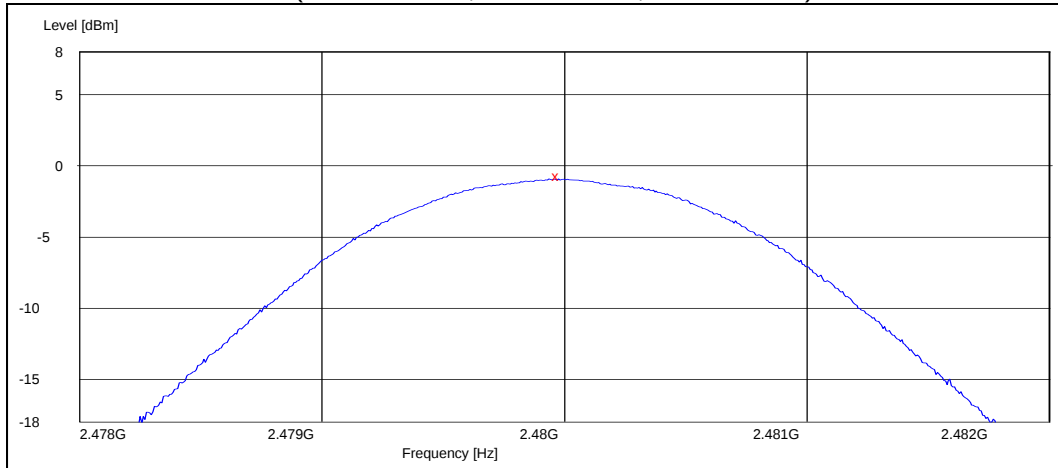

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-529 DUT42167
Accessories with DUT numbers	BP-4L DUT42168, WH-601 DUT42169, AC-8E DUT41842
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 43 / 102.4
Date of measurements	04-Feb-2010
Measured by	Hannu Söderholm

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

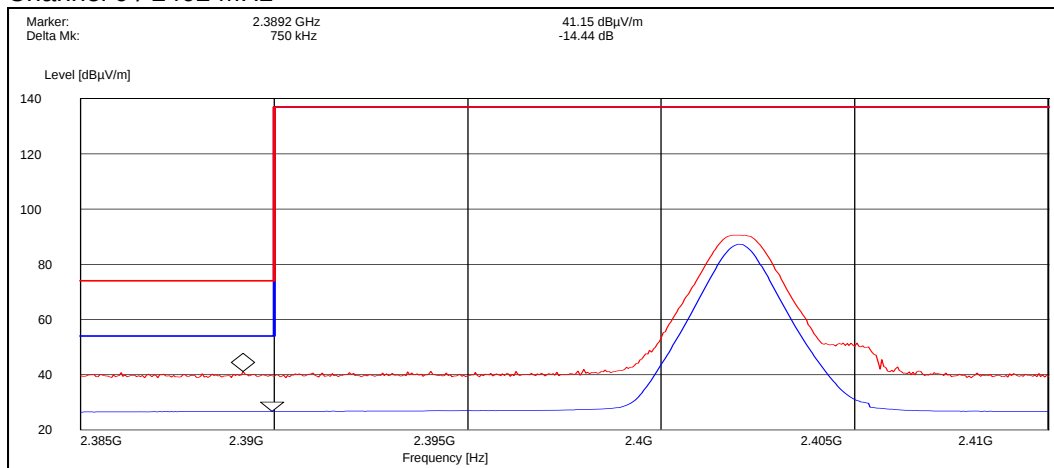


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	41.10	PASSED
Average	26.70	PASSED

Channel 78 / 2480 MHz

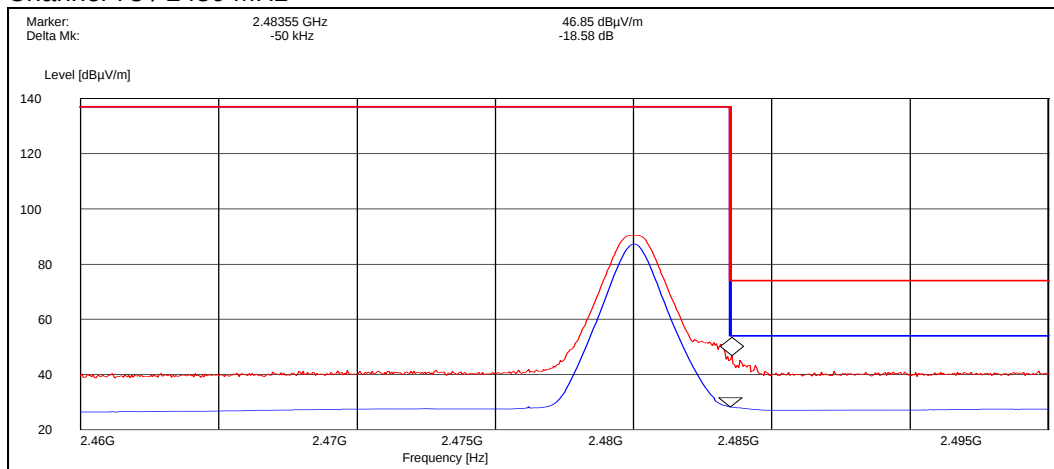


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	46.80	PASSED
Average	28.30	PASSED

Hopping on, low end

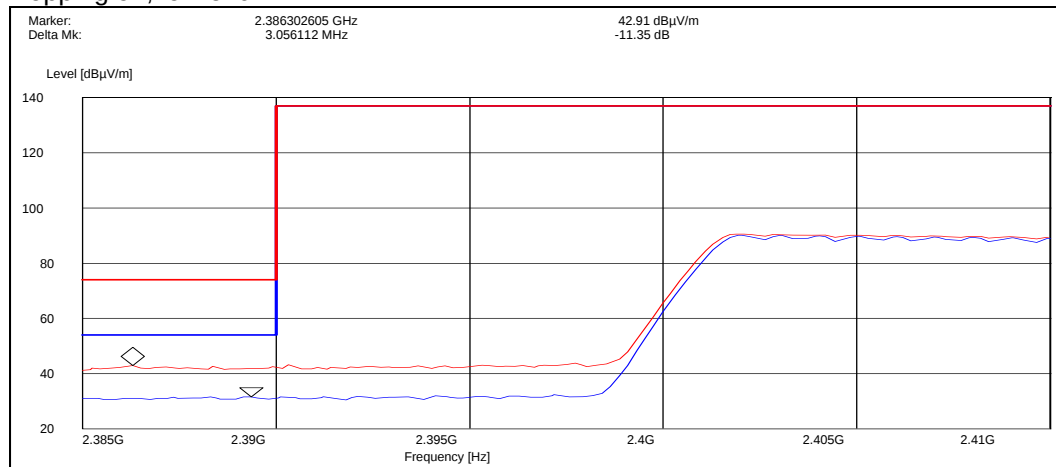

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	42.90	PASSED
Average	31.60	PASSED


Hopping on, high end

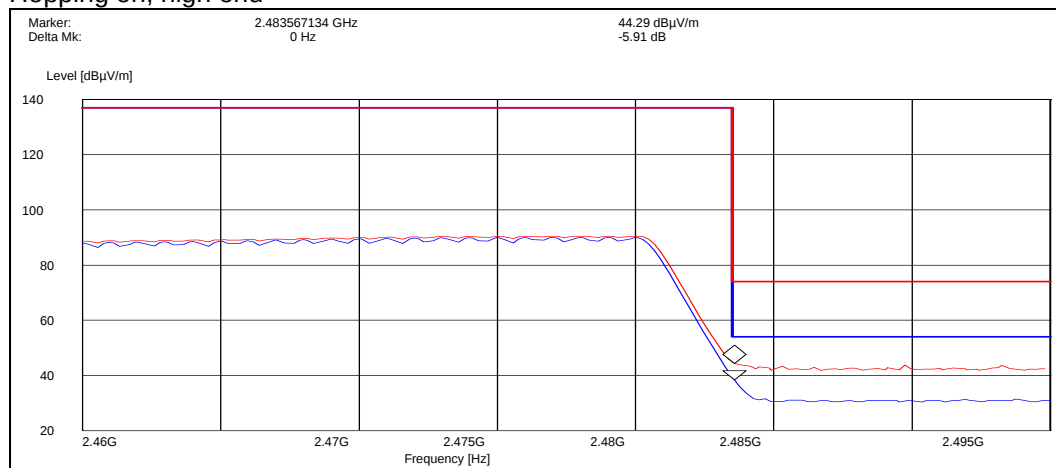

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	44.30	PASSED
Average	38.40	PASSED


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

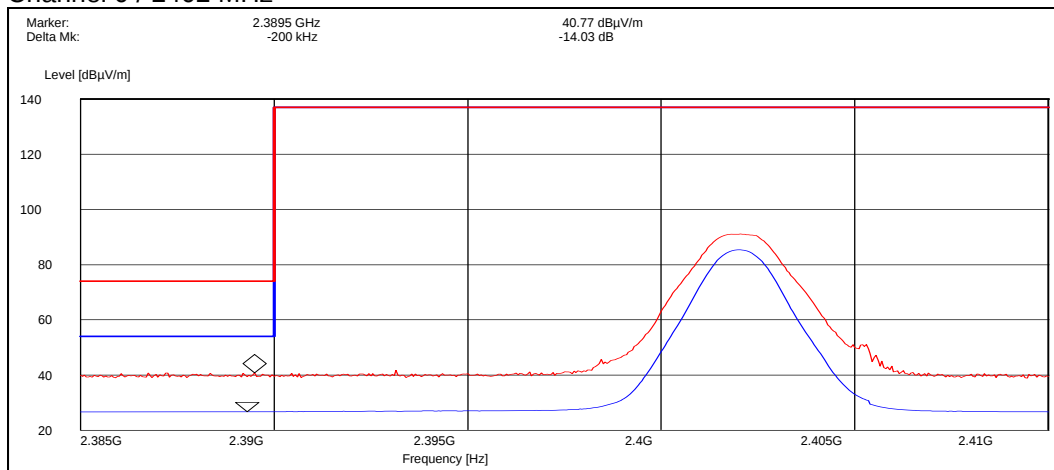


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	40.80	PASSED
Average	26.70	PASSED

Channel 78 / 2480 MHz

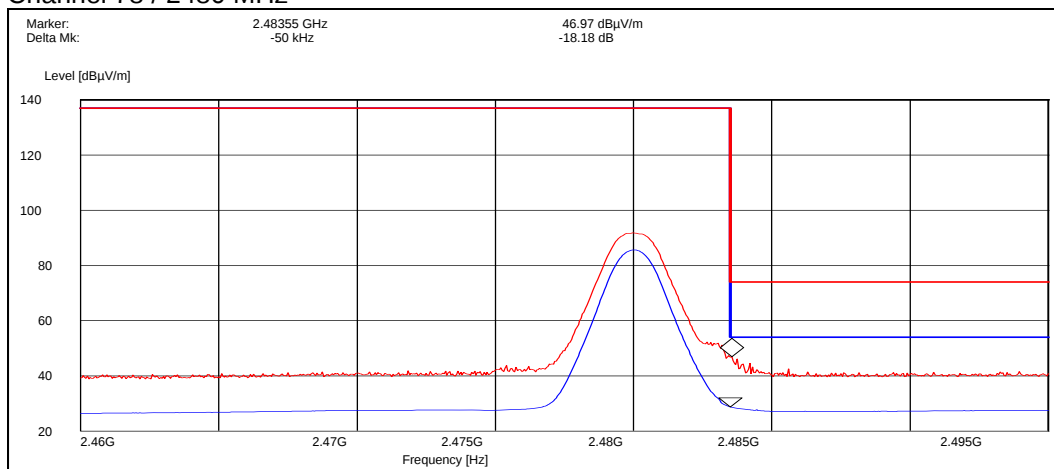


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	47.00	PASSED
Average	28.80	PASSED

Hopping on, low end

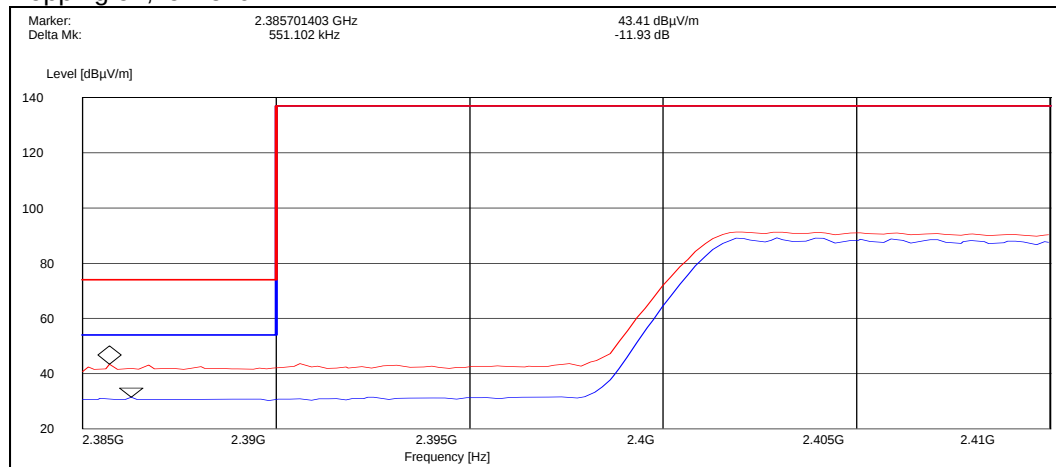

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	43.40	PASSED
Average	31.50	PASSED

Hopping on, high end

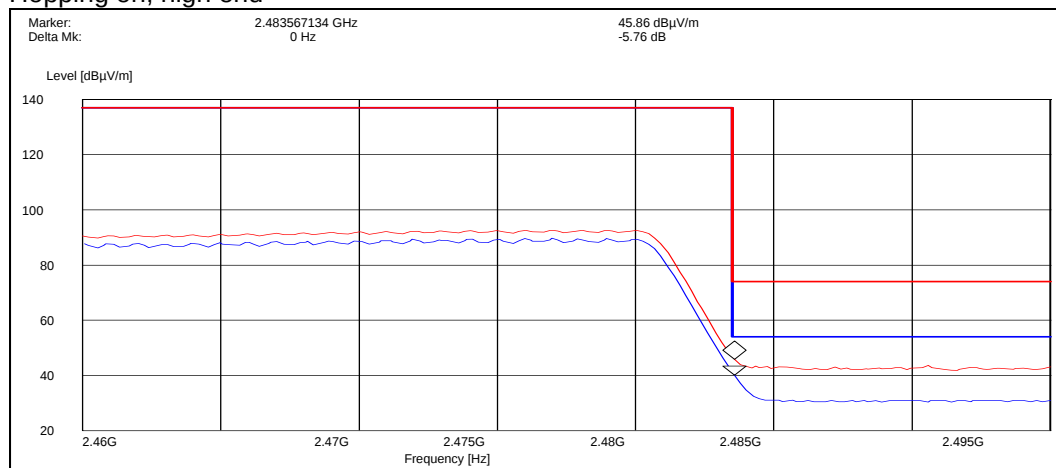

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	45.90	PASSED
Average	40.10	PASSED

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-529 DUT 42170
Accessories with DUT numbers	BP-4L DUT 42168
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 99.2
Date of measurements	05-Feb-2010
Measured by	Jari Jantunen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

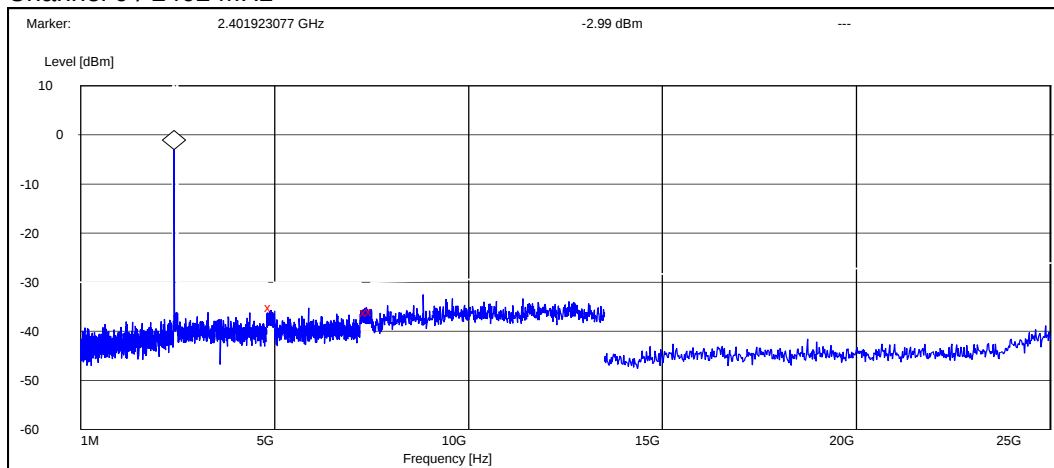

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4901.282051	-32.210113	PASSED
7369.711538	-33.110113	PASSED
7500.000000	-32.910113	PASSED


Channel 40 / 2442 MHz

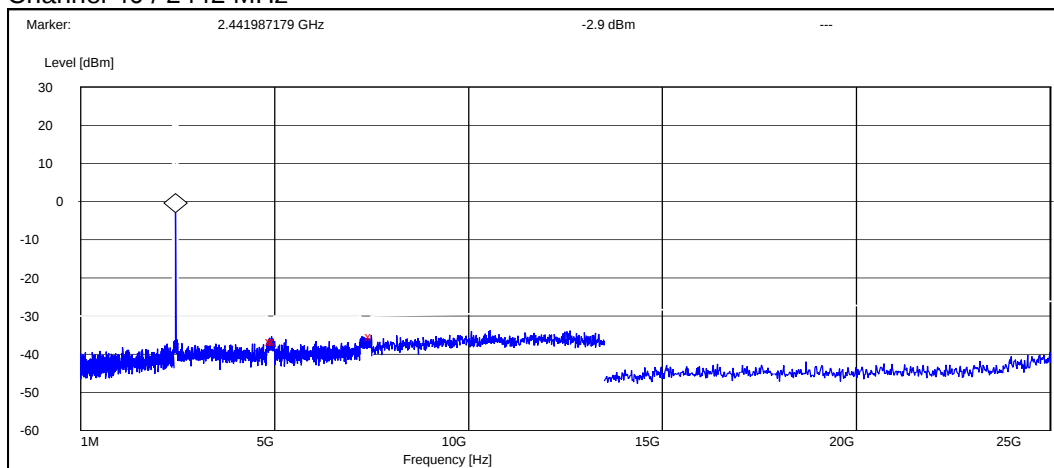

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4924.358974	-33.803777	PASSED
5000.000000	-33.703777	PASSED
7485.096154	-32.303777	PASSED

Channel 78 / 2480 MHz

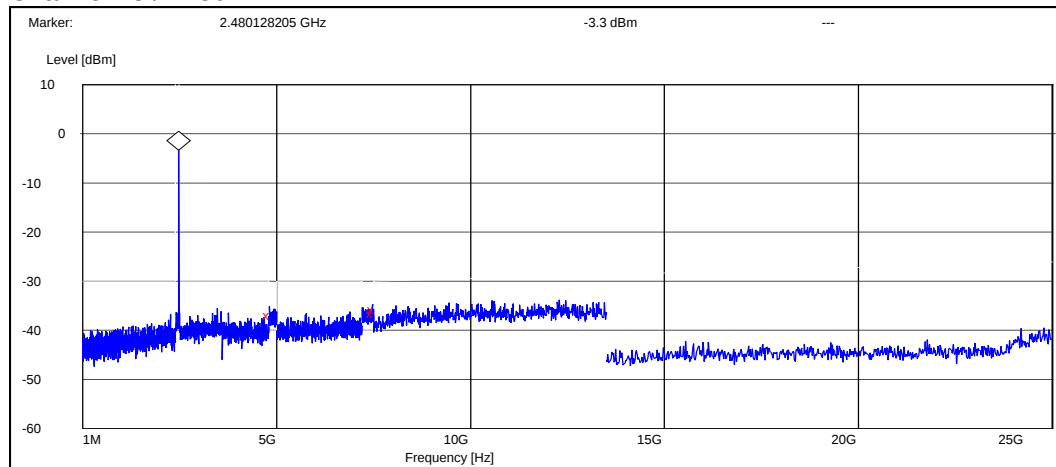


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4813.461538	-33.698701	PASSED
7475.480769	-33.198701	PASSED
7500.000000	-32.398701	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

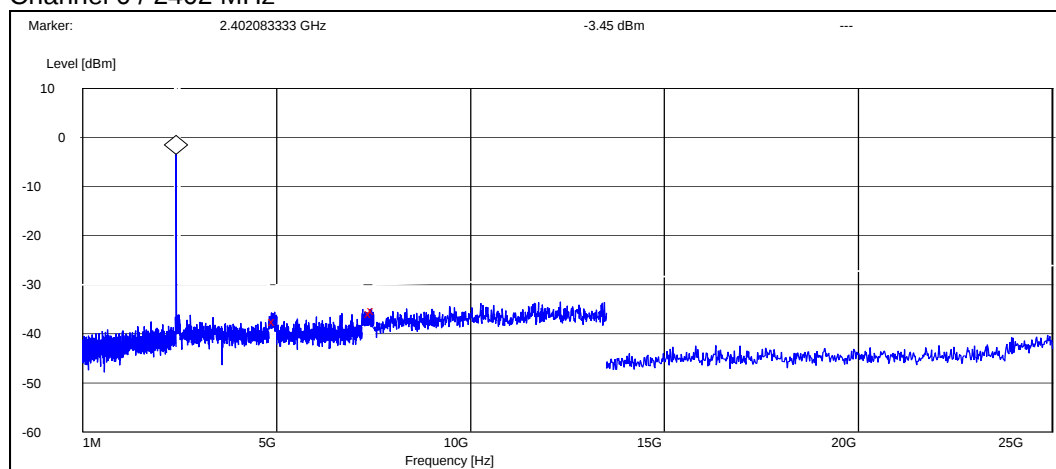

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4950.320513	-34.053401	PASSED
7436.538462	-32.353401	PASSED
7500.000000	-31.653401	PASSED


Channel 40 / 2442 MHz

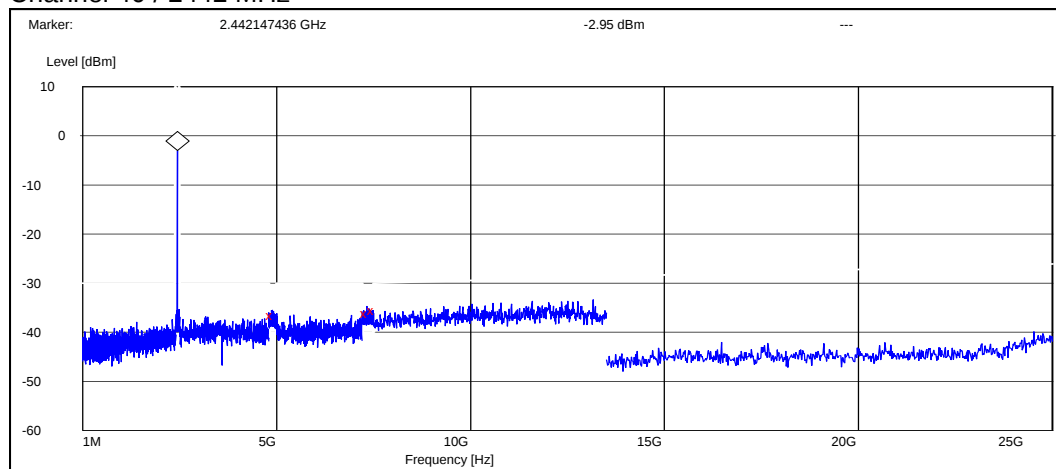

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4895.833333	-33.650154	PASSED
7329.807692	-33.150154	PASSED
7500.000000	-32.550154	PASSED

Channel 78 / 2480 MHz

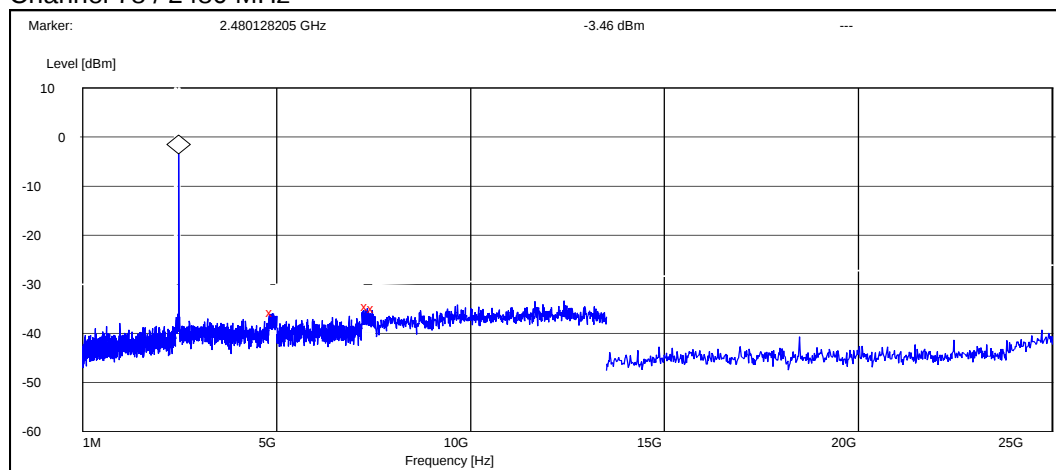

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4891.987179	-32.240010	PASSED
7341.826923	-30.940010	PASSED
7500.000000	-31.440010	PASSED

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-529 DUT42167
Accessories with DUT numbers	BP-4L DUT42168, WH-601 DUT42169, AC-8E DUT41842
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 43 / 102.4
Date of measurements	04-Feb-2010
Measured by	Hannu Söderholm

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	40.10	101.16	41.10	-1.0	HORIZONTAL	PASSED
7206.000000	42.80	138.04	40.40	2.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	27.50	23.71	28.50	-1.0	HORIZONTAL	PASSED
7206.000000	30.00	31.62	27.60	2.4	VERTICAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.800000	14.50	5.31	23.90	-9.4	HORIZONTAL	PASSED
37.735872	11.00	3.55	24.90	-13.9	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7301.605210	43.00	141.25	40.10	2.9	VERTICAL	PASSED
7314.129259	43.20	144.54	40.20	3.0	VERTICAL	PASSED
17461.427856	52.60	426.58	33.90	18.7	VERTICAL	PASSED
17895.797595	54.50	530.88	33.70	20.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7303.605210	30.20	32.36	27.30	2.9	VERTICAL	PASSED
7317.129259	30.60	33.88	27.50	3.1	VERTICAL	PASSED
17463.427856	39.60	95.50	20.90	18.7	VERTICAL	PASSED
17896.797595	41.80	123.03	21.00	20.8	VERTICAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.10	101.16	40.60	-0.5	VERTICAL	PASSED
7440.000000	42.80	138.04	39.60	3.2	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	28.00	25.12	28.50	-0.5	VERTICAL	PASSED
7440.000000	29.70	30.55	26.50	3.2	HORIZONTAL	PASSED

6.2.2 8DPSK modulation, PRBS packet type

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	40.00	100.00	41.00	-1.0	HORIZONTAL	PASSED
7206.000000	43.10	142.89	40.70	2.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	27.90	24.83	28.90	-1.0	HORIZONTAL	PASSED
7206.000000	30.00	31.62	27.60	2.4	HORIZONTAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.202405	14.50	5.31	24.10	-9.6	VERTICAL	PASSED
37.676353	11.10	3.59	25.00	-13.9	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4949.903808	40.60	107.15	41.40	-0.8	VERTICAL	PASSED
4963.933868	41.10	113.50	41.60	-0.5	HORIZONTAL	PASSED
7315.133267	43.20	144.54	40.20	3.0	HORIZONTAL	PASSED
7335.165331	42.90	139.64	40.00	2.9	VERTICAL	PASSED
7406.309619	43.20	144.54	39.90	3.3	HORIZONTAL	PASSED
17464.425852	52.80	436.52	34.10	18.7	VERTICAL	PASSED
17992.489980	55.50	595.66	34.60	20.9	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4953.903808	28.00	25.12	28.70	-0.7	VERTICAL	PASSED
7317.633267	30.50	33.50	27.40	3.1	HORIZONTAL	PASSED
7334.665331	30.20	32.36	27.30	2.9	VERTICAL	PASSED
7400.809619	30.30	32.73	26.90	3.4	HORIZONTAL	PASSED
17460.425852	39.50	94.41	20.80	18.7	VERTICAL	PASSED
17994.489980	42.20	128.82	21.30	20.9	VERTICAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	41.40	117.49	41.90	-0.5	HORIZONTAL	PASSED
7440.000000	42.50	133.35	39.30	3.2	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	28.00	25.12	28.50	-0.5	HORIZONTAL	PASSED
7440.000000	29.70	30.55	26.50	3.2	HORIZONTAL	PASSED

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-529 DUT42167
Accessories with DUT numbers	BP-4L DUT42168, AC-8E DUT41842, WH-601 DUT42169
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 99.6
Date of measurements	17-Feb-2010
Measured by	Hannu Söderholm

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

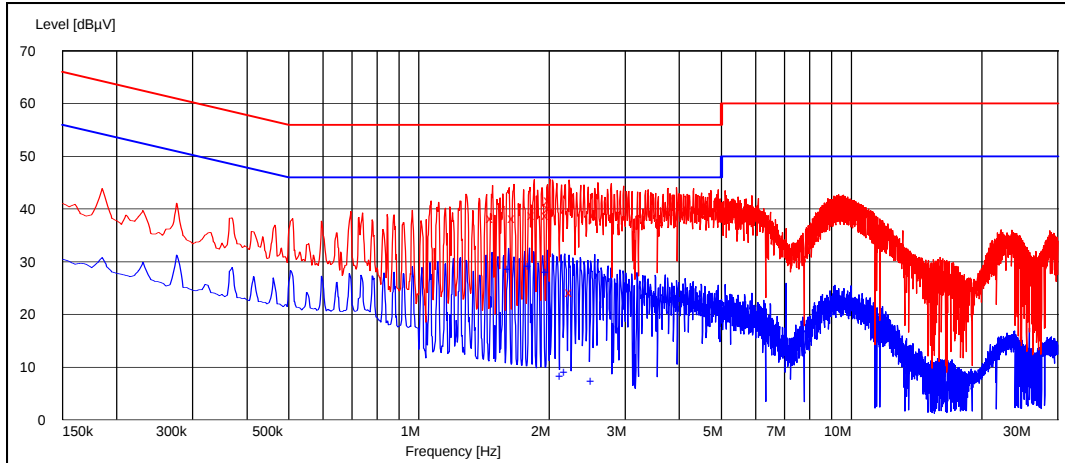

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.480000	38.20	N	PASSED
1.665000	38.20	N	PASSED
1.850000	38.80	N	PASSED
1.990000	38.90	N	PASSED
2.010000	41.80	N	PASSED
2.015000	40.20	N	PASSED
2.255000	24.20	N	PASSED
2.565000	38.90	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.620000	28.70	L1	PASSED
1.805000	29.20	L1	PASSED
1.985000	28.10	N	PASSED
2.140000	8.40	L1	PASSED
2.195000	9.10	N	PASSED
2.525000	7.30	N	PASSED

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-529 DUT 42170
Accessories with DUT numbers	BP-4L DUT 42168
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 99.2
Date of measurements	05-Feb-2010
Measured by	Jari Jantunen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	907.051	PASSED
40 / 2442	967.949	PASSED
78 / 2480	910.256	PASSED


Channel 0 / 2402 MHz

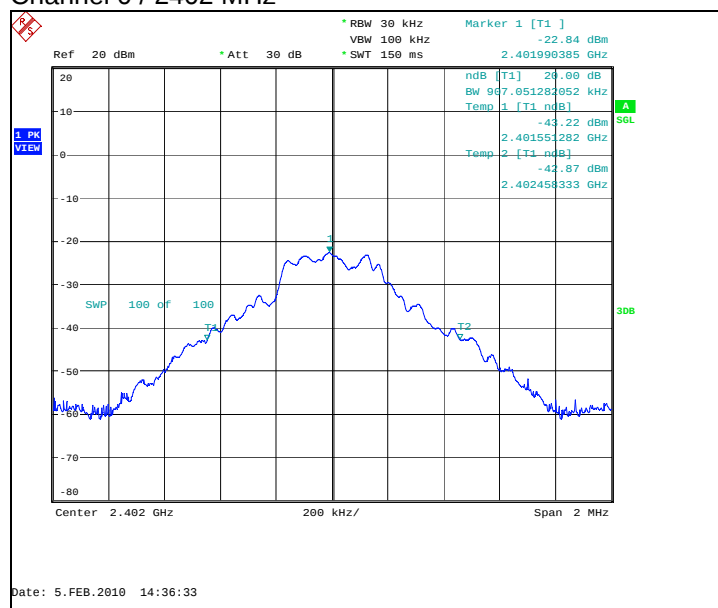

Channel 40 / 2442 MHz

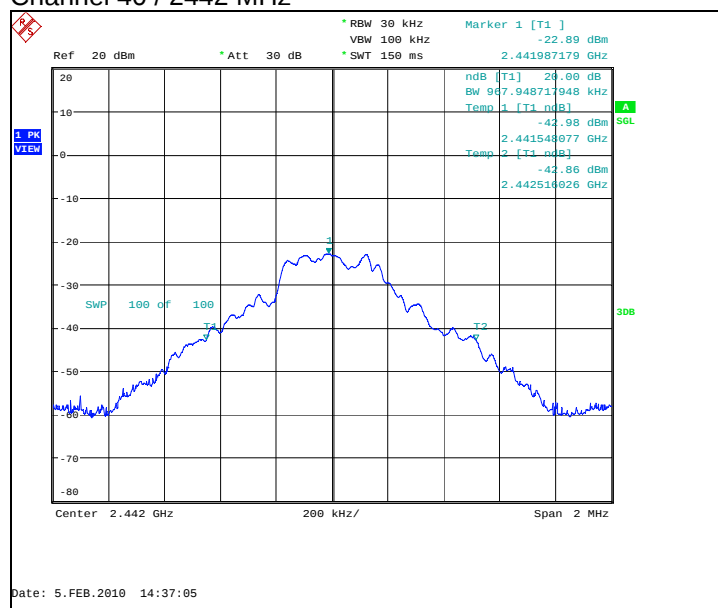


Channel 78 / 2480 MHz

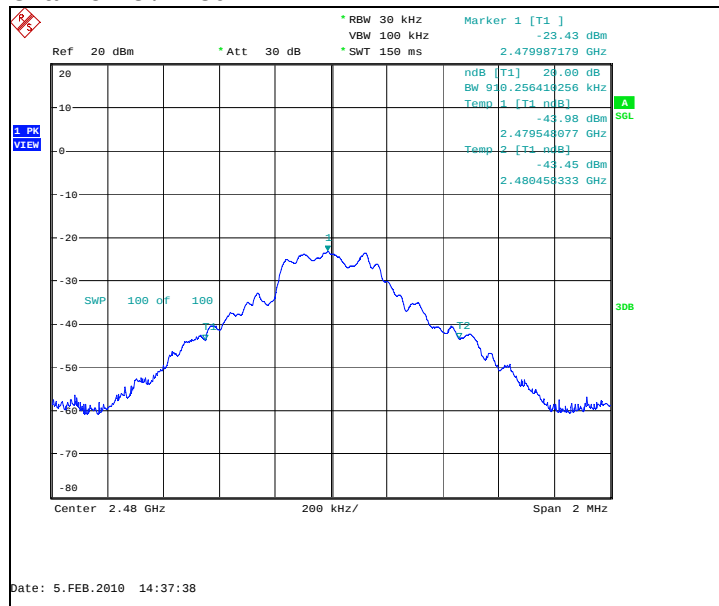


8.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1326.923	PASSED
40 / 2442	1320.513	PASSED
78 / 2480	1314.103	PASSED


Channel 0 / 2402 MHz

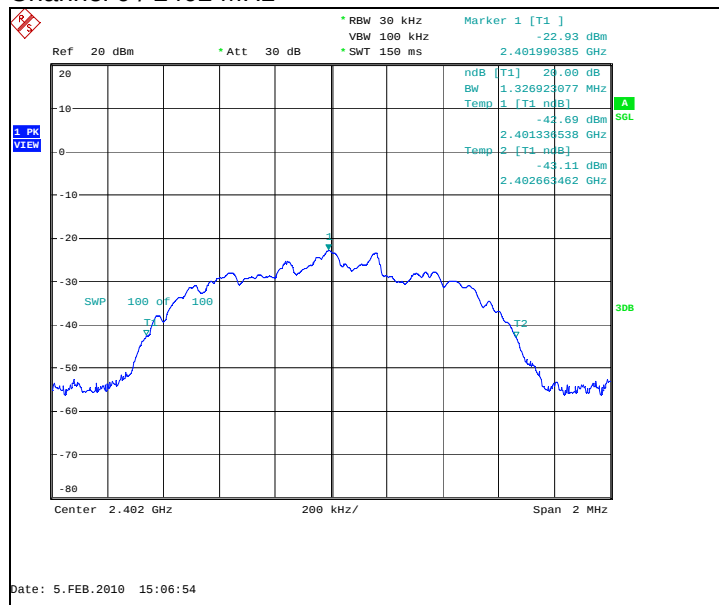

Channel 40 / 2442 MHz

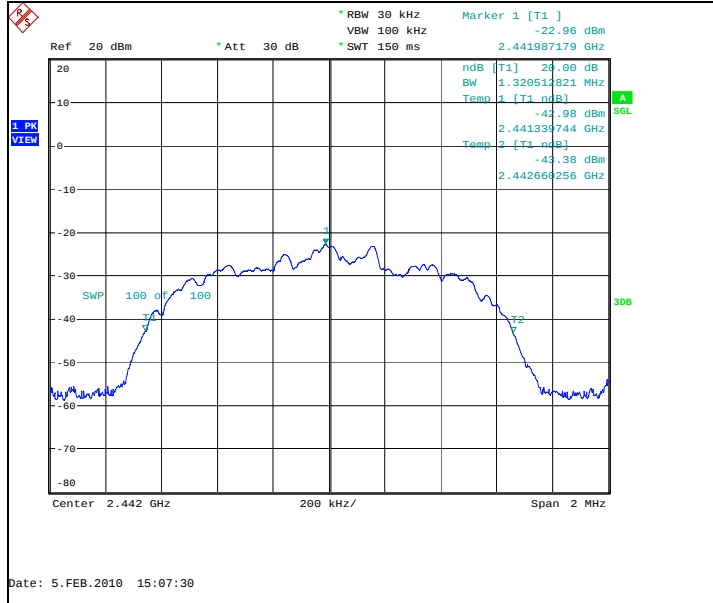

Channel 78 / 2480 MHz

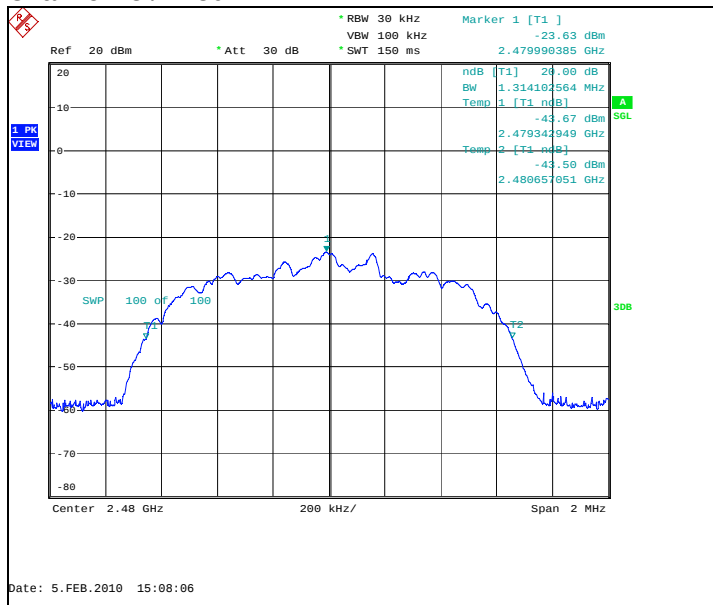

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-529 DUT 42170
Accessories with DUT numbers	BP-4L DUT 42168
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 99.2
Date of measurements	05-Feb-2010
Measured by	Jari Jantunen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1009.615	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

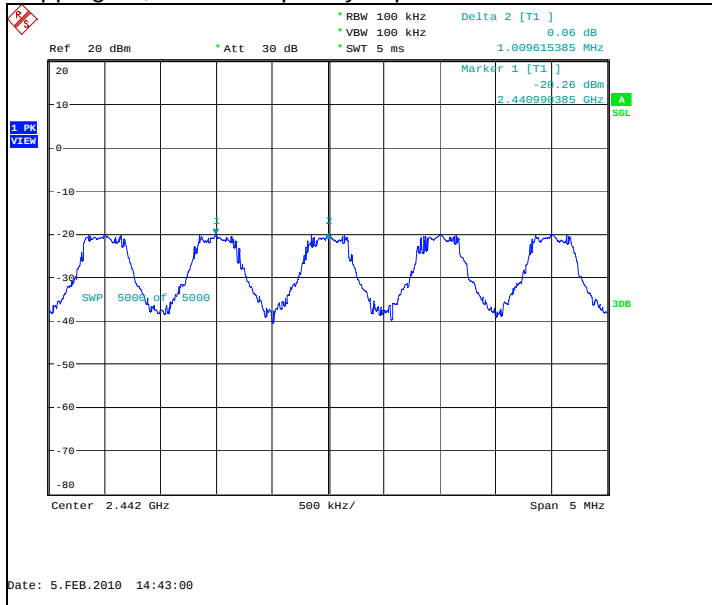

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
905.449	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

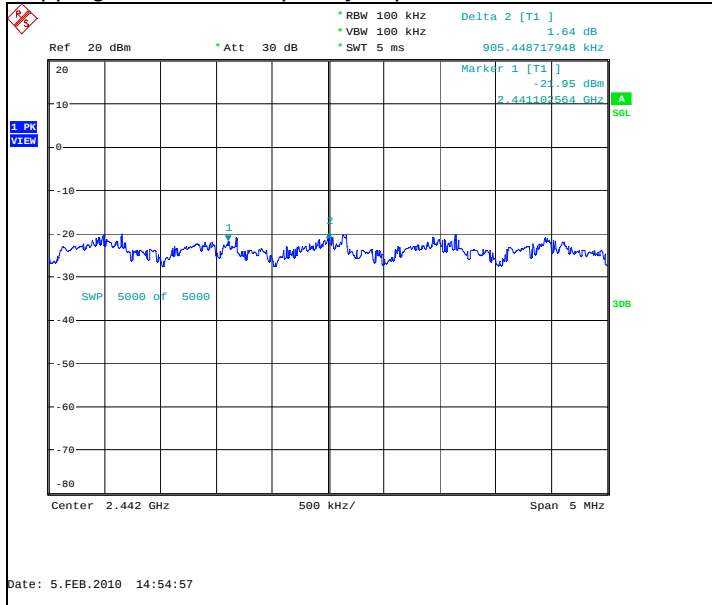

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-529 DUT 42170
Accessories with DUT numbers	BP-4L DUT 42168
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 99.2
Date of measurements	05-Feb-2010
Measured by	Jari Jantunen

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

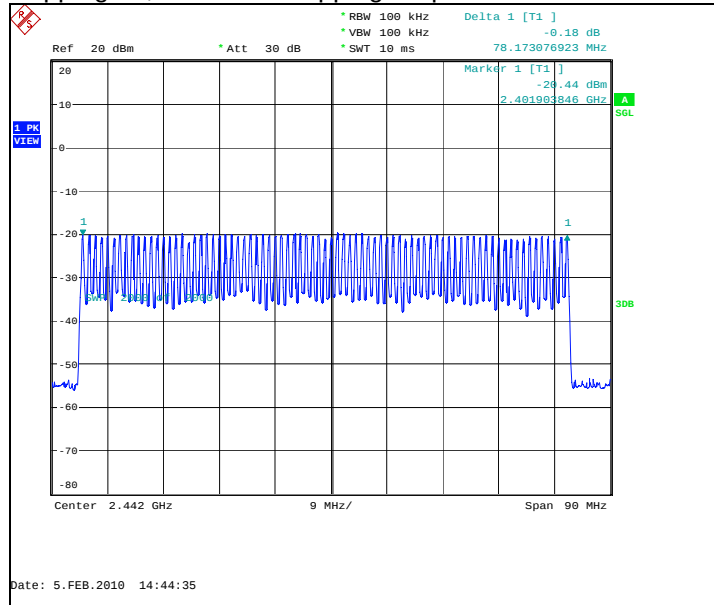

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
23	PASSED

Hopping on, number of hopping frequencies

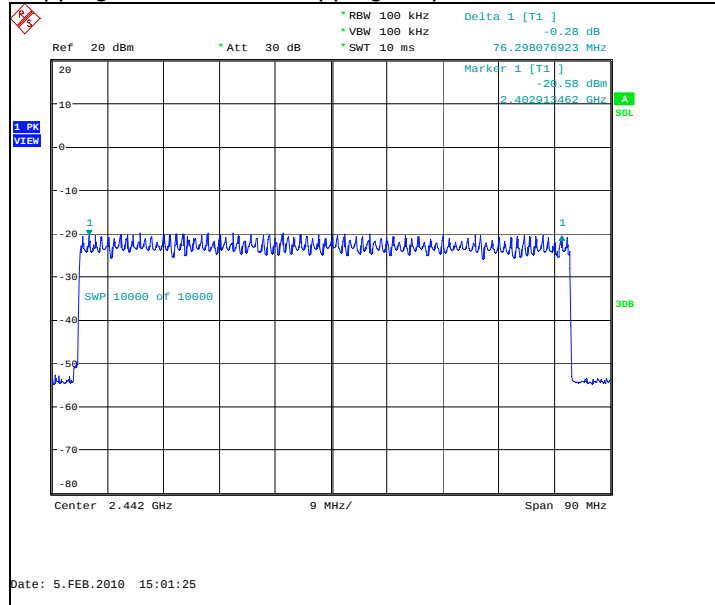

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-529 DUT 42170
Accessories with DUT numbers	BP-4L DUT 42168
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 99.2
Date of measurements	05-Feb-2010
Measured by	Jari Jantunen

11.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
101	2 917	0.294583	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

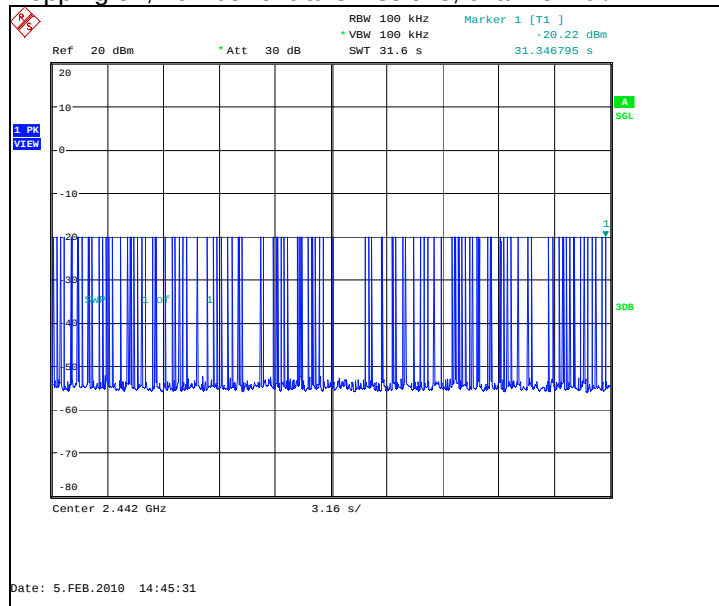


Hopping on, duration of one transmission, channel 40 / 2442 MHz

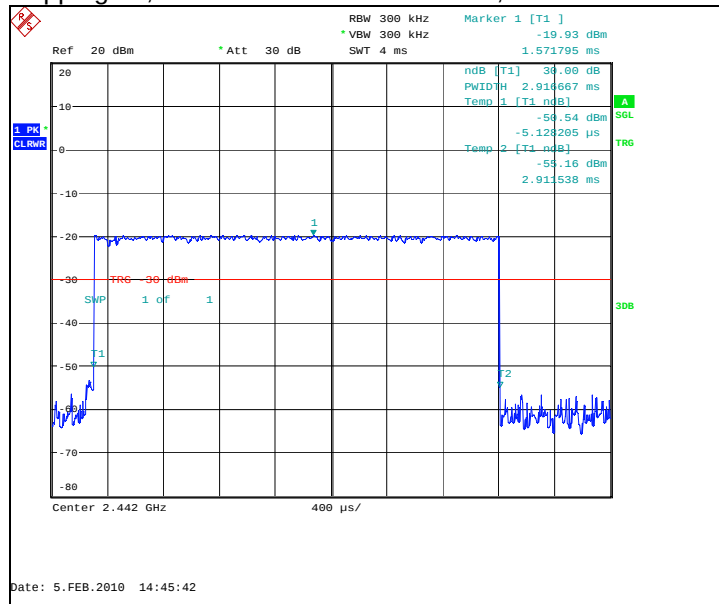


11.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
93	2 923	0.271846	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

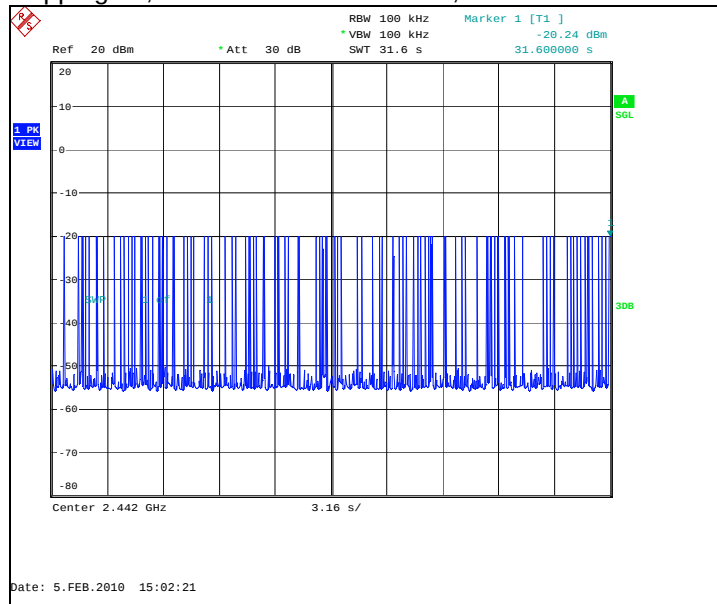

Hopping on, duration of one transmission, channel 40 / 2442 MHz

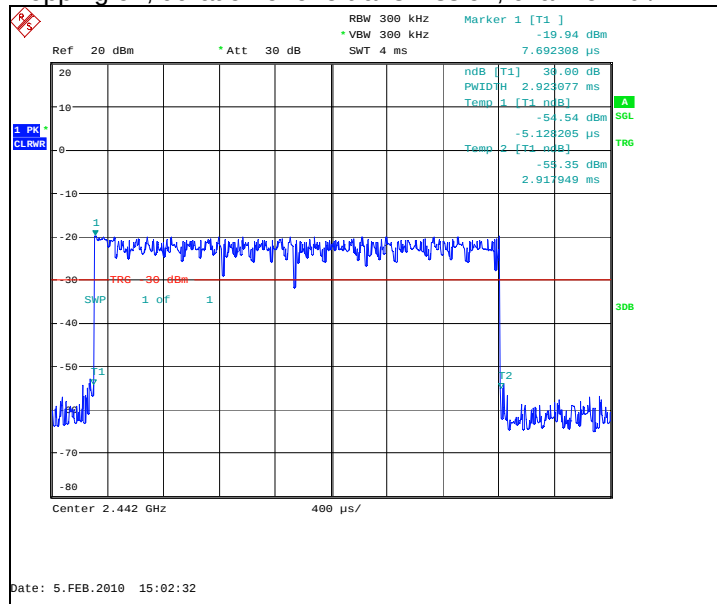

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B