

# FCC Radio Test Report

## FCC ID: PZ3-SSD

This report concerns (check one): Original Grant Class I Change Class II Change

**Project No.** : 1611C060  
**Equipment** : Primex Smart-Sync Digital Clock  
**Test Model** : B11980  
**Series Model** : B12028, B11923, B11924, B11980-G, B12028-G, B11923-G, B11924-G  
**Applicant** : Primex Wireless Inc.  
**Address** : 965 Wells St Lake Geneva Wisconsin United States 53147

**Date of Receipt** : Nov. 10, 2016  
**Date of Test** : Nov. 10, 2016 ~ Dec. 07, 2016  
**Issued Date** : Dec. 08, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Shawn Xiao  
(Shawn Xiao)

**Technical Manager** : David Mao  
(David Mao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>2.1 TEST FACILITY</b>	<b>8</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>8</b>
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>9</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>11</b>
<b>3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	<b>11</b>
<b>3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>12</b>
<b>3.5 DESCRIPTION OF SUPPORT UNITS</b>	<b>12</b>
<b>4 . EMC EMISSION TEST</b>	<b>13</b>
<b>4.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>13</b>
<b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>13</b>
<b>4.1.2 TEST PROCEDURE</b>	<b>13</b>
<b>4.1.3 DEVIATION FROM TEST STANDARD</b>	<b>13</b>
<b>4.1.4 TEST SETUP</b>	<b>14</b>
<b>4.1.5 EUT OPERATING CONDITIONS</b>	<b>14</b>
<b>4.1.6 EUT TEST CONDITIONS</b>	<b>14</b>
<b>4.1.7 TEST RESULTS</b>	<b>14</b>
<b>4.2 RADIATED EMISSION MEASUREMENT</b>	<b>15</b>
<b>4.2.1 RADIATED EMISSION LIMITS</b>	<b>15</b>
<b>4.2.2 TEST PROCEDURE</b>	<b>16</b>
<b>4.2.3 DEVIATION FROM TEST STANDARD</b>	<b>16</b>
<b>4.2.4 TEST SETUP</b>	<b>17</b>
<b>4.2.5 EUT OPERATING CONDITIONS</b>	<b>18</b>
<b>4.2.6 EUT TEST CONDITIONS</b>	<b>18</b>
<b>4.2.7 TEST RESULTS (9KHZ TO 30MHZ)</b>	<b>18</b>
<b>4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)</b>	<b>18</b>
<b>4.2.9 TEST RESULTS (ABOVE 1000 MHZ)</b>	<b>18</b>
<b>5 . BANDWIDTH TEST</b>	<b>19</b>
<b>5.1 APPLIED PROCEDURES / LIMIT</b>	<b>19</b>
<b>5.1.1 TEST PROCEDURE</b>	<b>19</b>
<b>5.1.2 DEVIATION FROM STANDARD</b>	<b>19</b>
<b>5.1.3 TEST SETUP</b>	<b>19</b>
<b>5.1.4 EUT OPERATION CONDITIONS</b>	<b>19</b>
<b>5.1.5 EUT TEST CONDITIONS</b>	<b>19</b>
<b>5.1.6 TEST RESULTS</b>	<b>19</b>

Table of Contents	Page
<b>6 . MAXIMUM OUTPUT POWER TEST</b>	<b>20</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>20</b>
<b>6.1.1 TEST PROCEDURE</b>	<b>20</b>
<b>6.1.2 DEVIATION FROM STANDARD</b>	<b>20</b>
<b>6.1.3 TEST SETUP</b>	<b>20</b>
<b>6.1.4 EUT OPERATION CONDITIONS</b>	<b>20</b>
<b>6.1.5 EUT TEST CONDITIONS</b>	<b>20</b>
<b>6.1.6 TEST RESULTS</b>	<b>20</b>
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>21</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>21</b>
<b>7.1.1 TEST PROCEDURE</b>	<b>21</b>
<b>7.1.2 DEVIATION FROM STANDARD</b>	<b>21</b>
<b>7.1.3 TEST SETUP</b>	<b>21</b>
<b>7.1.4 EUT OPERATION CONDITIONS</b>	<b>21</b>
<b>7.1.5 EUT OPERATION CONDITIONS</b>	<b>21</b>
<b>7.1.6 TEST RESULTS</b>	<b>21</b>
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>22</b>
<b>8.1 APPLIED PROCEDURES / LIMIT</b>	<b>22</b>
<b>8.1.1 TEST PROCEDURE</b>	<b>22</b>
<b>8.1.2 DEVIATION FROM STANDARD</b>	<b>22</b>
<b>8.1.3 TEST SETUP</b>	<b>22</b>
<b>8.1.4 EUT OPERATION CONDITIONS</b>	<b>22</b>
<b>8.1.5 EUT TEST CONDITIONS</b>	<b>22</b>
<b>8.1.6 TEST RESULTS</b>	<b>22</b>
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>23</b>
<b>10 . EUT TEST PHOTO</b>	<b>25</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>29</b>
<b>ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>32</b>
<b>ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>37</b>
<b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>44</b>
<b>ATTACHMENT E - BANDWIDTH</b>	<b>57</b>
<b>ATTACHMENT F - MAXIMUM OUTPUT POWER TEST</b>	<b>60</b>
<b>ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>62</b>
<b>ATTACHMENT H - POWER SPECTRAL DENSITY TEST</b>	<b>69</b>

## REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1611C060	Original Issue.	Dec. 08, 2016

## 1. CERTIFICATION

Equipment : Primex Smart-Sync Digital Clock  
Brand Name : Primex Wireless  
Test Model : B11980  
Series Model : B12028, B11923, B11924, B11980-G, B12028-G, B11923-G, B11924-G  
Applicant : Primex Wireless Inc.  
Manufacturer : RYDER ELECTRONICS(SHENZHEN) Ltd  
Address : N 3211 country Road H,Lake Geneva WI 53147  
Factory : RYDER ELECTRONICS(SHENZHEN) Ltd  
Address : 139 Da Bao Road, District33,Bao An, Shenzhen, China  
Date of Test : Nov. 10, 2016 ~ Dec. 07, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1611C060) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247), Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.209/15.205	Transmitter Radiated Emissions	PASS	

### NOTE:

(1)" N/A" denotes test is not applicable to this device.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{cisp}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	$U$ , (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ , (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Primex Smart-Sync Digital Clock					
Brand Name	Primex Wireless					
Test Model	B11980					
Series Model	B12028, B11923, B11924, B11980-G, B12028-G, B11923-G, B11924-G					
Model Difference	Differ in display size and color of LED, please refer below.					
	Models	Display Size	Red LED	Green LED		
	B11980	2.3"x4	V	-		
	B12028	2.3"x6	V	-		
	B11923	4.0"x4	V	-		
	B11924	4.0"x6	V	-		
	B11980-G	2.3"x4	-	V		
	B12028-G	2.3"x6	-	V		
	B11923-G	4.0"x4	-	V		
Product Description	Operation Frequency		2402~2480 MHz			
	Modulation Technology		GFSK(1Mbps)			
	Bit Rate of Transmitter					
	Output Power (Max.)		1.64 dBm (1Mbps)			
Power Source	DC voltage supplied from AC/DC adapter. Brand/Model: Ktec/KSASB0241200200M2					
Power Rating	I/P: 100-240V~50/60Hz 0.6A O/P: 12V---2.0A					

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

## 3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	0

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>

Note:


(1) The measurements are performed at the high, middle, low available channels.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE

Test Software Version	J-Flash		
Frequency (MHz)	2402	2440	2480
BT LE	N/A	N/A	N/A

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

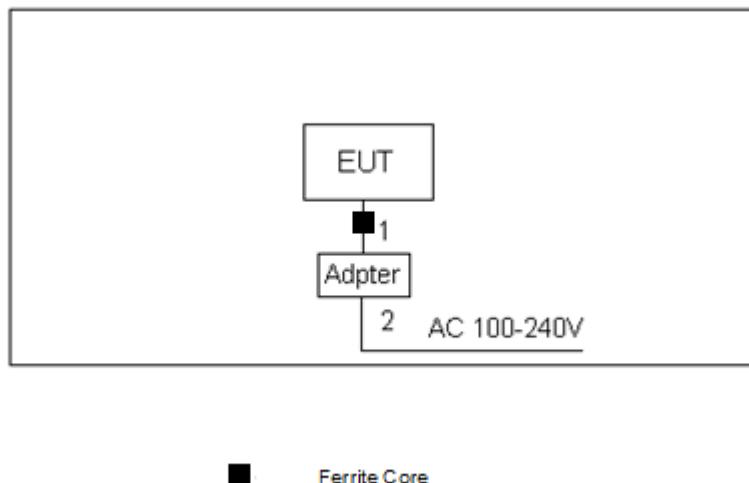

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	YES	0.2m	DC Cable
2	NO	NO	1.5m	AC Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	50	50

Note:

(1) The limit of " \* " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

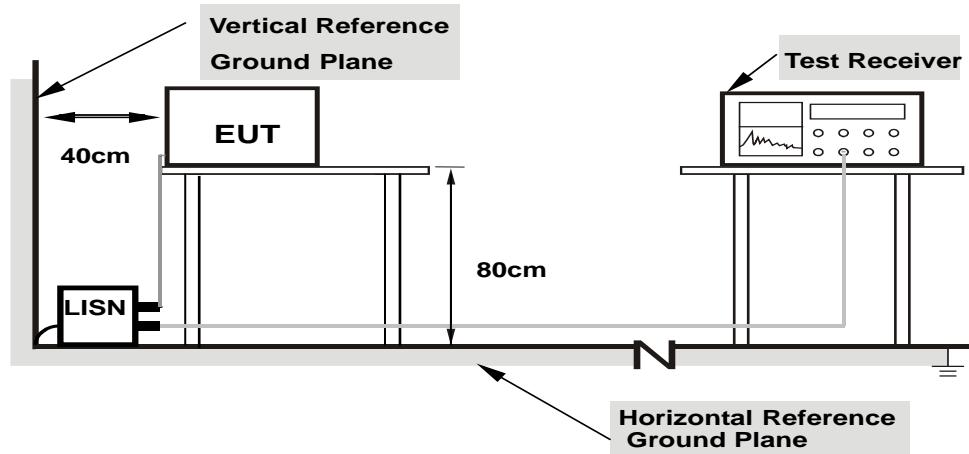

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 24°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of **Note**. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “N/A” denotes test is not applicable to this device.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

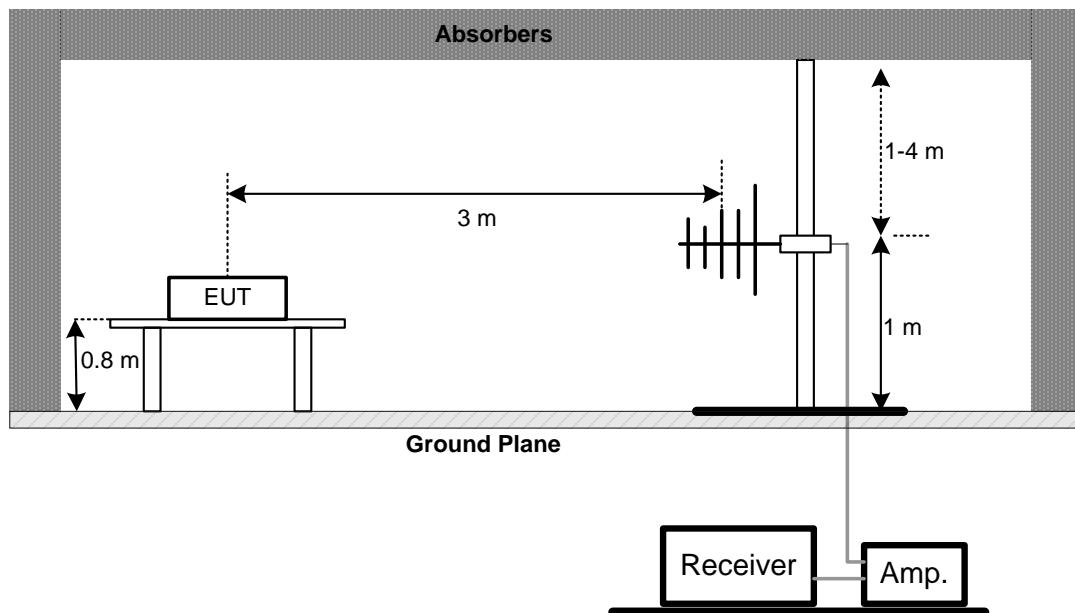

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

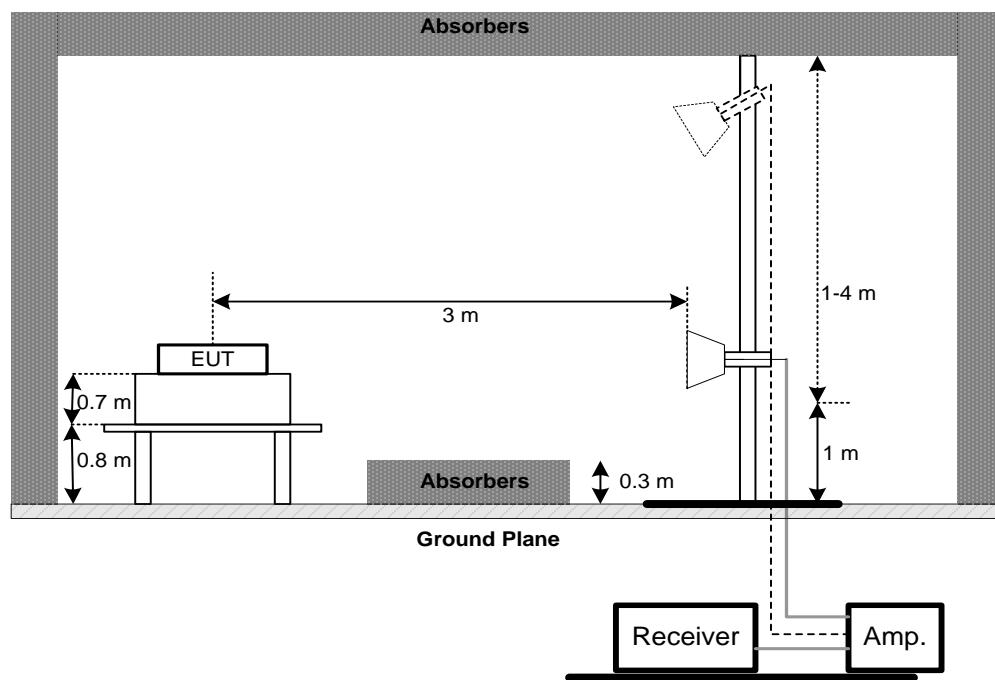

(C) For radiated emissions below 30MHz

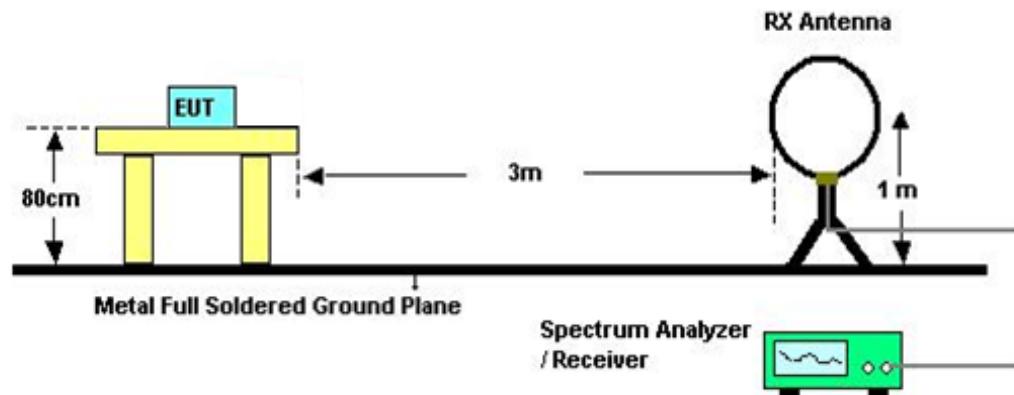

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 22°C    Relative Humidity: 56%    Test Voltage: AC 120V/60Hz

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

#### 4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 24°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 5.1.6 TEST RESULTS

Please refer to the Attachment E.

## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 24°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 6.1.6 TEST RESULTS

Please refer to the Attachment F.

## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
- c. Offset=antenna gain+cable loss

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

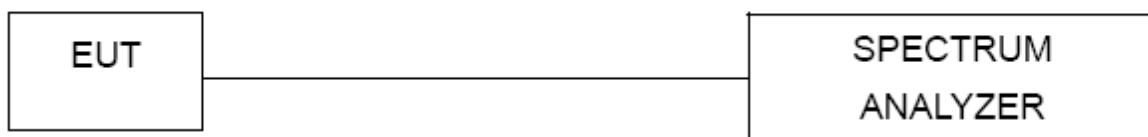

#### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.1.5 EUT OPERATION CONDITIONS

Temperature: 24°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 7.1.6 TEST RESULTS

Please refer to the Attachment G.

## 8. POWER SPECTRAL DENSITY TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 24°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 8.1.6 TEST RESULTS

Please refer to the Attachment H.

## 9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 26, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2017
9	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 26, 2017
10	Controller	CT	SC100	N/A	N/A
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
12	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
13	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

**6dB Bandwidth Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

**Peak Output Power Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 27, 2017
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 27, 2017

**Antenna Conducted Spurious Emission Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

**Power Spectral Density Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


## 10. EUT TEST PHOTO

### Conducted Measurement Photos




## Radiated Measurement Photos

9KHz to 30MHz

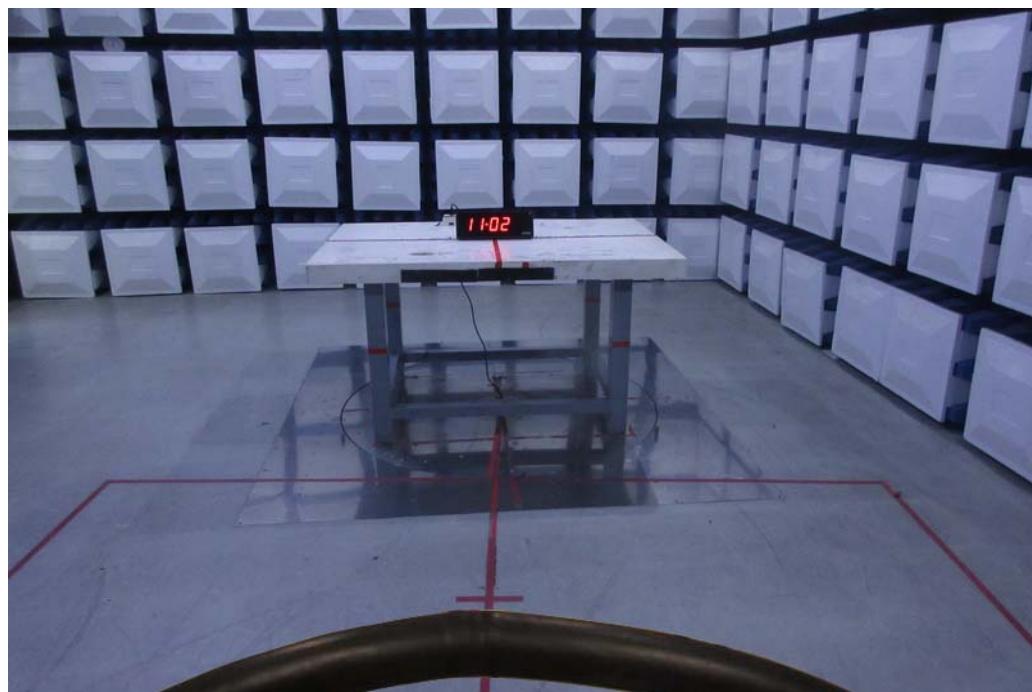


## Radiated Measurement Photos

30MHz to 1000MHz

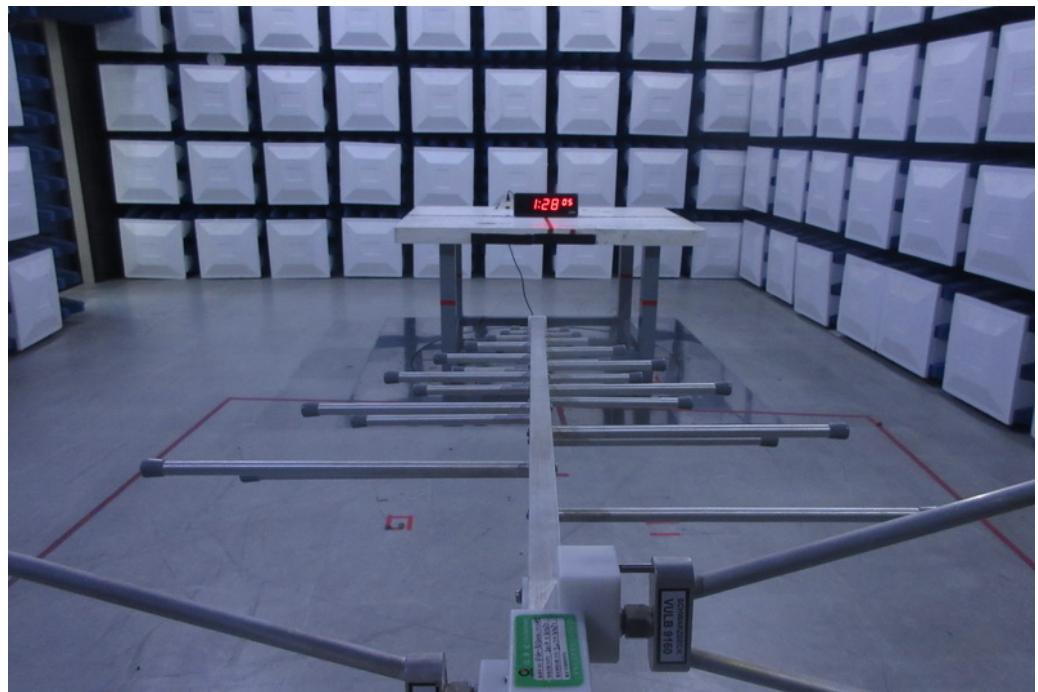

## Radiated Measurement Photos


### Above 1000MHz

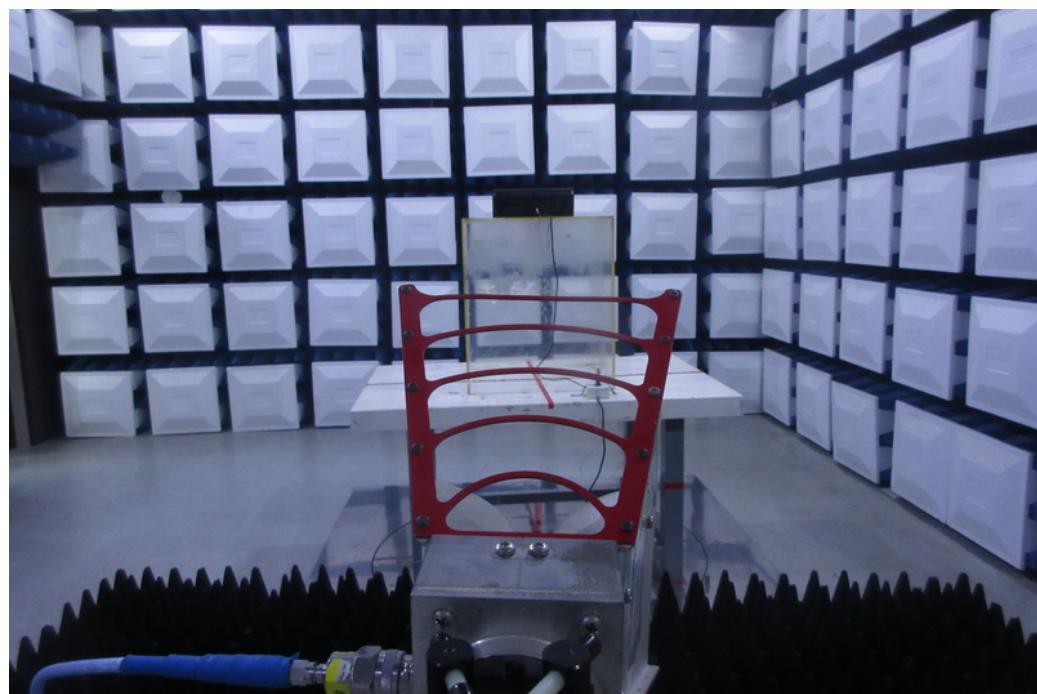

**ATTACHMENT A - CONDUCTED EMISSION**


Test Mode: TX Mode

## Line

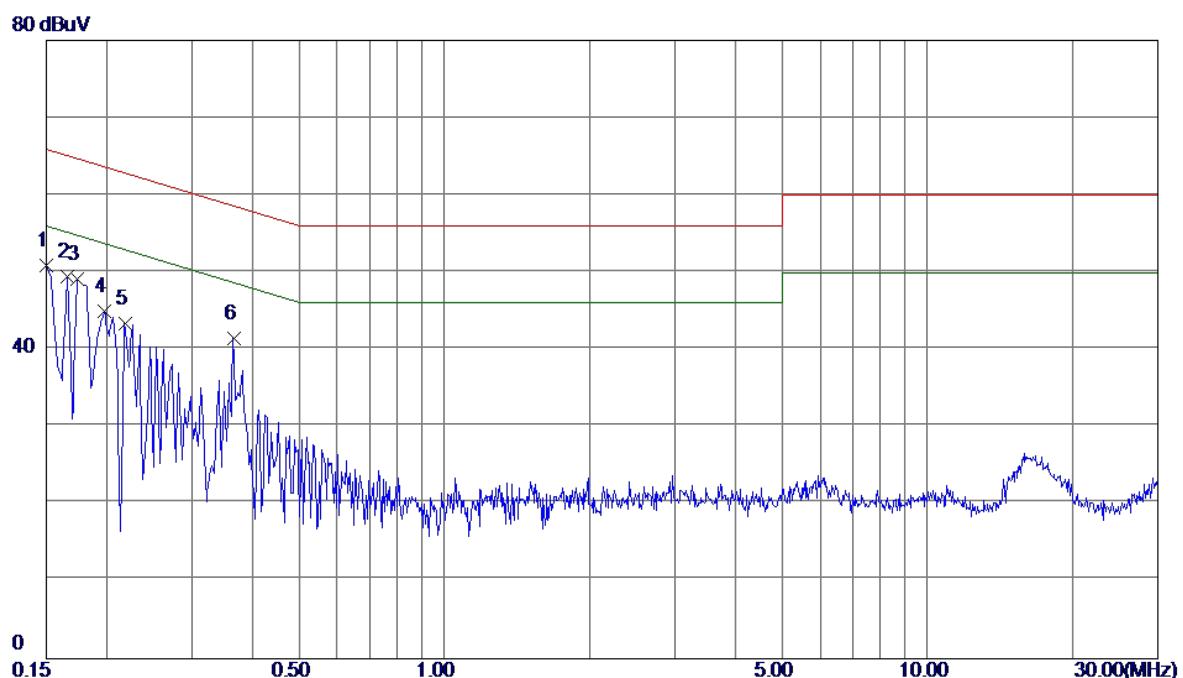

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	41.38	9.52	50.90	66.00	-15.10	Peak	
2	0.1660	39.85	9.52	49.37	65.16	-15.79	Peak	
3	0.1740	39.67	9.52	49.19	64.77	-15.58	Peak	
4	0.1980	35.38	9.53	44.91	63.69	-18.78	Peak	
5	0.2180	33.78	9.53	43.31	62.89	-19.58	Peak	
6	0.3660	31.88	9.54	41.42	58.59	-17.17	Peak	

Test Mode: TX Mode

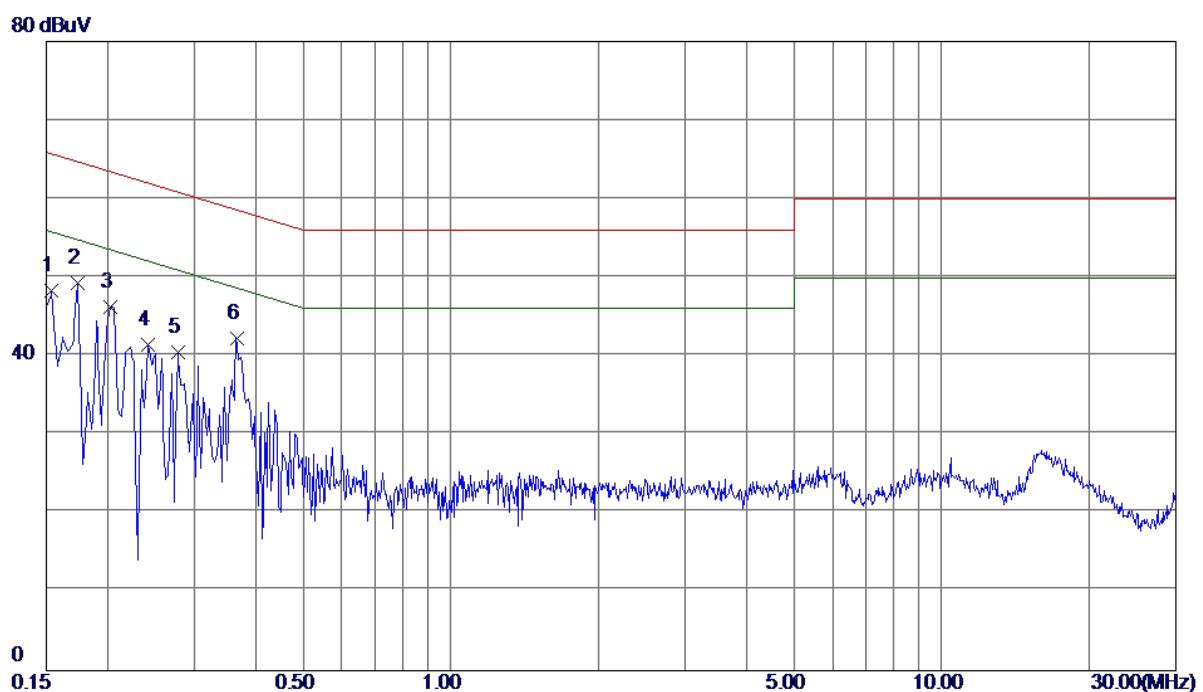
**Neutral**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1539	38.82	9.50	48.32	65.79	-17.47	Peak	
2 *	0.1740	39.91	9.44	49.35	64.77	-15.42	Peak	
3	0.2020	36.77	9.53	46.30	63.53	-17.23	Peak	
4	0.2420	31.84	9.53	41.37	62.03	-20.66	Peak	
5	0.2779	30.93	9.53	40.46	60.88	-20.42	Peak	
6	0.3660	32.78	9.50	42.28	58.59	-16.31	Peak	

**ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)**

Test Mode: TX Mode


Ant 0°

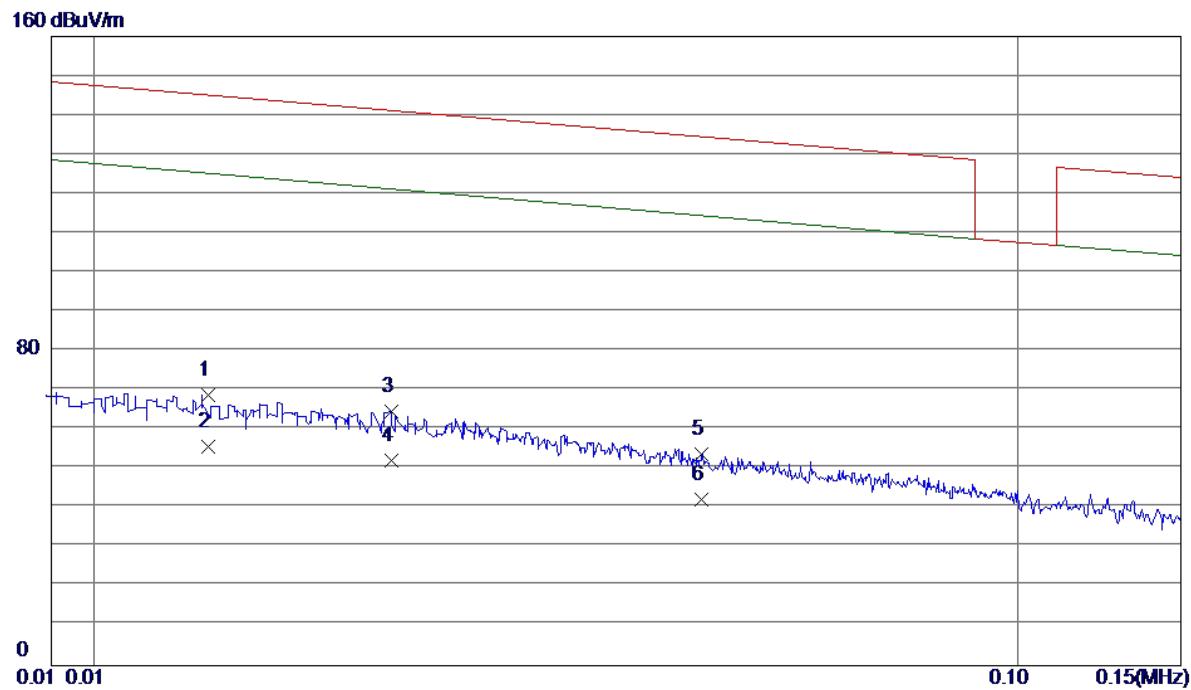

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	0.0133	44.92	23.92	68.84	147.43	-78.59	Peak	
2 *	0.0133	31.90	23.92	55.82	127.43	-71.61	AVG	
3	0.0210	41.27	23.40	64.67	145.53	-80.86	Peak	
4	0.0210	28.90	23.40	52.30	125.53	-73.23	AVG	
5	0.0454	33.49	20.39	53.88	139.51	-85.63	Peak	
6	0.0454	21.79	20.39	42.18	119.51	-77.33	AVG	

Test Mode: TX Mode


Ant 0°

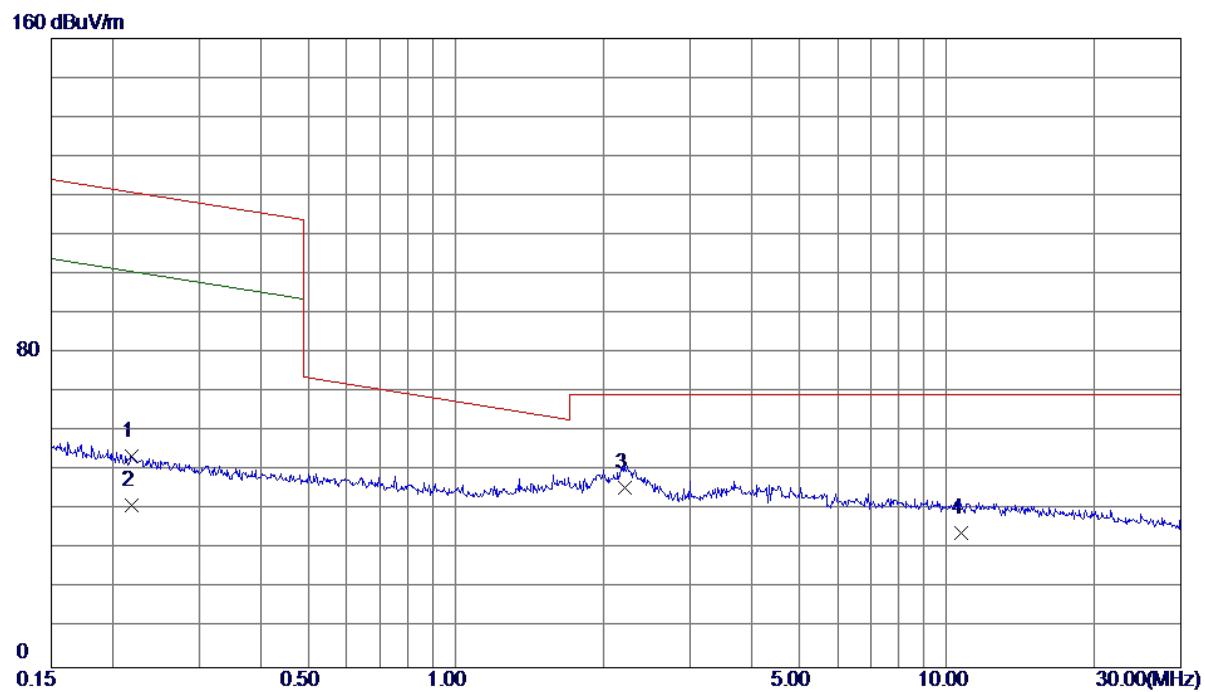

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	0.2185	35.14	18.68	53.82	123.07	-69.25	Peak	
2	0.2185	22.60	18.68	41.28	103.07	-61.79	AVG	
3 *	2.2132	28.20	17.63	45.83	69.54	-23.71	QP	
4	10.6763	18.40	15.83	34.23	69.54	-35.31	QP	

Test Mode: TX Mode


Ant 90°

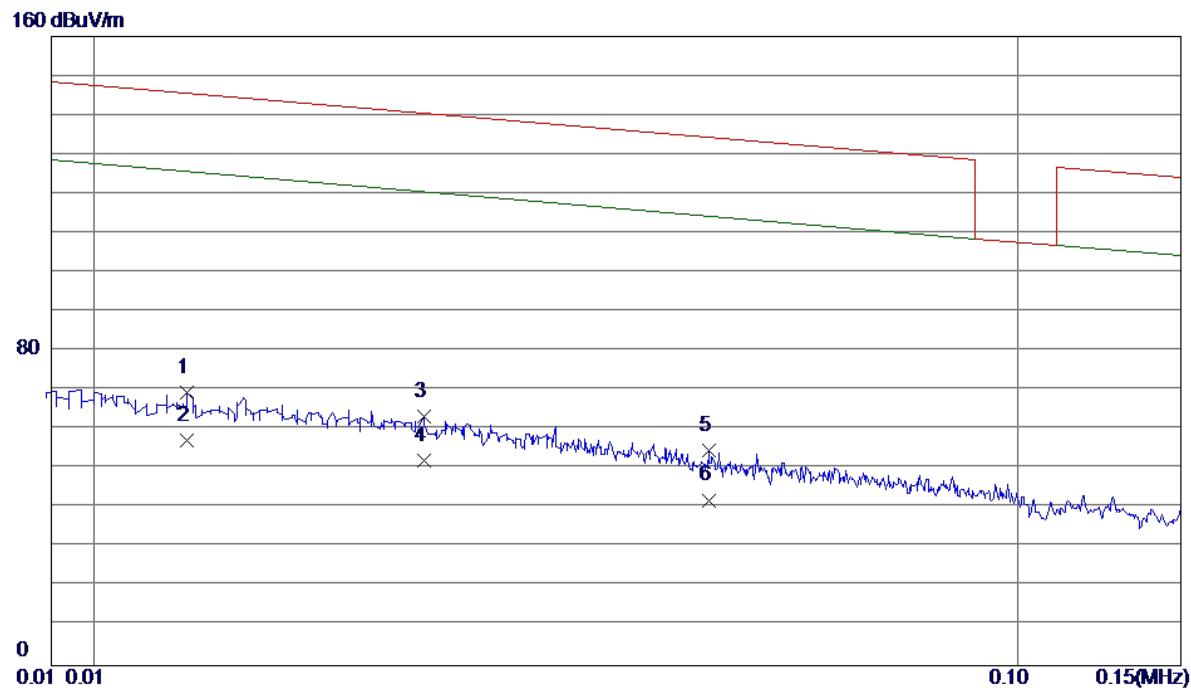

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	0.0126	45.60	23.96	69.56	147.61	-78.05	Peak	
2 *	0.0126	33.40	23.96	57.36	127.61	-70.25	AVG	
3	0.0228	40.11	23.18	63.29	145.09	-81.80	Peak	
4	0.0228	28.89	23.18	52.07	125.09	-73.02	AVG	
5	0.0463	34.49	20.28	54.77	139.29	-84.52	Peak	
6	0.0463	21.80	20.28	42.08	119.29	-77.21	AVG	

Test Mode: TX Mode

Ant 90°

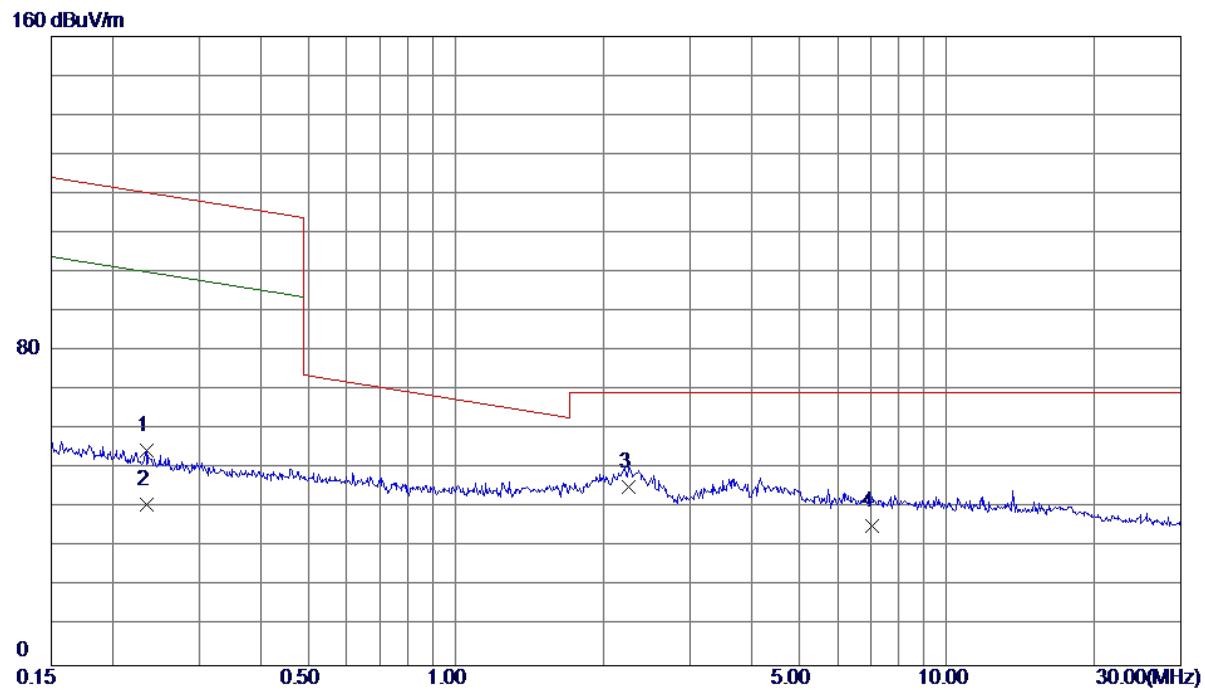


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	0.2341	35.93	18.66	54.59	122.54	-67.95	Peak	
2	0.2341	22.21	18.66	40.87	102.54	-61.67	AVG	
3 *	2.2486	27.90	17.59	45.49	69.54	-24.05	QP	
4	7.0622	19.30	16.34	35.64	69.54	-33.90	QP	

**ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: TX 2402MHz \_CH00\_1Mbps

## Vertical

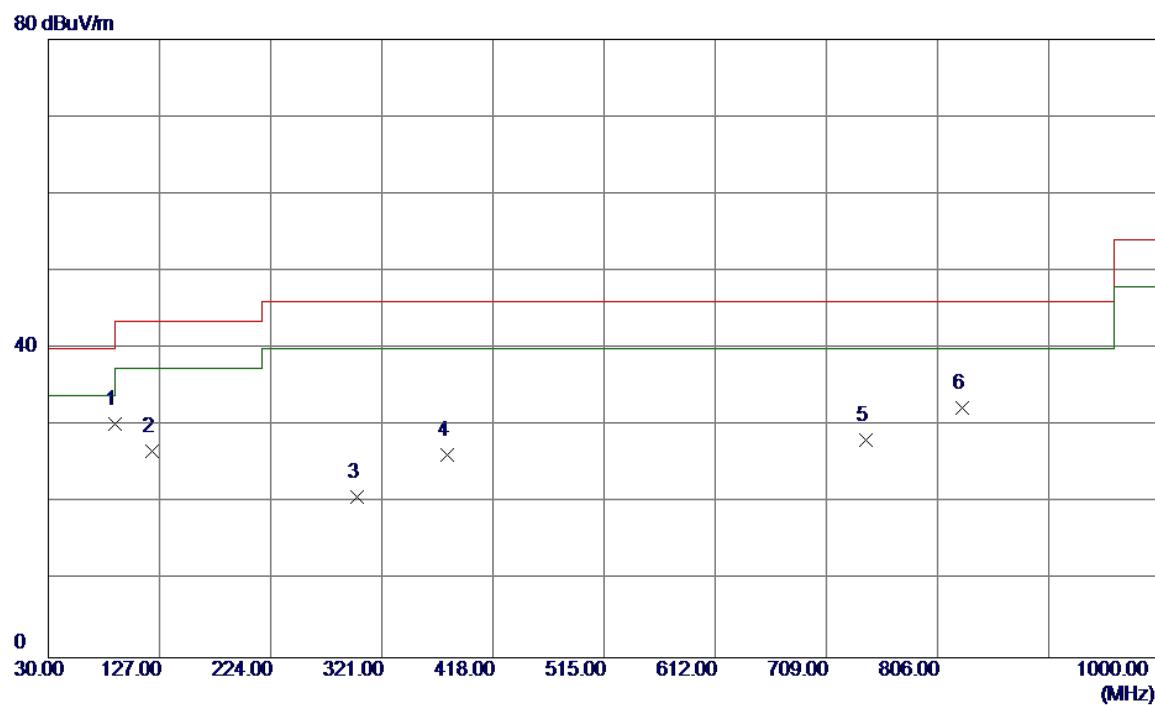


No.	Freq.	Reading Level	Correct Factor	Measure m	Limit	Margin		
						MHz	dBuV/m	dB
1 *	87. 7149	46. 51	-16. 32	30. 19	40. 00	-9. 81	Peak	
2	120. 6950	39. 20	-12. 50	26. 70	43. 50	-16. 80	Peak	
3	299. 1750	30. 77	-9. 94	20. 83	46. 00	-25. 17	Peak	
4	377. 7450	34. 98	-8. 79	26. 19	46. 00	-19. 81	Peak	
5	742. 9500	28. 93	-0. 84	28. 09	46. 00	-17. 91	Peak	
6	827. 8250	31. 73	0. 60	32. 33	46. 00	-13. 67	Peak	

Test Mode: TX 2402MHz \_CH00\_1Mbps


**Horizontal**

80 dBuV/m

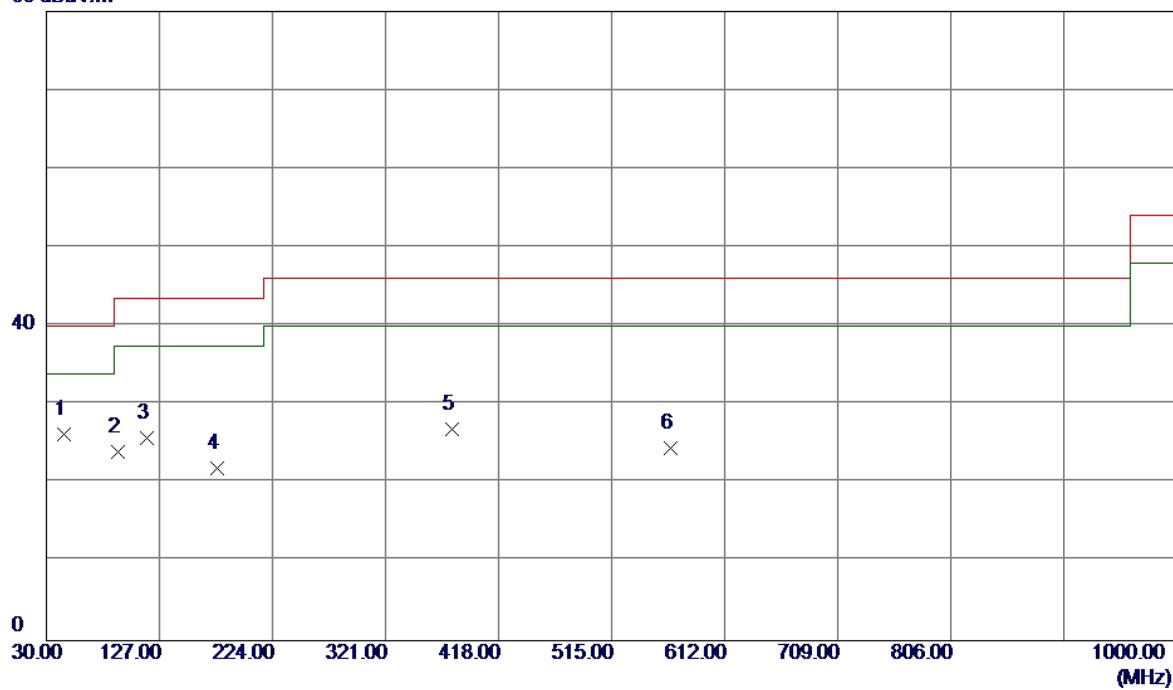

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	45.0350	38.17	-11.88	26.29	40.00	-13.71	Peak	
2	91.1100	40.39	-16.37	24.02	43.50	-19.48	Peak	
3	116.3300	38.86	-13.07	25.79	43.50	-17.71	Peak	
4	176.9550	33.70	-11.71	21.99	43.50	-21.51	Peak	
5	378.2300	35.64	-8.75	26.89	46.00	-19.11	Peak	
6	565.4400	29.06	-4.56	24.50	46.00	-21.50	Peak	


Test Mode: TX 2440MHz \_CH19\_1Mbps

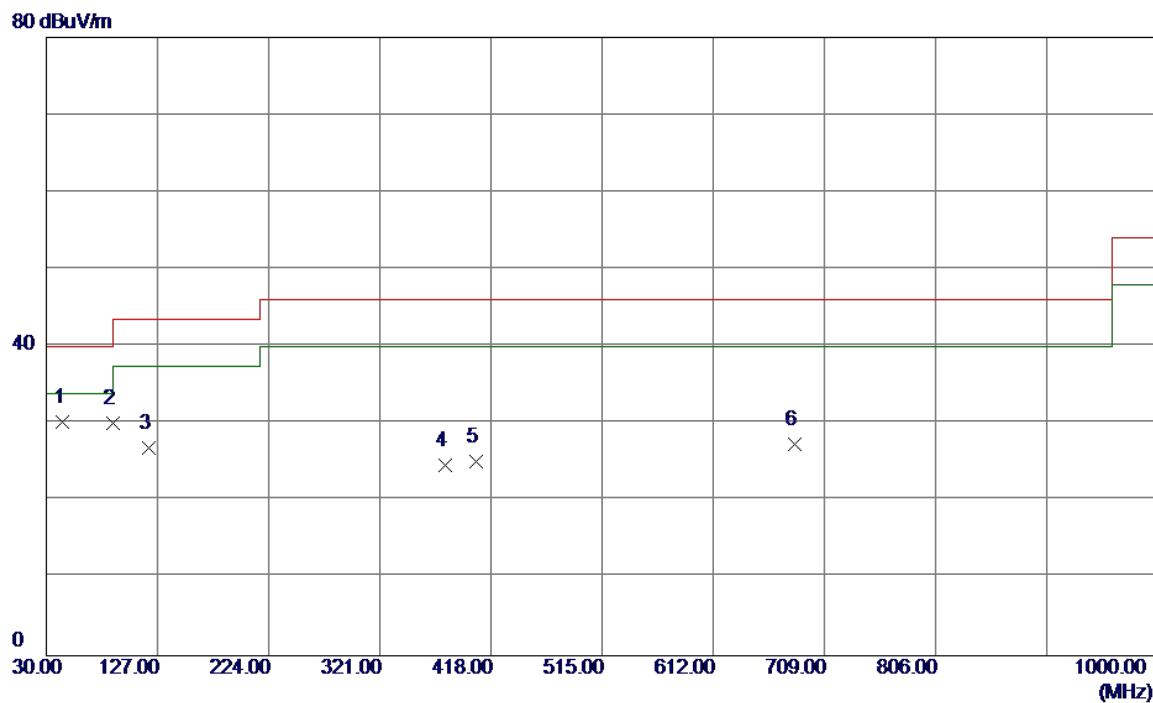**Vertical**


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin dB	Detector	Comment
1 *	44.5500	41.98	-11.79	30.19	40.00	-9.81	Peak	
2	87.7149	46.33	-16.32	30.01	40.00	-9.99	Peak	
3	119.7250	39.58	-12.64	26.94	43.50	-16.56	Peak	
4	378.2300	33.32	-8.75	24.57	46.00	-21.43	Peak	
5	404.9050	32.38	-7.19	25.19	46.00	-20.81	Peak	
6	683.2950	28.33	-1.00	27.33	46.00	-18.67	Peak	

Test Mode: TX 2440MHz \_CH19\_1Mbps

### Horizontal

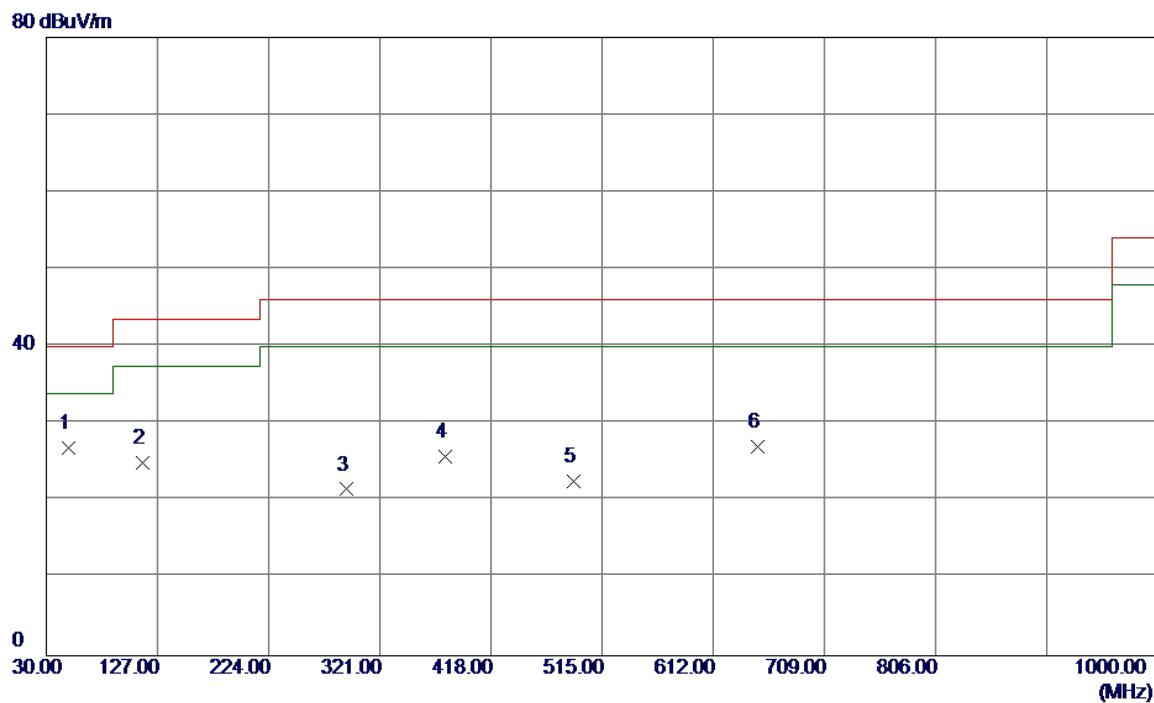


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	49.8849	38.93	-12.05	26.88	40.00	-13.12	Peak	
2	113.9050	38.30	-13.37	24.93	43.50	-18.57	Peak	
3	291.9000	31.49	-9.97	21.52	46.00	-24.48	Peak	
4	378.2300	34.56	-8.75	25.81	46.00	-20.19	Peak	
5	490.2650	30.08	-7.54	22.54	46.00	-23.46	Peak	
6	651.2849	28.76	-1.66	27.10	46.00	-18.90	Peak	

Test Mode:	TX 2480MHz _CH39_1Mbps
------------	------------------------

### Vertical


80 dBuV/m

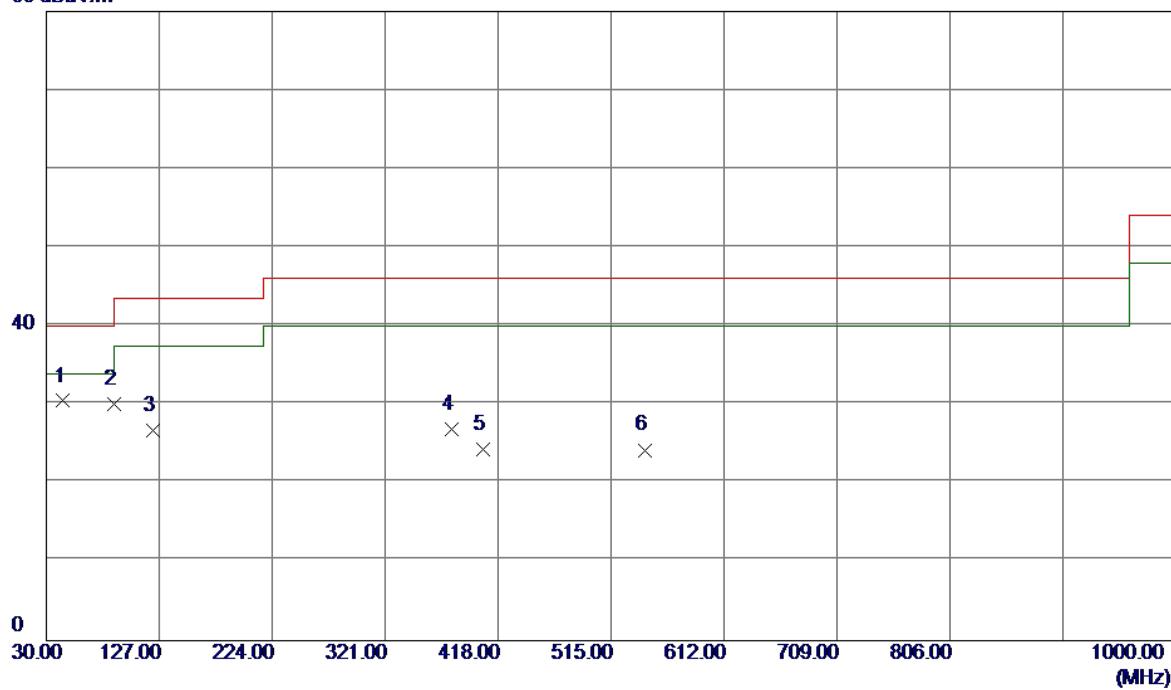

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	44.5500	42.27	-11.79	30.48	40.00	-9.52	Peak	
2	88.2000	46.45	-16.34	30.11	43.50	-13.39	Peak	
3	121.6650	39.15	-12.36	26.79	43.50	-16.71	Peak	
4	378.2300	35.68	-8.75	26.93	46.00	-19.07	Peak	
5	404.9050	31.51	-7.19	24.32	46.00	-21.68	Peak	
6	544.1000	29.06	-4.82	24.24	46.00	-21.76	Peak	

Test Mode: TX 2480MHz \_CH39\_1Mbps

### Horizontal

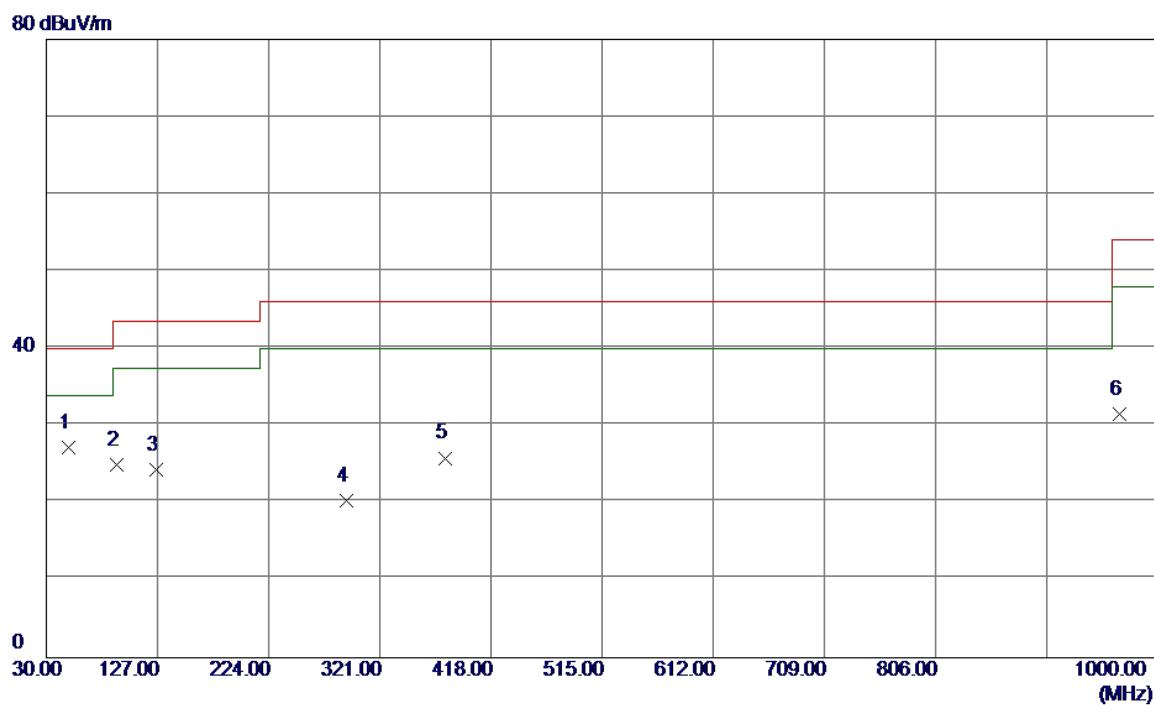


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin dB	Detector	Comment
1 *	49.4000	39.30	-12.16	27.14	40.00	-12.86	Peak	
2	91.1100	41.35	-16.37	24.98	43.50	-18.52	Peak	
3	126.0300	36.07	-11.72	24.35	43.50	-19.15	Peak	
4	291.9000	30.32	-9.97	20.35	46.00	-25.65	Peak	
5	378.2300	34.59	-8.75	25.84	46.00	-20.16	Peak	
6	966.5350	28.08	3.44	31.52	54.00	-22.48	Peak	

**ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

Test Mode : TX 2402MHz \_CH00\_1Mbps


## Vertical

115 dBuV/m

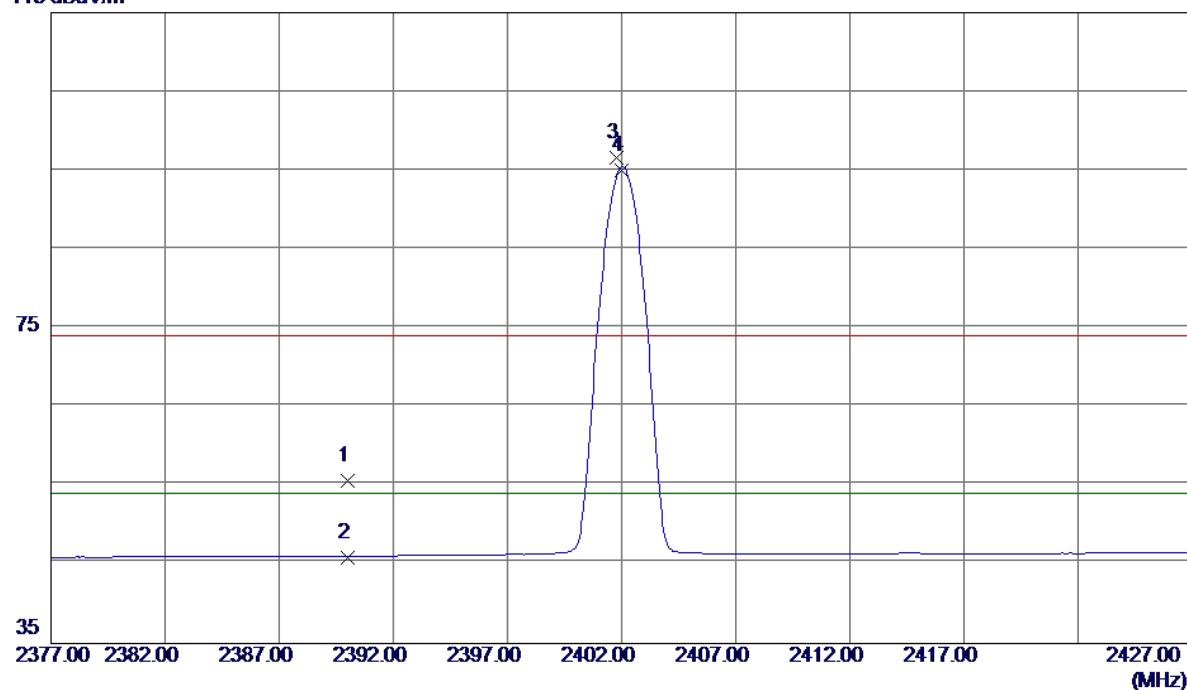

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2390.0000	22.56	33.01	55.57	74.00	-18.43	Peak	
2	2390.0000	12.87	33.01	45.88	54.00	-8.12	AVG	
3	2401.7620	63.51	33.06	96.57	74.00	22.57	Peak	No Limit
4 *	2402.0250	61.88	33.06	94.94	54.00	40.94	AVG	No Limit

Test Mode : TX 2402MHz \_CH00\_1Mbps

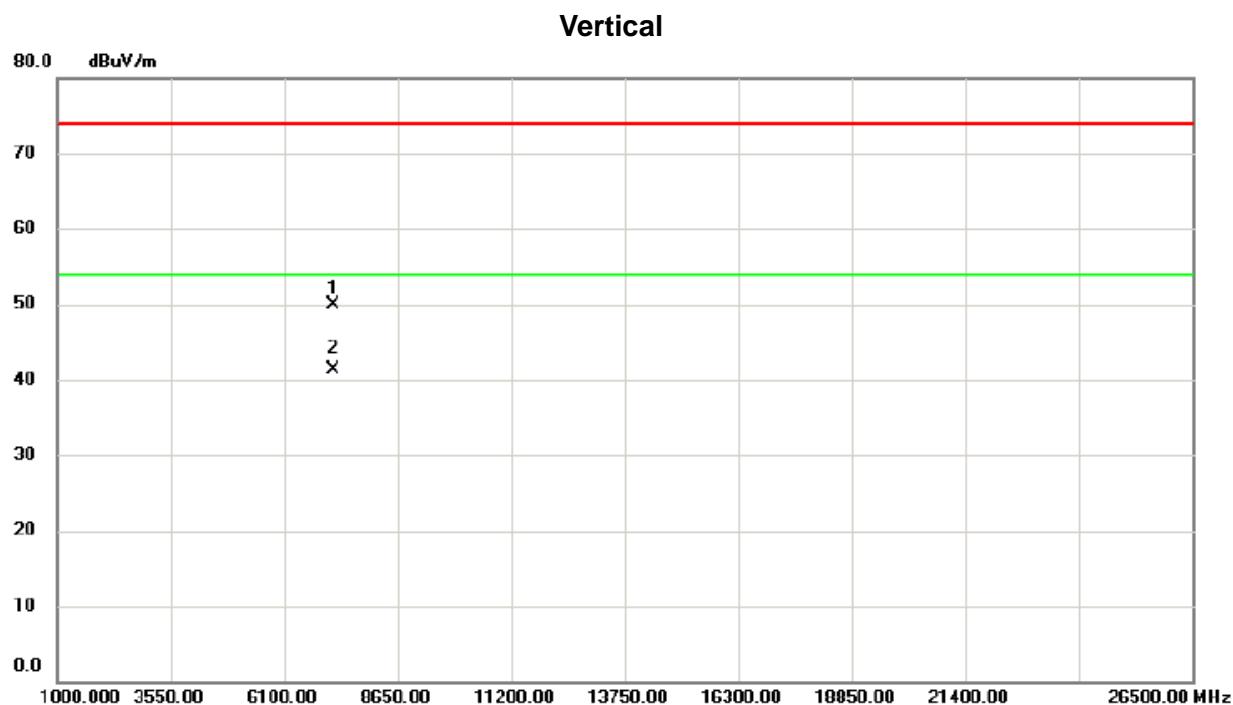


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		7205.995	38.75	11.16	49.91	74.00	-24.09	peak
2 *		7206.555	30.24	11.16	41.40	54.00	-12.60	AVG

Test Mode : TX 2402MHz \_CH00\_1Mbps


## Horizontal

115 dBuV/m

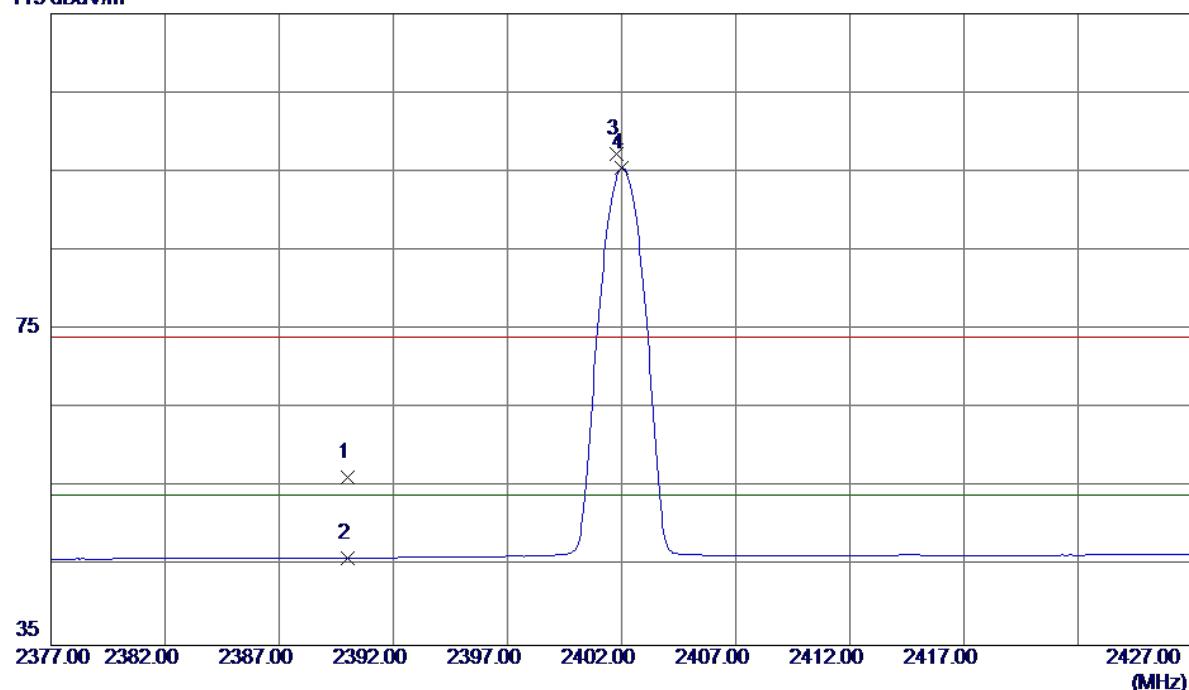

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2390.0000	23.33	33.01	56.34	74.00	-17.66	Peak	
2	2390.0000	13.08	33.01	46.09	54.00	-7.91	AVG	
3	2401.8000	64.22	33.06	97.28	74.00	23.28	Peak	No Limit
4 *	2402.0000	62.35	33.06	95.41	54.00	41.41	AVG	No Limit

Test Mode : TX 2402MHz \_CH00\_1Mbps

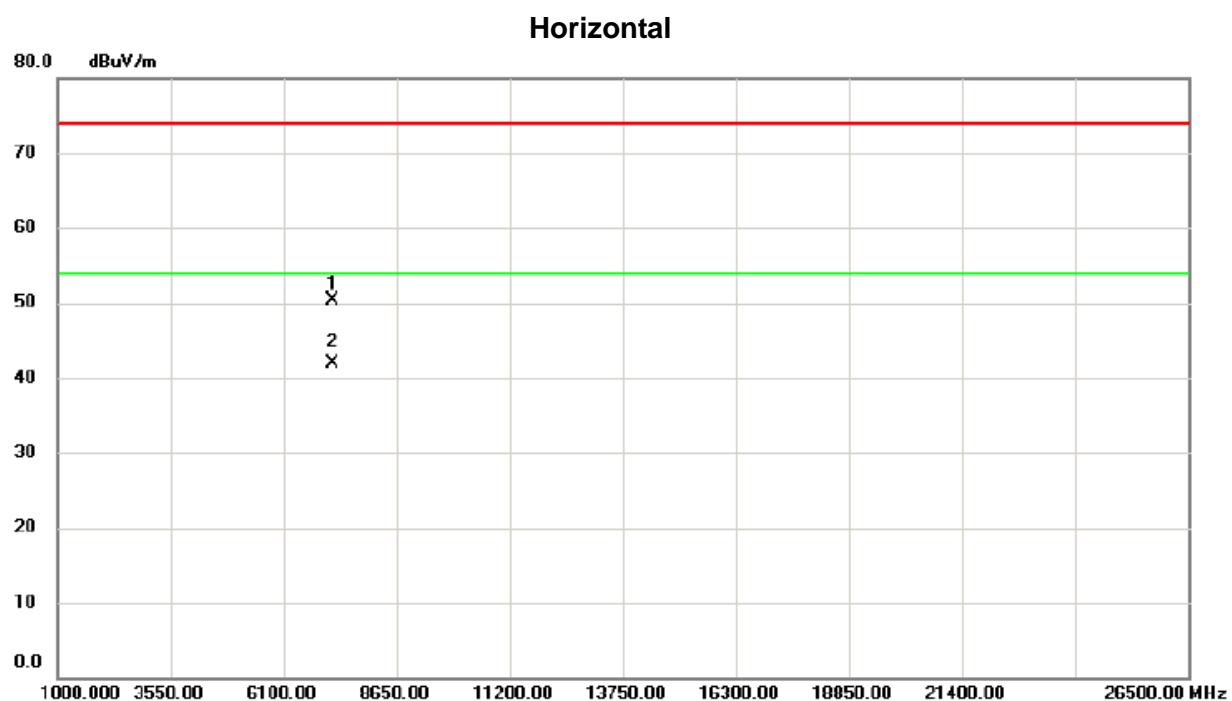


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		7206.836	39.11	11.16	50.27	74.00	-23.73	peak
2 *		7206.968	30.67	11.16	41.83	54.00	-12.17	AVG

Test Mode : TX 2440MHz \_CH19\_1Mbps


## Vertical

115 dBuV/m

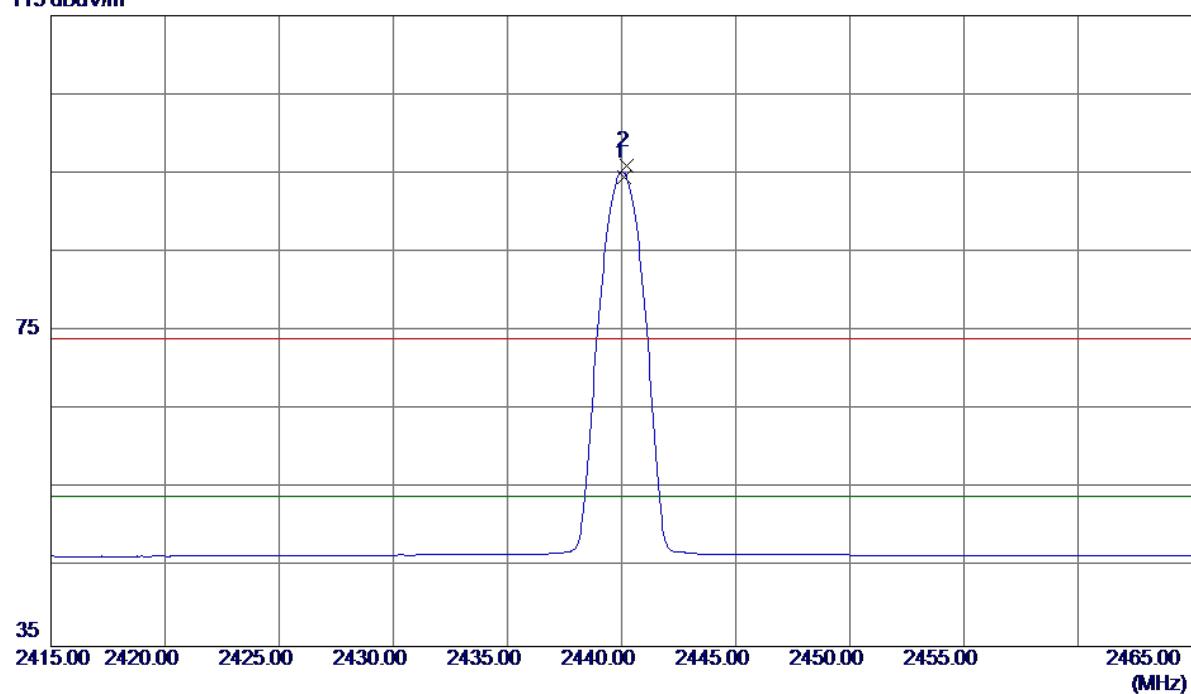

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Comment
		Level	Factor	ment	dBuV/m	dB	
1 *	2440.1330	61.26	33.22	94.48	54.00	40.48	AVG No Limit
2	2440.2140	62.67	33.22	95.89	74.00	21.89	Peak No Limit


Test Mode : TX 2440MHz \_CH19\_1Mbps

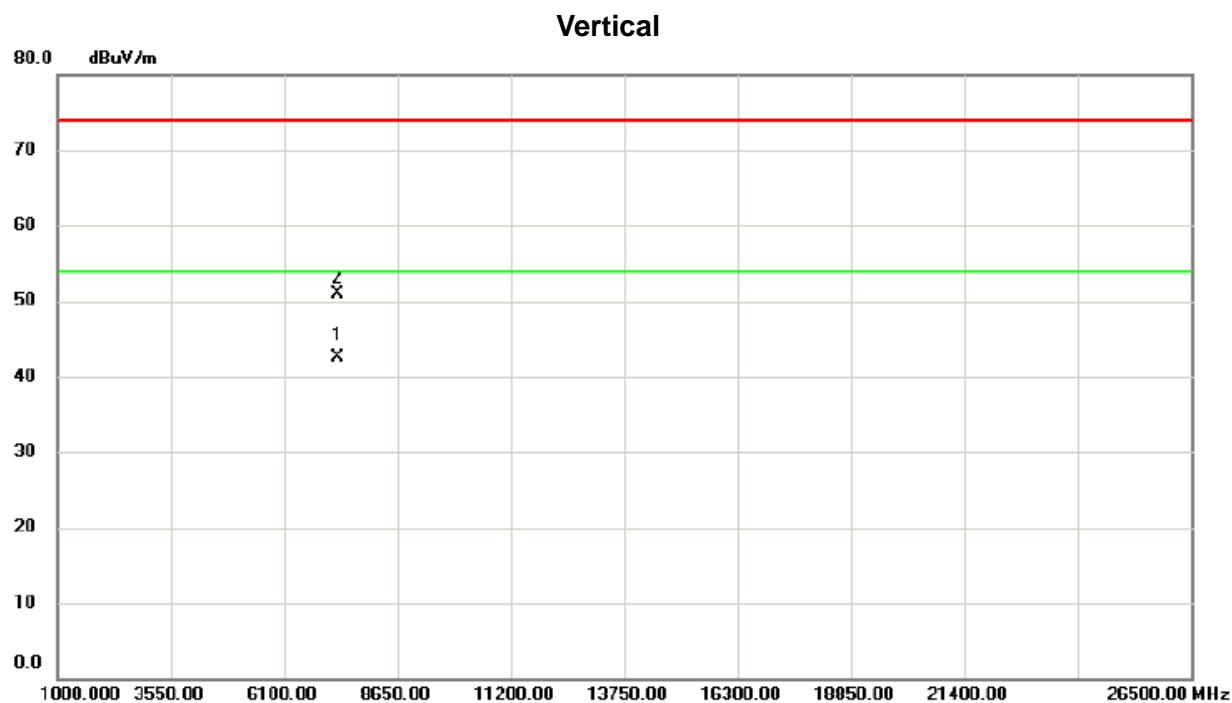

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	7320.495	31.08	11.39	42.47	54.00	-11.53	AVG
2		7320.655	39.53	11.39	50.92	74.00	-23.08	peak


Test Mode : TX 2440MHz \_CH19\_1Mbps

## Horizontal

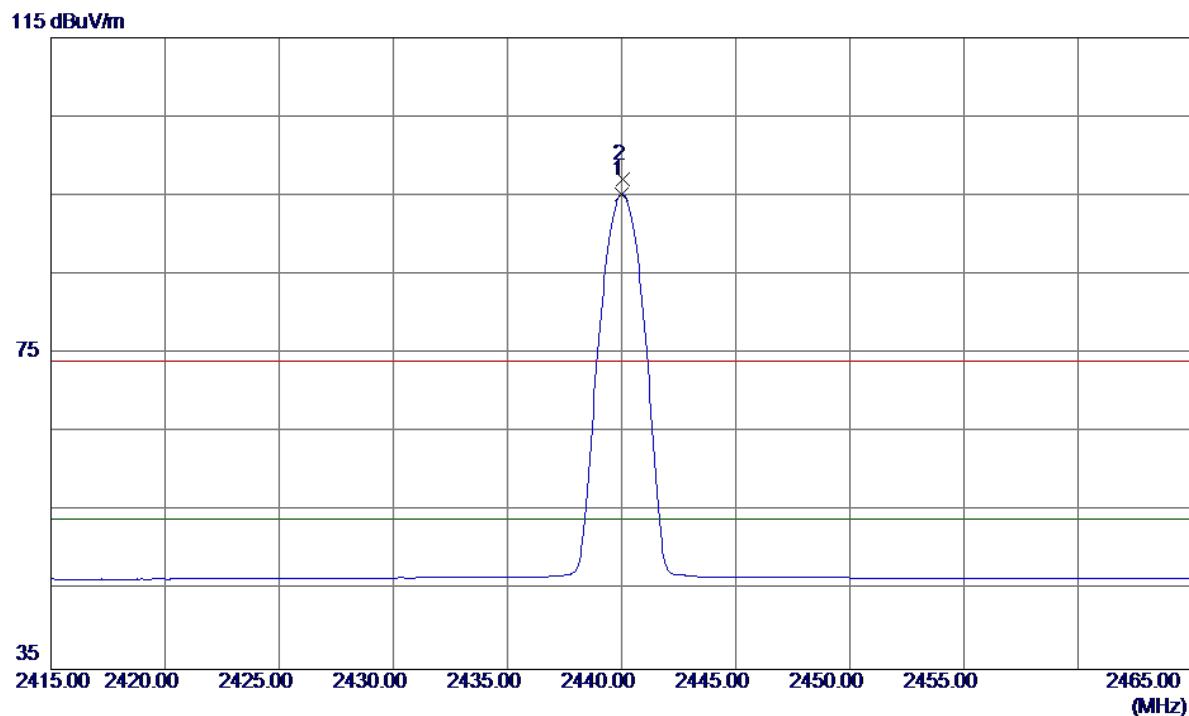

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	2440.0000	61.92	33.22	95.14	54.00	41.14	AVG	No Limit
2	2440.0500	63.84	33.22	97.06	74.00	23.06	Peak	No Limit

Test Mode : TX 2440MHz \_CH19\_1Mbps

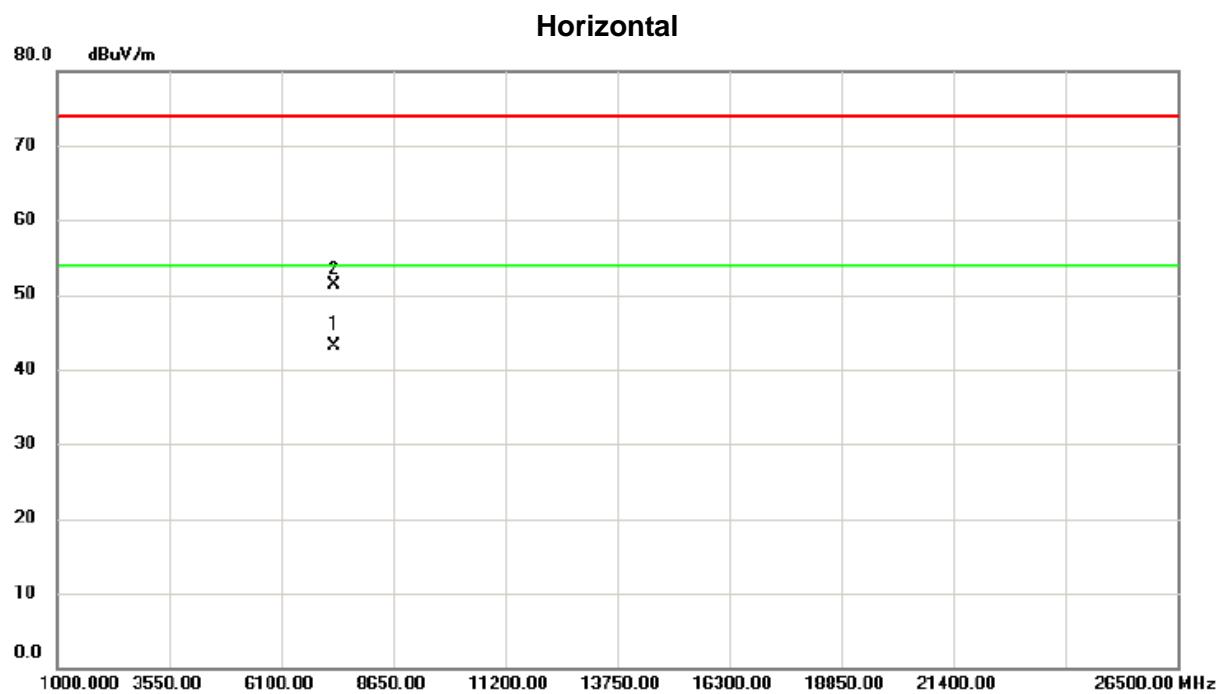


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	7320.247	31.77	11.39	43.16	54.00	-10.84	AVG
2		7320.843	39.96	11.40	51.36	74.00	-22.64	peak

Test Mode : TX 2480MHz \_CH39\_1Mbps

## Vertical


115 dBuV/m

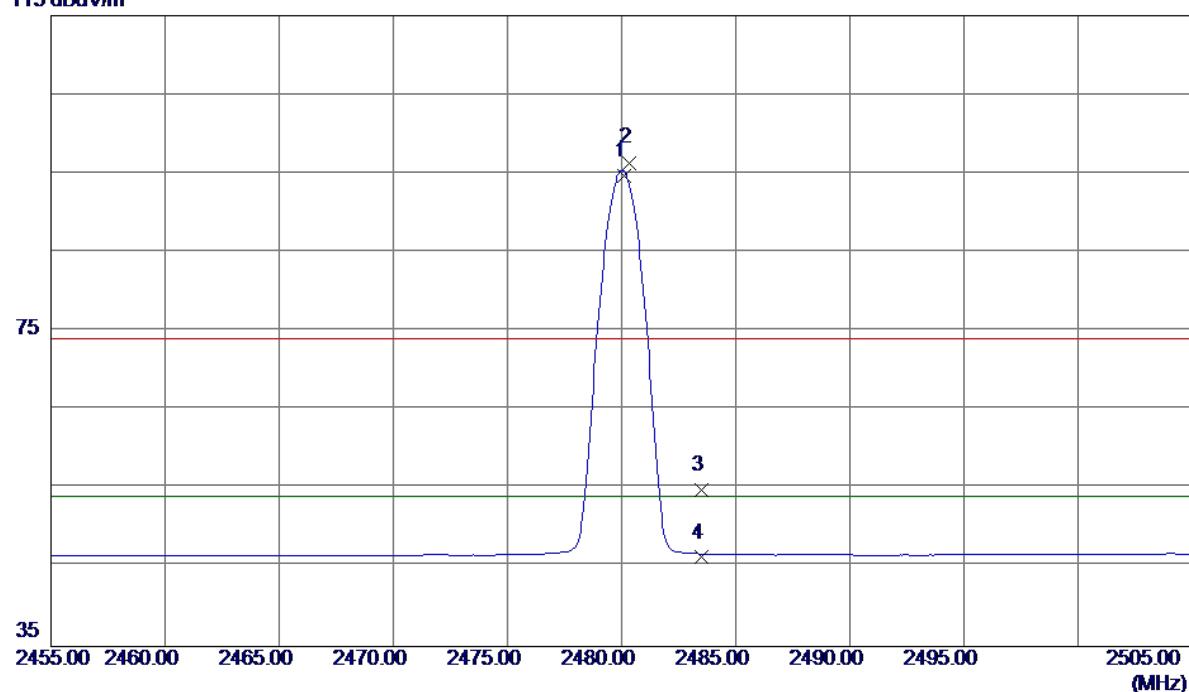

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	2480.1040	61.32	33.39	94.71	54.00	40.71	AVG	No Limit
2	2480.3570	62.97	33.39	96.36	74.00	22.36	Peak	No Limit
3	2483.5000	21.43	33.40	54.83	74.00	-19.17	Peak	
4	2483.5000	12.88	33.40	46.28	54.00	-7.72	AVG	

Test Mode : TX 2480MHz \_CH39\_1Mbps


## Vertical

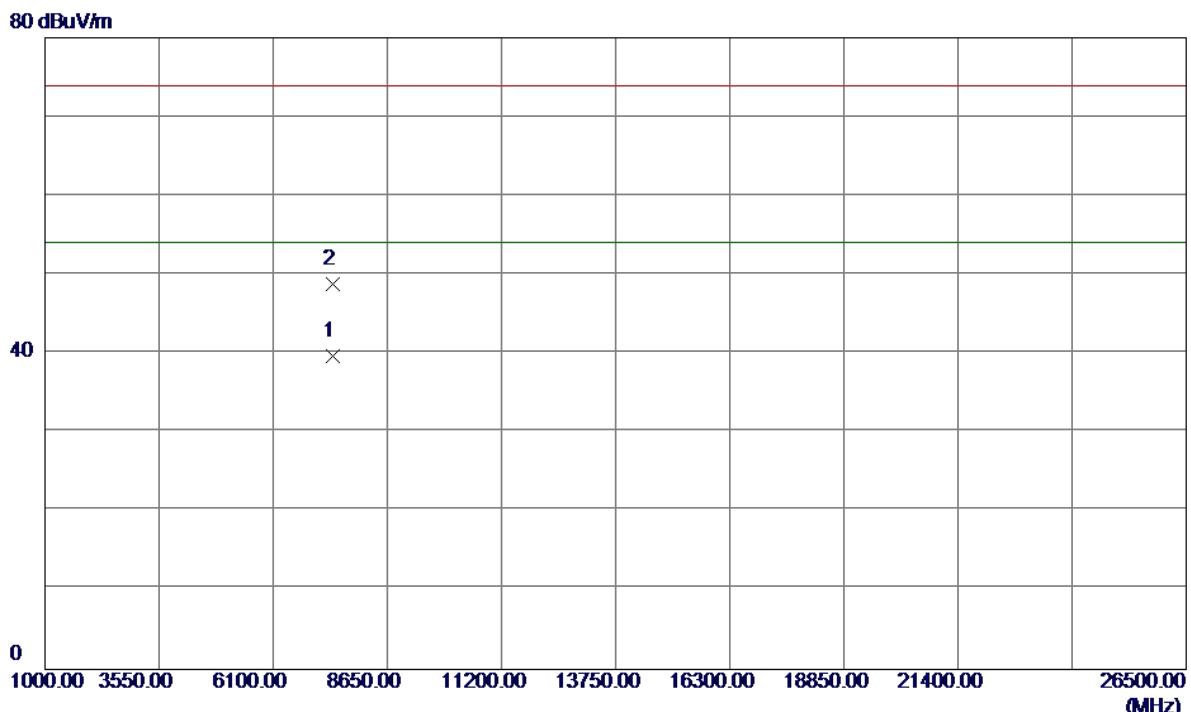

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	7439.4200	27.98	11.63	39.61	54.00	-14.39	AVG	
2	7440.1050	37.20	11.63	48.83	74.00	-25.17	Peak	

Test Mode : TX 2480MHz \_CH39\_1Mbps


## Horizontal

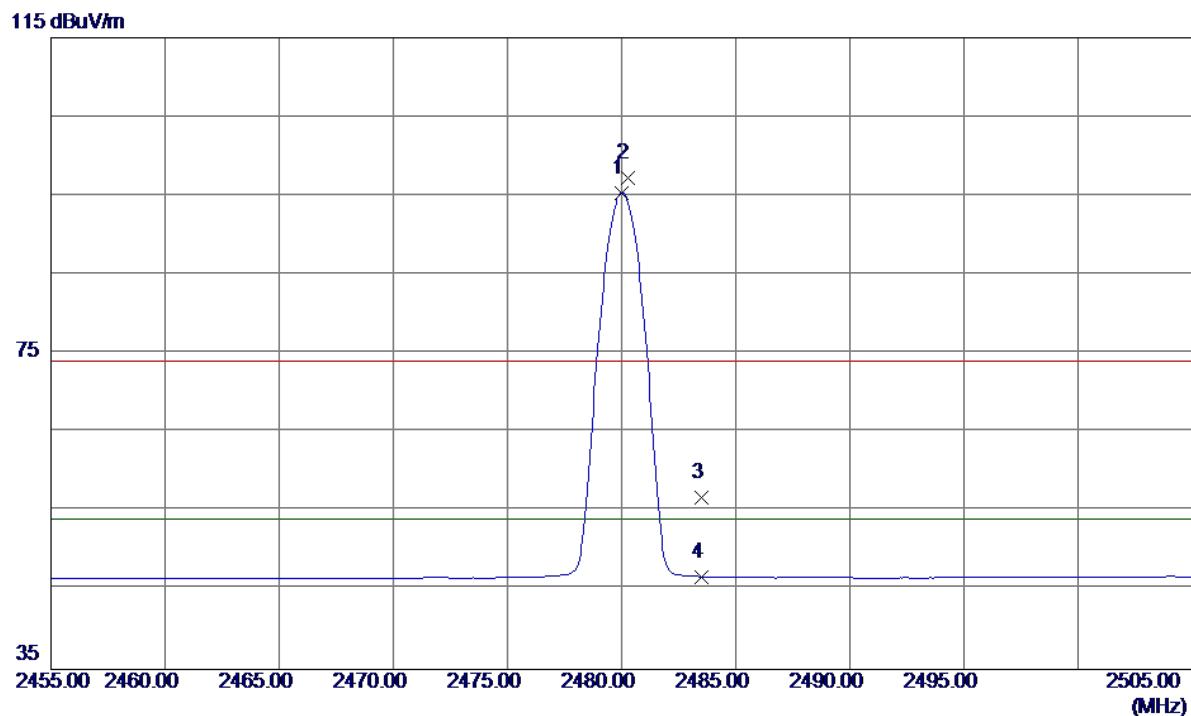

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	2480.0000	61.96	33.39	95.35	54.00	41.35	AVG	No Limit
2	2480.2500	63.83	33.39	97.22	74.00	23.22	Peak	No Limit
3	2483.5000	23.35	33.40	56.75	74.00	-17.25	Peak	
4	2483.5000	13.34	33.40	46.74	54.00	-7.26	AVG	

Test Mode : TX 2480MHz \_CH39\_1Mbps

## Horizontal

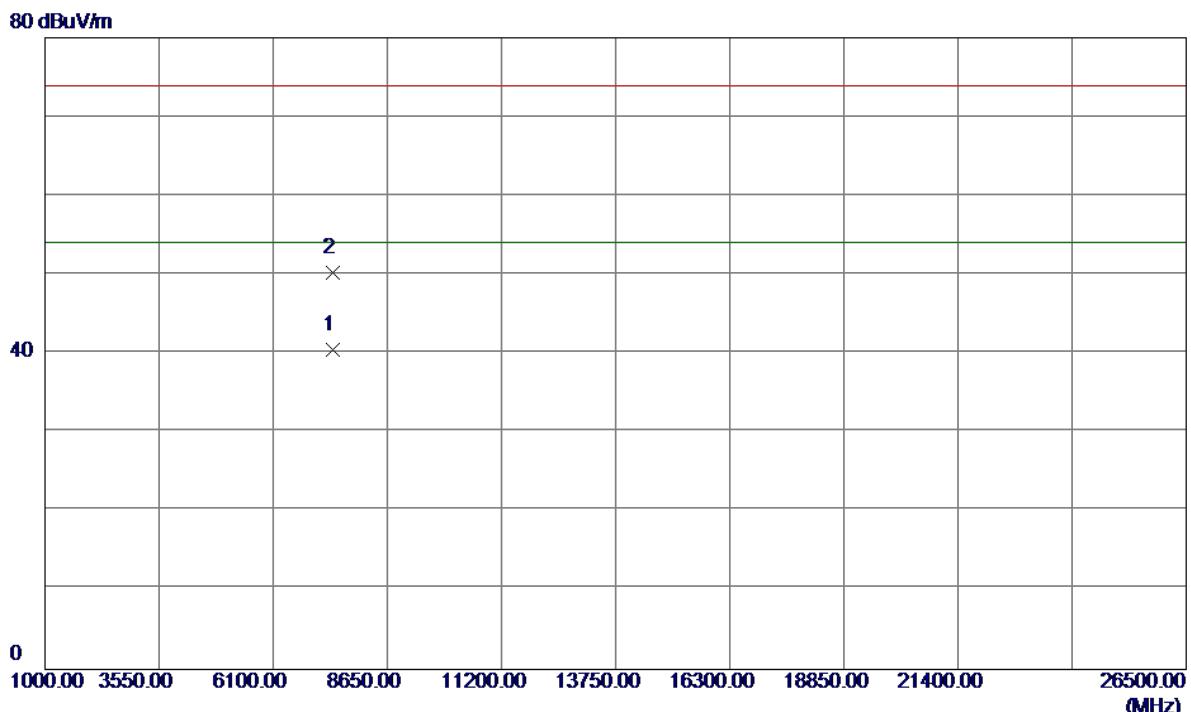


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	7440.7340	28.84	11.63	40.47	54.00	-13.53	AVG	
2	7441.2270	38.60	11.63	50.23	74.00	-23.77	Peak	

## ATTACHMENT E - BANDWIDTH

Test Mode:	TX Mode
------------	---------


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.626	1.032	500	Pass
2440	0.627	1.036	500	Pass
2480	0.648	1.040	500	Pass

### TX CH00

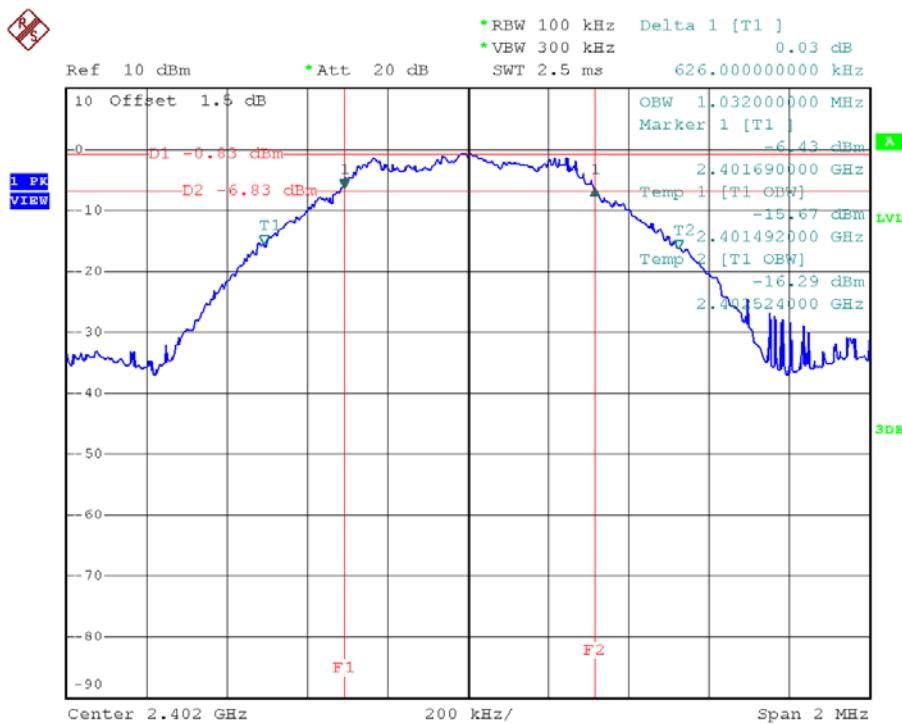


Date: 2.DEC.2016 14:00:04

## TX CH19

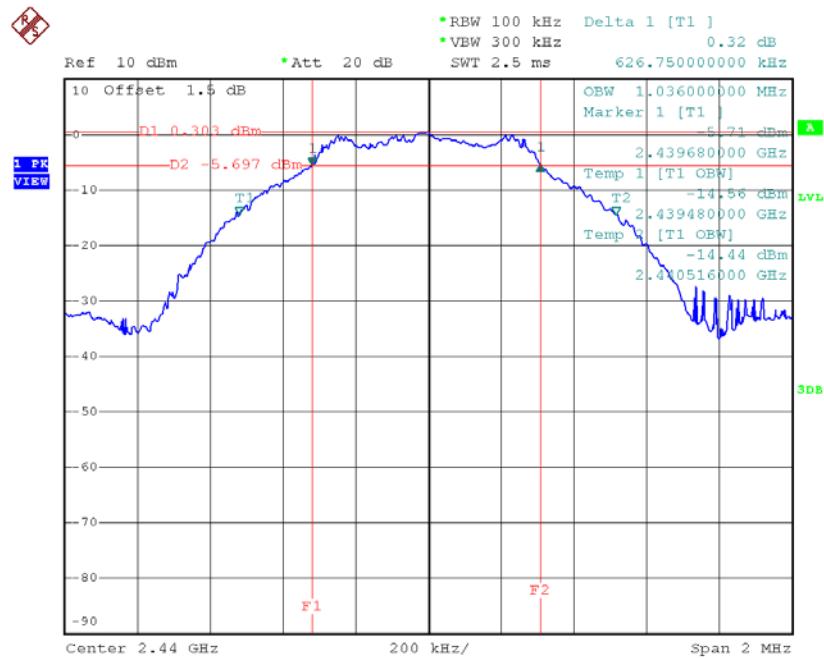

Date: 2.DEC.2016 14:02:52

## TX CH39

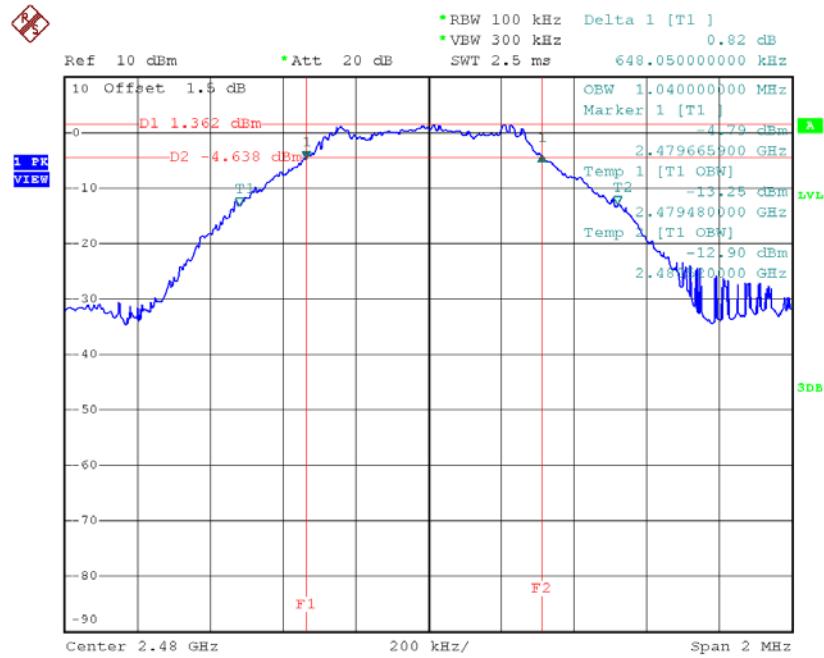

Date: 2.DEC.2016 13:56:28

**ATTACHMENT F - MAXIMUM OUTPUT POWER TEST**


Test Mode :	CH00, CH19 , CH39 - 1Mbps
-------------	---------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	-0.72	0.00085	30.00	1.00	Pass
2440	0.95	0.00124	30.00	1.00	Pass
2480	1.64	0.00146	30.00	1.00	Pass

## **ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION**


Test Mode : CH00, CH19 , CH39 - 1Mbps

### CH00 (Lower) - 1Mbps

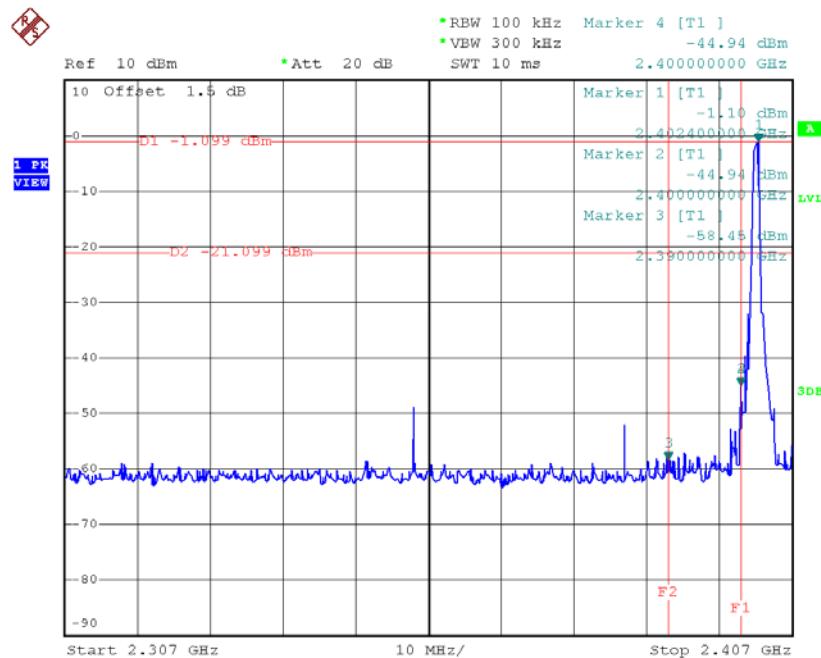


Date: 2.DEC.2016 14:00:12


### CH39 (upper) - 1Mbps

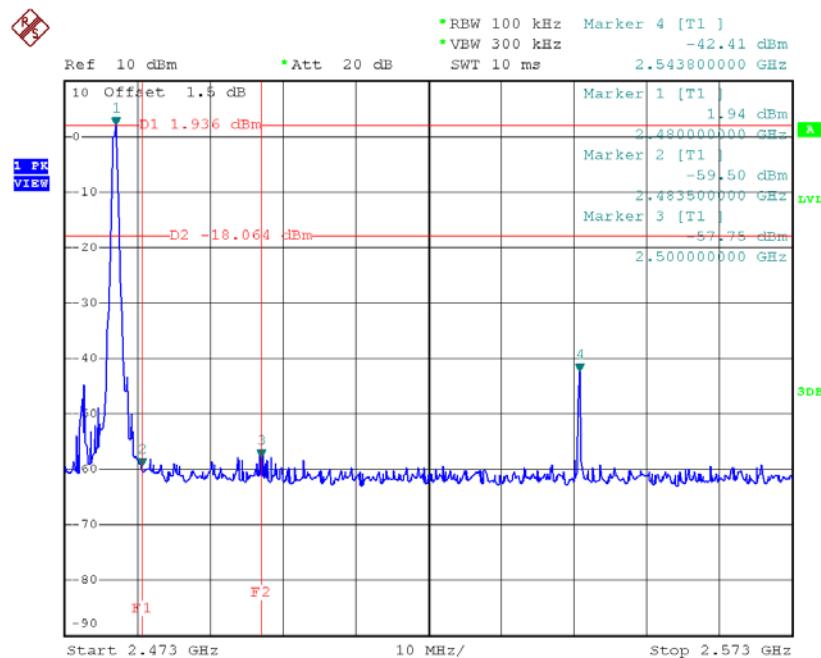

Date: 2.DEC.2016 13:56:36

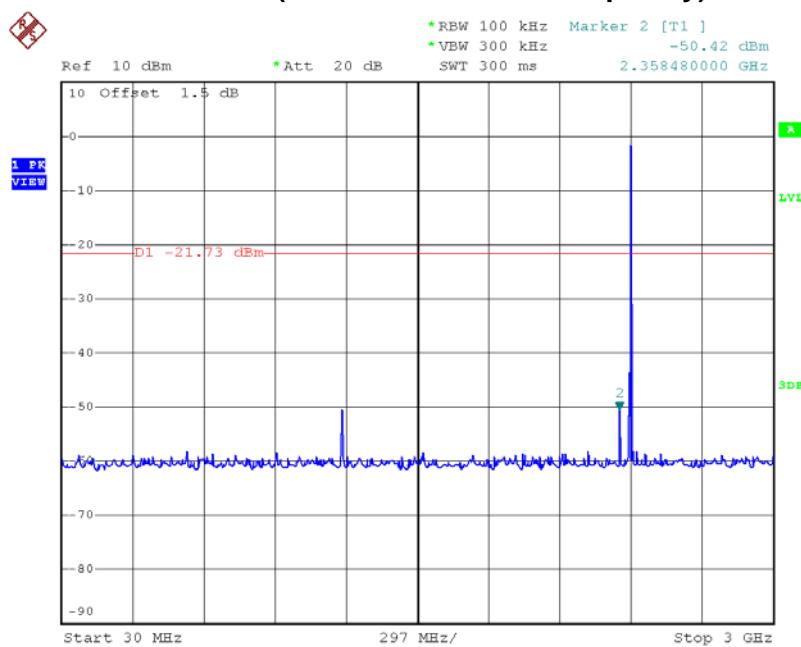
**CH00 (10 Harmonic of the frequency) 1**

Date: 2.DEC.2016 14:00:26

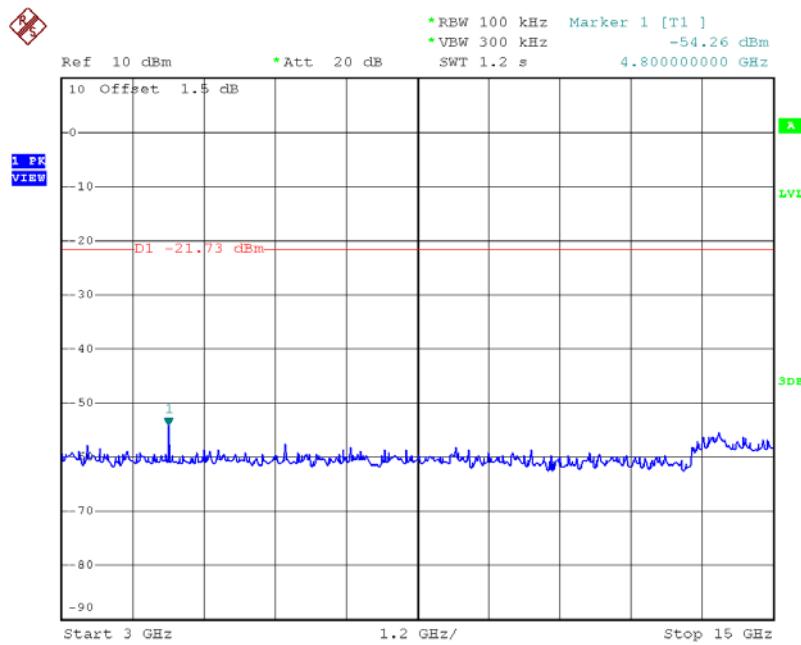**CH00 (10 Harmonic of the frequency) 2**


Date: 2.DEC.2016 14:00:34

### CH00 (10 Harmonic of the frequency) 3

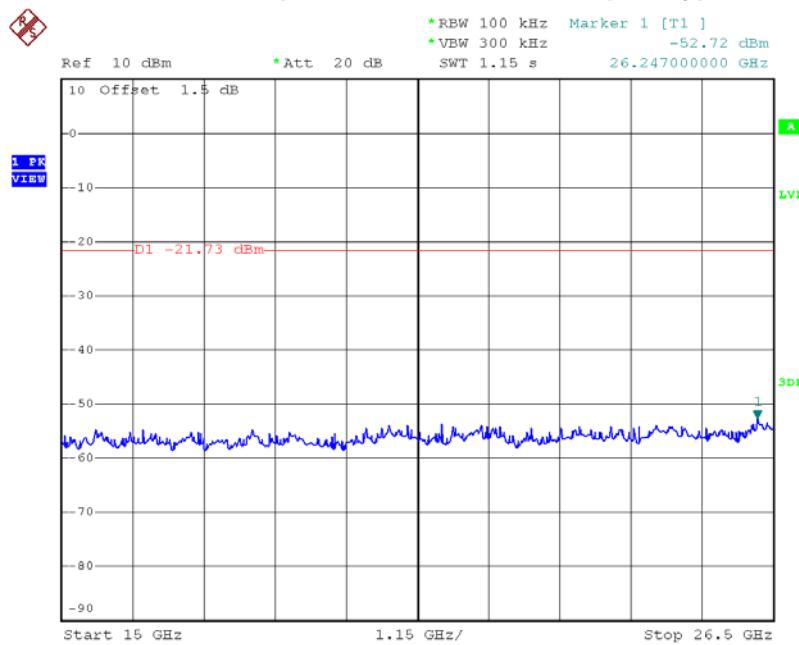


Date: 2.DEC.2016 14:00:43

### CH19 (10 Harmonic of the frequency) 1

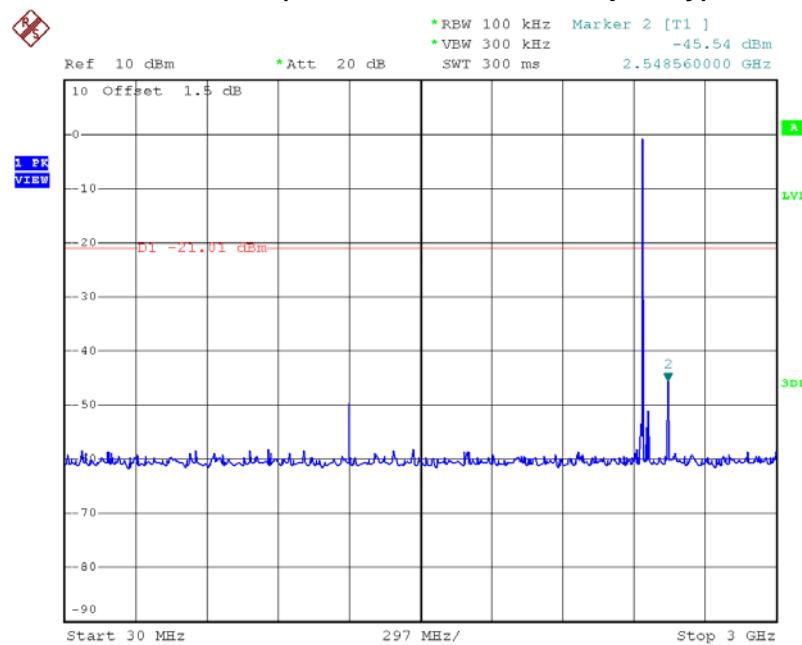


Date: 2.DEC.2016 14:03:06

### CH19 (10 Harmonic of the frequency) 2

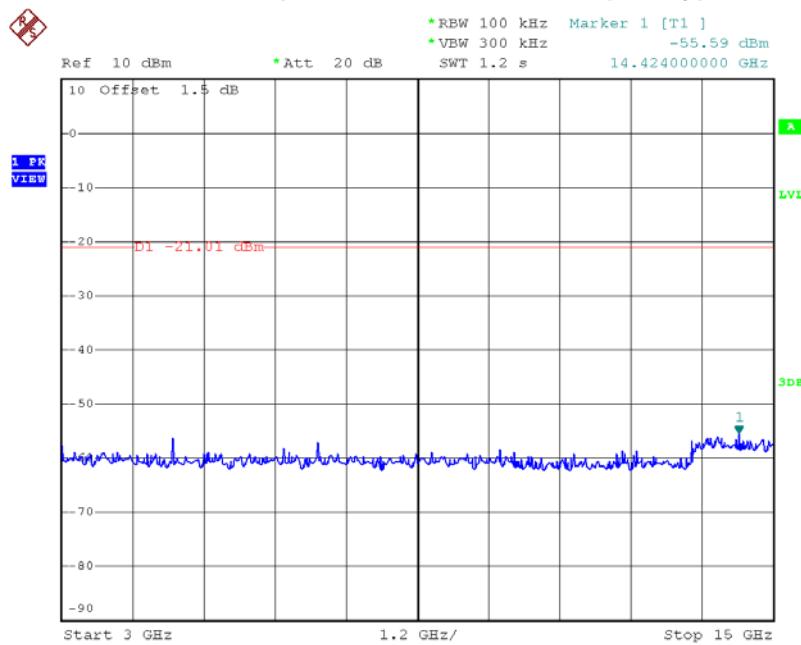


Date: 2.DEC.2016 14:03:14

### CH19 (10 Harmonic of the frequency) 3

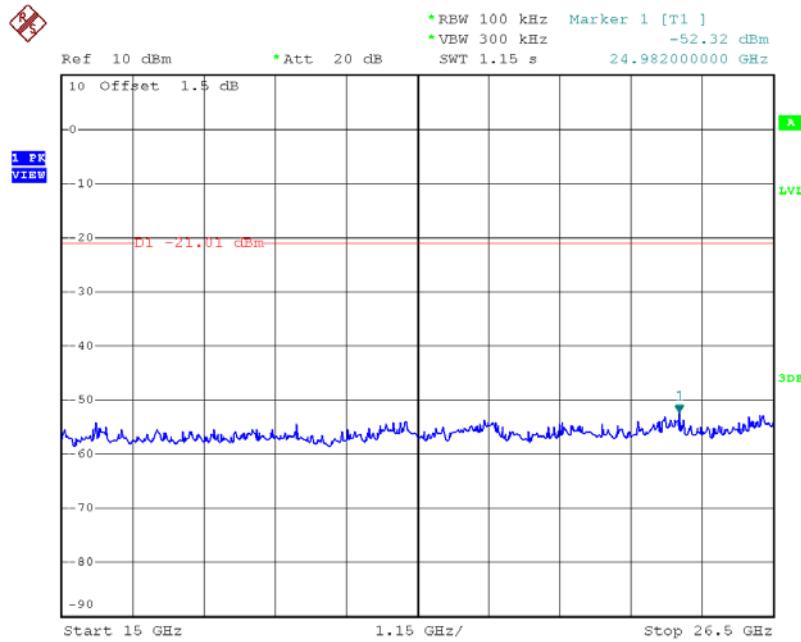


Date: 2.DEC.2016 14:03:23

## CH39 (10 Harmonic of the frequency) 1

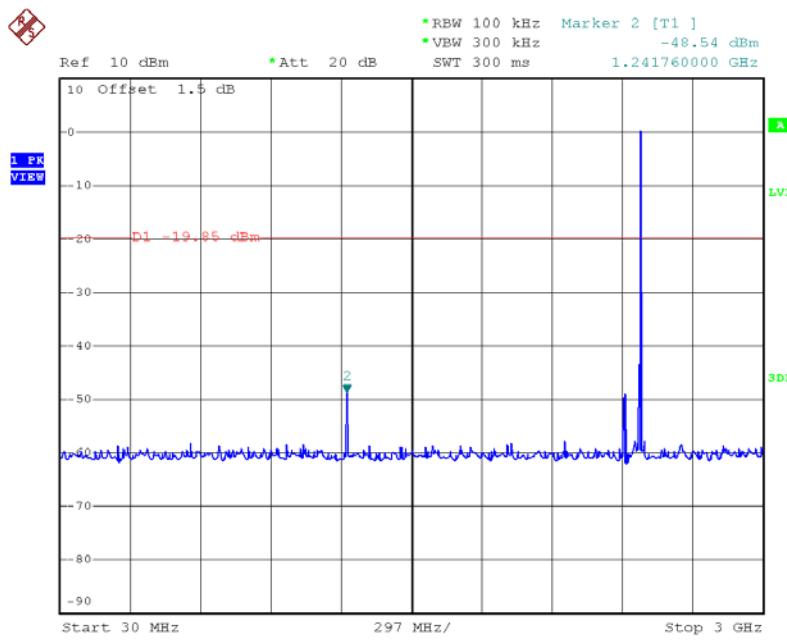


Date: 2.DEC.2016 13:56:50

## CH39 (10 Harmonic of the frequency) 2

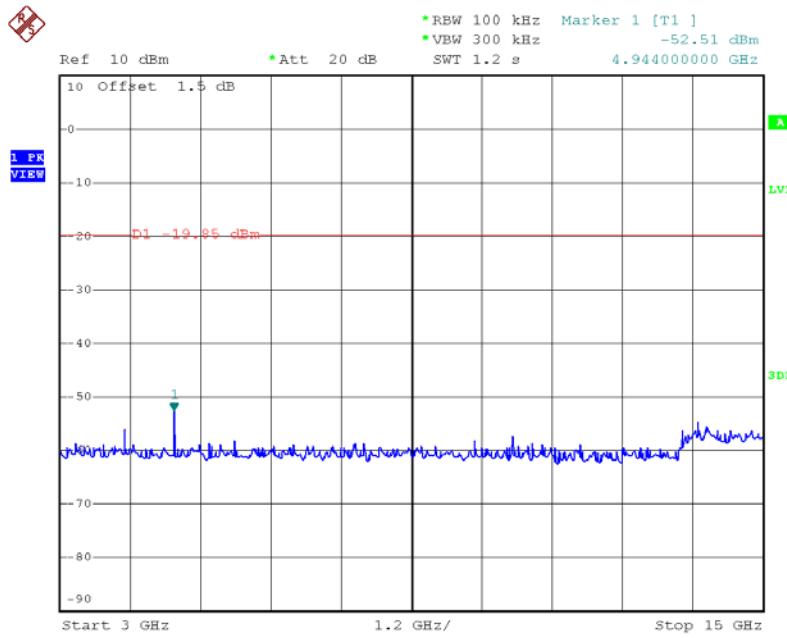

Date: 2.DEC.2016 13:56:59

## CH39 (10 Harmonic of the frequency) 3

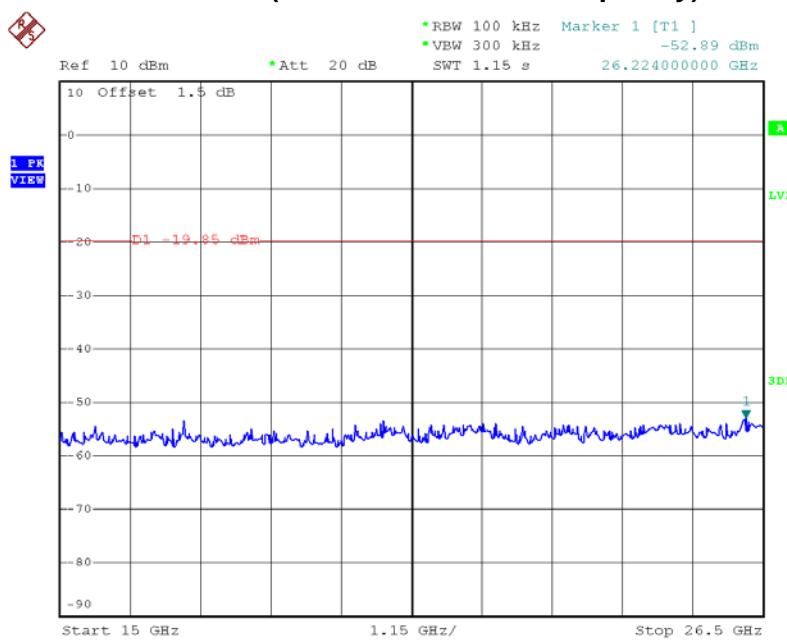


Date: 2.DEC.2016 13:57:07

## ATTACHMENT H - POWER SPECTRAL DENSITY TEST

Test Mode:	CH00, CH19 , CH39 - 1Mbps
------------	---------------------------


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-14.00	0.040	8.00	Pass
2440	-12.64	0.054	8.00	Pass
2480	-10.15	0.097	8.00	Pass

### TX CH00

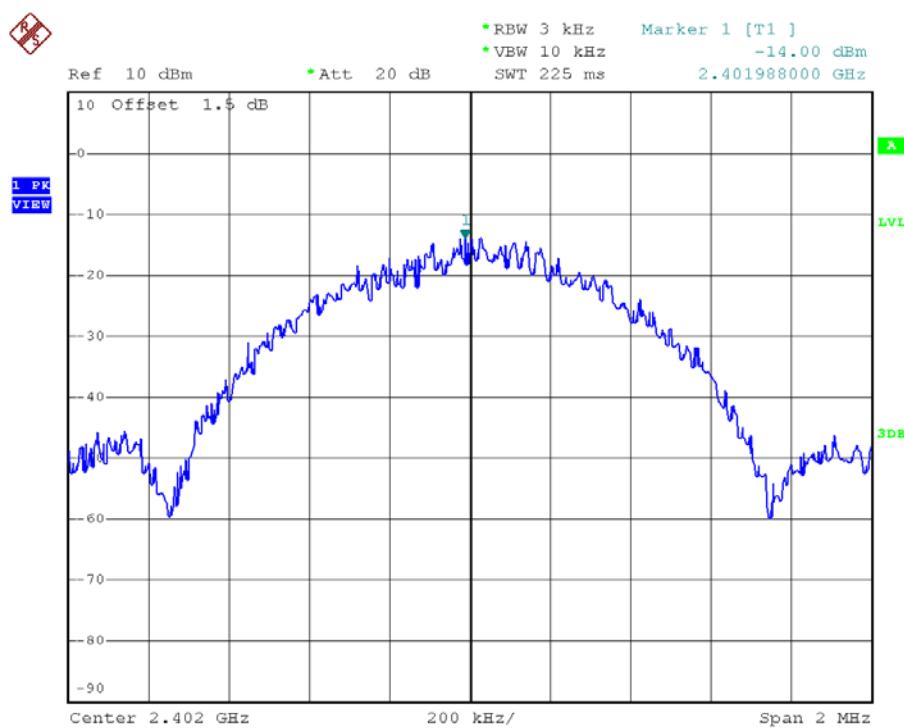


Date: 2.DEC.2016 14:00:49

## TX CH19

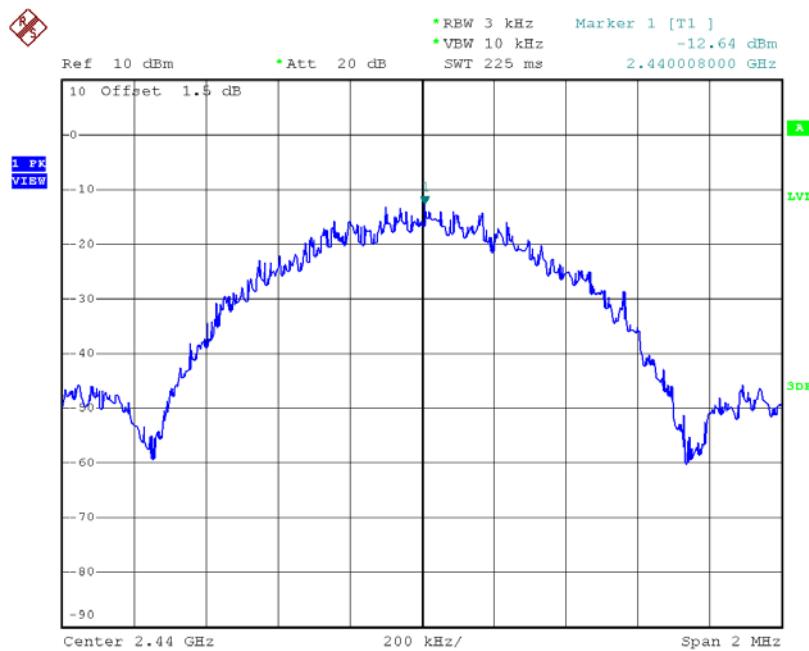

Date: 2.DEC.2016 14:03:29

## TX CH39

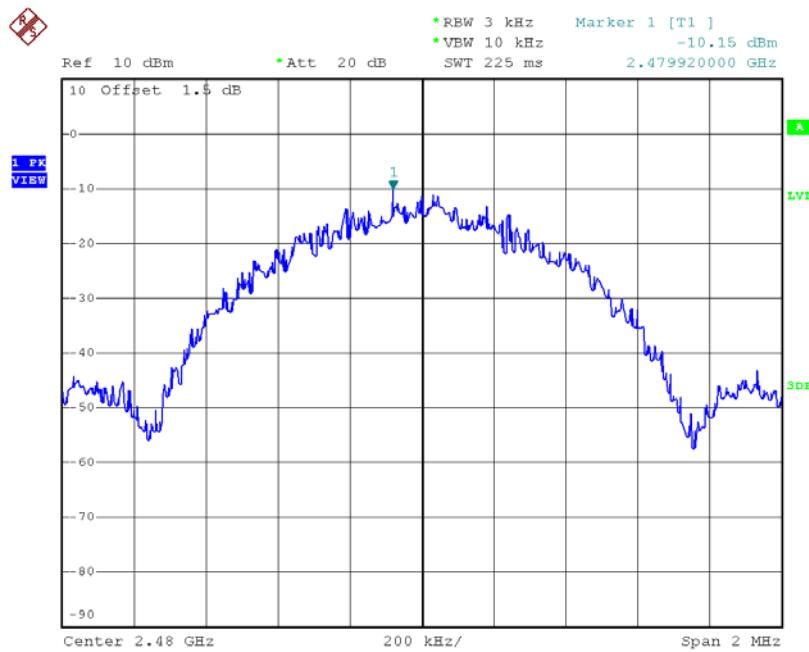

Date: 2.DEC.2016 13:57:13