

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Smart Phone

ISSUED TO
Xplore Technologies Corp.

8601 Ranch Rd. 2222, Building 2, Austin, TX 78730 USA



Tested by:

Zouliu

ou Liu

(Engineer)

Date

Jun. 29, 2018

Approved by:

Wei Yanouan

Wei Yanouan

(Chief Engineer)

Date

Jun. 29, 2018

Report No.: BL-EC1850443-601
EUT Name: Smart Phone
Model Name: M6
Brand Name: Xplore
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen (Issue 4, November 2014)
RSS-247 (Issue 2, February 2017)
FCC ID: Q2GIX006M1
ISED Number: 4596A-IX006M1
Test conclusion: Pass
Test Date: May 29, 2018 ~ Jun. 01, 2018
Date of Issue: Jun. 05, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jun. 05, 2018</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information.....	6
2.3	Factory Information.....	6
2.4	General Description for Equipment under Test (EUT).....	6
2.5	Ancillary Equipment.....	7
2.6	Technical Information	7
2.7	Additional Instructions	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict.....	11
4	GENERAL TEST CONFIGURATIONS	13
4.1	Test Environments.....	13
4.2	Test Equipment List.....	13
4.3	Measurement Uncertainty.....	14
4.4	Description of Test Setup	15
4.4.1	For Antenna Port Test	15
4.4.2	For AC Power Supply Port Test.....	15
4.4.3	For Radiated Test (Below 30 MHz).....	16
4.4.4	For Radiated Test (30 MHz-1 GHz)	16
4.4.5	For Radiated Test (Above 1 GHz)	17
4.5	Measurement Results Explanation Example.....	18

4.5.1	For conducted test items:	18
4.5.2	For radiated band edges and spurious emission test:	18
5	TEST ITEMS	19
5.1	Antenna Requirements	19
5.1.1	Relevant Standards	19
5.1.2	Antenna Anti-Replacement Construction	19
5.1.3	Antenna Gain	20
5.2	Number of Hopping Frequencies	21
5.2.1	Limit	21
5.2.2	Test Setup	21
5.2.3	Test Procedure	21
5.2.4	Test Result	21
5.3	Peak Output Power and E.I.R.P	22
5.3.1	Test Limit	22
5.3.2	Test Setup	22
5.3.3	Test Procedure	22
5.3.4	Test Result	22
5.4	Occupied Bandwidth	23
5.4.1	Limit	23
5.4.2	Test Setup	23
5.4.3	Test Procedure	23
5.4.4	Test Result	23
5.5	Carrier Frequency Separation	24
5.5.1	Limit	24
5.5.2	Test Setup	24
5.5.3	Test Procedure	24
5.5.4	Test Result	24
5.6	Time of Occupancy (Dwell time)	25
5.6.1	Limit	25
5.6.2	Test Setup	25
5.6.3	Test Procedure	25
5.6.4	Test Result	25
5.7	Conducted Spurious Emission & Authorized-band band-edge	26

5.7.1	Limit.....	26
5.7.2	Test Setup.....	26
5.7.3	Test Procedure.....	26
5.7.4	Test Result.....	26
5.8	Conducted Emission.....	27
5.8.1	Limit.....	27
5.8.2	Test Setup.....	27
5.8.3	Test Procedure.....	27
5.8.4	Test Result.....	27
5.9	Radiated Spurious Emission.....	28
5.9.1	Limit.....	28
5.9.2	Test Setup.....	28
5.9.3	Test Procedure.....	28
5.9.4	Test Result.....	29
5.10	Band Edge (Restricted-band band-edge).....	30
5.10.1	Limit.....	30
5.10.2	Test Setup.....	30
5.10.3	Test Procedure.....	30
5.10.4	Test Result.....	30
ANNEX A	TEST RESULT.....	31
A.1	Number of Hopping Frequency.....	31
A.2	Peak Output Power and E.I.R.P.....	31
A.3	20 dB and 99% bandwidth.....	31
A.4	Hopping Frequency Separation.....	31
A.5	Average Time of Occupancy.....	31
A.6	Conducted Spurious Emissions & Authorized-band band-edge.....	31
A.7	Conducted Emissions.....	31
A.8	Radiated Spurious Emission.....	32
A.9	Band Edge (Restricted-band band-edge).....	38
ANNEX B	TEST SETUP PHOTOS.....	39
ANNEX C	EUT EXTERNAL PHOTOS.....	39
ANNEX D	EUT INTERNAL PHOTOS.....	39

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.9.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Xplore Technologies Corp.
Address	8601 Ranch Rd. 2222, Building 2, Austin, TX 78730 USA

2.2 Manufacturer Information

Manufacturer	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B,4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Smart Phone
Model Name Under Test	M6
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	M6_V104
Software Version	M6_V1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	SJYEnergy
	Model No.	BA7800
	Serial No.	N/A
	Capacity	8000 mAh
	Rated Voltage	3.8 V
	Limit Charge Voltage	4.35 V
Ancillary Equipment 2 ^{Note}	Adapter	
	Brand Name	N/A
	Model No.	ASUC71w-050912300
	Serial No.	ASUC71z-050912300 (z= a, e, i, w)
	Rated Input	100-240 V~, 0.7 A, 50/60 Hz
	Rated Output	5 V= 3 A or 9 V= 2 A or 12 V= 1.5 A
Ancillary Equipment 3	Barcode Scanner	
Ancillary Equipment 4	Wrist Belt	
Ancillary Equipment 5	USB Cable	
	Length (Approx.)	1.0 m
Note: All adapter are same with electrical parameters and internal circuit structure, but only differ in model name and plug type. Adapter ASUC71w-050912300 was tested in this report.		

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/900/1800/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 1/2/5/8, 4G Network FDD LTE Band 1/2/3/4/5/7/8/17/20/28 TDD LTE Band 38/40/41 CDMA2000 800 MHz Bluetooth 4.0 (BR+EDR+BLE), WIFI 802.11b, 802.11g and 802.11n (HT20), 802.11ac, GPS, GLONASS, NFC, BDS
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	1.5 dBi (In test items related to antenna gain, the final results reflect this figure.)

Antenna System(MIMO
Smart Antenna)

N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.7 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	adb		
Support Units (Software installation media)	Description	Manufacturer	Model
	Laptop	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 7
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

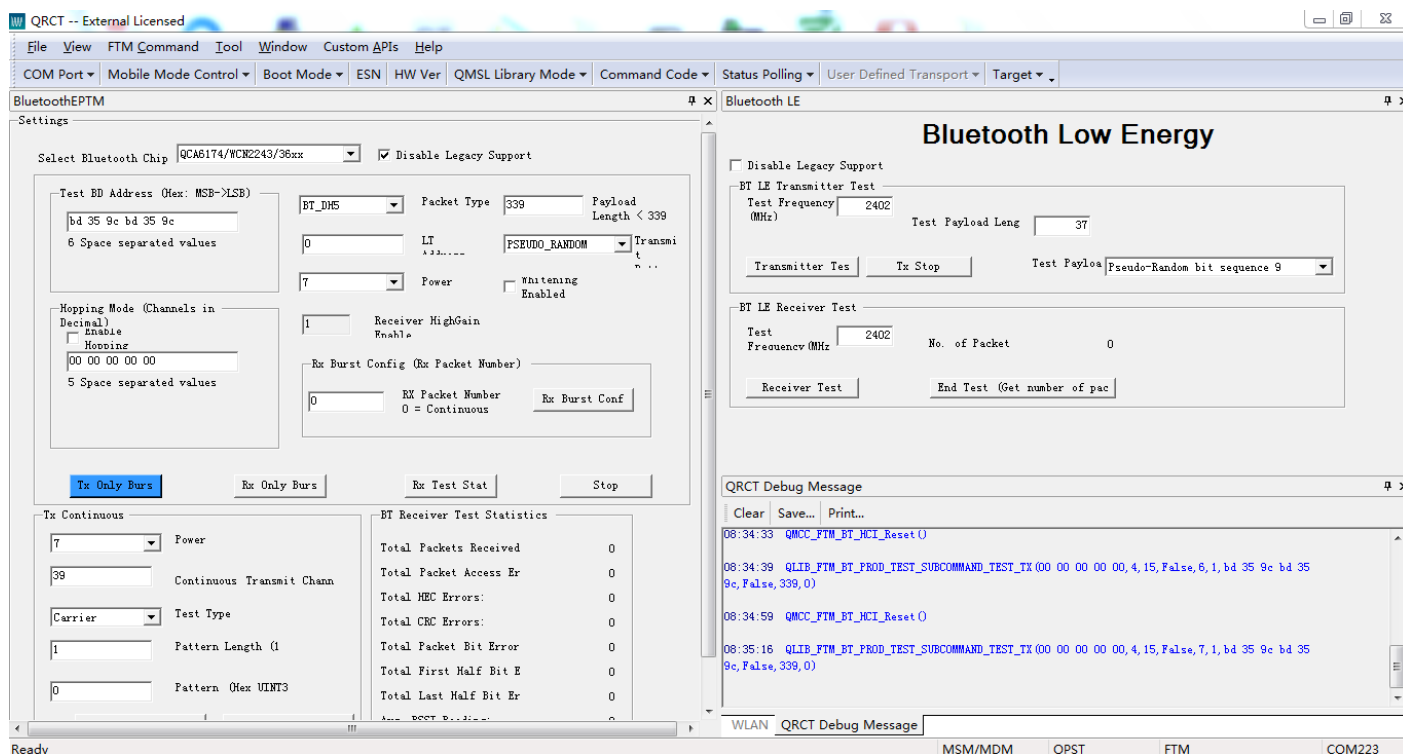

The screenshot displays the QRCT software interface, which is used for testing Bluetooth Low Energy (BLE) devices. The interface is divided into several sections:

- Bluetooth LE Settings:** This section allows users to configure the test parameters. Key settings include:
 - Test BD Address (Hex: MSB->LSB):** Set to "bd 35 9c bd 35 9c".
 - Packet Type:** Set to "339".
 - Test Frequency (MHz):** Set to "2402".
 - Test Payload Leng:** Set to "37".
 - Transmitter Test:** Includes buttons for "Transmitter Test" and "Tx Stop".
 - BT LE Receiver Test:** Includes buttons for "Receiver Test" and "End Test (Get number of pac)".
- Bluetooth Low Energy:** This section provides additional configuration options, including "Disable Legacy Support" and "Test Payload" (set to "Pseudo-Random bit sequence 9").
- QRCT Debug Message:** A log window showing the test results and status messages. The log includes:
 - 08:34:33 QMCC_FTM_BT_HCI_Reset()
 - 08:34:39 QLIB_FTM_BT_PROD_TEST_SURCOMMAND_TEST_TX(00 00 00 00 00, 4, 15, False, 6, 1, bd 35 9c bd 35 9c, False, 339, 0)
 - 08:34:59 QMCC_FTM_BT_HCI_Reset()
 - 08:35:16 QLIB_FTM_BT_PROD_TEST_SURCOMMAND_TEST_TX(00 00 00 00 00, 4, 15, False, 7, 1, bd 35 9c bd 35 9c, False, 339, 0)
- BT Receiver Test Statistics:** A table showing the performance of the receiver during the test. The statistics are as follows:

Statistic	Value
Total Packets Received	0
Total Packet Access Er	0
Total HEC Errors:	0
Total CRC Errors:	0
Total Packet Bit Error	0
Total First Half Bit E	0
Total Last Half Bit Er	0

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	RSS-Gen (Issue 4, Nov. 2014)	General Requirements for Compliance of Radio Apparatus
4	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exemp Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (2)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (1)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (2)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	--	N/A	Note ³

Note¹: Please refer to section 5.1

Note²: Because of the modulation of $\Pi/4$ -DQPSK same as 8-DPSK, and the test results are basically the same with them, so we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item

Note³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note⁴: The only difference between the EUT (test samples in this report) and testing sample of report No. BL-EC1830166-601, which was issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 is that added ancillary equipment (added the barcode scanner and wrist belt). And EUT is the same. Therefore, only Radiated Spurious Emission is tested, and other test result please refer to report No. EC1830166-601, which was issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2017.06.12	2018.06.11
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2017.06.12	2018.06.11
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2017.09.07	2018.09.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2017.06.22	2018.06.21
LISN	SCHWARZBECK	NSLK 8127	8127-687	2017.06.22	2018.06.21
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2017.06.12	2018.06.11
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2017.06.12	2018.06.11
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2017.06.22	2018.06.21
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2017.06.27	2018.06.26
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.07	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2016.07.12	2018.07.11
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2017.06.22	2018.06.21
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	N/A	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2017.06.12	2018.06.11
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Feld Strength Meter	Narda	EP601	511WX5112 9	2018.05.21	2019.05.20
Mouth Simulator	B&K	4227	2423931	2017.11.16	2018.11.15
Sound Calibrator	B&K	4231	2430337	2017.11.16	2018.11.15
Sound Level Meter	B&K	NL-20	00844023	2017.11.16	2018.11.15
Ear Simulator	B&K	4185	2409449	2017.11.16	2018.11.15
Ear Simulator	B&K	4195	2418189	2017.11.16	2018.11.15
Audio analyzer	B&K	UPL 16	100129	2017.11.16	2018.11.15

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

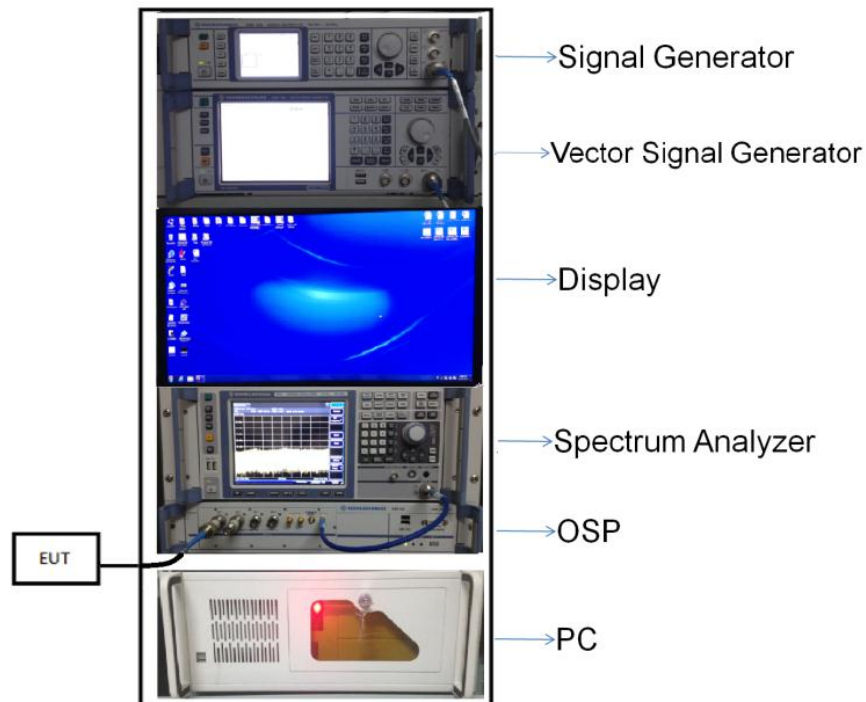


(Diagram 1)

4.4.2 For AC Power Supply Port Test

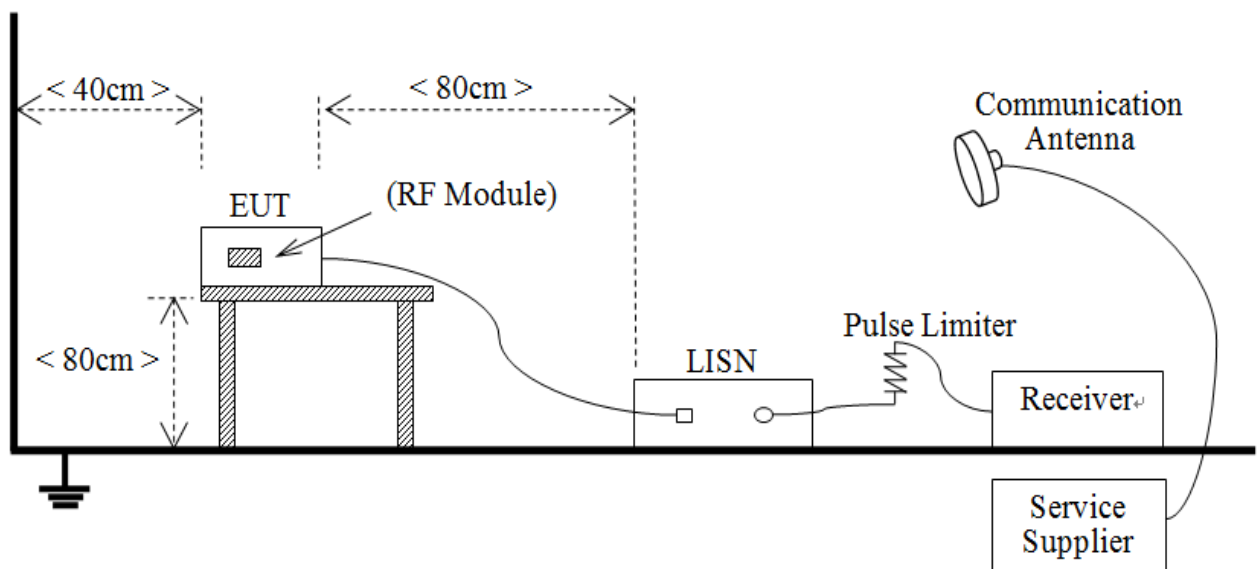


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

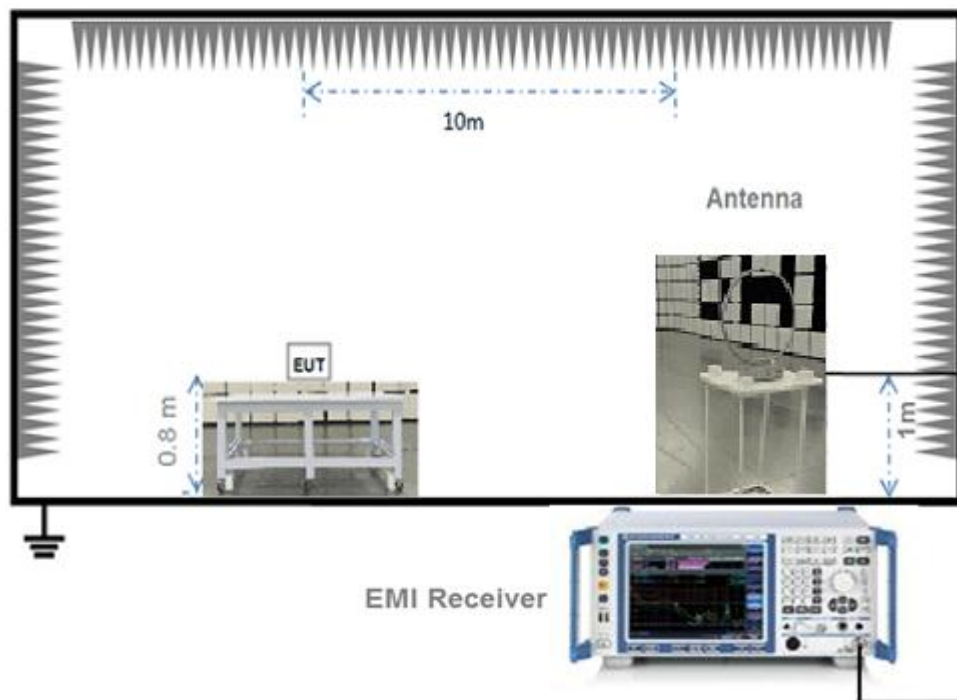


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

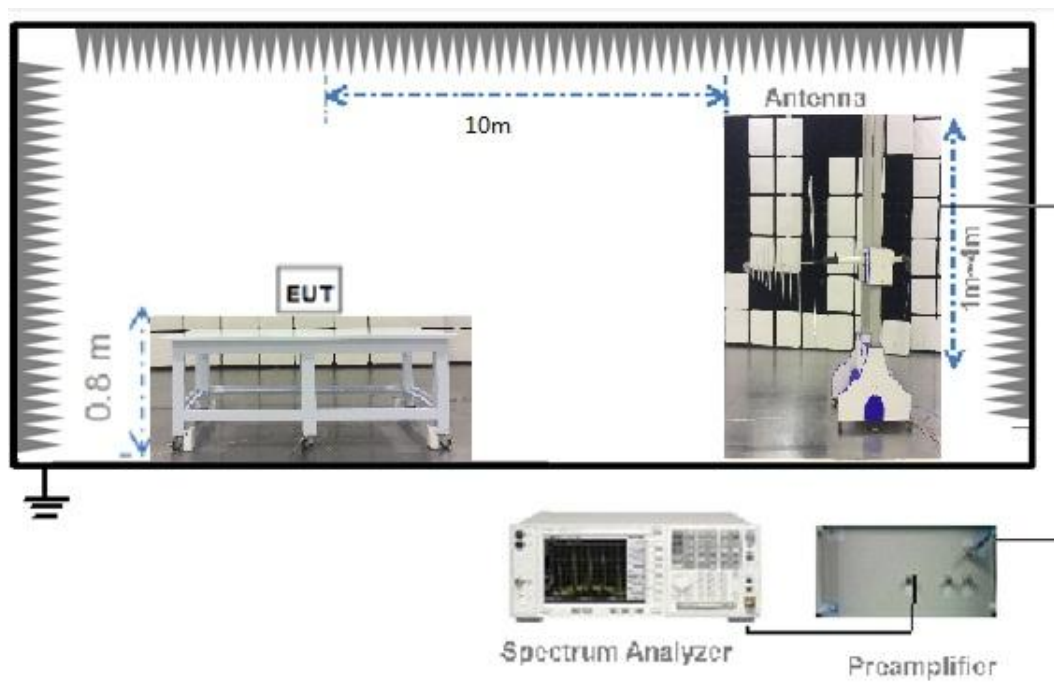

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

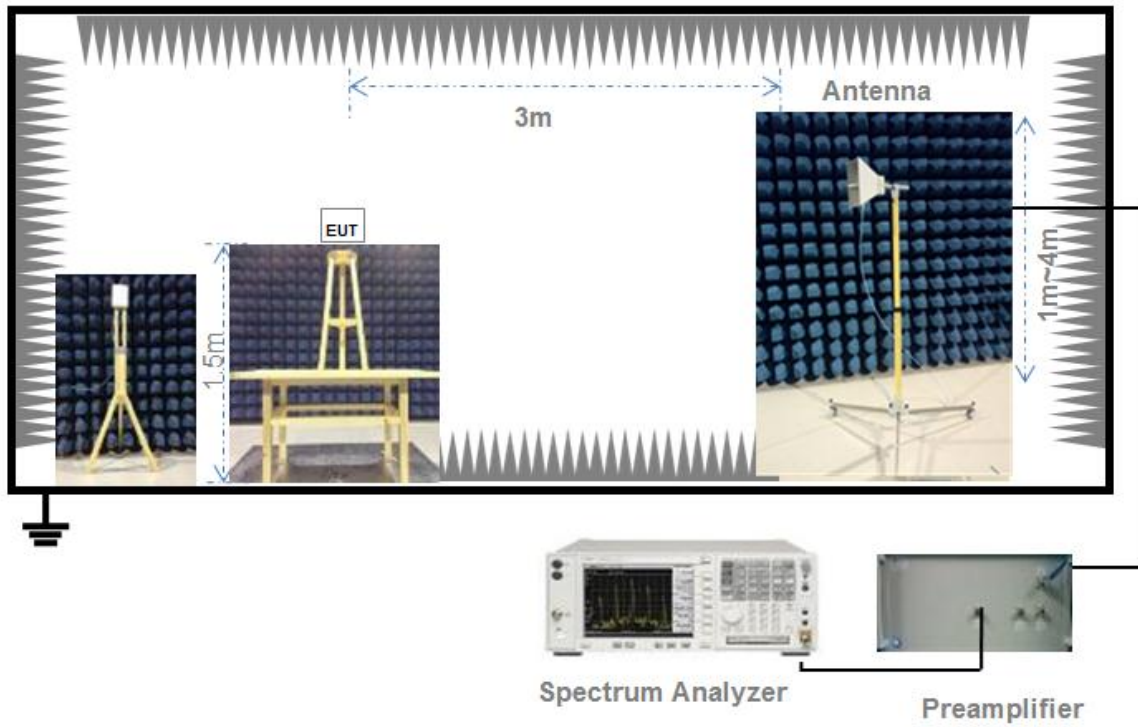

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)

= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards


FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

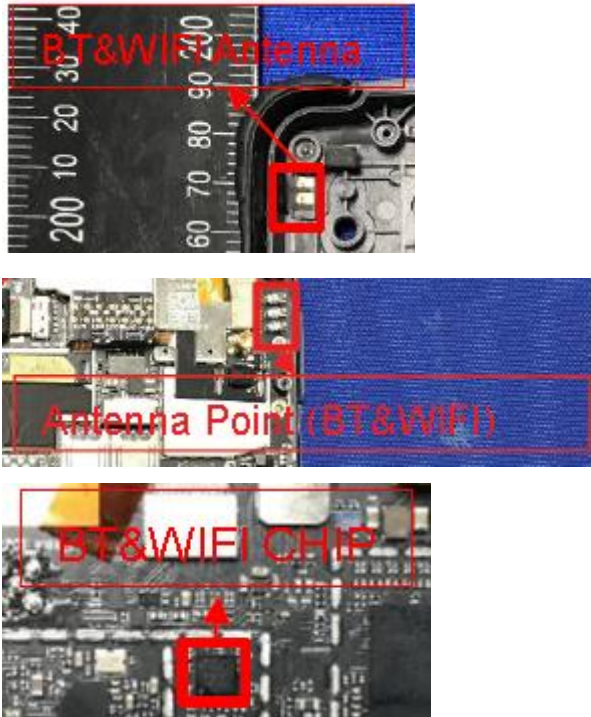Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer
Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT

A.1 Number of Hopping Frequency

Note: Number of Hopping Frequency test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.1 Number of Hopping Frequency.

A.2 Peak Output Power and E.I.R.P

Note: Peak Output Power and E.I.R.P test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.2 Peak Output Power and E.I.R.P.

A.3 20 dB and 99% bandwidth

Note: 20 dB and 99% bandwidth test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.3 20 dB and 99% bandwidth.

A.4 Hopping Frequency Separation

Note: Hopping Frequency Separation test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.4 Hopping Frequency Separation.

A.5 Average Time of Occupancy

Note: Average Time of Occupancy test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.5 Average Time of Occupancy.

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Note: Conducted Spurious Emissions & Authorized-band band-edge test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.6 Conducted Spurious Emissions & Authorized-band band-edge.

A.7 Conducted Emissions

Note: Conducted Emissions test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.7 Conducted Emissions.

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz.


Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB).

Note⁵: This report only shown validation tests, and the all configuration test data please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.8 Radiated Spurious Emission.

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

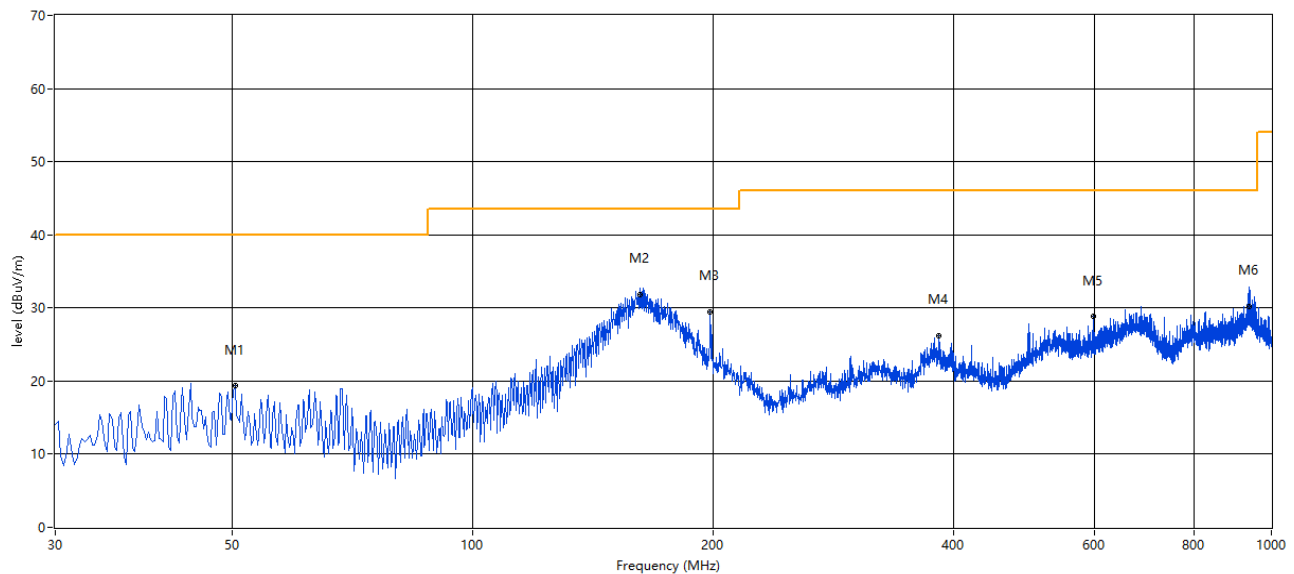

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	50.365	19.36	-26.62	40.0	20.64	Peak	46.00	100	Vertical	Pass
2	162.129	32.68	-31.45	43.5	10.82	Peak	269.00	100	Vertical	Pass
2*	162.129	31.89	-31.45	43.5	11.61	QP	269.00	187	Vertical	Pass
3	198.253	29.50	-28.79	43.5	14.00	Peak	345.00	100	Vertical	Pass
4	383.719	26.15	-24.57	46.0	19.85	Peak	290.00	200	Vertical	Pass
5	598.520	28.80	-19.01	46.0	17.20	Peak	342.00	100	Vertical	Pass
6	937.936	32.85	-13.07	46.0	13.15	Peak	3.00	100	Vertical	Pass
6*	937.936	30.15	-13.07	46.0	15.85	QP	3.00	200	Vertical	Pass

30 MHz to 1 GHz, ANT H

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

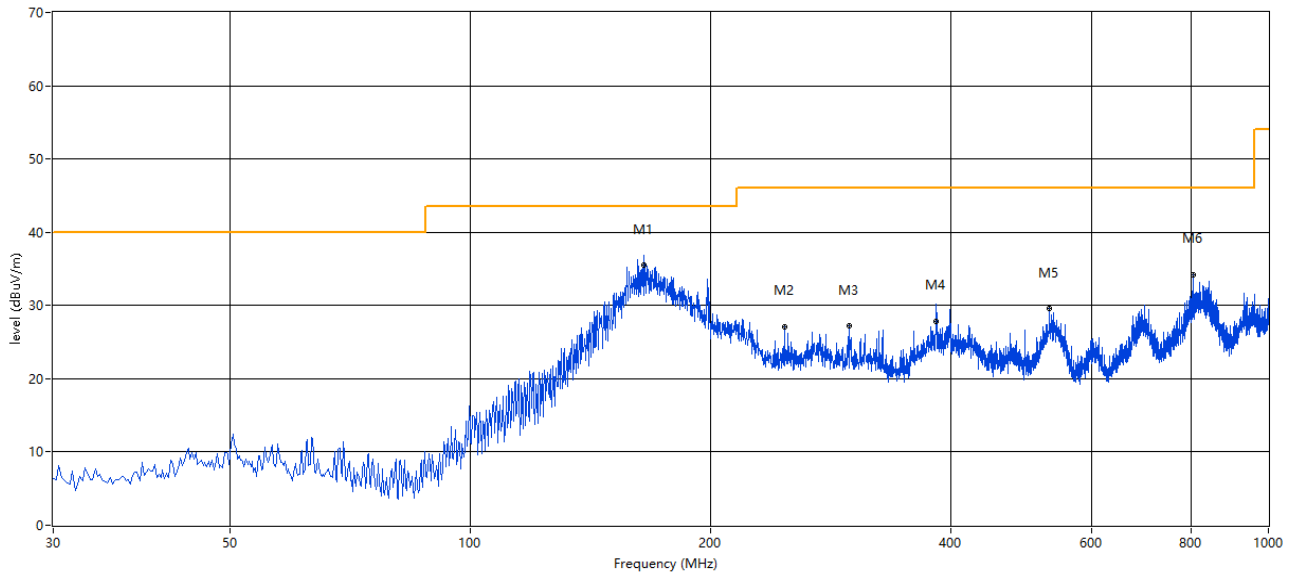


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	165.039	36.80	-31.34	43.5	6.70	Peak	340.00	100	Horizontal	Pass
1*	165.039	35.53	-31.34	43.5	7.97	QP	340.00	100	Horizontal	Pass
2	247.468	27.13	-27.35	46.0	18.87	Peak	17.00	100	Horizontal	Pass
3	298.138	27.29	-26.70	46.0	18.71	Peak	151.00	100	Horizontal	Pass
4	382.992	30.14	-24.59	46.0	15.86	Peak	228.00	100	Horizontal	Pass
4*	382.992	27.75	-24.59	46.0	18.25	QP	228.00	100	Horizontal	Pass
5	532.092	29.59	-20.95	46.0	16.41	Peak	261.00	100	Horizontal	Pass
6	804.594	34.23	-15.34	46.0	11.77	Peak	154.00	100	Horizontal	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

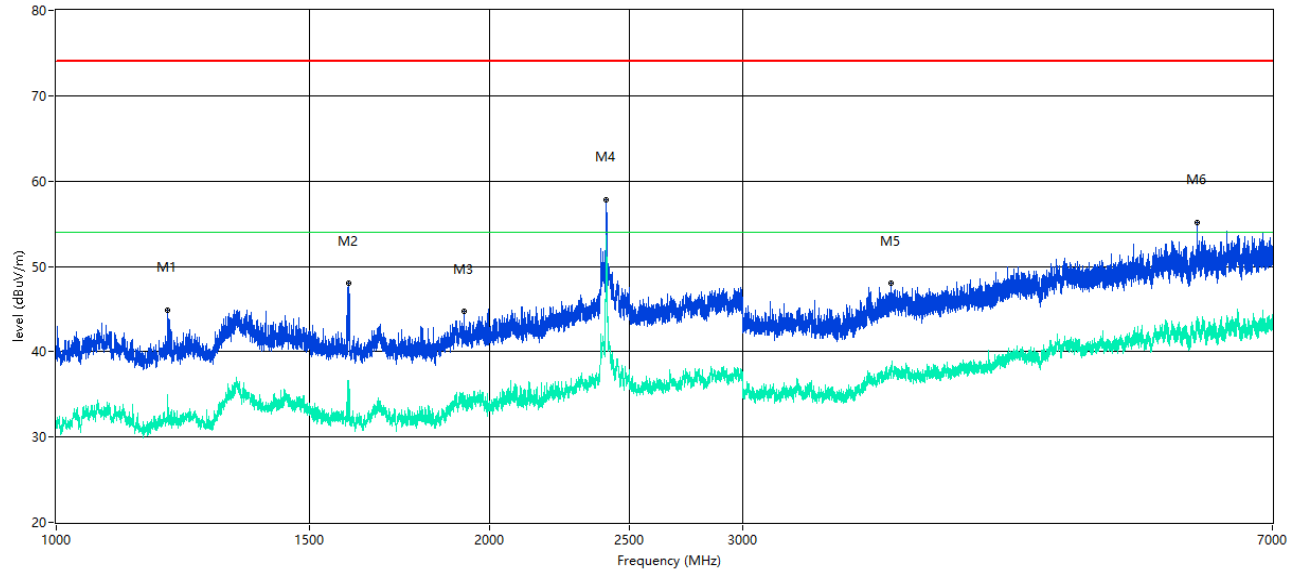

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1194.726	34.0	-12.15	54.0	20.00	AV	164.00	100	Vertical	Pass
1	1194.726	44.90	-12.15	74.0	29.10	Peak	164.00	100	Vertical	Pass
2**	1595.926	36.5	-12.24	54.0	17.50	AV	351.00	100	Vertical	Pass
2	1595.926	48.01	-12.24	74.0	25.99	Peak	351.00	100	Vertical	Pass
3**	1921.885	34.2	-9.59	54.0	19.80	AV	106.00	100	Vertical	Pass
3	1921.885	44.71	-9.59	74.0	29.29	Peak	106.00	100	Vertical	Pass
4**	2440.824	53.6	-0.44	54.0	0.40	AV	93.00	100	Vertical	N.A
4	2440.824	57.86	-0.44	74.0	16.14	Peak	93.00	100	Vertical	N.A
5**	3803.900	37.8	-2.64	54.0	16.20	AV	186.00	100	Vertical	Pass
5	3803.900	48.02	-2.64	74.0	25.98	Peak	186.00	100	Vertical	Pass
6**	6205.974	43.9	4.42	54.0	10.10	AV	296.00	100	Vertical	Pass
6	6205.974	55.15	4.42	74.0	18.85	Peak	296.00	100	Vertical	Pass

1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

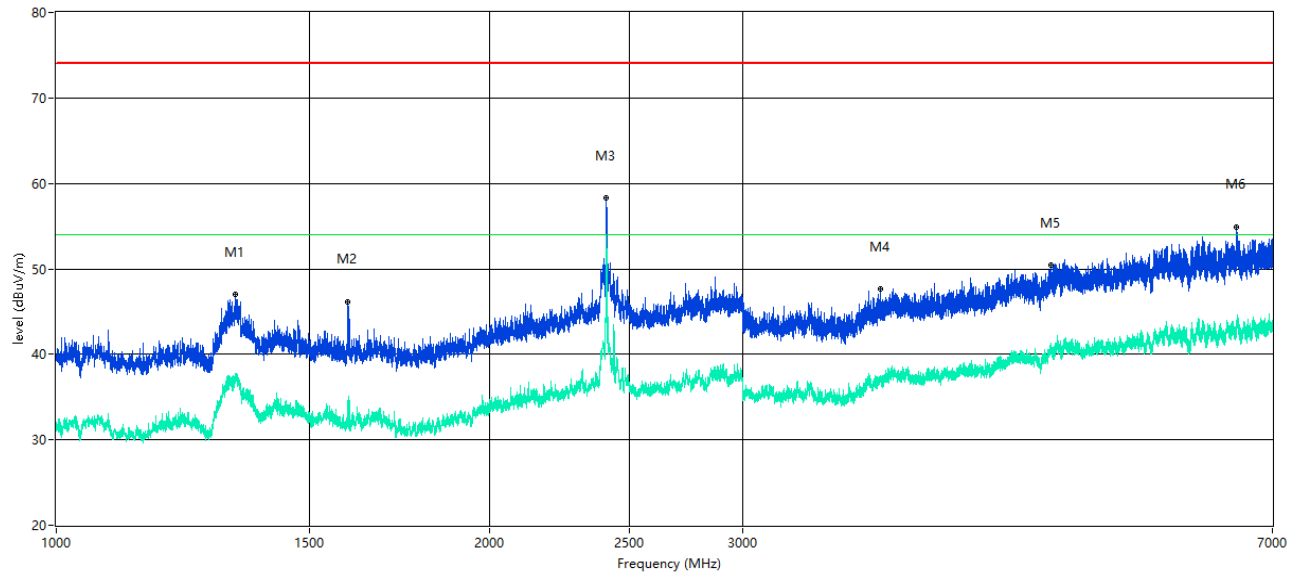

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1332.708	36.8	-11.82	54.0	17.20	AV	231.00	100	Horizontal	Pass
1	1332.708	47.04	-11.82	74.0	26.96	Peak	231.00	100	Horizontal	Pass
2**	1593.926	34.6	-12.01	54.0	19.40	AV	137.00	100	Horizontal	Pass
2	1593.926	46.15	-12.01	74.0	27.85	Peak	137.00	100	Horizontal	Pass
3**	2441.824	52.9	-0.49	54.0	1.10	AV	193.00	100	Horizontal	N.A
3	2441.824	58.27	-0.49	74.0	15.73	Peak	193.00	100	Horizontal	N.A
4**	3740.532	37.5	-2.82	54.0	16.50	AV	304.00	100	Horizontal	Pass
4	3740.532	47.66	-2.82	74.0	26.34	Peak	304.00	100	Horizontal	Pass
5**	4908.511	41.0	0.42	54.0	13.00	AV	183.00	100	Horizontal	Pass
5	4908.511	50.50	0.42	74.0	23.50	Peak	183.00	100	Horizontal	Pass
6**	6611.674	43.8	4.94	54.0	10.20	AV	75.00	100	Horizontal	Pass
6	6611.674	54.85	4.94	74.0	19.15	Peak	75.00	100	Horizontal	Pass

7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

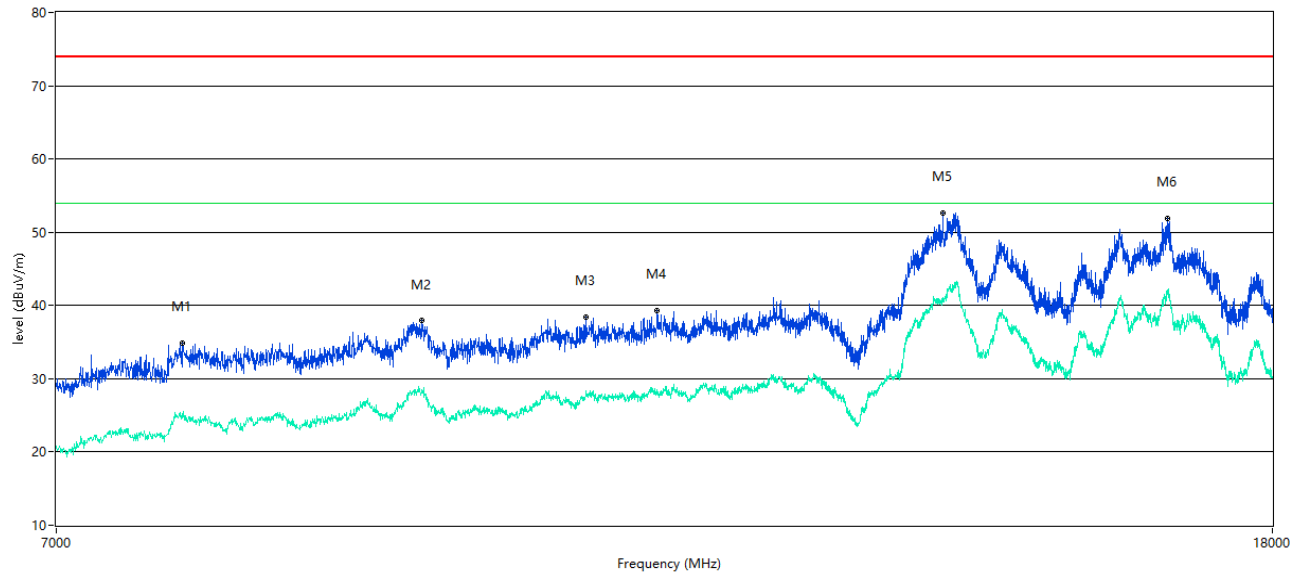

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	7723.069	25.3	-7.76	54.0	28.70	AV	275.00	100	Vertical	Pass
1	7723.069	34.89	-7.76	74.0	39.11	Peak	275.00	100	Vertical	Pass
2**	9301.175	28.3	-4.05	54.0	25.70	AV	350.00	100	Vertical	Pass
2	9301.175	37.90	-4.05	74.0	36.10	Peak	350.00	100	Vertical	Pass
3**	10563.109	28.4	-2.07	54.0	25.60	AV	198.00	100	Vertical	Pass
3	10563.109	38.45	-2.07	74.0	35.55	Peak	198.00	100	Vertical	Pass
4**	11159.710	28.0	-2.10	54.0	26.00	AV	156.00	100	Vertical	Pass
4	11159.710	39.33	-2.10	74.0	34.67	Peak	156.00	100	Vertical	Pass
5**	13936.516	41.0	12.46	54.0	13.00	AV	110.00	100	Vertical	Pass
5	13936.516	52.61	12.46	74.0	21.39	Peak	110.00	100	Vertical	Pass
6**	16586.853	41.7	11.78	54.0	12.30	AV	300.00	100	Vertical	Pass
6	16586.853	51.87	11.78	74.0	22.13	Peak	300.00	100	Vertical	Pass

7 GHz to 18 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

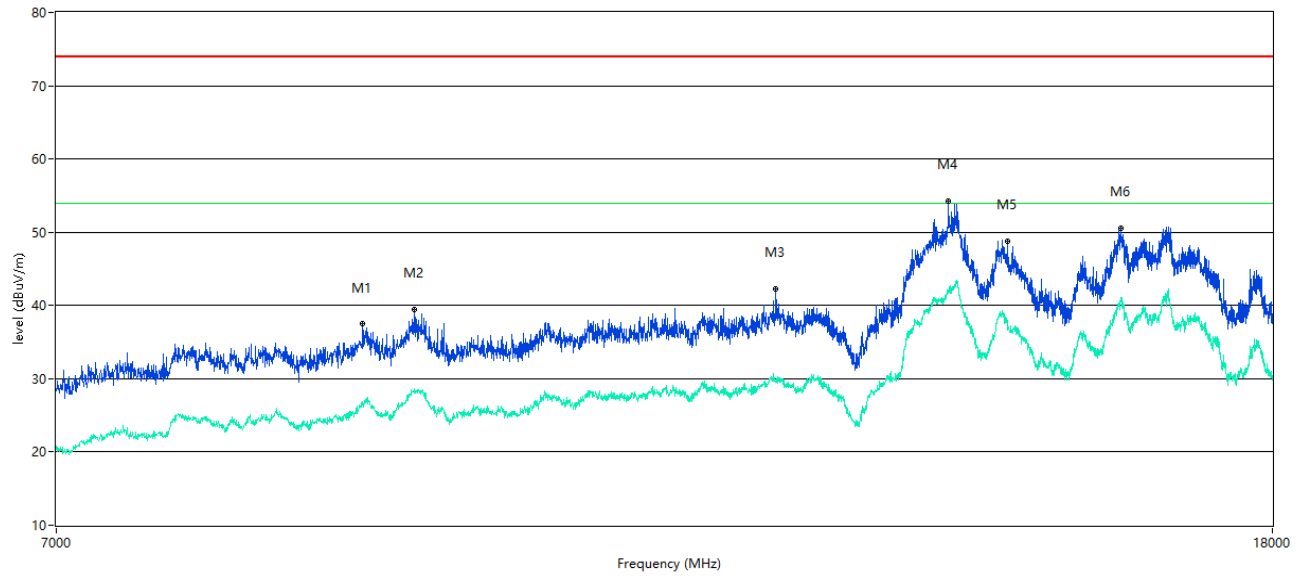

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	8880.530	26.8	-5.34	54.0	27.20	AV	67.00	100	Horizontal	Pass
1	8880.530	37.48	-5.34	74.0	36.52	Peak	67.00	100	Horizontal	Pass
2**	9240.690	28.0	-4.57	54.0	26.00	AV	213.00	100	Horizontal	Pass
2	9240.690	39.43	-4.57	74.0	34.57	Peak	213.00	100	Horizontal	Pass
3**	12240.190	29.5	-0.40	54.0	24.50	AV	309.00	100	Horizontal	Pass
3	12240.190	42.26	-0.40	74.0	31.74	Peak	309.00	100	Horizontal	Pass
4**	13994.251	42.1	14.05	54.0	11.90	AV	242.00	100	Horizontal	Pass
4	13994.251	54.20	14.05	74.0	19.80	Peak	242.00	100	Horizontal	Pass
5**	14651.337	37.8	9.58	54.0	16.20	AV	48.00	100	Horizontal	Pass
5	14651.337	48.74	9.58	74.0	25.26	Peak	48.00	100	Horizontal	Pass
6**	16001.250	40.5	10.71	54.0	13.50	AV	315.00	100	Horizontal	Pass
6	16001.250	50.58	10.71	74.0	23.42	Peak	315.00	100	Horizontal	Pass

A.9 Band Edge (Restricted-band band-edge)

Note: Band Edge (Restricted-band band-edge) test result please refer to original test report No.BL-EC1830166-601 issued by Shenzhen BALUN Technology Co., Ltd. on Apr. 27, 2018 section A.9 Band Edge (Restricted-band band-edge).

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-EC1850443-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL- EC1850443-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL- EC1850443-AI.PDF".

--END OF REPORT--