

Company: Radwin Ltd.

Test of: Outdoor Subscriber Radio Unit

To: FCC 15.407 (non-DFS Bands)

Report No.: RDWN45-U3_Master Rev A

MASTER TEST REPORT



MASTER TEST REPORT

FROM



Test of: Radwin Ltd. Outdoor Subscriber Radio Unit

To: FCC 15.407 (non-DFS Bands)

Test Report Serial No.: RDWN45-U3_Master Rev A

This report supersedes: RDWN41-U5_Master Rev A

As a result of the 6 Mbyte FCC file size limitation potentially large test reports require to be split into smaller components. This document is the Master document controlling Addendum reports as listed below. This Master document combined with the Addendums demonstrate compliance with the standard

Master Document Number	Addendum Reports
RDWN45-U3_Master	RDWN41-U5_Conducted* (Band 1 only)
	RDWN41-U5_Radiated* (Band 1 only)
	RDWN44-U3*
	RDWN45-U3_Radiated
	RDWN41-U5 (FCC Part15B & ICES-003)*

*RDWN45-U3 adds an additional antenna model to Radwin SU Pro, SU Air product previously tested and reported in MiCOM Labs test reports RDWN41-U5 and RDWN44-U3.

Applicant: Radwin Ltd.
27 Habarzel Street
Tel Aviv, 69710
Israel

Product Function: Outdoor Subscriber Radio Unit

Issue Date: 6th April 2017

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations.....	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
7.1. Radiated Emissions	16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Radwin Ltd. Outdoor Subscriber Radio Unit
To: FCC 15.407 (non-DFS Bands),
Serial #: RDWN45-U3_Master Rev A
Issue Date: 6th April 2017
Page: 7 of 19

2. DOCUMENT HISTORY

History		
Revision	Date	Comments
Rev A	6 th April 2017	Master
Rev A	6 th April 2017	Radiated

*EUT Outdoor Subscriber Radio Unit was previously tested in RDWN41-U5, and RDWN44-U3 as detailed below.

This report covers the testing of an additional antenna.

Details of Referenced reports are noted below for information;-

Previous Reports Released Document History RDWN41-U5 (Band 1 5150-5250 MHz)					
Master Revision	Date	Addendum	Revision	Date	Comments
Rev A	13 th July 2016	Conducted	Rev A	13 th July 2016	Initial Release
		Radiated	Rev A	13 th July 2016	
		Part 15B ICES-003	Rev A	13 th July 2016	

Previous Reports Released Document History RDWN44-U3			
Revision	Date	Comments	
Draft 2	xx th December 2016	Draft report for client review. Report underlines re testing done due to new requirements under 15.407 for band 3.	
Rev A	20 th December 2016	Initial Release	

In the above tables the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Radwin Ltd. Outdoor Subscriber Radio Unit
To: FCC 15.407 (non-DFS Bands),
Serial #: RDWN45-U3_Master Rev A
Issue Date: 6th April 2017
Page: 8 of 19

3. TEST RESULT CERTIFICATE

Manufacturer: Radwin Ltd.
27 Habarzel Street
Tel Aviv 69710
Israel

Model: SU Pro, SU Air

Equipment Type: Outdoor Subscriber Radio Unit

S/N's: P13880I200M00208

Test Date(s): 27th – 28th March 2017

Tested By: MiCOM Labs, Inc.
575 Boulder Court
Pleasanton
California 94566 USA

Telephone: +1 925 462 0304

Fax: +1 925 462 0306

Website: www.micomlabs.com

STANDARD(S)

FCC CFR 47 Part 15 Subpart E 15.407 (non-DFS Bands),
FCC Part 15B & ICES-003

TEST RESULTS

EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERT #2381.01

Graeme Grieve
Quality Manager MiCOM Labs, Inc.

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v02	22nd August 2016	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 D01 v02	22nd August 2016	U-NII Device Transition Plan
IV	KDB 789033 D02 v01r03	22nd August 2016	General UNII Test Procedures New Rules
V	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 32	2012	Electromagnetic compatibility of multimedia equipment - Emission requirements
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 06-96	Jun 30 2006	Memorandum Opinion and Order
XI	FCC 47 CFR Part 15.407	2016	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XII	ICES-003	Issue 6 Jan 2016	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
XIII	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XIV	RSS-247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XV	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XVI	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XVII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Radwin Ltd. SU Pro, SU Air to FCC CFR 47 Part 15 Subpart E 15.407. Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
Applicant:	Radwin Ltd. 27 Habarzel Street Tel Aviv 69710 Israel
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	RDWN45-U3_Master
Date EUT received:	22 nd March 2017
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407
Dates of test (from - to):	27 th – 28 th March 2017
No of Units Tested:	1
Type of Equipment:	Outdoor Subscriber Radio Unit
Product Family Name:	RADWIN 5000
Model(s):	SU Pro, SU Air
Location for use:	Outdoor
Declared Frequency Range(s):	5150 - 5250 and 5725 - 5850 MHz;
Primary function of equipment:	Outdoor Subscriber Radio Unit
Secondary function of equipment:	n/a
Type of Modulation:	BPSK to 256QAM
EUT Modes of Operation:	10 MHz; 20 MHz; 40 MHz; 80 MHz;
Declared Nominal Output Power (Ave):	5150 – 5250 MHz: +45 dBm EIRP 5725 – 5850 MHz: +29 dBm
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	POE (POE adaptor sold with unit) 24Vdc
Operating Temperature Range:	Declared Range -40°C to +60°C
ITU Emission Designator:	10 MHz 10M0W7W 20 MHz 20M0W7W 40 MHz 40M0W7W 80 MHz 80M0W7W
Equipment Dimensions:	7.5" x 7.1" x 1.2" inches
Weight:	0.4 kg
Hardware Rev:	Prototype
Software Rev:	Prototype

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.2. Scope Of Test Program

Radwin SU Pro, SU Air

The scope of the test program was to test the Radwin SU Pro, SU Air, Outdoor Subscriber Radio Unit configurations in the frequency ranges 5150 - 5250 and 5725 - 5850 MHz; with additional antenna (RW-9614-5359) for compliance against the following specification:
(For previous testing see RDWN41-U5)

FCC CFR 47 Part 15 Subpart E 15.407 (non-DFS Bands)

Radio Frequency Devices; Subpart E – Unlicensed National Information Infrastructure Devices

Radwin SU Pro, SU Air



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.3. Equipment Model(s) and Serial Number(s)

Type	Description	Manufacturer	Model	Serial no.	Delivery Date
EUT	Outdoor Subscriber Radio Unit	Radwin Ltd.	SU Pro, SU Air	P13880I200M00208	22 March 2017
Support Equipment	24V-1A PoE Injector	GOSPELL	G0720-240-100	#RDWN41-2	22 March 2017

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
Integral	RADWIN Ltd.	MP0179180	Flat DP	16.0	-	17.5° Hor 29.1° Ver	Y	5150 – 5250 5725 - 5850
External	RADWIN Ltd.	RW-9614-5359	Flat DP	23.0	-	10.0°	Y	5150 – 5250 5725 - 5850

BF Gain - Beamforming Gain
 Dir BW - Directional BeamWidth
 X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
PoE + Data	100m	1	N		Packet Data

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5150 - 5250 MHz				
10 MHz	15	5,160.00	5,200.00	5,245.00
20 MHz	15	5,165.00	5,200.00	5,240.00
40 MHz	15	5,170.00	5,200.00	5,230.00
80 MHz	15	5,190.00	5,200.00	5,210.00
5725 - 5850 MHz				
10 MHz	15	5,730.00	5,785.00	5,845.00
20 MHz	15	5,735.00	5,785.00	5,840.00
40 MHz	15	5,745.00	5,785.00	5,830.00
80 MHz	15	5,765.00	5,785.00	5,810.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



Title: Radwin Ltd. Outdoor Subscriber Radio Unit
To: FCC 15.407 (non-DFS Bands),
Serial #: RDWN45-U3_Master Rev A
Issue Date: 6th April 2017
Page: 15 of 19

6. TEST SUMMARY

List of Measurements

Test Header	Result	Comments
Conducted Testing	See Report RDWN44-U3	
(a) Peak Transmit Power	Complies	
(a) 6 dB & 99% Bandwidth	Complies	
(a)(5) Power Spectral Density	Complies	
Radiated Testing	See Report RDWN45-U3_Radiated Addendum	
(b)(2) Radiated Spurious & Band-Edge Emissions	Complies	
Digital Emissions	See Report RDWN45-U3_Radiated Addendum	
15.109 Digital Emissions	Complies	
AC Wireline Emissions	See Report RDWN41-U5 Part 15B, ICES-003	
15.107 AC Wireline Emissions	Complies	

*EUT previously tested with integral antenna in RDWN41-U5.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Radiated Emissions

The following tests were performed using the radiated test set-up shown in the diagram below;

- 1).. Radiated Spurious and Band-Edge Emissions
- 2).. Radiated Digital Emissions (0.03 – 1 GHz)

Radiated Emission Measurement Setup Pictorial Representation

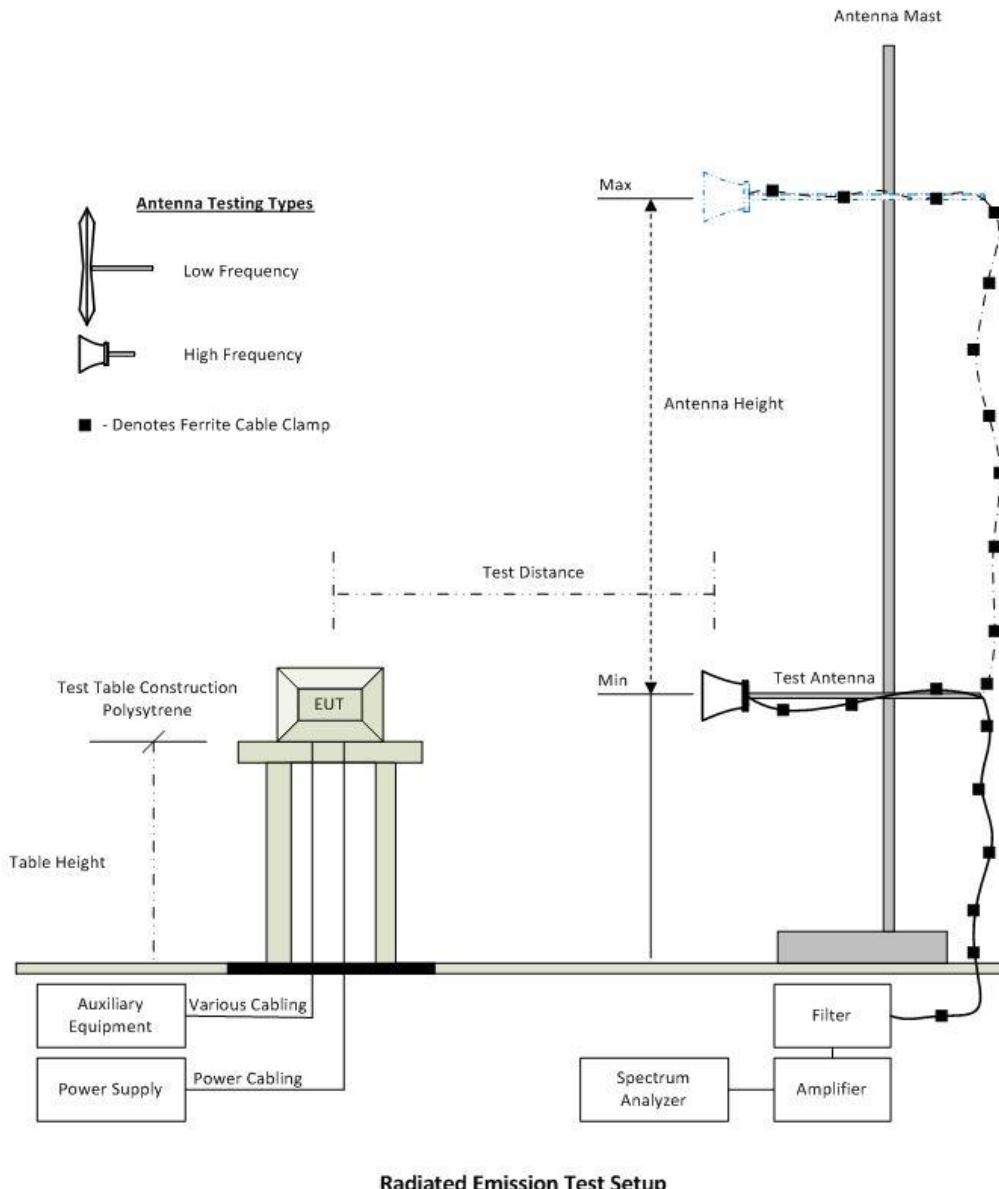

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Radwin Ltd. Outdoor Subscriber Radio Unit
To: FCC 15.407 (non-DFS Bands),
Serial #: RDWN45-U3_Master Rev A
Issue Date: 6th April 2017
Page: 17 of 19

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2017
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2017
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2017
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	16 Aug 2017
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	16 Aug 2017
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	9 Jun 2017
399	ETS 1-18 GHz Horn Antenna	ETS		00154575	10 Apr 2017
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	9 Jun 2017
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	31 May 2017
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	31 May 2017
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	31 May 2017
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	2 Jun 2017
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	2 Jun 2017
467	2495 to 2650 MHz notch filter	MicroTronics	BRM50709	011	16 Aug 2017

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Radwin Ltd. Outdoor Subscriber Radio Unit
To: FCC 15.407 (non-DFS Bands),
Serial #: RDWN45-U3_Master Rev A
Issue Date: 6th April 2017
Page: 18 of 19

468	Low pass filter	Mini Circuits	SLP-550	None	16 Aug 2017
469	Low pass filter	Mini Circuit	SLP-1000	None	16 Aug 2017
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157- 3050360	480	2 Jun 2017
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151- 3050787	481	2 Jun 2017
482	Cable - Amp to Antenna	SRC Haverhill	157-157- 3051574	482	2 Jun 2017
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	26 Apr 2017

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com