




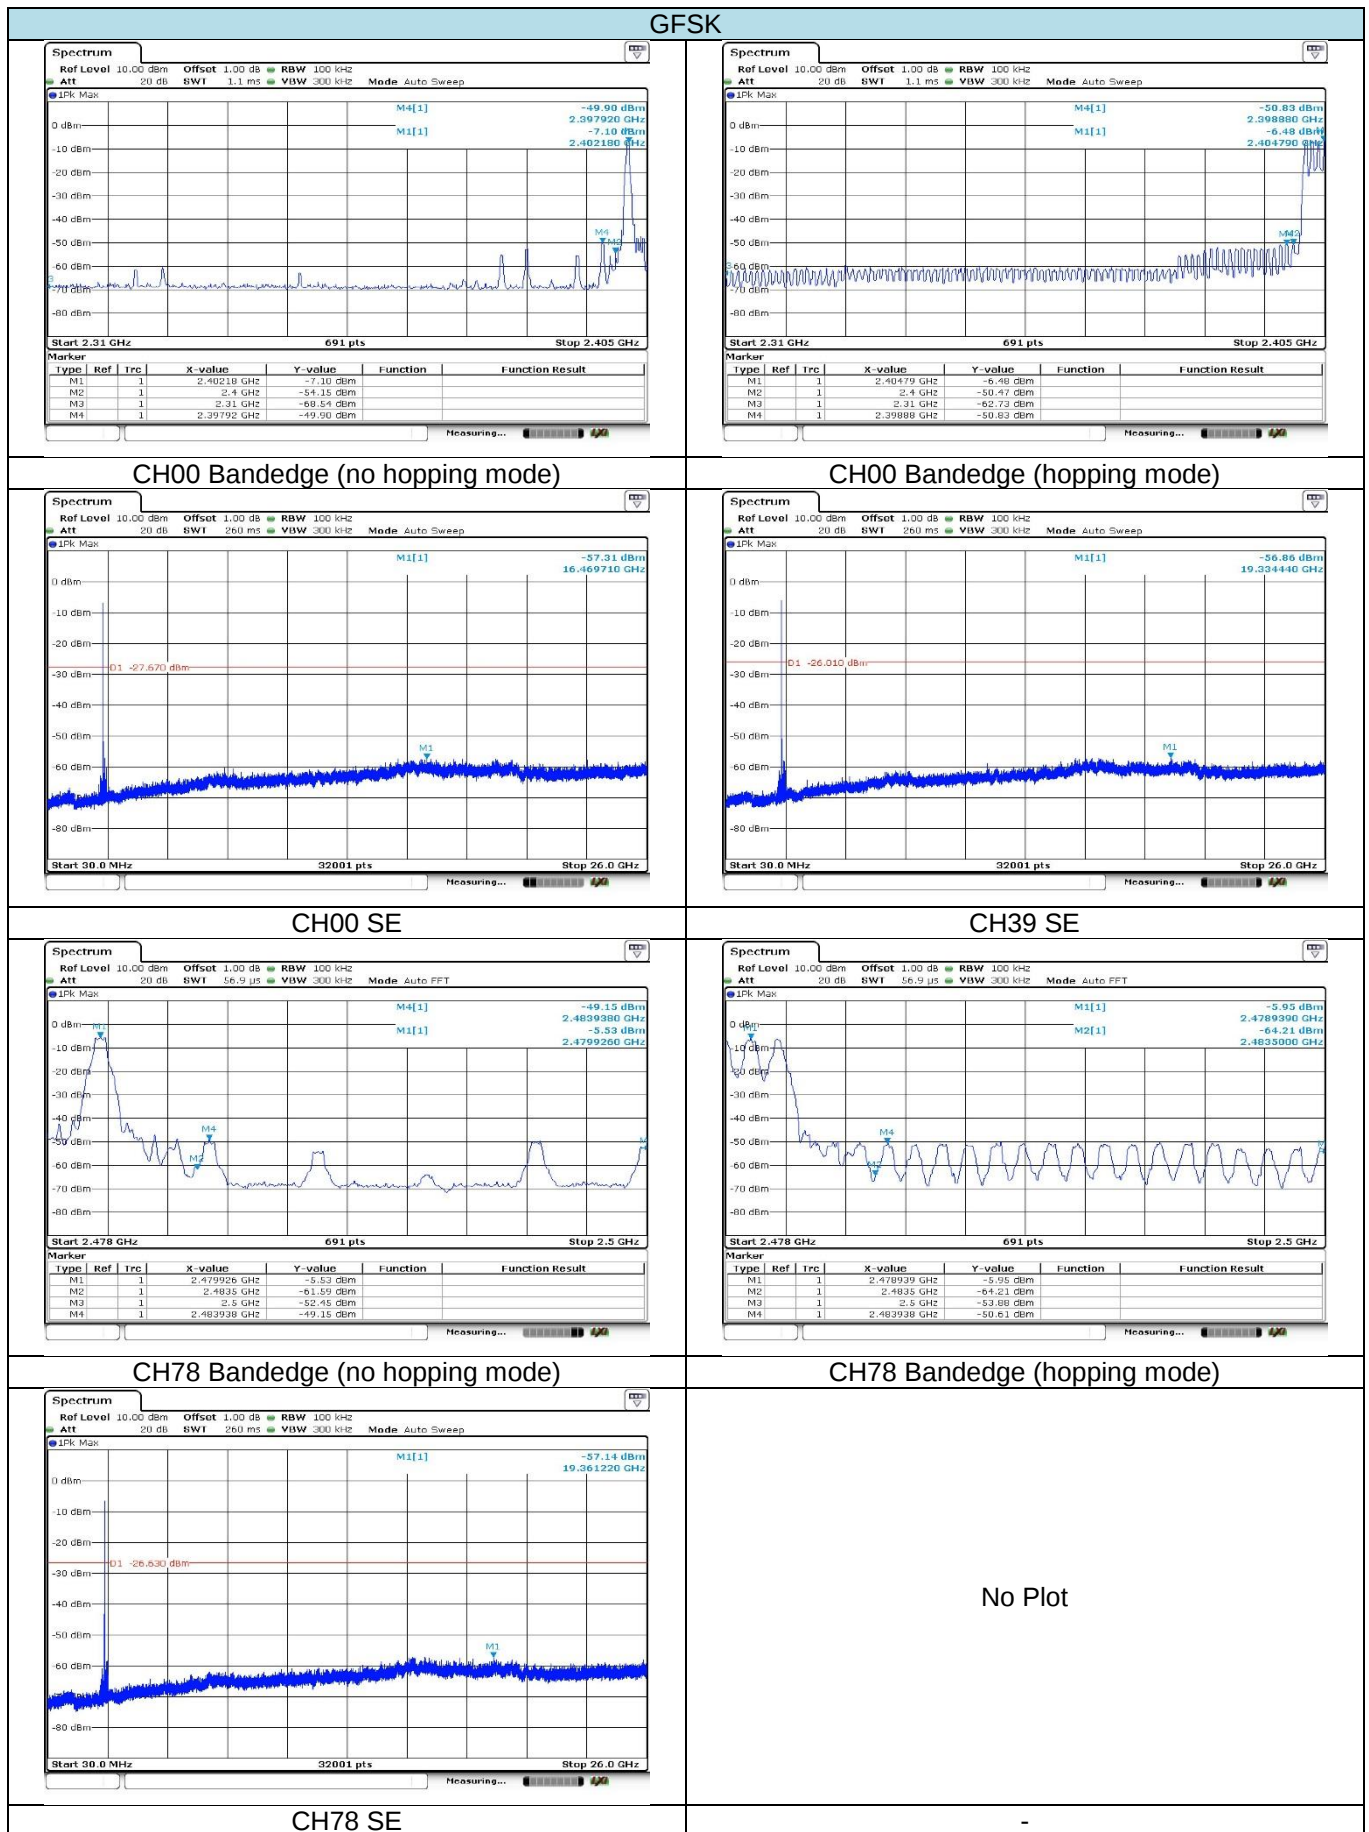

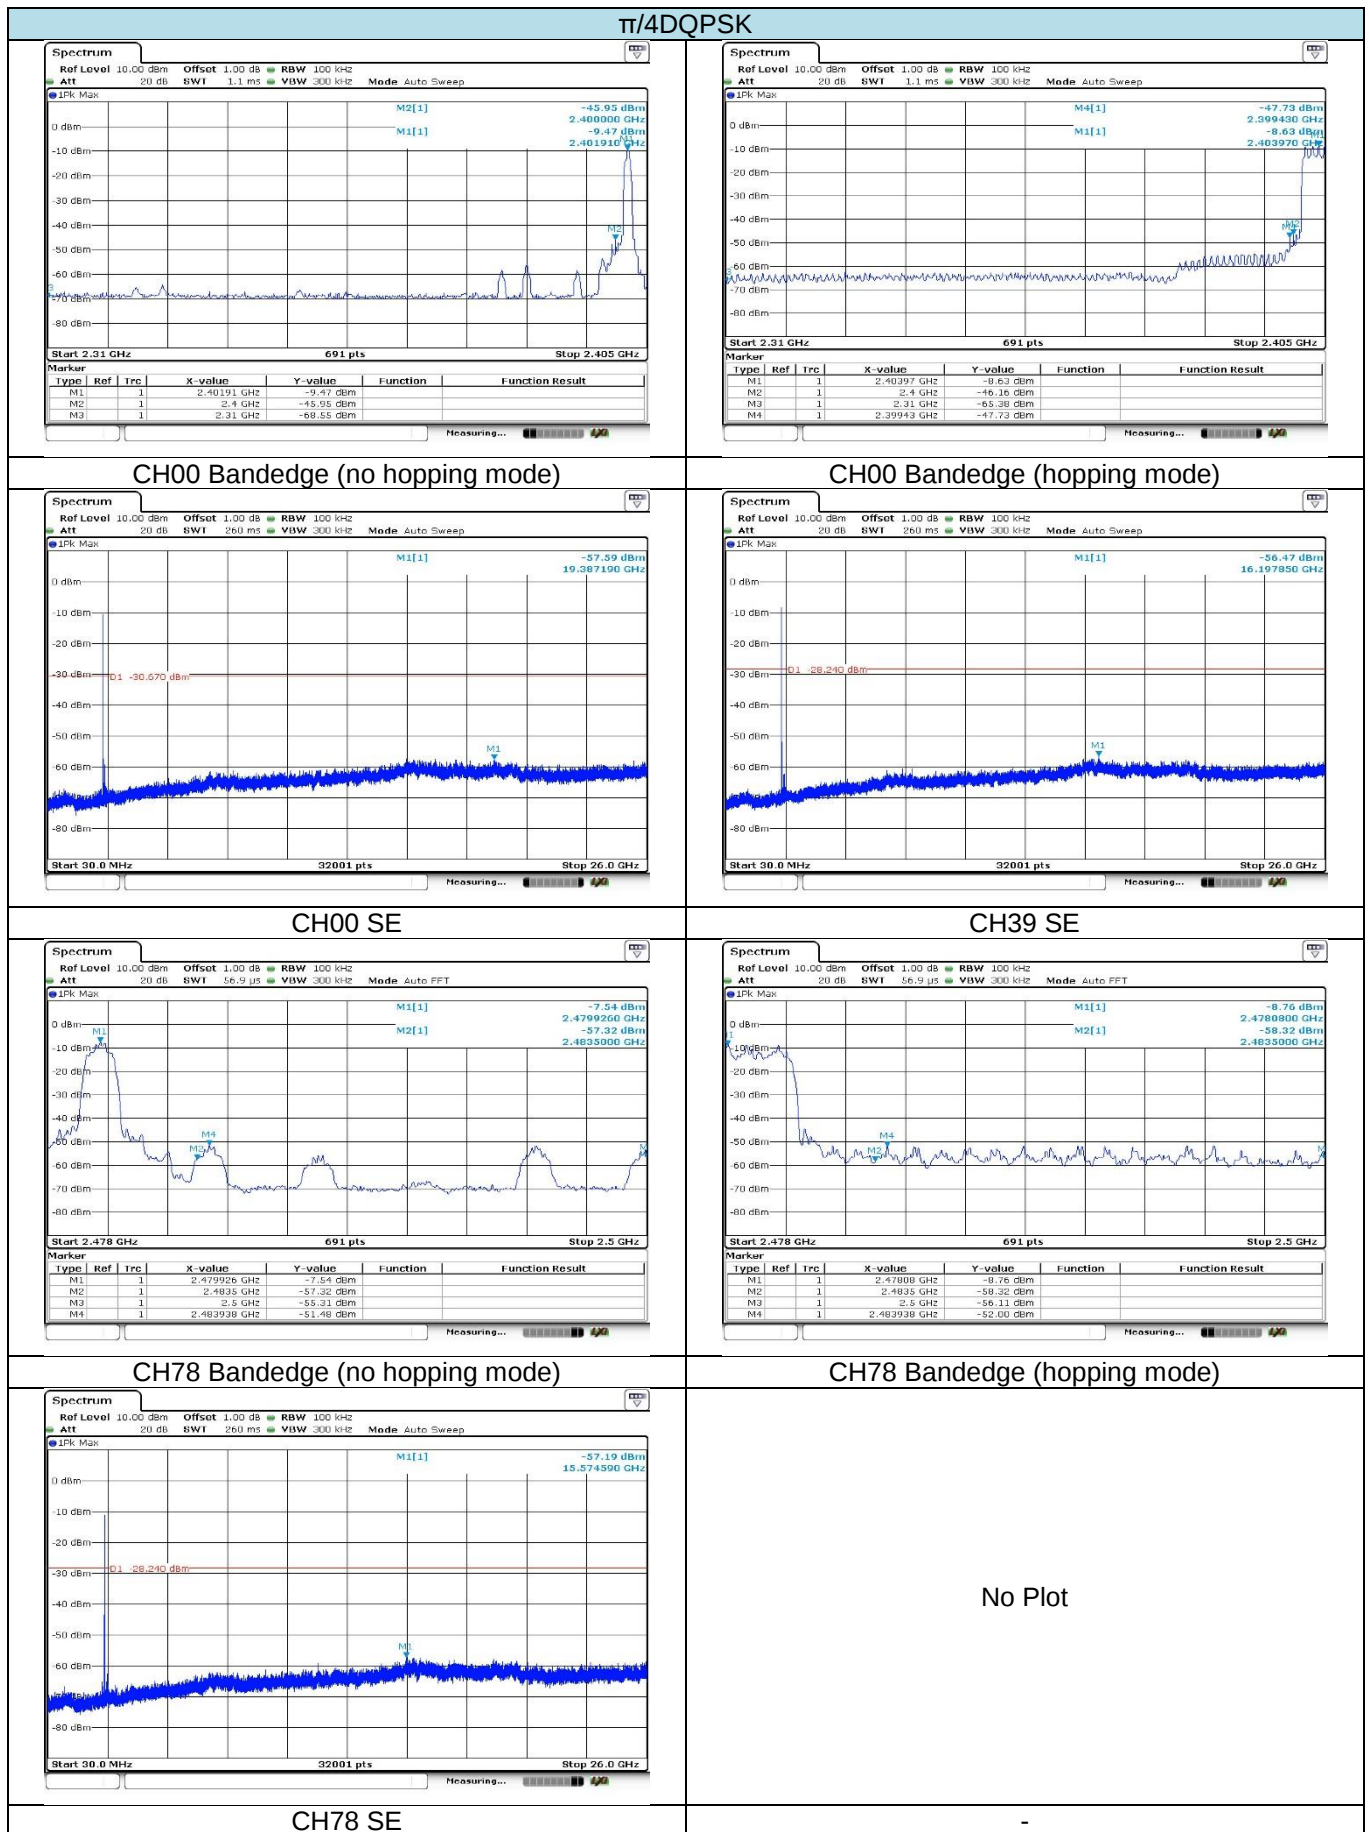

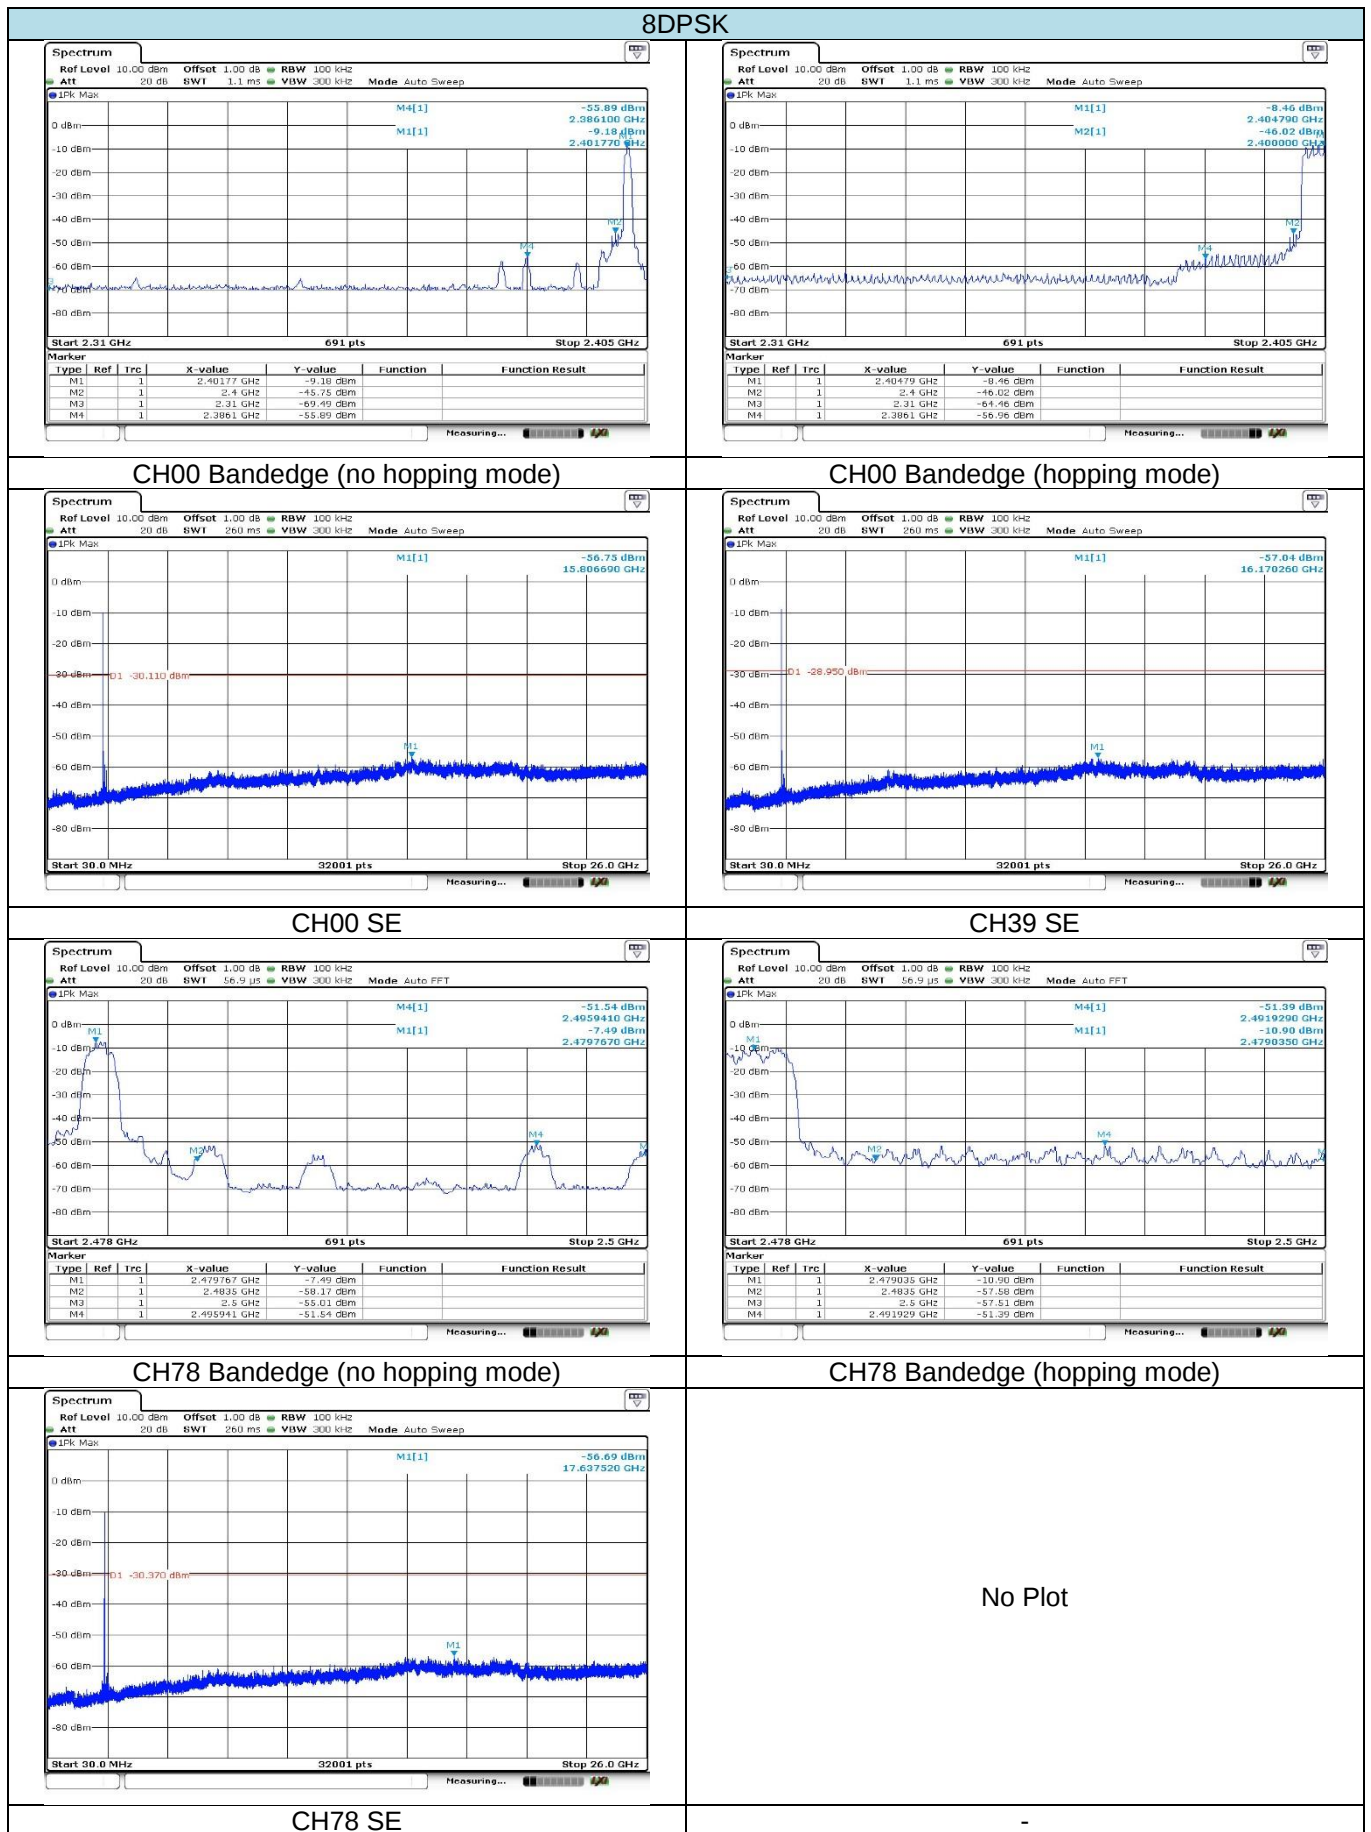

## 5.11. Spurious Emission (radiated)


### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209


| Frequency           | Limit (dBuV/m @3m) | Value      |
|---------------------|--------------------|------------|
| 0.009 MHz-0.09MHz   | 88.52-68.52        | Average    |
| 0.09MHz-0.11MHz     | 68.52-66.78        | Quasi-peak |
| 0.11MHz-0.49 MHz    | 66.78-53.80        | Average    |
| 0.49 MHz -1.705 MHz | 53.80-42.97        | Quasi-peak |
| 1.705 MHz -30 MHz   | 49.54              | Quasi-peak |
| 30MHz-88MHz         | 40.00              | Quasi-peak |
| 88MHz-216MHz        | 43.50              | Quasi-peak |
| 216MHz-960MHz       | 46.00              | Quasi-peak |
| 960MHz-1GHz         | 54.00              | Quasi-peak |
| Above 1GHz          | 54.00              | Average    |
|                     | 74.00              | Peak       |

### TEST CONFIGURATION


#### ➤ 9KHz ~30MHz

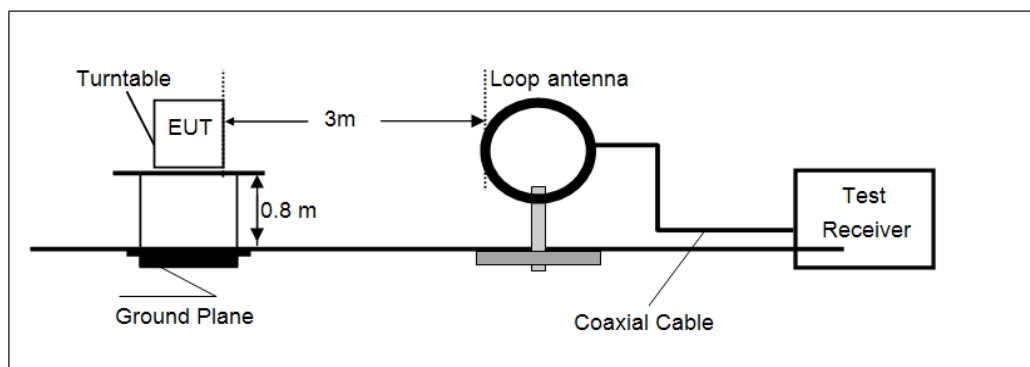

#### ➤ 30MHz ~ 1GHz

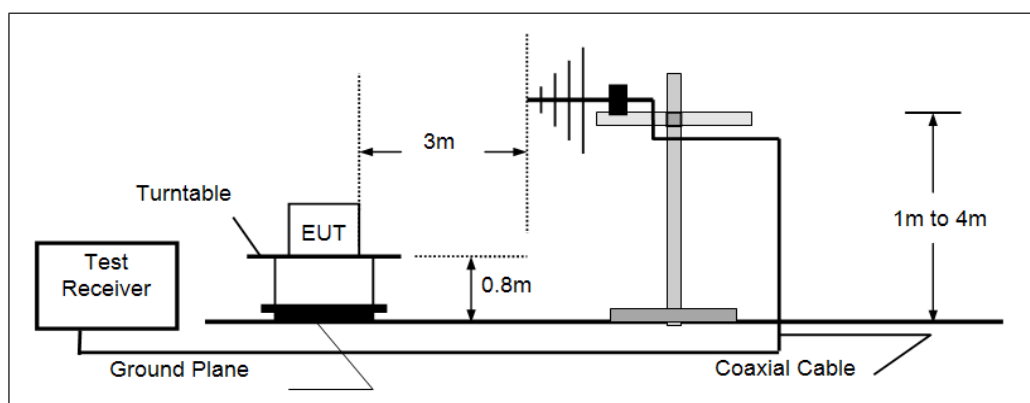

## ➤ Above 1GHz

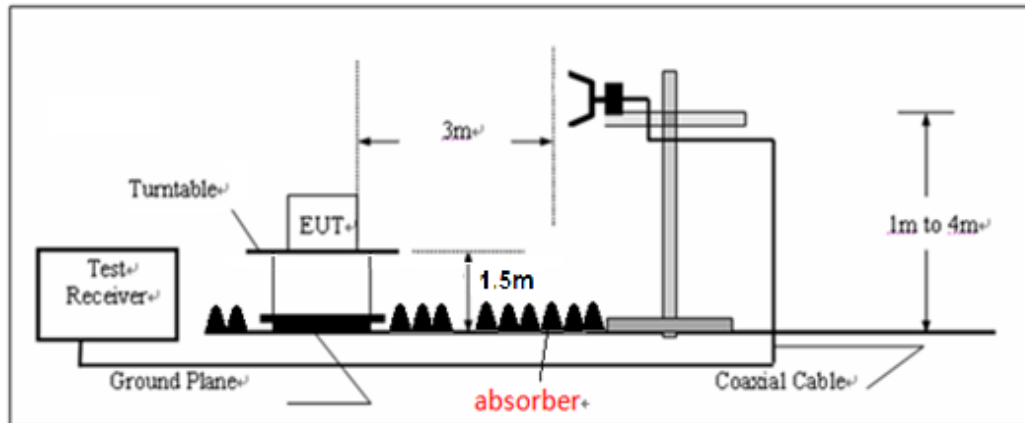**TEST PROCEDURE**

1. The EUT was tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
5. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) Above 1GHz, RBW=1MHz, VBW=3MHz Peak detector for Peak value  
RBW=1MHz, VBW=10Hz Peak detector for Average value.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

☒ Passed      ☐ Not Applicable

Note:

- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) “\*”, means this data is too weak; instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not shown in test report.
- 4) Have pre-scan all modulation modes, found the GFSK modulation which was the worst case, so only the worst case's data is shown in the test report.


➤ **9kHz ~ 30MHz**

The EUT was pre-scanned the frequency band (9kHz~30MHz), found the radiated level lower than the limit, so don't show on the report.

## ➤ 30MHz ~ 1GHz

Polarization:


Vertical

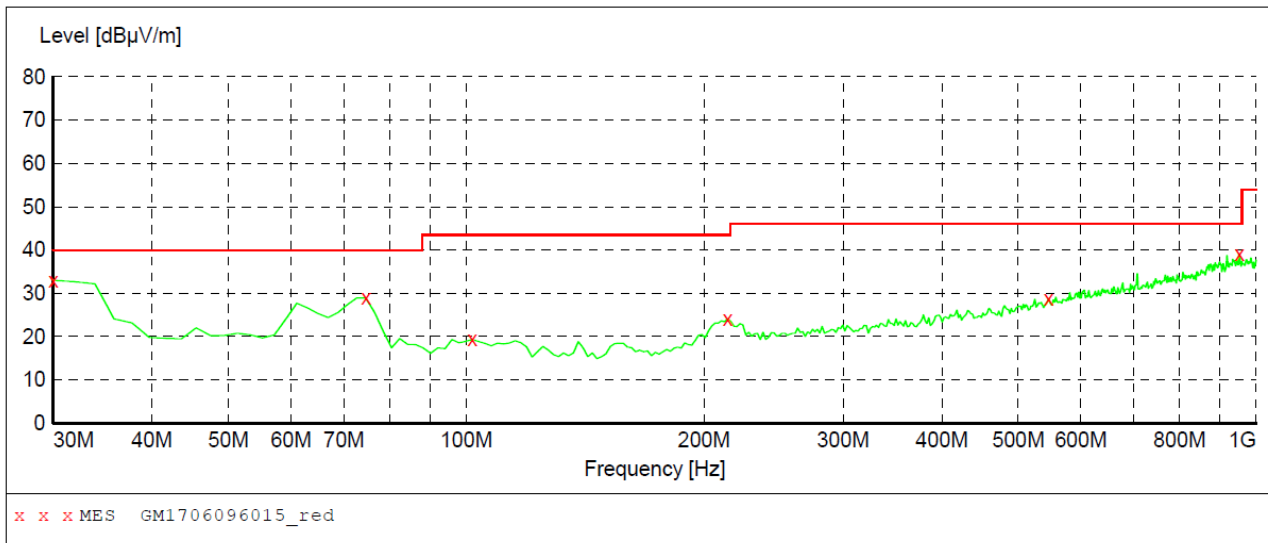

| Frequency<br>MHz | Level<br>dBμV/m | Transd<br>dB | Limit<br>dBμV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 30.000000        | 33.00           | -13.3        | 40.0            | 7.0          | QP   | 100.0        | 194.00         | VERTICAL     |
| 74.620000        | 28.90           | -14.8        | 40.0            | 11.1         | QP   | 100.0        | 311.00         | VERTICAL     |
| 101.780000       | 19.30           | -10.5        | 43.5            | 24.2         | QP   | 100.0        | 286.00         | VERTICAL     |
| 214.300000       | 24.10           | -10.3        | 43.5            | 19.4         | QP   | 100.0        | 298.00         | VERTICAL     |
| 546.040000       | 28.80           | -0.8         | 46.0            | 17.2         | QP   | 100.0        | 360.00         | VERTICAL     |
| 951.500000       | 39.00           | 7.3          | 46.0            | 7.0          | QP   | 100.0        | 98.00          | VERTICAL     |


Polarization:


Horizontal

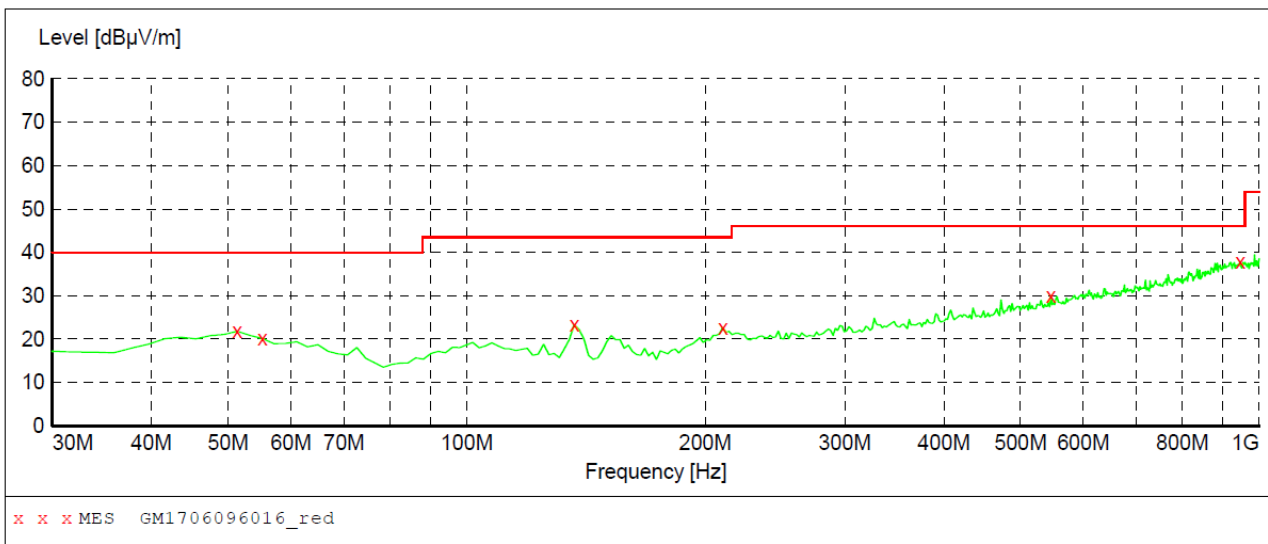


| Frequency<br>MHz | Level<br>dBμV/m | Transd<br>dB | Limit<br>dBμV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 51.340000        | 21.80           | -8.8         | 40.0            | 18.2         | QP   | 100.0        | 356.00         | HORIZONTAL   |
| 55.220000        | 20.20           | -9.2         | 40.0            | 19.8         | QP   | 100.0        | 308.00         | HORIZONTAL   |
| 136.700000       | 23.30           | -13.7        | 43.5            | 20.2         | QP   | 300.0        | 1.00           | HORIZONTAL   |
| 210.420000       | 22.70           | -10.5        | 43.5            | 20.8         | QP   | 100.0        | 79.00          | HORIZONTAL   |
| 546.040000       | 30.00           | -0.8         | 46.0            | 16.0         | QP   | 300.0        | 119.00         | HORIZONTAL   |
| 945.680000       | 37.80           | 7.2          | 46.0            | 8.2          | QP   | 100.0        | 3.00           | HORIZONTAL   |

## ➤ 1GHz ~ 25GHz

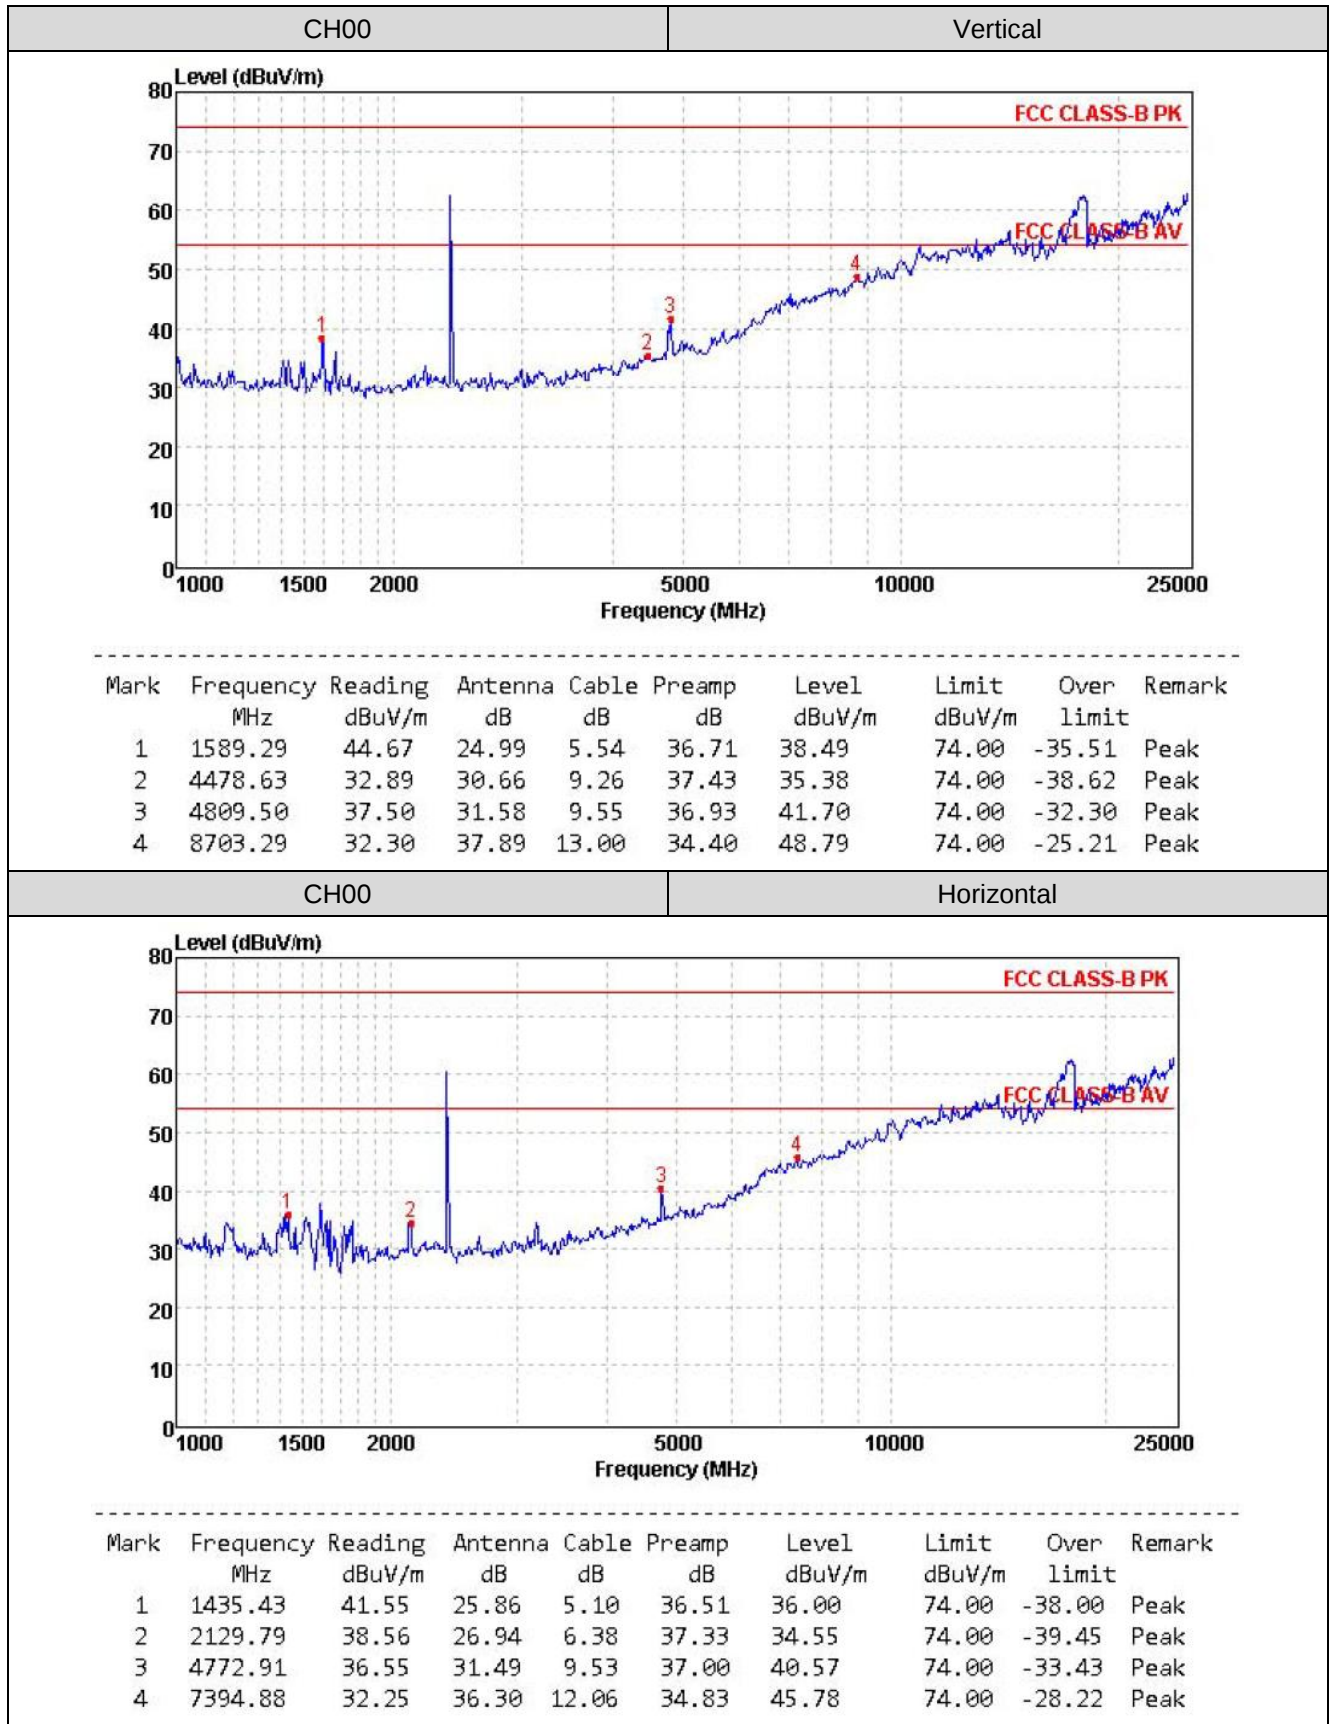

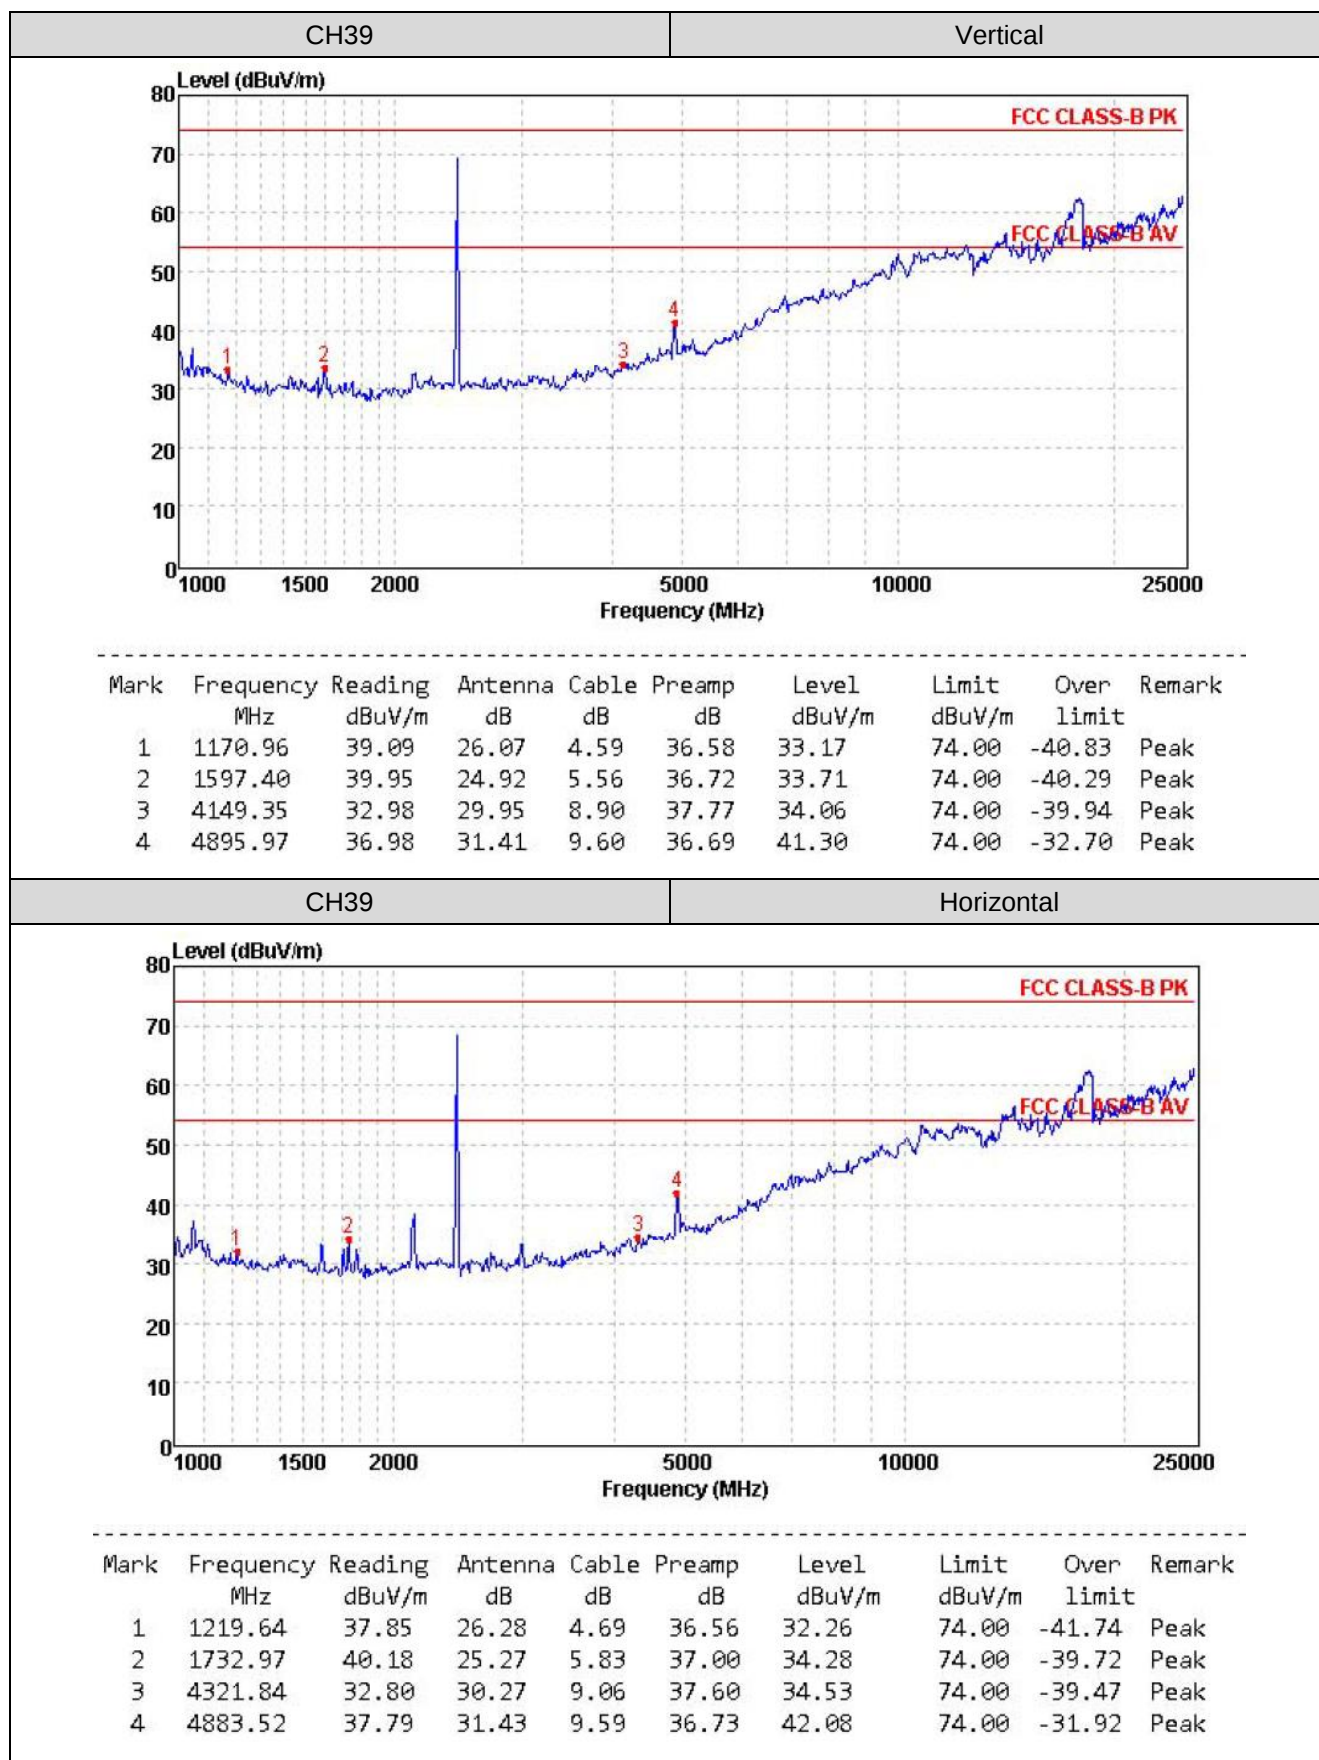

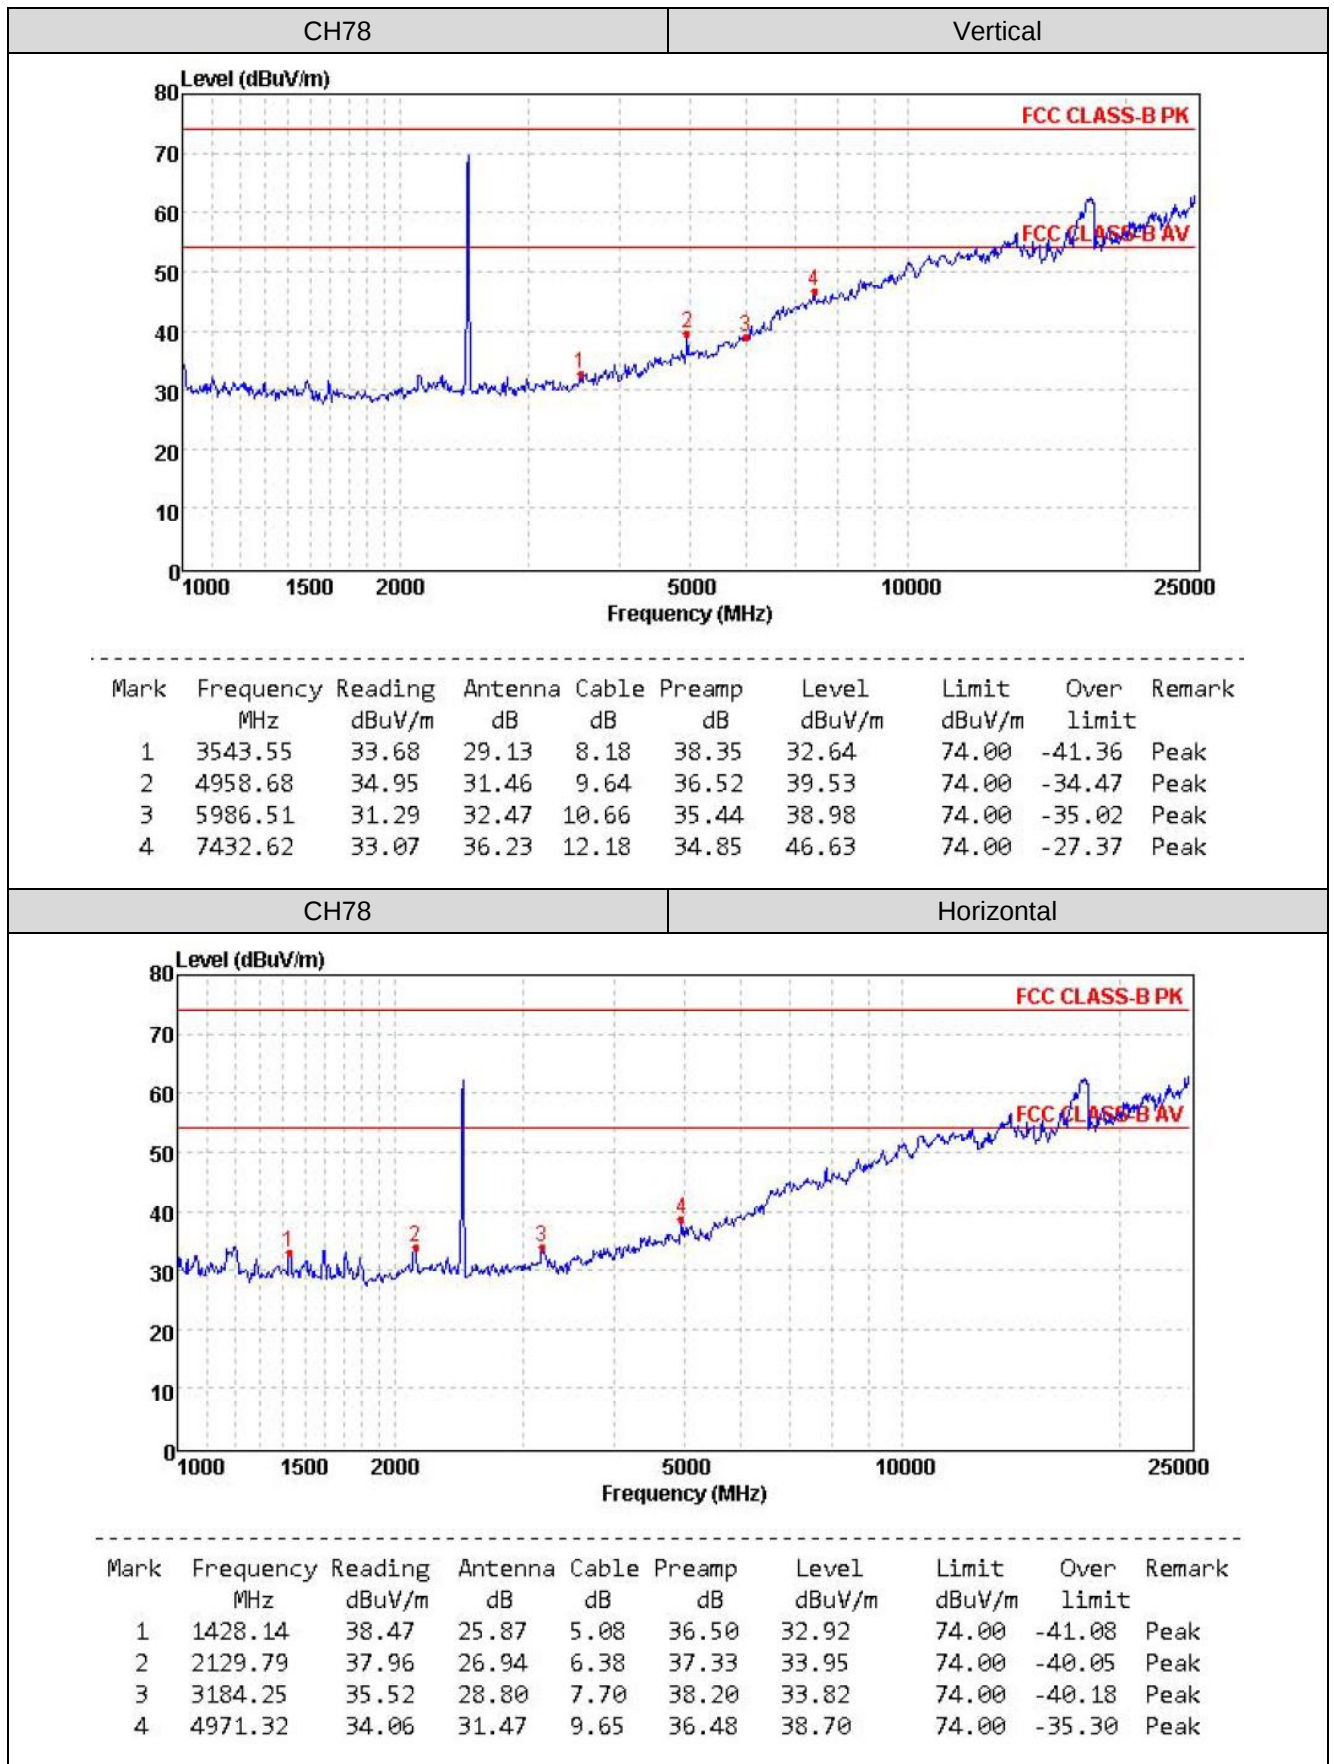

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit (54 dBuV/m), this data is too weak; the instrument's signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not shown in the test report.



## 6. Test Setup Photos of the EUT

Conducted Emission (AC Mains):




Radiated Emission:

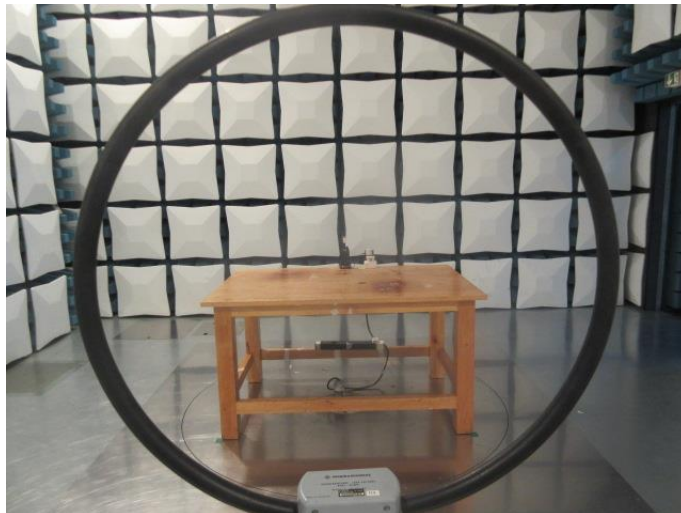

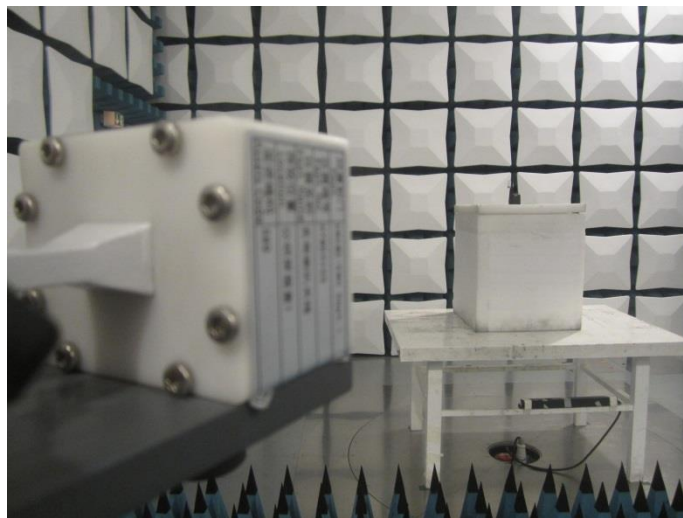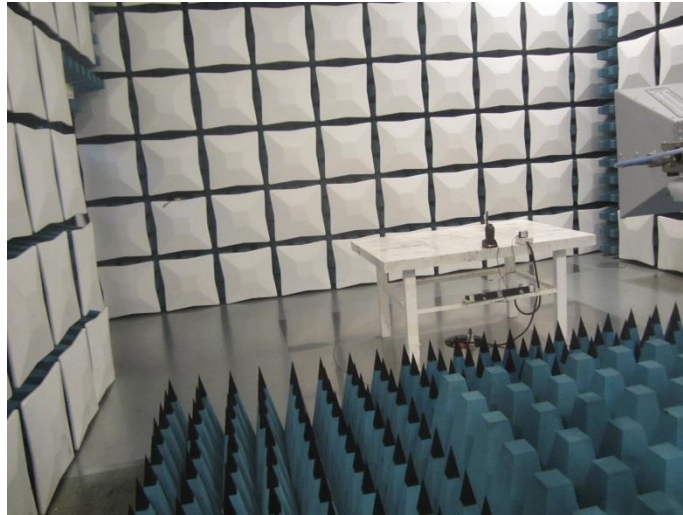

Conducted Emission

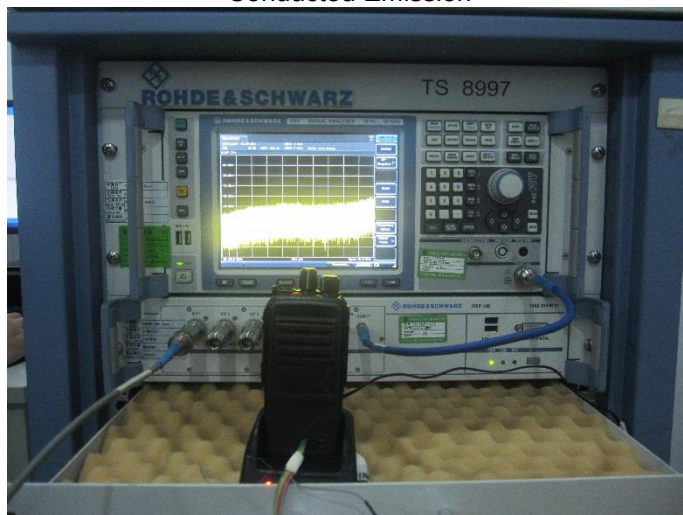

## 7. External and Internal Photos of the EUT

### External Photos













## Internal Photos



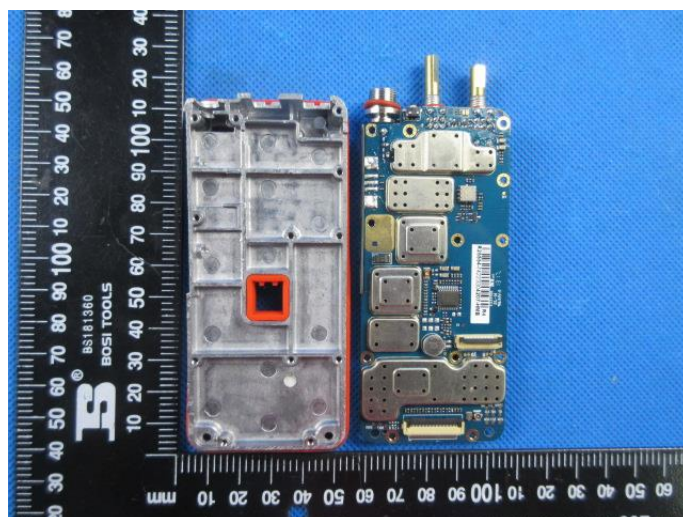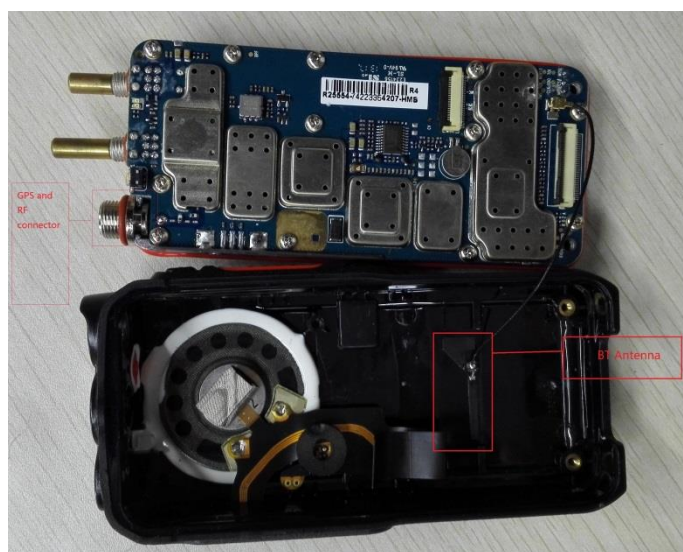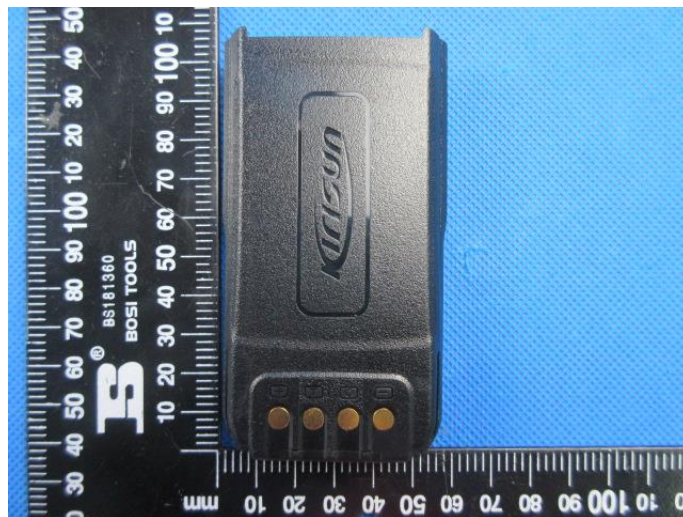

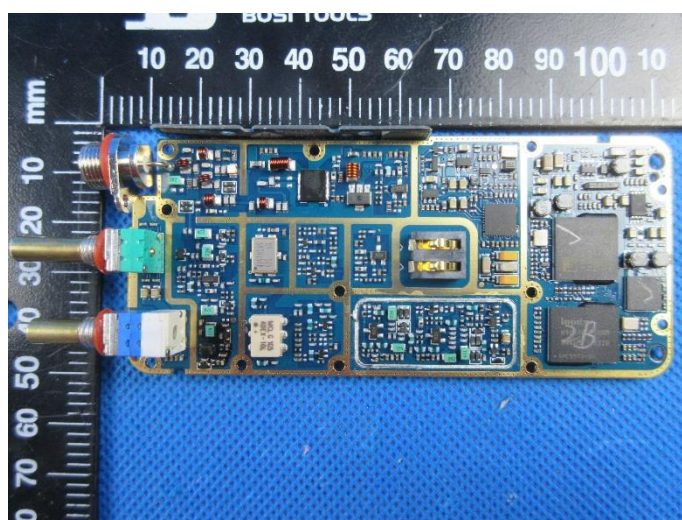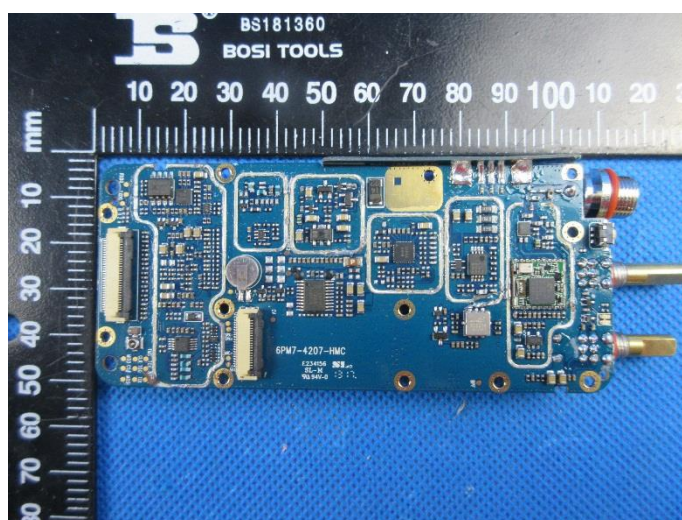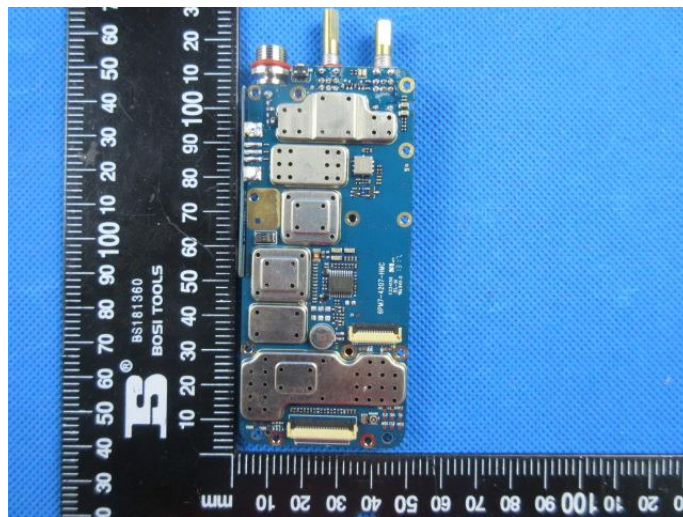

-----End of Report-----