

TABLE OF CONTENTS

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

TEST REPORT CONTAINING:

PAGE 1-4.....	TEST EQUIPMENT LIST
PAGE 5.....	TEST PROCEDURE
PAGE 6.....	RADIATION INTERFERENCE TEST DATA
PAGE 7.....	OCCUPIED BANDWIDTH
PAGE 8.....	OCCUPIED BANDWIDTH PLOT
PAGE 9.....	POWERLINE CONDUCTED
PAGE 10-11.....	POWERLINE CONDUCTED PLOTS

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....	FCC ID LABEL SAMPLE & LOCATION
EXHIBIT 2.....	BLOCK DIAGRAM
EXHIBIT 3.....	SCHEMATIC
EXHIBIT 4.....	INSTRUCTION MANUAL
EXHIBIT 5.....	EXTERNAL PHOTOGRAPHS
EXHIBIT 6.....	INTERNAL PHOTOGRAPHS
EXHIBIT 7.....	CIRCUIT DESCRIPTION
EXHIBIT 8.....	TEST SET UP PHOTOGRAPH

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc
TITLE PAGE

EMC Equipment List

Last Update: 7/8/03

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/13/06
X	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
X	Receiver, Beige Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
X	RF Preselector	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
X	Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
X	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
	Receiver, Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
	RF Preselector	HP	85685A	2926A00983	CAL 4/15/03	4/15/05
	Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
	Receiver, Silver/Grey Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/14/02	10/14/04
	RF Preselector	HP	85685A	2620A00294	CAL 10/14/02	10/14/04
	Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/14/02	10/14/04
	Preamplifier	HP	8449B	3008A01075	CHAR 1/28/02	1/28/04
	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
X	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CAL 3/4/03	3/4/05

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 1 of 11

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CAL 9/26/02	9/26/05
X	Double-Ridged Horn Antenna	Electro-Metrics	RGA -180	2319	CAL 2/17/03	2/17/05
	Horn Antenna *(at 3 meters)	Electro-Metrics	EM-6961	6246	CAL 3/31/03	3/31/05
	Horn Antenna *(at 10 meters)	Electro-Metrics	EM-6961	6246	CAL 6/4/03	6/4/05
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M08HW/A	F30425-1	CHAR 4/25/03	4/25/05
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M12HW/A	E30425-1	CHAR 4/25/03	4/25/05
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CHAR 9/7/01	9/7/03
	Oscilloscope	Tektronix	2230	300572	CAL 7/3/03	7/3/05
	System One	Audio Precision	System One	SYS1-45868	CHAR 4/25/02	4/25/04
	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
X	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	79510405	CHAR 9/26/01	9/26/03

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 2 of 11

DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
Peak Power Meter	HP	8900C	2131A00545	CAL 7/2/03	7/2/05
Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 7/2/03	7/2/05
Power Meter	HP	432A	1141A07655	CAL 4/15/03	4/15/05
Power Sensor	HP	478A	72129	CAL 4/15/03	4/15/05
Power Meter And Sensor	Bird	4421-107 4022	0166 0218	CAL 4/16/03	4/16/05
Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
Thermometer	Extech	4028	14871-2	CAL 3/7/03	3/7/05
X Hygro-Thermometer	Extech	445703	0602	CAL 10/4/02	10/4/04
Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
Frequency Counter	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
Signal Generator	HP	8640B	2308A21464	CAL 2/15/02	2/15/04
Sweep Generator	Wiltron	6648	101009	CAL 4/15/03	4/15/05
Sweep Generator	Wiltron	6669M	007005	CAL 3/3/03	3/3/05
Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
Modulation Meter	Boonton	8220	10901AB	CAL 4/15/03	4/15/05
Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 4/17/03	4/17/05
BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 4/17/03	4/17/05
BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 4/12/03	4/12/05
Notch Filter	Lorch Microwave	5BRX-850/ X100-N	AD-1	CHAR 4/17/03	4/17/05
High Pass Filter	Unk	3768(5)-400	041	CHAR 12/17/02	12/17/04

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 3 of 11

DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
High Pass Filter	Microlab	HA-10N		CHAR 11/17/02	11/17/04
High Pass Filter	Microlab	HA-20N		CHAR 12/17/02	12/17/04
Audio Oscillator	HP	653A	832-00260	CHAR 12/1/02	12/1/04
Audio Generator	B&K Precision	3010	8739686	CHAR 12/1/02	12/1/04
Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
Frequency Counter	HP	5385A	3242A07460	CAL 3/7/03	3/7/05
Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
Egg Timer	Unk			CHAR 2/1/02	2/1/04
X Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 4 of 11

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. The UUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the UUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 74.3oF with a humidity of 69%.

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall.

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 5 of 11

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS:

FIELD STRENGTH of Fundamental:	FIELD STRENGTH of Harmonics	S15.209	
902-928 MHz	30 - 88 MHz	40 dBuV/m @3M	
2.4-2.4835 GHz	88 -216 MHz	43.5	
94 dBuV/m @3m	216 -960 MHz	46	
	54 dBuV/m @3m	ABOVE 960 MHz	54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

TEST RESULTS: This unit DOES meet the FCC requirements.

TEST DATA:

Emission Frequency MHz	Meter Reading dBuV	ANT. POLARITY	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
PEAK							
916.00	76.4	H	3.84	24.71		104.95	-10.95
QUASI PEAK							
916.00	65.0	H	3.84	24.71		93.55	0.45
PEAK							
1,832.00	32.2	H	2.82	28.03	15.40	47.65	6.35
1,832.00	36.9	V	2.82	28.03	15.40	52.35	1.65
2,748.00	33.5	V	3.60	29.95	15.40	51.65	2.35
2,748.00	33.9	H	3.60	29.95	15.40	52.05	1.95
3,664.00	24.2	H	4.46	32.09	15.40	45.35	8.65
3,664.00	28.2	V	4.46	32.09	15.40	49.35	4.65
4,580.00	24.4	H	5.61	33.36	15.40	47.97	6.03
5,496.00	24.9	H	6.37	34.90	15.40	50.77	3.23
5,496.00	26.1	V	6.37	34.90	15.40	51.97	2.03

TEST PROCEDURE: ANSI STANDARD C63.4-1992 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

PERFORMED BY: NAM NGUYEN

DATE: MAY 19, 2003

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 6 of 11

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.249

REQUIREMENTS: The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

THE PLOTS ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THIS DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division. The horizontal scale is set to 50 kHz per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: JOSEPH SCOGLIO

DATE: 4/22/2003


APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 7 of 11

OCCUPIED BANDWIDTH PLOT

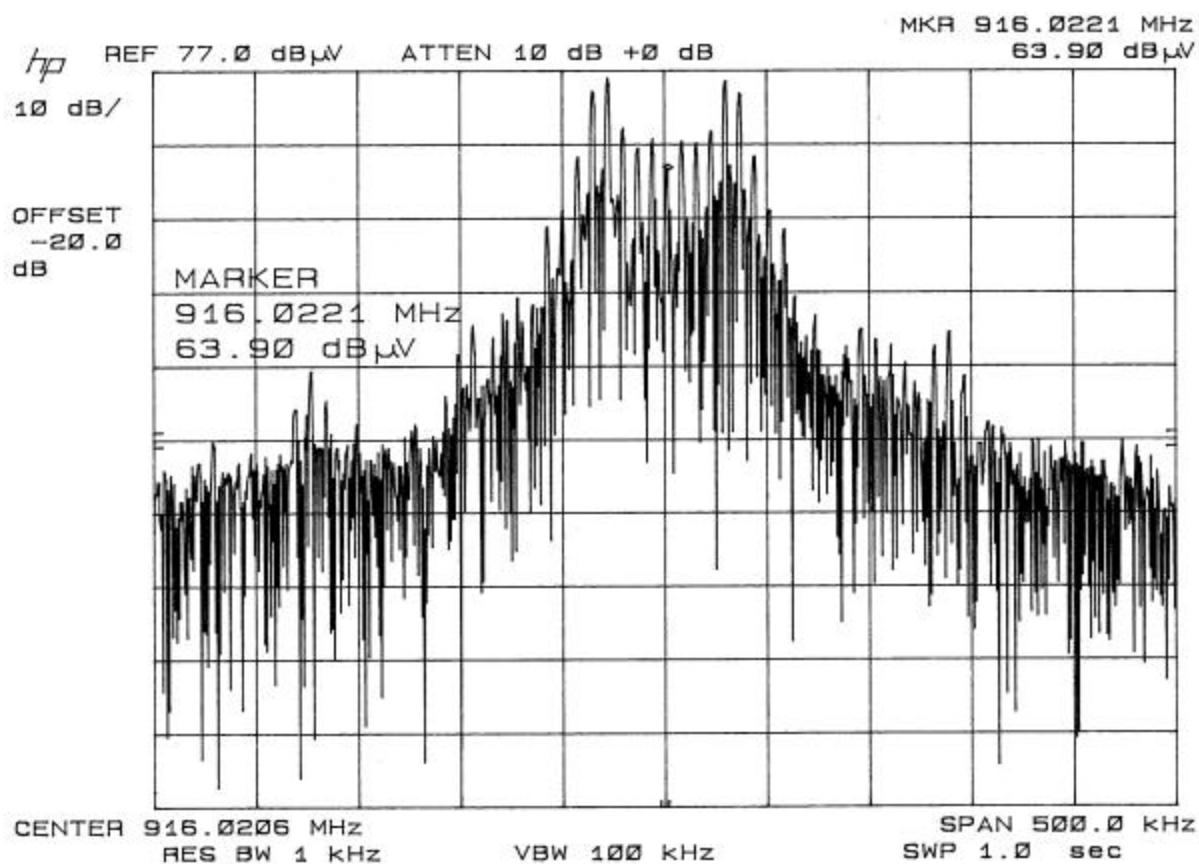

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 8 of 11

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NO.: 15.107

REQUIREMENTS:	QUASI-PEAK	AVERAGE
.15 - 0.5 MHz	66-56 dBuV	56-46 dBuV
0.5 - 5.0	56	46
5.0 - 30.	60	50

TEST PROCEDURE: ANSI STANDARD C63.4-1992. The spectrum was scanned from .15 to 30 MHz.

THE HIGHEST EMISSION READ FOR LINE 1 WAS 153 uV @ 390 kHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 124 uV @ 390 kHz.

THE PLOTS ON THE NEXT PAGE REPRESENT THE EMISSIONS READ FOR POWERLINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

PERFORMED BY: JOSEPH SCOGLIO

DATE: 4/22/2003


APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 9 of 11

POWER LINE CONDUCTED PLOT - LINE 1

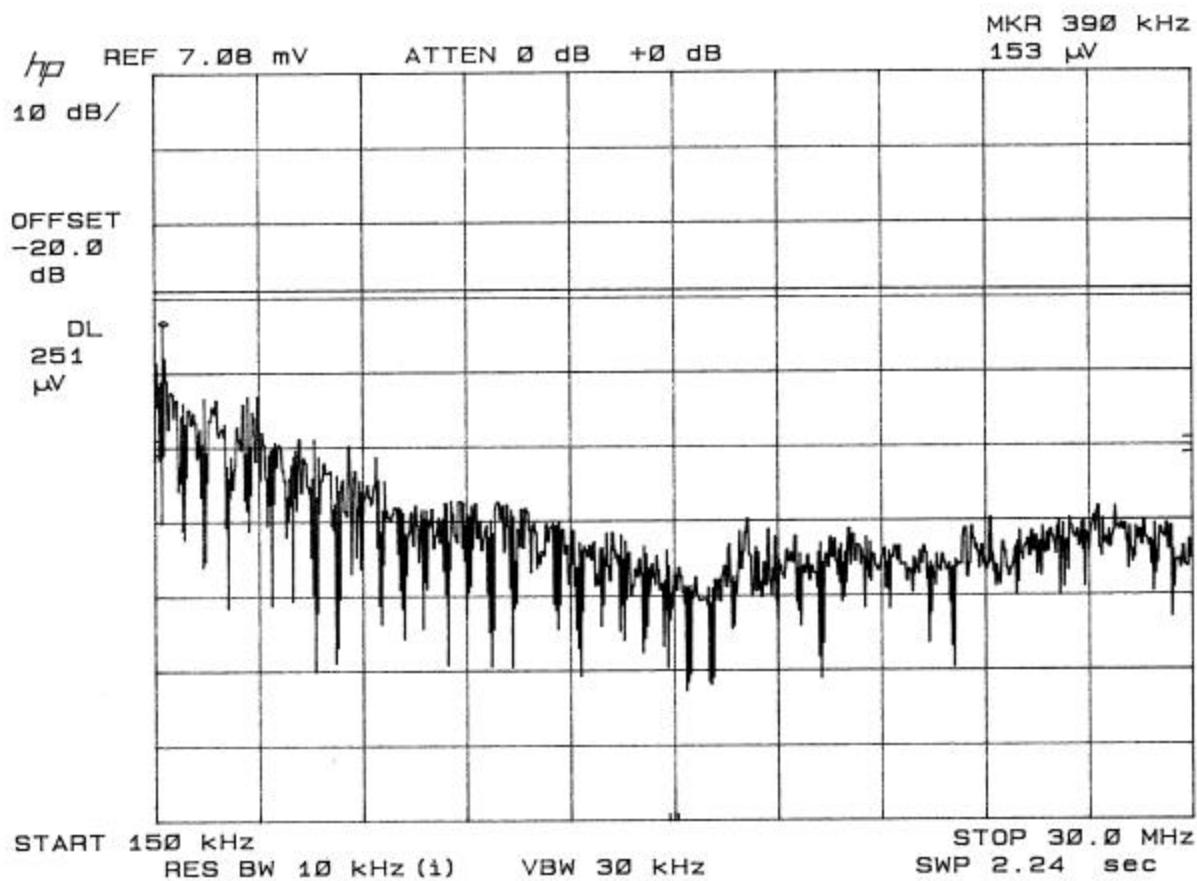


APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 10 of 11

POWER LINE CONDUCTED PLOT - LINE 2

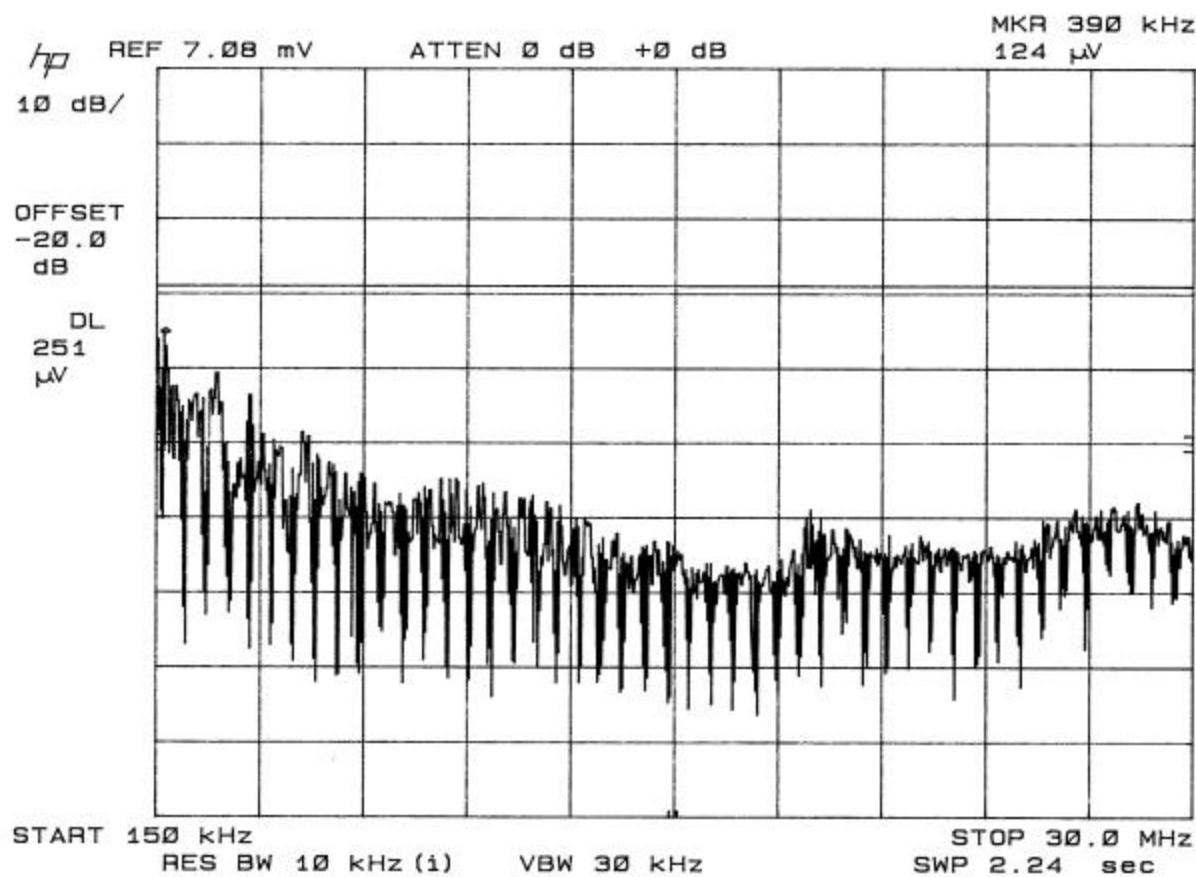

APPLICANT: LIFEVINE, INC.

FCC ID: Q5VCP1000

REPORT #: L/LIFEVINE\311ZAUT3\311ZAUT3TestReport.doc

Page 11 of 11